

FCC REPORT

(GSM)

Applicant: SWAGTEK

Address of Applicant: 10205 NW 19th St. Suite 101, Miami, FL, 33172

Equipment Under Test (EUT)

Product Name: 1.8 inch Feature Phone

Model No.: B3S, Star-S, UM3S

Trade mark: LOGIC, iSWAG, UNONU

FCC ID: O55184518

Applicable standards: FCC CFR Title 47 Part 2
FCC CFR Title 47 Part 22 Subpart H
FCC CFR Title 47 Part 24 Subpart E

Date of sample receipt: 09 Nov., 2018

Date of Test: 09 Nov., to 27 Nov., 2018

Date of report issued: 28 Nov., 2018

Test Result: PASS*

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Bruce Zhang
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the CCIS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2. Version

| Version No. | Date | Description |
|-------------|---------------|-------------|
| 00 | 28 Nov., 2018 | Original |
| | | |
| | | |
| | | |
| | | |

Tested by:

YT Yang

Date:

28 Nov., 2018

Test Engineer

Reviewed by:

Wimer Zhang

Date:

28 Nov., 2018

Project Engineer

3. Contents

| | Page |
|---|-----------|
| 1. COVER PAGE | 1 |
| 2. VERSION | 2 |
| 3. CONTENTS | 3 |
| 4. TEST SUMMARY | 4 |
| 5. GENERAL INFORMATION | 5 |
| 5.1 CLIENT INFORMATION..... | 5 |
| 5.2 GENERAL DESCRIPTION OF E.U.T..... | 5 |
| 5.3 TEST MODES..... | 7 |
| 5.4 DESCRIPTION OF SUPPORT UNITS..... | 7 |
| 5.5 MEASUREMENT UNCERTAINTY..... | 7 |
| 5.6 LABORATORY FACILITY..... | 7 |
| 5.7 LABORATORY LOCATION..... | 7 |
| 5.8 TEST INSTRUMENTS LIST..... | 8 |
| 6. TEST RESULTS | 9 |
| 6.1 CONDUCTED OUTPUT POWER, ERP AND EIRP..... | 9 |
| 6.2 PEAK-TO-AVERAGE POWER RATIO..... | 11 |
| 6.3 OCCUPY BANDWIDTH..... | 13 |
| 6.4 MODULATION CHARACTERISTIC..... | 17 |
| 6.5 OUT OF BAND EMISSION AT ANTENNA TERMINALS..... | 17 |
| 6.6 FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT..... | 21 |
| 6.7 FREQUENCY STABILITY V.S. TEMPERATURE MEASUREMENT..... | 24 |
| 6.8 FREQUENCY STABILITY V.S. VOLTAGE MEASUREMENT..... | 26 |
| 7 TEST SETUP PHOTO | 28 |
| 8 EUT CONSTRUCTIONAL DETAILS | 29 |

4. Test Summary

| Test Item | Section in CFR 47 | Result |
|--|--|--------------------------------------|
| RF Exposure (SAR) | Part 1.1307 Part 2.1093 | Pass (Please refer to SAR Report) |
| RF Output Power | Part 2.1046 Part 22.913 (a)(2) Part 24.232 (c) | Pass |
| Peak-to-Average Power Ratio | Part 24.232 (d) | Pass |
| Modulation Characteristics | Part 2.1047 | Pass |
| 99% & -26 dB Occupied Bandwidth | Part 2.1049 Part 22.917(b) Part 24.238(b) | Pass |
| Out of band emission at antenna terminals | Part 2.1053 Part 22.917 (a) Part 24.238 (a) | Pass |
| Field strength of spurious radiation | Part 22.917 (a) Part 24.238 (a) | Pass |
| Frequency stability vs. temperature | Part 22.355 Part 24.235 Part 2.1055(a)(1)(b) | Pass |
| Frequency stability vs. voltage | Part 22.355 Part 24.235 Part 2.1055(d)(2) | Pass |
| <i>Pass: The EUT complies with the essential requirements in the standard.</i> | | |

5. General Information

5.1 Client Information

| | |
|------------------------|---|
| Applicant: | SWAGTEK |
| Address: | 10205 NW 19th St. Suite 101, Miami, FL, 33172 |
| Manufacturer/ Factory: | SWAGTEK |
| Address: | 10205 NW 19th St. Suite 101, Miami, FL, 33172 |

5.2 General Description of E.U.T.

| | |
|----------------------------|---|
| Product Name: | 1.8 inch Feature Phone |
| Model No.: | B3S, Star-S, UM3S |
| Operation Frequency range: | GSM 850: 824.20MHz-848.80MHz PCS1900: 1850.20MHz-1909.80MHz |
| Modulation type: | GSM/GPRS: GMSK |
| Antenna type: | Internal Antenna |
| Antenna gain: | GSM 850: -1.1 dBi PCS 1900: -1.2 dBi |
| Power supply: | Rechargeable Li-ion Battery DC3.7V-600mAh |
| AC adapter: | Model: B3S Input: AC100-240V, 50/60Hz, 0.2A Output: DC 5.0V, 500mA |
| Remark: | Item No.: B3S, Star-S, UM3S were identical inside, the electrical circuit design, layout, components used and internal wiring. The only difference is that one product has three models, each model corresponds to one brand, three The trademarks are LOGIC and iSWAG and UNONU, the B3S model corresponds to the trademark LOGIC, the Star-S model corresponds to the trademark iSWAG, and the UM3S model corresponds to the trademark UNONU. |
| Test Sample Condition: | The test samples were provided in good working order with no visible defects. |

Operation Frequency List:

| GSM 850 | | PCS1900 | |
|---------|-----------------|---------|-----------------|
| Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 128 | 824.20 | 512 | 1850.20 |
| 129 | 824.40 | 513 | 1850.40 |
| | | | |
| 189 | 836.40 | 660 | 1879.80 |
| 190 | 836.60 | 661 | 1880.00 |
| 191 | 836.80 | 662 | 1880.20 |
| ... | ... | ... | ... |
| 250 | 848.60 | 809 | 1909.60 |
| 251 | 848.80 | 810 | 1909.80 |

Regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

| GSM850 | | | PCS1900 | | |
|-----------------|----------------|--------|-----------------|----------------|---------|
| Channel | Frequency(MHz) | | Channel | Frequency(MHz) | |
| Lowest channel | 128 | 824.20 | Lowest channel | 512 | 1850.20 |
| Middle channel | 190 | 836.60 | Middle channel | 661 | 1880.00 |
| Highest channel | 251 | 848.80 | Highest channel | 810 | 1909.80 |

5.3 Test modes

| Operating Environment: | |
|---|--|
| Temperature: | Normal: 15°C ~ 35°C, Extreme: -30°C ~ +50°C |
| Humidity: | 20 % ~ 75 % RH |
| Atmospheric Pressure: | 1008 mbar |
| Voltage: | Nominal: 3.7Vdc, Extreme: Low 3.5 Vdc, High 4.2 Vdc |
| Test mode: | |
| GSM mode | Keep the EUT communication with simulated station in GSM mode |
| GPRS mode | Keep the EUT communication with simulated station in GPRS mode |
| Remark: 1. The EUT has been tested under continuous transmitting mode. Channel Low, Mid and High for each type band with rated data rate were chosen for full testing. The field strength of spurious radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for these modes with power adaptor, earphone and Data cable. Just the worst case position (H mode) shown in report. 2. During the test, pre-test SIM 1 and SIM 2, found SIM 1 was worse case mode, The report only reflects the worst mode. | |

5.4 Description of Support Units

| Test Equipment | Manufacturer | Model No. | Serial No. |
|-------------------|--------------|-----------|------------|
| Simulated Station | Anritsu | MT8820C | 6201026545 |

5.5 Measurement Uncertainty

| Parameters | Expanded Uncertainty |
|-------------------------------------|----------------------|
| Radiated Emission (9kHz ~ 30MHz) | ±2.76 dB (k=2) |
| Radiated Emission (30MHz ~ 1000MHz) | ±4.28 dB (k=2) |
| Radiated Emission (1GHz ~ 18GHz) | ±5.72 dB (k=2) |
| Radiated Emission (18GHz ~ 40GHz) | ±2.88 dB (k=2) |

5.6 Laboratory Facility

| |
|---|
| <p>The test facility is recognized, certified, or accredited by the following organizations:</p> <ul style="list-style-type: none"> FCC - Registration No.: 727551 Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been accredited as a testing laboratory by FCC (Federal Communications Commission). The Registration No. is 727551. IC - Registration No.: 10106A-1 The 3m Semi-anechoic chamber of Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1. CNAS - Registration No.: CNAS L6048 Shenzhen Zhongjian Nanfang Testing Co., Ltd. is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L6048. A2LA - Registration No.: 4346.01 This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: https://portal.a2la.org/scopepdf/4346-01.pdf |
|---|

5.7 Laboratory Location


| |
|--|
| <p>Shenzhen Zhongjian Nanfang Testing Co., Ltd. Address: No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road, Bao'an District, Shenzhen, Guangdong, China Tel: +86-755-23118282, Fax: +86-755-23116366 Email: info@ccis-cb.com, Website: http://www.ccis-cb.com</p> |
|--|

5.8 Test Instruments list

| Test Equipment | Manufacturer | Model No. | Serial No. | Cal. Date (mm-dd-yy) | Cal. Due date (mm-dd-yy) |
|------------------------------|-----------------|---------------|--------------------|----------------------|--------------------------|
| 3m SAC | SAEMC | 9m*6m*6m | 966 | 07-22-2017 | 07-21-2020 |
| BiConiLog Antenna | SCHWARZBECK | VULB9163 | 497 | 03-16-2018 | 03-15-2019 |
| Biconical Antenna | SCHWARZBECK | VUBA9117 | 359 | 06-22-2017 | 06-21-2020 |
| Horn Antenna | SCHWARZBECK | BBHA9120D | 916 | 03-16-2018 | 03-15-2019 |
| Horn Antenna | SCHWARZBECK | BBHA9120D | 1805 | 06-22-2017 | 06-21-2020 |
| Horn Antenna | SCHWARZBECK | BBHA 9170 | BBHA9170582 | 11-21-2017 | 11-20-2018 |
| | | | | 11-21-2018 | 11-20-2019 |
| EMI Test Software | AUDIX | E3 | Version: 6.110919b | | |
| Pre-amplifier | HP | 8447D | 2944A09358 | 03-07-2018 | 03-06-2019 |
| Pre-amplifier | CD | PAP-1G18 | 11804 | 03-07-2018 | 03-06-2019 |
| Spectrum analyzer | Rohde & Schwarz | FSP30 | 101454 | 03-07-2018 | 03-06-2019 |
| Spectrum analyzer | Rohde & Schwarz | FSP40 | 100363 | 11-21-2017 | 11-20-2018 |
| | | | | 11-21-2018 | 11-20-2019 |
| EMI Test Receiver | Rohde & Schwarz | ESRP7 | 101070 | 03-07-2018 | 03-06-2019 |
| Spectrum Analyzer | Agilent | N9020A | MY50510123 | 11-10-2017 | 11-09-2018 |
| | | | | 11-10-2018 | 11-09-2019 |
| Signal Generator | Rohde & Schwarz | SMX | 835454/016 | 03-07-2018 | 03-06-2019 |
| Signal Generator | R&S | SMR20 | 1008100050 | 03-07-2018 | 03-06-2019 |
| RF Switch Unit | MWRFTTEST | MW200 | N/A | N/A | N/A |
| Test Software | MWRFTTEST | MTS8200 | Version: 2.0.0.0 | | |
| Cable | ZDECL | Z108-NJ-NJ-81 | 1608458 | 03-07-2018 | 03-06-2019 |
| Cable | MICRO-COAX | MFR64639 | K10742-5 | 03-07-2018 | 03-06-2019 |
| Cable | SUHNER | SUCOFLEX100 | 58193/4PE | 03-07-2018 | 03-06-2019 |
| DC Power Supply | XinNuoEr | WYK-10020K | 1409050110020 | 10-31-2018 | 10-30-2019 |
| Temperature Humidity Chamber | HengPu | HPGDS-500 | 20140828008 | 09-24-2018 | 09-23-2019 |
| Simulated Station | Rohde & Schwarz | CMW500 | 140493 | 07-16-2018 | 07-15-2019 |

6. Test results


6.1 Conducted Output Power, ERP and EIRP
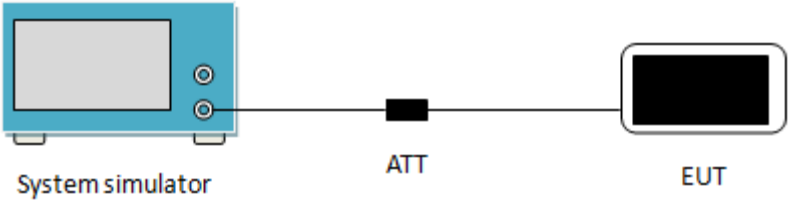
| | |
|-------------------|---|
| Test Requirement: | FCC part 22.913(a)(2), FCC part 24.232(c) |
| Test Method: | ANSI/TIA-603-D 2010 |
| Limit: | GSM 850: 7W, PCS 1900: 2W |
| Test setup: |  <p>The diagram illustrates the test setup. On the left is a blue 'System simulator' with a screen and two ports. A cable connects it to a black 'ATT' (attenuator) block. Another cable connects the 'ATT' to a black 'EUT' (Equipment Under Test) device.</p> |
| Test Procedure: | The transmitter output was connected to a calibrated attenuator, the other end of which was connected to the simulated station. Transmitter output power was read off in dBm. |
| Test Instruments: | Refer to section 5.8 for details |
| Test mode: | Refer to section 5.3 for details |
| Test results: | Passed |

Measurement Data:

| EUT Mode | Burst Average power (dBm) | | |
|---|---------------------------|---------------|---------------|
| | 128 | 190 | 251 |
| | 824.20 (MHz) | 836.60 (MHz) | 848.80 (MHz) |
| GSM 850 | 32.90 | 32.68 | 32.72 |
| GPRS 850 (1 Uplink slot) | 32.93 | 32.72 | 32.72 |
| GPRS 850 (2 Uplink slot) | 31.01 | 31.13 | 31.20 |
| GPRS 850 (3 Uplink slot) | 29.53 | 29.61 | 29.69 |
| GPRS 850 (4 Uplink slot) | 28.01 | 28.20 | 20.29 |
| Antenna Gain (dBi) | -1.1 | | |
| Max. ERP (dBm) | 29.68 | | |
| ERP Limit (dBm) | 38.45 | | |
| | | | |
| EUT Mode | Burst Average power (dBm) | | |
| | 512 | 661 | 810 |
| | 1850.20 (MHz) | 1880.00 (MHz) | 1909.80 (MHz) |
| PCS 1900 | 30.70 | 30.66 | 30.61 |
| GPRS 1900 (1 Uplink slot) | 30.69 | 30.68 | 30.63 |
| GPRS 1900 (2 Uplink slot) | 28.44 | 28.45 | 28.43 |
| GPRS 1900 (3 Uplink slot) | 26.86 | 26.92 | 26.88 |
| GPRS 1900 (4 Uplink slot) | 25.51 | 25.54 | 25.48 |
| Antenna Gain (dBi) | -1.2 | | |
| Max. EIRP (dBm) | 29.50 | | |
| EIRP Limit (dBm) | 33.00 | | |
| <i>Note: EIRP (dBm) = Burst Average power (dBm) + Antenna Gain (dBi).</i> <i>ERP (dBm) = EIRP (dBm) - 2.15 (dB).</i> | | | |


6.2 Peak-to-Average Power Ratio
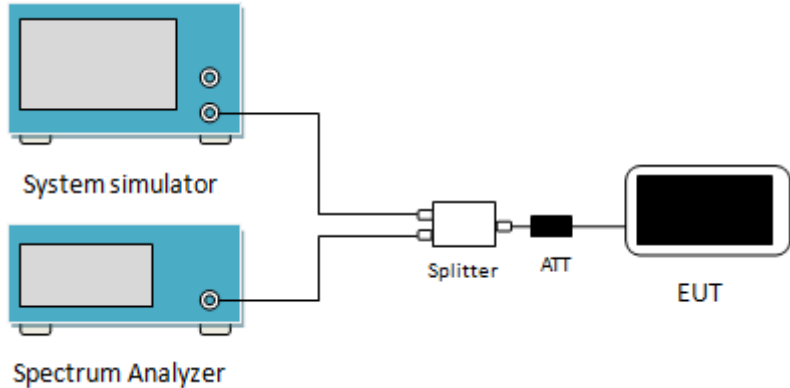
| | |
|-------------------|--|
| Test Requirement: | FCC part 24.232(d) |
| Test Method | ANSI/TIA-603-D 2010 |
| Limit: | The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB. |
| Test setup: |  <p>The diagram shows a test setup. On the left, there are two blue rectangular units: the top one is labeled 'System simulator' and the bottom one is labeled 'Spectrum Analyzer'. Both have a screen and two circular ports on the right side. A single cable connects the two ports of the System simulator to the top port of a white rectangular 'Splitter'. Another cable connects the two ports of the Spectrum Analyzer to the bottom port of the Splitter. From the right side of the Splitter, a cable goes to a black rectangular 'ATT' (Attenuator). From the right side of the ATT, a cable goes to a white rectangular 'EUT' (Equipment Under Test) with a black screen.</p> |
| Test Procedure: | <ol style="list-style-type: none"> 1 The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. 2 Set the CCDF option in spectrum analyzer, RBW \geq OBW, 3 Set the EUT working in highest power level, measured and recorded the 0.1% as PAPR level. 4 Repeat step 1~3 at other frequency and modulations. |
| Test Instruments: | Refer to section 5.8 for details |
| Test mode: | Refer to section 5.3 for details |
| Test results: | Passed |


Measurement Data:

| Modulation | Test channel | PAPR |
|------------|--------------|------|
| GSM 850 | 190 | 0.05 |
| PCS 1900 | 661 | 0.13 |

Test plots as below:

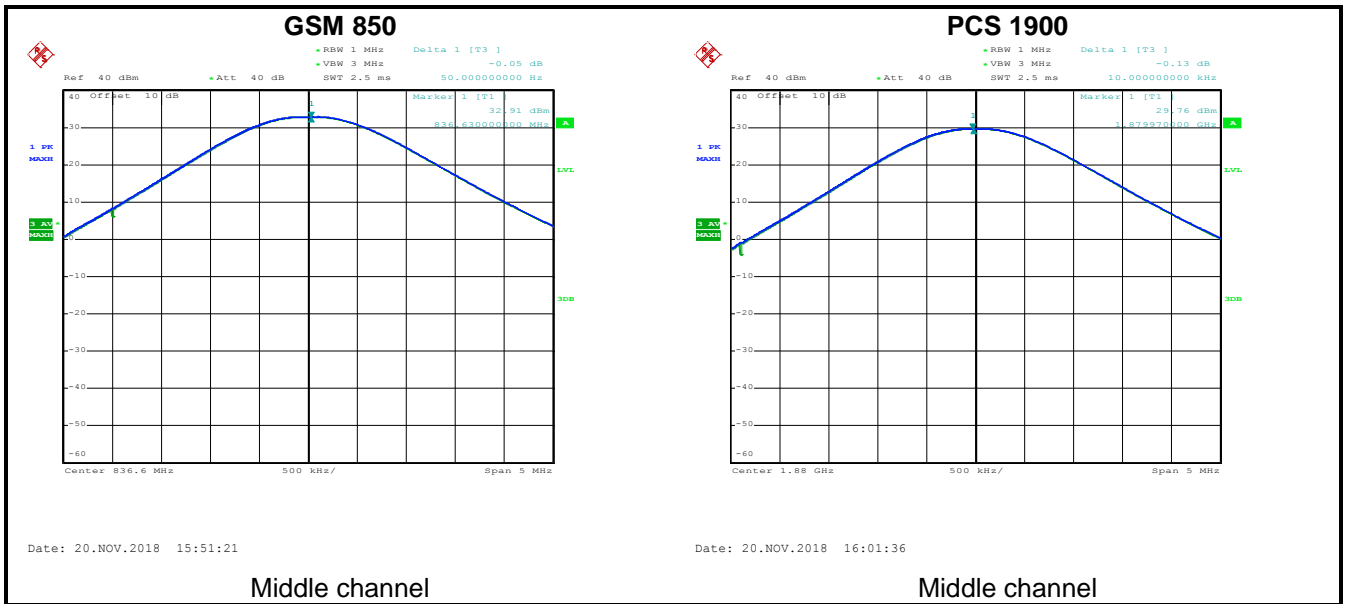

6.3 Occupy Bandwidth
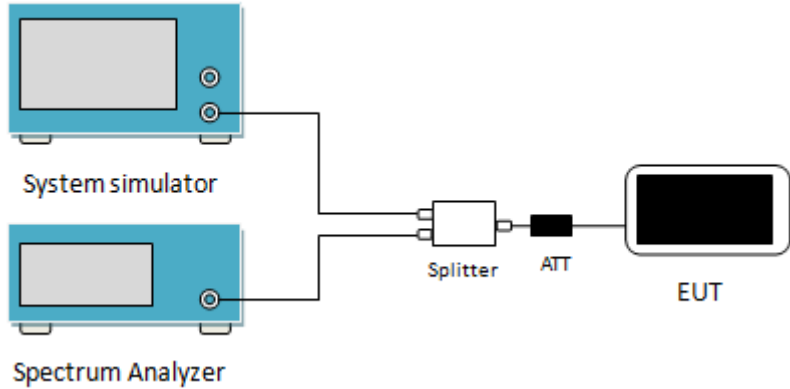
| | |
|-------------------|--|
| Test Requirement: | FCC part 22.917(b), FCC part 24.238(b) |
| Test Method: | ANSI/TIA-603-D 2010 |
| Test setup: |  <p>The diagram illustrates the test setup. On the left, there are two blue rectangular units: the top one is labeled 'System simulator' and the bottom one is labeled 'Spectrum Analyzer'. Both have a screen and two circular ports on the right side. A single line from the top port of the System simulator and a single line from the top port of the Spectrum Analyzer merge into a single line that enters a white rectangular 'Splitter' box. From the right side of the Splitter, a line goes to a black rectangular 'ATT' (Attenuator) box. From the right side of the ATT, a line goes to a white rectangular 'EUT' (Equipment Under Test) box, which has a black screen on its front.</p> |
| Test Procedure: | <ol style="list-style-type: none"> 1. The EUT's output RF connector was connected with a short cable to the spectrum analyzer 2. RBW was set to about 1% of emission BW, VBW= 3 times RBW. 3. -26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace. |
| Test Instruments: | Refer to section 5.8 for details |
| Test mode: | Refer to section 5.3 for details |
| Test results: | Passed |

Measurement Data:

| EUT Mode | Channel | Frequency (MHz) | 99% Occupy bandwidth (kHz) | -26dB bandwidth (kHz) |
|----------|---------|-----------------|----------------------------|-----------------------|
| GSM 850 | 128 | 824.2 | 244 | 320 |
| | 190 | 836.6 | 244 | 314 |
| | 251 | 848.8 | 250 | 322 |
| PCS 1900 | 512 | 1850.2 | 244 | 318 |
| | 661 | 1880.0 | 244 | 318 |
| | 810 | 1909.8 | 250 | 314 |


Note:

GSM & GPRS use the same modulation technical (GMSK), and with the same channels, so the 99% OBW and the -26dB of GPRS not performed.

Test plot as follows:


GSM 850

99% Occupy bandwidth

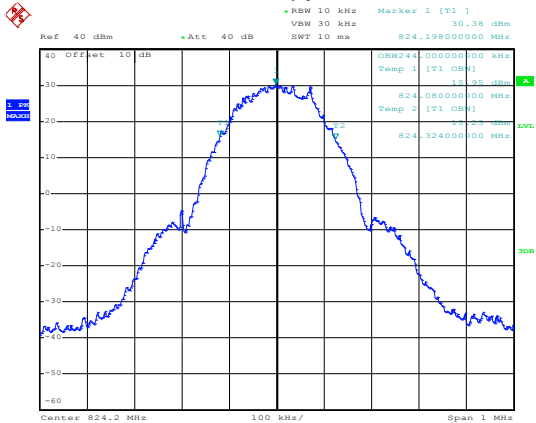


Date: 20.NOV.2018 15:44:44

26dB Emission Bandwidth

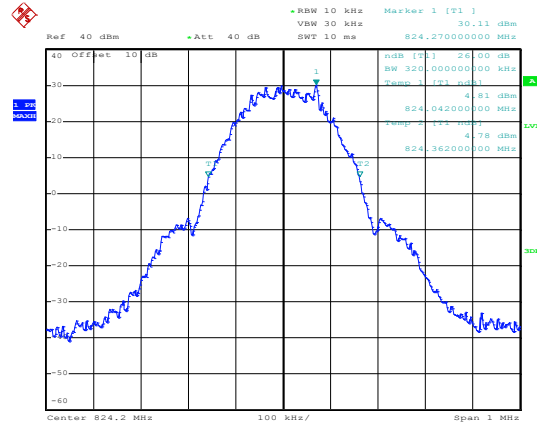


Date: 20.NOV.2018 15:45:05

Lowest channel

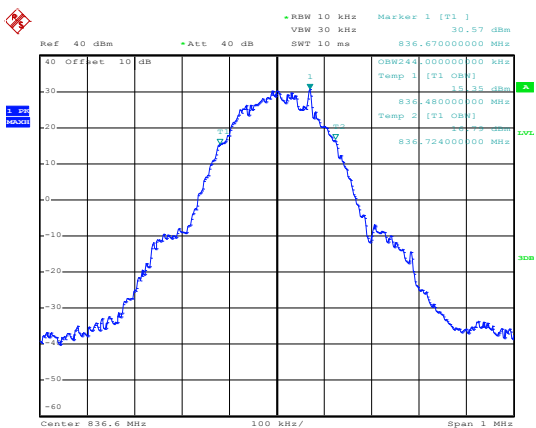


Date: 20.NOV.2018 15:45:41

Lowest channel

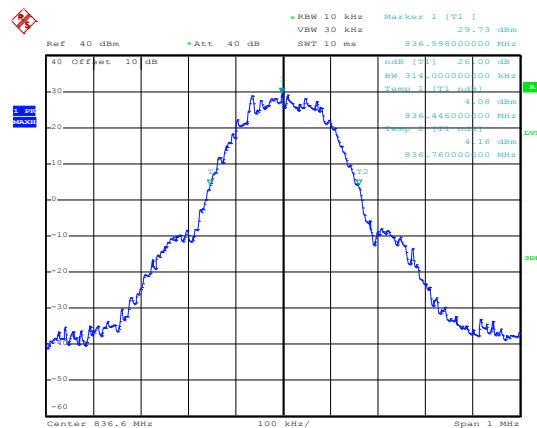


Date: 20.NOV.2018 15:45:24

Middle channel

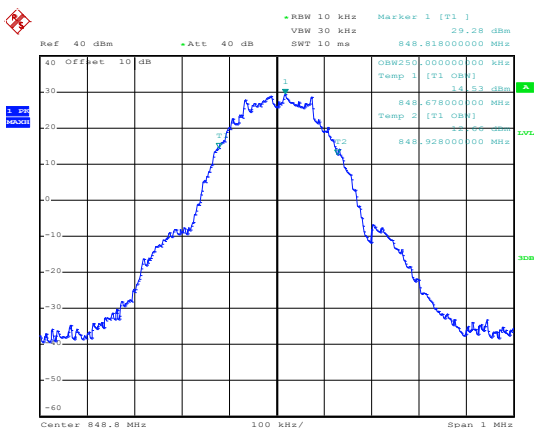

Date: 20.NOV.2018 15:46:06

Middle channel

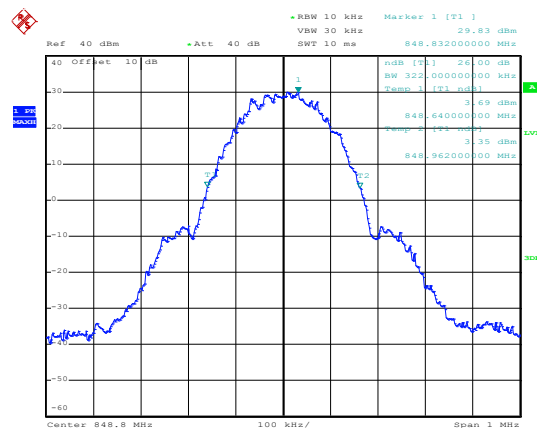


Date: 20.NOV.2018 15:46:34

Highest channel

Highest channel


PCS 1900

99% Occupancy bandwidth

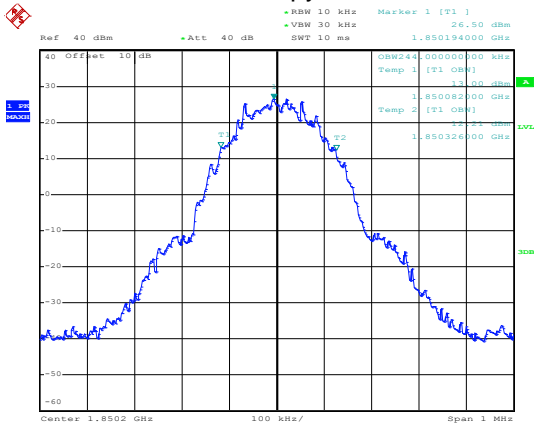


Date: 20.NOV.2018 16:03:13

26dB Emission Bandwidth

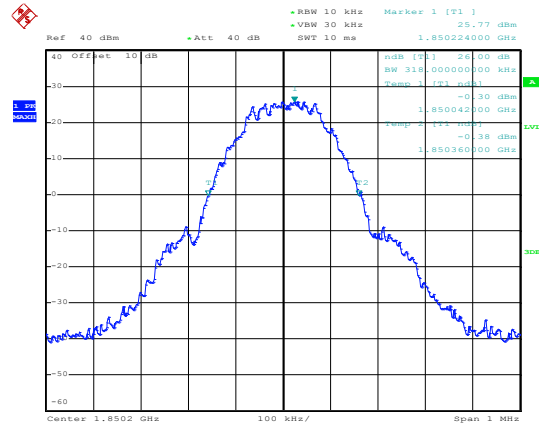


Date: 20.NOV.2018 16:02:59

Lowest channel

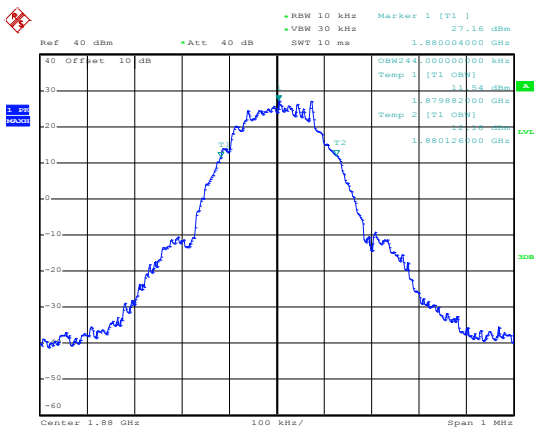


Date: 20.NOV.2018 16:02:12

Lowest channel

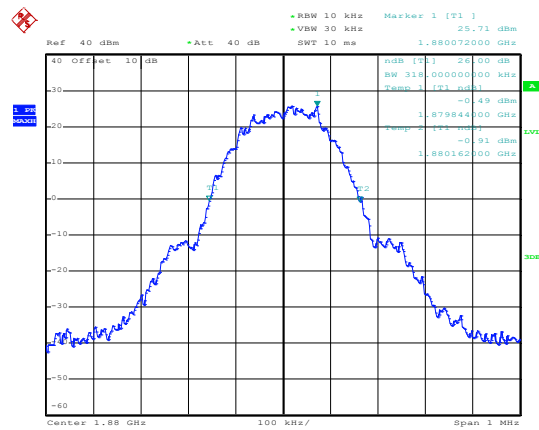


Date: 20.NOV.2018 16:02:25

Middle channel

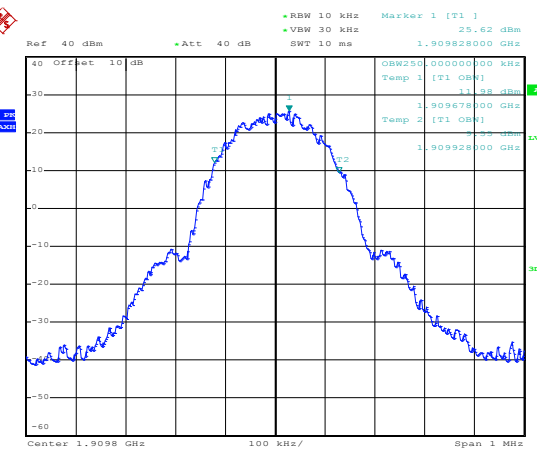

Date: 20.NOV.2018 16:03:42

Middle channel

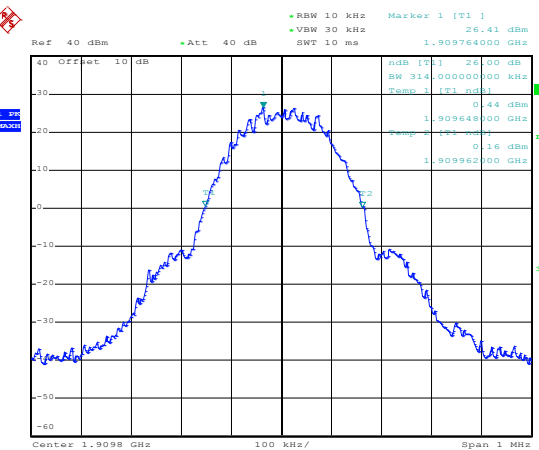

Date: 20.NOV.2018 16:03:56


Highest channel

Highest channel


6.4 Modulation Characteristic

According to FCC § 2.1047(d), Part 22H & 24E there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.


6.5 Out of band emission at antenna terminals
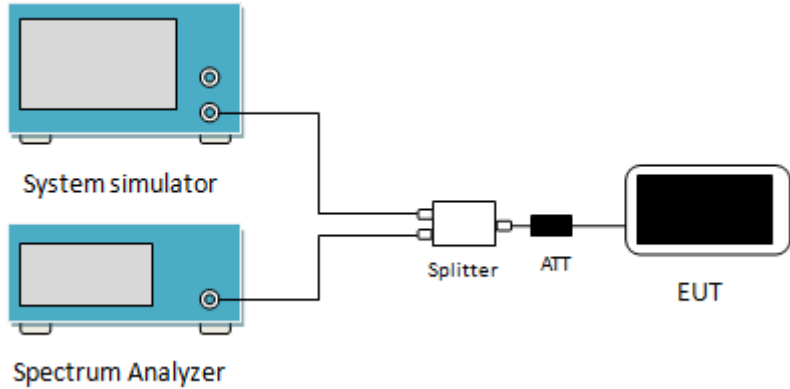
| | |
|-------------------|--|
| Test Requirement: | FCC part 22.917(a), FCC part 24.238(a) |
| Test Method: | ANSI/TIA-603-D 2010 |
| Limit: | -13dBm |
| Test setup: |  <p>The diagram illustrates the test setup. On the left, there are two blue rectangular units: the top one is labeled 'System simulator' and the bottom one is labeled 'Spectrum Analyzer'. Both have a screen and two circular ports on the right side. A single line connects the right side of the System simulator to the left side of a white rectangular 'Splitter'. Another line connects the right side of the Spectrum Analyzer to the left side of the same 'Splitter'. From the right side of the 'Splitter', a line goes to a small black rectangular 'ATT' (attenuator). Finally, a line connects the right side of the 'ATT' to the left side of a white rectangular 'EUT' (Equipment Under Test).</p> |
| Test Procedure: | <ol style="list-style-type: none"> 1 The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. 2 The resolution bandwidth of the spectrum analyzer was set at 100 kHz when below 1GHz, 1MHz when above 1 GHz; sufficient scans were taken to show the out of band Emissions if any up to 10th harmonic. 3 For the out of band: Set the RBW=100 kHz, VBW=300 kHz when below 1 GHz, RBW =1 MHz, VBW=3 MHz when above 1 GHz, Start=30MHz, Stop= 10th harmonic. 4 Band Edge Requirements: In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions. |
| Test Instruments: | Refer to section 5.8 for details |
| Test mode: | Refer to section 5.3 for details |
| Test results: | Passed |


Test plots as follows (Spurious emission):

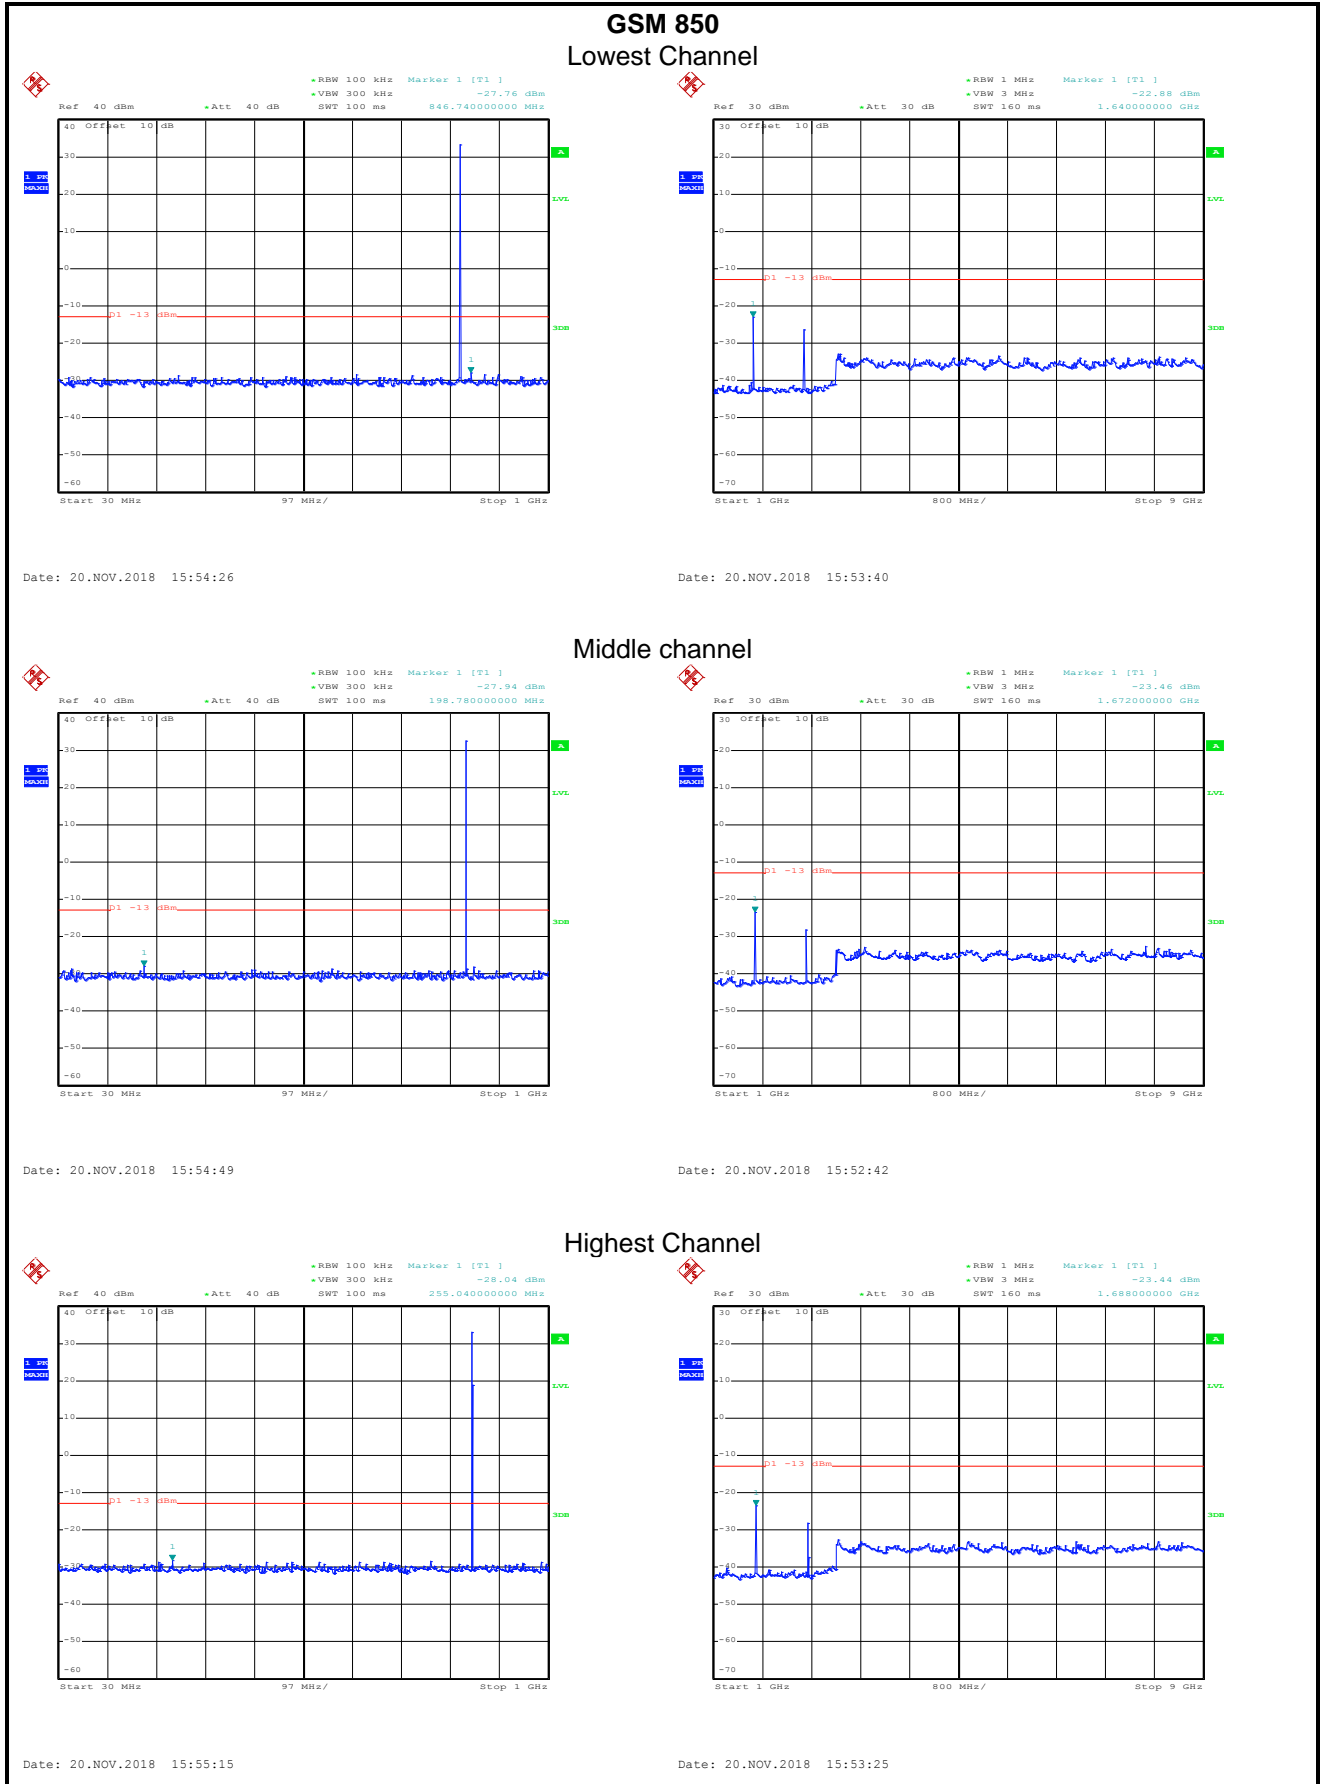

PCS 1900 Lowest Channel

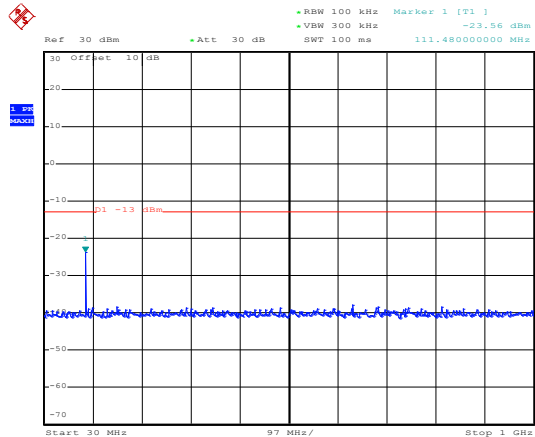


Date: 20.NOV.2018 15:57:27

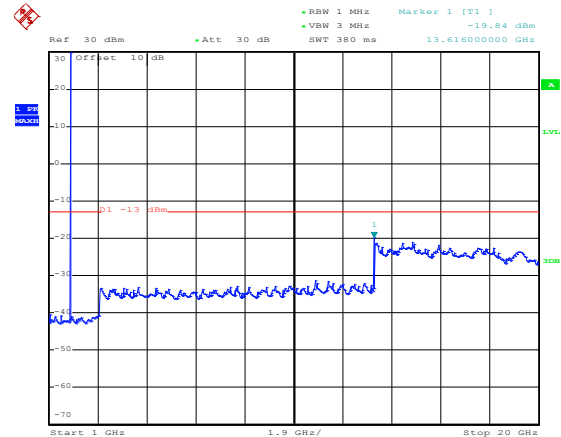


Date: 20.NOV.2018 15:59:38

Middle Channel

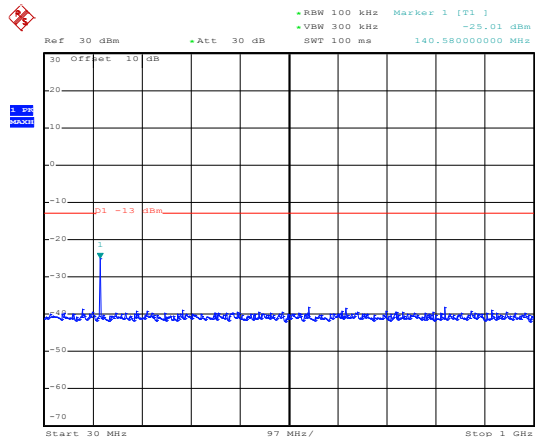


Date: 20.NOV.2018 15:57:45

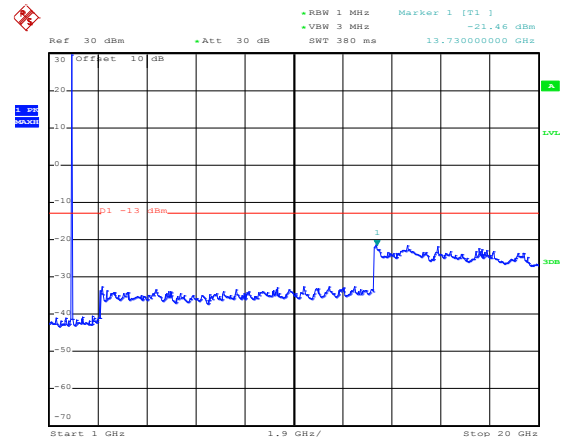


Date: 20.NOV.2018 15:58:55

Highest Channel

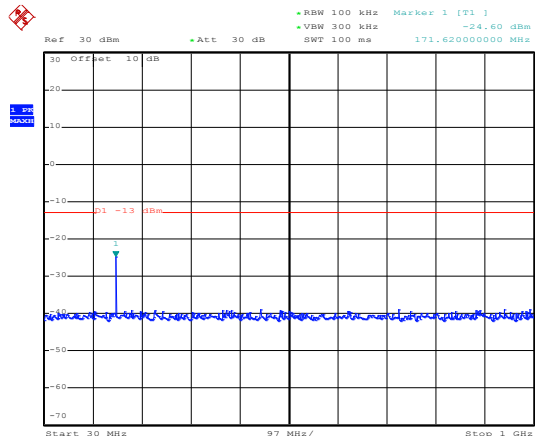


Date: 20.NOV.2018 15:58:00


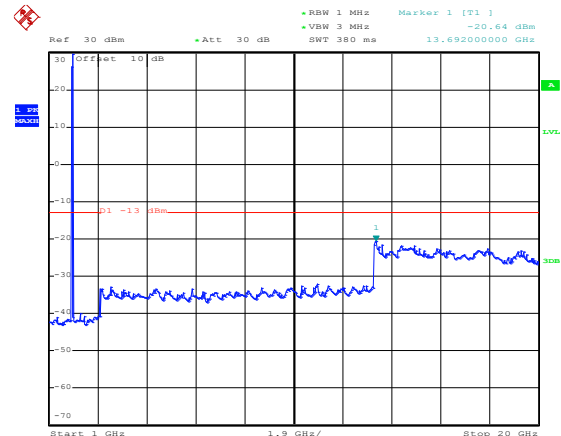


Date: 20.NOV.2018 15:58:37

Band edge emission:

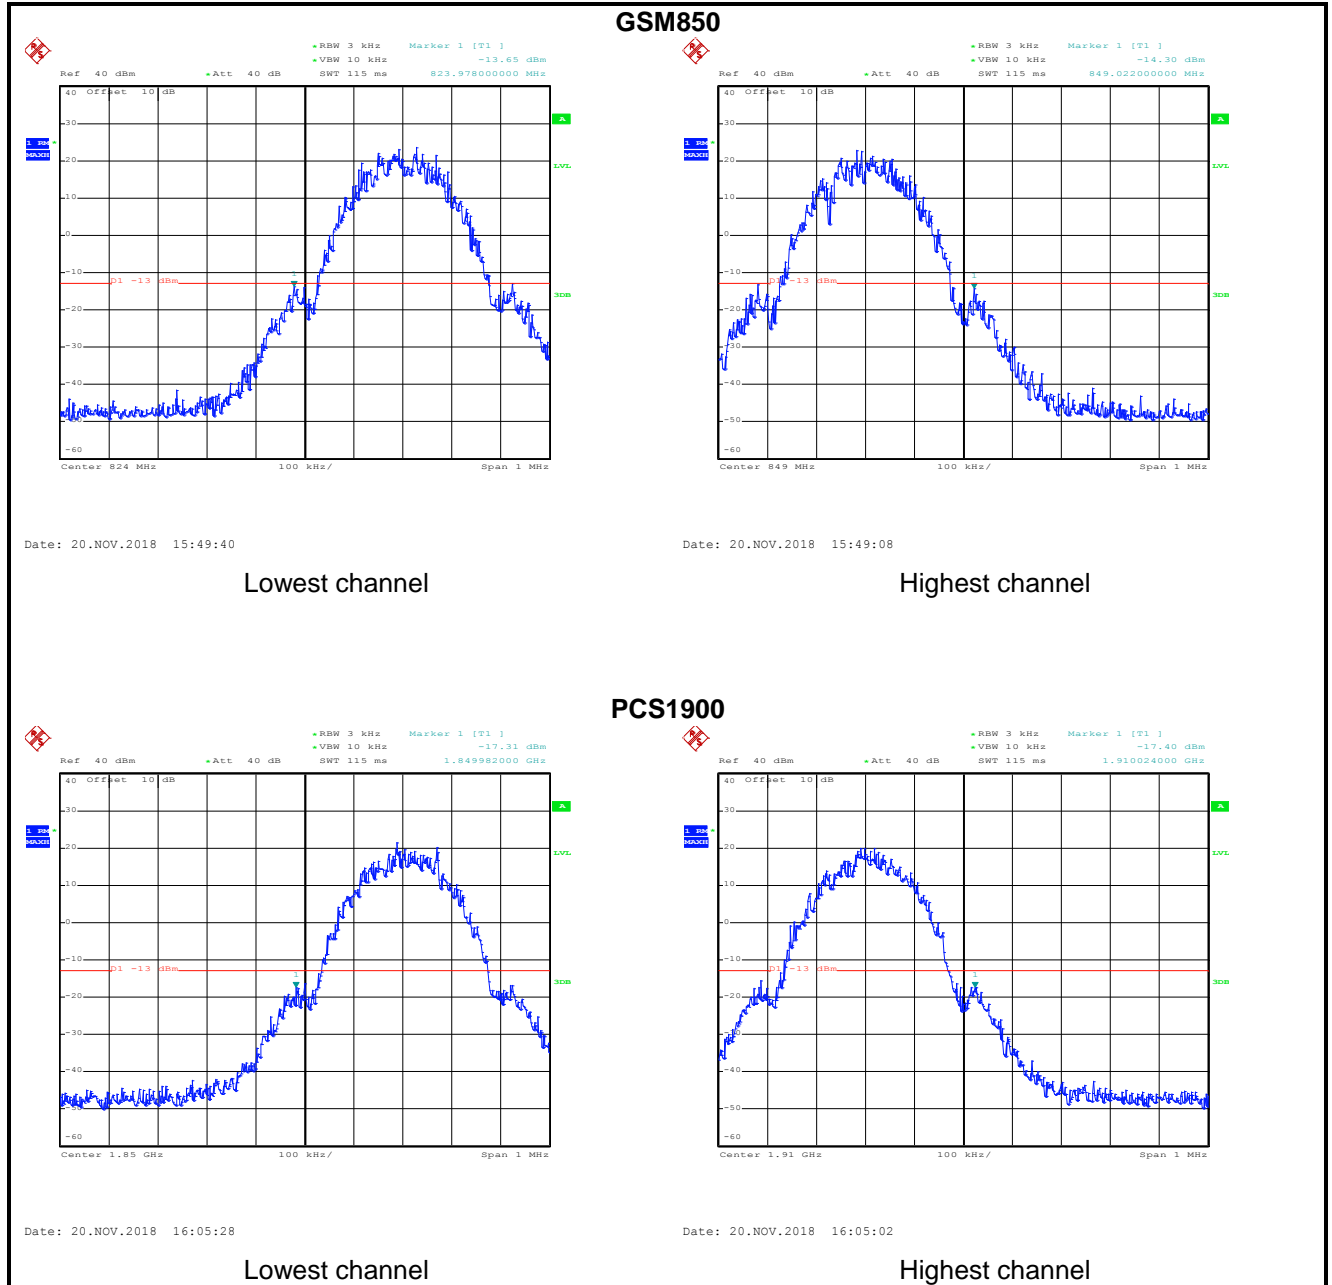

6.6 Field strength of spurious radiation measurement
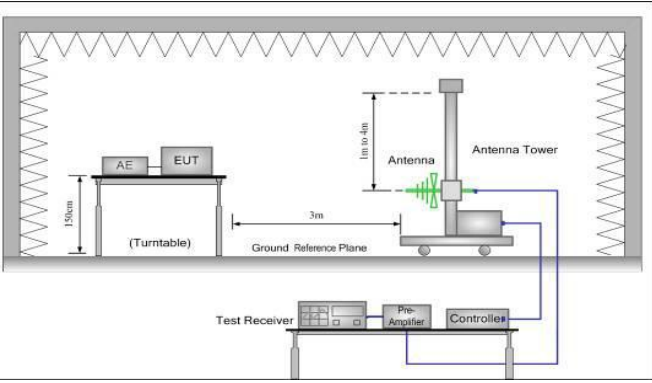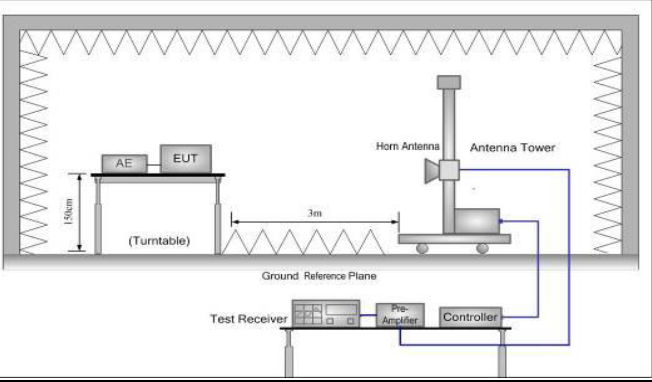
| | |
|-------------------|---|
| Test Requirement: | FCC part 22.917(a), FCC part 24.238(a) |
| Test Method: | ANSI/TIA-603-D 2010 |
| Limit: | -13dBm |
| Test setup: | <p>Below 1GHz</p>  <p>Above 1GHz</p>  |
| Test Procedure: | <ol style="list-style-type: none"> 1. The EUT was placed on an non-conductive turntable using a non-conductive support. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer. 2. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations. 3. The frequency range up to tenth harmonic was investigated for each of three fundamental frequency (low, middle and high channels). Once spurious emission was identified, the power of the emission was determined using the substitution method. 4. The spurious emissions attenuation was calculated as the difference between radiated power at the fundamental frequency and the spurious emissions frequency. $ERP / EIRP = S.G. \text{ output (dBm)} + \text{Antenna Gain(dB/dBi)} - \text{Cable Loss (dB)}$ |
| Test Instruments: | Refer to section 5.8 for details |
| Test mode: | Refer to section 5.3 for details. |
| Test results: | Passed |

Measurement Data (worst case):

| GSM850 | | | | |
|--|-------------------|-------------|-------------|--------|
| Lowest channel | | | | |
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 1648.40 | Vertical | -22.18 | -13.00 | Pass |
| 2472.60 | V | -41.27 | | |
| 3296.80 | V | -42.45 | | |
| 4121.00 | V | -49.63 | | |
| 1648.40 | Horizontal | -32.41 | -13.00 | Pass |
| 2472.60 | H | -42.98 | | |
| 3296.80 | H | -38.12 | | |
| 4121.00 | H | -51.85 | | |
| Middle channel | | | | |
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 1673.20 | Vertical | -22.51 | -13.00 | Pass |
| 2509.80 | V | -36.67 | | |
| 3346.40 | V | -44.38 | | |
| 4183.00 | V | -40.08 | | |
| 1673.20 | Horizontal | -29.78 | -13.00 | Pass |
| 2509.80 | H | -32.50 | | |
| 3346.40 | H | -39.40 | | |
| 4183.00 | H | -35.98 | | |
| Highest channel | | | | |
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 1697.60 | Vertical | -19.80 | -13.00 | Pass |
| 2546.40 | V | -35.74 | | |
| 3395.20 | V | -45.93 | | |
| 4244.00 | V | -39.13 | | |
| 1697.60 | Horizontal | -29.60 | -13.00 | Pass |
| 2546.40 | H | -34.62 | | |
| 3395.20 | H | -40.26 | | |
| 4244.00 | H | -34.41 | | |
| <i>Remark:</i> | | | | |
| 1. The emission levels of below 1 GHz are very lower than the limit and not show in test report. | | | | |

| PCS1900 | | | | |
|--|-------------------|-------------|-------------|--------|
| Lowest channel | | | | |
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 3700.40 | Vertical | -32.32 | -13.00 | Pass |
| 5550.60 | V | -29.69 | | |
| 3700.40 | Horizontal | -31.16 | -13.00 | Pass |
| 5550.60 | H | -30.33 | | |
| Middle channel | | | | |
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 3760.00 | Vertical | -33.30 | -13.00 | Pass |
| 5640.00 | V | -32.72 | | |
| 3760.00 | Horizontal | -31.84 | -13.00 | Pass |
| 5640.00 | H | -34.88 | | |
| Highest channel | | | | |
| Frequency (MHz) | Spurious Emission | | Limit (dBm) | Result |
| | Polarization | Level (dBm) | | |
| 3819.60 | Vertical | -35.96 | -13.00 | Pass |
| 5729.40 | V | -35.92 | | |
| 3819.60 | Horizontal | -31.90 | -13.00 | Pass |
| 5729.40 | H | -36.40 | | |
| <i>Remark:</i> | | | | |
| 1. The emission levels of below 1 GHz are very lower than the limit and not show in test report. | | | | |

6.7 Frequency stability V.S. Temperature measurement

| | |
|-------------------|---|
| Test Requirement: | FCC Part 22.355, FCC Part 24.235, FCC Part 2.1055(a)(1)(b) |
| Test Method: | ANSI/TIA-6-3-D 2010 |
| Limit: | ±2.5 ppm |
| Test setup: | |
| Test procedure: | <ol style="list-style-type: none"> 1. The equipment under test was connected to an external DC power supply and input rated voltage. 2. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. 3. The EUT was placed inside the temperature chamber. 4. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 25°C operating frequency as reference frequency. 5. Turn EUT off and set the chamber temperature to -30°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. 6. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached |
| Test Instruments: | Refer to section 5.8 for details |
| Test mode: | Refer to section 5.3 for details |
| Test results: | Passed |

Measurement Data (the worst channel):

| Reference Frequency: GSM850 Middle channel=190 channel=836.6MHz | | | | | |
|---|------------------|-----------------|----------|-------------|--------|
| Power supplied (Vdc) | Temperature (°C) | Frequency error | | Limit (ppm) | Result |
| | | Hz | ppm | | |
| 3.7 | -30 | 199 | 0.237868 | ±2.5 | Pass |
| | -20 | 181 | 0.216352 | | |
| | -10 | 123 | 0.147024 | | |
| | 0 | 165 | 0.197227 | | |
| | 10 | 177 | 0.211571 | | |
| | 20 | 148 | 0.176907 | | |
| | 30 | 101 | 0.120727 | | |
| | 40 | 144 | 0.172125 | | |
| | 50 | 100 | 0.119531 | | |

| Reference Frequency: PCS1900 Middle channel=661 channel=1880MHz | | | | | |
|---|------------------|-----------------|----------|-------------|--------|
| Power supplied (Vdc) | Temperature (°C) | Frequency error | | Limit (ppm) | Result |
| | | Hz | ppm | | |
| 3.7 | -30 | 198 | 0.105319 | ±2.5 | Pass |
| | -20 | 177 | 0.094149 | | |
| | -10 | 181 | 0.096277 | | |
| | 0 | 132 | 0.070213 | | |
| | 10 | 165 | 0.087766 | | |
| | 20 | 144 | 0.076596 | | |
| | 30 | 148 | 0.078723 | | |
| | 40 | 105 | 0.055851 | | |
| | 50 | 111 | 0.059043 | | |

Note: Only the worst case shown in the report.

6.8 Frequency stability V.S. Voltage measurement

| | |
|-------------------|--|
| Test Requirement: | FCC Part 22.355, FCC Part 24.235, FCC Part 2.1055(d)(2) |
| Test Method: | ANSI/TIA-603-D 2010 |
| Limit: | ±2.5ppm |
| Test setup: | <p>The diagram illustrates the test setup. A Power Source (a grey box with two green terminals) is connected via red wires to a Divider (a grey box). The Divider is connected via blue wires to a Spectrum Analyzer (SA) and an Environmental Under Test (EUT). The EUT is a black rectangular device housed inside a Temperature & Humidity Chamber (a blue-bordered box). A Signal Source (SS), represented by a blue box, is also connected to the Divider. The chamber is labeled 'Temperature & Humidity Chamber'.</p> |
| Test procedure: | <ol style="list-style-type: none"> 1. Set chamber temperature to 25°C. Use a variable DC power source to power the EUT and set the voltage to rated voltage. 2. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency. 3. Reduce the input voltage to specify extreme voltage variation (+/- 15%) and endpoint, record the maximum frequency change. |
| Test Instruments: | Refer to section 5.8 for details |
| Test mode: | Refer to section 5.3 for details |
| Test results: | Passed |

Measurement Data (the worst channel):

| Reference Frequency: GSM850 Middle channel=190 channel=836.6MHz | | | | | |
|---|----------------------|-----------------|----------|-------------|--------|
| Temperature (°C) | Power supplied (Vdc) | Frequency error | | Limit (ppm) | Result |
| | | Hz | ppm | | |
| 25 | 4.2 | 99 | 0.118336 | ±2.5 | Pass |
| | 3.7 | 88 | 0.105188 | | |
| | 3.5 | 74 | 0.088453 | | |
| Reference Frequency: PCS1900 Middle channel=661 channel=1880MHz | | | | | |
| Temperature (°C) | Power supplied (Vdc) | Frequency error | | Limit (ppm) | Result |
| | | Hz | ppm | | |
| 25 | 4.2 | 87 | 0.046277 | ±2.5 | Pass |
| | 3.7 | 48 | 0.025532 | | |
| | 3.5 | 90 | 0.047872 | | |