

FCC RF Test Report

APPLICANT : Lenovo (Shanghai) Electronics Technology Co., Ltd.
EQUIPMENT : Tablet PC IdeaTab A1000-F
BRAND NAME : lenovo
MODEL NAME : 60027
FCC ID : O57A1000F
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Jan. 28, 2013 and completely tested on Mar. 18, 2013. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Reviewed by:



Jones Tsai / Manager



SPORTON INTERNATIONAL (KUNSHAN) INC.
No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C.



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant..... 5

 1.2 Manufacturer..... 5

 1.3 Feature of Equipment Under Test 5

 1.4 Product Specification of Equipment Under Test..... 6

 1.5 Testing Site..... 7

 1.6 Applied Standards 7

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 8

 2.1 Carrier Frequency Channel 8

 2.2 Pre-Scanned RF Power..... 9

 2.3 Test Mode..... 10

 2.4 Connection Diagram of Test System..... 11

 2.5 Support Unit used in test configuration and system 12

 2.6 RF Utility 12

 2.7 Measurement Results Explanation Example..... 13

3 TEST RESULT..... 14

 3.1 6dB and 99% Bandwidth Measurement 14

 3.2 Output Power Measurement..... 31

 3.3 Power Spectral Density Measurement 34

 3.4 Conducted Band Edges and Spurious Emission Measurement 53

 3.5 Radiated Emission Measurement..... 70

 3.6 AC Conducted Emission Measurement..... 102

 3.7 Antenna Requirements..... 106

4 LIST OF MEASURING EQUIPMENT 107

5 UNCERTAINTY OF EVALUATION 108

APPENDIX A. PHOTOGRAPHS OF EUT

APPENDIX B. SETUP PHOTOGRAPHS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR312802C	Rev. 01	Initial issue of report	Mar. 20, 2013

SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	A8.2(a)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	Gen 4.6.1	99% Bandwidth	-	Pass	-
3.2	15.247(b)	A8.4	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	A8.2(b)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	A8.5	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
			Conducted Spurious Emission		Pass	-
3.5	15.247(d)	A8.5	Radiated Band Edges	15.209(a) & 15.247(d)	Pass	Under limit 3.51 dB at 2484.850 MHz
			Radiated Spurious Emission			
3.6	15.207	Gen 7.2.4	AC Conducted Emission	15.207(a)	Pass	Under limit 15.54 dB at 0.480 MHz
3.7	15.203 & 15.247(b)	A8.4	Antenna Requirement	N/A	Pass	-

1 General Description

1.1 Applicant

Lenovo (Shanghai) Electronics Technology Co., Ltd.

No. 68 Building, 199 Fenju Road, Wai Gao Qiao FTZ , Shanghai , China

1.2 Manufacturer

Lenovo PC HK Limited

23/F, Lincoln House, Taikoo Place 979 King's Road, Quarry Bay, Hong Kong

1.3 Feature of Equipment Under Test

Product Feature	
Equipment	Tablet PC IDEATAB A1000-F
Brand Name	lenovo
Model Name	60027
FCC ID	O57A1000F
EUT supports Radios application	WLAN 11bgn / Bluetooth / Bluetooth4.0 - LE
HW Version	A3000_MB_PCB_V3.0
SW Version	A1000T_A412_01_07_130118_CN
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are two types of EUT sample 1 and sample 2. The difference between the two samples is only different supplier for Touch panel/LCD panel/battery cell/storage and the front camera. The others are the same including circuit design, PCB board, structure and other components.

1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
Tx/Rx Frequency Range	2412 MHz ~ 2462 MHz
Number of Channels	11
Carrier Frequency of Each Channel	2412+(n-1)*5 MHz; n=1~11
Maximum Output Power to Antenna	802.11b : 18.47 dBm (0.0703 W) 802.11g : 22.01 dBm (0.1589 W) 802.11n HT20 : 22.34 dBm (0.1714 W) 802.11n HT40 : 22.03 dBm (0.1596 W)
99% Occupied Bandwidth	802.11b : 12.15MHz 802.11g : 17.90MHz 802.11n HT20 : 18.65MHz 802.11n HT40 : 36.50MHz
Antenna Type	PIFA Antenna type with gain 1 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

1.5 Testing Site

Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.			
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C. TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958			
Test Site No.	Sporton Site No.			FCC/IC Registration No.
	TH01-KS	CO01-KS	03CH01-KS	149928/4086E-1

1.6 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v02
- ♦ ANSI C63.4-2003 and ANSI C63.10-2009

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 KHz to 30 MHz) and radiated emission (9 KHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		

2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and antenna configurations as following table and the highest power data rates were chosen for full test in the following tables. Final Output Power equals to Measured Output Power adds the duty factor.

Channel	Frequency	802.11b RF Power (dBm)			
		DSSS Data Rate			
		1 Mbps	2 Mbps	5.5 Mbps	11 Mbps
CH 01	2412 MHz	18.13	18.07	17.98	17.96
CH 06	2437 MHz	18.28	18.32	18.01	18.03
CH 11	2462 MHz	18.47	18.44	18.12	18.14

Channel	Frequency	802.11g RF Power (dBm)							
		OFDM Data Rate							
		6 Mbps	9 Mbps	12 Mbps	18 Mbps	24 Mbps	36 Mbps	48 Mbps	54 Mbps
CH 01	2412 MHz	21.60	21.54	21.45	21.49	21.53	21.42	21.51	21.52
CH 06	2437 MHz	21.67	21.65	21.55	21.61	21.62	21.10	21.42	21.52
CH 11	2462 MHz	22.01	21.90	21.89	21.91	21.90	21.80	21.79	21.90

Channel	Frequency	2.4GHz 802.11n HT20 RF Power (dBm)							
		OFDM Data Rate							
		6.5 Mbps	13 Mbps	19.5 Mbps	26 Mbps	39 Mbps	52 Mbps	58.5 Mbps	65 Mbps
CH 01	2412 MHz	21.58	21.56	21.54	21.52	21.51	21.57	21.47	21.43
CH 06	2437 MHz	21.65	21.47	21.53	21.49	21.63	21.49	21.43	21.42
CH 11	2462 MHz	22.34	22.03	21.97	21.87	21.83	21.93	21.95	21.79

Channel	Frequency	2.4GHz 802.11n HT40 RF Power (dBm)							
		OFDM Data Rate							
		13.5 Mbps	27 Mbps	40.5 Mbps	54 Mbps	81 Mbps	108 Mbps	121.5 Mbps	135 Mbps
CH 03	2422 MHz	21.50	21.05	20.89	20.82	20.87	20.77	20.67	20.80
CH 06	2437 MHz	21.63	21.31	21.06	21.01	20.94	21.05	21.03	20.93
CH 09	2452 MHz	22.03	21.92	21.67	21.54	21.38	21.16	21.07	21.04


2.3 Test Mode

Final results of test modes, data rates and test channels are shown as following table.


Test Cases				
	Test Items	Mode	Data Rate	Test Channel
Conducted TCs	6dB BW Power Spectral Density	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	6.5 Mbps	1/6/11
		802.11n HT40	13.5 Mbps	3/6/9
	Output Power	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	6.5 Mbps	1/6/11
		802.11n HT40	13.5 Mbps	3/6/9
	Conducted Band Edge	802.11b	1 Mbps	1/11
		802.11g	6 Mbps	1/11
		802.11n HT20	6.5 Mbps	1/11
		802.11n HT40	13.5 Mbps	3/9
	Conducted Spurious Emission	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	6.5 Mbps	1/6/11
		802.11n HT40	13.5 Mbps	3/6/9
Radiated TCs	Radiated Band Edge	802.11b	1 Mbps	1/11
		802.11g	6 Mbps	1/11
		802.11n HT20	6.5 Mbps	1/11
		802.11n HT40	13.5 Mbps	3/9
	Radiated Spurious Emission	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	6.5 Mbps	1/6/11
		802.11n HT40	13.5 Mbps	3/6/9
AC Conducted Emission	Mode 1 : Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter) + Earphone + Battery 1 for Sample 1 Mode 2 : Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter) + Earphone + Battery 2 for Sample 2			
Remark: 1. For Conducted TCs and Radiated TCs, the tests were performance with Battery 1 for Sample 1. 2. The worst case of conducted emission is mode 1; only the test data of it was reported.				

2.4 Connection Diagram of Test System

<WLAN Tx Mode>

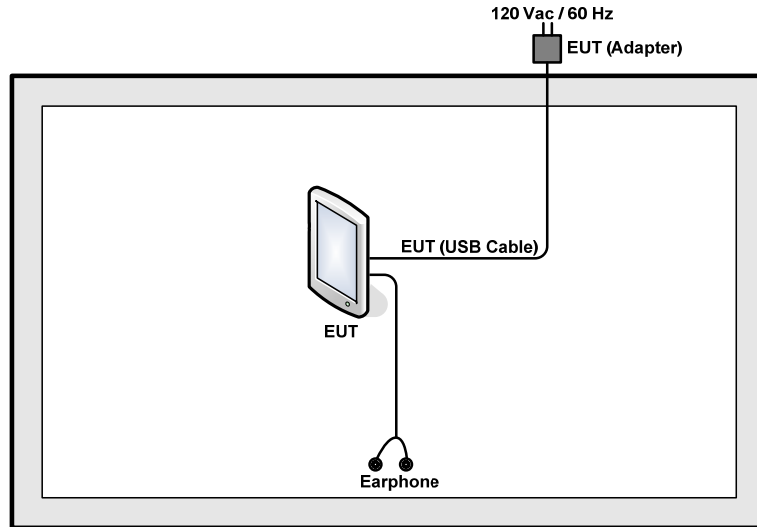

<AC Conducted Emission Mode>

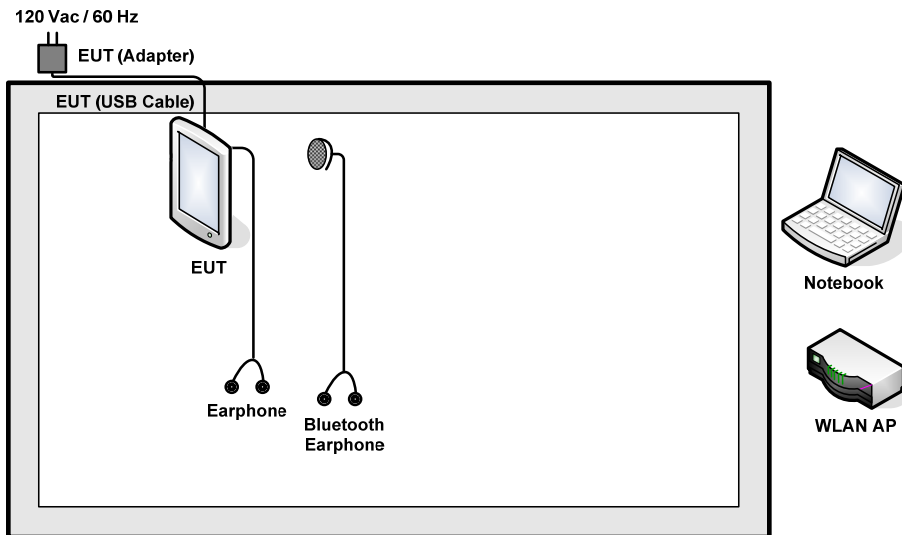

2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	DC Power Supply	GWINSTEK	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	D-Link	DIR-855	KA2DIR855A2	N/A	Unshielded, 1.8 m
3.	Notebook	DELL	P08S	QDS-BRCM1030	N/A	AC I/P: Unshielded, 0.9 m DC O/P: Shielded, 1.8 m
4.	Bluetooth Earphone	Nokia	BH-106	QTLBH-106	N/A	N/A

2.6 RF Utility

For WLAN function, key in “* # * # 3646633 # * # *” on the EUT directly. Then, the EUT will get into the engineering modes to contact with WLAN AP for continuous transmitting and receiving signals.



2.7 Measurement Results Explanation Example

For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and 10dB attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and 10dB attenuator factor.

Offset = RF cable loss + attenuator factor.

Following table shows an offset computation example with cable loss 7.5 dB.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 7.5 + 10 = 17.5 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 KHz.


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v02.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 KHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1MHz and set the Video bandwidth (VBW) = 3MHz.
6. Measure and record the results in the test report.

3.1.4 Test Setup

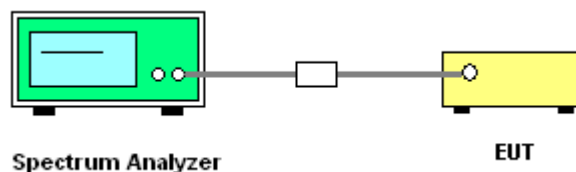




3.1.5 Test Result of 6dB Bandwidth

Test Mode :	802.11b	Temperature :	23~24°C
Test Engineer :	Lizy Li	Relative Humidity :	47~48%

Channel	Frequency (MHz)	802.11b 6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
01	2412	9.08	0.5	Pass
06	2437	9.08	0.5	Pass
11	2462	9.04	0.5	Pass


6 dB Bandwidth Plot on 802.11b Channel 01

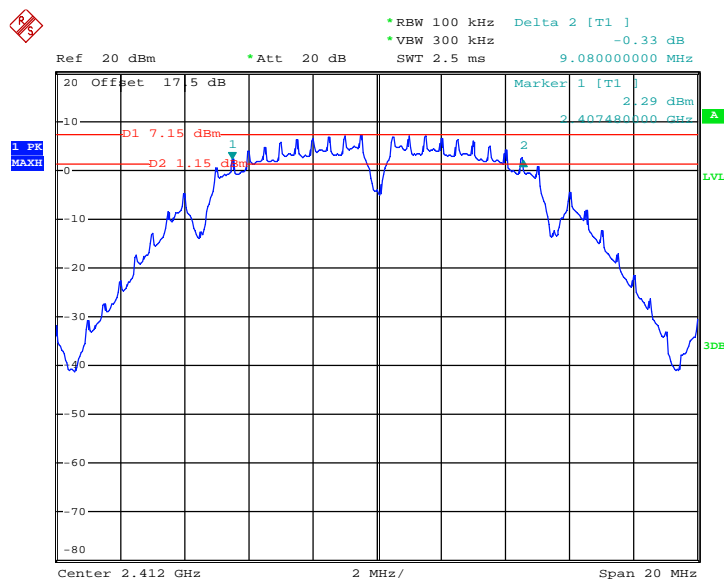

Date: 2.MAR.2013 20:26:38




6 dB Bandwidth Plot on 802.11b Channel 06

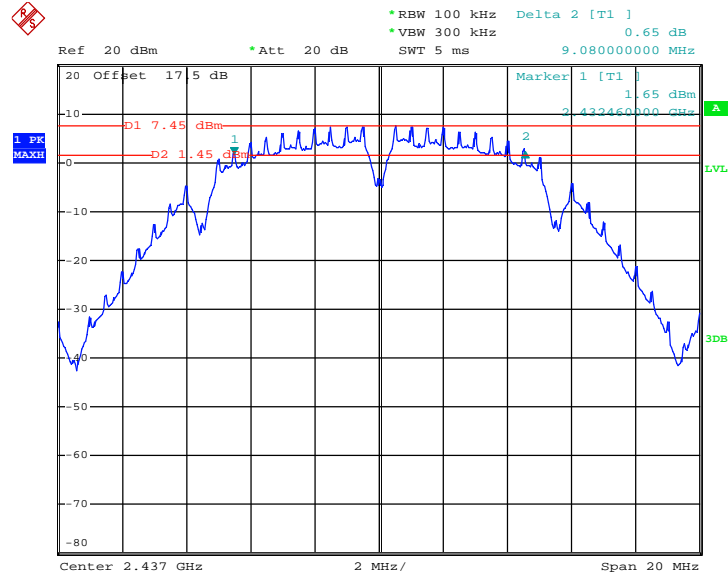

Date: 2.MAR.2013 20:35:20

6 dB Bandwidth Plot on 802.11b Channel 11

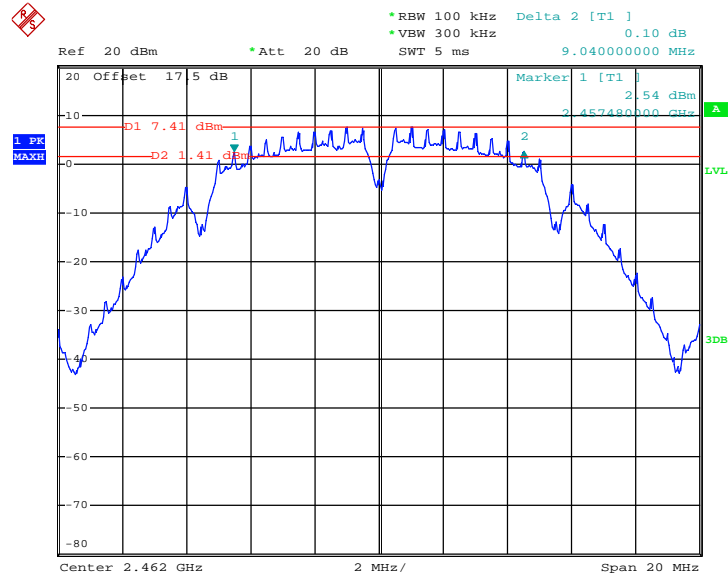


Date: 2.MAR.2013 20:38:01



Test Mode :	802.11g	Temperature :	23~24°C
Test Engineer :	Lizy Li	Relative Humidity :	47~48%

Channel	Frequency (MHz)	802.11g 6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
01	2412	16.32	0.5	Pass
06	2437	16.36	0.5	Pass
11	2462	16.40	0.5	Pass


6 dB Bandwidth Plot on 802.11g Channel 01

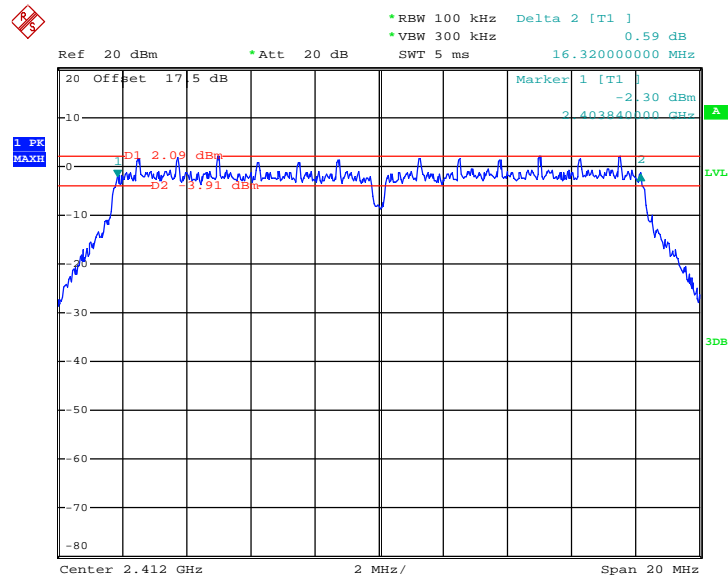

Date: 2.MAR.2013 20:44:28




6 dB Bandwidth Plot on 802.11g Channel 06

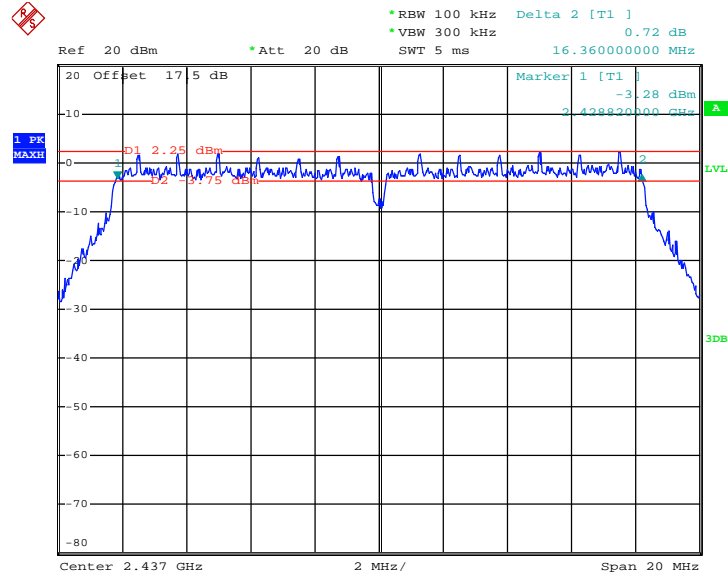

Date: 2.MAR.2013 20:49:22

6 dB Bandwidth Plot on 802.11g Channel 11

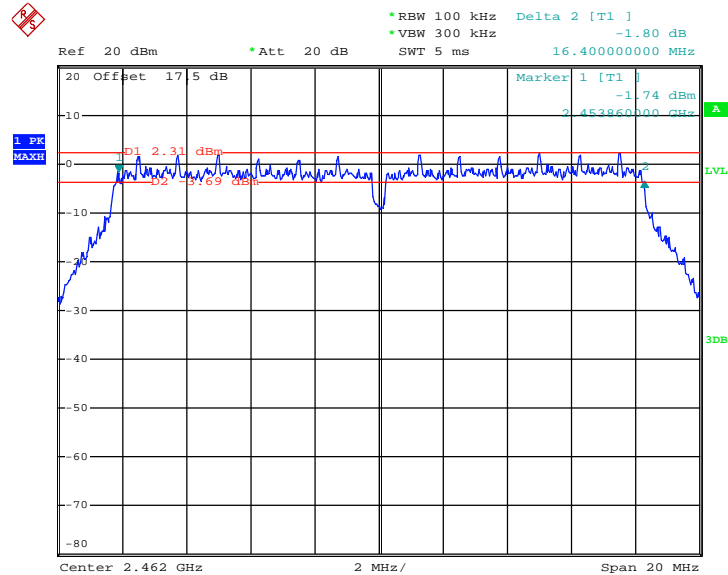


Date: 2.MAR.2013 20:52:49



Test Mode :	802.11n HT20	Temperature :	23~24°C
Test Engineer :	Lizy Li	Relative Humidity :	47~48%

Channel	Frequency (MHz)	2.4GHz 802.11n HT20 6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
01	2412	17.60	0.5	Pass
06	2437	17.56	0.5	Pass
11	2462	17.60	0.5	Pass


6 dB Bandwidth Plot on 802.11n HT20 Channel 01

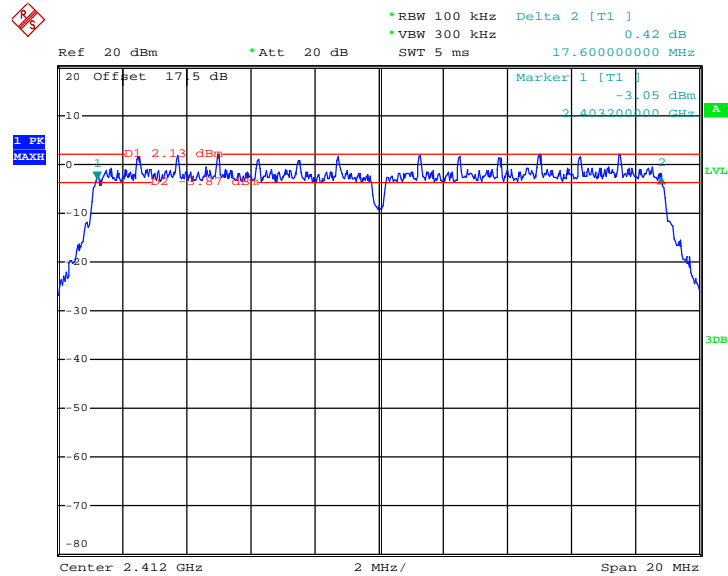

Date: 2.MAR.2013 20:59:08




6 dB Bandwidth Plot on 802.11n HT20 Channel 06

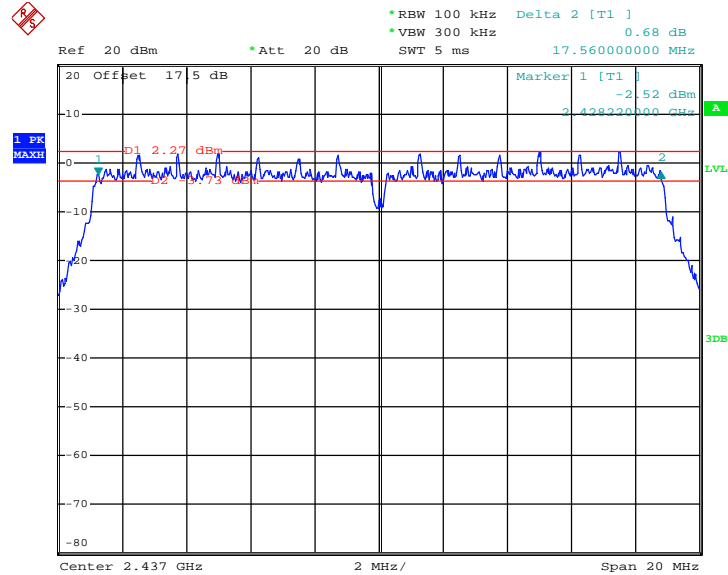

Date: 2.MAR.2013 21:02:22

6 dB Bandwidth Plot on 802.11n HT20 Channel 11

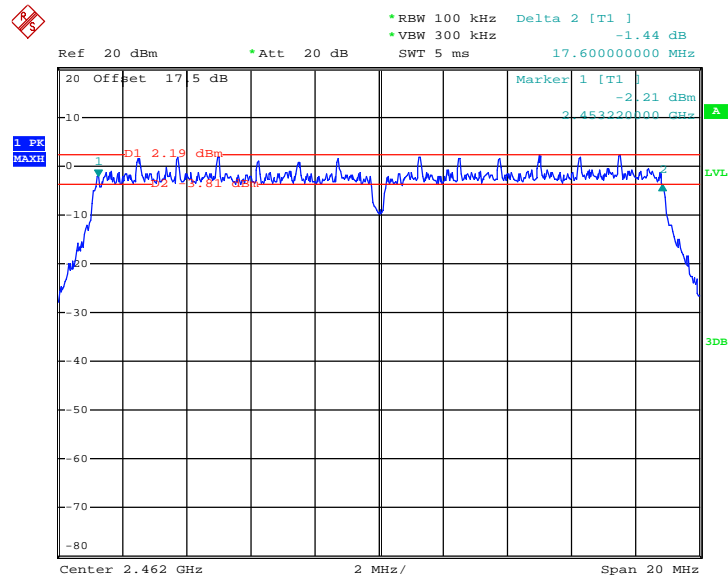


Date: 2.MAR.2013 21:06:11



Test Mode :	802.11n HT40	Temperature :	23~24°C
Test Engineer :	Lizy Li	Relative Humidity :	47~48%

Channel	Frequency (MHz)	802.11n HT40 6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
03	2422	35.44	0.5	Pass
06	2437	35.28	0.5	Pass
09	2452	35.48	0.5	Pass


6 dB Bandwidth Plot on 802.11n HT40 Channel 03

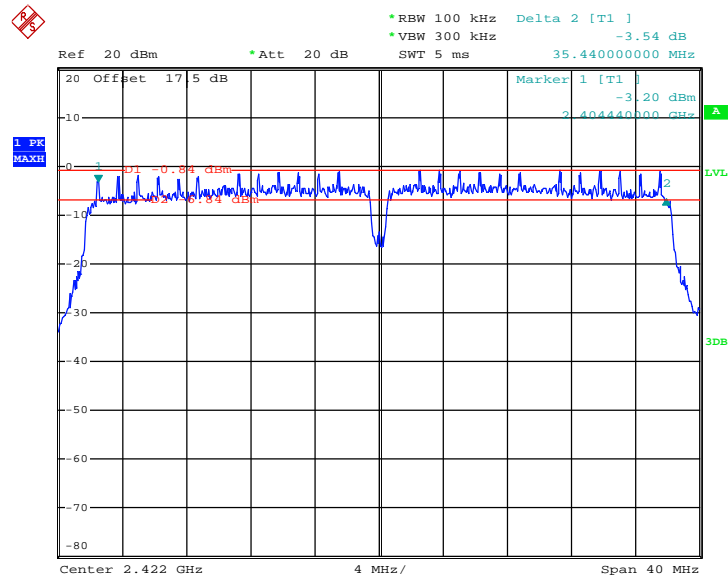

Date: 2.MAR.2013 21:44:00




6 dB Bandwidth Plot on 802.11n HT40 Channel 06

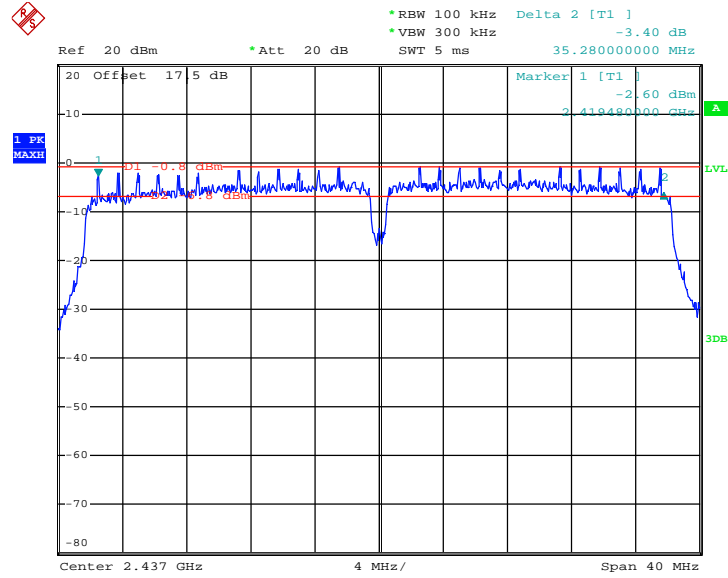

Date: 2.MAR.2013 21:47:51

6 dB Bandwidth Plot on 802.11n HT40Channel 09

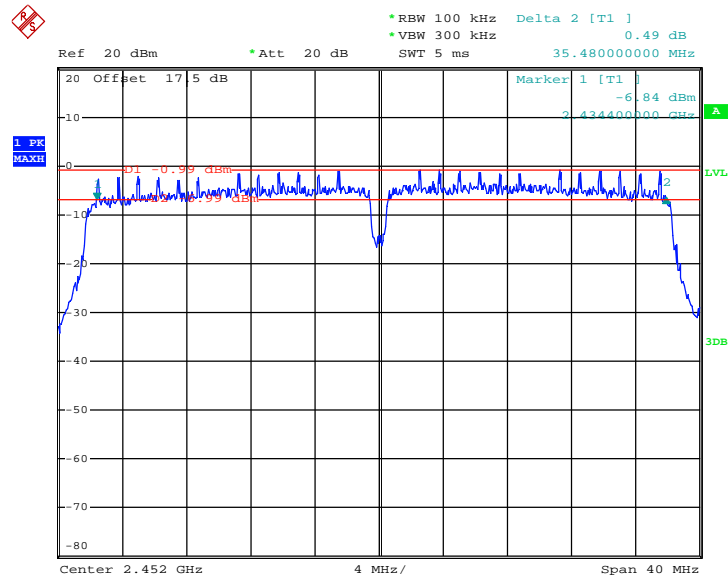

Date: 2.MAR.2013 21:51:08




3.1.6 Test Result of 99% Occupied Bandwidth

Test Mode :	802.11b	Temperature :	23~24°C
Test Engineer :	Lizy Li	Relative Humidity :	47~48%

Channel	Frequency (MHz)	802.11b 99% Occupied Bandwidth (MHz)
01	2412	12.15
06	2437	12.15
11	2462	12.10


99% Occupied Bandwidth Plot on 802.11b Channel 01

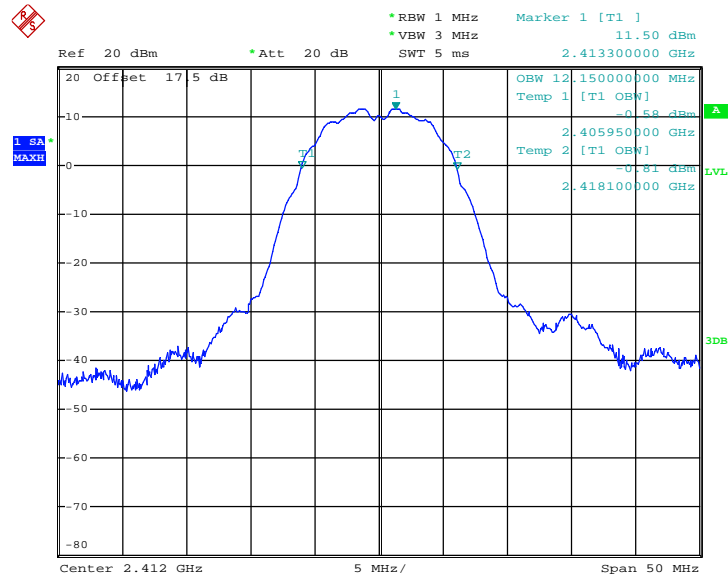

Date: 2.MAR.2013 20:33:15




99% Occupied Bandwidth Plot on 802.11b Channel 06

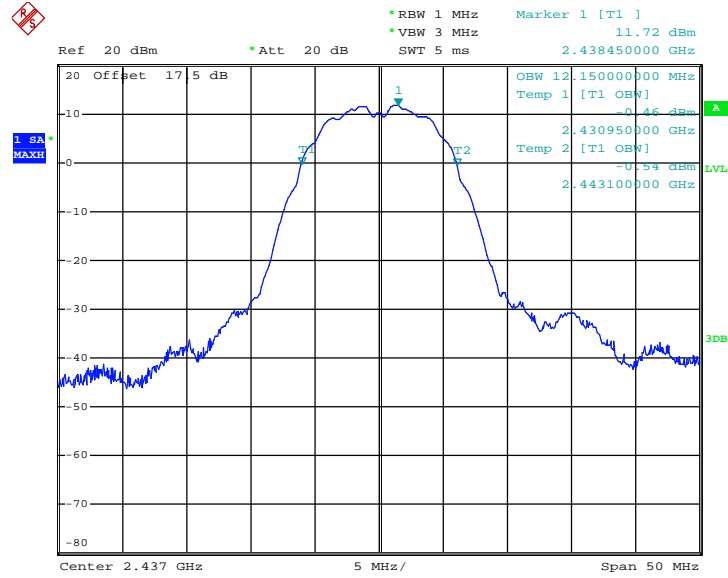

Date: 2.MAR.2013 20:36:51

99% Occupied Bandwidth Plot on 802.11b Channel 11

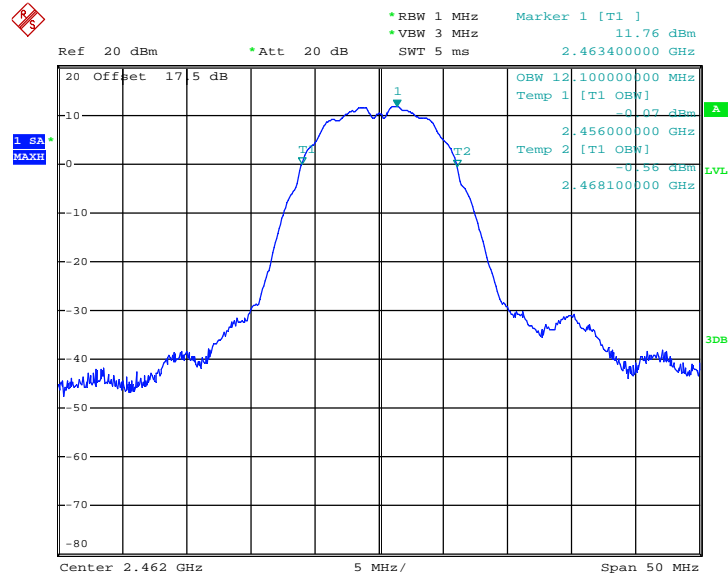


Date: 2.MAR.2013 20:42:23



Test Mode :	802.11g	Temperature :	23~24°C
Test Engineer :	Lizy Li	Relative Humidity :	47~48%

Channel	Frequency (MHz)	802.11g 99% Occupied Bandwidth (MHz)
01	2412	17.90
06	2437	17.90
11	2462	17.90


99% Occupied Bandwidth Plot on 802.11g Channel 01

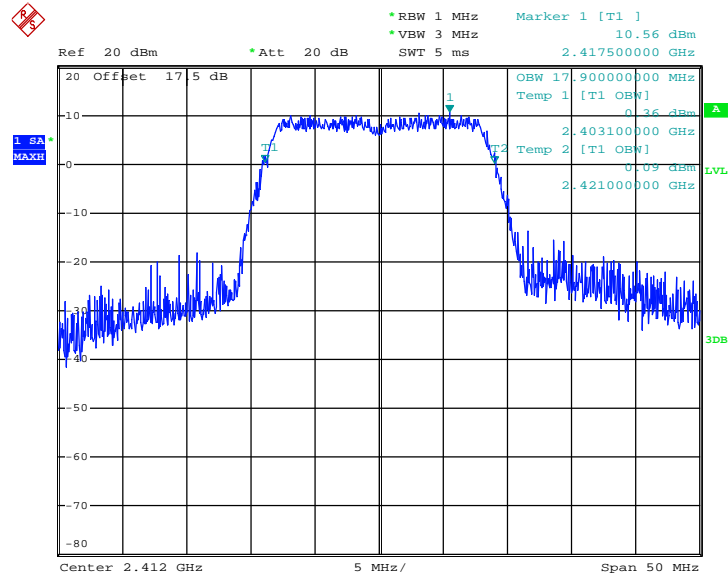

Date: 2.MAR.2013 20:47:31




99% Occupied Bandwidth Plot on 802.11g Channel 06

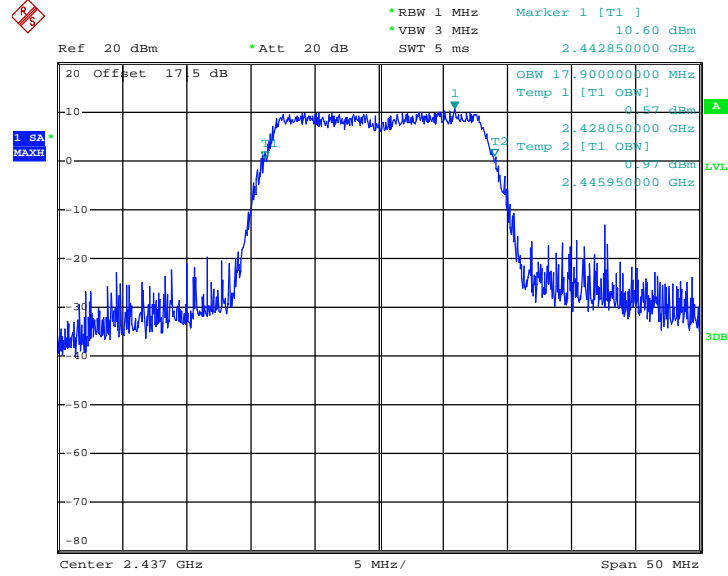

Date: 2.MAR.2013 20:51:16

99% Occupied Bandwidth Plot on 802.11g Channel 11

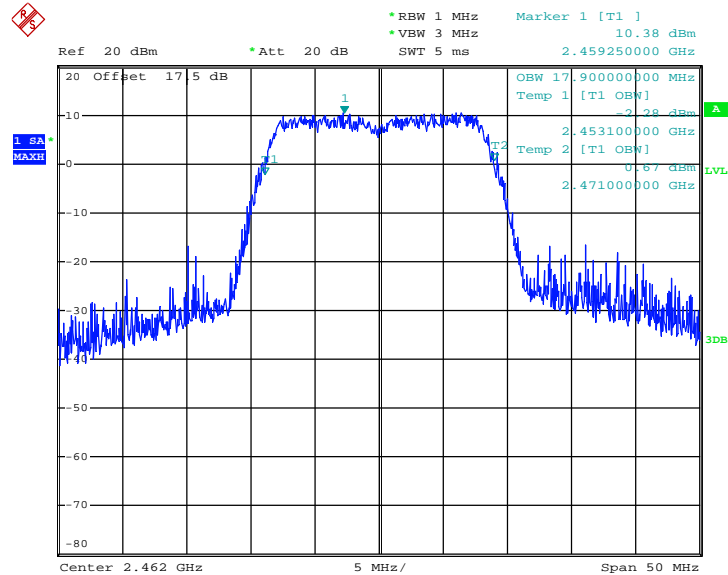


Date: 2.MAR.2013 20:56:33



Test Mode :	802.11n HT20	Temperature :	23~24°C
Test Engineer :	Lizy Li	Relative Humidity :	47~48%

Channel	Frequency (MHz)	2.4GHz 802.11n HT20 99% Occupied Bandwidth (MHz)
01	2412	18.55
06	2437	18.65
11	2462	18.60


99% Occupied Bandwidth Plot 802.11n HT20 Channel 01

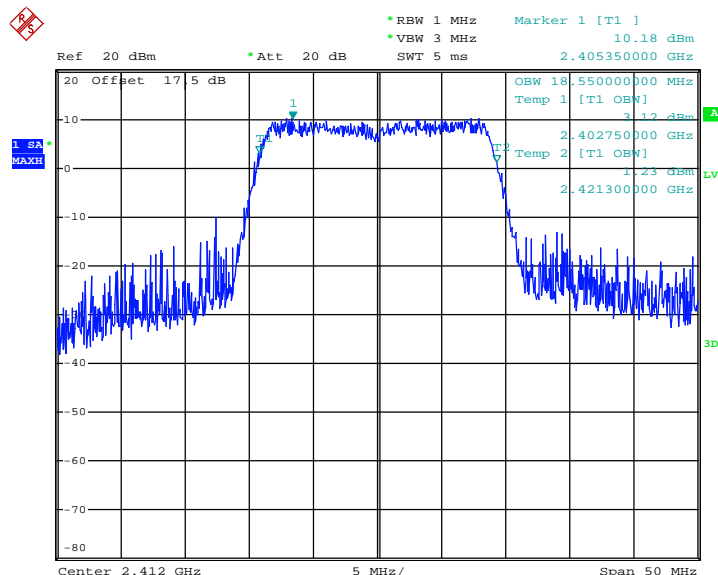

Date: 2.MAR.2013 21:01:04




99% Occupied Bandwidth Plot 802.11n HT20 Channel 06

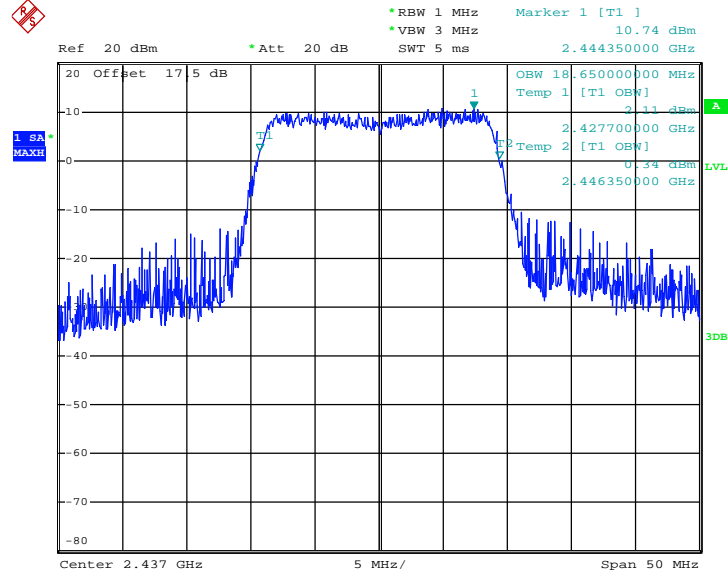

Date: 2.MAR.2013 21:05:00

99% Occupied Bandwidth Plot 802.11n HT20 Channel 11

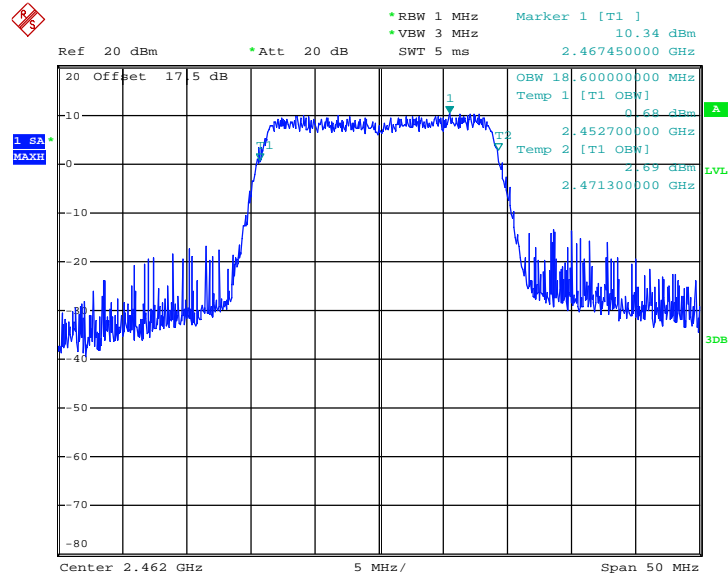


Date: 2.MAR.2013 21:08:04



Test Mode :	802.11n HT40	Temperature :	23~24°C
Test Engineer :	Lizy Li	Relative Humidity :	47~48%

Channel	Frequency (MHz)	2.4GHz 802.11n HT40 99% Occupied Bandwidth (MHz)
03	2422	36.50
06	2437	36.50
09	2452	36.50


99% Occupied Bandwidth Plot 802.11n HT40 Channel 03

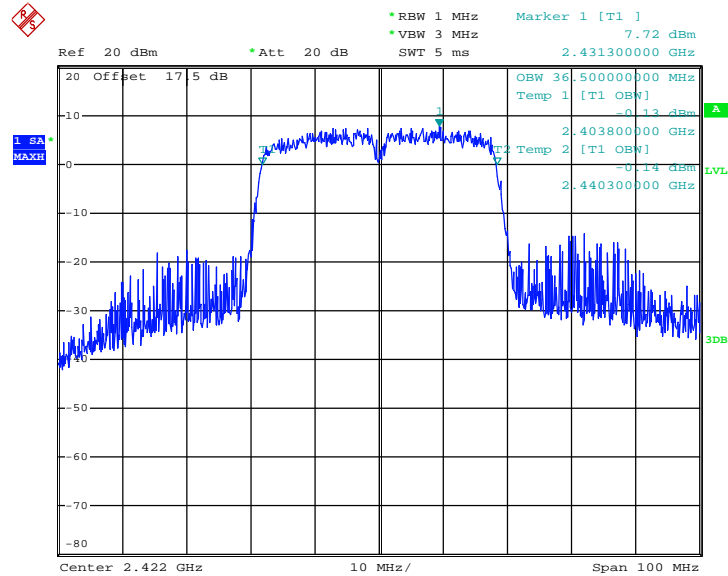

Date: 2.MAR.2013 21:46:25




99% Occupied Bandwidth Plot 802.11n HT40 Channel 06

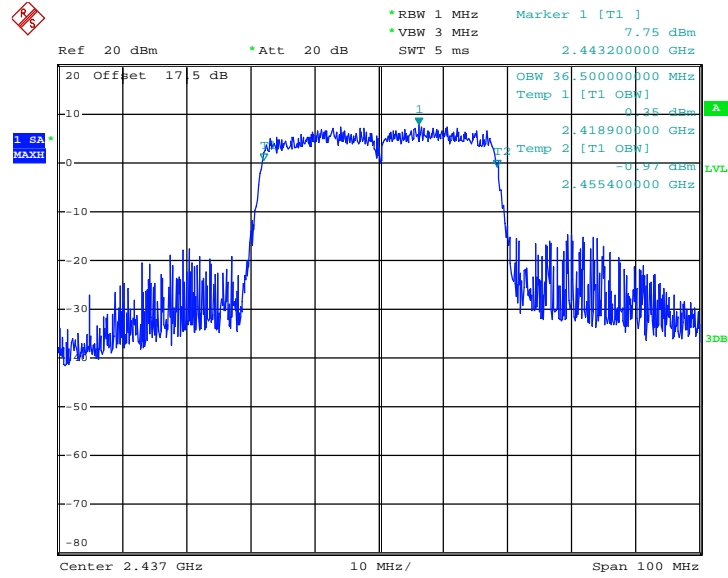

Date: 2.MAR.2013 21:49:44

99% Occupied Bandwidth Plot 802.11n HT40 Channel 09

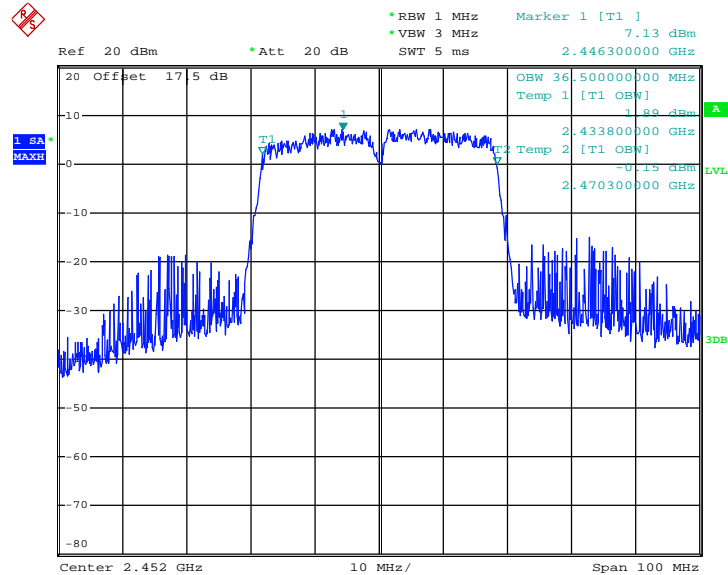

Date: 2.MAR.2013 21:53:15

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v02.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

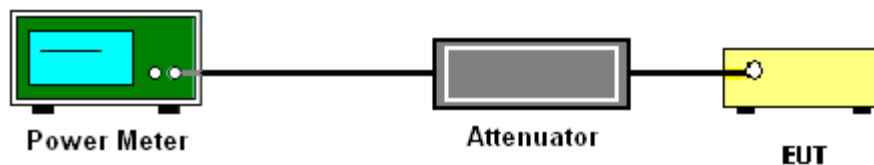



3.2.5 Test Result of Peak Output Power

Test Mode :	802.11b	Temperature :	23~24°C
Test Engineer :	Lizy Li	Relative Humidity :	47~48%

Channel	Frequency (MHz)	802.11b Peak Output Power (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	18.13	30	Pass
06	2437	18.28	30	Pass
11	2462	18.47	30	Pass

Test Mode :	802.11g	Temperature :	23~24°C
Test Engineer :	Lizy Li	Relative Humidity :	47~48%

Channel	Frequency (MHz)	802.11g Peak Output Power (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	21.60	30	Pass
06	2437	21.67	30	Pass
11	2462	22.01	30	Pass

Test Mode :	802.11n HT20	Temperature :	23~24°C
Test Engineer :	Lizy Li	Relative Humidity :	47~48%

Channel	Frequency (MHz)	2.4GHz 802.11n HT20 Peak Output Power (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	21.58	30	Pass
06	2437	21.65	30	Pass
11	2462	22.34	30	Pass

Test Mode :	2.4GHz 802.11n HT40	Temperature :	23~24°C
Test Engineer :	Lizy Li	Relative Humidity :	47~48%

Channel	Frequency (MHz)	2.4GHz 802.11n HT40 Peak Output Power (dBm)	Max. Limits (dBm)	Pass/Fail
03	2422	21.50	30	Pass
06	2437	21.63	30	Pass
09	2452	22.03	30	Pass



3.2.6 Test Result of Average output Power (Reporting Only)

Test Mode :	802.11b	Temperature :	23~24°C
Test Engineer :	Lizy Li	Relative Humidity :	47~48%
Duty Cycle:	98.6%	Duty Factor:	0.06dB

Channel	Frequency (MHz)	802.11b Average Output Power (dBm)
01	2412	15.01
06	2437	15.07
11	2462	15.34

Test Mode :	802.11g	Temperature :	23~24°C
Test Engineer :	Lizy Li	Relative Humidity :	47~48%
Duty Cycle:	93.2%	Duty Factor:	0.31dB

Channel	Frequency (MHz)	802.11g Average Output Power (dBm)
01	2412	11.71
06	2437	11.57
11	2462	11.89

Test Mode :	802.11n HT20	Temperature :	23~24°C
Test Engineer :	Lizy Li	Relative Humidity :	47~48%
Duty Cycle:	92.4%	Duty Factor:	0.35dB

Channel	Frequency (MHz)	802.11n HT20 Average Output Power (dBm)
01	2412	11.75
06	2437	11.57
11	2462	11.90

Test Mode :	802.11n HT40	Temperature :	23~24°C
Test Engineer :	Lizy Li	Relative Humidity :	47~48%
Duty Cycle:	85.9%	Duty Factor:	0.66dB

Channel	Frequency (MHz)	802.11n HT40 Average Output Power (dBm)
03	2422	11.38
06	2437	11.35
09	2452	11.35

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3KHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure 9.1 Option 1 of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v02
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

3.3.4 Test Setup

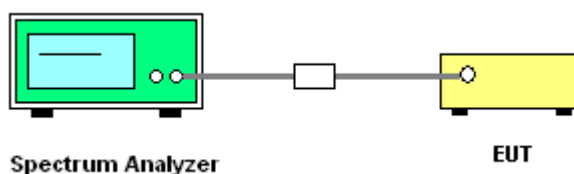



3.3.5 Test Result of Power Spectral Density

Test Mode :	802.11b	Temperature :	23~24°C
Test Engineer :	Lizy Li	Relative Humidity :	47~48%

Channel	Frequency (MHz)	802.11b Power Density		Max. Limits (dBm/3KHz)	Pass/Fail
		PSD/100KHz (dBm)	PSD/3KHz (dBm)		
01	2412	7.12	-4.20	8	Pass
06	2437	7.32	-6.50	8	Pass
11	2462	7.30	-7.04	8	Pass

Test Mode :	802.11g	Temperature :	23~24°C
Test Engineer :	Lizy Li	Relative Humidity :	47~48%

Channel	Frequency (MHz)	802.11g Power Density		Max. Limits (dBm/3KHz)	Pass/Fail
		PSD/100KHz (dBm)	PSD/3KHz (dBm)		
01	2412	2.01	-11.14	8	Pass
06	2437	2.07	-11.43	8	Pass
11	2462	2.19	-11.57	8	Pass



Test Mode :	802.11n HT20	Temperature :	23~24°C
Test Engineer :	Lizy Li	Relative Humidity :	47~48%

Channel	Frequency (MHz)	802.11n HT20 Power Density		Max. Limits (dBm/3KHz)	Pass/Fail
		PSD/100KHz (dBm)	PSD/3KHz (dBm)		
01	2412	2.06	-12.61	8	Pass
06	2437	2.29	-11.96	8	Pass
11	2462	2.24	-11.81	8	Pass

Test Mode :	802.11n HT40	Temperature :	23~24°C
Test Engineer :	Lizy Li	Relative Humidity :	47~48%

Channel	Frequency (MHz)	802.11n HT40 Power Density		Max. Limits (dBm/3KHz)	Pass/Fail
		PSD/100KHz (dBm)	PSD/3KHz (dBm)		
03	2422	-1.02	-15.70	8	Pass
06	2437	-0.77	-15.29	8	Pass
09	2452	-1.06	-14.40	8	Pass


Note:

1. Measured power density (dBm) has offset with cable loss.
2. The Measured power density (dBm)/ 100KHz is reference level and used as 20dBc down for Conducted Band Edges and Conducted Spurious Emission limit line.



3.3.6 Test Result of Power Spectral Density Plots (100kHz)


PSD 100kHz Plot on 802.11b Channel 01

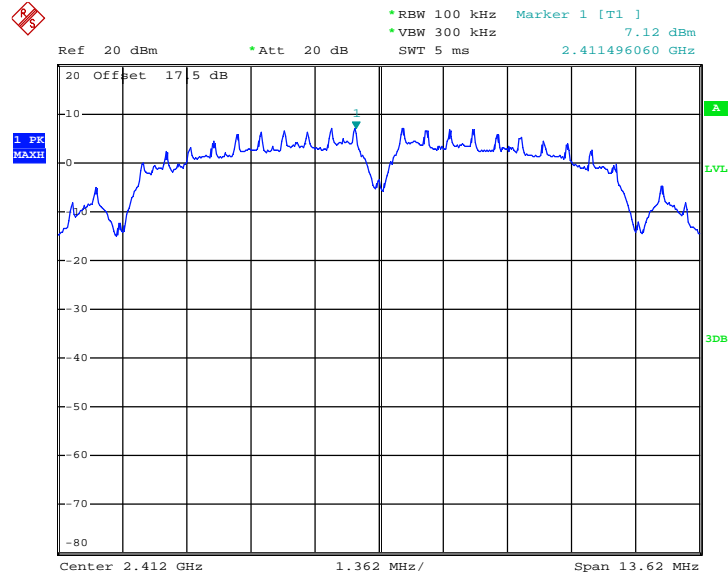

Date: 2.MAR.2013 20:27:20




PSD 100kHz Plot on 802.11b Channel 06

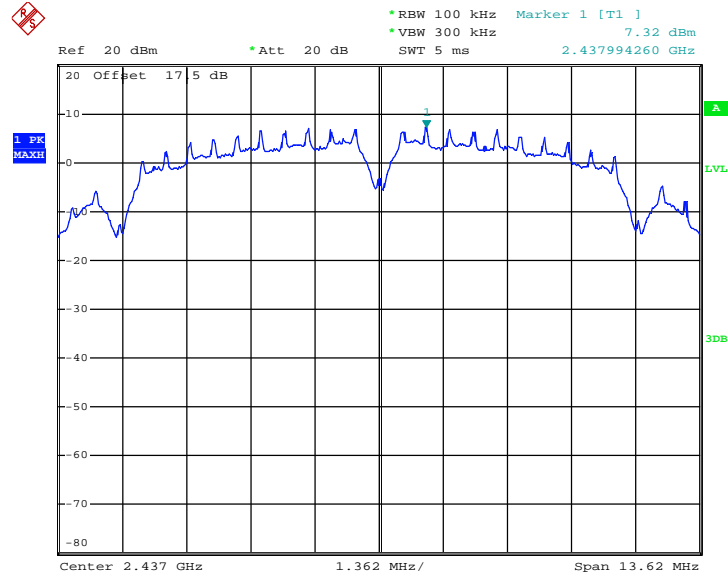

Date: 2.MAR.2013 20:35:56


PSD 100kHz Plot on 802.11b Channel 11

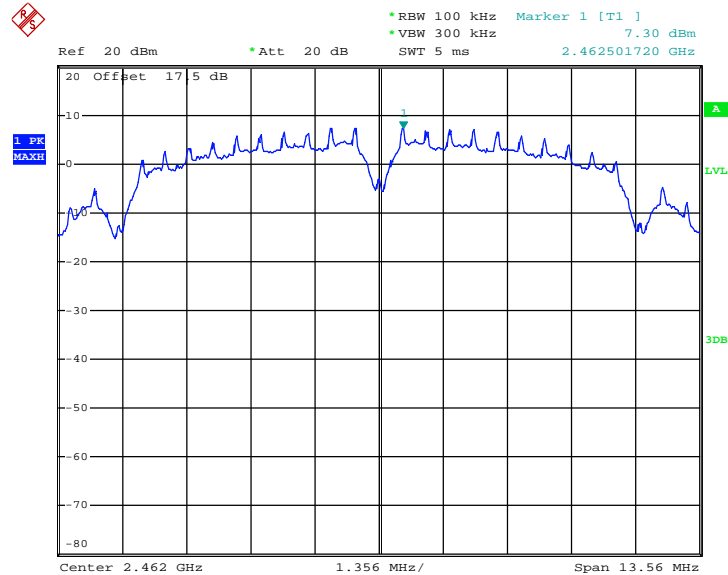

Date: 2.MAR.2013 20:38:40




PSD 100kHz Plot on 802.11g Channel 01

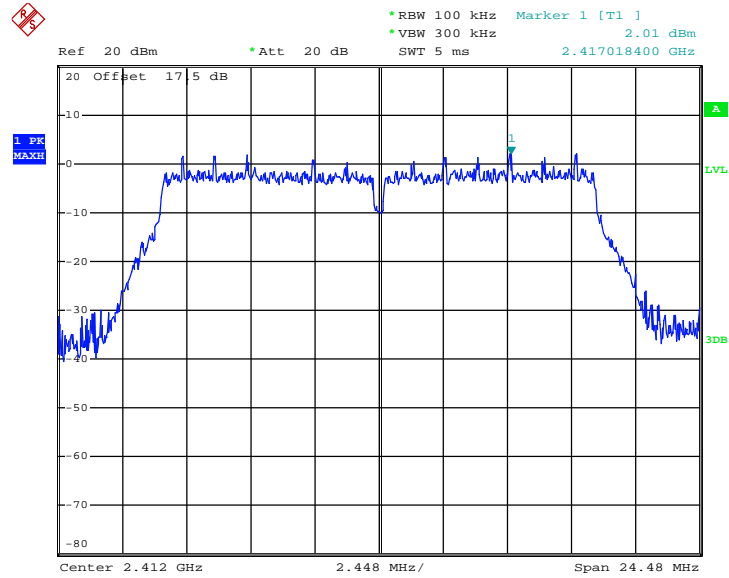

Date: 2.MAR.2013 20:45:06




PSD 100kHz Plot on 802.11g Channel 06

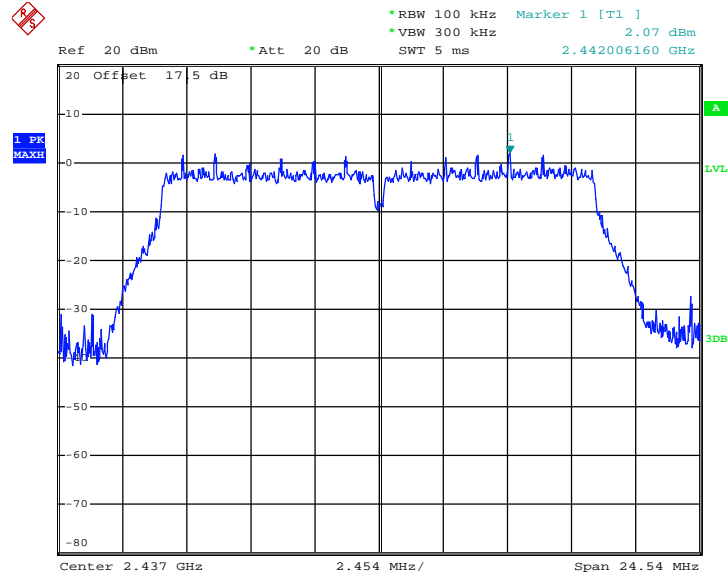

Date: 2.MAR.2013 20:50:00


PSD 100kHz Plot on 802.11g Channel 11

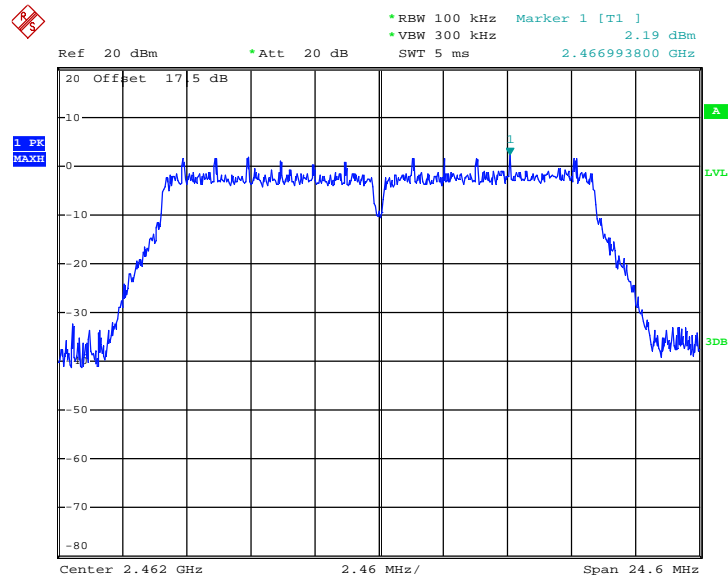

Date: 2.MAR.2013 20:53:29




PSD 100kHz Plot on 802.11n HT20 Channel 01

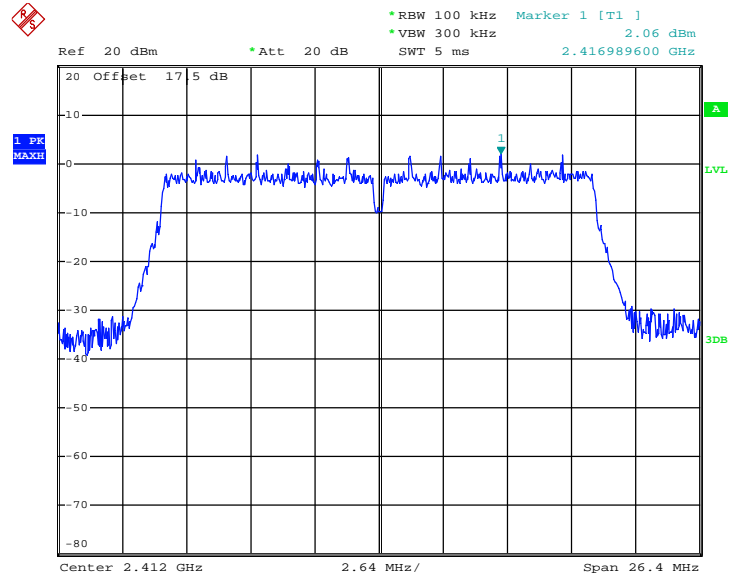

Date: 2.MAR.2013 20:59:46




PSD 100kHz Plot on 802.11n HT20 Channel 06

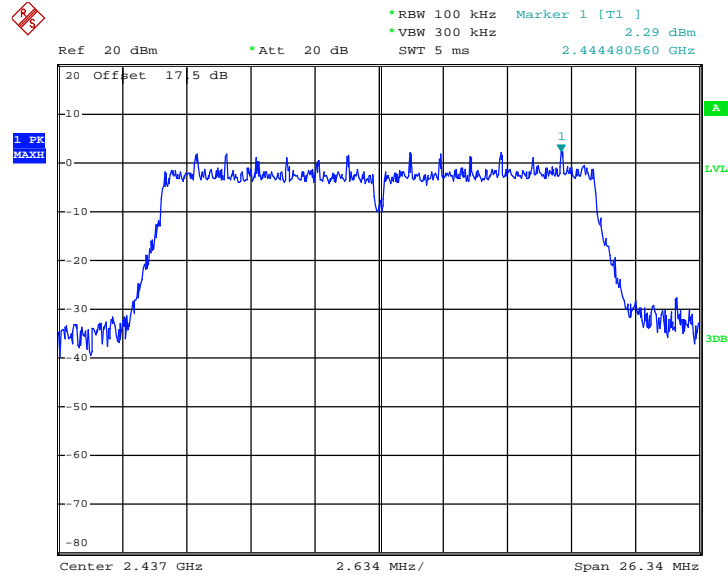

Date: 2.MAR.2013 21:03:17


PSD 100kHz Plot on 802.11n HT20 Channel 11

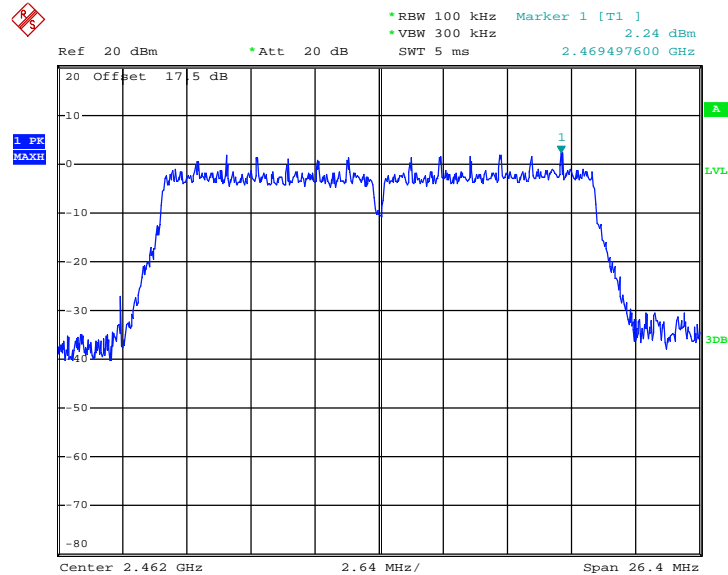

Date: 2.MAR.2013 21:06:51




PSD 100kHz Plot on 802.11n HT40 Channel 03

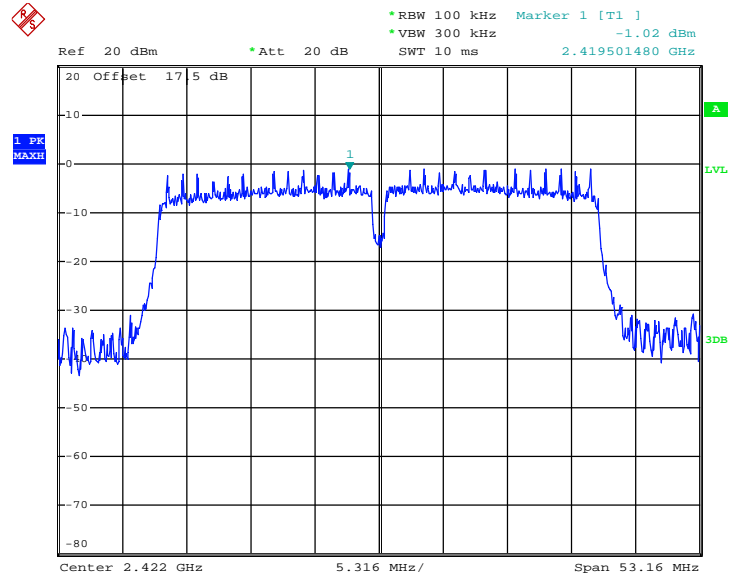

Date: 2.MAR.2013 21:44:53




PSD 100kHz Plot on 802.11n HT40 Channel 06

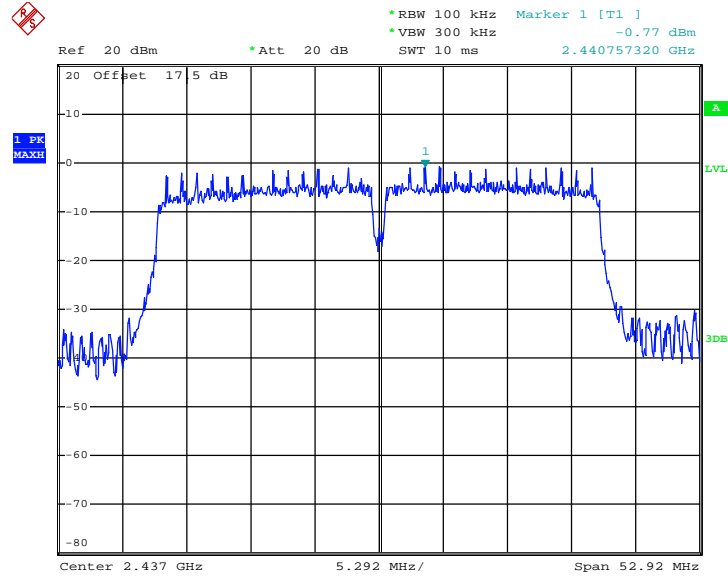

Date: 2.MAR.2013 21:48:49

PSD 100kHz Plot on 802.11n HT40 Channel 09

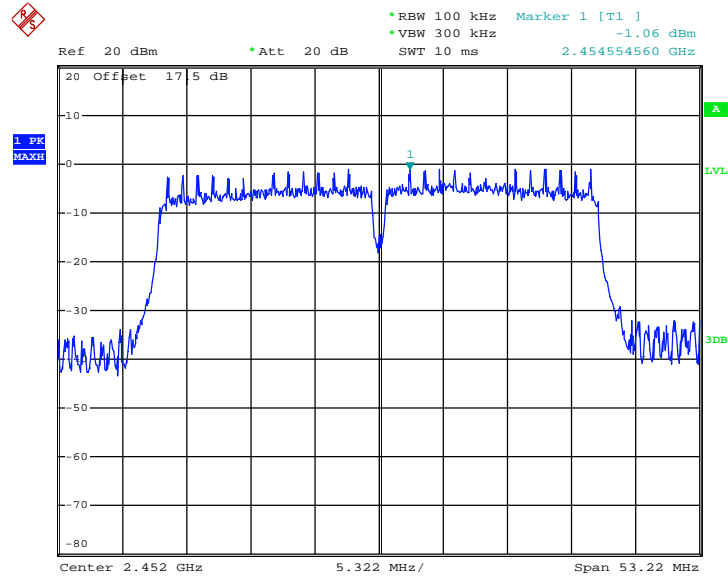


Date: 2.MAR.2013 21:51:49



3.3.7 Test Result of Power Spectral Density Plots (3kHz)


PSD 3kHz Plot on 802.11b Channel 01

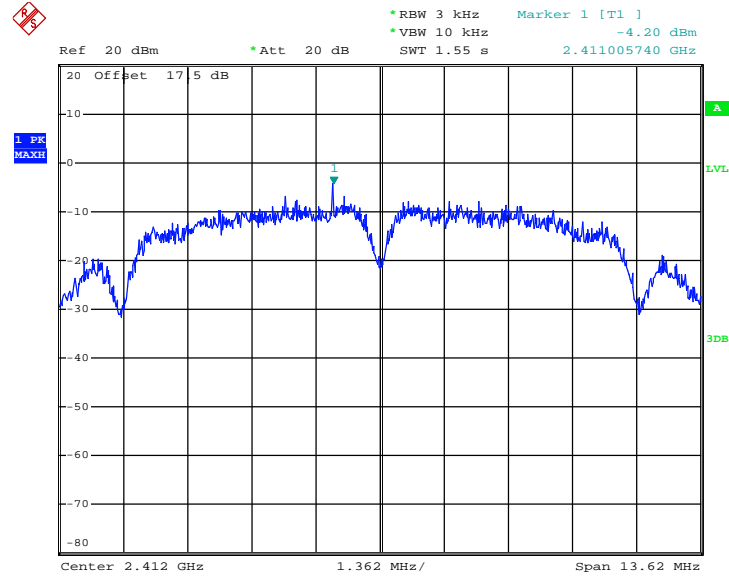

Date: 2.MAR.2013 20:27:07




PSD 3kHz Plot on 802.11b Channel 06

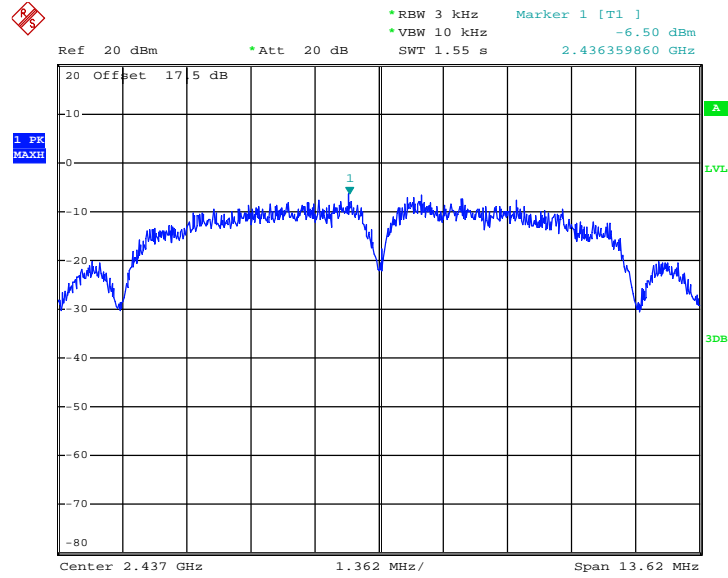

Date: 2.MAR.2013 20:35:44


PSD 3kHz Plot on 802.11b Channel 11

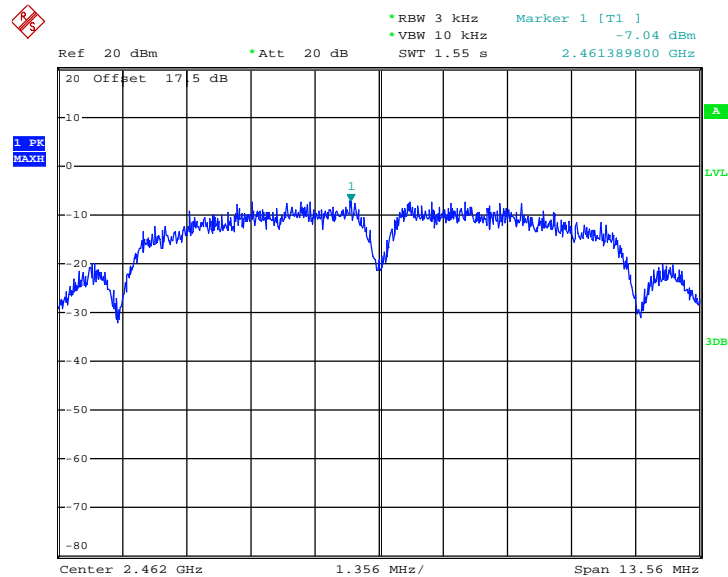

Date: 2.MAR.2013 20:38:28




PSD 3kHz Plot on 802.11g Channel 01

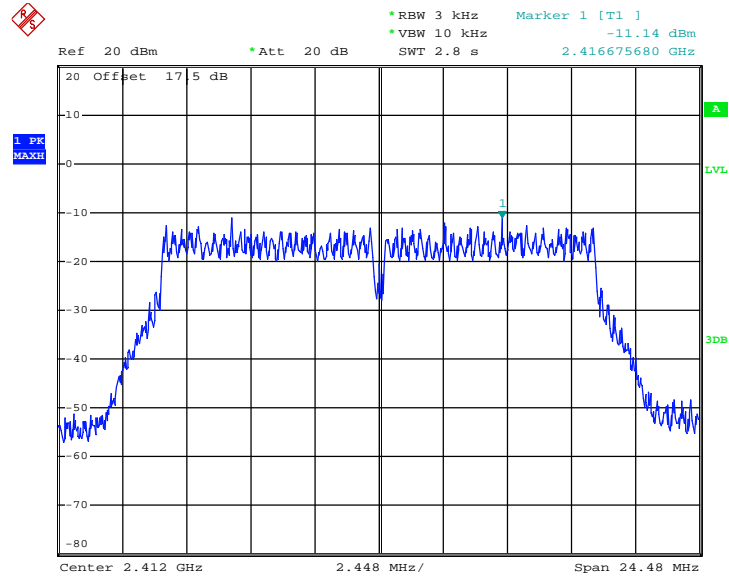

Date: 2.MAR.2013 20:44:53




PSD 3kHz Plot on 802.11g Channel 06

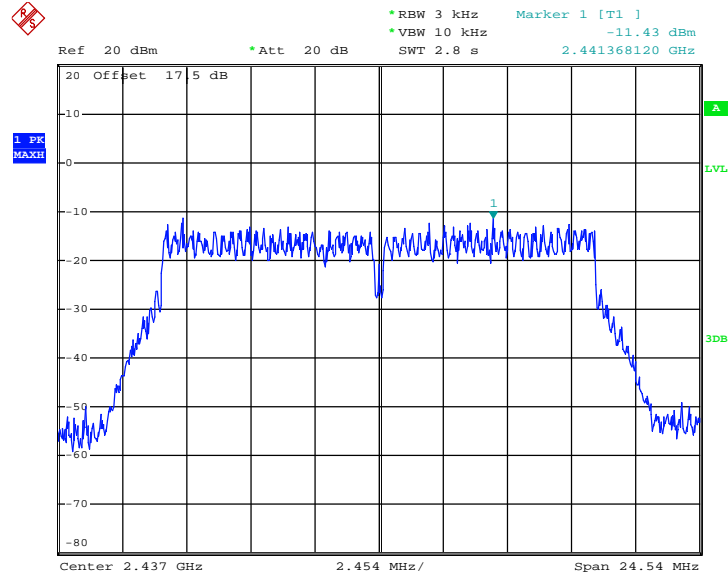

Date: 2.MAR.2013 20:49:48


PSD 3kHz Plot on 802.11g Channel 11

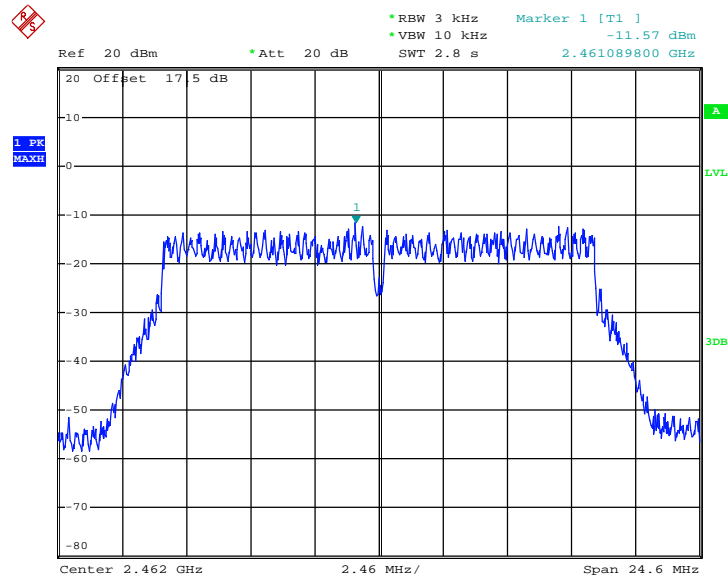

Date: 2.MAR.2013 20:53:16




PSD 3kHz Plot on 802.11n HT20 Channel 01

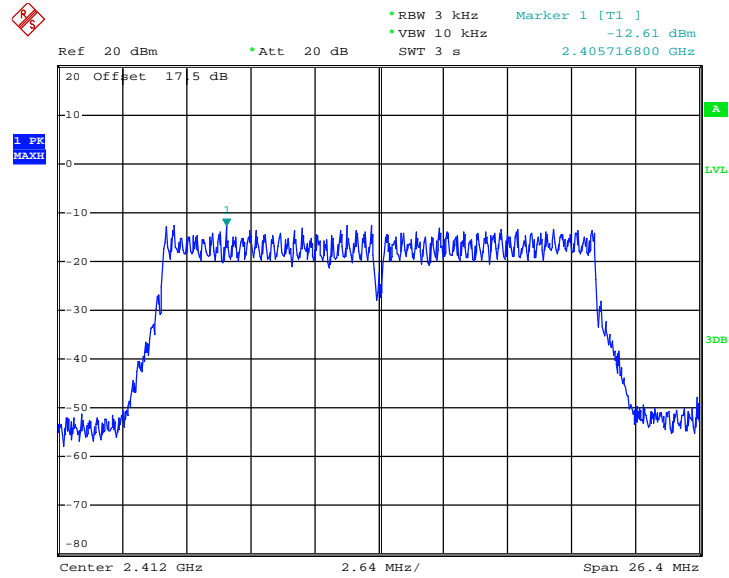

Date: 2.MAR.2013 20:59:35




PSD 3kHz Plot on 802.11n HT20 Channel 06

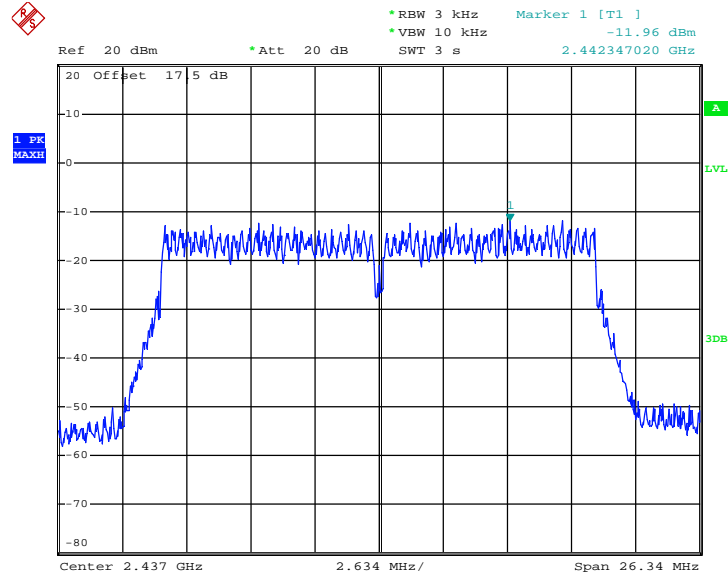

Date: 2.MAR.2013 21:02:47


PSD 3kHz Plot on 802.11n HT20 Channel 11

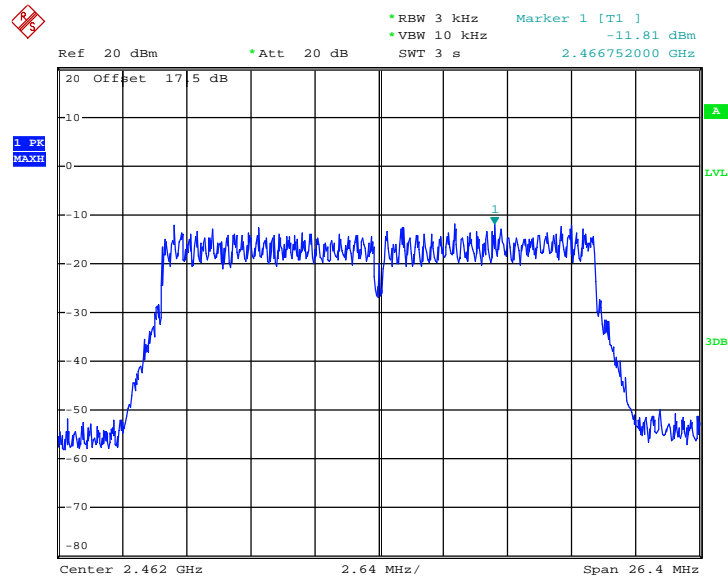

Date: 2.MAR.2013 21:06:37




PSD 3kHz Plot on 802.11n HT40 Channel 03

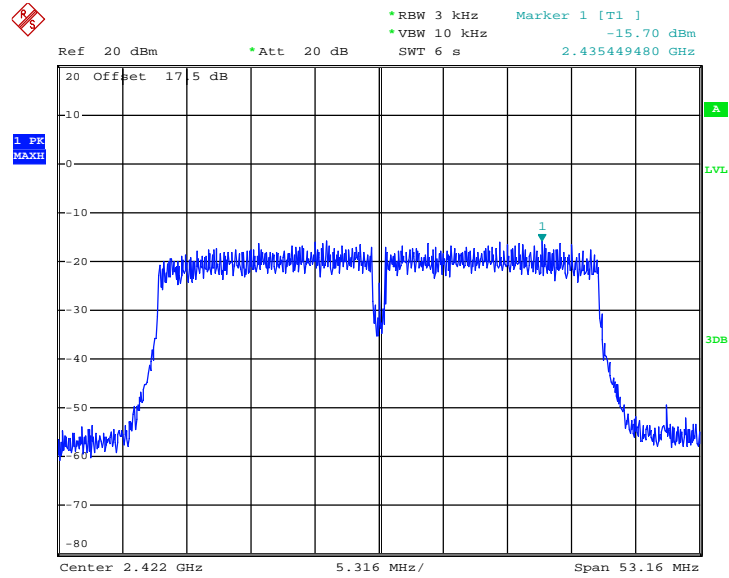

Date: 2.MAR.2013 21:44:41




PSD 3kHz Plot on 802.11n HT40 Channel 06

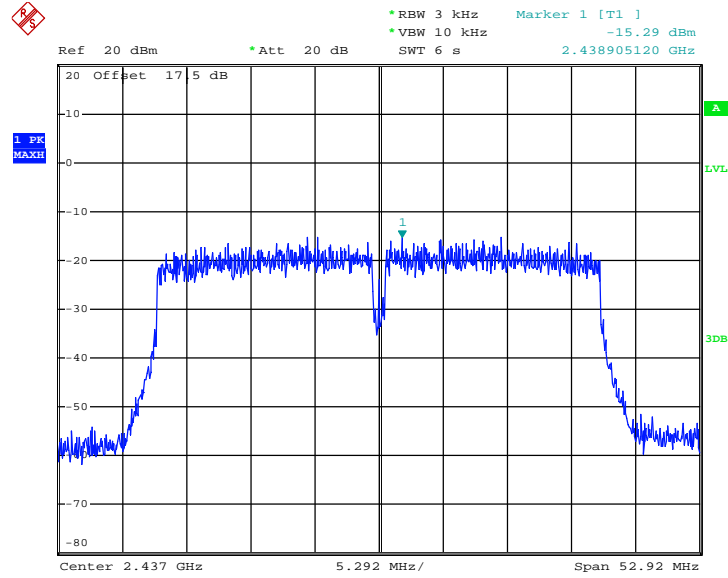

Date: 2.MAR.2013 21:48:19

PSD 3kHz Plot on 802.11n HT40 Channel 09

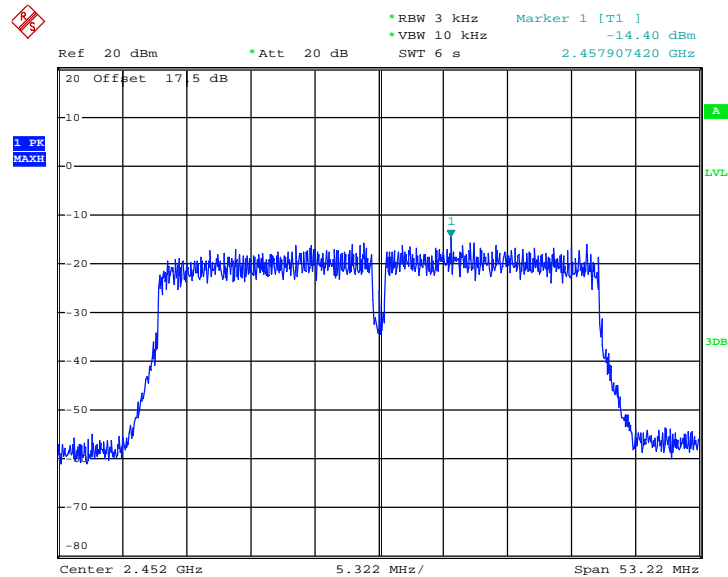

Date: 2.MAR.2013 21:51:38

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).


3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

3.4.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v02.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 KHz, VBW=300 KHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz, when maximum peak conducted output power procedure is used. The attenuation is set to 30dB, when maximum conducted output power procedure is used.
5. Measure and record the results in the test report.


3.4.4 Test Setup

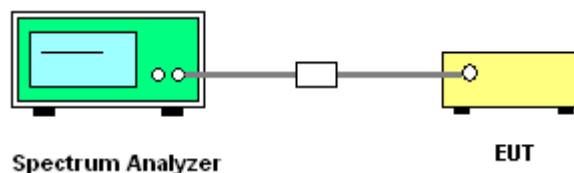

3.4.5 Test Plots of Conducted Band Edges


Test Mode :	802.11b	Temperature :	23~24°C
Test Band :	Low and High	Relative Humidity :	47~48%
Test Channel :	01 and 11	Test Engineer :	Lizy Li

Low Band Edge Plot on 802.11b Channel 01

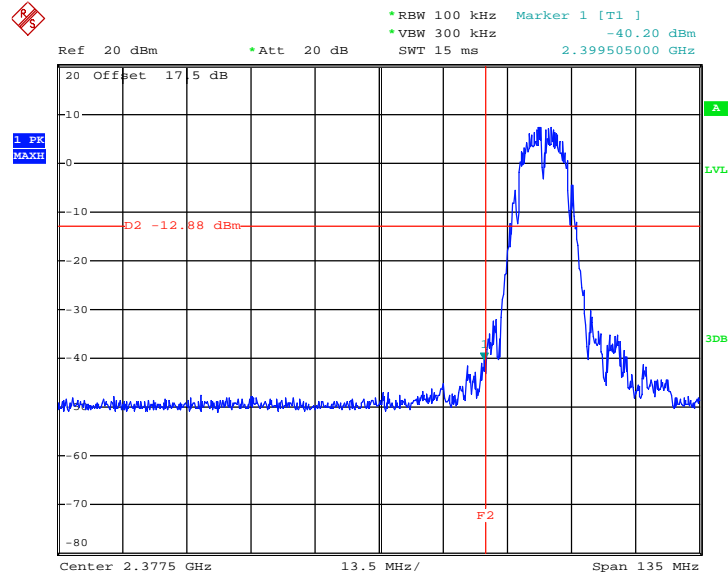

Date : 2.MAR.2013 20:31:33

High Band Edge Plot on 802.11b Channel 11

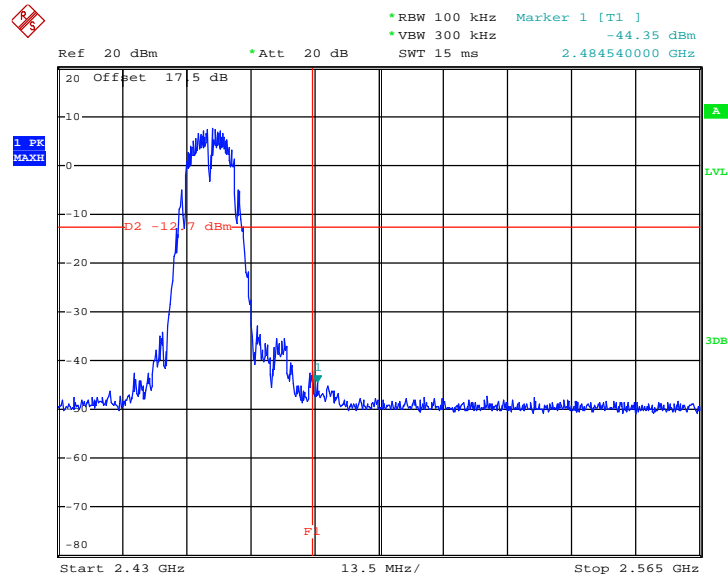


Date : 2.MAR.2013 20:41:23




Test Mode :	802.11g	Temperature :	23~24°C
Test Band :	Low and High	Relative Humidity :	47~48%
Test Channel :	01 and 11	Test Engineer :	Lizy Li

Low Band Edge Plot on 802.11g Channel 01

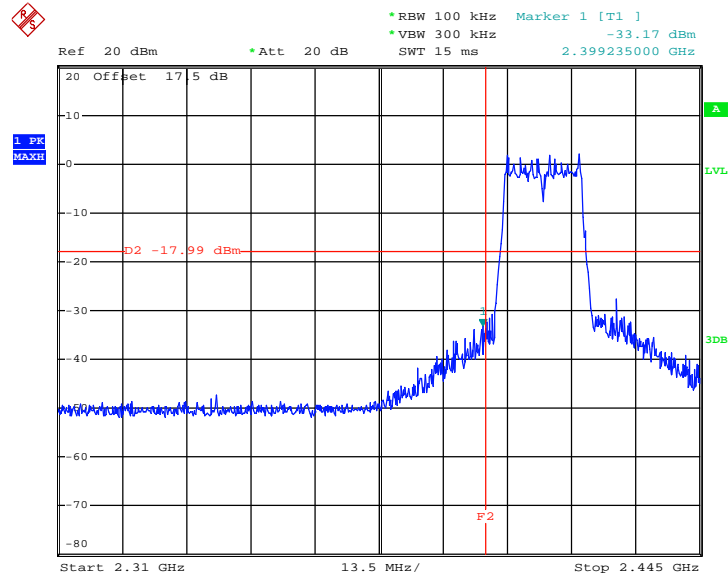

Date: 2.MAR.2013 20:45:24

High Band Edge Plot on 802.11g Channel 11

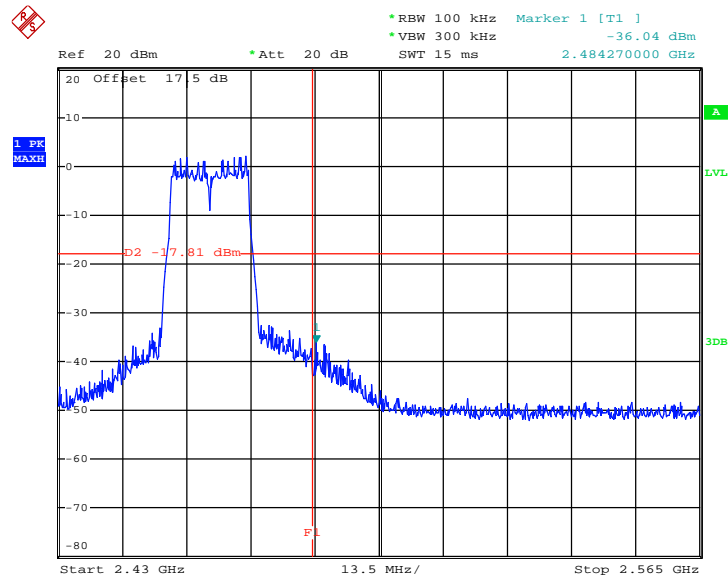


Date: 2.MAR.2013 20:53:52




Test Mode :	802.11n HT20	Temperature :	23~24°C
Test Band :	Low and High	Relative Humidity :	47~48%
Test Channel :	01 and 11	Test Engineer :	Lizy Li

Low Band Edge Plot on 802.11n HT20 Channel 01

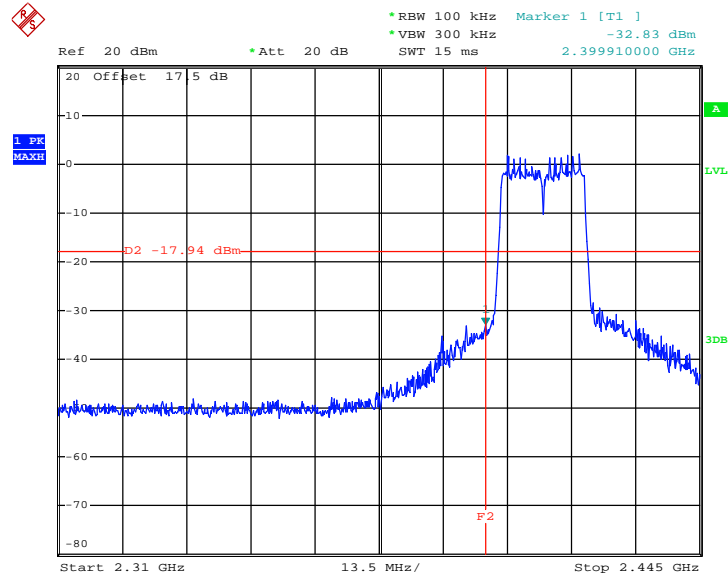

Date: 2.MAR.2013 21:00:03

High Band Edge Plot on 802.11n HT20 Channel 11

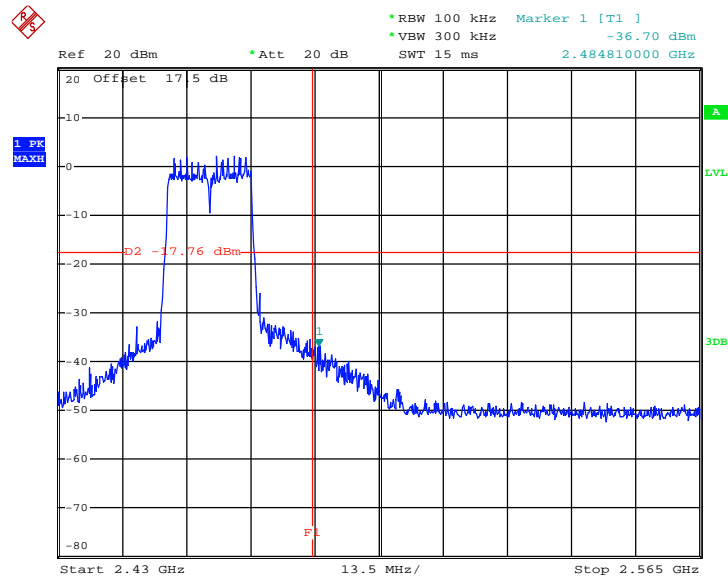


Date: 2.MAR.2013 21:07:09




Test Mode :	802.11n HT40	Temperature :	23~24°C
Test Band :	Low and High	Relative Humidity :	47~48%
Test Channel :	03 and 09	Test Engineer :	Lizy Li

Low Band Edge Plot on 802.11n HT40 Channel 03

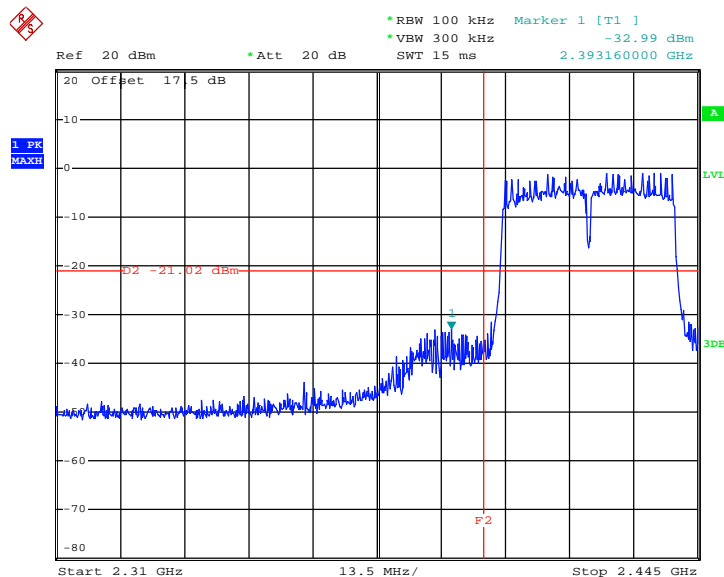

Date: 2.MAR.2013 21:45:14

High Band Edge Plot on 802.11n HT40 Channel 09

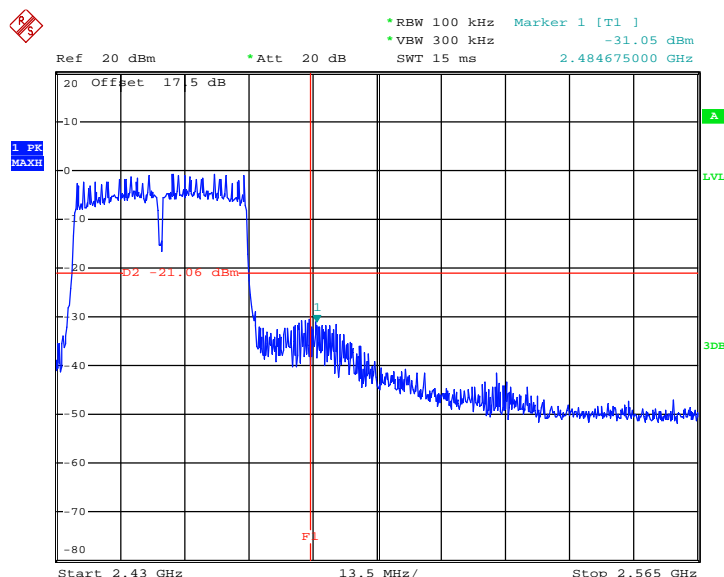


Date: 2.MAR.2013 21:52:19

3.4.6 Test Plots of Spurious Emission

Test Mode :	802.11b	Temperature :	23~24°C
Test Band :	30MHz-3GHz and 2G-25GHz	Relative Humidity :	47~48%
Test Channel :	01, 06, 11	Test Engineer :	Lizy Li

802.11b 30 MHz~3 GHz


Conducted Spurious Emission Plot on Channel 01

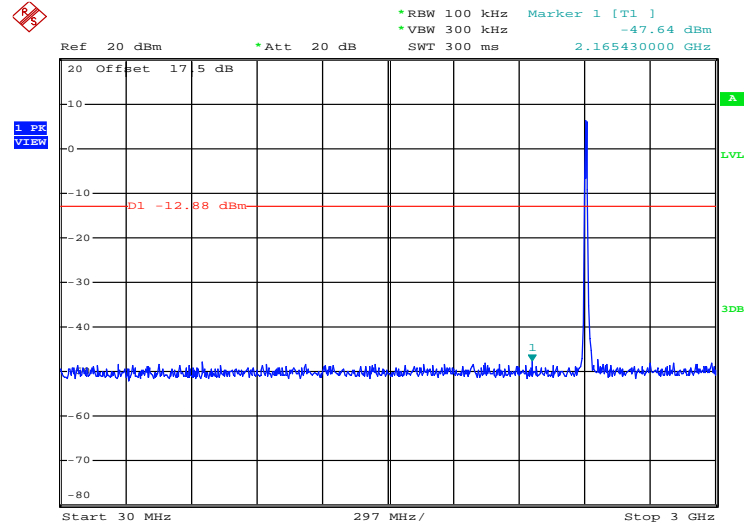

Date: 2.MAR.2013 20:32:44

802.11b 2 GHz~25 GHz


Conducted Spurious Emission Plot on Channel 01

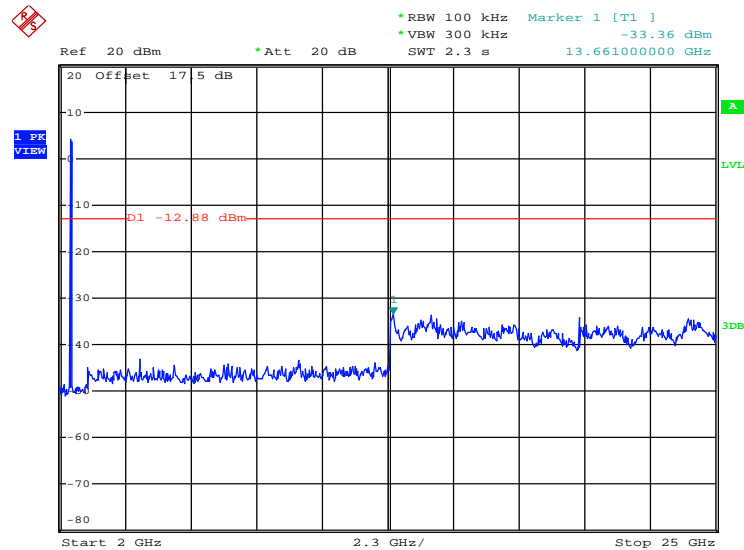

Date: 2.MAR.2013 20:33:02

802.11b 30 MHz~3 GHz


Conducted Spurious Emission Plot on Channel 06

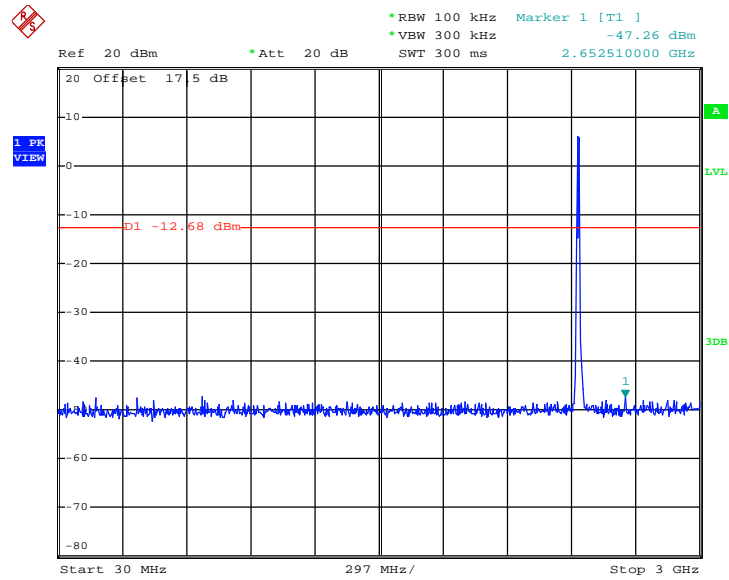

Date: 2.MAR.2013 20:36:18

802.11b 2 GHz~25 GHz

Conducted Spurious Emission Plot on Channel 06

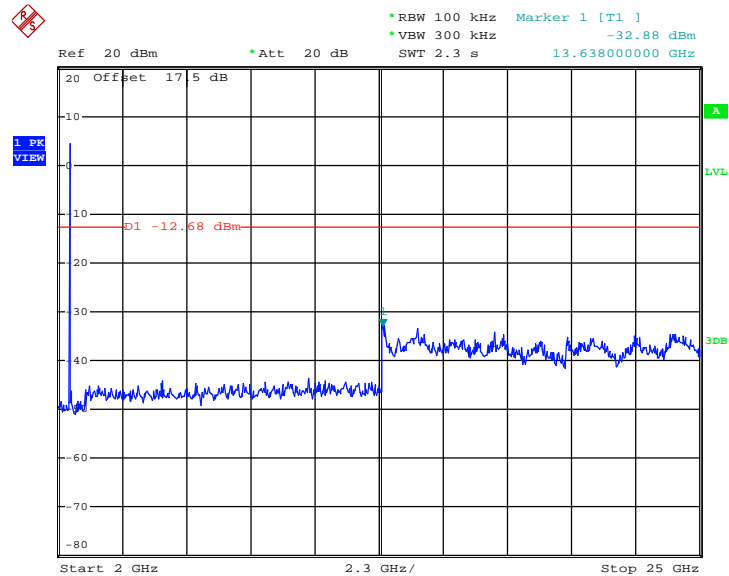


Date: 2.MAR.2013 20:36:37



802.11b 30 MHz~3 GHz


Conducted Spurious Emission Plot on Channel 11

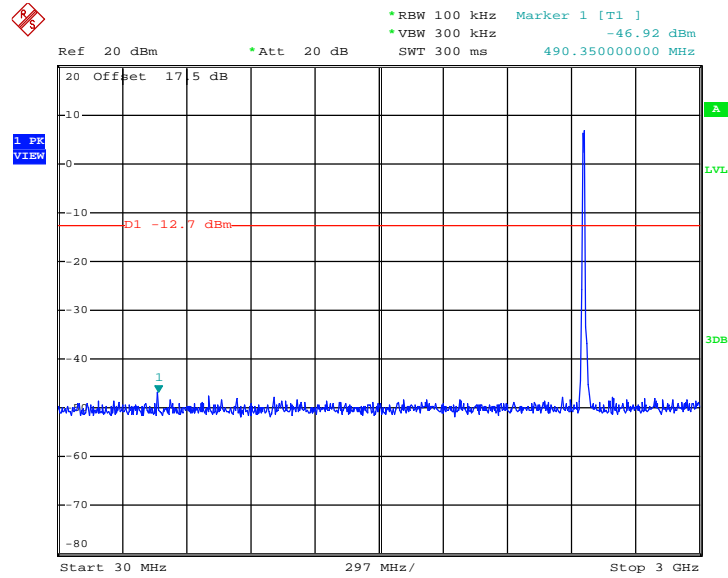

Date: 2.MAR.2013 20:41:52

802.11b 2 GHz~25 GHz

Conducted Spurious Emission Plot on Channel 11

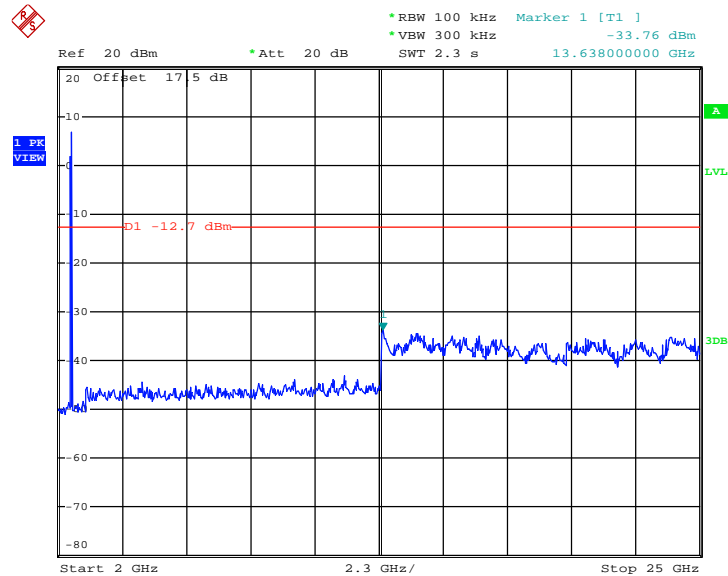


Date: 2.MAR.2013 20:42:10



Test Mode :	802.11g	Temperature :	23~24°C
Test Band :	30MHz-3GHz and 2G-25GHz	Relative Humidity :	47~48%
Test Channel :	01, 06, 11	Test Engineer :	Lizy Li

802.11g 30 MHz~3 GHz


Conducted Spurious Emission Plot on Channel 01

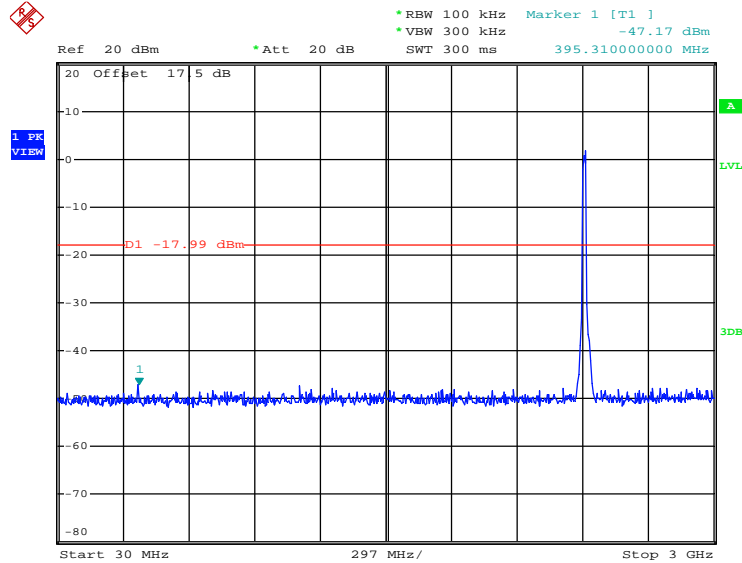

Date: 2.MAR.2013 20:45:51

802.11g 2 GHz~25 GHz

Conducted Spurious Emission Plot on Channel 01

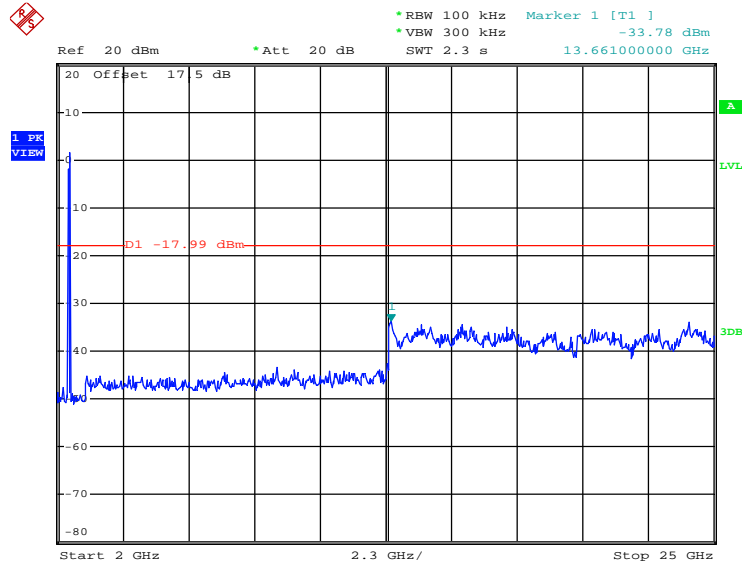


Date: 2.MAR.2013 20:46:09



802.11g 30 MHz~3 GHz


Conducted Spurious Emission Plot on Channel 06

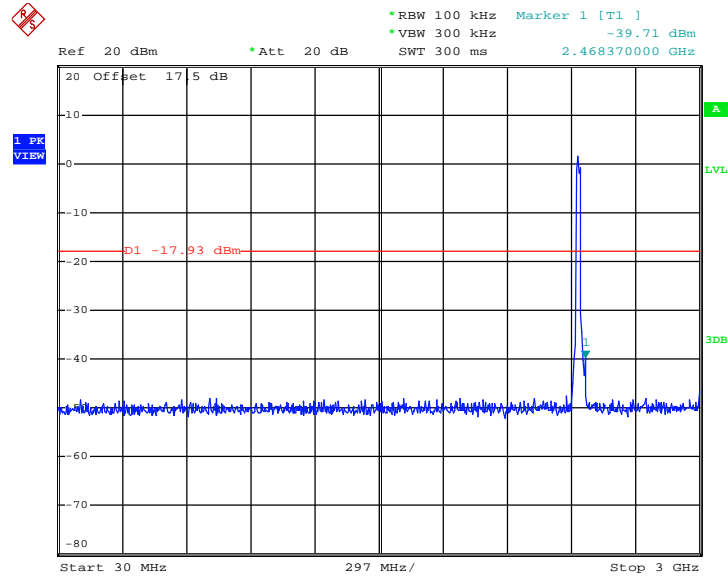

Date: 2.MAR.2013 20:50:35

802.11g 2 GHz~25 GHz

Conducted Spurious Emission Plot on Channel 06

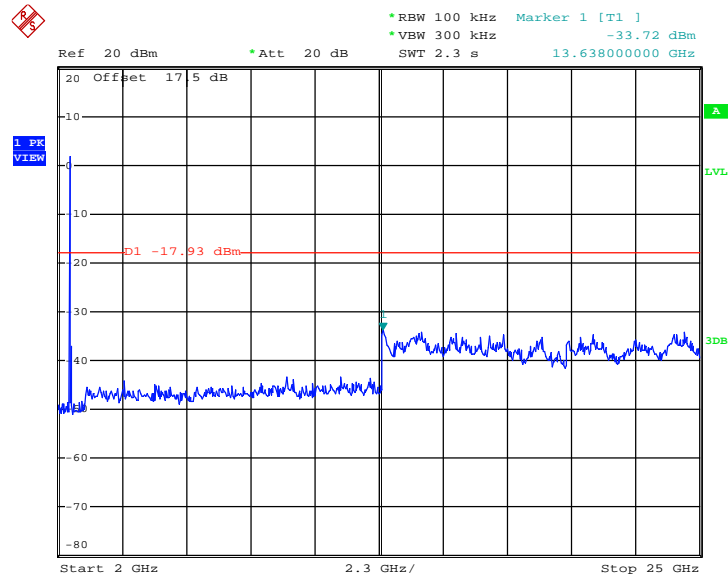


Date: 2.MAR.2013 20:50:54



802.11g 30 MHz~3 GHz


Conducted Spurious Emission Plot on Channel 11

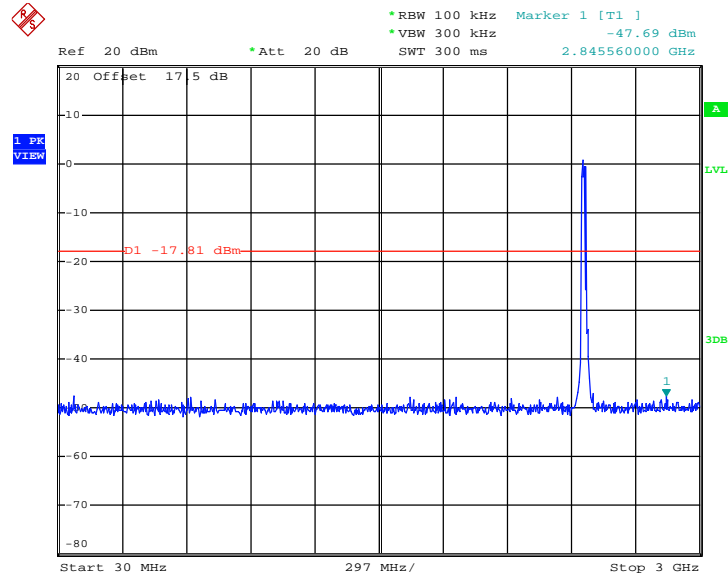

Date: 2.MAR.2013 20:55:59

802.11g 2 GHz~25 GHz

Conducted Spurious Emission Plot on Channel 11

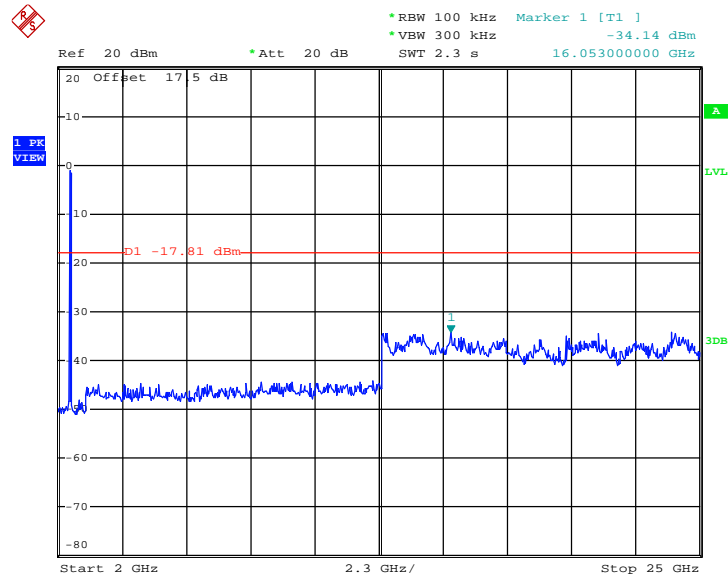


Date: 2.MAR.2013 20:56:17



Test Mode :	802.11n HT20	Temperature :	23~24°C
Test Band :	30MHz-3GHz and 2G-25GHz	Relative Humidity :	47~48%
Test Channel :	01, 06, 11	Test Engineer :	Lizy Li

802.11n HT20 30 MHz~3 GHz


Conducted Spurious Emission Plot on Channel 01

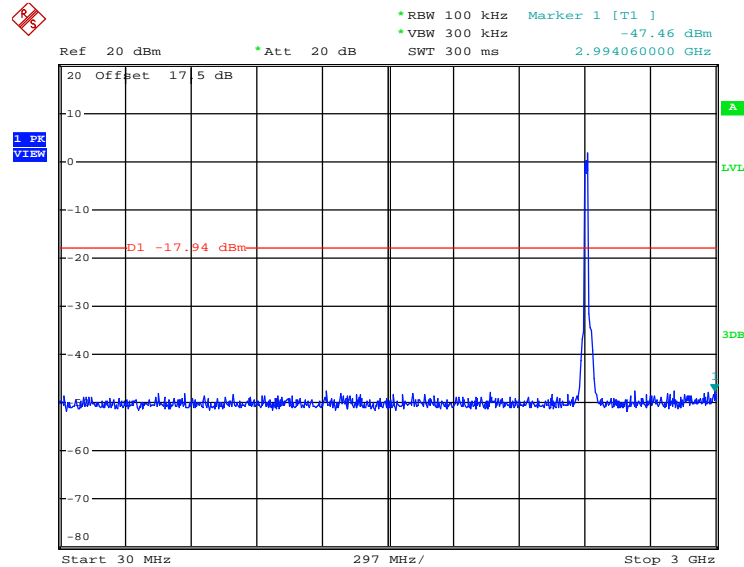

Date: 2.MAR.2013 21:00:32

802.11n HT20 2 GHz~25 GHz

Conducted Spurious Emission Plot on Channel 01

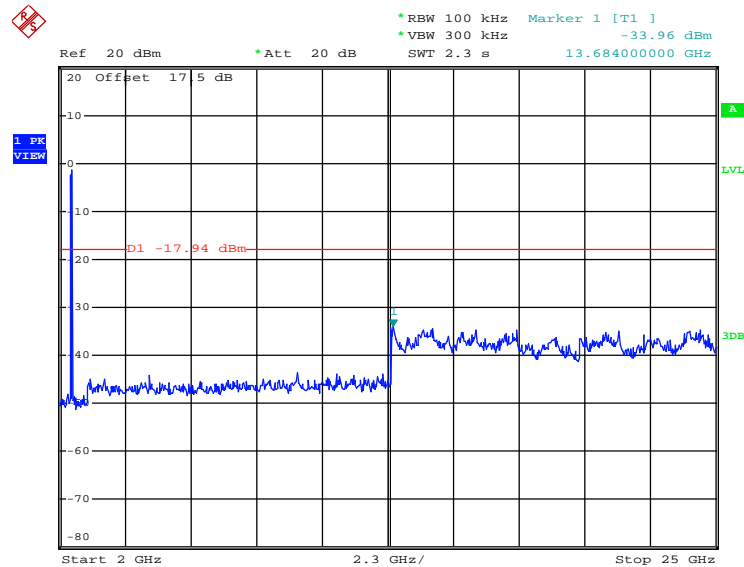


Date: 2.MAR.2013 21:00:51



802.11n HT20 30 MHz~3 GHz


Conducted Spurious Emission Plot on Channel 06

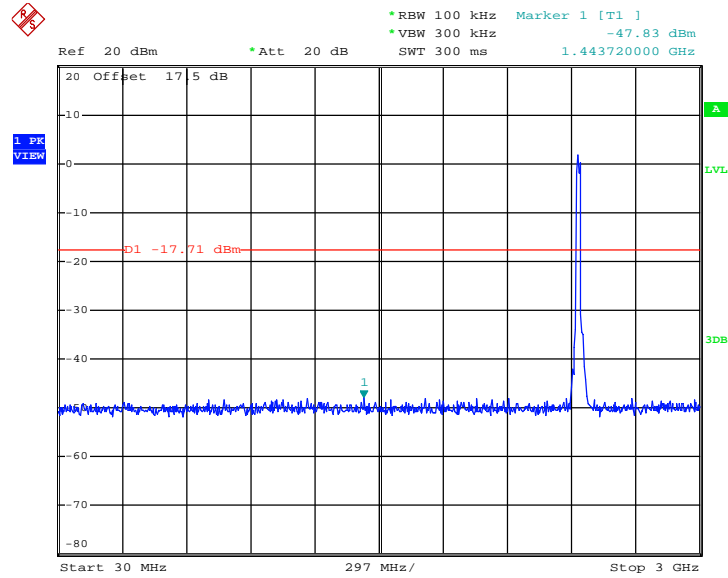

Date: 2.MAR.2013 21:04:29

802.11n HT20 2 GHz~25 GHz

Conducted Spurious Emission Plot on Channel 06

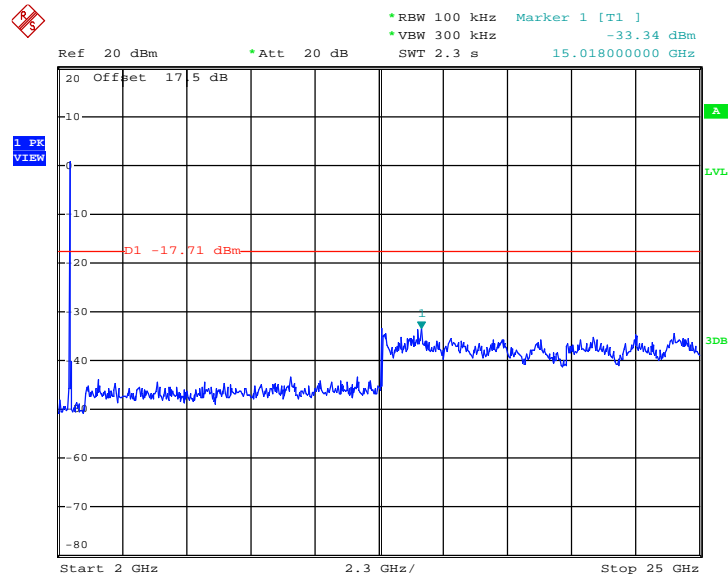


Date: 2.MAR.2013 21:04:47



802.11n HT20 30 MHz~3 GHz


Conducted Spurious Emission Plot on Channel 11

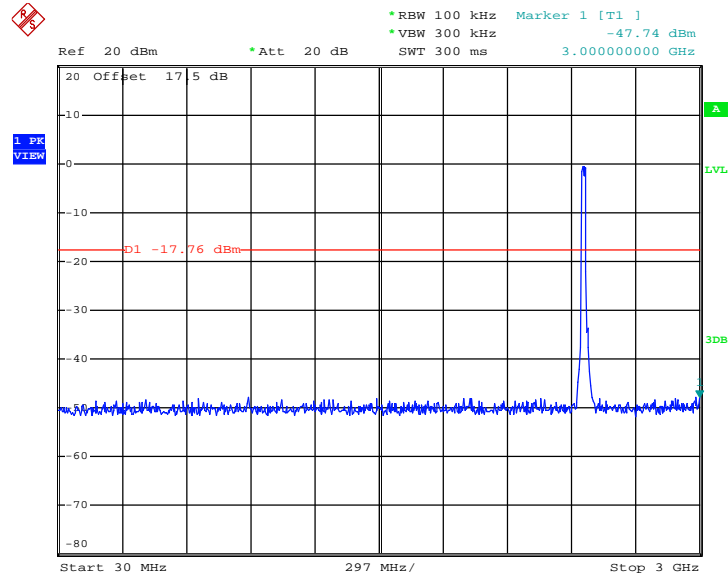

Date: 2.MAR.2013 21:07:32

802.11n HT20 2 GHz~25 GHz

Conducted Spurious Emission Plot on Channel 11

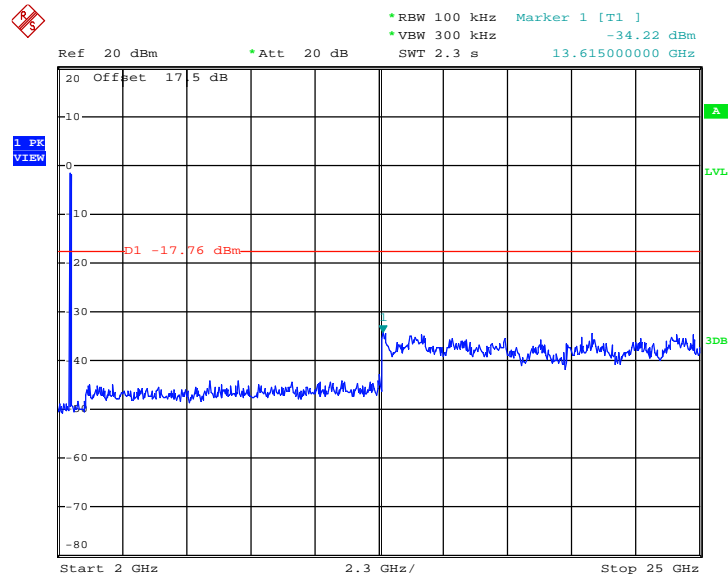


Date: 2.MAR.2013 21:07:51



Test Mode :	802.11n HT40	Temperature :	23~24
Test Band :	30MHz-3GHz and 2G-25GHz	Relative Humidity :	47~48
Test Channel :	03, 06, 09	Test Engineer :	Lizy Li

802.11n HT40 30 MHz~3 GHz


Conducted Spurious Emission Plot on Channel 03

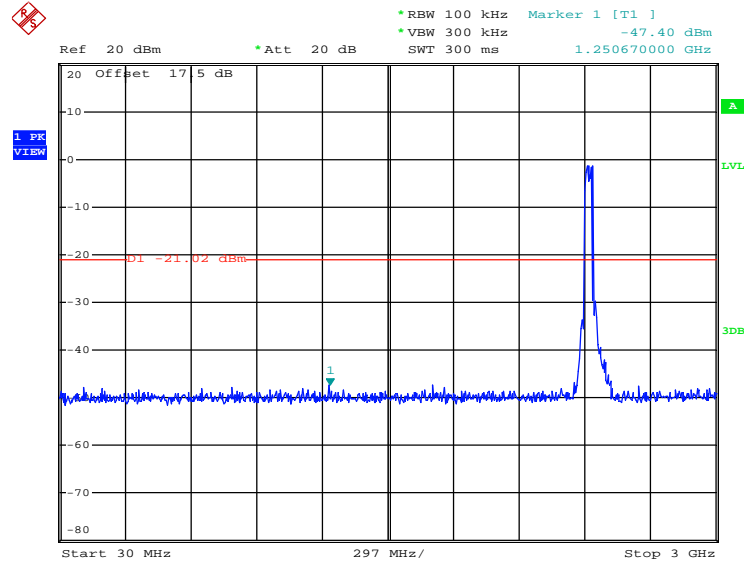

Date: 2.MAR.2013 21:59:09

802.11n HT40 2 GHz~25 GHz

Conducted Spurious Emission Plot on Channel 03

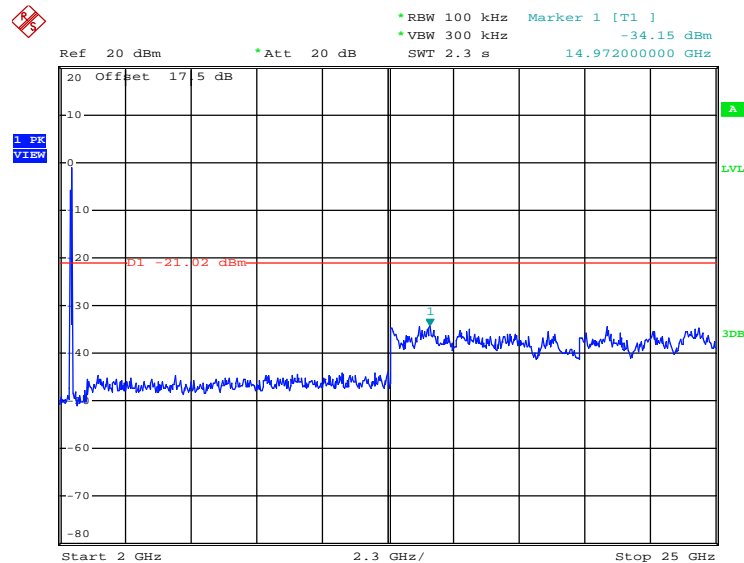


Date: 2.MAR.2013 21:46:08



802.11n HT40 30 MHz~3 GHz


Conducted Spurious Emission Plot on Channel 06

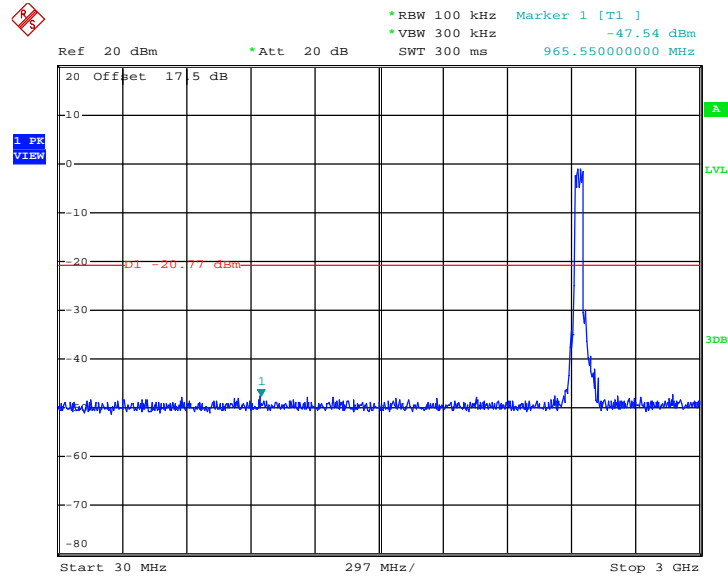

Date: 2.MAR.2013 21:57:50

802.11n HT40 2 GHz~25 GHz

Conducted Spurious Emission Plot on Channel 06

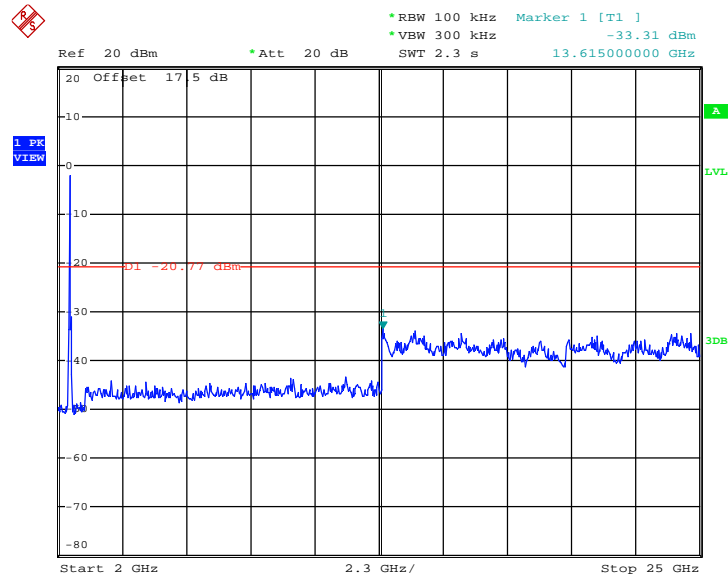


Date: 2.MAR.2013 21:49:30



802.11n HT40 30 MHz~3 GHz


Conducted Spurious Emission Plot on Channel 09

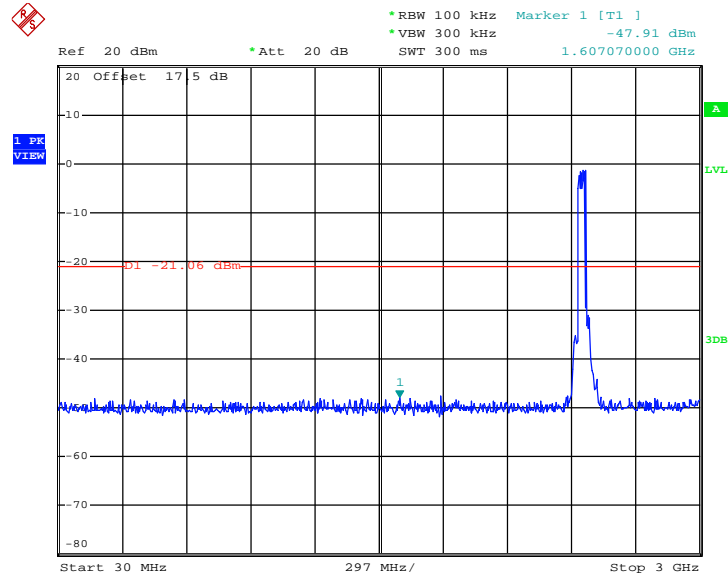

Date: 2.MAR.2013 22:00:06

802.11n HT40 2 GHz~25 GHz

Conducted Spurious Emission Plot on Channel 09

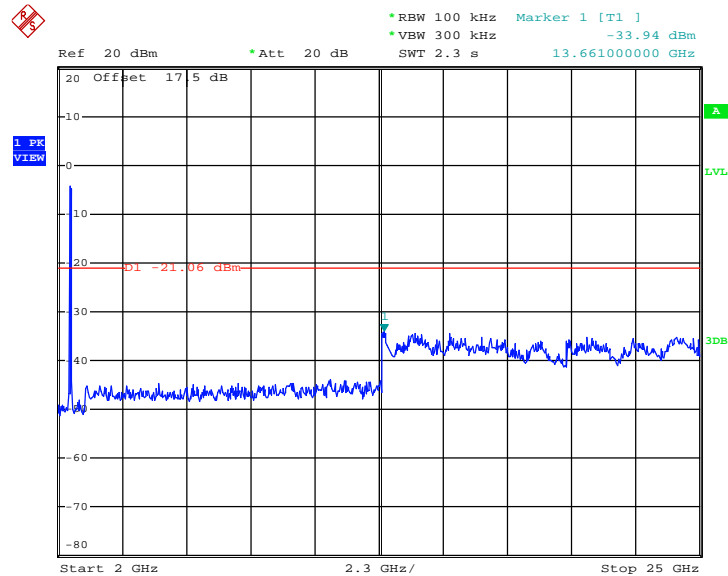

Date: 2.MAR.2013 21:53:01



3.5 Radiated Emission Measurement

3.5.1 Limit of Radiated Emission

In any 100 KHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(KHz)	300
0.490 – 1.705	24000/F(KHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

3.5.3 Test Procedures


1. The testing follows the guidelines in ANSI C63. 10-2009
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 KHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, $VBW = 3$ MHz for $f \geq 1$ GHz for peak measurement.
 For average measurement:
 - $VBW = 10$ Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Band	Duty Cycle(%)	T(us)	1/T(KHz)	VBW Setting
802.11b	0.986	-	-	10hz
802.11g	0.932	1.392	0.718	1Khz
2.4G 802.11n HT20	0.924	1.305	0.766	1Khz
2.4G 802.11n HT40	0.859	0.656	1.524	3Khz


Note: For average measurement with duty cycle < 98%, use reduced VBW measurement method 4.2.3.2.3 in ANSI C63.10.

3.5.4 Test Setup


For radiated emissions below 30MHz

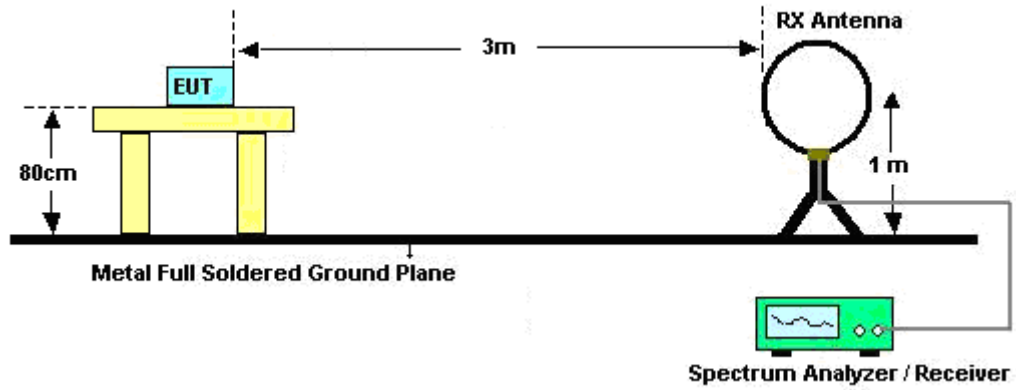

For radiated emissions from 30MHz to 1GHz

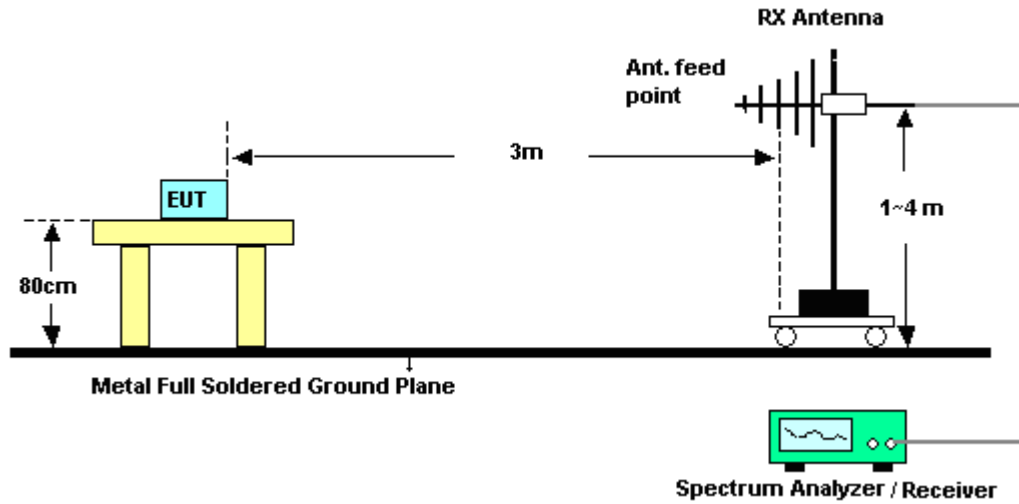

For radiated emissions above 1GHz

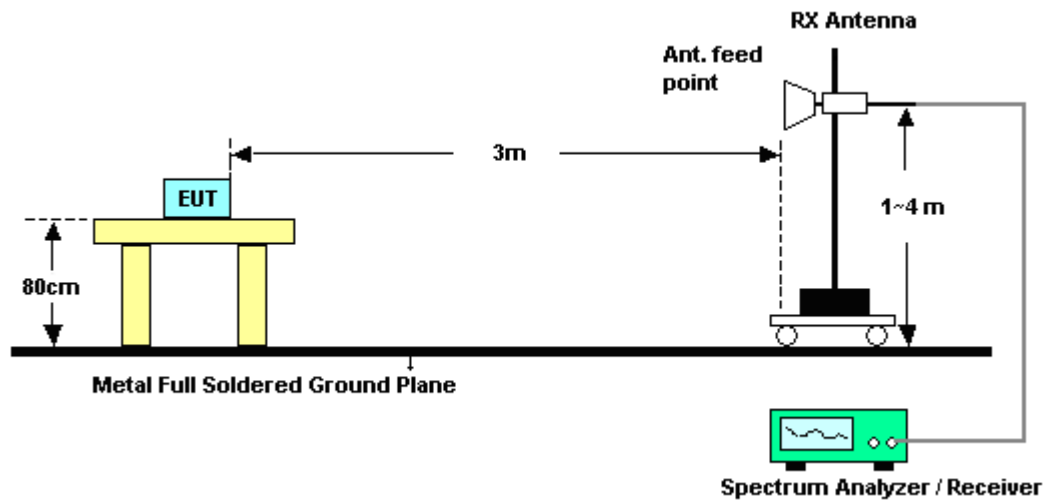

3.5.5 Test Results of Radiated Emissions (9 KHz ~ 30 MHz)

The low frequency, which started from 9 KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.



3.5.6 Test Result of Radiated Band Edges

Test Mode :	802.11b	Temperature :	23~24°C
Test Band :	Low	Relative Humidity :	43~44%
Test Channel :	01	Test Engineer :	Stone Gu

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2385.15	52.53	-21.47	74	49.13	32.82	2.09	31.51	165	44	Peak
2386.77	41.21	-12.79	54	37.77	32.85	2.1	31.51	165	44	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2387.4	54.07	-19.93	74	50.63	32.85	2.1	31.51	100	251	Peak
2386.5	41.76	-12.24	54	38.32	32.85	2.1	31.51	100	251	Average

Test Mode :	802.11b	Temperature :	23~24°C
Test Band :	High	Relative Humidity :	43~44%
Test Channel :	11	Test Engineer :	Stone Gu

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.5	56.95	-17.05	74	53.3	33.01	2.15	31.51	113	40	Peak
2483.5	50.1	-3.9	54	46.45	33.01	2.15	31.51	113	40	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.5	54.7	-19.3	74	51.05	33.01	2.15	31.51	100	263	Peak
2483.5	47.66	-6.34	54	44.01	33.01	2.15	31.51	100	263	Average



Test Mode :	802.11g	Temperature :	23~24°C
Test Band :	Low	Relative Humidity :	43~44%
Test Channel :	01	Test Engineer :	Stone Gu

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2388.75	60.98	-13.02	74	57.54	32.85	2.1	31.51	130	290	Peak
2390	43.56	-10.44	54	40.12	32.85	2.1	31.51	130	290	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2390	61.66	-12.34	74	58.22	32.85	2.1	31.51	140	30	Peak
2390	43.44	-10.56	54	40	32.85	2.1	31.51	140	30	Average

Test Mode :	802.11g	Temperature :	23~24°C
Test Band :	High	Relative Humidity :	43~44%
Test Channel :	11	Test Engineer :	Stone Gu

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2484.7	66.45	-7.55	74	62.8	33.01	2.15	31.51	135	31	Peak
2483.56	47.1	-6.9	54	43.45	33.01	2.15	31.51	135	31	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2485.48	65.33	-8.67	74	61.68	33.01	2.15	31.51	119	258	Peak
2483.56	45.9	-8.1	54	42.25	33.01	2.15	31.51	119	258	Average



Test Mode :	802.11n HT20	Temperature :	23~24°C
Test Band :	Low	Relative Humidity :	43~44%
Test Channel :	01	Test Engineer :	Stone Gu

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.74	66.44	-7.56	74	63	32.85	2.1	31.51	130	50	Peak
2390	45.07	-8.93	54	41.63	32.85	2.1	31.51	130	50	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.83	64.41	-9.59	74	60.97	32.85	2.1	31.51	100	240	Peak
2390	44.98	-9.02	54	41.54	32.85	2.1	31.51	100	240	Average

Test Mode :	802.11n HT20	Temperature :	23~24°C
Test Band :	High	Relative Humidity :	43~44%
Test Channel :	11	Test Engineer :	Stone Gu

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.68	69.25	-4.75	74	65.6	33.01	2.15	31.51	113	41	Peak
2483.53	47.74	-6.26	54	44.09	33.01	2.15	31.51	113	41	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2485.72	64.77	-9.23	74	61.12	33.01	2.15	31.51	119	311	Peak
2483.59	44.79	-9.21	54	41.14	33.01	2.15	31.51	119	311	Average



Test Mode :	802.11n HT40	Temperature :	23~24°C
Test Band :	Low	Relative Humidity :	43~44%
Test Channel :	03	Test Engineer :	Stone Gu

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2388.66	65.7	-8.3	74	62.26	32.85	2.1	31.51	110	60	Peak
2388.66	44.16	-9.84	54	40.72	32.85	2.1	31.51	110	60	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.65	68.87	-5.13	74	65.43	32.85	2.1	31.51	105	250	Peak
2389.74	46.62	-7.38	54	43.18	32.85	2.1	31.51	105	250	Average

Test Mode :	802.11n HT40	Temperature :	23~24°C
Test Band :	High	Relative Humidity :	43~44%
Test Channel :	09	Test Engineer :	Stone Gu

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2484.85	70.49	-3.51	74	66.84	33.01	2.15	31.51	120	60	Peak
2483.5	48.68	-5.32	54	45.03	33.01	2.15	31.51	120	60	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2490.16	67.06	-6.94	74	63.37	33.04	2.16	31.51	110	260	Peak
2483.56	46.83	-7.17	54	43.18	33.01	2.15	31.51	110	260	Average

3.5.7 Test Result of Radiated Emission (30 MHz ~ 10th Harmonic)

Note: Below 1GHz for radiated emission measurement, pre-scanned all test modes and only choose the worst case mode was recorded in the report.

Test Mode :	802.11b	Temperature :	23~24°C
Test Channel :	01	Relative Humidity :	43~44%
Test Engineer :	Stone Gu	Polarization :	Horizontal
Remark :	<ol style="list-style-type: none"> 2412 MHz is fundamental signal which can be ignored. 2399 MHz and 7236 MHz are not within restricted bands, and their limit lines are 20dB below the highest emission level. For example, 107.59 dBuV/m - 20dB = 87.59 dBuV/m. Average measurement was not performed if peak level went lower than the average limit. 		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2399	61.97	-25.62	87.59	58.53	32.85	2.1	31.51	165	44	Peak
2412	101.61	-	-	98.13	32.88	2.11	31.51	165	44	Average
2412	107.59	-	-	104.11	32.88	2.11	31.51	165	44	Peak
4824	46.14	-7.86	54	39.44	35.16	3.08	31.54	100	0	Average
4824	53.58	-20.42	74	46.88	35.16	3.08	31.54	100	0	Peak
7236	53.05	-34.54	87.59	44.62	36.16	3.22	30.95	100	285	Peak



Test Mode :	802.11b	Temperature :	23~24°C
Test Channel :	01	Relative Humidity :	43~44%
Test Engineer :	Stone Gu	Polarization :	Vertical
Remark :	<ol style="list-style-type: none"> 1. 2412 MHz is fundamental signal which can be ignored. 2. 2399 MHz and 7236 MHz are not within restricted bands, and their limit lines are 20dB below the highest emission level. 3. Average measurement was not performed if peak level went lower than the average limit. 		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2399	64.47	-24.62	89.09	61.03	32.85	2.1	31.51	100	251	Peak
2412	103.43	-	-	99.95	32.88	2.11	31.51	100	251	Average
2412	109.09	-	-	105.61	32.88	2.11	31.51	100	251	Peak
4824	43.18	-10.82	54	36.48	35.16	3.08	31.54	124	195	Average
4824	51.19	-22.81	74	44.49	35.16	3.08	31.54	124	195	Peak
7236	53.63	-35.46	89.09	45.2	36.16	3.22	30.95	122	52	Peak



Test Mode :	802.11b	Temperature :	23~24°C
Test Channel :	06	Relative Humidity :	43~44%
Test Engineer :	Stone Gu	Polarization :	Horizontal
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	102.72	-	-	99.16	32.94	2.13	31.51	112	58	Average
2437	108.16	-	-	104.6	32.94	2.13	31.51	112	58	Peak
4874	48.74	-5.26	54	41.97	35.18	3.11	31.52	106	314	Average
4874	52.69	-21.31	74	45.92	35.18	3.11	31.52	106	314	Peak
7311	54.52	-19.48	74	46.07	36.19	3.2	30.94	123	52	Peak



Test Mode :	802.11b	Temperature :	23~24°C
Test Channel :	06	Relative Humidity :	43~44%
Test Engineer :	Stone Gu	Polarization :	Vertical
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	103.13	-	-	99.57	32.94	2.13	31.51	122	257	Average
2437	108.28	-	-	104.72	32.94	2.13	31.51	122	257	Peak
4874	50.42	-23.58	74	43.65	35.18	3.11	31.52	100	255	Peak
7311	54.91	-19.09	74	46.46	36.19	3.2	30.94	100	236	Peak



Test Mode :	802.11b	Temperature :	23~24°C
Test Channel :	11	Relative Humidity :	43~44%
Test Engineer :	Stone Gu	Polarization :	Horizontal
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	103.14	-	-	99.53	32.98	2.14	31.51	113	40	Average
2462	108.44	-	-	104.83	32.98	2.14	31.51	113	40	Peak
4924	44.85	-9.15	54	38.04	35.18	3.14	31.51	141	59	Average
4924	51.82	-22.18	74	45.01	35.18	3.14	31.51	141	59	Peak
7386	53	-21	74	44.52	36.23	3.18	30.93	100	252	Peak



Test Mode :	802.11b	Temperature :	23~24°C
Test Channel :	11	Relative Humidity :	43~44%
Test Engineer :	Stone Gu	Polarization :	Vertical
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	101.48	-	-	97.87	32.98	2.14	31.51	100	263	Average
2462	107.03	-	-	103.42	32.98	2.14	31.51	100	263	Peak
4924	50.67	-23.33	74	43.86	35.18	3.14	31.51	125	65	Peak
7386	55.04	-18.96	74	46.56	36.23	3.18	30.93	136	25	Peak



Test Mode :	802.11g	Temperature :	23~24°C
Test Channel :	01	Relative Humidity :	43~44%
Test Engineer :	Stone Gu	Polarization :	Horizontal
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. 2399 MHz and 7236 MHz are not within restricted bands, and their limit lines are 20dB below the highest emission level. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2399	69.96	-20.37	90.33	66.52	32.85	2.1	31.51	138	32	Peak
2412	99.33	-	-	95.85	32.88	2.11	31.51	138	32	Average
2412	110.33	-	-	106.85	32.88	2.11	31.51	138	32	Peak
4824	46.84	-27.16	74	40.14	35.16	3.08	31.54	125	58	Peak
7236	46.83	-43.5	90.33	38.4	36.16	3.22	30.95	125	99	Peak



Test Mode :	802.11g	Temperature :	23~24°C
Test Channel :	01	Relative Humidity :	43~44%
Test Engineer :	Stone Gu	Polarization :	Vertical
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. 2399 MHz and 7236 MHz are not within restricted bands, and their limit lines are 20dB below the highest emission level. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2399	71.03	-17.75	88.78	67.59	32.85	2.1	31.51	124	288	Peak
2412	98.42	-	-	94.94	32.88	2.11	31.51	124	288	Average
2412	108.78	-	-	105.3	32.88	2.11	31.51	124	288	Peak
4824	47.2	-26.8	74	40.5	35.16	3.08	31.54	100	258	Peak
7236	45.8	-42.98	88.78	37.37	36.16	3.22	30.95	100	223	Peak



Test Mode :	802.11g	Temperature :	23~24°C
Test Channel :	06	Relative Humidity :	43~44%
Test Engineer :	Stone Gu	Polarization :	Horizontal
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	104.72	-	-	101.16	32.94	2.13	31.51	138	0	Peak
2437	94.14	-	-	90.58	32.94	2.13	31.51	138	0	Average
4874	47.43	-26.57	74	40.66	35.18	3.11	31.52	168	122	Peak
7311	47.54	-26.46	74	39.09	36.19	3.2	30.94	100	120	Peak



Test Mode :	802.11g	Temperature :	23~24°C
Test Channel :	06	Relative Humidity :	43~44%
Test Engineer :	Stone Gu	Polarization :	Vertical
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	104	-	-	100.44	32.94	2.13	31.51	166	69	Peak
2437	92.93	-	-	89.37	32.94	2.13	31.51	166	69	Average
4874	45.6	-28.4	74	38.83	35.18	3.11	31.52	100	255	Peak
7311	47.78	-26.22	74	39.33	36.19	3.2	30.94	125	38	Peak



Test Mode :	802.11g	Temperature :	23~24°C
Test Channel :	11	Relative Humidity :	43~44%
Test Engineer :	Stone Gu	Polarization :	Horizontal
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	93.9	-	-	90.29	32.98	2.14	31.51	108	71	Average
2462	104.71	-	-	101.1	32.98	2.14	31.51	108	71	Peak
4924	48.35	-25.65	74	41.54	35.18	3.14	31.51	100	258	Peak
7386	47.64	-26.36	74	39.16	36.23	3.18	30.93	100	125	Peak



Test Mode :	802.11g	Temperature :	23~24°C
Test Channel :	11	Relative Humidity :	43~44%
Test Engineer :	Stone Gu	Polarization :	Vertical
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	92.47	-	-	88.86	32.98	2.14	31.51	148	0	Average
2462	103.52	-	-	99.91	32.98	2.14	31.51	148	0	Peak
4924	48.24	-25.76	74	41.43	35.18	3.14	31.51	200	12	Peak
7386	46.61	-27.39	74	38.13	36.23	3.18	30.93	125	25	Peak



Test Mode :	802.11n HT20	Temperature :	23~24°C
Test Channel :	01	Relative Humidity :	43~44%
Test Engineer :	Stone Gu	Polarization :	Horizontal
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. 2399 MHz and 7236 MHz are not within restricted bands, and their limit lines are 20dB below the highest emission level. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2399	69.87	-16.05	85.92	66.43	32.85	2.1	31.51	140	41	Peak
2412	95.47	-	-	91.99	32.88	2.11	31.51	140	41	Average
2412	105.92	-	-	102.44	32.88	2.11	31.51	140	41	Peak
4824	48.09	-25.91	74	41.39	35.16	3.08	31.54	125	80	Peak
7236	43.65	-42.27	85.92	35.22	36.16	3.22	30.95	128	56	Peak



Test Mode :	802.11n HT20	Temperature :	23~24°C
Test Channel :	01	Relative Humidity :	43~44%
Test Engineer :	Stone Gu	Polarization :	Vertical
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. 2399 MHz and 7236 MHz are not within restricted bands, and their limit lines are 20dB below the highest emission level. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2399	70.95	-13.69	84.64	67.51	32.85	2.1	31.51	100	239	Peak
2412	94.64	-	-	91.16	32.88	2.11	31.51	100	239	Average
2412	104.64	-	-	101.16	32.88	2.11	31.51	100	239	Peak
4824	46.04	-27.96	74	39.34	35.16	3.08	31.54	112	320	Peak
7236	45.15	-39.49	84.64	36.72	36.16	3.22	30.95	118	96	Peak



Test Mode :	802.11n HT20	Temperature :	23~24°C
Test Channel :	06	Relative Humidity :	43~44%
Test Engineer :	Stone Gu	Polarization :	Horizontal
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	95.87	-	-	92.31	32.94	2.13	31.51	100	28	Average
2437	106.44	-	-	102.88	32.94	2.13	31.51	100	28	Peak
4874	47.57	-26.43	74	40.8	35.18	3.11	31.52	125	198	Peak
7311	47.17	-26.83	74	38.72	36.19	3.2	30.94	100	258	Peak



Test Mode :	802.11n HT20	Temperature :	23~24°C
Test Channel :	06	Relative Humidity :	43~44%
Test Engineer :	Stone Gu	Polarization :	Vertical
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	91.44	-	-	87.88	32.94	2.13	31.51	119	360	Average
2437	103.65	-	-	100.09	32.94	2.13	31.51	119	360	Peak
4874	47.07	-26.93	74	40.3	35.18	3.11	31.52	125	69	Peak
7311	48.78	-25.22	74	40.33	36.19	3.2	30.94	125	258	Peak



Test Mode :	802.11n HT20	Temperature :	23~24°C
Test Channel :	11	Relative Humidity :	43~44%
Test Engineer :	Stone Gu	Polarization :	Horizontal
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	95.98	-	-	92.37	32.98	2.14	31.51	110	30	Average
2462	106.6	-	-	102.99	32.98	2.14	31.51	110	30	Peak
4924	48.02	-25.98	74	41.21	35.18	3.14	31.51	200	138	Peak
7386	46.06	-27.94	74	37.58	36.23	3.18	30.93	200	139	Peak



Test Mode :	802.11n HT20	Temperature :	23~24°C
Test Channel :	11	Relative Humidity :	43~44%
Test Engineer :	Stone Gu	Polarization :	Vertical
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2462	91.51	-	-	87.9	32.98	2.14	31.51	125	234	Average
2462	103.11	-	-	99.5	32.98	2.14	31.51	125	234	Peak
4924	48.26	-25.74	74	41.45	35.18	3.14	31.51	125	68	Peak
7386	48.09	-25.91	74	39.61	36.23	3.18	30.93	100	95	Peak



Test Mode :	802.11n HT40	Temperature :	23~24°C
Test Channel :	03	Relative Humidity :	43~44%
Test Engineer :	Stone Gu	Polarization :	Horizontal
Remark :	1. 2422 MHz is fundamental signal which can be ignored. 2. 2391 MHz is not within restricted band, and its limit line is 20dB below the highest emission level. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2391	67.28	-13.01	80.29	63.84	32.85	2.1	31.51	108	58	Peak
2422	89.65	-	-	86.13	32.91	2.12	31.51	108	58	Average
2422	100.29	-	-	96.77	32.91	2.12	31.51	108	58	Peak
4844	47.36	-26.64	74	40.63	35.17	3.09	31.53	118	96	Peak
7266	45.04	-28.96	74	36.6	36.18	3.21	30.95	118	58	Peak



Test Mode :	802.11n HT40	Temperature :	23~24°C
Test Channel :	03	Relative Humidity :	43~44%
Test Engineer :	Stone Gu	Polarization :	Vertical
Remark :	1. 2422 MHz is fundamental signal which can be ignored. 2. 2399 MHz is not within restricted band, and its limit line is 20dB below the highest emission level. 3. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2399	68	-13.97	81.97	64.56	32.85	2.1	31.51	100	252	Peak
2422	91.5	-	-	87.98	32.91	2.12	31.51	100	252	Average
2422	101.97	-	-	98.45	32.91	2.12	31.51	100	252	Peak
4844	46.97	-27.03	74	40.24	35.17	3.09	31.53	107	48	Peak
7266	42.31	-31.69	74	33.87	36.18	3.21	30.95	114	60	Peak



Test Mode :	802.11n HT40	Temperature :	23~24°C
Test Channel :	06	Relative Humidity :	43~44%
Test Engineer :	Stone Gu	Polarization :	Horizontal
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	90.94	-	-	87.38	32.94	2.13	31.51	110	52	Average
2437	100.98	-	-	97.42	32.94	2.13	31.51	110	52	Peak
4874	46.9	-27.1	74	40.13	35.18	3.11	31.52	108	278	Peak
7311	44.2	-29.8	74	35.75	36.19	3.2	30.94	105	86	Peak



Test Mode :	802.11n HT40	Temperature :	23~24°C
Test Channel :	06	Relative Humidity :	43~44%
Test Engineer :	Stone Gu	Polarization :	Vertical
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2437	91.94	-	-	88.38	32.94	2.13	31.51	100	235	Average
2437	102.02	-	-	98.46	32.94	2.13	31.51	100	235	Peak
4874	46.9	-27.1	74	40.13	35.18	3.11	31.52	119	52	Peak
7311	43.18	-30.82	74	34.73	36.19	3.2	30.94	140	315	Peak



Test Mode :	802.11n HT40	Temperature :	23~24°C
Test Channel :	09	Relative Humidity :	43~44%
Test Engineer :	Stone Gu	Polarization :	Horizontal
Remark :	1. 2452 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
104.69	32.78	-10.72	43.5	54.66	11.14	0.58	33.6	128	324	Peak
232.73	29.95	-16.05	46	51.47	11.07	0.87	33.46	-	-	Peak
269.59	31.14	-14.86	46	51.26	12.35	0.94	33.41	-	-	Peak
353.98	29.42	-16.58	46	47.1	14.58	1.09	33.35	-	-	Peak
662.44	28.98	-17.02	46	41.47	18.97	1.46	32.92	-	-	Peak
866.14	31.71	-14.29	46	42.2	20.48	1.66	32.63	-	-	Peak
2452	90.8	-	-	87.24	32.94	2.13	31.51	113	63	Average
2452	102.48	-	-	98.92	32.94	2.13	31.51	113	63	Peak
4904	48.67	-25.33	74	41.88	35.18	3.13	31.52	125	75	Peak
7356	46.75	-27.25	74	38.28	36.21	3.19	30.93	128	312	Peak



Test Mode :	802.11n HT40	Temperature :	23~24°C
Test Channel :	09	Relative Humidity :	43~44%
Test Engineer :	Stone Gu	Polarization :	Vertical
Remark :	1. 2452 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
83.35	30.39	-9.61	40	56.12	7.33	0.54	33.6	-	-	Peak
132.82	34.47	-9.03	43.5	55.92	11.45	0.68	33.58	112	245	Peak
170.65	30.24	-13.26	43.5	53.93	9.12	0.75	33.56	-	-	Peak
221.09	28.32	-17.68	46	50.81	10.17	0.85	33.51	-	-	Peak
355.92	32.1	-13.9	46	49.73	14.62	1.09	33.34	-	-	Peak
383.08	34.12	-11.88	46	50.78	15.54	1.12	33.32	-	-	Peak
2452	90.85	-	-	87.29	32.94	2.13	31.51	100	242	Average
2452	101.38	-	-	97.82	32.94	2.13	31.51	100	242	Peak
4904	47.82	-26.18	74	41.03	35.18	3.13	31.52	115	24	Peak
7356	46.63	-27.37	74	38.16	36.21	3.19	30.93	100	258	Peak

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 KHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

See list of measuring instruments of this test report.

3.6.3 Test Procedures

1. The testing follows the guidelines in ANSI C63.4-2003 and ANSI C63.10-2009.
2. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connecting to the other LISN.
5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
6. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
7. Both sides of AC line were checked for maximum conducted interference.
8. The frequency range from 150 KHz to 30 MHz was searched.
9. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.


3.6.4 Test Setup

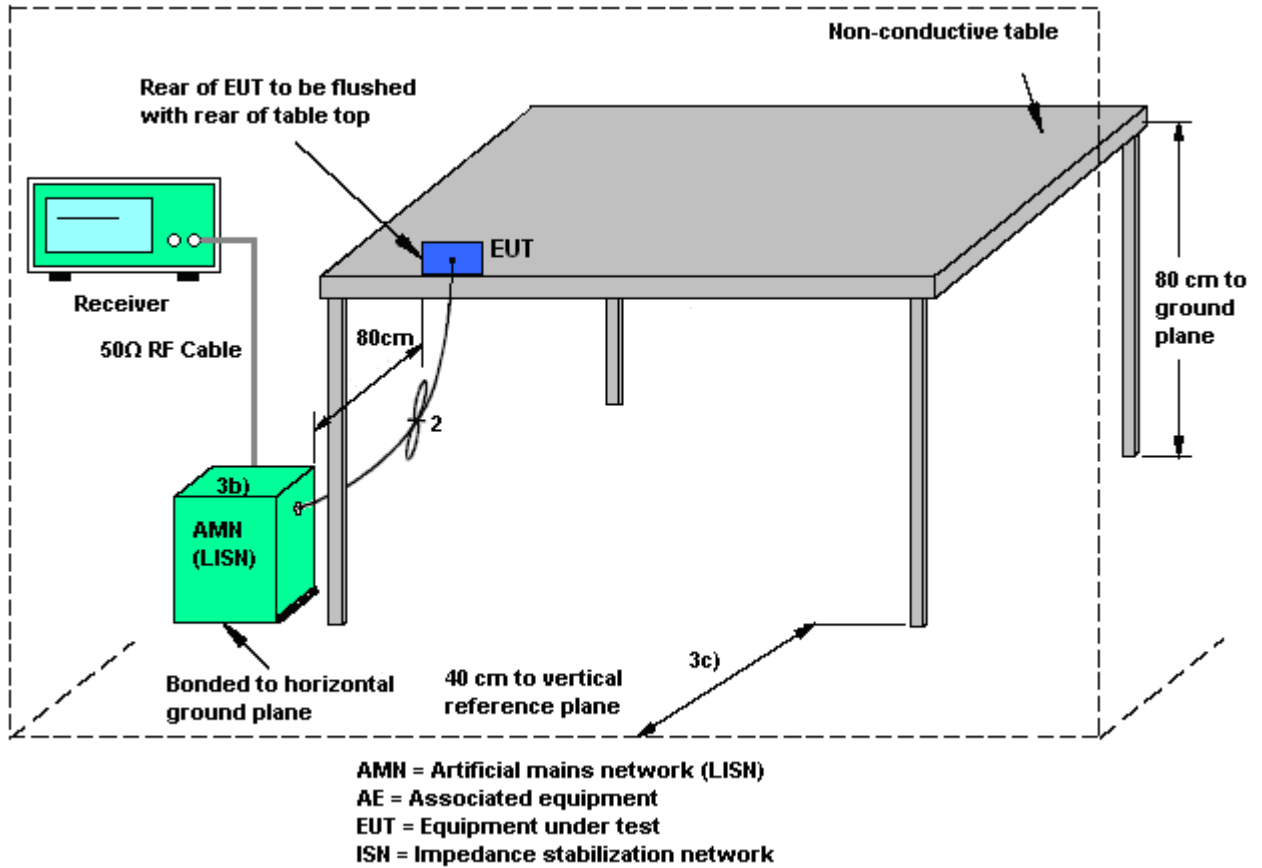



3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	19~20°C
Test Engineer :	Tom Wang	Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter) + Earphone + Battery 1 for Sample 1		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

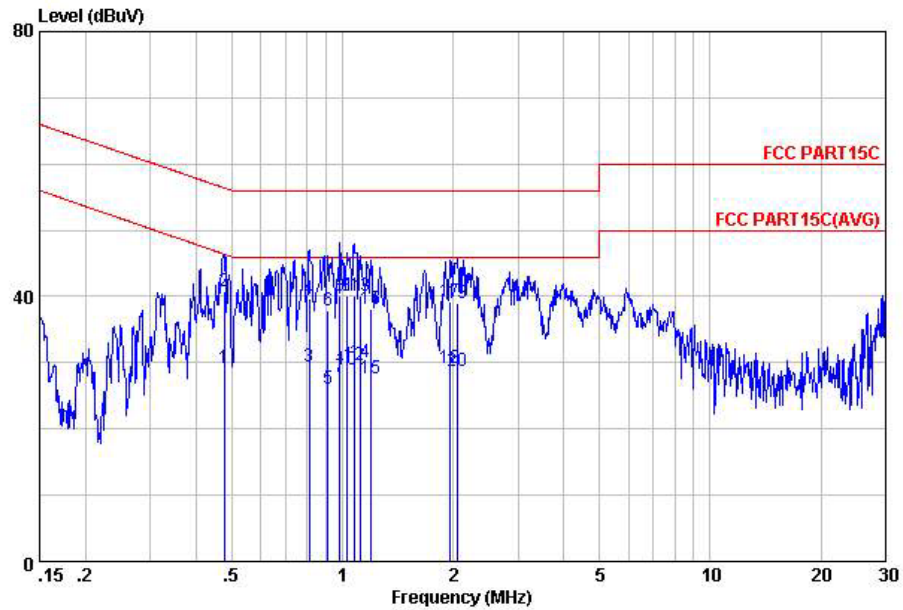


Site : C001-RS
 Condition: FCC PART15C LISN-111230 LINE
 mode : Mode 1

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.48	29.17	-17.24	46.41	19.00	-0.08	10.25	Average
2	0.48	40.87	-15.54	56.41	30.70	-0.08	10.25	QP
3	0.81	29.38	-16.62	46.00	19.19	-0.09	10.28	Average
4	0.81	39.68	-16.32	56.00	29.49	-0.09	10.28	QP
5	0.91	26.08	-19.92	46.00	15.90	-0.10	10.28	Average
6	0.91	37.98	-18.02	56.00	27.80	-0.10	10.28	QP
7	0.98	27.88	-18.12	46.00	17.70	-0.10	10.28	Average
8	0.98	40.08	-15.92	56.00	29.90	-0.10	10.28	QP
9	1.03	40.18	-15.82	56.00	30.00	-0.10	10.28	QP
10	1.03	29.08	-16.92	46.00	18.90	-0.10	10.28	Average
11	1.08	40.18	-15.82	56.00	30.00	-0.10	10.28	QP
12	1.08	29.58	-16.42	46.00	19.40	-0.10	10.28	Average
13	1.12	40.08	-15.92	56.00	29.90	-0.10	10.28	QP
14	1.12	30.08	-15.92	46.00	19.90	-0.10	10.28	Average
15	1.19	27.68	-18.32	46.00	17.50	-0.10	10.28	Average
16	1.19	38.18	-17.82	56.00	28.00	-0.10	10.28	QP
17	1.96	39.29	-16.71	56.00	29.10	-0.11	10.30	QP
18	1.96	29.19	-16.81	46.00	19.00	-0.11	10.30	Average
19	2.05	38.89	-17.11	56.00	28.70	-0.11	10.30	QP
20	2.05	28.79	-17.21	46.00	18.60	-0.11	10.30	Average



Test Mode :	Mode 1	Temperature :	19~20°C
Test Engineer :	Tom Wang	Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter) + Earphone + Battery 1 for Sample 1		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

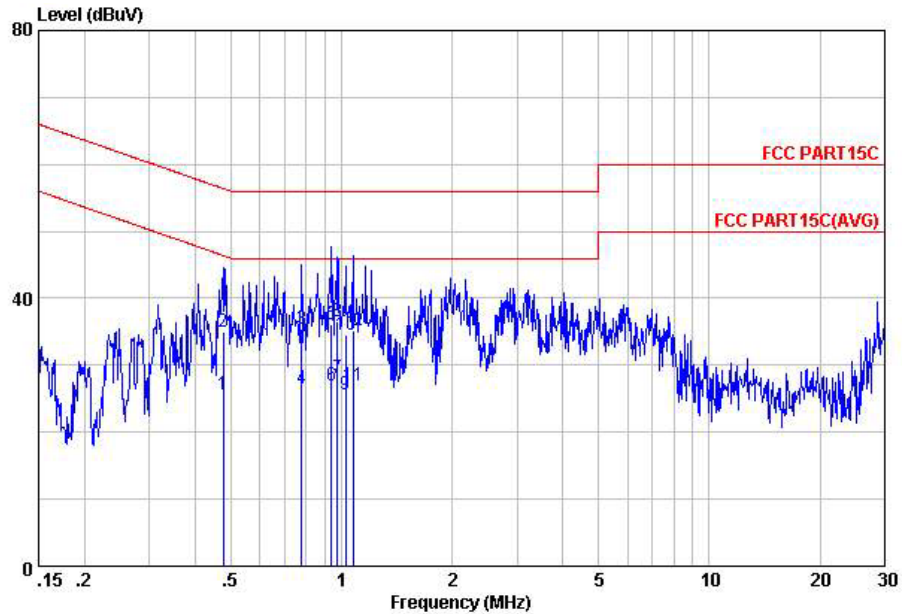

Site : C001-KS
 Condition: FCC PART15C LISN-111230 NEUTRAL

mode : Mode 1

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.48	25.57	-20.84	46.41	15.40	-0.08	10.25	Average
2	0.48	34.97	-21.44	56.41	24.80	-0.08	10.25	QP
3	0.78	35.49	-20.51	56.00	25.30	-0.08	10.27	QP
4	0.78	26.59	-19.41	46.00	16.40	-0.08	10.27	Average
5	0.94	35.99	-20.01	56.00	25.80	-0.09	10.28	QP
6	0.94	26.89	-19.11	46.00	16.70	-0.09	10.28	Average
7	0.97	27.99	-18.01	46.00	17.80	-0.09	10.28	Average
8	0.97	36.49	-19.51	56.00	26.30	-0.09	10.28	QP
9	1.03	25.69	-20.31	46.00	15.50	-0.09	10.28	Average
10	1.03	34.59	-21.41	56.00	24.40	-0.09	10.28	QP
11	1.08	26.99	-19.01	46.00	16.80	-0.09	10.28	Average
12	1.08	35.19	-20.81	56.00	25.00	-0.09	10.28	QP



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.7.2 Antenna Connected Construction

Non-standard connector used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Dec. 29, 2012	Mar. 02, 2012~ Mar. 18, 2013	Dec. 28, 2013	Conducted (TH01-KS)
Power Meter	Agilent	E4416A	MY45101555	N/A	Aug. 22, 2012	Mar. 02, 2012~ Mar. 18, 2013	Aug. 21, 2013	Conducted (TH01-KS)
Power Sensor	Agilent	E9327A	MY44421198	N/A	Aug. 22, 2012	Mar. 02, 2012~ Mar. 18, 2013	Aug. 21, 2013	Conducted (TH01-KS)
DC Power Supply	GWINSTEK	GPS-3030D	E1884515	N/A	Aug. 22, 2012	Mar. 02, 2012~ Mar. 18, 2013	Aug. 21, 2013	Conducted (TH01-KS)
Thermal Chamber	Ten Billion	TTC-B3S	TBN-960502	N/A	Dec. 29, 2012	Mar. 02, 2012~ Mar. 18, 2013	Dec. 28, 2013	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESCI	100534	9kHz~3GHz	Nov. 08, 2012	Mar. 18, 2013	Nov. 07, 2013	Radiation (03CH01-KS)
Spectrum Analyzer	R&S	FSP30	100400	9kHz~30GHz	Jun. 01, 2012	Mar. 18, 2013	May 31, 2013	Radiation (03CH01-KS)
Bilog Antenna	SCHAFFNER	CBL6112D	23182	25MHz~2GHz	Dec. 07, 2012	Mar. 18, 2013	Dec. 06, 2013	Radiation (03CH01-KS)
Loop Antenna	R&S	HFH2-Z2	860004/ 001	9 kHz~30 MHz	Jul. 03, 2012	Mar. 18, 2013	Jul. 02, 2014	Radiation (03CH01-KS)
Double Ridge Horn Antenna	ETS-Lindgren	1908/7/13	00075957	1GHz~18GHz	Dec. 07, 2012	Mar. 18, 2013	Dec. 06, 2013	Radiation (03CH01-KS)
Amplifier	com-power	PA-103A	161069	1MHz~1GHz	Jun. 01, 2012	Mar. 18, 2013	May 31, 2013	Radiation (03CH01-KS)
Amplifier	Agilent	8449B	3008A02370	1GHz~26.5GHz	Dec. 29, 2012	Mar. 18, 2013	Dec. 28, 2013	Radiation (03CH01-KS)
Active Horn Antenna	com-power	AHA-118	701023	1GHz~18GHz	Nov. 07, 2012	Mar. 18, 2013	Nov. 06, 2013	Radiation (03CH01-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	9170249	15GHz~40GHz	Nov. 23, 2012	Mar. 18, 2013	Nov. 22, 2013	Radiation (03CH01-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz	Jun. 01, 2012	Mar. 18, 2013	May 31, 2013	Conduction (CO01-KS)
LISN	MessTec	AN3016	60103	9kHz~30MHz	Dec. 29, 2012	Mar. 18, 2013	Dec. 28, 2013	Conduction (CO01-KS)
LISN	MessTec	AN3016	60105	9kHz~30MHz	Dec. 29, 2012	Mar. 18, 2013	Dec. 28, 2013	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	N/A	Nov. 15, 2012	Mar. 18, 2013	Nov. 14, 2013	Conduction (CO01-KS)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.26
---	------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.54
---	------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.72
---	------



Appendix A. Photographs of EUT

Please refer to Sporton report number EP312802 as below.