

# FCC SAR Test Report

## FCC ID: O57C640RTL8852

**Report No.** : BTL-FCC-SAR-1-2007T046B

**Equipment** : Notebook Computer

**Model Name** : Yoga 6 13ARE05

**Series Model** : Yoga 6 13ARE05\*\*\*\*\*; Yoga 6 13ALC6; Yoga 6 13ALC6\*\*\*\*\* (\*=0~9, A~z, “\_” or blank)

**Brand Name** : Lenovo

**Applicant** : Lenovo (Shanghai) Electronics Technology Co., Ltd.

**Address** : Section 304-305, Building No. 4, # 222, Meiyue Road, China (Shanghai) Pilot Free Trade Zone

**Manufacturer** : Lenovo PC HK Limited

**Address** : 23/F, Lincoln House, Taikoo Place 979 King"s Road, Quarry Bay, Hong Kong, P.R.China

**Date of Receipt** : April. 13, 2021

**Date of Test** : April. 22, 2021 ~ April. 23, 2021

**Issued Date** : May. 10, 2021

The above equipment has been tested and found in compliance with the requirement of the above standards by BTL Inc.

**Prepared by** : Justin Huang  
Justin Huang, Engineer

**Approved by** : Herbert Liu  
Herbert Liu, Section Manager



Certificate #5123.02

**BTL Inc.**

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.  
Tel: +86-769-8318-3000 Web: www.newbtl.com

**Declaration**

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

**BTL's** reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

The report must not be used by the client to claim product certification, approval, or endorsement by NIST, A2LA, or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

**BTL's** laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

**BTL** is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

**Limitation**

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

<b>Table of Contents</b>	<b>Page</b>
<b>1. GENERAL INFORMATION</b>	<b>6</b>
1.1. GENERAL DESCRIPTION OF EUT	6
<b>2. RF EMISSIONS MEASUREMENT</b>	<b>7</b>
2.1. TEST FACILITY	7
2.2. MEASUREMENT UNCERTAINTY	7
2.3 WLAN ANTENNA INFORMATION:	9
2.4 THE MAXIMUM SAR 1G VALUES	10
2.5 LABORATORY ENVIRONMENT	10
2.6 MAIN TEST INSTRUMENTS	11
<b>3. SAR MEASUREMENTS SYSTEM CONFIGURATION</b>	<b>12</b>
3.1. SAR MEASUREMENT SET-UP	12
3.1.1. TEST SETUP LAYOUT	12
3.2. DASY5 E-FIELD PROBE SYSTEM	13
3.2.1. EX3DV4 PROBE SPECIFICATION	13
3.2.2. E-FIELD PROBE CALIBRATION	14
3.2.3. OTHER TEST EQUIPMENT	15
3.2.4. SCANNING PROCEDURE	16
3.2.5. DATA STORAGE AND EVALUATION	17
3.2.6. DATA EVALUATION BY SEMCAD	18
<b>4. TISSUE-EQUIVALENT LIQUID</b>	<b>20</b>
4.1. TISSUE-EQUIVALENT LIQUID INGREDIENTS	20
4.2. TISSUE-EQUIVALENT LIQUID PROPERTIES	21
<b>5. SYSTEM CHECK</b>	<b>22</b>
5.1. DESCRIPTION OF SYSTEM CHECK	22
5.2. DESCRIPTION OF SYSTEM CHECK	23
<b>6. OPERATIONAL CONDITIONS DURING TEST</b>	<b>24</b>
6.1. GENERAL DESCRIPTION OF TEST PROCEDURES	24
6.2. TEST POSITION OF PORTABLE DEVICES	24
6.3. TEST POSITION ANTENNA LOCATION	24
6.4. TEST POSITION	26
6.4.1. BODY TEST CONFIGURATION	26
6.3 SAR EXCLUSION CALCULATIONS FOR WI-FI ANTENNA < 50MM FROM THE USER	27
6.4 SAR EXCLUSION CALCULATIONS FOR WI-FI ANTENNA > 50MM FROM THE USER	29
<b>7. SAR MEASUREMENT VARIABILITY AND UNCERTAINTY</b>	<b>31</b>
7.1. SAR MEASUREMENT VARIABILITY	31
7.2. TEST CONFIGURATION	32
7.2.1. WIFI TEST CONFIGURATION	32
7.2.2 WLAN 2.4G SAR TEST REQUIREMENTS	32
7.2.3 WLAN 5G SAR TEST REQUIREMENTS	33
7.2.4 OFDM TRANSMISSION MODE AND SAR TEST CHANNEL SELECTION	33

<b>Table of Contents</b>	<b>Page</b>
7.2.5 INITIAL TEST CONFIGURATION PROCEDURE	33
<b>8. POWER REDUCTION BY PROXIMITY SENSING</b>	<b>34</b>
8.1. PROCEDURES FOR DETERMINING PROXIMITY SENSOR TRIGGERING DISTANCES	34
8.2. PROCEDURES FOR DETERMINING ANTENNA AND PROXIMITY SENSOR COVERAGE	35
8.3. PROXIMITY SENSOR STATUS TABLE OF TRIGGER DISTANCE	36
8.4. TILT ANGLE INFLUENCES TO PROXIMITY SENSOR TRIGGERING	37
8.5. POWER REDUCTION PER AIR-INTERFACE	38
<b>9. CONDUCTED POWER RESULTS</b>	<b>40</b>
9.1. CONDUCTED POWER MEASUREMENT RESULTS OF BLUETOOTH	40
9.2. CONDUCTED POWER MEASUREMENT RESULTS OF 2.4G BAND	41
9.3. CONDUCTED POWER MEASUREMENTS OF 5G UNII_1	43
9.4. CONDUCTED POWER MEASUREMENTS OF 5G UNII_2A	44
9.5. CONDUCTED POWER MEASUREMENTS OF 5G UNII_2C	45
9.6. CONDUCTED POWER MEASUREMENTS OF 5G UNII_3	46
9.7. SAR TEST PROCEDURE	47
<b>10. SAR TEST RESULTS</b>	<b>48</b>
10.1. BODY SAR TEST RESULTS	48
<b>11. SIMULTANEOUS TRANSMISSION CONDITIONS</b>	<b>50</b>
11.1 STAND-ALONE SAR TEST EXCLUSION	50
11.3 ESTIMATED SAR FOR SIMULTANEOUS TRANSMISSION SAR ANALYSIS	52
11.3.1 ESTIMATED SAR FOR BLUETOOTH	52
11.4 SIMULTANEOUS TRANSMISSION CONDITIONS	53
<b>12. TEST LAYOUT</b>	<b>54</b>

**REPORT ISSUED HISTORY**

Report Version	Description	Issued Date
R00	Original Issue.	2021/5/10

# 1 GENERAL INFORMATION

## 1.1 GENERAL DESCRIPTION OF EUT

<b>Equipment</b>	Notebook Computer	
<b>Brand Name</b>	Lenovo	
<b>Model Name</b>	Yoga 6 13ARE05	
<b>Model No.</b>	Yoga 6 13ALC05; Yoga 6 13ALC05***** (*=0~9, A~z, “_” or blank)	
<b>Battery Information</b>	Band: Lenovo Model: ADLX45YCC3D Rating: 20V / 2.25A	
<b>WiFi Module</b>	Brand Name: Intel Model Name: AX200NGW	
<b>P-Sensor Type</b>	Capacitive Proximity Sensor	
<b>Frequency Range</b>	WLAN 2.4 GHz Band:	2400 MHz ~ 2483.5 MHz
	RLAN 5 GHz Band:	5150 MHz ~ 5250 MHz
		5250 MHz ~ 5350 MHz
5470 MHz ~ 5725 MHz		
5725 MHz ~ 5850 MHz		
Bluetooth:	2400 MHz ~ 2483.5 MHz	
<b>Standard(s)</b>	<b>KDB447498 D01</b> General RF Exposure Guidance v06 <b>KDB248227 D01</b> 802.11 Wi-Fi SAR v02r02 <b>KDB865664 D01</b> SAR measurement 100 MHz to 6 GHz v01r04 <b>KDB865664 D02</b> SAR Reporting v01r02 <b>KDB616217 D04</b> SAR for laptop and Tablets <b>ANSI Std C95.1:2019</b> Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz – 300 GHz.	

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCC SAR-1-2007T046B) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

## 2 RF EMISSIONS MEASUREMENT

### 2.1 TEST FACILITY

The test facilities used to collect the test data in this report is **SAR Test room** at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

### 2.2 MEASUREMENT UNCERTAINTY

Uncertainty Budget for Frequency range of 300 MHz to 3 GHz

Error Description	Uncertainty Value ( $\pm$ %)		Probability Distribution	Divisor	C <sub>i</sub> (1g)	C <sub>i</sub> (10g)	Standard Uncertainty (1g)	Standard Uncertainty (10g)	V <sub>i</sub> V <sub>eff</sub>
<b>Measurement System</b>									
Probe Calibration	6.05		Normal	1	1	1	$\pm 6.05$ %	$\pm 6.05$ %	$\infty$
Axial Isotropy	4.7		Rectangular	$\sqrt{3}$	0.7	0.7	$\pm 1.9$ %	$\pm 1.9$ %	$\infty$
Hemispherical Isotropy	9.6		Rectangular	$\sqrt{3}$	0.7	0.7	$\pm 3.9$ %	$\pm 3.9$ %	$\infty$
Boundary Effects	1		Rectangular	$\sqrt{3}$	1	1	$\pm 0.6$ %	$\pm 0.6$ %	$\infty$
Linearity	4.7		Rectangular	$\sqrt{3}$	1	1	$\pm 2.7$ %	$\pm 2.7$ %	$\infty$
Detection Limits	1		Rectangular	$\sqrt{3}$	1	1	$\pm 0.6$ %	$\pm 0.6$ %	$\infty$
Modulation response	2.4		Rectangular	$\sqrt{3}$	1	1	$\pm 1.4$ %	$\pm 1.4$ %	$\infty$
Readout Electronics	0.3		Normal	1	1	1	$\pm 0.3$ %	$\pm 0.3$ %	$\infty$
Response Time	0.8		Rectangular	$\sqrt{3}$	1	1	$\pm 0.5$ %	$\pm 0.5$ %	$\infty$
Integration Time	2.6		Rectangular	$\sqrt{3}$	1	1	$\pm 1.5$ %	$\pm 1.5$ %	$\infty$
RF Ambient – Noise	3		Rectangular	$\sqrt{3}$	1	1	$\pm 1.7$ %	$\pm 1.7$ %	$\infty$
RF Ambient– Reflections	3		Rectangular	$\sqrt{3}$	1	1	$\pm 1.7$ %	$\pm 1.7$ %	$\infty$
Probe Positioner	0.4		Rectangular	$\sqrt{3}$	1	1	$\pm 0.2$ %	$\pm 0.2$ %	$\infty$
Probe Positioning	2.9		Rectangular	$\sqrt{3}$	1	1	$\pm 1.7$ %	$\pm 1.7$ %	$\infty$
Post-processing	4		Rectangular	$\sqrt{3}$	1	1	$\pm 2.3$ %	$\pm 2.3$ %	$\infty$
Max.SAR Evaluation	2		Rectangular	$\sqrt{3}$	1	1	$\pm 1.15$ %	$\pm 1.15$ %	$\infty$
<b>Test Sample Related</b>									
Device Positioning	1.6	1.8	Normal	1	1	1	$\pm 1.6$ %	$\pm 1.8$ %	145
Device Holder	1.5	1.7	Normal	1	1	1	$\pm 1.5$ %	$\pm 1.7$ %	5
Power Drift	5.0		Rectangular	$\sqrt{3}$	1	1	$\pm 2.9$ %	$\pm 2.9$ %	$\infty$
<b>Phantom and Setup</b>									
Phantom Production Tolerances	6.1		Rectangular	$\sqrt{3}$	1	1	3.52	3.52	$\infty$
SAR correction	1.9		Rectangular	$\sqrt{3}$	1	0.84	1.10	1.10	
Liquid Conductivity (mea.)	2.4		Rectangular	$\sqrt{3}$	0.78	0.71	1.08	1.08	$\infty$
Liquid Permittivity (mea.)	2.4		Rectangular	$\sqrt{3}$	0.26	0.26	0.36	0.36	$\infty$
Temp. unc. - Conductivity	3.4		Rectangular	$\sqrt{3}$	0.78	0.71	1.53	1.53	$\infty$
Temp. unc. - Permittivity	0.4		Rectangular	$\sqrt{3}$	0.23	0.26	0.05	0.05	$\infty$
<b>Combined Standard Uncertainty (K = 1)</b>							$\pm 10.42$ %	$\pm 10.48$ %	361
<b>Expanded Uncertainty (K = 2)</b>							$\pm 20.84$ %	$\pm 20.97$ %	

## Uncertainty Budget for Frequency range of 3 GHz to 6 GHz

Error Description	Uncertainty Value ( $\pm$ %)		Probability Distribution	Divisor	Ci (1g)	Ci (10g)	Standard Uncertainty (1g)	Standard Uncertainty (10g)	Vi V <sub>eff</sub>
<b>Measurement System</b>									
Probe Calibration	6.65		Normal	1	1	1	$\pm 6.65$ %	$\pm 6.65$ %	$\infty$
Axial Isotropy	4.7		Rectangular	$\sqrt{3}$	0.7	0.7	$\pm 1.9$ %	$\pm 1.9$ %	$\infty$
Hemispherical Isotropy	9.6		Rectangular	$\sqrt{3}$	0.7	0.7	$\pm 3.9$ %	$\pm 3.9$ %	$\infty$
Boundary Effects	2		Rectangular	$\sqrt{3}$	1	1	$\pm 1.2$ %	$\pm 1.2$ %	$\infty$
Linearity	4.7		Rectangular	$\sqrt{3}$	1	1	$\pm 2.7$ %	$\pm 2.7$ %	$\infty$
Detection Limits	1		Rectangular	$\sqrt{3}$	1	1	$\pm 0.6$ %	$\pm 0.6$ %	$\infty$
Modulation response	2.4		Rectangular	$\sqrt{3}$	1	1	$\pm 1.4$ %	$\pm 1.4$ %	$\infty$
Readout Electronics	0.3		Normal	1	1	1	$\pm 0.3$ %	$\pm 0.3$ %	$\infty$
Response Time	0.8		Rectangular	$\sqrt{3}$	1	1	$\pm 0.5$ %	$\pm 0.5$ %	$\infty$
Integration Time	2.6		Rectangular	$\sqrt{3}$	1	1	$\pm 1.5$ %	$\pm 1.5$ %	$\infty$
RF Ambient – Noise	3		Rectangular	$\sqrt{3}$	1	1	$\pm 1.7$ %	$\pm 1.7$ %	$\infty$
RF Ambient– Reflections	3		Rectangular	$\sqrt{3}$	1	1	$\pm 1.7$ %	$\pm 1.7$ %	$\infty$
Probe Positioner	0.4		Rectangular	$\sqrt{3}$	1	1	$\pm 0.2$ %	$\pm 0.2$ %	$\infty$
Probe Positioning	6.7		Rectangular	$\sqrt{3}$	1	1	$\pm 3.9$ %	$\pm 3.9$ %	$\infty$
Post-processing	4		Rectangular	$\sqrt{3}$	1	1	$\pm 2.3$ %	$\pm 2.3$ %	$\infty$
Max.SAR Evaluation	4		Rectangular	$\sqrt{3}$	1	1	$\pm 2.3$ %	$\pm 2.3$ %	$\infty$
<b>Test Sample Related</b>									
Device Positioning	1.6	1.8	Normal	1	1	1	$\pm 1.6$ %	$\pm 1.8$ %	145
Device Holder	1.5	1.7	Normal	1	1	1	$\pm 1.5$ %	$\pm 1.7$ %	5
Power Drift	5.0		Rectangular	$\sqrt{3}$	1	1	$\pm 2.9$ %	$\pm 2.9$ %	$\infty$
<b>Phantom and Setup</b>									
Phantom Production Tolerances	6.6		Rectangular	$\sqrt{3}$	1	1	3.81	3.81	$\infty$
SAR correction	1.9		Rectangular	$\sqrt{3}$	1	0.84	1.10	0.92	
Liquid Conductivity (mea.)	2.4		Rectangular	$\sqrt{3}$	0.78	0.71	1.08	0.98	$\infty$
Liquid Permittivity (mea.)	2.4		Rectangular	$\sqrt{3}$	0.26	0.26	0.36	0.36	$\infty$
Temp. unc. - Conductivity	3.4		Rectangular	$\sqrt{3}$	0.78	0.71	1.53	1.39	$\infty$
Temp. unc. - Permittivity	0.4		Rectangular	$\sqrt{3}$	0.23	0.26	0.05	0.06	$\infty$
<b>Combined Standard Uncertainty (K = 1)</b>							$\pm 11.65$ %	$\pm 11.66$ %	361
<b>Expanded Uncertainty (K = 2)</b>							$\pm 23.29$ %	$\pm 23.33$ %	



**2.3 WLAN ANTENNA INFORMATION:**

Ant.	Brand	Model	Type	Frequency Range (MHz)	Gain (dBi)
Main	AWAN	SA30Z18927	PIFA Antenna	2400-2500	1.14
				5150-5350	-1.73
				5740-5725	-3.61
				5725-5875	-2.83
Aux	AWAN	SA30Z18928	PIFA Antenna	2400-2500	-1.53
				5150-5350	-2.43
				5740-5725	-2.91
				5725-5875	-1.54

## 2.4 THE MAXIMUM SAR 1G VALUES

### P-Sensor On

Band	Test Distance (mm)	Mode	Highest Body Reported SAR-1g(W/kg)
DTS	0	WLAN 2.4G	0.815
UNII		UNII_1	1.053
		UNII_2a	0.982
		UNII_2c	1.166
		UNII_3	0.700

### P-Sensor Off

Band	Test Distance (mm)	Mode	Highest Body Reported SAR-1g(W/kg)
FHSS	0	Bluetooth_DH5	0.118
DTS	19	WLAN 2.4G	0.462
UNII		UNII_1	0.502
		UNII_2c	0.626
		UNII_3	0.399

Note:

- 1) The device is in compliance with Specific Absorption Rate(SAR)for general population uncontrolled exposure limits according to the FCC rule §2.1093, the ANSI C95.1:2019/IEEE C95.1:2019, the NCRP Report Number 86 for uncontrolled environment and had been tested in accordance with the measurement methods and procedures specified in IEEE Std 1528-2013 .

## 2.5 LABORATORY ENVIRONMENT

Temperature	Min. = 18°C, Max. = 25°C
Relative humidity	Min. = 30%, Max. = 70%
Ground system resistance	< 0.5Ω
Ambient noise is checked and found very low and in compliance with requirement of standards. Reflection of surrounding objects is minimized and in compliance with requirement of standards.	

## 2.6 MAIN TEST INSTRUMENTS

Item	Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. Interval
1	Data Acquisition Electronics	Speag	DAE4	1390	Nov. 06, 2020	1 Year
2	E-field Probe	Speag	EX3DV4	7544	Nov. 29, 2020	1 Year
3	System Validation Dipole	Speag	D2450V2	919	Jun. 11, 2018	3 Year
4	System Validation Dipole	Speag	D5GHzV2	1160	Jun. 20, 2018	3 Year
5	ELI Phantom	Speag	ELI Phantom V5.0	1222	N/A	N/A
6	Network Analyzer	Anritsu	MS46522B	1538101	Jul. 25, 2020	1 Year
7	Signal Generator	R&S	SMF100A	101214	Feb. 27, 2021	1 Year
8	Signal Analyzer	R&S	FSV7	103120	Jul. 25, 2020	1 Year
9	DC Source metter	Iteck	IT6154	006104126768 201001	Jul. 25, 2020	1 Year
10	Smart Power Sensor	R&S	NRP-Z21	102209	Feb. 27, 2021	1 Year
11	Dielectric Probe Kit	Agilent	85070E	2593	N/A	N/A
12	Low pass filter	Mini-Circuits	SLP-2950+	M108294	N/A	N/A
13	Power Amplifier	Mini-Circuits	ZHL-42W+	QA1333003	Dec. 29, 2020	1 Year
14	Power Amplifier	Mini-Circuits	ZVE-8G+	520701341	Feb. 27, 2021	1 Year
15	Digital Themometer	LKM	DTM3000	3519	Jul. 02, 2020	1 Year

Remark: "N/A" denotes no model name, serial No. or calibration specified.


### 3 SAR MEASUREMENTS SYSTEM CONFIGURATION

#### 3.1 SAR MEASUREMENT SET-UP

The DASY5 system for performing compliance tests consists of the following items:

1. A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
2. A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
3. A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
4. A unit to operate the optical surface detector which is connected to the EOC.
5. The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY5 measurement server.
6. The DASY5 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows.
7. DASY5 software and SEMCAD data evaluation software.
8. Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
9. The generic twin phantom enabling the testing of left-hand and right-hand usage.
10. The device holder for handheld mobile phones.
11. Tissue simulating liquid mixed according to the given recipes.
12. System validation dipoles allowing to validate the proper functioning of the system.

##### 3.1.1 TEST SETUP LAYOUT

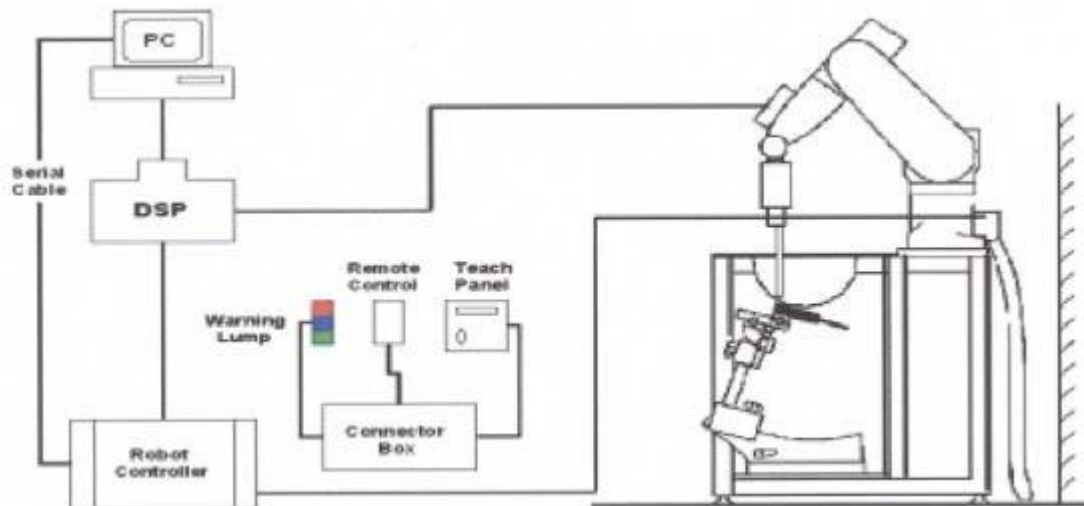


### 3.2 DASY5 E-FIELD PROBE SYSTEM

The SAR measurements were conducted with the dosimetric probe EX3DV4 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

#### 3.2.1 EX3DV4 PROBE SPECIFICATION

<b>Construction</b>	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
<b>Calibration</b>	ISO/IEC 17025 calibration service available
<b>Frequency</b>	10 MHz to 6 GHz Linearity: $\pm 0.2$ dB (30 MHz to 6 GHz)
<b>Directivity</b>	$\pm 0.3$ dB in HSL (rotation around probe axis) $\pm 0.5$ dB in tissue material (rotation normal to probe axis)
<b>Dynamic Range</b>	10 $\mu$ W/g to > 100 mW/g Linearity: $\pm 0.2$ dB
<b>Dimensions</b>	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Distance from probe tip to dipole centers: 1.0 mm

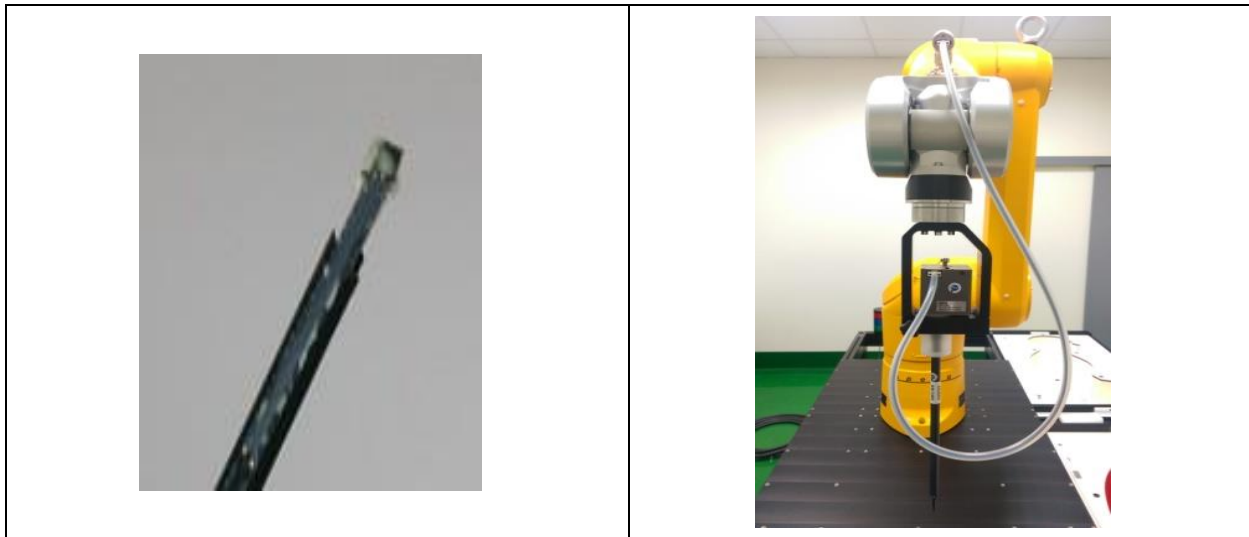

EX3DV4 E-field Probe

### 3.2.2 E-FIELD PROBE CALIBRATION

Each probe is calibrated according to a dosimetric assessment procedure with accuracy better than  $\pm 10\%$ . The spherical isotropy was evaluated and found to be better than  $\pm 0.25\text{dB}$ . The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a wave guide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$\text{SAR} = C \frac{\Delta T}{\Delta t}$$

Where:  $\Delta t$  = Exposure time (30 seconds),

C = Heat capacity of tissue (brain or muscle),

$\Delta T$  = Temperature increase due to RF exposure.

Or 
$$\text{SAR} = \frac{|E|^2 \sigma}{\rho}$$

Where:  $\sigma$  = Simulated tissue conductivity,

$\rho$  = Tissue density ( $\text{kg/m}^3$ ).


### 3.2.3 OTHER TEST EQUIPMENT


#### 3.2.3.1. DEVICE HOLDER FOR TRANSMITTERS

**Construction:** Simple but effective and easy-to-use extension for Mounting Device that facilitates the testing of larger devices according to IEC 62209-2 (e.g., laptops, cameras, etc.) It is lightweight and fits easily on the upper part of the Mounting Device in place of the phone positioner. The extension is fully compatible with the Twin SAM, ELI4 and SAM v6.0 Phantoms.

**Material:** POM, Acrylic glass, Foam


#### 3.2.3.2 PHANTOM

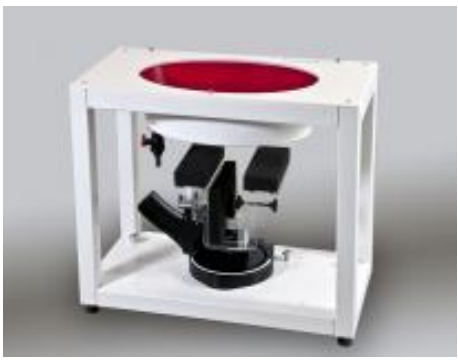Model	ELI4 Phantom	
<b>Construction</b>	Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.	
<b>Shell Thickness</b>	2±0.1 mm	
<b>Filling Volume</b>	Approx. 30 liters	
<b>Dimensions</b>	Length: 600 mm ; Width: 190mm Height: adjustable feet	
<b>Available</b>	Special	

Model	Twin SAM	
<b>Construction</b>	The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.	
<b>Shell Thickness</b>	2 ± 0.2 mm	
<b>Filling Volume</b>	Approx. 25 liters	
<b>Dimensions</b>	Length:1000mm; Width: 500mm Height: adjustable feet	
<b>Available</b>	Special	

### 3.2.4 SCANNING PROCEDURE

The SAR test against the head and body-worn phantom was carried out as follow:

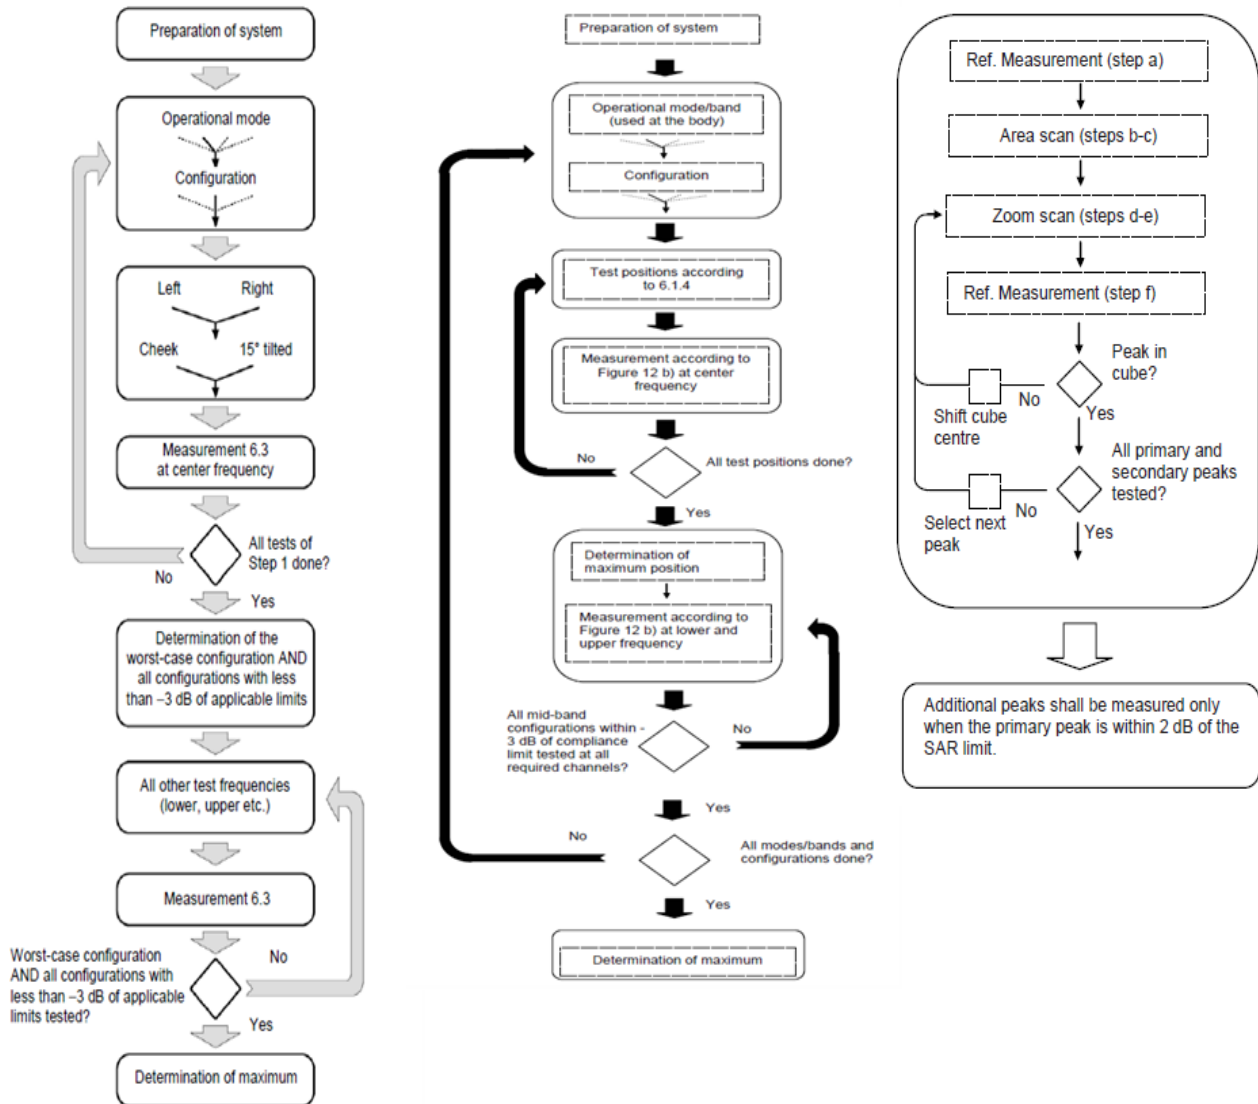

After an area scan has been done at a fixed distance of 1.4mm from the surface of the phantom on the source side, a 3D scan is set up around the location of the maximum spot SAR. First, a point within the scan area is visited by the probe and a SAR reading taken at the start of testing. At the end of testing, the probe is returned to the same point and a second reading is taken. Comparison between these start and end readings enables the power drift during measurement to be assessed.

Above is the scanning procedure flow chart and table from the IEEE1528 standard.

This is the procedure for which all compliant testing should be carried out to ensure that all variations of the device position and transmission behavior are tested.



## **3.2.5 DATA STORAGE AND EVALUATION**

### **3.2.5.1 DATA STORAGE**

The DASY5 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension "DAE4". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm<sup>2</sup>], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

### 3.2.6 DATA EVALUATION BY SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	Sensitivity	Normi, a <sub>i0</sub> , a <sub>i1</sub> , a <sub>i2</sub>
	Conversion factor	ConvF <sub>i</sub>
	Diode compression point	Dcp <sub>i</sub>
Device parameters:	Frequency	f
	Crest factor	cf
Media parameters:	Conductivity	
	Density	

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY5 components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot cf / dcp_i$$

With	$V_i$ = compensated signal of channel i	( i = x, y, z )
	$U_i$ = input signal of channel i	( i = x, y, z )
	cf = crest factor of exciting field	(DASY parameter)
	dcp <sub>i</sub> = diode compression point	(DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:  $E_i = (V_i / \text{Norm}_i \cdot \text{ConvF})^{1/2}$

H-field probes:  $H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1} f + a_{i2} f^2) / f$

With  $V_i$  = compensated signal of channel  $i$  ( $i = x, y, z$ )

$\text{Norm}_i$  = sensor sensitivity of channel  $i$  ( $i = x, y, z$ )  
 [mV/(V/m)<sup>2</sup>] for E-field Probes

ConvF = sensitivity enhancement in solution

$a_{ij}$  = sensor sensitivity factors for H-field probes

$f$  = carrier frequency [GHz]

$E_i$  = electric field strength of channel  $i$  in V/m

$H_i$  = magnetic field strength of channel  $i$  in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{\text{tot}} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = (E_{\text{tot}})^2 \cdot \sigma / (\rho \cdot 1000)$$

With SAR = local specific absorption rate in mW/g

$E_{\text{tot}}$  = total field strength in V/m  
 $\sigma$  = conductivity in [mho/m] or [Siemens/m]  
 $\rho$  = equivalent tissue density in g/cm<sup>3</sup>

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{\text{pwe}} = E_{\text{tot}}^2 / 3770 \text{ or } P_{\text{pwe}} = H_{\text{tot}}^2 \cdot 37.7$$

With  $P_{\text{pwe}}$  = equivalent power density of a plane wave in mW/cm

$E_{\text{tot}}$  = total field strength in V/m  
 $H_{\text{tot}}$  = total magnetic field strength in A/m

## 4 TISSUE-EQUIVALENT LIQUID

### 4.1 TISSUE-EQUIVALENT LIQUID INGREDIENTS

The liquid is consisted of water, salt and Glycol, Sugar, Preventol and Cellulose. The liquid has previously been proven to be suited for worst-case. The measured conductivity and relative permittivity should be within  $\pm 5\%$  of the target values. The below table shows the detail solution. It's satisfying the latest tissue dielectric parameters requirements proposed by the IEC 62209.

#### Composition of the Tissue Equivalent Matter

Tissue Type	Bactericide	DGBE	HEC	NaCl	Sucrose	Triton X-100	Water	Diethylene Glycol Mono-hexylether
Head 2450	-	45.0	-	0.1	-	-	54.9	-
Head 5G	-	-	-	-	-	17.2	65.5	17.3

## 4.2 TISSUE-EQUIVALENT LIQUID PROPERTIES

### Dielectric Performance of Tissue Simulating Liquid

Tissue Verification									
Date	Tissue Type	Frequency (MHz)	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )	Targeted Conductivity ( $\sigma$ )	Targeted Permittivity ( $\epsilon_r$ )	Deviation Conductivity ( $\sigma$ ) (%)	Deviation Permittivity ( $\epsilon_r$ ) (%)	Limit (%) $\pm 5$
2021/4/22	Head	2402	1.79	38.56	1.76	39.29	1.89	-1.86	$\pm 5$
2021/4/22	Head	2412	1.80	38.52	1.77	39.27	1.92	-1.91	$\pm 5$
2021/4/22	Head	2422	1.81	38.48	1.78	39.25	2.12	-1.96	$\pm 5$
2021/4/22	Head	2437	1.83	38.42	1.79	39.22	2.24	-2.04	$\pm 5$
2021/4/22	Head	2441	1.83	38.40	1.79	39.21	2.29	-2.06	$\pm 5$
2021/4/22	Head	2457	1.85	38.34	1.81	39.19	2.42	-2.17	$\pm 5$
2021/4/22	Head	2462	1.86	38.32	1.81	39.18	2.44	-2.19	$\pm 5$
2021/4/22	Head	2467	1.86	38.30	1.82	39.17	2.40	-2.22	$\pm 5$
2021/4/22	Head	2472	1.87	38.28	1.82	39.17	2.42	-2.27	$\pm 5$
2021/4/22	Head	2480	1.88	38.25	1.83	39.16	2.40	-2.33	$\pm 5$
2021/4/23	Head	5180	4.75	35.97	4.64	36.02	2.32	-0.14	$\pm 5$
2021/4/23	Head	5200	4.77	35.91	4.66	36.00	2.36	-0.25	$\pm 5$
2021/4/23	Head	5220	4.80	35.88	4.68	35.98	2.56	-0.28	$\pm 5$
2021/4/23	Head	5240	4.83	35.84	4.70	35.96	2.77	-0.33	$\pm 5$
2021/4/23	Head	5260	4.85	35.79	4.72	35.94	2.75	-0.42	$\pm 5$
2021/4/23	Head	5280	4.87	35.73	4.74	35.92	2.74	-0.53	$\pm 5$
2021/4/23	Head	5300	4.89	35.69	4.76	35.90	2.73	-0.58	$\pm 5$
2021/4/23	Head	5320	4.92	35.63	4.78	35.88	2.93	-0.70	$\pm 5$
2021/4/23	Head	5500	5.13	35.15	4.96	35.60	3.43	-1.26	$\pm 5$
2021/4/23	Head	5520	5.15	35.12	4.98	35.58	3.37	-1.29	$\pm 5$
2021/4/23	Head	5540	5.18	35.09	5.00	35.56	3.52	-1.32	$\pm 5$
2021/4/23	Head	5560	5.20	35.04	5.03	35.54	3.46	-1.41	$\pm 5$
2021/4/23	Head	5580	5.22	34.98	5.05	35.52	3.41	-1.52	$\pm 5$
2021/4/23	Head	5600	5.24	34.91	5.07	35.50	3.35	-1.66	$\pm 5$
2021/4/23	Head	5620	5.27	34.87	5.09	35.48	3.54	-1.72	$\pm 5$
2021/4/23	Head	5640	5.30	34.83	5.11	35.46	3.72	-1.78	$\pm 5$
2021/4/23	Head	5660	5.32	34.78	5.13	35.44	3.70	-1.86	$\pm 5$
2021/4/23	Head	5680	5.34	34.74	5.15	35.42	3.69	-1.92	$\pm 5$
2021/4/23	Head	5700	5.37	34.69	5.17	35.40	3.87	-2.01	$\pm 5$
2021/4/23	Head	5720	5.39	34.64	5.19	35.38	3.85	-2.09	$\pm 5$
2021/4/23	Head	5745	5.43	34.58	5.22	35.35	4.12	-2.18	$\pm 5$
2021/4/23	Head	5765	5.45	34.54	5.24	35.33	4.11	-2.24	$\pm 5$
2021/4/23	Head	5785	5.47	34.51	5.26	35.31	4.09	-2.27	$\pm 5$
2021/4/23	Head	5800	5.49	34.48	5.27	35.30	4.17	-2.32	$\pm 5$
2021/4/23	Head	5805	5.49	34.47	5.28	35.29	4.08	-2.32	$\pm 5$
2021/4/23	Head	5825	5.52	34.42	5.30	35.27	4.23	-2.41	$\pm 5$

Note:

- 1) The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient conditions and within 2 °C of the conditions expected during the SAR evaluation to satisfy protocol requirements.
- 2) KDB 865664 was ensured to be applied for probe calibration frequencies greater than or equal to 50MHz of the EUT frequencies.
- 3) The above measured tissue parameters were used in the DASY software to perform interpolation via the DASY software to determine actual dielectric parameters at the test frequencies. The SAR test plots may slightly differ from the table above since the DASY rounds to three significant digits.
- 4) According to FCC TCB workshop April, 2019 RF Exposure Procedures Update (Effective February 19, 2019, FCC has permitted the use of single head-tissue simulating liquid specified in IEEE 62209-1- for all SAR tests.

## 5 SYSTEM CHECK


### 5.1 DESCRIPTION OF SYSTEM CHECK

The manufacturer calibrates the probes annually. Dielectric parameters of the tissue simulants were measured every day using the dielectric probe kit and the network analyzer. A system check measurement was made following the determination of the dielectric parameters of the simulant, using the dipole validation kit. A power level of 250 mW (below 3GHz) or 100mW (3-6GHz), which was placed under the flat section of the twin SAM phantom. The system check results (dielectric parameters and SAR values) are given in the 6.2.

System check results have to be equal or near the values determined during dipole calibration with the relevant liquids and test system ( $\pm 10\%$ ).

System check is performed regularly on all frequency bands where tests are performed with the DASY5 system.

#### System Check Set-up

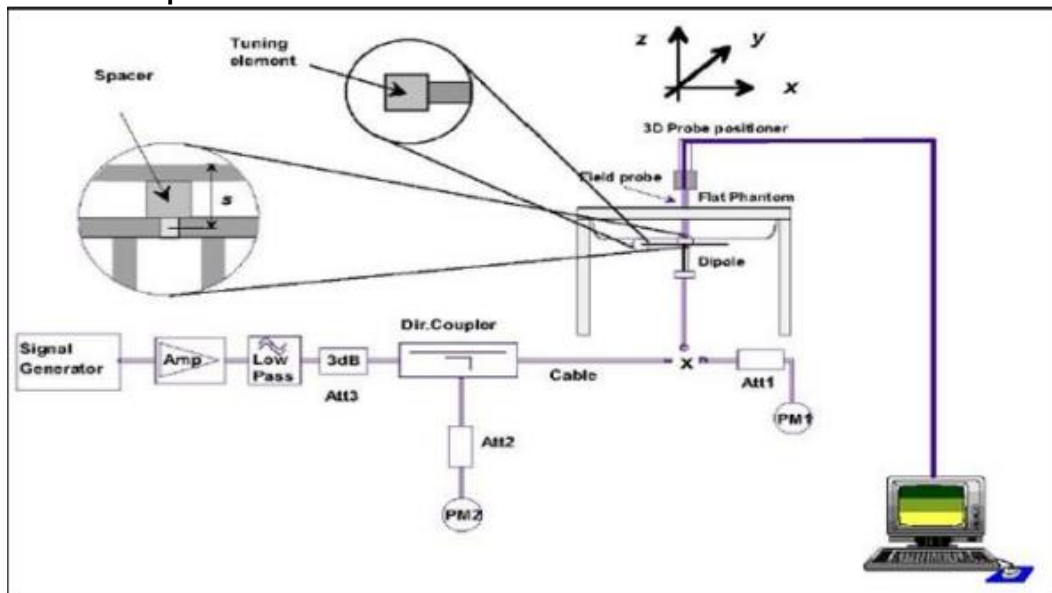

## 5.2 DESCRIPTION OF SYSTEM CHECK

### System Check in Tissue Simulating Liquid

The system check is performed for verifying the accuracy of the complete measurement system and performance of the software. The system check is performed with tissue equivalent material according to IEEE P1528 (described above). The following table shows system check results for all frequency bands and tissue liquids used during the tests.

Date	System Dipole			Parameters	Target [W/kg]	Measured [W/kg]	Deviation [%]	Limited [%]
	Type	Serial No.	Liquid					
2021/4/22	D2450V2	919	Head	1g SAR:	52.1	51.6	-0.96	± 10
2021/4/23	D5GHzV2 (5.2GHz)	1160	Head	1g SAR	75.3	78.6	4.38	± 10
2021/4/23	D5GHzV2 (5.3GHz)	1160	Head	1g SAR	76.8	79.3	3.26	± 10
2021/4/23	D5GHzV2 (5.6GHz)	1160	Head	1g SAR	78.6	85.1	8.27	± 10
2021/4/23	D5GHzV2 (5.8GHz)	1160	Head	1g SAR	77.9	82.7	6.16	± 10

## 6 OPERATIONAL CONDITIONS DURING TEST

### 6.1 GENERAL DESCRIPTION OF TEST PROCEDURES


Connection to the EUT is established via air interface with base station An, and the EUT is Set to maximum output power by base station. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output. The antenna connected to the output of the base station simulator shall be placed at least 50cm away from the EUT. The signal transmitted by the simulator to the antenna feeding point shall be lower than the output power level of the EUT by at least 30dB.

### 6.2 TEST POSITION OF PORTABLE DEVICES


This DUT was tested in 6 different positions. They are top, right, bottom, left, rear and stand as illustrated below, which recommended by EN62209-2:

### 6.3 TEST POSITION ANTENNA LOCATION

#### Tablet Mode

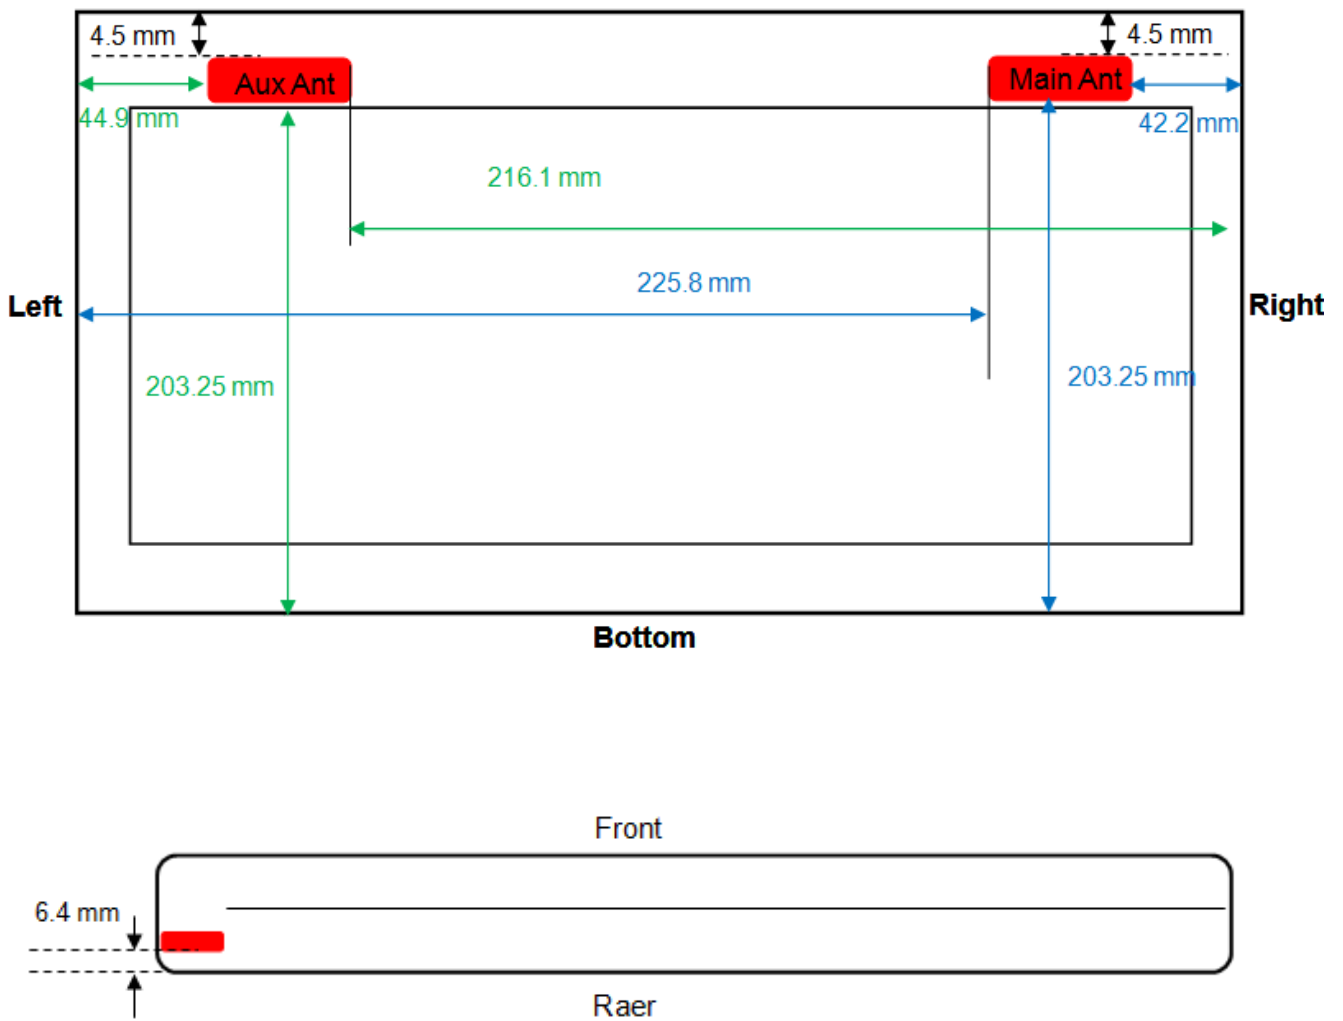



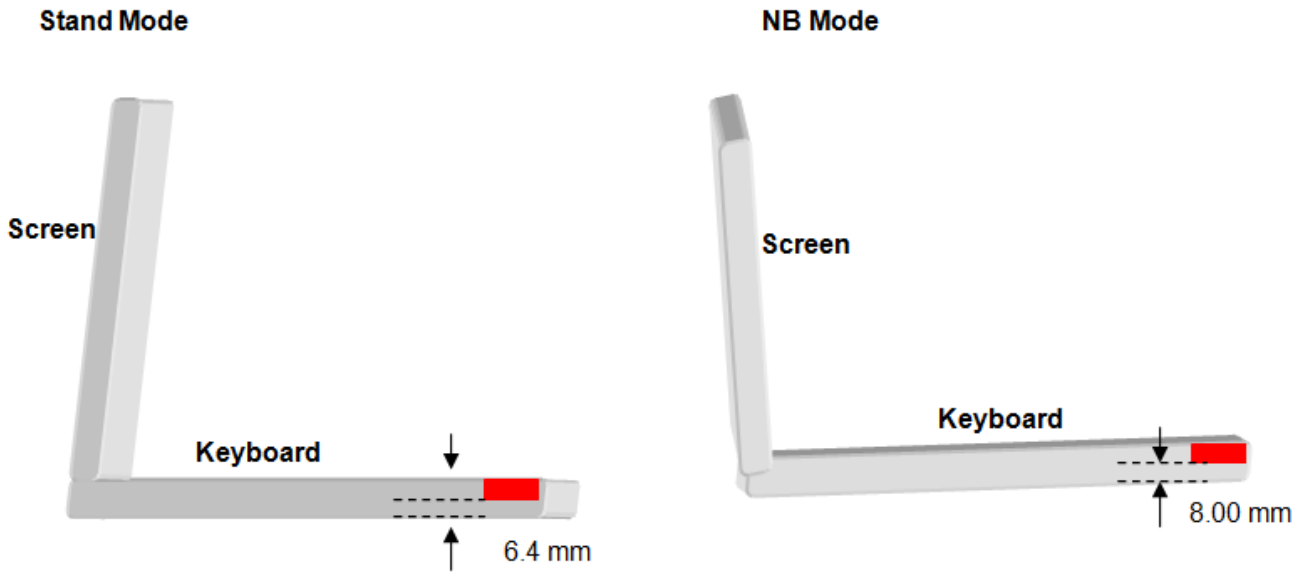

Minimum Separation Distance_Tablet Mode			
Antenna	Position	Distance (mm)	Evaluation Test
WLAN-Main	Rear	6.40	Yes
	Bottom	8.00	Yes
	Edge1	4.50	Yes
	Edge2	216.10	No
	Edge3	203.25	No
	Edge4	44.90	Yes
WLAN-Aux & BT	Rear	6.40	Yes
	Bottom	8.00	Yes
	Edge1	4.50	Yes
	Edge2	42.20	Yes
	Edge3	203.25	No
	Edge4	225.80	No

Minimum Separation Distance_NB Mode			
Antenna	Position	Distance (mm)	Evaluation Test
WLAN-Main	Bottom	8.00	Yes
WLAN-Aux & BT	Bottom	8.00	Yes

Minimum Separation Distance_Stand Mode			
Antenna	Position	Distance (mm)	Evaluation Test
WLAN-Main	Stand	6.40	No
WLAN-Aux & BT	Stand	6.40	No

## 6.4 TEST POSITION

### 6.4.1 BODY TEST CONFIGURATION

The SAR Exclusion Threshold in KDB 447498 D01 can be applied to determine SAR test exclusion for adjacent edge configurations. The closest distance from the antenna to an EUT edge is used to determine if SAR testing is required for the adjacent edges, with the adjacent edge positioned adjacent the phantom and the edge containing the antenna positioned perpendicular to the phantom.

#### SAR test reduction and exclusion guidance

(1) The SAR exclusion threshold for distances < 50 mm is defined by the following equation:

$$\frac{(\text{max. power of channel, including tune-up tolerance, mW})}{(\text{min. test separation distance, mm})} \sqrt{\text{Frequency (GHz)}} \leq 3.0$$

The test exclusions are applicable only when the minimum test separation distance is  $\leq 50$  mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm according to 5) in section 4.1 is applied to determine SAR test exclusion.

(2) The SAR exclusion threshold for distances > 50 mm is defined by the following equation, as illustrated in KDB 447498 D01 Appendix B:

a) at 100 MHz to 1500 MHz

$$[\text{Power allowed at numeric Threshold at 50 mm in step 1}) + (\text{test separation distance} - 50 \text{ mm}) \cdot (f_{\text{(MHz)}}/150)] \text{ mW}$$

b) at > 1500 MHz and  $\leq 6$  GHz

$$[\text{Power allowed at numeric Threshold at 50 mm in step 1}) + (\text{test separation distance} - 50 \text{ mm}) \cdot 10] \text{ mW}$$

### 6.3 SAR EXCLUSION CALCULATIONS FOR WI-FI ANTENNA < 50MM FROM THE USER

According to KDB 447498 v06 in section 4.3.1, if the calculated threshold value is > 3 then SAR testing is required

**P-Sensor off**

Antenna	Band	Frequency (MHz)	Output Power		Separation Distances(mm)						Calculated Threshold Value					
			dBm	mW	Rear	Bottom	Edge1	Edge2	Edge3	Edge4	Rear	Bottom	Edge1	Edge2	Edge3	Edge4
Wi-Fi Main	2.4GHz	2462	22.50	178.00	26.40	28.00	24.50	216.10	203.25	64.90	10.58	9.97	11.40	>200mm	>200mm	>50mm
	5.2GHz	5210	22.50	178.00	26.40	28.00	24.50	216.10	203.25	64.90	15.39	14.51	16.58	>200mm	>200mm	>50mm
	5.3GHz	5290	22.50	178.00	26.40	28.00	24.50	216.10	203.25	64.90	15.51	14.62	16.71	>200mm	>200mm	>50mm
	5.5GHz	5530	22.50	178.00	26.40	28.00	24.50	216.10	203.25	64.90	15.86	14.95	17.09	>200mm	>200mm	>50mm
	5.8GHz	5775	22.50	178.00	26.40	28.00	24.50	216.10	203.25	64.90	16.20	15.28	17.46	>200mm	>200mm	>50mm
Wi-Fi Aux	2.4GHz	2462	22.50	178.00	26.40	28.00	24.50	62.20	203.25	225.80	10.58	9.97	11.40	>50mm	>200mm	>200mm
	5.2GHz	5210	22.50	178.00	26.40	28.00	24.50	62.20	203.25	225.80	15.39	14.51	16.58	>50mm	>200mm	>200mm
	5.3GHz	5290	22.50	178.00	26.40	28.00	24.50	62.20	203.25	225.80	15.51	14.62	16.71	>50mm	>200mm	>200mm
	5.5GHz	5530	22.50	178.00	26.40	28.00	24.50	62.20	203.25	225.80	15.86	14.95	17.09	>50mm	>200mm	>200mm
	5.8GHz	5775	22.50	178.00	26.40	28.00	24.50	62.20	203.25	225.80	16.20	15.28	17.46	>50mm	>200mm	>200mm
Bluetooth	Bluetooth	2480	12.50	18.00	6.40	8.00	4.50	42.20	203.25	225.80	4.43	3.54	6.30	0.67	>200mm	>200mm

**P-Sensor on**

Antenna	Band	Frequency (MHz)	Output Power		Separation Distances(mm)						Calculated Threshold Value					
			dBm	mW	Rear	Bottom	Edge1	Edge2	Edge3	Edge4	Rear	Bottom	Edge1	Edge2	Edge3	Edge4
Wi-Fi Main	2.4GHz	2462	14.00	25.00	6.40	8.00	4.50	216.10	203.25	44.90	6.13	4.90	8.72	>200mm	>200mm	0.87
	5.2GHz	5210	12.50	18.00	6.40	8.00	4.50	216.10	203.25	44.90	6.42	5.14	9.13	>200mm	>200mm	0.92
	5.3GHz	5290	12.50	18.00	6.40	8.00	4.50	216.10	203.25	44.90	6.47	5.18	9.20	>200mm	>200mm	0.92
	5.5GHz	5530	12.50	18.00	6.40	8.00	4.50	216.10	203.25	44.90	6.61	5.29	9.41	>200mm	>200mm	0.94
	5.8GHz	5775	12.50	18.00	6.40	8.00	4.50	216.10	203.25	44.90	6.76	5.41	9.61	>200mm	>200mm	0.96
Wi-Fi Aux	2.4GHz	2462	14.00	25.00	6.40	8.00	4.50	42.20	203.25	225.80	6.13	4.90	8.72	0.93	>200mm	>200mm
	5.2GHz	5210	12.50	18.00	6.40	8.00	4.50	42.20	203.25	225.80	6.42	5.14	9.13	0.97	>200mm	>200mm
	5.3GHz	5290	12.50	18.00	6.40	8.00	4.50	42.20	203.25	225.80	6.47	5.18	9.20	0.98	>200mm	>200mm
	5.5GHz	5530	12.50	18.00	6.40	8.00	4.50	42.20	203.25	225.80	6.61	5.29	9.41	1.00	>200mm	>200mm
	5.8GHz	5775	12.50	18.00	6.40	8.00	4.50	42.20	203.25	225.80	6.76	5.41	9.61	1.03	>200mm	>200mm

### 6.4 SAR EXCLUSION CALCULATIONS FOR WI-FI ANTENNA > 50MM FROM THE USER

According to KDB 447498 v06, if the calculated Power threshold is less than the output power then SAR testing is required.

**P-Sensor off**

Antenna	Band	Frequency (MHz)	Output Power		Separation Distances(mm)						Calculated Threshold Value					
			dBm	mW	Rear	Bottom	Edge1	Edge2	Edge3	Edge4	Rear	Bottom	Edge1	Edge2	Edge3	Edge4
Wi-Fi Main	2.4GHz	2462	22.50	178.00	26.40	28.00	24.50	216.10	203.25	64.90	<50mm	<50mm	<50mm	>200mm	>200mm	<b>244.60</b>
	5.2GHz	5210	22.50	178.00	26.40	28.00	24.50	216.10	203.25	64.90	<50mm	<50mm	<50mm	>200mm	>200mm	<b>214.72</b>
	5.3GHz	5290	22.50	178.00	26.40	28.00	24.50	216.10	203.25	64.90	<50mm	<50mm	<50mm	>200mm	>200mm	<b>214.22</b>
	5.5GHz	5530	22.50	178.00	26.40	28.00	24.50	216.10	203.25	64.90	<50mm	<50mm	<50mm	>200mm	>200mm	<b>212.79</b>
	5.8GHz	5775	22.50	178.00	26.40	28.00	24.50	216.10	203.25	64.90	<50mm	<50mm	<50mm	>200mm	>200mm	<b>211.42</b>
Wi-Fi Aux	2.4GHz	2462	22.50	178.00	26.40	28.00	24.50	62.20	203.25	225.80	<50mm	<50mm	<50mm	<b>217.60</b>	>200mm	>200mm
	5.2GHz	5210	22.50	178.00	26.40	28.00	24.50	62.20	203.25	225.80	<50mm	<50mm	<50mm	<b>187.72</b>	>200mm	>200mm
	5.3GHz	5290	22.50	178.00	26.40	28.00	24.50	62.20	203.25	225.80	<50mm	<50mm	<50mm	<b>187.22</b>	>200mm	>200mm
	5.5GHz	5530	22.50	178.00	26.40	28.00	24.50	62.20	203.25	225.80	<50mm	<50mm	<50mm	<b>185.79</b>	>200mm	>200mm
	5.8GHz	5775	22.50	178.00	26.40	28.00	24.50	62.20	203.25	225.80	<50mm	<50mm	<50mm	<b>184.42</b>	>200mm	>200mm
Bluetooth	Bluetooth	2480	12.50	18.00	6.40	8.00	4.50	42.20	203.25	225.80	<50mm	<50mm	<50mm	<50mm	>200mm	>200mm

**P-Sensor on**

Antenna	Band	Frequency (MHz)	Output Power		Separation Distances(mm)						Calculated Threshold Value					
			dBm	mW	Rear	Bottom	Edge1	Edge2	Edge3	Edge4	Rear	Bottom	Edge1	Edge2	Edge3	Edge4
Wi-Fi Main	2.4GHz	2462	14.00	25.00	26.40	28.00	24.50	216.10	203.25	44.90	<50mm	<50mm	<50mm	>200mm	>200mm	<50mm
	5.2GHz	5210	12.50	18.00	26.40	28.00	24.50	216.10	203.25	44.90	<50mm	<50mm	<50mm	>200mm	>200mm	<50mm
	5.3GHz	5290	12.50	18.00	26.40	28.00	24.50	216.10	203.25	44.90	<50mm	<50mm	<50mm	>200mm	>200mm	<50mm
	5.5GHz	5530	12.50	18.00	26.40	28.00	24.50	216.10	203.25	44.90	<50mm	<50mm	<50mm	>200mm	>200mm	<50mm
	5.8GHz	5775	12.50	18.00	26.40	28.00	24.50	216.10	203.25	44.90	<50mm	<50mm	<50mm	>200mm	>200mm	<50mm
Wi-Fi Aux	2.4GHz	2462	14.00	25.00	26.40	28.00	24.50	42.20	203.25	225.80	<50mm	<50mm	<50mm	<50mm	>200mm	>200mm
	5.2GHz	5210	12.50	18.00	26.40	28.00	24.50	42.20	203.25	225.80	<50mm	<50mm	<50mm	<50mm	>200mm	>200mm
	5.3GHz	5290	12.50	18.00	26.40	28.00	24.50	42.20	203.25	225.80	<50mm	<50mm	<50mm	<50mm	>200mm	>200mm
	5.5GHz	5530	12.50	18.00	26.40	28.00	24.50	42.20	203.25	225.80	<50mm	<50mm	<50mm	<50mm	>200mm	>200mm
	5.8GHz	5775	12.50	18.00	26.40	28.00	24.50	42.20	203.25	225.80	<50mm	<50mm	<50mm	<50mm	>200mm	>200mm

## **7 SAR MEASUREMENT VARIABILITY AND UNCERTAINTY**

### **7.1 SAR MEASUREMENT VARIABILITY**

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is  $< 0.80$  W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is  $\geq 0.80$  W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is  $> 1.20$  or when the original or repeated measurement is  $\geq 1.45$  W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .

The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

The detailed repeated measurement results are shown in Section 8.2.

## 7.2 TEST CONFIGURATION

### 7.2.1 WIFI TEST CONFIGURATION

For WLAN SAR testing, WLAN engineering testing software installed on the DUT can provide continuous transmitting RF signal.

#### WLAN 2.4G

Mode	802.11b	802.11g	802.11n HT20	802.11n HT40	802.11 ax20	802.11 ax40
Duty cycle	100%					
Crest factor	1					

#### WLAN 5G

Mode	802.11a	802.11n HT20	802.11n HT40	802.11 ac20	802.11 ac40	802.11 ac80	802.11 ac160
	802.11 ax20	802.11 ax40	802.11 ax80	802.11 ax160			
Duty cycle	100%						
Crest factor	1						

For WiFi SAR testing, a communication link is set up with the test mode software for WiFi mode test. During the test, at the each test frequency channel, the EUT is operated at the RF continuous emission mode. The RF signal utilized in SAR measurement has 100% duty cycle and its crest factor is 1. The test procedures in KDB 248227 D01 are applied.

### 7.2.2 WLAN 2.4G SAR TEST REQUIREMENTS

#### 802.11b DSSS SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is  $\leq 0.8$  W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is  $> 0.8$  W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is  $> 1.2$  W/kg, SAR is required for the third channel; i.e., all channels require testing.

#### 2.4 GHz 802.11g/n OFDM SAR Test Exclusion Requirements

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied. SAR is not required for the following 2.4 GHz OFDM conditions.

- 1) When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
- 2) When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg.



**SAR Test Requirements for OFDM configurations**

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, each standalone and frequency aggregated band is considered separately for SAR test reduction. In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.

**7.2.3 WLAN 5G SAR TEST REQUIREMENTS****U-NII-1 and U-NII-2A Band**

For devices that operate in both U-NII-1 and U-NII-2A bands, when the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is  $\leq 1.2$  W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, both bands are tested independently for SAR. When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is  $\leq 1.2$  W/kg, SAR is not required for the band with lower maximum output power in that test configuration; otherwise, both bands are tested independently for SAR.

**U-NII-2C, U-NII-3 Bands**

The frequency range covered by these bands is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. When Terminal Doppler Weather Radar (TDWR) restriction applies, the channels at 5.60 – 5.65 GHz in U-NII-2C band must be disabled with acceptable mechanisms and documented in the equipment certification. Unless band gap channels are permanently disabled, they must be considered for SAR testing. To maintain SAR measurement accuracy and to facilitate test reduction, the channels in U-NII-2C band above 5.65 GHz may be grouped with the 5.8 GHz channels in U-NII-3 or §15.247 band to enable two SAR probe calibration frequency points to cover the bands, including the band gap channels.<sup>11</sup> When band gap channels are supported and the bands are not aggregated for SAR testing, band gap channels must be considered independently in each band according to the normally required OFDM SAR measurement and probe calibration frequency points requirements.

**7.2.4 OFDM TRANSMISSION MODE AND SAR TEST CHANNEL SELECTION**

For the 2.4GHz and 5GHz bands, when the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations (for example 802.11a, 802.11n and 802.11ac, or 802.11g and 802.11n, with the same channel bandwidth, modulation, and data rate, etc.), the lower order 802.11 mode (i.e. 802.11a then 802.11n and 802.11ac, or 802.11g then 802.11n) is used for SAR measurement. When the maximum output power are the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

**7.2.5 INITIAL TEST CONFIGURATION PROCEDURE**

For OFDM, in both 2.4G and 5GHz bands, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output power is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, and lowest data rate. If the average RF output powers of the highest identical transmission modes are within 0.25 dB of each other, mid channel of the transmission mode with highest average RF output powers is the initial test channel. Otherwise, the channel of the transmission mode with the highest average RF output power will be the initial test configuration. When the reported SAR is  $\leq 0.8$  W/kg, no additional measurements on other test channels are required. Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is  $\leq 1.2$  W/kg or all channels are measured. When there are multiple untested channels having the same subsequent highest average RF output power, the channel with higher frequency from the lowest 802.11 mode is considered for SAR measurement.

## 8 POWER REDUCTION BY PROXIMITY SENSING

A proximity sensor for power reduction is implemented in this device to address RF exposure compliance when the cellular antenna is positioned close to the user's body. The sensor's mechanical structure is designed to fit within the enclosure design used in this device and also extended around the edge and top of the antenna element in order to optimize sensitivity in these orientations. This design combines the antenna printed directly on a plastic part and proximity sensor FPC (Flexible Printed Circuit) bonded together into one piece. According to KDB 616217 D04 SAR for laptop and tablets v01r02)

### 8.1 procedures for determining proximity sensor triggering distances

The following procedures should be applied to determine proximity sensor triggering distances for the back surface and individual edges of a tablet. Conducted power is monitored qualitatively to identify the general triggering characteristics and recorded quantitatively, versus spacing, as required by the procedures. Unless there is built-in test software that reports the triggering conditions and enables the power levels to be confirmed separately, monitoring of conducted power during the triggering tests typically requires internal access to the antenna ports inside the tablet, which may interfere with the triggering tests.

1. The relevant transmitter should be set to operate at its normal maximum output power.
2. The entire back surface or edge of the tablet is positioned below a flat phantom filled with the required tissue-equivalent medium, and positioned at least 20 mm further than the distance that triggers power reduction.
3. It should be ensured that the cables required for power measurements are not interfering with the proximity sensor. Cable losses should be properly compensated to report the measured power results.
4. The back surface or edge is moved toward the phantom in 3 mm steps until the sensor triggers.
5. The back surface or edge is then moved back (further away) from the phantom by at least 5 mm or until maximum output power is returned to the normal maximum level.
6. The back surface or edge is again moved toward the phantom, but in 1 mm steps, until it is at least 5 mm past the triggering point or touching the phantom. If 1 mm resolution is not suitable for the sensor triggering sensitivity, a KDB inquiry should be submitted to determine alternative test configurations.
7. If the tablet is not touching the phantom, it is moved in 3 mm steps until it touches the phantom to confirm that the sensor remains triggered and the maximum power stays reduced.
8. The process is then reversed by moving the tablet away from the phantom according to steps 4) to 7), to determine triggering release, until it is at least 10 mm beyond the point that triggers the return of normal maximum power.
9. The measured output power within  $\pm 5$  mm of the triggering points, or until the tablet is touching the phantom, for movements to and from the phantom should be tabulated in the SAR report.
10. If the sensor design and implementation allow additional variations for triggering distance tolerances, multiple samples should be tested to determine the most conservative distance required for SAR evaluation.
11. To ensure all production units are compliant, it is generally necessary to reduce the triggering distance determined from the triggering tests by 1 mm, or more if it is necessary, and use the smallest distance for movements to and from the phantom, minus 1 mm, as the sensor triggering distance for determining the SAR measurement distance.

## 8.2 procedures for determining antenna and proximity sensor coverage

The sensing regions are usually limited to areas near the sensor element. If a sensor is spatially offset from the antenna(s), it is necessary to verify sensor triggering for conditions where the antenna is next to the user but the sensor is laterally further away to ensure sensor coverage is sufficient for reducing the power to maintain compliance. The following are used to determine if additional SAR measurements may be necessary due to sensor and antenna offset. 25 These procedures do not apply and are not required for configurations where the antenna and sensor are collocated and the peak SAR location is overlapping with the sensor.

1. The back surface or edge of the tablet is positioned at a test separation distance less than or equal to the distance required for back surface or edge triggering, with both the antenna and sensor pad located at least 20 mm laterally outside the edge (boundary) of the phantom, along the direction of maximum antenna and sensor offset. For the back surface, if the direction of maximum offset is not aligned with the tablet coordinates (physical edges) the tablet test position would not be aligned with the phantom coordinates (orientations). Each applicable tablet edge should be positioned perpendicularly to the phantom to determine sensor coverage. For antennas and/or sensors located near the corner of a tablet, both adjacent edges must be considered.
2. The similar sequence of steps applied to determine sensor triggering distance in section 6.2 are used to verify back surface and edge sensor coverage by moving the tablet (sensor and antenna) horizontally toward the phantom while maintaining the same vertical separation between the back surface or edge and the phantom.
3. After the exact location where triggering of power reduction is determined, with respect to the sensor and antenna, the tablet movement should be continued, in 3 mm increments, until both the sensor and antenna(s) are fully under the phantom and at least 20 mm inside the phantom edge.
4. The process is then repeated from the opposite direction, starting at the other end of the maximum antenna and sensor offset, by rotating the tablet 180° along the vertical axis.
5. The triggering points should be documented graphically, with the antenna and sensor clearly identified, along with all relevant dimensions.

If the subsequently measured peak SAR location for the antenna is not between the triggering points, established by the sensor coverage tests from opposite ends of the antenna and sensor, additional SAR tests may be required for conditions where only part of the back surface or edge of a tablet corresponding to the antenna is in proximity to the user and the sensor may not be triggering as desired. A KDB inquiry must be submitted by the test lab to determine if additional tests are required and the proper test configurations to use for testing. This may include situations where the sensor coverage region is too small for the antenna, the sensor is located too far away from the antenna, the sensor location is insufficient to cover multiple antennas or the antenna is at the corner of a tablet etc.

### 8.3 proximity sensor status table of trigger distance


As per the KDB 616217 D04 SAR for laptop and tablets v01r02, section 6.2, the following procedure is used to determine the triggering distances.

Proximity Sensor Status Table when DUT is moving towards the phantom

Distance to the DUT (mm)	Proximity Sensor Status –Edge1	Proximity Sensor Status – Rear	Proximity Sensor Status – Bottom
30	OFF	OFF	OFF
27	OFF	OFF	OFF
25	OFF	OFF	OFF
24	OFF	OFF	OFF
23	OFF	OFF	OFF
22	OFF	OFF	OFF
21	OFF	OFF	OFF
20	ON	ON	ON
19	ON	ON	ON
18	ON	ON	ON
17	ON	ON	ON
16	ON	ON	ON
15	ON	ON	ON
14	ON	ON	ON
13	ON	ON	ON
12	ON	ON	ON
11	ON	ON	ON
10	ON	ON	ON
9	ON	ON	ON
8	ON	ON	ON
7	ON	ON	ON
6	ON	ON	ON
5	ON	ON	ON
4	ON	ON	ON
3	ON	ON	ON
2	ON	ON	ON
1	ON	ON	ON
0	ON	ON	ON

### 8.4 Tilt angle influences to proximity sensor triggering



As per the KDB 616217 D04 SAR for laptop and tablets v01r02, section 6.4, the following procedure is used to determine the tilt angle influences to proximity sensor triggering.

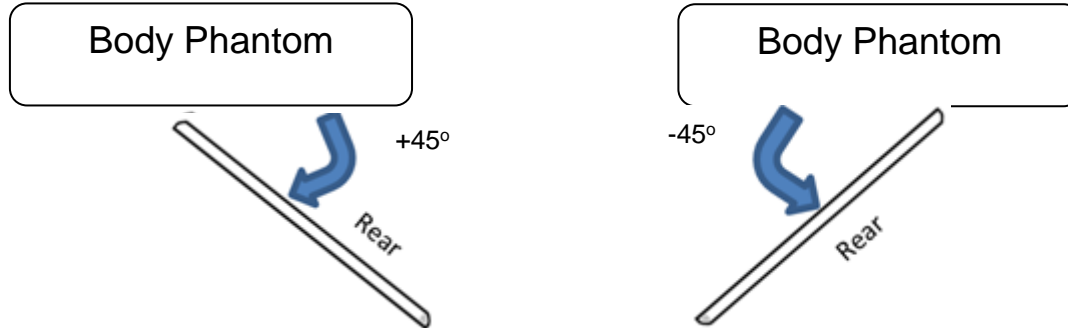


Distance to the DUT (mm)	Proximity Sensor Status 0° to +45°	Proximity Sensor Status 0° to +45°
20	ON	ON
19	ON	ON
18	ON	ON
17	ON	ON
16	ON	ON
15	ON	ON
14	ON	ON
13	ON	ON
12	ON	ON
11	ON	ON
10	ON	ON
9	ON	ON
8	ON	ON
7	ON	ON
6	ON	ON
5	ON	ON
4	ON	ON
3	ON	ON
2	ON	ON
1	ON	ON
0	ON	ON

## 8.5 power reduction per air-interface

The following graphs show the power level and the distance from the DUT to the flat phantom for the Tablet Rear / Tablet Top / Tablet Tight / Tablet Lift / Stand Mode Surface.

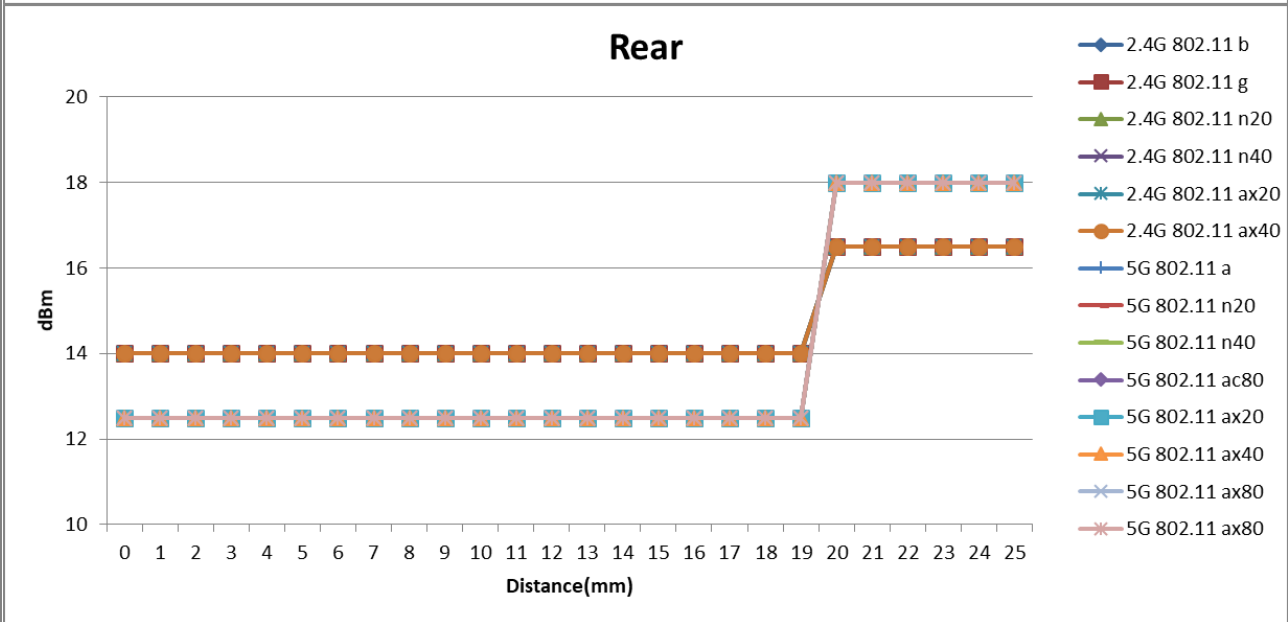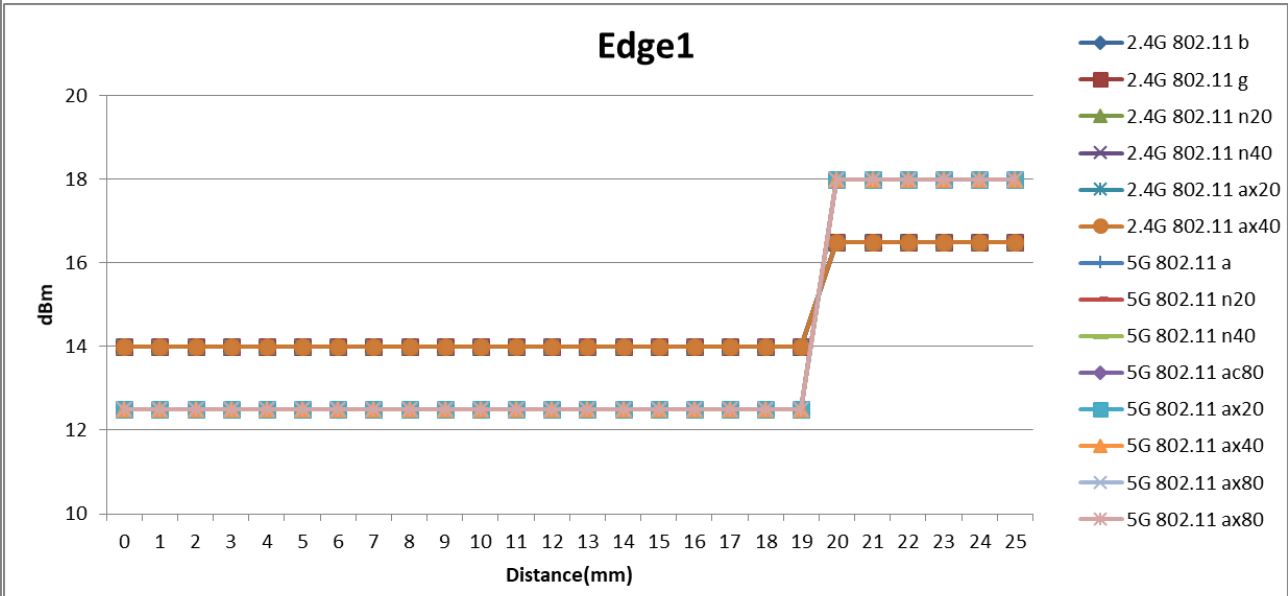

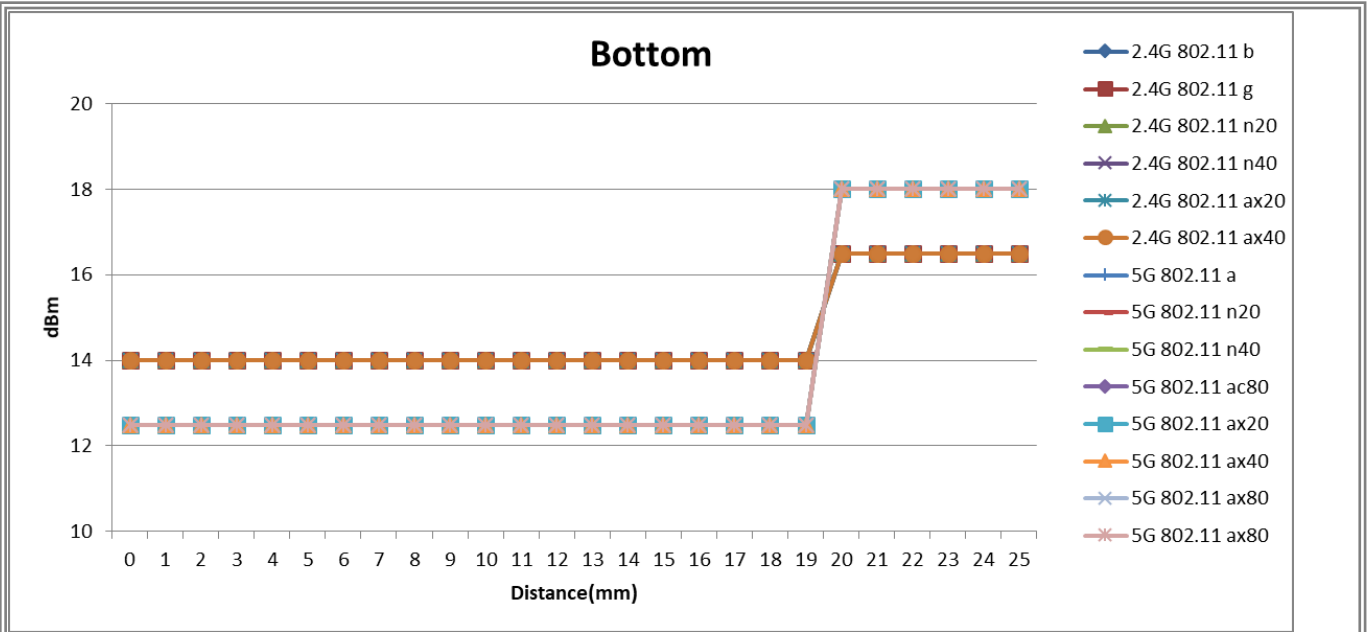

## 9 CONDUCTED POWER RESULTS

### 9.1 CONDUCTED POWER MEASUREMENT RESULTS OF BLUETOOTH

Band	Mode	Channel	Frequency (MHz)	Max Power (dBm)	AVG Power (dBm)
BR	DH5	0	2402	12.50	11.85
		39	2441	12.50	12.13
		78	2480	12.50	12.05
EDR	2DH5	0	2402	12.50	Not Required
		39	2441	12.50	
		78	2480	12.50	
	3DH5	0	2402	12.50	
		39	2441	12.50	
		78	2480	12.50	
BLE		0	2402	12.50	
		19	2440	12.50	
		39	2480	12.50	



## 9.2 CONDUCTED POWER MEASUREMENT RESULTS OF 2.4G BAND

P-Senser\_On

Band	Mode	Channel	Frequency (MHz)	Data Rate	Max Tune-Up Power (dBm)	AVG Power (dBm)	
						Main	Aux
2.4G	802.11b	1	2412	1	14.00	13.62	
		6	2437	1	14.00	13.57	
		11	2462	1	14.00	13.61	
		12	2467	1	14.00	13.79	
		13	2472	1	14.00	13.85	
	802.11g	1-13	2412-2472	6	14.00	Not Required	
	802.11n20	1-13	2412-2472	HT0	14.00		
	802.11n40	3-11	2422-2462	HT0	14.00		
	802.11ax20	1-13	2412-2472	HE0	14.00		
	802.11ax40	3-11	2422-2462	HE0	14.00		
	802.11b	1	2412	1	14.00		13.51
		6	2437	1	14.00		13.85
		11	2462	1	14.00		13.74
		12	2467	1	14.00		13.87
		13	2472	1	14.00		13.83
	802.11g	1-13	2412-2472	6	14.00	Not Required	
	802.11n20	1-13	2412-2472	HT0	14.00		
	802.11n40	3-11	2422-2462	HT0	14.00		
802.11ax20	1-13	2412-2472	HE0	14.00			
802.11ax40	3-11	2422-2462	HE0	14.00			

Note:

- As per FCC OET KDB 248227 D01, conducted output power and SAR testing are not required for 802.11g/n20/n40 channels when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2W/kg$ .

**P-Senser\_Off**

Band	Mode	Channel	Frequency (MHz)	Data Rate	Max Tune-Up Power (dBm)	AVG Power (dBm)	
						Main	Aux
2.4G	802.11b	1-13	2412-2472	1	22.50	Not Required	
	802.11g	1	2412	6	20.00	19.78	
		6	2437	6	23.00	22.11	
		11	2462	6	19.00	18.75	
		12	2467	6	18.00	17.53	
		13	2472	6	17.00	16.53	
	802.11n20	1-13	2412-2472	HTO	22.50	Not Required	
	802.11n40	3-11	2422-2462	HTO	18.00		
	802.11ax20	1-13	2412-2472	HEO	22.50		
	802.11ax40	3-11	2422-2462	HEO	18.00		
	802.11b	1-13	2412-2472	1	22.50	Not Required	
	802.11g	1	2412	6	20.00		19.26
		6	2437	6	23.00		22.32
		11	2462	6	19.00		18.56
		12	2467	6	18.00		17.77
		13	2472	6	17.00		16.53
	802.11n20	1-13	2422-2462	HTO	22.50	Not Required	
	802.11n40	3-11	2412-2472	HEO	18.00		
	802.11ax20	1-13	2422-2462	HEO	22.50		
	802.11ax40	3-11	2422-2452	HEO	18.00		

Note:

- As per FCC OET KDB 248227 D01, conducted output power and SAR testing are not required for 802.11g/n20/n40/ax20/ax40 channels when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2W/kg$ .

### 9.3 CONDUCTED POWER MEASUREMENTS OF 5G UNII\_1

P-sensor On/Off	Band	Mode	Channel	Frequency (MHz)	Data Rate	Max Tune-Up Power (dBm)	AVG Power (dBm)			
							Main	Aux		
On	5.2 UNII_1	802.11a	36-48	5180-5240	6	12.50	Not Required			
		802.11 n20	36-48	5180-5240	HT0	12.50				
		802.11 n40	38-46	5190-5230	HT0	12.50				
				802.11 ac80	42	5210	VHT0	12.50	12.32	12.20
				802.11 ax20	36-48	5180-5240	HT0	12.50	Not Required	
				802.11 ax40	38-46	5190-5230	HT0	12.50		
				802.11 ax80	42	5210	VHT0	12.50		
Off	5.2 UNII_1	802.11a	36-48	5180-5240	6	22.50	Not Required			
		802.11 n20	36-48	5180-5240	HT0	22.50				
		802.11 n40	38-46	5190-5230	HT0	20.00				
				802.11 ac80	42	5210	VHT0	18.00	Not Required	
				802.11 ax20	36-48	5180-5240	HT0	22.50		
				802.11 ax40	38-46	5190-5230	HT0	20.50		
				802.11 ax80	42	5210	VHT0	18.00		

Note:

1. When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is  $\leq 1.2$  W/kg, SAR is not required for U-NII-1 band (see §B.5.2 in this document).
2. The initial test configuration for 2.4 GHz and 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures. When multiple transmission modes (802.11a/g/n/ac/ax) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, lowest order 802.11 mode is selected (i.e. a, g, n, ac then ax).

### 9.4 CONDUCTED POWER MEASUREMENTS OF 5G UNII\_2A

P-sensor On/Off	Band	Mode	Channel	Frequency (MHz)	Data Rate	Max Tune-Up Power (dBm)	AVG Power (dBm)			
							Main	Aux		
On	5.3 UNII_2a	802.11a	52-64	5260-5320	6	12.50	Not Required			
		802.11 n20	52-64	5260-5320	HT0	12.50				
		802.11 n40	54-62	5270-5310	HT0	12.50				
				802.11 ac80	58	5290	VHT0	12.50	12.33	12.25
				802.11 ax20	52-64	5260-5320	HT0	12.50	Not Required	
				802.11 ax40	54-62	5270-5310	HT0	12.50		
				802.11 ax80	58	5290	VHT0	12.50		
Off	5.3 UNII_2a	802.11a	52	5260	6	22.50	22.13	22.22		
			56	5280		22.50	22.15	22.19		
			60	5300		22.50	22.30	22.38		
			64	5320		22.00	22.22	22.27		
				802.11 n20	52-64	5260-5320	HT0	22.00	Not Required	
				802.11 n40	54-62	5270-5310	HT0	20.50		
				802.11 ac80	58	5290	VHT0	18.00		
				802.11 ax20	52-64	5260-5320	HT0	22.50		
				802.11 ax40	54-62	5270-5310	HT0	20.50		
				802.11 ax80	58	5290	VHT0	18.00		

**Note:**

1. When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is  $\leq 1.2$  W/kg, SAR is not required for U-NII-1 band (see §B.5.2 in this document).
2. The initial test configuration for 2.4 GHz and 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures. When multiple transmission modes (802.11a/g/n/ac/ax) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, lowest order 802.11 mode is selected (i.e. a, g, n, ac then ax).

### 9.5 CONDUCTED POWER MEASUREMENTS OF 5G UNII\_2C

P-sensor On/Off	Band	Mode	Channel	Frequency (MHz)	Data Rate	Max Tune-Up Power (dBm)	AVG Power (dBm)	
							Main	Aux
On	5.6 UNII_2c	802.11a	100-140	5500-5700	6	12.50	Not Required	
		802.11 n20	100-140	5500-5700	HT0	12.50		
		802.11 n40	102-134	5510-5670	HT8	12.50		
		802.11 ac80	106	5530	VHT0	12.50	12.44	12.37
		802.11 ac80	122	5610	VHT0	12.50	12.31	12.32
		802.11 ax20	100-140	5500-5700	HT0	12.50	Not Required	
		802.11 ax40	102-134	5510-5670	HT0	12.50		
		802.11 ax80	106-122	5530-5610	VHT0	12.50		
Off	5.6 UNII_2c	802.11a	100	5500	6	21.00	20.95	20.98
			104	5520		22.50	22.11	22.23
			108	5540		22.50	22.08	22.21
			112	5560		22.50	22.07	22.27
			116	5580		22.50	22.16	22.30
			120	5600		22.50	22.11	22.19
			124	5620		22.50	22.14	22.20
			128	5640		22.50	22.08	22.15
			132	5660		22.50	22.10	22.16
			136	5680		22.50	22.12	22.20
			140	5700		21.00	20.83	20.94
			802.11 n20	100-140		5500-5700	HT0	22.00
		802.11 n40	102-134	5510-5670	HT0	21.50		
		802.11 ac80	106-122	5530-5610	VHT0	20.50		
		802.11 ax20	100-140	5500-5700	HT0	22.50		
		802.11 ax40	102-134	5510-5670	HT0	21.50		
		802.11 ax80	106-122	5530-5610	VHT0	21.00		

**Note:**

- When band gap channels between U-NII-2C and U-NII-3 band are supported channels in U-NII-2C band below 5.65 GHz are considered as one band and channels above 5.65 GHz, together with channels in 5.8 GHz U-NII-3 or §15.247 band, are considered as a separate band
- The initial test configuration for 2.4 GHz and 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures. When multiple transmission modes (802.11a/g/n/ac/ax) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, lowest order 802.11 mode is selected (i.e. a, g, n, ac then ax).

### 9.6 CONDUCTED POWER MEASUREMENTS OF 5G UNII\_3

P-sensor On/Off	Band	Mode	Channel	Frequency (MHz)	Data Rate	Max Tune-Up Power (dBm)	AVG Power (dBm)	
							Main	Aux
On	5.8 UNII_3	802.11a	149-165	5745-5825	6	12.50	Not Required	
		802.11 n20	149-165	5745-5825	HT0	12.50		
		802.11 n40	151	5670-5795	HT0	12.50	12.48	12.41
			159	5670-5795	HT0	12.50	12.42	12.48
		802.11 ac80	155	5775	VHT0	12.50	11.93	12.34
		802.11 ax20	149-165	5745-5825	HT0	12.50	Not Required	
		802.11 ax40	151-159	5755-5795	HT0	12.50		
802.11 ax80	155	5775	VHT0	12.50				
Off	5.8 UNII_2c	802.11a	149	5745	6	22.50	22.32	22.39
			153	5765		22.50	22.23	22.32
			157	5785		22.50	22.45	22.43
			161	5805		22.50	22.31	22.34
			165	5825		22.50	22.43	22.41
		802.11 n20	149-165	5745-5825	HT0	22.50	Not Required	
		802.11 n40	151-159	5755-5795	HT0	21.50		
		802.11 ac80	155	5775	VHT0	20.50		
		802.11 ax20	149-165	5745-5825	HT0	22.50		
		802.11 ax40	151-159	5755-5795	HT0	21.50		
		802.11 ax80	155	5775	VHT0	21.00		

**Note:**

1. When band gap channels between U-NII-2C and U-NII-3 band are supported channels in U-NII-2C band below 5.65 GHz are considered as one band and channels above 5.65 GHz, together with channels in 5.8 GHz U-NII-3 or §15.247 band, are considered as a separate band
2. The initial test configuration for 2.4 GHz and 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures. When multiple transmission modes (802.11a/g/n/ac/ax) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, lowest order 802.11 mode is selected (i.e. a, g, n, ac then ax).

## 9.7 SAR TEST PROCEDURE

### General Notes:

1. Per KDB447498 D01, all measurement SAR results are scaled to the maximum tune-up tolerance limit to demonstrate compliant.
2. Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:  $\leq 0.8$  W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq 100$  MHz. When the maximum output power variation across the required test channels is  $> \frac{1}{2}$  dB, instead of the middle channel, the highest output power channel must be used.
3. Per KDB865664 D01, for each frequency band, repeated SAR measurement is required only when the measured SAR is  $\geq 0.8$  W/kg; if the deviation among the repeated measurement is  $\leq 20\%$ , and the measured SAR  $< 1.45$  W/kg, only one repeated measurement is required.

### WLAN Notes:

1. For exposure conditions with multiple test positions, such as handset operating next to the ear, devices with hotspot mode, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all positions in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When the reported SAR of the initial test position is  $\leq 0.4$  W/kg, further SAR measurement is not required for the other (remaining) test positions. Otherwise, SAR is evaluated at the subsequent highest peak SAR position until the reported SAR result is  $\leq 0.8$  W/kg or all test positions are measured.
2. Justification for test configurations for WLAN per KDB Publication 248227 for 2.4GHz WIFI single transmission chain operations, the highest measured maximum output power Channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR. See Section 7.1.4 for more information.
3. Justification for test configurations for WLAN per KDB Publication 248227 for 5GHz WIFI single transmission chain operations, the initial test configuration was selected according to the transmission mode with the highest maximum allowed power. Other transmission mode was not investigated since the highest reported SAR for initial test configuration adjusted by the ratio of maximum output powers is less than 1.2W/kg. See Section 7.1.4 for more information.

## 10 SAR TEST RESULTS

### 10.1 BODY SAR TEST RESULTS

#### SAR test results of Bluetooth

Mode	Channel	Test Position	Ant Vendor	Ant	Dist (mm)	Max une-up (dBm)	AVG Power (dBm)	Area SAR 1g	Zoom SAR 1g	Reported SAR 1g	Note
Bluetooth	39	Edge1	AWAN	Aux	0	12.50	12.13	0.042	0.037	0.040	
	39	Rear			0	12.50	12.13	0.090	0.082	0.089	
	39	Bottom			0	12.50	12.13	0.077	0.073	0.080	
	0	Rear			0	12.50	11.85	0.115	0.102	<b>0.118</b>	
	78	Rear			0	12.50	12.05	0.091	0.083	0.092	

#### SAR test results of 2.4G WiFi

P-sensor On/Off	Mode	Channel	Test Position	Ant Vendor	Ant	Dist (mm)	Max une-up (dBm)	AVG Power (dBm)	Area SAR 1g	Zoom SAR 1g	Reported SAR 1g	Note
on	802.11b	1	Edge1	AWAN	Main	0	14.00	13.62	0.106	0.109	0.119	
		1	Edge4			0	14.00	13.62	0.078	0.059	0.064	
		1	Rear			0	14.00	13.62	0.773	0.635	0.693	
		1	Bottom			0	14.00	13.62	0.878	0.747	<b>0.815</b>	
		6	Bottom			0	14.00	13.57	0.837	0.717	0.792	1
		11	Bottom			0	14.00	13.61	0.819	0.706	0.772	1
		12	Bottom			0	14.00	13.79	0.819	0.711	0.746	
		13	Bottom			0	14.00	13.75	0.850	0.728	0.771	
		6	Edge1		0	14.00	13.85	0.310	0.296	0.306		
		6	Edge2		0	14.00	13.85	0.052	0.050	0.051		
		6	Rear		0	14.00	13.85	0.760	0.633	<b>0.655</b>		
		1	Rear		0	14.00	13.51	0.673	0.580	0.649		
		11	Rear		0	14.00	13.74	0.664	0.585	0.621		
		12	Rear		0	14.00	13.87	0.579	0.538	0.554		
		13	Rear		0	14.00	13.83	0.631	0.564	0.587		
		6	Bottom		0	14.00	13.85	0.707	0.593	0.614		
		Off	802.11g		6	Edge1	AWAN	Main	19	22.50	22.11	0.113
6	Edge4			19	22.50	22.11			0.042		0.046	
6	Rear			19	22.50	22.11			0.405	0.376	0.411	
6	Bottom			19	22.50	22.11			0.364	0.334	0.398	
6	Edge1			19	22.50	22.32			0.238		0.248	
6	Edge2			19	22.50	22.32		0.046		0.048		
6	Rear			19	22.50	22.32		0.369	0.348	0.363		
6	Bottom			19	22.50	22.32		0.265	0.255	0.276		

#### Note:

- Highest reported SAR is > 0.8 W/kg. Added second highest power channel for this test position



## SAR test results of 5G WiFi

P-sensor On/Off	Band	Mode	Channel	Test Position	Ant Vendor	Ant	Dist (mm)	Max une-up (dBm)	AVG Power (dBm)	Area SAR 1g	Zoom SAR 1g	Reported SAR 1g	Note		
On	5G_UNII 1 & 2a	802.11 ac80	58	Edge1	AWAN	Main	0	12.50	12.33	0.098	0.093	0.096			
			58	Edge4			0	12.50	12.33	0.029	0.039	0.041			
			58	Rear			0	12.50	12.33	0.972	0.944	0.982			
			58	Bottom			0	12.50	12.33	0.277	0.266	0.277			
			42	Rear			0	12.50	12.32	1.230	1.010	<b>1.053</b>	1		
			58	Edge1			0	12.50	12.25	0.420	0.436	0.462			
			58	Edge2			0	12.50	12.25	0.023	0.038	0.040			
			58	Rear			0	12.50	12.25	0.756	0.648	<b>0.686</b>			
			58	Bottom			0	12.50	12.25	0.273	0.234	0.248			
			42	Rear			0	12.50	12.20	0.478	0.484	0.519			
			106	Edge1			0	12.50	12.44	0.072	0.058	0.059			
			106	Edge4			0	12.50	12.44	0.031	0.038	0.039			
	106	Rear	0	12.50		12.44	1.130	1.150	<b>1.166</b>						
	106	Bottom	0	12.50		12.44	0.277	0.258	0.262						
	122	Rear	0	12.50		12.37	0.851	0.870	0.896	1					
	106	Edge1	0	12.50		12.31	0.256	0.278	0.290						
	106	Edge2	0	12.50		12.31	0.031	0.038	0.040						
	106	Rear	0	12.50		12.31	0.964	0.797	0.833						
	106	Bottom	0	12.50		12.31	0.605	0.693	0.724						
	122	Rear	0	12.50		12.32	0.605	0.941	<b>0.981</b>	1					
	155	Edge1	0	12.50		11.93	0.080	0.093	0.106						
	155	Edge4	0	12.50		11.93	0.023	0.035	0.040						
	155	Rear	0	12.50		11.93	0.610	0.614	<b>0.700</b>						
	155	Bottom	0	12.50		11.93	0.289	0.360	0.410						
	802.11 ac80	151	Rear	0		12.50	12.48	0.616	0.644	0.647					
	802.11 n40	159	Rear	0		12.50	12.42	0.539	0.585	0.596					
	802.11 ac80	155	Edge1	0		12.50	12.34	0.265	0.299	0.310					
	802.11 ac80	155	Edge2	0		12.50	12.34	0.029	0.042	0.044					
	802.11 ac80	155	Rear	0		12.50	12.34	0.398	0.511	<b>0.530</b>					
	802.11 ac80	155	Bottom	0		12.50	12.34	0.280	0.275	0.285					
	802.11 n40	151	Rear	0		12.50	12.41	0.260	0.410	0.419					
	802.11 n40	159	Rear	0		12.50	12.48	0.279	0.420	0.422					
	Off	5G_UNII 1 & 2a	802.11 a	60		Edge1	AWAN	Main	19	22.50	22.30	0.101		0.000	
				60		Edge4			19	22.50	22.30	0.021		0.000	
				60		Rear			19	22.50	22.30	0.449	0.479	0.502	
				60		Bottom			19	22.50	22.30	0.165	0.187	0.196	
				60		Edge1			19	22.50	22.38	0.242	0.247	0.254	
				60		Edge2			19	22.50	22.38	0.023		0.000	
				60		Rear			19	22.50	22.38	0.363	0.381	0.392	
				60		Bottom			19	22.50	22.38	0.143		0.000	
				116		Edge1			19	22.50	22.16	0.059		0.000	
				116		Edge4			19	22.50	22.16	0.025		0.000	
				116		Rear			19	22.50	22.16	0.307	0.334	0.361	
				116		Bottom			19	22.50	22.16	0.118		0.000	
		116	Edge1	19		22.50		22.30	0.288	0.307	0.321				
		116	Edge2	19		22.50		22.30	0.023		0.000				
		116	Rear	19		22.50		22.30	0.569	0.598	0.626				
		116	Bottom	19		22.50		22.30	0.199		0.000				
157		Edge1	19	22.50	22.45	0.090			0.000						
157		Edge4	19	22.50	22.45	0.024			0.000						
157		Rear	19	22.50	22.45	0.356		0.394	0.399						
157		Bottom	19	22.50	22.45	0.155		0.177	0.179						
157		Edge1	19	22.50	22.43	0.139			0.000						
157		Edge2	19	22.50	22.43	0.016			0.000						
157		Rear	19	22.50	22.43	0.255		0.283	0.288						
157		Bottom	19	22.50	22.45	0.160			0.000						
ON		5G UNII 2C	802.11 ac80	106	Rear	AWAN		Main	0	12.50	12.44	1.170	1.070	1.085	2

## Note:

- Highest reported SAR is > 0.8 W/kg. Added second highest power channel for this test position
- Repeated measurements are required only when the measured SAR is  $\geq 0.80$  W/kg. If the measured SAR values are < 1.45 W/kg with  $\leq 20\%$  variation, only one repeated measurement is required to reaffirm that the results are not expected to have substantial variations, which may introduce significant compliance concerns. (Per KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04)

Original SAR = 1.150 W/kg, therefore second times repeat SAR is required.

Repeat SAR = 1.070W/kg &lt; 1.45W/kg

SAR variation= -6.95 % &lt; 20%

## 11. SIMULTANEOUS TRANSMISSION CONDITIONS

### 11.1 Stand-alone SAR test exclusion

SAR compliance for simultaneous transmission must be considered when the maximum duration of overlapping transmissions, including network hand-offs, is greater than 30 seconds. This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis.

The Simultaneous Transmission Possibilities of this device are as below:

No.	Configuration
1	WLAN 2.4G(Main)+BT
2	RLAN 5G(Main)+BT
3	WLAN 2.4G(Main)+ WLAN 2.4G(Aux)
4	RLAN 5G(Main)+ RLAN 5G(Aux)
5	RLAN 5G(Main)+ RLAN 5G(Aux) +BT

## 11.2 Simultaneous transmission conditions

KDB 447498 D01 General RF Exposure Guidance v06, introduces a new formula for calculating the SAR to Peak Location Ratio (SPLSR) between pairs of simultaneously transmitting antennas:

$$SPLSR = (SAR_1 + SAR_2)^{1.5} / R_i$$

Where:

**SAR<sub>1</sub>** is the highest Reported or estimated SAR for the first of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition

**SAR<sub>2</sub>** is the highest Reported or estimated SAR for the second of a pair of simultaneous transmitting antennas, in the same test operating mode and exposure condition as the first

**R<sub>i</sub>** is the separation distance between the pair of simultaneous transmitting antennas. When the SAR is measured, for both antennas in the pair, it is determined by the actual x, y and z coordinates in the 1-g SAR for each SAR peak location, based on the extrapolated and interpolated result in the zoom scan measurement, using the formula of  $[(x_1-x_2)^2 + (y_1-y_2)^2 + (z_1-z_2)^2]$

A new threshold of 0.04 is also introduced in the KDB. Thus, in order for a pair of simultaneous transmitting antennas with the sum of 1-g SAR > 1.6 W/kg to qualify for exemption from Simultaneous Transmission SAR measurements, it has to satisfy the condition of:

$$(SAR_1 + SAR_2)^{1.5} / R_i \leq 0.04$$

### 11.3 Estimated SAR for Simultaneous Transmission SAR Analysis

#### Considerations for SAR estimation

1. When standalone SAR test exclusion applies, standalone SAR must also be estimated to determine simultaneous transmission SAR test exclusion.
2. Dedicated Host Approach criteria for SAR test exclusion is likewise applied to SAR estimation, with certain distinctions between test exclusion and SAR estimation:
  - When the separation distance from the antenna to an adjacent edge is  $\leq 5$  mm, a distance of 5 mm is applied for SAR estimation; this is the same between test exclusion and SAR estimation calculations.
  - When the separation distance from the antenna to an adjacent edge is  $> 5$  mm but  $\leq 50$  mm, the actual antenna-to-edge separation distance is applied for SAR estimation.
  - When the minimum test separation distance is  $> 50$  mm, the estimated SAR value is 0.4 W/kg

#### 11.3.1 Estimated SAR for Bluetooth

According to section 9, the Bluetooth must be estimated according to following to determine simultaneous transmission SAR test exclusion:

- $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f_{\text{GHz}}}/x]$  W/kg for test separation distances  $\leq 50$  mm; where  $x = 7.5$  for 1-g SAR, and  $x = 18.75$  for 10-g SAR.
- 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is  $> 50$  mm.

Antenn	Band	Frequen ( MHz )	Output Po		Separation Distances(mm)						Estimated 1-g SAR ( W / Kg )					
			d B m	mW	Rear	Bottom	Edge1	Edge2	Edge3	Edge4	Rear	Bottom	Edge1	Edge2	Edge3	Edge4
Bluetooth	2.4 GHz	2480	12.50	18.00	6.40	<b>8.00</b>	<b>4.50</b>	42.20	203.25	225.80	<b>Test</b>	<b>Test</b>	<b>Test</b>	0.090	<b>&gt;200mm</b>	<b>&gt;200mm</b>

**11.4 Simultaneous transmission conditions**

Test Position SAR <sub>1g</sub> (W/kg)	Rear	Bottom	Edge1	Edge2	Edge4
WLAN 2.4G WiFi_Main	<b>0.693</b>	<b>0.815</b>	<b>0.119</b>		<b>0.064</b>
WLAN 2.4G WiFi_Aux	<b>0.655</b>	<b>0.614</b>	<b>0.306</b>	<b>0.051</b>	
UNII_1 & 2a WiFi_Main	<b>1.053</b>	<b>0.277</b>	<b>0.096</b>		<b>0.041</b>
UNII_1 & 2a WiFi_Aux	<b>0.686</b>	<b>0.248</b>	<b>0.462</b>	<b>0.040</b>	
UNII_2c WiFi_Main	<b>1.166</b>	<b>0.262</b>	<b>0.059</b>		<b>0.039</b>
UNII_2c WiFi_Aux	<b>0.981</b>	<b>0.724</b>	<b>0.290</b>	<b>0.040</b>	
UNII_3 WiFi_Main	<b>0.700</b>	<b>0.410</b>	<b>0.106</b>		<b>0.040</b>
UNII_3 WiFi_Aux	<b>0.530</b>	<b>0.285</b>	<b>0.310</b>	<b>0.044</b>	
Bluetooth_DH5	<b>0.118</b>	<b>0.080</b>	<b>0.040</b>	<b>0.090</b>	
WLAN 2.4G_Main+WLAN 2.4G_Aux MAX $\Sigma$ SAR <sub>1g</sub>	<b>1.348</b>	<b>1.429</b>	<b>0.425</b>	<b>0.051</b>	<b>0.064</b>
RLAN 5G_Main+ RLAN 5G_Aux MAX $\Sigma$ SAR <sub>1g</sub>	<b>2.147</b>	<b>1.134</b>	<b>0.568</b>	<b>0.044</b>	<b>0.041</b>
WLAN_+BT MAX $\Sigma$ SAR <sub>1g</sub>	<b>1.284</b>	<b>0.895</b>	<b>0.502</b>	<b>0.090</b>	<b>0.064</b>

Note:

1. MAX.  $\Sigma$ SAR<sub>1g</sub>= 2.147 W/Kg>1.6 W/Kg, so Peak location SAR are required.
2. Test tool can't support mimo with different mode, so we select worse case to evaluation simultaneous transmission.
3. We respectively selected the Worst simultaneous of 2.4G and 5G to evaluate SPLSR, the SPLSR results that can refer Annex E.

## 12. TEST LAYOUT

### Specific Absorption Rate Test Layout




#### Liquid depth in the flat Phantom ( $\geq 15\text{cm}$ depth)

HSL(2450MHz)



HSL(5GHz)

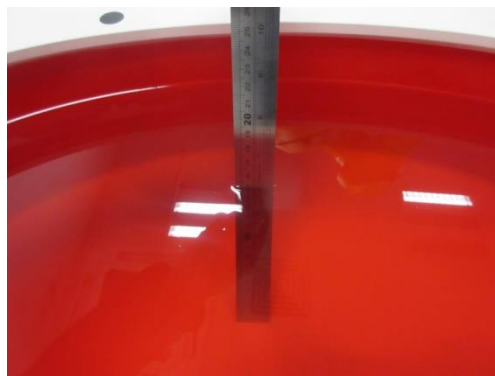

**Appendix A. SAR Plots of System Verification**

(Pls See BTL-FCC SAR-1-2007T046B\_Appendix A.)

**Appendix B. SAR Plots of SAR Measurement**

(Pls See BTL-FCC SAR-1-2007T046B\_Appendix B.)

**Appendix C. Calibration Certificate**

(Pls See BTL-FCC SAR-1-2007T046B\_Appendix C.)

**Appendix D. Photographs of the Test Set-Up**

(Pls See BTL-FCC SAR-1-2007T046B\_Appendix D.)

**Appendix E. SPLSR**

(Pls See BTL-FCC SAR-1-2007T046B\_Appendix E.)

**End of Test Report**