



# FCC RF Test Report

**APPLICANT** : Lenovo (Shanghai) Electronics Technology Co., Ltd.  
**EQUIPMENT** : dtab Compact  
**BRAND NAME** : NTT docomo  
**MODEL NAME** : ELF-8605L  
**FCC ID** : O57ELF8605L  
**STANDARD** : 47 CFR Part 2, 22(H), 27(M)  
**CLASSIFICATION** : Licensed Non-Broadcast Station Transmitter (TNB)

The product was received on May 09, 2020 and completely tested on Jul. 30, 2020. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

Jason Jia

Reviewed by: Jason Jia / Supervisor

James Huang

Approved by: James Huang / Manager



**Sporton International (Kunshan) Inc.**

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300  
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY... 3
SUMMARY OF TEST RESULT ... 4
1 GENERAL DESCRIPTION ... 5
1.1 Applicant ... 5
1.2 Manufacturer ... 5
1.3 Product Feature of Equipment Under Test ... 5
1.4 Product Specification of Equipment Under Test ... 6
1.5 Modification of EUT ... 6
1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator ... 6
1.7 Testing Location ... 8
1.8 Test Software ... 8
1.9 Applicable Standards ... 8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ... 9
2.1 Test Mode ... 9
2.2 Connection Diagram of Test System ... 10
2.3 Support Unit used in test configuration and system ... 10
2.4 Measurement Results Explanation Example ... 10
2.5 Frequency List of Low/Middle/High Channels ... 11
3 CONDUCTED TEST ITEMS ... 12
3.1 Measuring Instruments ... 12
3.2 Test Setup ... 12
3.3 Test Result of Conducted Test ... 12
3.4 Conducted Output Power and ERP/EIRP ... 13
3.5 Peak-to-Average Ratio ... 14
3.6 Occupied Bandwidth ... 15
3.7 Conducted Band Edge ... 16
3.8 Conducted Spurious Emission ... 17
3.9 Frequency Stability ... 18
4 RADIATED TEST ITEMS ... 19
4.1 Measuring Instruments ... 19
4.2 Test Setup ... 19
4.3 Test Result of Radiated Test ... 19
4.4 Radiated Spurious Emission ... 20
5 LIST OF MEASURING EQUIPMENT ... 21
6 UNCERTAINTY OF EVALUATION ... 22
APPENDIX A. TEST RESULTS OF CONDUCTED TEST
APPENDIX B. TEST RESULTS OF RADIATED TEST
APPENDIX C. TEST SETUP PHOTOGRAPHS





## SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
	§22.913(a)(5)	Effective Radiated Power (Band 5)	ERP < 7 Watt		
	§27.50(h)(2)	Equivalent Isotropic Radiated Power (Band 38) (Band 41)	EIRP < 2Watt		
3.5	N/A	Peak-to-Average Ratio	<13 dB	PASS	-
3.6	§2.1049	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§2.1051 §22.917(a)	Conducted Band Edge Measurement (Band 5)	< 43+10log <sub>10</sub> (P[Watts])	PASS	-
	§27.53(m)(4)	Conducted Band Edge Measurement (Band 38) (Band 41)	§27.53(m)(4)		
3.8	§2.1051 §22.917(a)	Conducted Spurious Emission (Band 5)	< 43+10log <sub>10</sub> (P[Watts])	PASS	-
	§2.1051 §27.53(m)(4)	Conducted Spurious Emission (Band 38) (Band 41)	< 55+10log <sub>10</sub> (P[Watts])		
3.9	§2.1055 §22.355	Frequency Stability Temperature & Voltage	< 2.5 ppm for Part 22	PASS	-
	§2.1055 §27.54		Within Authorized Band		
4.4	§2.1053 §22.917(a)	Radiated Spurious Emission (Band 5)	< 43+10log <sub>10</sub> (P[Watts])	PASS	Under limit 6.35 dB at 7758.270 MHz
	§2.1053 §27.53(m)(4)	Radiated Spurious Emission (Band 38) (Band 41)	< 55+10log <sub>10</sub> (P[Watts])		

**Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

**Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



# 1 General Description

## 1.1 Applicant

Lenovo (Shanghai) Electronics Technology Co., Ltd.

Section 304-305, Building No. 4, # 222, Meiyue Road, China (Shanghai) Pilot Free Trade Zone

## 1.2 Manufacturer

Lenovo PC HK Limited

23/F, Lincoln House, Taikoo Place 979 King's Road, Quarry Bay, Hong Kong, P.R.China

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	dtab Compact
Brand Name	NTT docomo
Model Name	ELF-8605L
FCC ID	O57ELF8605L
EUT supports Radios application	WCDMA/LTE WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE FM Receiver/GNSS
IMEI Code	Conducted : N/A Radiation : 860775040008472
HW Version	Tablet ELF-8605L
SW Version	ELF-8605L_RF04_20200813
EUT Stage	Identical Prototype



### 1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
<b>Tx Frequency</b>	LTE Band 5 : 824.7 MHz ~ 848.3 MHz LTE Band 38 : 2572.5MHz ~ 2617.5MHz LTE Band 41 : 2537.5 MHz ~ 2652.5 MHz
<b>Rx Frequency</b>	LTE Band 5 : 869.7 MHz ~ 893.3 MHz LTE Band 38 : 2572.5MHz ~ 2617.5MHz LTE Band 41 : 2537.5 MHz ~ 2652.5 MHz
<b>Bandwidth</b>	LTE Band 5 : 1.4MHz / 3MHz / 5MHz / 10MHz LTE Band 38 : 5MHz / 10MHz / 15MHz / 20MHz LTE Band 41 : 5MHz / 10MHz / 15MHz / 20MHz
<b>Maximum Output Power to Antenna</b>	LTE Band 5 : 23.07 dBm LTE Band 38 : 23.58 dBm LTE Band 41 : 23.65 dBm
<b>Antenna Gain</b>	LTE Band 5 : -1.60 dBi LTE Band 38 : 1.30 dBi LTE Band 41 : 1.50 dBi
<b>Type of Modulation</b>	QPSK / 16QAM / 64QAM

### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

### 1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

LTE Band 5		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)
1.4	824.7 ~ 848.3	1M09G7D	-	0.0787	1M10W7D	-	0.0659
3	825.5 ~ 847.5	2M73G7D	-	0.0802	2M73W7D	-	0.0673
5	826.5 ~ 846.5	4M51G7D	-	0.0828	4M52W7D	-	0.0705
10	829.0 ~ 844.0	9M07G7D	0.0060	0.0855	9M07W7D	-	0.0731
LTE Band 5		64QAM					
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)		Maximum ERP(W)		
1.4	824.7 ~ 848.3	1M10W7D	-		0.0530		
3	825.5 ~ 847.5	2M75W7D	-		0.0528		
5	826.5 ~ 846.5	4M53W7D	-		0.0553		
10	829.0 ~ 844.0	9M11W7D	-		0.0607		



LTE Band 38		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
5	2572.5 ~ 2617.5	4M50G7D	-	0.3251	4M49W7D	-	0.2679
10	2575.0 ~ 2615.0	9M05G7D	0.0037	0.3258	9M03W7D	-	0.3673
15	2577.5 ~ 2612.5	13M4G7D	-	0.3266	13M5W7D	-	0.2729
20	2580.0 ~ 2610.0	18M5G7D	-	0.3273	18M4W7D	-	0.2698
LTE Band 38		64QAM					
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)		Maximum ERP(W)		
5	2572.5 ~ 2617.5	4M50W7D	-		0.1928		
10	2575.0 ~ 2615.0	9M05W7D	-		0.1963		
15	2577.5 ~ 2612.5	13M5W7D	-		0.1932		
20	2580.0 ~ 2610.0	18M3W7D	-		0.1959		
LTE Band 41		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
5	2537.5 ~ 2652.5	4M50G7D	-	0.3251	4M49W7D	-	0.2679
10	2540.0 ~ 2650.0	9M05G7D	0.0037	0.3258	9M03W7D	-	0.3673
15	2542.5 ~ 2647.5	13M4G7D	-	0.3266	13M5W7D	-	0.2729
20	2545.0 ~ 2645.0	18M5G7D	-	0.3273	18M4W7D	-	0.2698
LTE Band 41		64QAM					
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)		Maximum ERP(W)		
5	2537.5 ~ 2652.5	4M50W7D	-		0.1928		
10	2540.0 ~ 2650.0	9M05W7D	-		0.1963		
15	2542.5 ~ 2647.5	13M5W7D	-		0.1932		
20	2545.0 ~ 2645.0	18M3W7D	-		0.1959		

**Note:**

1. LTE Band 41 overlaps the entire frequency range of LTE Band 38. Therefore, the test results provided in this report covers Band 41 as well as Band 38.



### 1.7 Testing Location

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

<b>Test Firm</b>	Sporton International (Kunshan) Inc.		
<b>Test Site Location</b>	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	03CH05-KS TH01-KS	CN1257	314309

### 1.8 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH05-KS	AUDIX	E3	6.2009-8-24al

### 1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 22(H), 27(M)
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 D01 Power Meas License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.





## 2 Test Configuration of Equipment Under Test


### 2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas License Digital Systems v03r01 with maximum output power.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission.

Test Items	Band	Bandwidth (MHz)						Modulation			RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	M	H
Max. Output Power	5	v	v	v	v	-	-	v	v	v	v	v	v	v	v	v
	38	-	-	v	v	v	v	v	v	v	v	v	v	v	v	v
	41	-	-	v	v	v	v	v	v	v	v	v	v	v	v	v
Peak-to-Average Ratio	5				v	-	-	v	v	v	v		v	v	v	v
	41	-	-				v	v	v	v	v		v	v	v	v
26dB and 99% Bandwidth	5	v	v	v	v	-	-	v	v	v			v	v	v	v
	41	-	-	v	v	v	v	v	v	v			v	v	v	v
Conducted Band Edge	5	v	v	v	v	-	-	v	v	v	v		v	v		v
	41	-	-	v	v	v	v	v	v	v	v		v	v		v
Conducted Spurious Emission	5	v	v	v	v	-	-	v	v	v	v			v	v	v
	41	-	-	v	v	v	v	v	v	v	v			v	v	v
Frequency Stability	5				v	-	-	v					v		v	
	41	-	-		v			v					v		v	
E.R.P / E.I.R.P	5	v	v	v	v	-	-	v	v	v	v			v	v	v
	41	-	-	v	v	v	v	v	v	v	v			v	v	v
Radiated Spurious Emission	5	Worst Case											v	v	v	
	41	Worst Case											v	v	v	
Note	<ol style="list-style-type: none"> <li>The mark "v" means that this configuration is chosen for testing</li> <li>The mark "-" means that this bandwidth is not supported.</li> <li>The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.</li> <li>LTE Band 41 overlaps the entire frequency range of LTE Band 38. Therefore, the test results provided in this report covers Band 41 as well as Band 38.</li> </ol>															

## 2.2 Connection Diagram of Test System

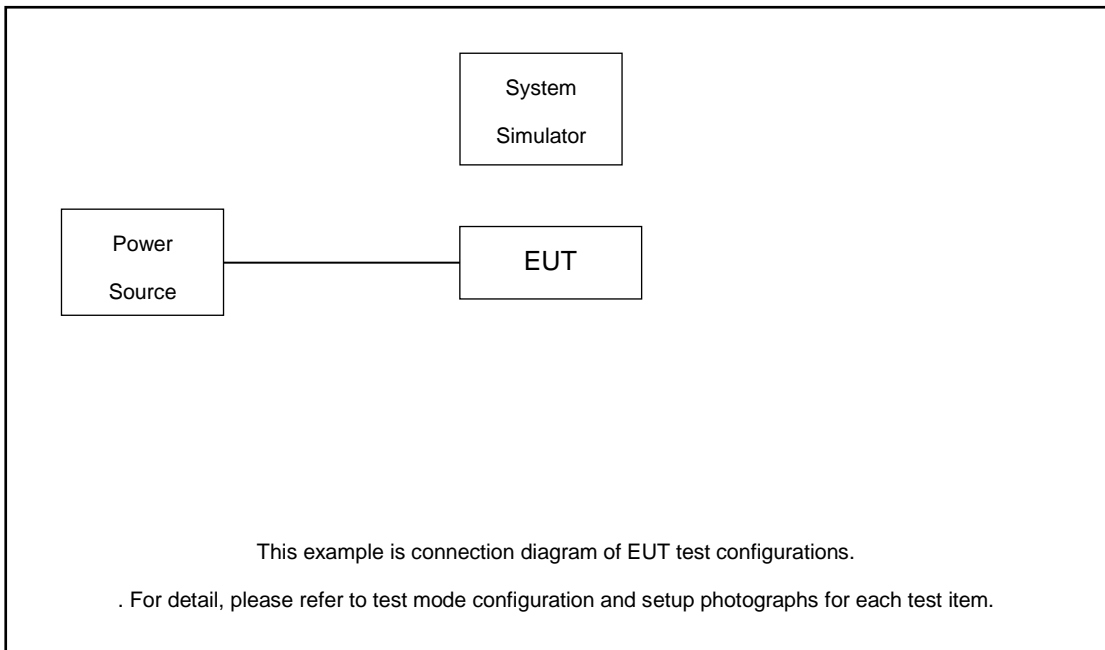

## 2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	Power Supply	GWINSTEK	PSS-2002	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m

## 2.4 Measurement Results Explanation Example

### For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss.*

Following shows an offset computation example with cable loss 4.5 dB.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)}. \\ &= 4.5 \text{ (dB)} \end{aligned}$$



### 2.5 Frequency List of Low/Middle/High Channels

LTE Band 5 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	20450	20525	20600
	Frequency	829	836.5	844
5	Channel	20425	20525	20625
	Frequency	826.5	836.5	846.5
3	Channel	20415	20525	20635
	Frequency	825.5	836.5	847.5
1.4	Channel	20407	20525	20643
	Frequency	824.7	836.5	848.3

LTE Band 38 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	37850	38000	38150
	Frequency	2580	2595	2610
15	Channel	37825	38000	38175
	Frequency	2577.5	2595	2612.5
10	Channel	37800	38000	38200
	Frequency	2575	2595	2615
5	Channel	37775	38000	38225
	Frequency	2572.5	2595	2617.5

LTE Band 41 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	40140	40670	41140
	Frequency	2545	2598	2645
15	Channel	40115	40685	41165
	Frequency	2542.5	2599.5	2647.5
10	Channel	40090	40690	41190
	Frequency	2540	2600	2650
5	Channel	40065	40705	41215
	Frequency	2537.5	2601.5	2652.5


### 3 Conducted Test Items

#### 3.1 Measuring Instruments


See list of measuring instruments of this test report.

#### 3.2 Test Setup


##### 3.2.1 Conducted Output Power



##### 3.2.2 Peak-to-Average Ratio, Occupied Bandwidth ,Conducted Band-Edge and Conducted Spurious Emission

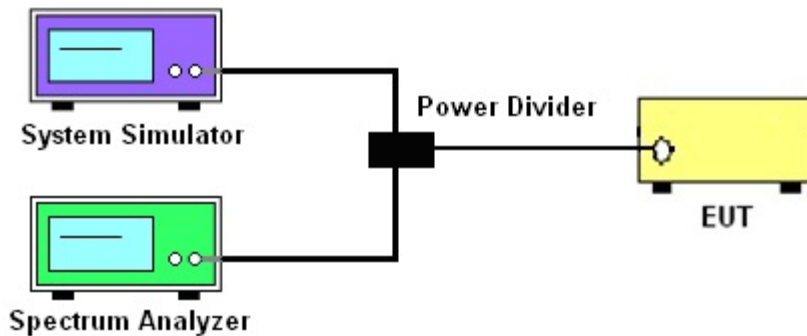

##### 3.2.3 Frequency Stability

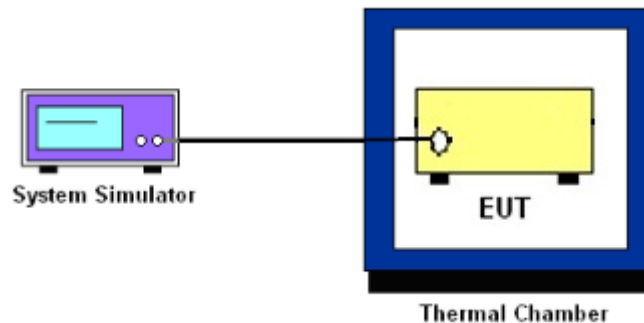

### 3.3 Test Result of Conducted Test

Please refer to Appendix A.



## 3.4 Conducted Output Power and ERP/EIRP

### 3.4.1 Description of the Conducted Output Power Measurement and ERP/EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for LTE Band 5.

The EIRP of mobile transmitters must not exceed 2 Watts for LTE and Band 38 and Band 41.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$ ,  $ERP = EIRP - 2.15$ , where

$P_T$  = transmitter output power in dBm

$G_T$  = gain of the transmitting antenna in dBi

$L_C$  = signal attenuation in the connecting cable between the transmitter and antenna in dB

### 3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.



## 3.5 Peak-to-Average Ratio

### 3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

### 3.5.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.



## 3.6 Occupied Bandwidth

### 3.6.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

### 3.6.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.  
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



## 3.7 Conducted Band Edge

### 3.7.1 Description of Conducted Band Edge Measurement

22.917(a)

For operations in the 824 – 849 MHz band, the FCC limit is  $43 + 10\log_{10}(P[\text{Watts}])$  dB below the transmitter power P(Watts) in a 100kHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53(m)(4)

For mobile digital stations, the attenuation factor shall be not less than  $40 + 10 \log (P)$  dB on all frequencies between the channel edge and 5 megahertz from the channel edge,  $43 + 10 \log (P)$  dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and  $55 + 10 \log (P)$  dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that  $43 + 10 \log (P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz and  $55 + 10 \log (P)$  dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

### 3.7.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW  $\geq$  1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. Checked that all the results comply with the emission limit line.

Example:

The limit line is derived from  $43 + 10\log(P)$ dB below the transmitter power P(Watts)  
 $= P(W) - [43 + 10\log(P)]$  (dB)  
 $= [30 + 10\log(P)]$  (dBm) -  $[43 + 10\log(P)]$  (dB) = -13dBm.

9. For LTE Band 38, 41, the other 40 dB, and 55 dB have additionally applied same calculation above.





### 3.8 Conducted Spurious Emission

#### 3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

For Band 38,41:

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $55 + 10 \log (P)$  dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10<sup>th</sup> harmonic.

#### 3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. The limit line is derived from  $43 + 10\log(P)$ dB below the transmitter power P(Watts)  
 $= P(W) - [43 + 10\log(P)]$  (dB)  
 $= [30 + 10\log(P)]$  (dBm) -  $[43 + 10\log(P)]$  (dB)  
 $= -13$ dBm.
11. For Band 38, 41  
The limit line is derived from  $55 + 10\log(P)$ dB below the transmitter power P(Watts)  
 $= P(W) - [55 + 10\log(P)]$  (dB)  
 $= [30 + 10\log(P)]$  (dBm) -  $[55 + 10\log(P)]$  (dB)  
 $= -25$ dBm.



## 3.9 Frequency Stability

### 3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5\text{ppm}$ ) of the center frequency.

### 3.9.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to  $-30^{\circ}\text{C}$  and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in  $10^{\circ}\text{C}$  step up to  $50^{\circ}\text{C}$ . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

### 3.9.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5
2. The EUT was placed in a temperature chamber at  $20\pm 5^{\circ}\text{C}$  and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.


## 4 Radiated Test Items

### 4.1 Measuring Instruments


See list of measuring instruments of this test report.

### 4.2 Test Setup

#### 4.2.1 For radiated test from 30MHz to 1GHz

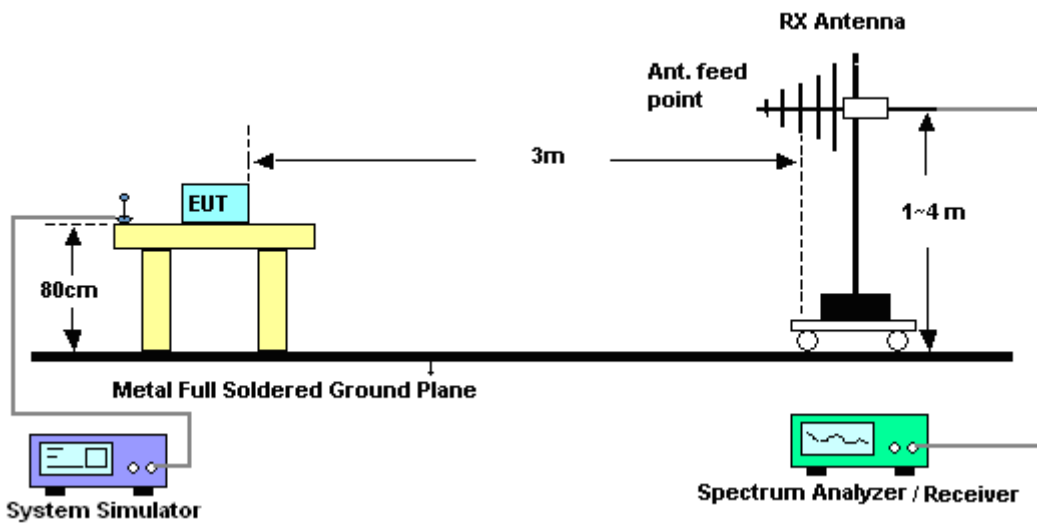

#### 4.2.2 For radiated test above 1GHz

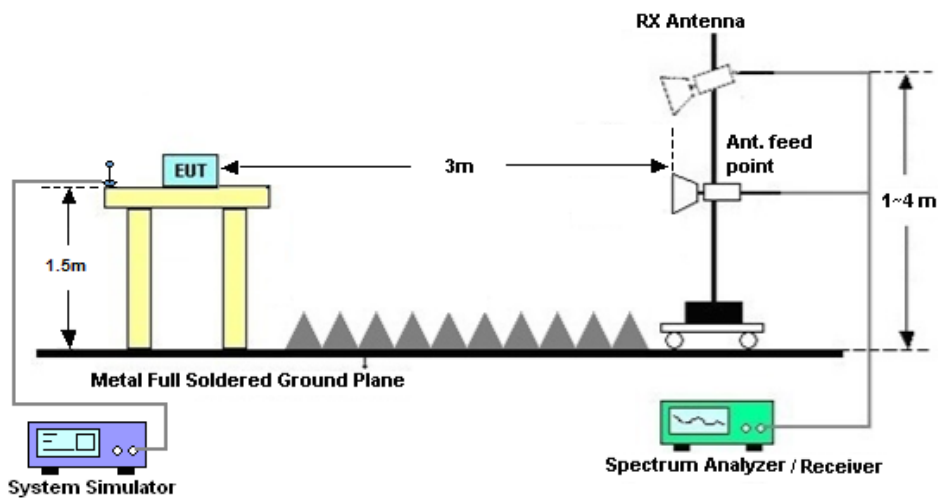

### 4.3 Test Result of Radiated Test

Please refer to Appendix B.



## 4.4 Radiated Spurious Emission

### 4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

For Band 38, 41

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $55 + 10 \log (P)$  dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

### 4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10.  $EIRP (dBm) = S.G. Power - Tx Cable Loss + Tx Antenna Gain$
11.  $ERP (dBm) = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from  $43 + 10\log(P)$ dB below the transmitter power P(Watts)  
 $= P(W) - [43 + 10\log(P)] (dB)$   
 $= [30 + 10\log(P)] (dBm) - [43 + 10\log(P)] (dB)$   
 $= -13dBm.$

13. For Band 7, 38, 41:

The limit line is derived from  $55 + 10\log(P)$ dB below the transmitter power P(Watts)



## 5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Nov. 02, 2019	Jul. 23, 2020~ Jul. 28, 2020	Nov. 01, 2020	Conducted (TH01-KS)
Thermal Chamber	Ten Billion	TTC-B3S	TBN-960502	-40~+150°C	Oct. 28, 2019	Jul. 23, 2020~ Jul. 28, 2020	Oct. 27, 2020	Conducted (TH01-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz-44G,MAX 30dB	Apr. 15, 2020	Jul. 30, 2020	Apr. 14, 2021	Radiation (03CH05-KS)
Bilog Antenna	TeseQ	CBL6111D	49921	30MHz-1GHz	May 29, 2020	Jul. 30, 2020	May 28, 2021	Radiation (03CH05-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 26, 2020	Jul. 30, 2020	Apr. 25, 2021	Radiation (03CH05-KS)
SHF-EHF Horn	Com-power	AH-840	101115	18GHz~40GHz	Nov. 10, 2019	Jul. 30, 2020	Nov. 09, 2020	Radiation (03CH05-KS)
Amplifier	SONOMA	310N	187289	9KHz-1GHz	Aug. 06, 2019	Jul. 30, 2020	Aug. 05, 2020	Radiation (03CH05-KS)
Amplifier	MITEQ	EM18G40G GA	060728	18~40GHz	Jan. 08, 2020	Jul. 30, 2020	Jan. 07, 2021	Radiation (03CH05-KS)
high gain Amplifier	MITEQ	AMF-7D-00 101800-30-1 0P	2025788	1Ghz-18Ghz	Aug. 17, 2019	Jul. 30, 2020	Aug. 16, 2020	Radiation (03CH05-KS)
Amplifier	Keysight	83017A	MY53270316	500MHz~26.5GHz	Oct. 18, 2019	Jul. 30, 2020	Oct. 17, 2020	Radiation (03CH05-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Jul. 30, 2020	NCR	Radiation (03CH05-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jul. 30, 2020	NCR	Radiation (03CH05-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jul. 30, 2020	NCR	Radiation (03CH05-KS)

NCR: No Calibration Required



## 6 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.5dB
---	-------

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.1dB
---	-------



### Appendix A. Test Results of Conducted Test

#### Conducted Output Power(Average power)

##### LTE Band 5

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.
Channel				20450	20525	20600
Frequency (MHz)				829	836.5	844
10	QPSK	1	0	22.54	22.35	22.97
10	QPSK	1	25	22.36	22.73	22.90
10	QPSK	1	49	22.39	23.07	22.46
10	QPSK	25	0	21.52	21.60	22.04
10	QPSK	25	12	21.44	21.70	21.96
10	QPSK	25	25	21.42	21.88	21.67
10	QPSK	50	0	21.44	21.70	21.93
10	16QAM	1	0	21.85	21.62	22.26
10	16QAM	1	25	21.73	22.03	22.22
10	16QAM	1	49	21.66	22.39	21.69
10	16QAM	25	0	20.63	20.70	21.15
10	16QAM	25	12	20.58	20.79	21.07
10	16QAM	25	25	20.50	20.93	20.74
10	16QAM	50	0	20.53	20.81	21.01
10	64QAM	1	0	20.84	20.55	21.24
10	64QAM	1	25	20.61	20.95	21.20
10	64QAM	1	49	20.58	21.33	20.65
10	64QAM	25	0	19.63	19.72	20.18
10	64QAM	25	12	19.60	19.83	20.12
10	64QAM	25	25	19.50	19.95	19.78
10	64QAM	50	0	19.59	19.80	20.02



Channel				20425	20525	20625
Frequency (MHz)				826.5	836.5	846.5
5	QPSK	1	0	22.54	22.57	22.87
5	QPSK	1	12	22.50	22.71	22.60
5	QPSK	1	24	22.42	22.93	22.47
5	QPSK	12	0	21.62	21.69	21.76
5	QPSK	12	7	21.58	21.75	21.66
5	QPSK	12	13	21.54	21.85	21.51
5	QPSK	25	0	21.50	21.72	21.66
5	16QAM	1	0	21.91	21.83	22.16
5	16QAM	1	12	21.85	22.02	21.89
5	16QAM	1	24	21.77	22.23	21.63
5	16QAM	12	0	20.76	20.74	20.85
5	16QAM	12	7	20.67	20.82	20.75
5	16QAM	12	13	20.64	20.91	20.59
5	16QAM	25	0	20.64	20.77	20.74
5	64QAM	1	0	20.81	20.82	21.13
5	64QAM	1	12	20.79	20.95	20.90
5	64QAM	1	24	20.74	21.18	20.66
5	64QAM	12	0	19.80	19.80	19.95
5	64QAM	12	7	19.74	19.85	19.81
5	64QAM	12	13	19.72	19.93	19.65
5	64QAM	25	0	19.65	19.81	19.78





Channel				20415	20525	20635
Frequency (MHz)				825.5	836.5	847.5
3	QPSK	1	0	22.54	22.63	22.66
3	QPSK	1	8	22.57	22.72	22.51
3	QPSK	1	14	22.47	22.79	22.49
3	QPSK	8	0	21.65	21.65	21.59
3	QPSK	8	4	21.66	21.74	21.64
3	QPSK	8	7	21.60	21.82	21.52
3	QPSK	15	0	21.63	21.70	21.55
3	16QAM	1	0	21.88	21.88	21.86
3	16QAM	1	8	21.99	21.99	21.72
3	16QAM	1	14	21.80	22.03	21.65
3	16QAM	8	0	20.83	20.77	20.70
3	16QAM	8	4	20.85	20.84	20.72
3	16QAM	8	7	20.72	20.92	20.62
3	16QAM	15	0	20.72	20.80	20.62
3	64QAM	1	0	20.81	20.84	20.86
3	64QAM	1	8	20.93	20.95	20.73
3	64QAM	1	14	20.76	20.98	20.65
3	64QAM	8	0	19.81	19.80	19.73
3	64QAM	8	4	19.84	19.83	19.76
3	64QAM	8	7	19.74	19.94	19.66
3	64QAM	15	0	19.74	19.77	19.64



Channel				20407	20525	20643
Frequency (MHz)				824.7	836.5	848.3
1.4	QPSK	1	0	22.49	22.59	22.44
1.4	QPSK	1	3	22.59	22.71	22.52
1.4	QPSK	1	5	22.49	22.66	22.42
1.4	QPSK	3	0	22.54	22.61	22.51
1.4	QPSK	3	1	22.57	22.68	22.57
1.4	QPSK	3	3	22.54	22.71	22.50
1.4	QPSK	6	0	21.48	21.64	21.53
1.4	16QAM	1	0	21.84	21.87	21.69
1.4	16QAM	1	3	21.94	21.94	21.69
1.4	16QAM	1	5	21.81	21.93	21.59
1.4	16QAM	3	0	21.64	21.66	21.50
1.4	16QAM	3	1	21.65	21.70	21.53
1.4	16QAM	3	3	21.63	21.72	21.48
1.4	16QAM	6	0	20.66	20.78	20.63
1.4	64QAM	1	0	20.79	20.79	20.67
1.4	64QAM	1	3	20.84	20.99	20.70
1.4	64QAM	1	5	20.81	20.93	20.59
1.4	64QAM	3	0	20.75	20.85	20.69
1.4	64QAM	3	1	20.83	20.87	20.71
1.4	64QAM	3	3	20.77	20.89	20.66
1.4	64QAM	6	0	19.60	19.75	19.57



LTE Band 38

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.
Channel				37850	38000	38150
Frequency (MHz)				2580	2595	2610
20	QPSK	1	0	23.01	22.85	23.07
20	QPSK	1	49	23.12	23.14	23.37
20	QPSK	1	99	23.58	23.08	23.33
20	QPSK	50	0	22.43	22.30	22.33
20	QPSK	50	24	22.27	22.29	22.35
20	QPSK	50	50	22.24	22.18	22.33
20	QPSK	100	0	22.44	22.14	22.38
20	16QAM	1	0	22.06	21.98	22.42
20	16QAM	1	49	22.36	22.28	22.53
20	16QAM	1	99	22.51	22.21	22.49
20	16QAM	50	0	21.23	21.38	21.43
20	16QAM	50	24	21.36	21.28	21.45
20	16QAM	50	50	21.52	21.40	21.55
20	16QAM	100	0	21.32	21.23	21.49
20	64QAM	1	0	20.98	20.90	20.96
20	64QAM	1	49	21.09	21.12	21.28
20	64QAM	1	99	21.03	21.16	21.26
20	64QAM	50	0	20.29	20.23	20.40
20	64QAM	50	24	20.32	20.36	20.43
20	64QAM	50	50	20.49	20.37	20.63
20	64QAM	100	0	20.28	20.31	20.38



Channel				37825	38000	38175
Frequency (MHz)				2577.5	2595	2612.5
15	QPSK	1	0	23.10	23.14	23.35
15	QPSK	1	37	23.28	23.23	23.34
15	QPSK	1	74	23.36	23.27	23.54
15	QPSK	36	0	22.14	22.15	22.37
15	QPSK	36	20	22.23	22.22	22.46
15	QPSK	36	39	22.17	22.25	22.46
15	QPSK	75	0	22.29	22.09	22.42
15	16QAM	1	0	22.11	22.24	22.46
15	16QAM	1	37	22.37	22.31	22.54
15	16QAM	1	74	22.51	22.38	22.67
15	16QAM	36	0	21.31	21.26	21.40
15	16QAM	36	20	21.32	21.26	21.51
15	16QAM	36	39	21.37	21.30	21.53
15	16QAM	75	0	21.34	21.29	21.43
15	64QAM	1	0	20.79	20.96	20.99
15	64QAM	1	37	21.16	21.02	21.39
15	64QAM	1	74	21.31	21.22	21.23
15	64QAM	36	0	20.29	20.26	20.42
15	64QAM	36	20	20.40	20.26	20.53
15	64QAM	36	39	20.35	20.30	20.56
15	64QAM	75	0	20.39	20.25	20.41



Channel				37800	38000	38200
Frequency (MHz)				2575	2595	2615
10	QPSK	1	0	22.99	23.17	23.27
10	QPSK	1	25	23.13	23.06	23.39
10	QPSK	1	49	23.18	23.05	23.39
10	QPSK	25	0	22.14	22.16	22.35
10	QPSK	25	12	22.16	22.18	22.50
10	QPSK	25	25	22.19	22.22	22.52
10	QPSK	50	0	22.33	22.26	22.45
10	16QAM	1	0	22.26	22.30	22.52
10	16QAM	1	25	22.32	22.18	22.55
10	16QAM	1	49	22.41	22.25	22.63
10	16QAM	25	0	21.22	21.27	21.47
10	16QAM	25	12	21.33	21.29	21.63
10	16QAM	25	25	21.36	21.22	21.65
10	16QAM	50	0	21.39	21.25	21.67
10	64QAM	1	0	20.82	20.92	21.16
10	64QAM	1	25	21.01	21.00	21.31
10	64QAM	1	49	21.21	21.15	21.41
10	64QAM	25	0	20.30	20.30	20.60
10	64QAM	25	12	20.41	20.33	20.66
10	64QAM	25	25	20.44	20.38	20.69
10	64QAM	50	0	20.32	20.36	20.56



Channel				37775	38000	38225
Frequency (MHz)				2572.5	2595	2617.5
5	QPSK	1	0	23.15	22.98	23.48
5	QPSK	1	12	23.11	23.08	23.46
5	QPSK	1	24	23.10	22.99	23.38
5	QPSK	12	0	22.14	22.13	22.43
5	QPSK	12	7	22.16	22.16	22.60
5	QPSK	12	13	22.19	22.20	22.50
5	QPSK	25	0	22.07	22.19	22.54
5	16QAM	1	0	22.09	22.19	22.41
5	16QAM	1	12	22.31	22.32	22.63
5	16QAM	1	24	22.33	22.17	22.47
5	16QAM	12	0	21.16	21.19	21.61
5	16QAM	12	7	21.30	21.33	21.59
5	16QAM	12	13	21.23	21.27	21.58
5	16QAM	25	0	21.29	21.32	21.59
5	64QAM	1	0	21.01	21.04	21.29
5	64QAM	1	12	20.99	20.94	21.40
5	64QAM	1	24	21.05	21.11	21.25
5	64QAM	12	0	20.18	20.24	20.67
5	64QAM	12	7	20.31	20.28	20.64
5	64QAM	12	13	20.35	20.33	20.63
5	64QAM	25	0	20.29	20.35	20.62



LTE Band 41

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.
Channel				40140	40670	41140
Frequency (MHz)				2545	2598	2645
20	QPSK	1	0	23.11	23.51	23.19
20	QPSK	1	49	23.14	23.56	23.06
20	QPSK	1	99	23.09	23.65	23.11
20	QPSK	50	0	22.46	22.81	22.55
20	QPSK	50	24	22.54	22.97	22.67
20	QPSK	50	50	22.46	22.81	22.24
20	QPSK	100	0	22.51	22.80	22.27
20	16QAM	1	0	22.12	22.64	22.05
20	16QAM	1	49	22.23	22.70	22.17
20	16QAM	1	99	22.08	22.81	21.51
20	16QAM	50	0	21.24	21.68	21.91
20	16QAM	50	24	21.35	21.73	22.00
20	16QAM	50	50	21.41	21.75	21.98
20	16QAM	100	0	21.35	21.72	21.93
20	64QAM	1	0	20.90	21.24	20.10
20	64QAM	1	49	21.02	21.42	20.81
20	64QAM	1	99	21.16	21.13	20.01
20	64QAM	50	0	20.23	20.49	20.61
20	64QAM	50	24	20.44	20.58	20.73
20	64QAM	50	50	20.53	20.64	20.61
20	64QAM	100	0	20.43	20.57	20.71



Channel				40115	40685	41165
Frequency (MHz)				2542.5	2599.5	2647.5
15	QPSK	1	0	23.12	23.56	22.62
15	QPSK	1	37	23.15	23.64	23.17
15	QPSK	1	74	23.31	23.25	22.75
15	QPSK	36	0	22.16	22.65	22.90
15	QPSK	36	20	22.30	22.70	22.92
15	QPSK	36	39	22.30	22.67	22.87
15	QPSK	75	0	22.30	22.64	22.89
15	16QAM	1	0	22.21	22.63	21.63
15	16QAM	1	37	22.31	22.75	22.27
15	16QAM	1	74	22.46	22.86	21.85
15	16QAM	36	0	21.18	21.61	21.88
15	16QAM	36	20	21.34	21.70	21.92
15	16QAM	36	39	21.37	21.70	21.95
15	16QAM	75	0	21.36	21.72	21.96
15	64QAM	1	0	20.99	21.19	20.11
15	64QAM	1	37	21.09	21.17	20.71
15	64QAM	1	74	21.26	21.36	20.18
15	64QAM	36	0	20.23	20.57	20.63
15	64QAM	36	20	20.41	20.65	20.65
15	64QAM	36	39	20.38	20.56	20.66
15	64QAM	75	0	20.43	20.59	20.67





Channel				40090	40690	41190
Frequency (MHz)				2540	2600	2650
10	QPSK	1	0	23.07	23.53	22.95
10	QPSK	1	25	23.14	23.61	23.17
10	QPSK	1	49	23.20	23.63	23.08
10	QPSK	25	0	22.18	22.57	22.86
10	QPSK	25	12	22.16	22.66	22.91
10	QPSK	25	25	22.19	22.67	22.88
10	QPSK	50	0	22.21	22.72	22.89
10	16QAM	1	0	22.19	22.68	21.98
10	16QAM	1	25	22.25	22.71	22.27
10	16QAM	1	49	22.28	22.77	22.16
10	16QAM	25	0	21.24	21.69	21.93
10	16QAM	25	12	21.29	21.77	21.93
10	16QAM	25	25	21.26	21.73	21.98
10	16QAM	50	0	21.28	21.74	21.97
10	64QAM	1	0	20.94	21.40	20.41
10	64QAM	1	25	20.99	21.43	20.65
10	64QAM	1	49	21.08	21.28	20.49
10	64QAM	25	0	20.27	20.60	20.67
10	64QAM	25	12	20.29	20.68	20.78
10	64QAM	25	25	20.26	20.62	20.72
10	64QAM	50	0	20.27	20.57	20.66



Channel				40065	40705	41215
Frequency (MHz)				2537.5	2601.5	2652.5
5	QPSK	1	0	23.12	23.61	23.59
5	QPSK	1	12	23.13	23.57	23.56
5	QPSK	1	24	23.12	23.62	23.59
5	QPSK	12	0	22.12	22.63	22.63
5	QPSK	12	7	22.19	22.67	22.67
5	QPSK	12	13	22.17	22.71	22.69
5	QPSK	25	0	22.14	22.65	22.67
5	16QAM	1	0	22.16	22.66	22.65
5	16QAM	1	12	22.24	22.78	22.76
5	16QAM	1	24	22.24	22.75	22.76
5	16QAM	12	0	21.20	21.67	21.67
5	16QAM	12	7	21.25	21.71	21.73
5	16QAM	12	13	21.21	21.70	21.70
5	16QAM	25	0	21.27	21.77	21.75
5	64QAM	1	0	20.99	21.17	20.84
5	64QAM	1	12	20.99	21.26	20.66
5	64QAM	1	24	20.87	21.35	20.93
5	64QAM	12	0	20.13	20.53	20.62
5	64QAM	12	7	20.21	20.61	20.70
5	64QAM	12	13	20.28	20.58	20.67
5	64QAM	25	0	20.26	20.58	20.66



**ERP/EIRP**

LTE Band 5 (GT - LC = -1.60 dB) QPSK									
Bandwidth	1.4M			3M			5M		
Channel	20407	20525	20643	20415	20525	20635	20425	20525	20625
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	824.7	836.5	848.3	825.5	836.5	847.5	826.5	836.5	846.5
Conducted Power (dBm)	22.59	22.71	22.52	22.47	22.79	22.49	22.42	22.93	22.47
Conducted Power (Watts)	0.1816	0.1866	0.1786	0.1766	0.1901	0.1774	0.1746	0.1963	0.1766
ERP(dBm)	18.84	18.96	18.77	18.72	19.04	18.74	18.67	19.18	18.72
ERP(Watts)	0.0766	0.0787	0.0753	0.0745	0.0802	0.0748	0.0736	0.0828	0.0745

LTE Band 5 (GT - LC = -1.60 dB) QPSK			
Bandwidth	10M		
Channel	20450	20525	20600
	(Low)	(Mid)	(High)
Frequency (MHz)	829	836.5	844
Conducted Power (dBm)	22.39	23.07	22.46
Conducted Power (Watts)	0.1734	0.2028	0.1762
ERP(dBm)	18.64	19.32	18.71
ERP(Watts)	0.0731	0.0855	0.0743



LTE Band 5 (GT - LC = -1.60 dB) 16QAM									
Bandwidth	1.4M			3M			5M		
Channel	20407	20525	20643	20415	20525	20635	20425	20525	20625
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	824.7	836.5	848.3	825.5	836.5	847.5	826.5	836.5	846.5
Conducted Power (dBm)	21.94	21.94	21.69	21.80	22.03	21.65	21.77	22.23	21.63
Conducted Power (Watts)	0.1563	0.1563	0.1476	0.1514	0.1596	0.1462	0.1503	0.1671	0.1455
ERP(dBm)	18.19	18.19	17.94	18.05	18.28	17.90	18.02	18.48	17.88
ERP(Watts)	0.0659	0.0659	0.0622	0.0638	0.0673	0.0617	0.0634	0.0705	0.0614

LTE Band 5 (GT - LC = -1.60 dB) 16QAM			
Bandwidth	10M		
Channel	20450	20525	20600
	(Low)	(Mid)	(High)
Frequency (MHz)	829	836.5	844
Conducted Power (dBm)	21.66	22.39	21.69
Conducted Power (Watts)	0.1466	0.1734	0.1476
ERP(dBm)	17.96	18.64	17.94
ERP(Watts)	0.0625	0.0731	0.0622



LTE Band 5 (GT - LC = -1.60 dB) 64QAM									
Bandwidth	1.4M			3M			5M		
Channel	20407	20525	20643	20415	20525	20635	20425	20525	20625
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	824.7	836.5	848.3	825.5	836.5	847.5	826.5	836.5	846.5
Conducted Power (dBm)	20.84	20.99	20.70	20.76	20.98	20.65	20.74	21.18	20.66
Conducted Power (Watts)	0.1213	0.1256	0.1175	0.1191	0.1253	0.1161	0.1186	0.1312	0.1164
ERP(dBm)	17.09	17.24	16.95	17.01	17.23	16.90	16.99	17.43	16.91
ERP(Watts)	0.0512	0.0530	0.0495	0.0502	0.0528	0.0490	0.0500	0.0553	0.0491

LTE Band 5 (GT - LC = -1.60 dB) 64QAM			
Bandwidth	10M		
Channel	20450	20525	20600
	(Low)	(Mid)	(High)
Frequency (MHz)	829	836.5	844
Conducted Power (dBm)	20.58	21.33	20.65
Conducted Power (Watts)	0.1143	0.1358	0.1161
ERP(dBm)	17.83	17.58	16.90
ERP(Watts)	0.0607	0.0573	0.0490



LTE Band 41 (G <sub>T</sub> - L <sub>C</sub> = 1.50 dB) QPSK									
Bandwidth	5M			10M			15M		
Channel	40065	40705	41215	40090	40690	41190	40115	40685	41165
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	2537.5	2601.5	2652.5	2540	2600	2650	2542.5	2599.5	2647.5
Conducted Power (dBm)	23.12	23.62	23.59	23.20	23.63	23.08	23.15	23.64	23.17
Conducted Power (Watts)	0.2051	0.2301	0.2286	0.2089	0.2307	0.2032	0.2065	0.2312	0.2075
EIRP(dBm)	24.62	25.12	25.09	24.70	25.13	24.58	24.65	25.14	24.67
EIRP(Watts)	0.2897	0.3251	0.3228	0.2951	0.3258	0.2871	0.2917	0.3266	0.2931

LTE Band 41 (G <sub>T</sub> - L <sub>C</sub> = 1.50 dB) QPSK			
Bandwidth	20M		
Channel	40140	40670	41140
	(Low)	(Mid)	(High)
Frequency (MHz)	2545	2598	2645
Conducted Power (dBm)	23.09	23.65	23.11
Conducted Power (Watts)	0.2037	0.2317	0.2046
EIRP(dBm)	24.59	25.15	24.61
EIRP(Watts)	0.2877	0.3273	0.2891



LTE Band 41 (G <sub>T</sub> - L <sub>C</sub> = 1.50 dB) 16QAM									
Bandwidth	5M			10M			15M		
Channel	40065	40705	41215	40065	40705	41215	40065	40705	41215
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	2537.5	2601.5	2652.5	2537.5	2601.5	2652.5	2537.5	2601.5	2652.5
Conducted Power (dBm)	22.24	22.78	22.76	22.28	22.77	22.16	22.46	22.86	21.85
Conducted Power (Watts)	0.1675	0.1897	0.1888	0.1690	0.1892	0.1644	0.1762	0.1932	0.1531
EIRP(dBm)	23.74	24.28	24.26	23.78	24.27	23.66	23.96	24.36	23.35
EIRP(Watts)	0.2366	0.2679	0.2667	0.2388	0.2673	0.2323	0.2489	0.2729	0.2163

LTE Band 41 (G <sub>T</sub> - L <sub>C</sub> = 1.50 dB) 16QAM			
Bandwidth	20M		
Channel	40140	40670	41140
	(Low)	(Mid)	(High)
Frequency (MHz)	2545	2598	2645
Conducted Power (dBm)	22.08	22.81	21.51
Conducted Power (Watts)	0.1614	0.1910	0.1416
EIRP(dBm)	23.58	24.31	23.01
EIRP(Watts)	0.2280	0.2698	0.2000



LTE Band 41 (G <sub>T</sub> - L <sub>C</sub> = 1.50 dB) 64QAM									
Bandwidth	5M			10M			15M		
Channel	40065	40705	41215	40065	40705	41215	40065	40705	41215
	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)	(Low)	(Mid)	(High)
Frequency (MHz)	2537.5	2601.5	2652.5	2537.5	2601.5	2652.5	2537.5	2601.5	2652.5
Conducted Power (dBm)	20.87	21.35	20.93	20.99	21.43	20.65	21.26	21.36	20.18
Conducted Power (Watts)	0.1222	0.1365	0.1239	0.1256	0.1390	0.1161	0.1337	0.1368	0.1042
EIRP(dBm)	22.37	22.85	22.43	22.49	22.93	22.15	22.76	22.86	21.68
EIRP(Watts)	0.1726	0.1928	0.1750	0.1774	0.1963	0.1641	0.1888	0.1932	0.1472

LTE Band 41 (G <sub>T</sub> - L <sub>C</sub> = 1.50 dB) 64QAM			
Bandwidth	20M		
Channel	40140	40670	41140
	(Low)	(Mid)	(High)
Frequency (MHz)	2545	2598	2645
Conducted Power (dBm)	21.02	21.42	20.81
Conducted Power (Watts)	0.1265	0.1387	0.1205
EIRP(dBm)	22.52	22.92	22.31
EIRP(Watts)	0.1786	0.1959	0.1702





# LTE Band 5


## Peak-to-Average Ratio

Mode	LTE Band 5 / 10MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	3.65	4.78	5.54	6.00	<b>PASS</b>
Middle CH	3.54	4.49	4.90	5.71	
Highest CH	3.42	4.46	4.84	5.65	
Mode	LTE Band 5 / 10MHz				
Mod.	64QAM				Limit: 13dB
RB Size	1RB	Full RB			Result
Lowest CH	6.32	6.49	-	-	<b>PASS</b>
Middle CH	6.23	6.32	-	-	
Highest CH	5.57	6.26	-	-	




LTE Band 5 / 10MHz / QPSK

Lowest Channel / 1RB

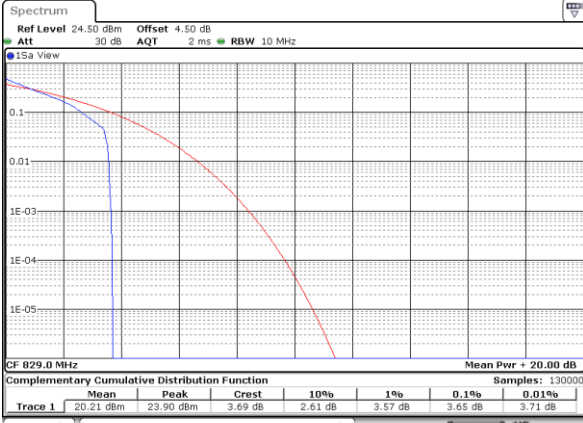


Date: 24 JUL 2020 08:19:59

Lowest Channel / Full RB

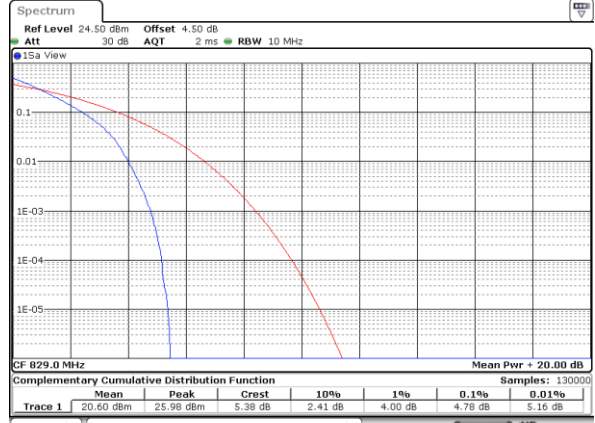


Date: 24 JUL 2020 08:17:43

Middle Channel / 1RB

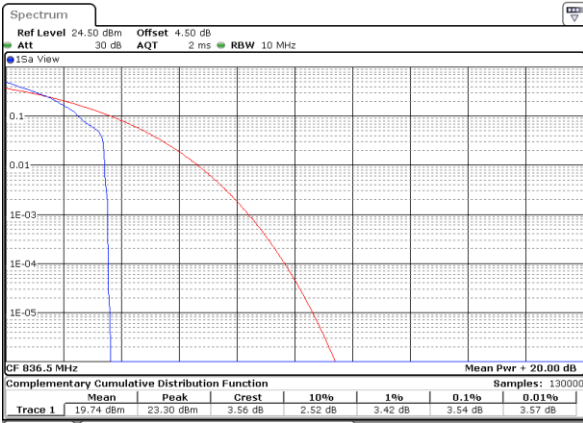


Date: 24 JUL 2020 08:20:39

Middle Channel / Full RB

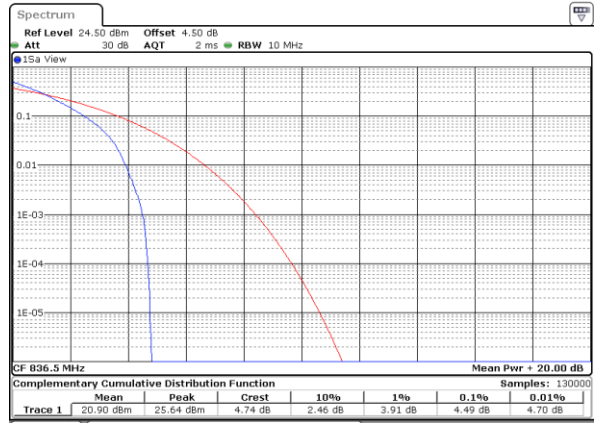


Date: 24 JUL 2020 08:22:25

Highest Channel / 1RB

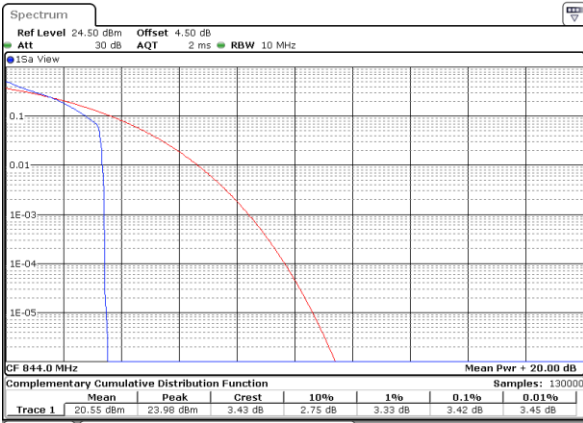

Date: 24 JUL 2020 08:24:33

Highest Channel / Full RB

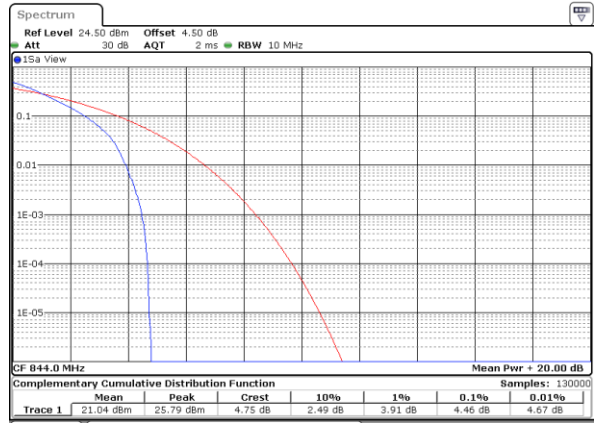


Date: 24 JUL 2020 08:22:52




LTE Band 5 / 10MHz / 16QAM

Lowest Channel / 1RB

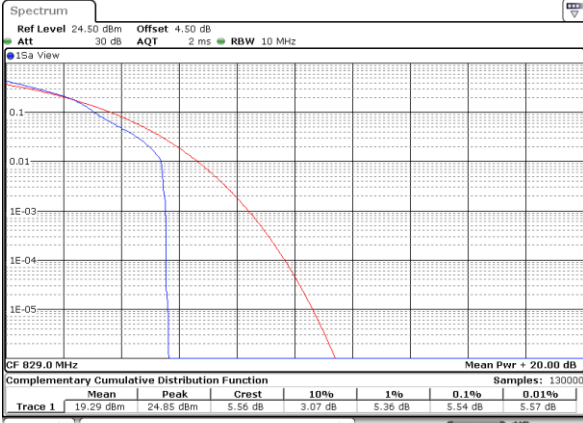


Date: 24 JUL 2020 08:19:15

Lowest Channel / Full RB

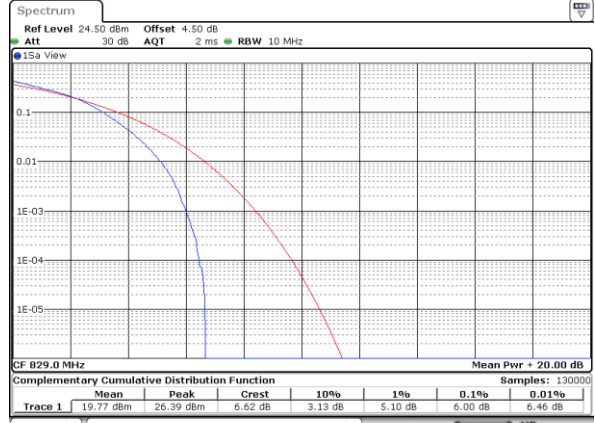


Date: 24 JUL 2020 08:17:59

Middle Channel / 1RB

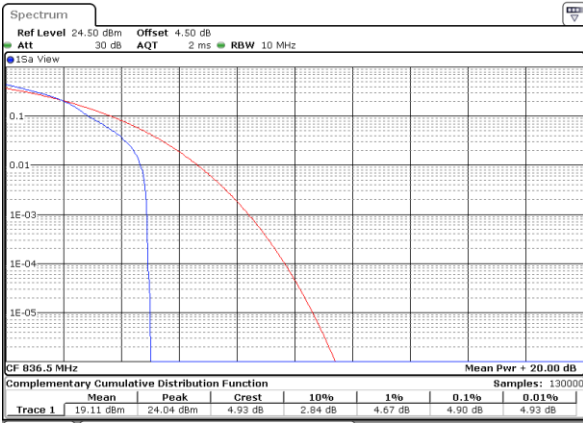


Date: 24 JUL 2020 08:21:00

Middle Channel / Full RB

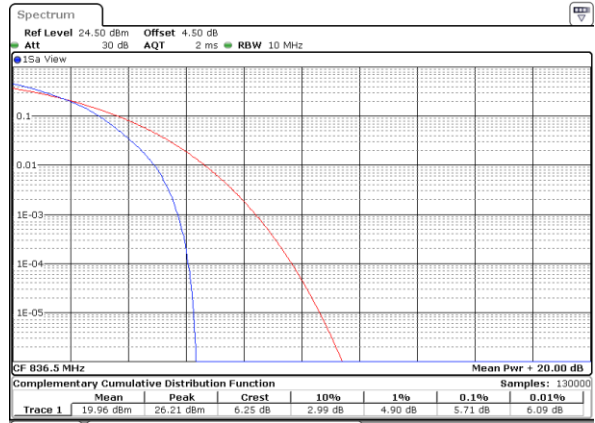


Date: 24 JUL 2020 08:22:07

Highest Channel / 1RB

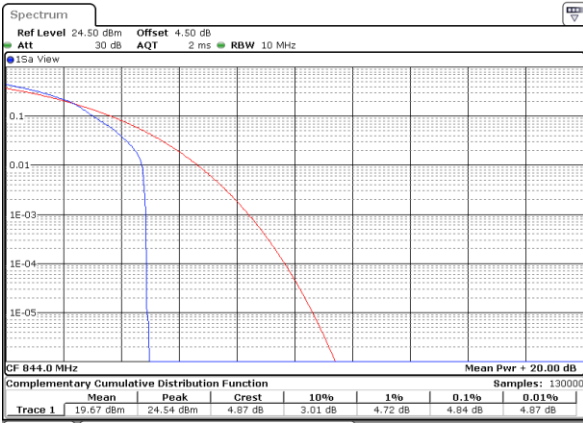

Date: 24 JUL 2020 08:24:14

Highest Channel / Full RB

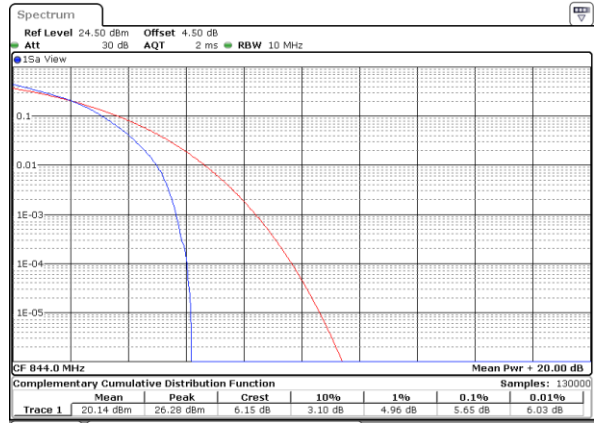


Date: 24 JUL 2020 08:23:10




LTE Band 5 / 10MHz / 64QAM

Lowest Channel / 1RB

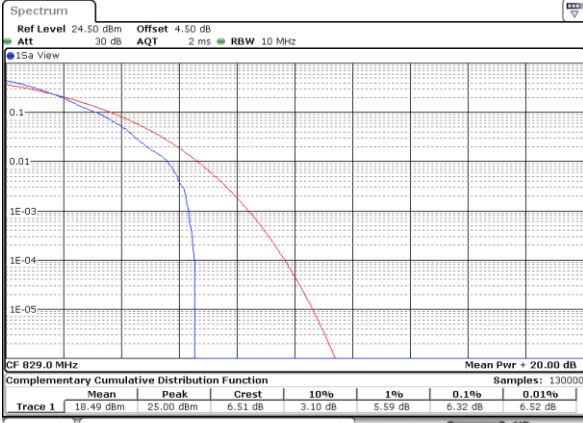


Date: 24 JUL 2020 08:18:57

Lowest Channel / Full RB

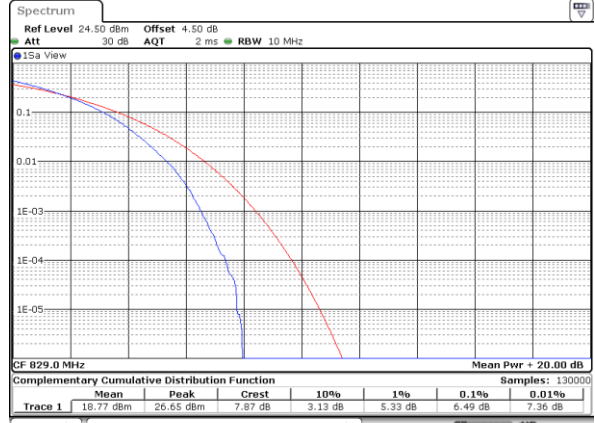


Date: 24 JUL 2020 08:18:19

Middle Channel / 1RB

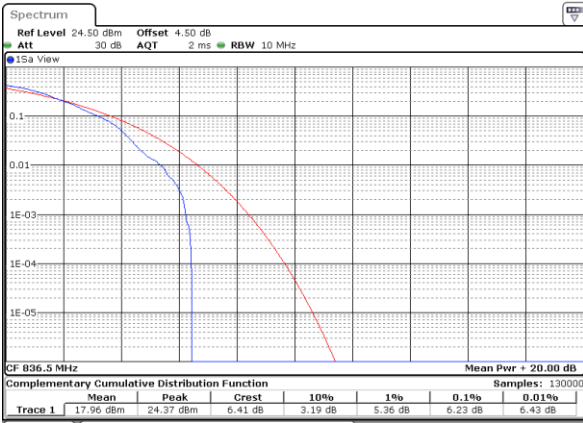


Date: 24 JUL 2020 08:21:21

Middle Channel / Full RB

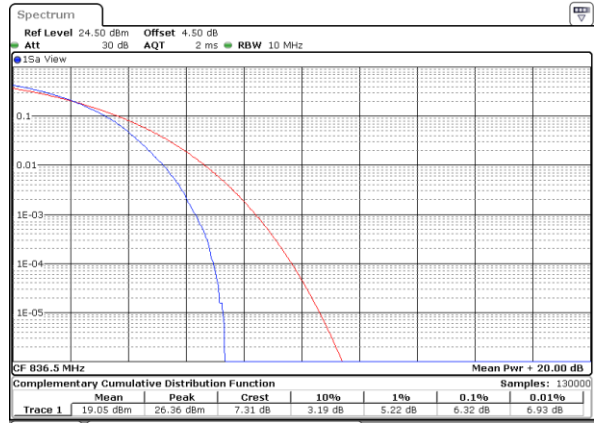


Date: 24 JUL 2020 08:21:42

Highest Channel / 1RB

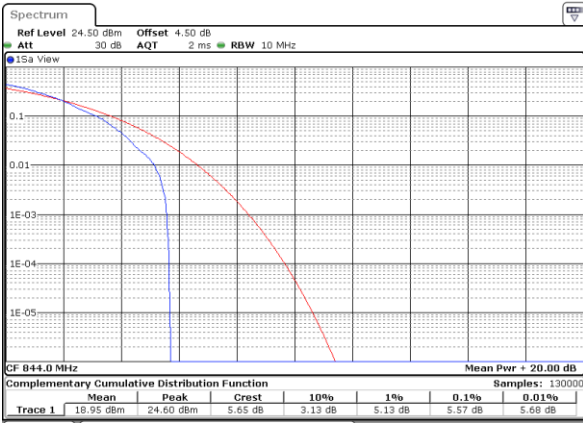

Date: 24 JUL 2020 08:23:54

Highest Channel / Full RB

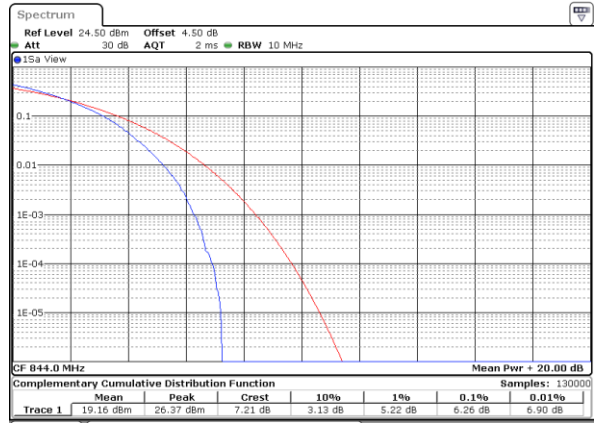

Date: 24 JUL 2020 08:23:30




**26dB Bandwidth**

Mode	LTE Band 5							
BW	1.4MHz		3MHz		5MHz		10MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.24	1.21	2.96	3.23	4.86	4.89	9.85	9.85
Middle CH	1.34	1.24	3.02	3.06	5.40	4.87	9.79	9.79
Highest CH	1.28	1.31	3.07	2.98	4.93	4.86	9.79	9.71
Mode	LTE Band 5							
BW	1.4MHz		3MHz		5MHz		10MHz	
Mod.	64QAM		64QAM		64QAM		64QAM	
Lowest CH	1.21		2.97		4.94		9.99	
Middle CH	1.25		3.02		5.15		9.67	
Highest CH	1.22		3.39		5.01		9.85	




LTE Band 5

Lowest Channel / 1.4MHz / QPSK

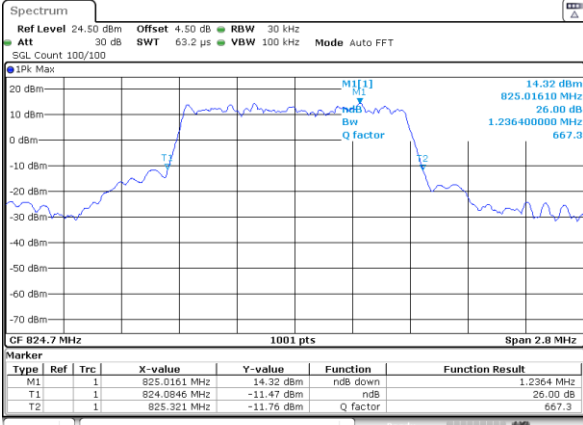


Date: 23\_JUL\_2020 02:15:56

Lowest Channel / 1.4MHz / 16QAM

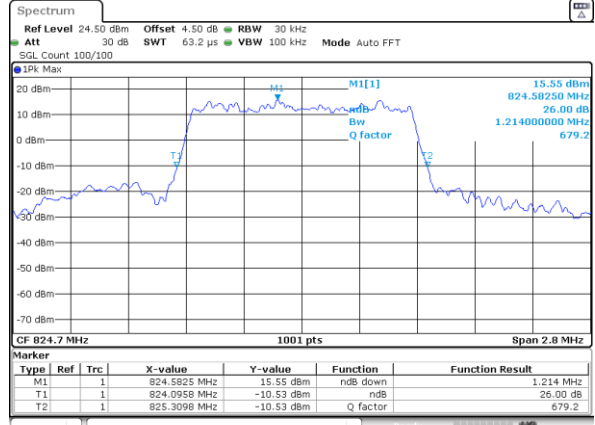


Date: 22\_JUL\_2020 23:56:58

Middle Channel / 1.4MHz / QPSK

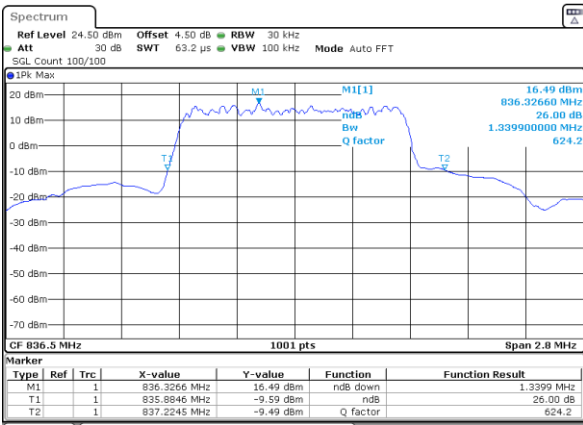


Date: 23\_JUL\_2020 00:06:02

Middle Channel / 1.4MHz / 16QAM

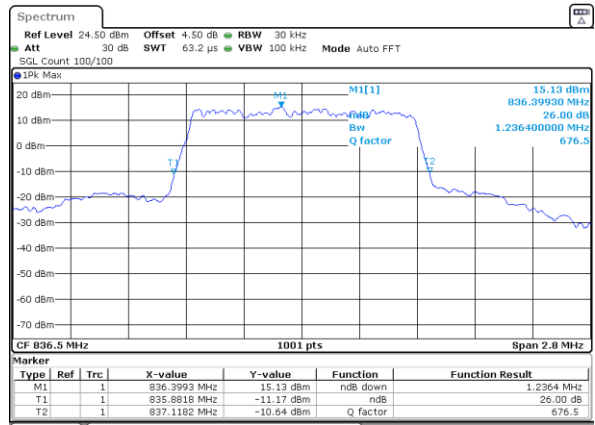


Date: 23\_JUL\_2020 00:06:13

Highest Channel / 1.4MHz / QPSK

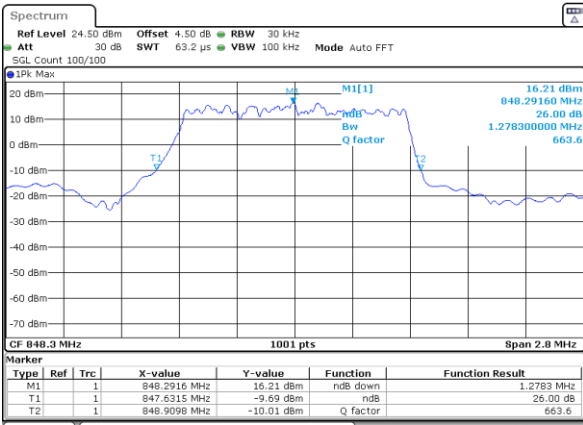

Date: 23\_JUL\_2020 00:35:00

Highest Channel / 1.4MHz / 16QAM

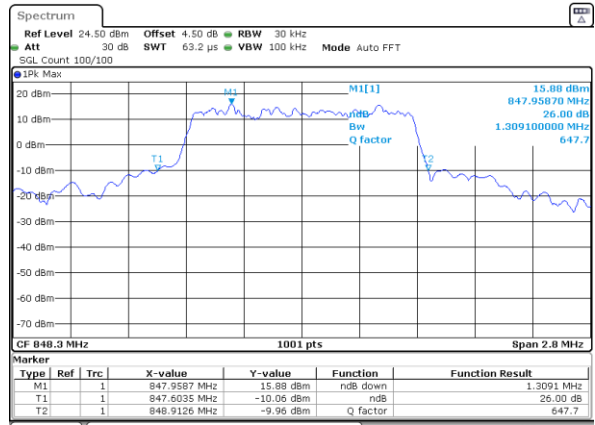


Date: 23\_JUL\_2020 00:35:10




LTE Band 5

Lowest Channel / 3MHz / QPSK

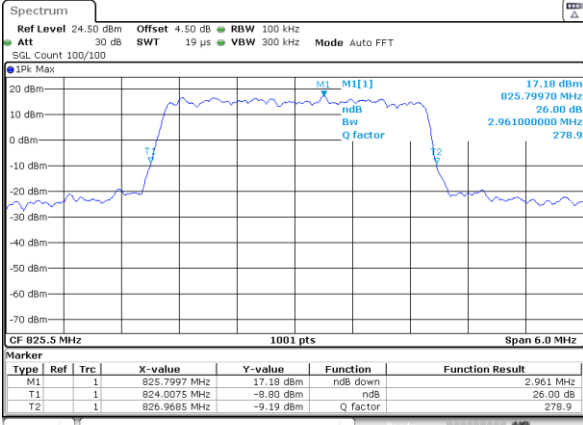


Date: 23\_JUL\_2020 01:23:14

Lowest Channel / 3MHz / 16QAM

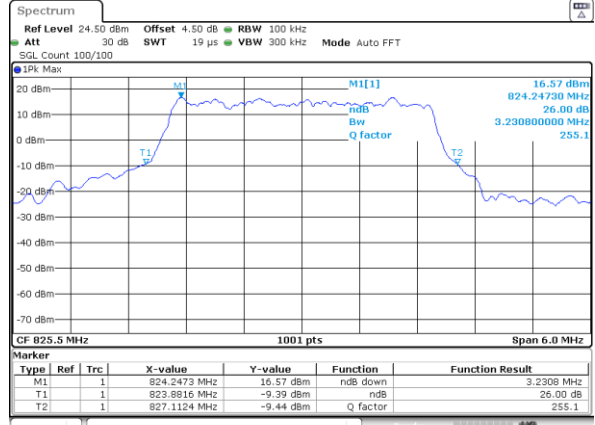


Date: 23\_JUL\_2020 01:24:56

Middle Channel / 3MHz / QPSK

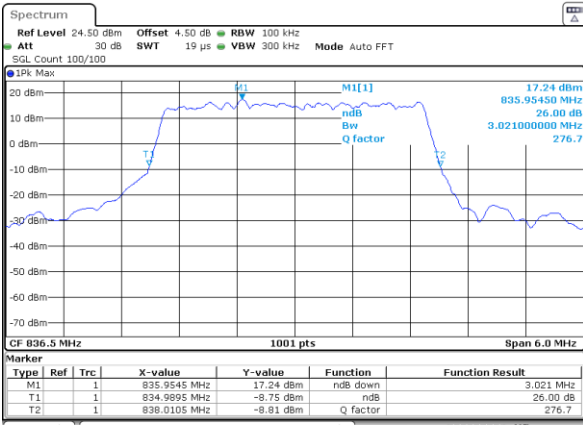


Date: 23\_JUL\_2020 01:43:06

Middle Channel / 3MHz / 16QAM

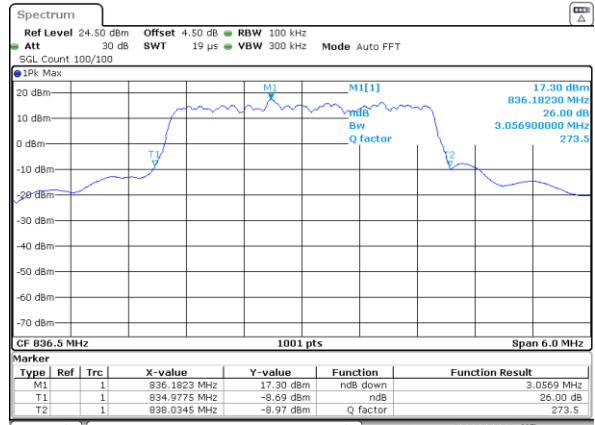


Date: 23\_JUL\_2020 01:44:18

Highest Channel / 3MHz / QPSK

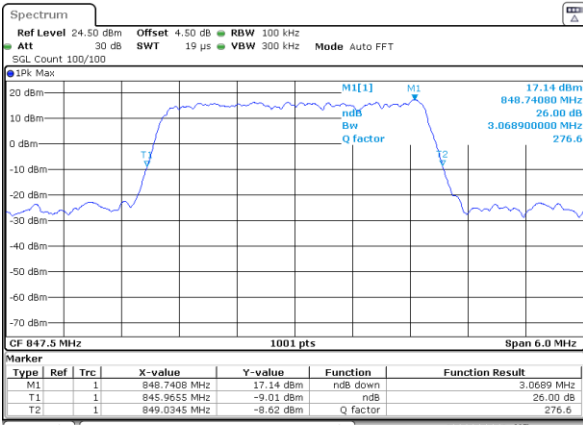

Date: 23\_JUL\_2020 01:55:47

Highest Channel / 3MHz / 16QAM

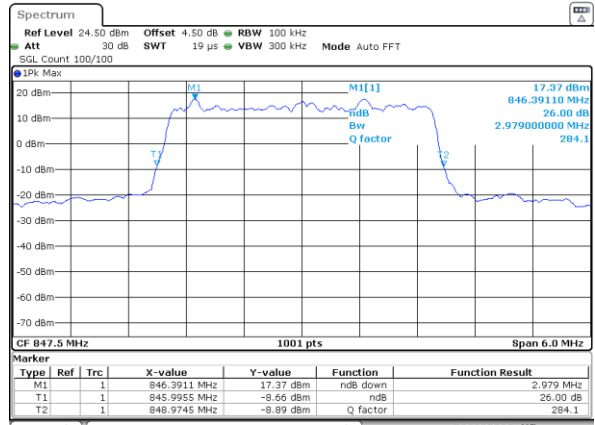


Date: 23\_JUL\_2020 01:57:06




LTE Band 5

Lowest Channel / 5MHz / QPSK

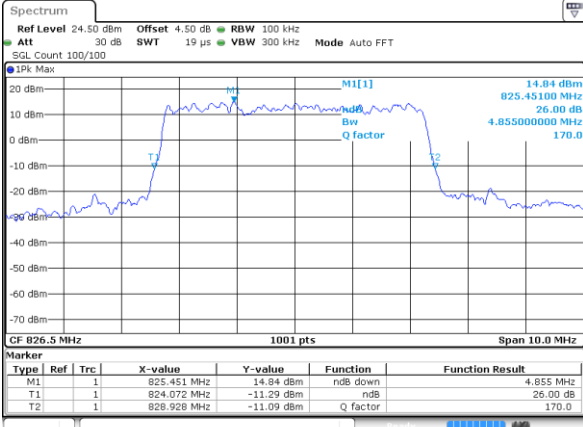


Date: 24 JUL 2020 07:19:45

Lowest Channel / 5MHz / 16QAM

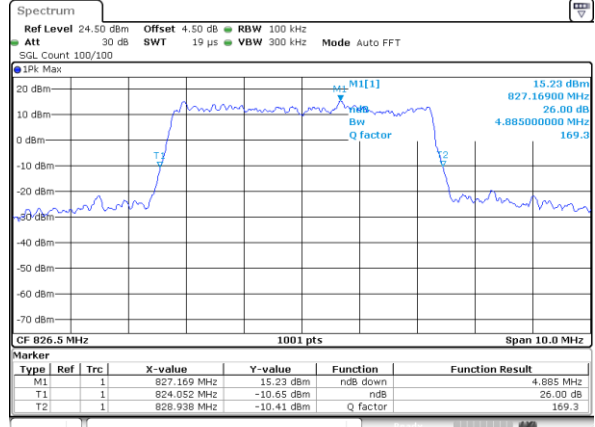


Date: 23 JUL 2020 03:13:06

Middle Channel / 5MHz / QPSK

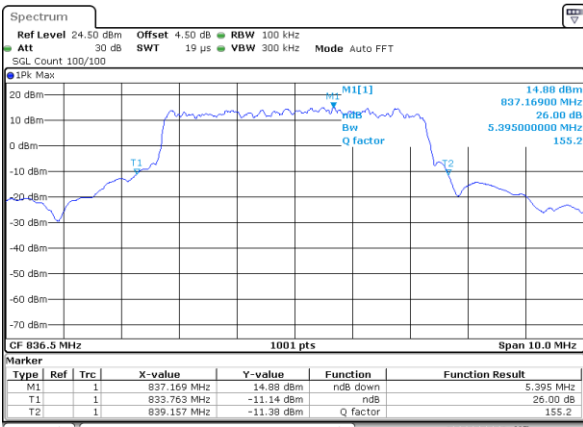


Date: 23 JUL 2020 03:21:59

Middle Channel / 5MHz / 16QAM

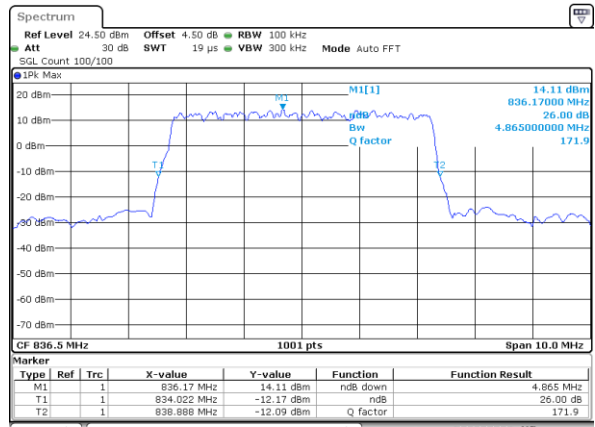


Date: 23 JUL 2020 03:22:09

Highest Channel / 5MHz / QPSK

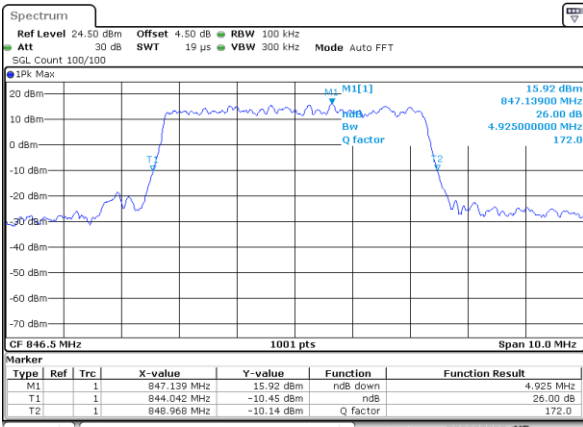

Date: 23 JUL 2020 03:26:09

Highest Channel / 5MHz / 16QAM

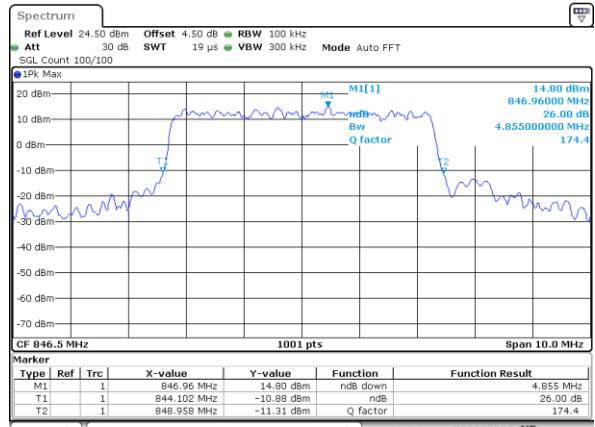


Date: 23 JUL 2020 03:26:19






LTE Band 5

Lowest Channel / 10MHz / QPSK

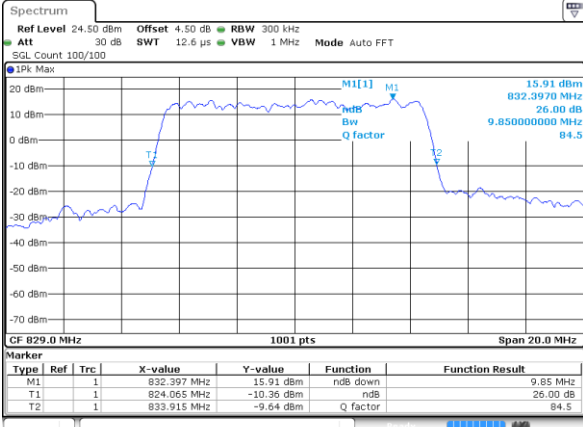


Date: 24 JUL 2020 06:51:10

Lowest Channel / 10MHz / 16QAM

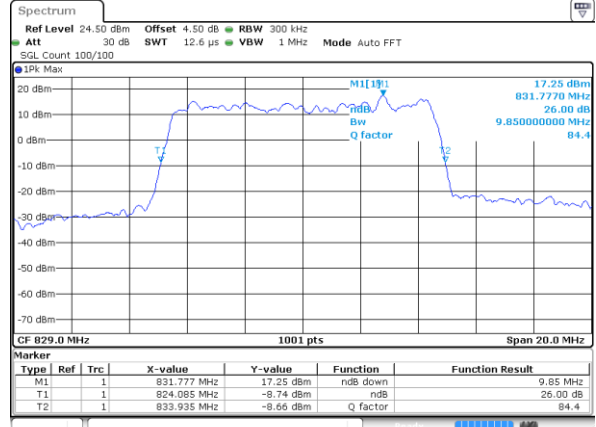


Date: 24 JUL 2020 06:52:30

Middle Channel / 10MHz / QPSK

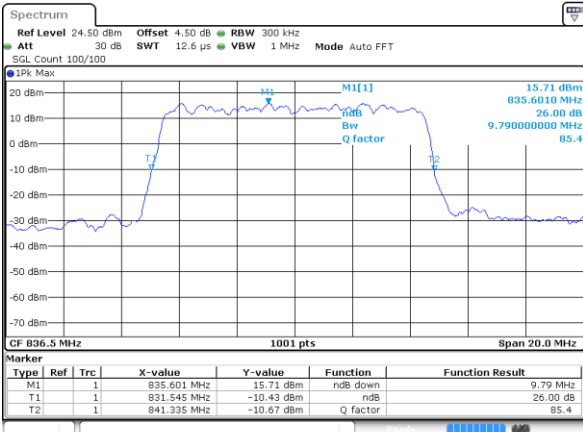


Date: 24 JUL 2020 07:04:31

Middle Channel / 10MHz / 16QAM

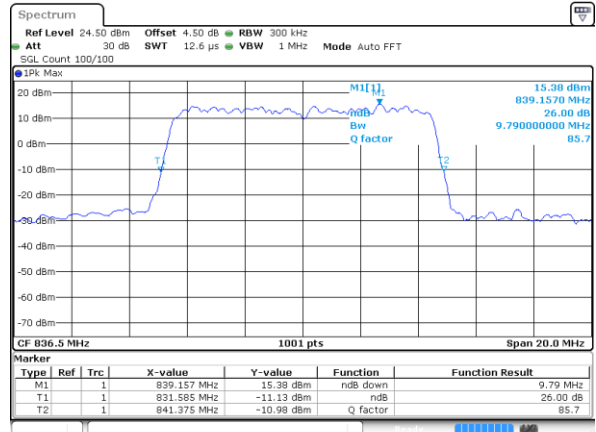


Date: 24 JUL 2020 07:04:07

Highest Channel / 10MHz / QPSK

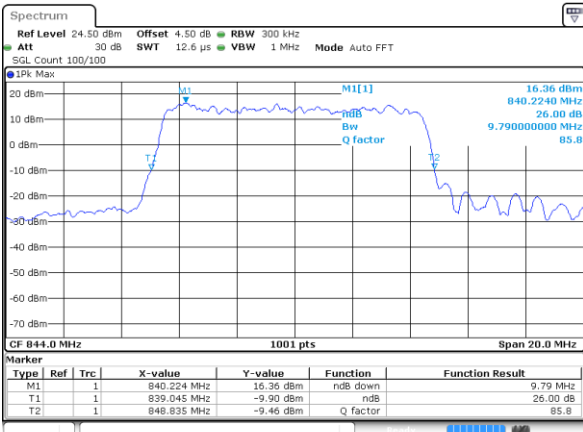

Date: 24 JUL 2020 07:06:00

Highest Channel / 10MHz / 16QAM

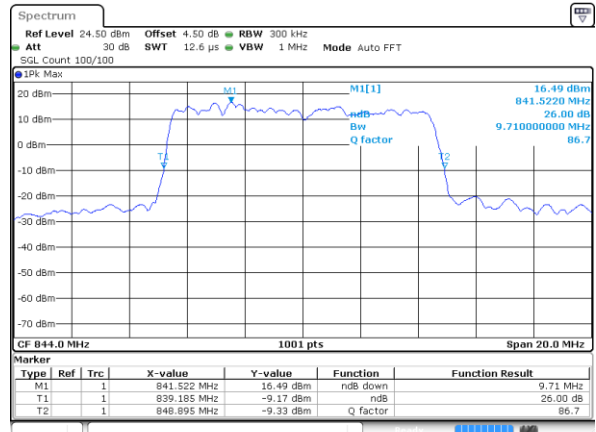


Date: 24 JUL 2020 07:07:15




LTE Band 5

Lowest Channel / 1.4MHz / 64QAM

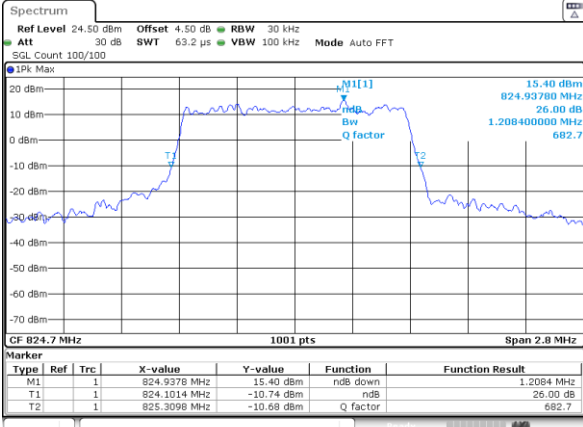


Date: 23\_JUL\_2020 02:16:32

Lowest Channel / 3MHz / 64QAM

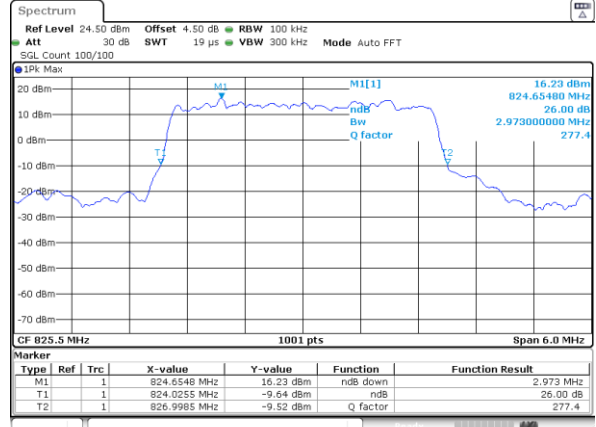


Date: 23\_JUL\_2020 01:12:11

Middle Channel / 1.4MHz / 64QAM

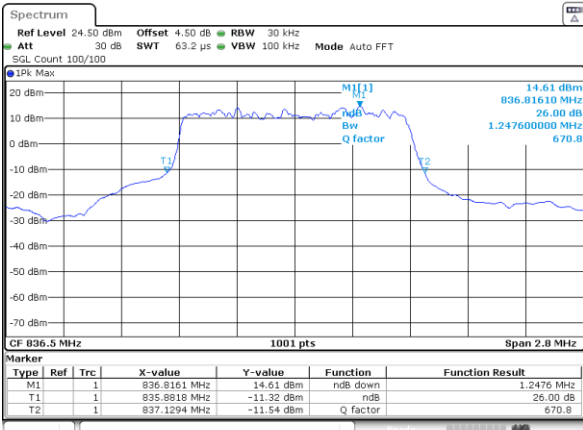


Date: 23\_JUL\_2020 02:19:12

Middle Channel / 3MHz / 64QAM

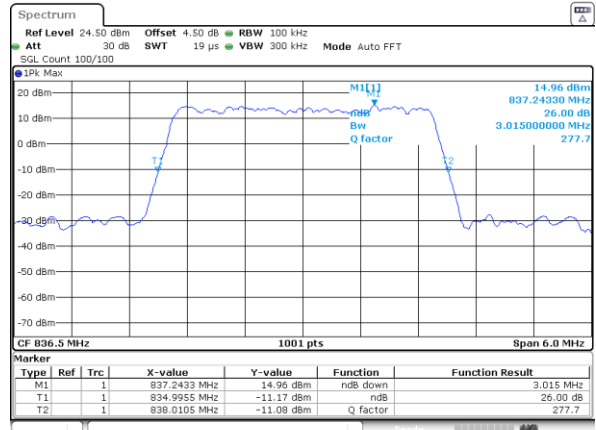


Date: 23\_JUL\_2020 01:14:39

Highest Channel / 1.4MHz / 64QAM

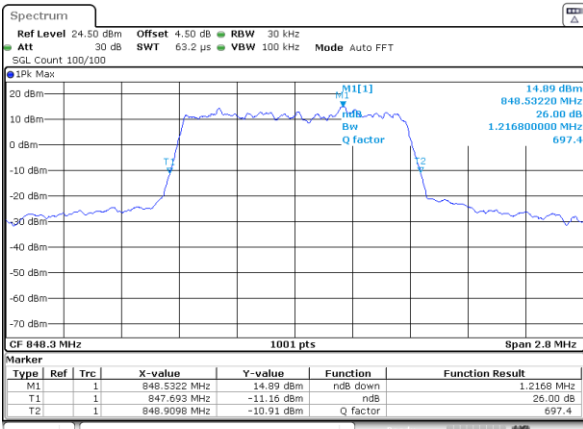

Date: 23\_JUL\_2020 02:19:51

Highest Channel / 3MHz / 64QAM

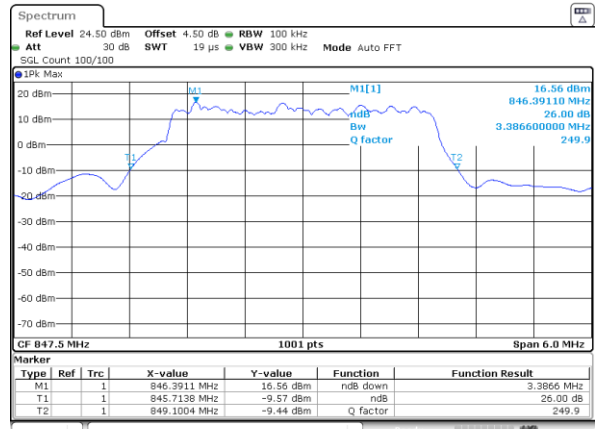


Date: 23\_JUL\_2020 01:15:03




LTE Band 5

Lowest Channel / 5MHz / 64QAM

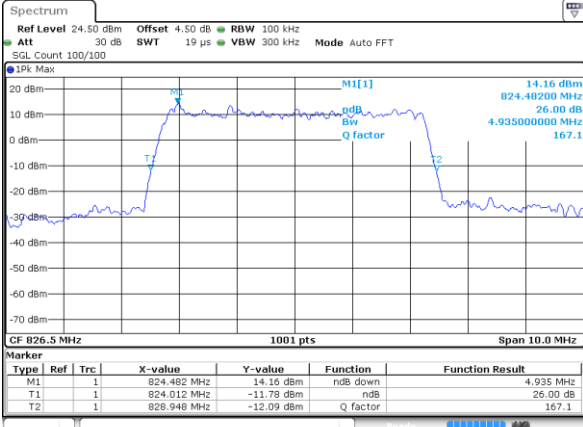


Date: 24 JUL 2020 06:36:29

Lowest Channel / 10MHz / 64QAM

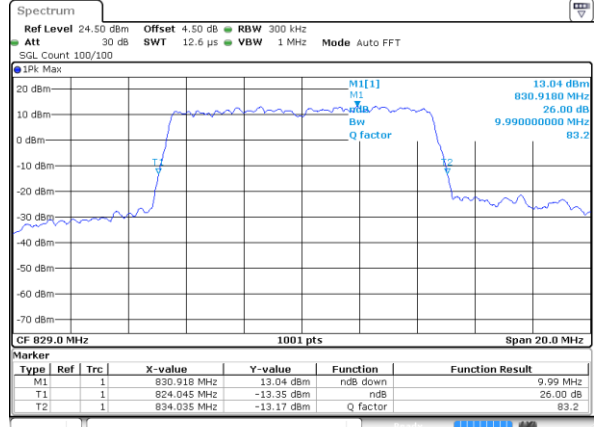


Date: 24 JUL 2020 06:53:23

Middle Channel / 5MHz / 64QAM

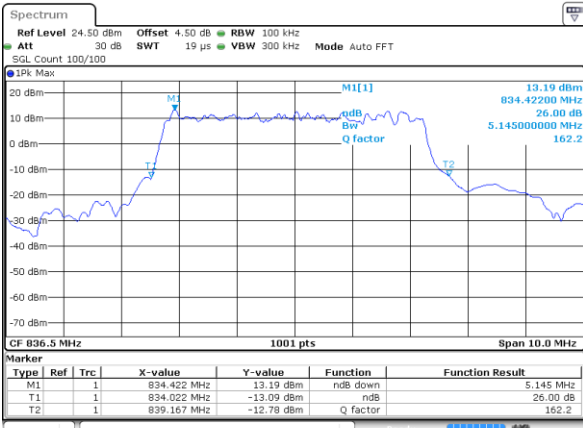


Date: 24 JUL 2020 06:40:07

Middle Channel / 10MHz / 64QAM

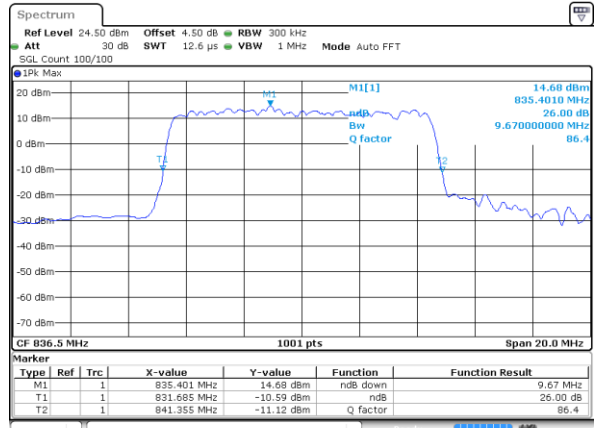


Date: 24 JUL 2020 07:03:40

Highest Channel / 5MHz / 64QAM

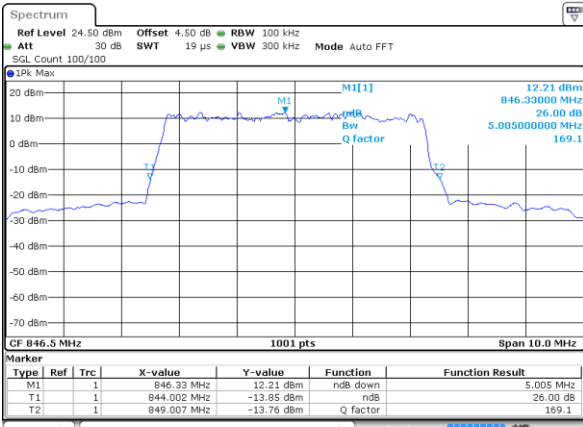

Date: 24 JUL 2020 06:40:47

Highest Channel / 10MHz / 64QAM

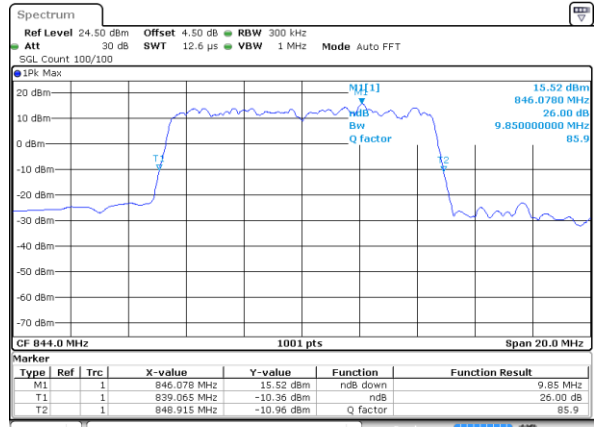

Date: 24 JUL 2020 07:08:30




Occupied Bandwidth

Mode	LTE Band 5							
BW	1.4MHz		3MHz		5MHz		10MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.09	1.09	2.70	2.73	4.49	4.51	9.07	9.03
Middle CH	1.09	1.10	2.73	2.73	4.50	4.52	9.05	8.95
Highest CH	1.09	1.09	2.73	2.73	4.51	4.50	9.07	9.07
Mode	LTE Band 5							
BW	1.4MHz		3MHz		5MHz		10MHz	
Mod.	64QAM		64QAM		64QAM		64QAM	
Lowest CH	1.10		2.70		4.52		9.05	
Middle CH	1.09		2.72		4.53		9.11	
Highest CH	1.08		2.75		4.49		9.07	




LTE Band 5

Lowest Channel / 1.4MHz / QPSK

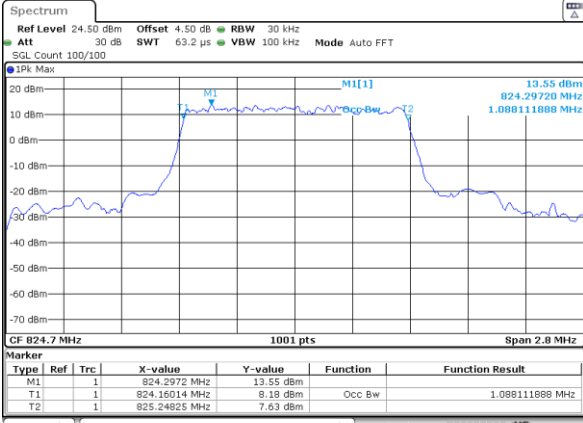


Date: 23\_JUL\_2020 02:15:49

Lowest Channel / 1.4MHz / 16QAM

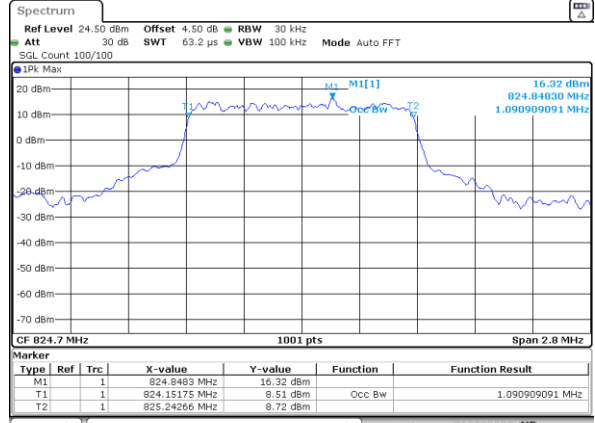


Date: 22\_JUL\_2020 23:56:48

Middle Channel / 1.4MHz / QPSK

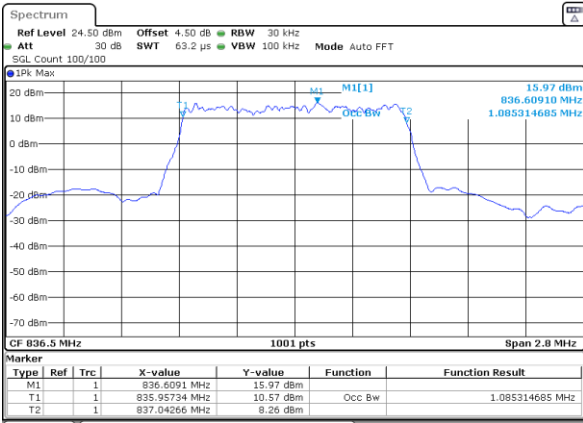


Date: 23\_JUL\_2020 00:05:42

Middle Channel / 1.4MHz / 16QAM

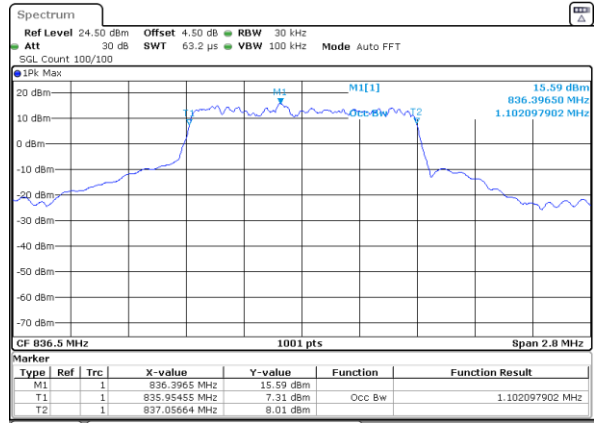


Date: 23\_JUL\_2020 00:05:52

Highest Channel / 1.4MHz / QPSK

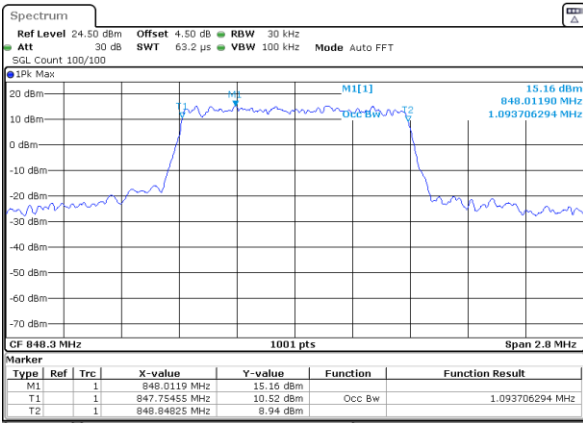

Date: 23\_JUL\_2020 00:34:40

Highest Channel / 1.4MHz / 16QAM

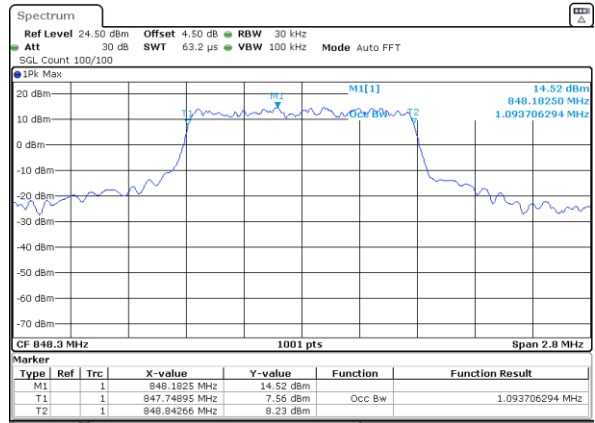


Date: 23\_JUL\_2020 00:34:50




LTE Band 5

Lowest Channel / 3MHz / QPSK

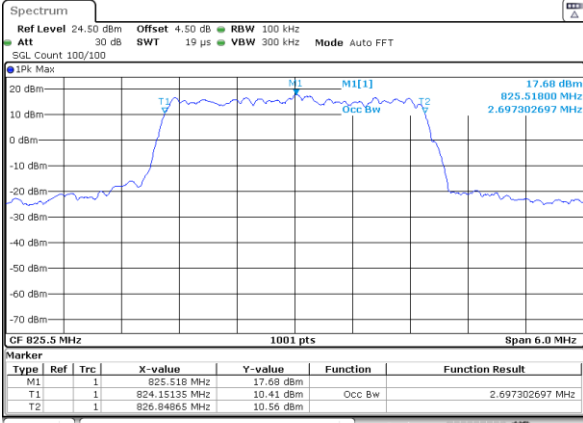


Date: 23\_JUL\_2020 01:23:27

Lowest Channel / 3MHz / 16QAM

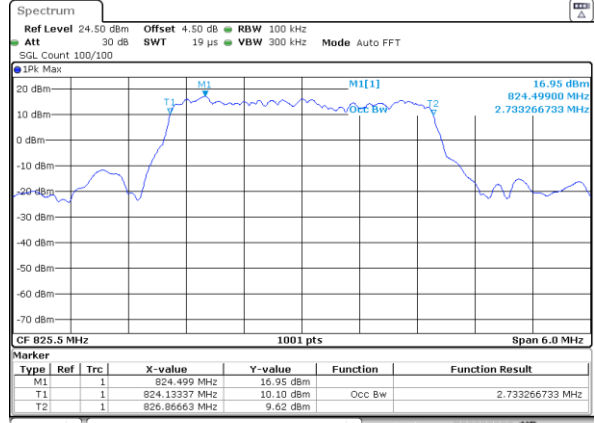


Date: 23\_JUL\_2020 01:24:50

Middle Channel / 3MHz / QPSK

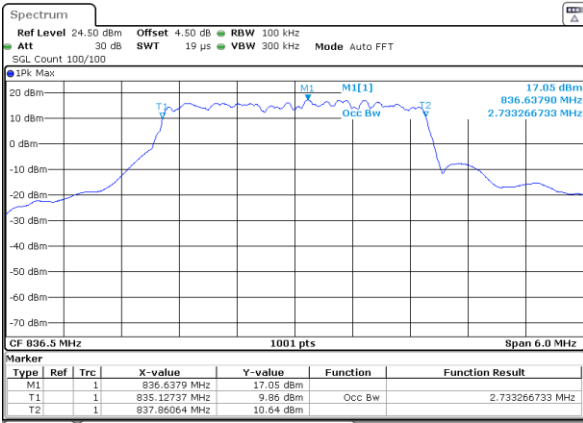


Date: 23\_JUL\_2020 01:42:59

Middle Channel / 3MHz / 16QAM

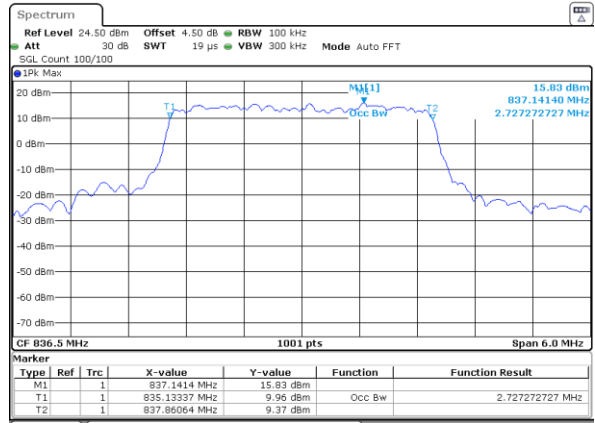


Date: 23\_JUL\_2020 01:44:10

Highest Channel / 3MHz / QPSK

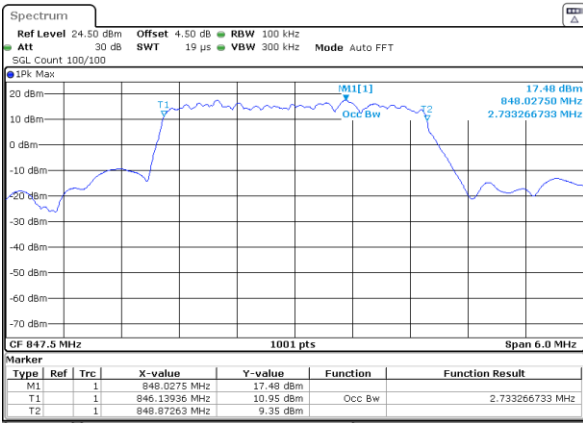

Date: 23\_JUL\_2020 01:55:40

Highest Channel / 3MHz / 16QAM

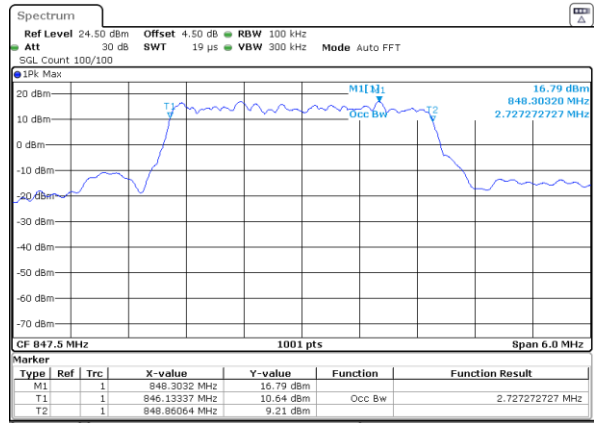


Date: 23\_JUL\_2020 01:56:59




LTE Band 5

Lowest Channel / 5MHz / QPSK

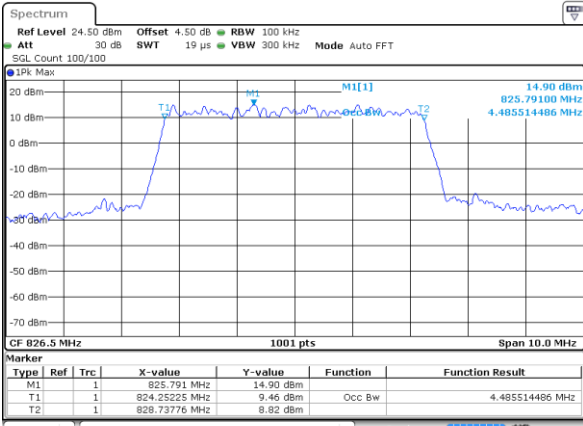


Date: 24 JUL 2020 07:20:46

Lowest Channel / 5MHz / 16QAM

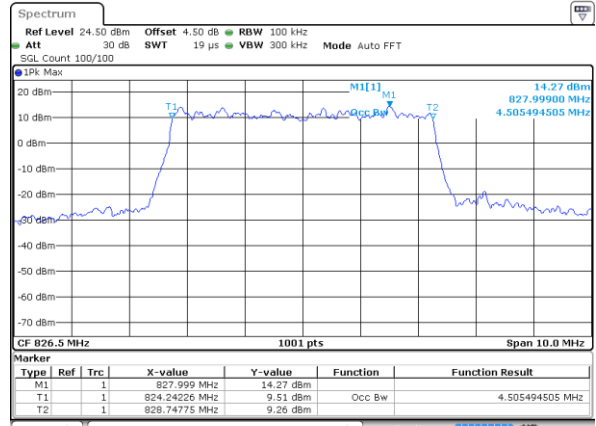


Date: 24 JUL 2020 07:21:34

Middle Channel / 5MHz / QPSK

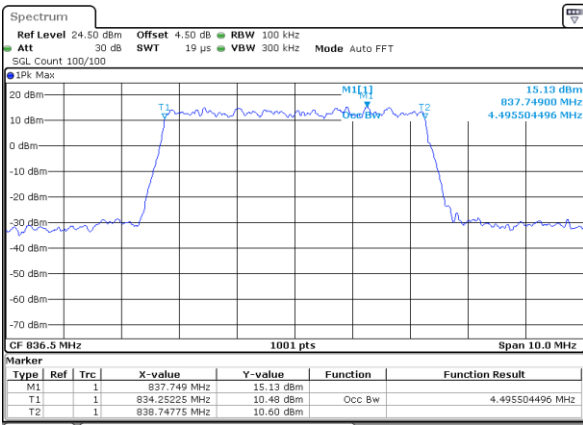


Date: 23 JUL 2020 03:21:39

Middle Channel / 5MHz / 16QAM

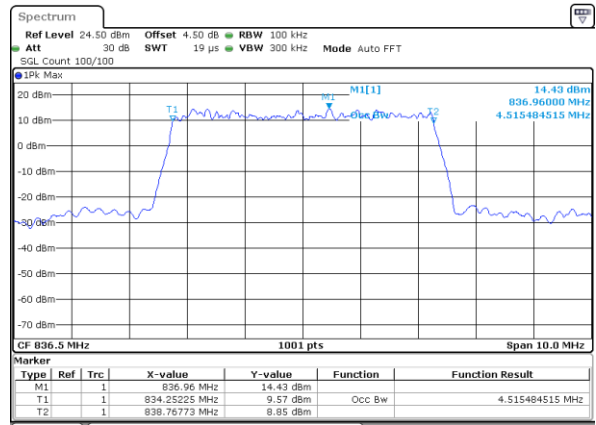


Date: 23 JUL 2020 03:21:49

Highest Channel / 5MHz / QPSK

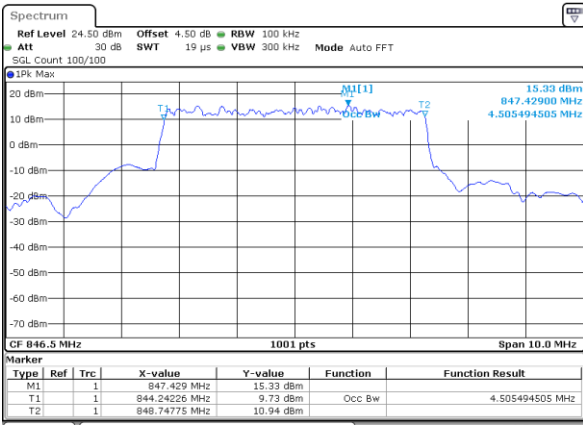

Date: 23 JUL 2020 03:25:48

Highest Channel / 5MHz / 16QAM

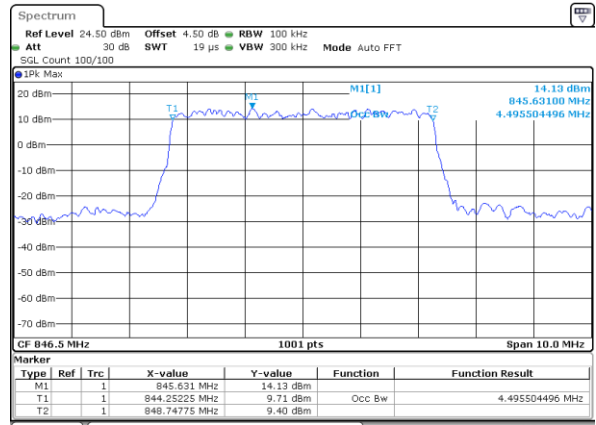


Date: 23 JUL 2020 03:25:59




LTE Band 5

Lowest Channel / 10MHz / QPSK

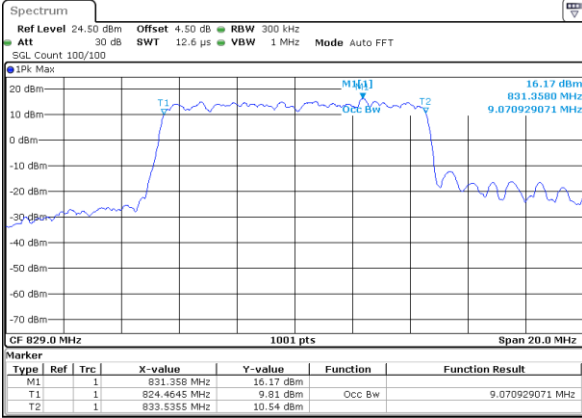


Date: 24 JUL 2020 06:51:04

Lowest Channel / 10MHz / 16QAM

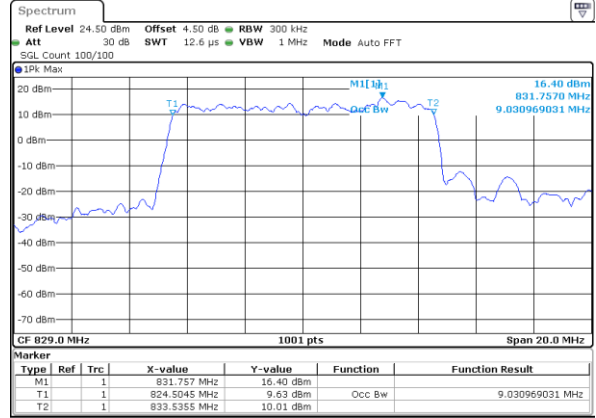


Date: 24 JUL 2020 06:52:23

Middle Channel / 10MHz / QPSK

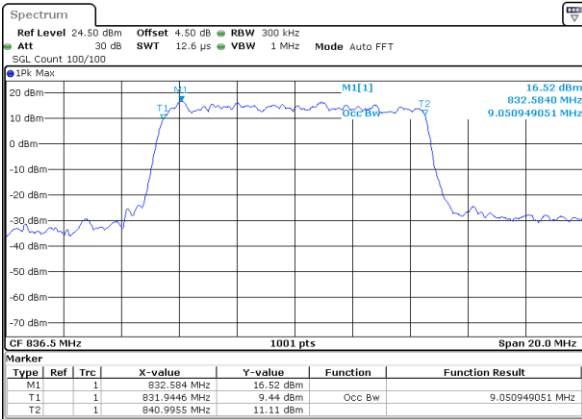


Date: 24 JUL 2020 07:04:23

Middle Channel / 10MHz / 16QAM

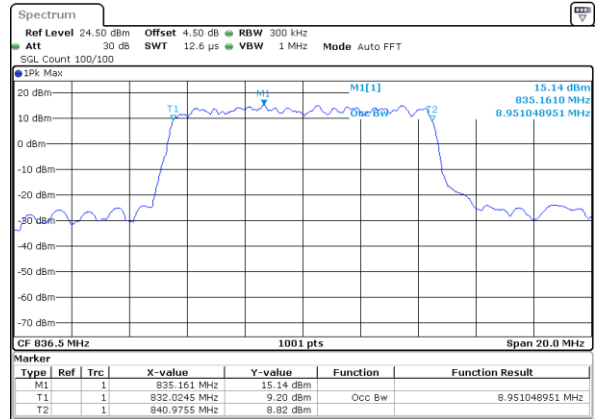


Date: 24 JUL 2020 07:03:59

Highest Channel / 10MHz / QPSK

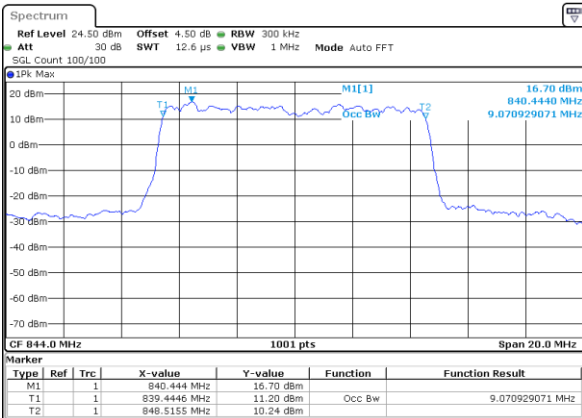

Date: 24 JUL 2020 07:05:51

Highest Channel / 10MHz / 16QAM

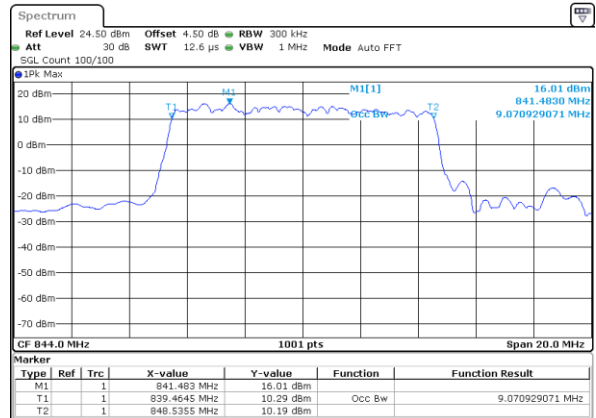


Date: 24 JUL 2020 07:07:07






LTE Band 5


Lowest Channel / 1.4MHz / 64QAM

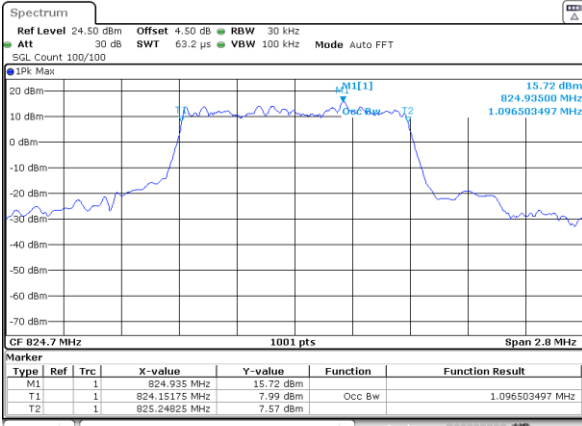


Lowest Channel / 3MHz / 64QAM

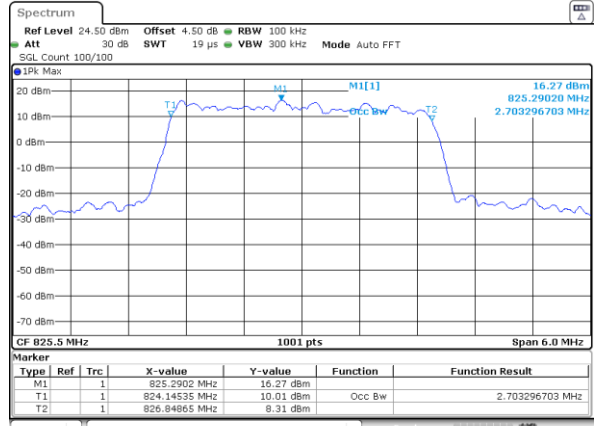


Middle Channel / 1.4MHz / 64QAM

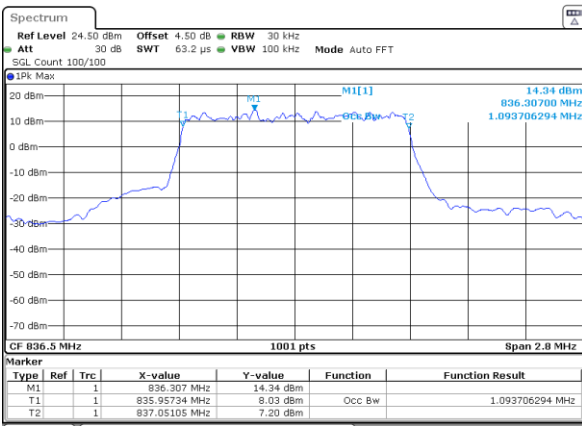

Middle Channel / 3MHz / 64QAM

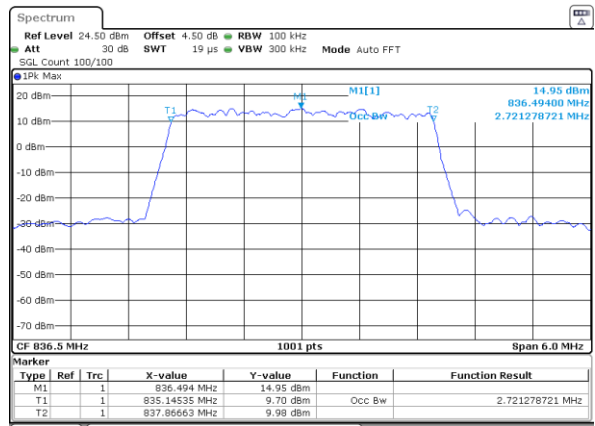

Highest Channel / 1.4MHz / 64QAM

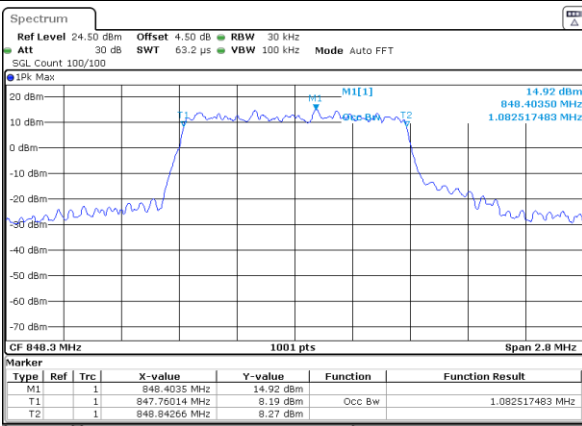

Highest Channel / 3MHz / 64QAM

