

FCC SAR Test Report

APPLICANT : Lenovo(Shanghai) Electronics
Technology Co., Ltd.
EQUIPMENT : Lenovo Mobile Phone
BRAND NAME : Lenovo
MODEL NAME : Lenovo PB2-690Y
FCC ID : O57PB2690Y
STANDARD : FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2013

We, SPORTON INTERNATIONAL (SHENZHEN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and had been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (SHENZHEN) INC., the test report shall not be reproduced except in full.



Prepared by: Mark Qu / Manager



Approved by: Jones Tsai / Manager

SPORTON INTERNATIONAL (SHENZHEN) INC.

1F & 2F, Building A, Morning Business Center, No. 4003 ShiGu Rd., Xili Town,
Nanshan District, Shenzhen, Guangdong, P. R. China



Table of Contents

1. Statement of Compliance	4
2. Administration Data	5
3. Guidance Standard	5
4. Equipment Under Test (EUT) Information	6
4.1 General Information	6
4.2 General LTE SAR Test and Reporting Considerations	7
5. RF Exposure Limits	9
5.1 Uncontrolled Environment	9
5.2 Controlled Environment	9
6. Specific Absorption Rate (SAR)	10
6.1 Introduction	10
6.2 SAR Definition	10
7. System Description and Setup	11
7.1 E-Field Probe	12
7.2 Data Acquisition Electronics (DAE)	12
7.3 Phantom	13
7.4 Device Holder	14
8. Measurement Procedures	15
8.1 Spatial Peak SAR Evaluation	15
8.2 Power Reference Measurement	16
8.3 Area Scan	16
8.4 Zoom Scan	17
8.5 Volume Scan Procedures	17
8.6 Power Drift Monitoring	17
9. Test Equipment List	18
10. System Verification	19
10.1 Tissue Verification	19
10.2 System Performance Check Results	21
11. RF Exposure Positions	23
11.1 Ear and handset reference point	23
11.2 Definition of the cheek position	24
11.3 Definition of the tilt position	25
11.4 Body Worn Accessory	26
11.5 Product Specific 10g SAR Exposure	26
11.6 Wireless Router	27
12. Conducted RF Output Power (Unit: dBm)	28
13. Antenna Location	55
14. SAR Test Results	56
14.1 Head SAR	58
14.2 Hotspot SAR	63
14.3 Body Worn Accessory SAR	68
14.4 Product specific 10g SAR	71
14.5 Repeated SAR Measurement	72
15. Simultaneous Transmission Analysis	73
15.1 Head Exposure Conditions	74
15.2 Hotspot Exposure Conditions	76
15.3 Body-Worn Accessory Exposure Conditions	78
16. Uncertainty Assessment	79
17. References	82
Appendix A. Plots of System Performance Check	
Appendix B. Plots of High SAR Measurement	
Appendix C. DASY Calibration Certificate	
Appendix D. Test Setup Photos	



Revision History

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA651101	Rev. 01	Initial issue of report	Jun. 21, 2016

1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Lenovo(Shanghai) Electronics Technology Co., Ltd., Lenovo Mobile Phone, Lenovo PB2-690Y**, are as follows.

Equipment Class	Frequency Band		Highest 1g SAR Summary			Highest Simultaneous Transmission 1g SAR (W/kg)
			Head (Separation 0mm)	Body-worn (Separation 10mm)	Hotspot (Separation 10mm)	
			1g SAR (W/kg)			
Licensed	GSM	GSM850	0.21	0.51	0.51	1.35
		GSM1900	0.15	0.23	0.23	
	WCDMA	WCDMA V	0.12	0.45	0.45	
		WCDMA IV	0.19	0.52	0.55	
		WCDMA II	0.24	0.62	0.62	
	LTE	LTE Band 12	0.11	0.18	0.24	
		LTE Band 5	0.19	0.46	0.46	
		LTE Band 4	0.28	0.46	0.54	
		LTE Band 2	0.34	0.65	0.65	
		LTE Band 30	0.32	0.84	0.96	
		LTE Band 7	0.31	0.63	0.93	
DTS	WLAN	2.4GHz WLAN	0.95	0.12	0.12	1.29
NII		5GHz WLAN	1.01	0.21	0.18	1.35
DSS	2.4GHz Band	Bluetooth		<0.10		0.85
Date of Testing:			2016/06/02 ~ 2016/06/09			

Frequency Band	Highest SAR Summary
	Product Specific 10g SAR (W/kg) (Gap 0mm)
5GHz WLAN	0.43

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6W/kg as averaged over any 1 gram of tissue; 10-gram SAR for Product Specific 10g SAR, limit: 4.0W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

2. Administration Data

Testing Laboratory	
Test Site	SPORTON INTERNATIONAL (SHENZHEN) INC.
Test Site Location	1F & 2F, Building A, Morning Business Center, No. 4003 ShiGu Rd., Xili Town, Nanshan District, Shenzhen, Guangdong, P. R. China TEL: +86-755-8637-9589 FAX: +86-755-8637-9595

Applicant	
Company Name	Lenovo(Shanghai) Electronics Technology Co., Ltd.
Address	NO.68 BUILDING, 199 FENJU RD, China (Shanghai) Pilot Free Trade Zone, 200131, CHINA

Manufacturer	
Company Name	Lenovo PC HK Limited
Address	23/F, Lincoln House, Taikoo Place 979 King's Road, Quarry Bay, Hong Kong

3. Guidance Standard

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01

4. Equipment Under Test (EUT) Information

4.1 General Information

Product Feature & Specification	
Equipment Name	Lenovo Mobile Phone
Brand Name	Lenovo
Model Name	Lenovo PB2-690Y
FCC ID	O57PB2690Y
IMEI Code	SIM 1: 869972020005633 SIM 2: 869972020005641
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz WCDMA Band IV: 1712.4 MHz ~ 1752.6 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 30: 2305 MHz ~ 2315 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5720 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz
Mode	· GSM/GPRS/EGPRS · RMC/AMR 12.2Kbps · HSDPA · HSUPA · DC-HSDPA · HSPA+ (16QAM uplink is not supported) · LTE: QPSK, 16QAM, 64QAM · 802.11b/g/n HT20 · 802.11a/n HT20/HT40 · 802.11ac VHT20/VHT40/VHT80 · Bluetooth v3.0+EDR, Bluetooth v4.0 LE
HW Version	Lenovo PB2-690Y
SW Version	PB2-690Y-160711
GSM / (E)GPRS Transfer mode	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.
EUT Stage	Identical Prototype
Remark: 1. 802.11n-HT40 is not supported in 2.4GHz WLAN. 2. This device 2.4GHz WLAN supports Hotspot operation, and 2.4GHz /5.2GHz/ 5.8GHz WLAN supports WiFi Direct (GC/GO), and 5.3GHz / 5.5GHz supports WiFi Direct (GC only). 3. This device supported VoIP in GPRS, EGPRS, WCDMA, LTE (e.g. 3rd party VoIP). 4. This device does not support DTM operation. 5. This device supports GPRS/EGPRS mode up to multi-slot class12.	

4.2 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05																																																					
FCC ID	O57PB2690Y																																																				
Equipment Name	Lenovo Mobile Phone																																																				
Operating Frequency Range of each LTE transmission band	LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 30: 2305 MHz ~ 2315 MHz																																																				
Channel Bandwidth	LTE Band 2:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 4:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 5:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 7: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 12:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 17: 5MHz, 10MHz LTE Band 30: 5MHz, 10MHz																																																				
uplink modulations used	QPSK, and 16QAM																																																				
LTE Voice / Data requirements	Voice and Data																																																				
LTE MPR permanently built-in by design	<table><tr><th colspan="8">Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3</th></tr><tr><th rowspan="2">Modulation</th><th colspan="6">Channel bandwidth / Transmission bandwidth (RB)</th><th rowspan="2">MPR (dB)</th></tr><tr><th>1.4 MHz</th><th>3.0 MHz</th><th>5 MHz</th><th>10 MHz</th><th>15 MHz</th><th>20 MHz</th></tr><tr><td>QPSK</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 2</td></tr></table>							Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3								Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3																																																					
Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)																																														
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																															
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																														
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																														
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																														
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																																				
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																				
LTE Release Version	R8, Cat 4																																																				
CA Support	NO																																																				

Transmission (H, M, L) channel numbers and frequencies in each LTE band												
LTE Band 2												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900
LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 5												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20407	824.7	20415	825.5	20425	826.5	20450	829				
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5		
H	20643	848.3	20635	847.5	20625	846.5	20600	844				
LTE Band 7												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510				
M	21100	2535	21100	2535	21100	2535	21100	2535	21100	2535		
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560				
LTE Band 12												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	23017	699.7	23025	700.5	23035	701.5	23060	704				
M	23095	707.5	23095	707.5	23095	707.5	23095	707.5	23095	707.5		
H	23173	715.3	23165	714.5	23155	713.5	23130	711				
LTE Band 17												
	Bandwidth 5 MHz				Bandwidth 10 MHz							
	Channel #		Freq.(MHz)		Channel #		Freq. (MHz)					
L	23755		706.5		23780		709					
M	23790		710		23790		710					
H	23825		713.5		23800		711					
LTE Band 30												
	Bandwidth 5 MHz				Bandwidth 10 MHz							
	Channel #		Freq.(MHz)		Channel #		Freq.(MHz)					
L	27685		2307.5		27710		2310					
M	27710		2310									
H	27735		2312.5									

5. RF Exposure Limits

5.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

5.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

6. Specific Absorption Rate (SAR)

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

7. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

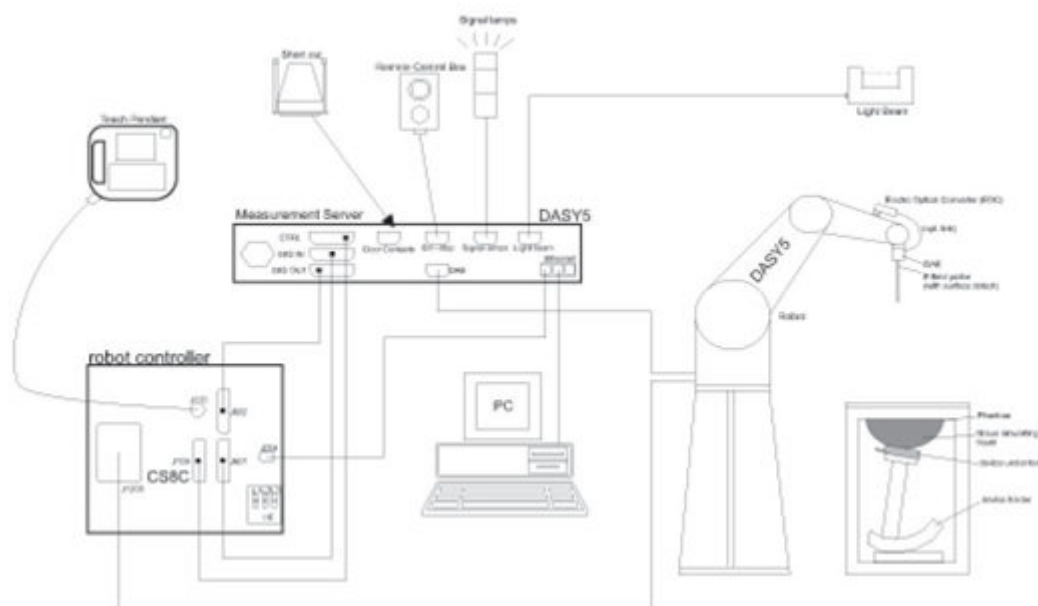

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

7.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – >6 GHz Linearity: ± 0.2 dB (30 MHz – 6 GHz)	
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μ W/g – >100 mW/g Linearity: ± 0.2 dB (noise: typically <1 μ W/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

7.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig 5.1 Photo of DAE


7.3 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

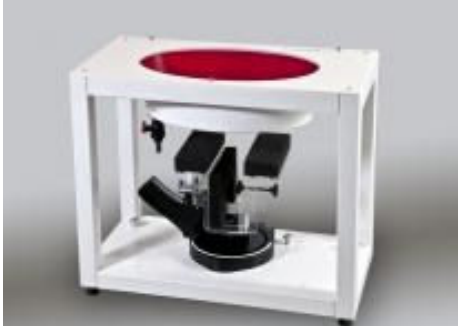Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

7.4 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

8. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

8.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

8.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

8.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

8.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

8.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

**9. Test Equipment List**

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1099	Nov. 24, 2015	Nov. 23, 2016
SPEAG	835MHz System Validation Kit	D835V2	4d162	Nov. 24, 2015	Nov. 23, 2016
SPEAG	1750MHz System Validation Kit	D1750V2	1023	Jun. 23, 2015	Jun. 22, 2016
SPEAG	1900MHz System Validation Kit	D1900V2	5d182	Nov. 23, 2015	Nov. 22, 2016
SPEAG	2300MHz System Validation Kit	D2300V2	1006	Jan. 21, 2016	Jan. 20, 2017
SPEAG	2450MHz System Validation Kit	D2450V2	924	Feb. 24, 2016	Feb. 23, 2017
SPEAG	2600MHz System Validation Kit	D2600V2	1070	Nov. 25, 2015	Nov. 24, 2016
SPEAG	5000MHz System Validation Kit	D5GHzV2	1167	Jul. 27, 2015	Jul. 26, 2016
SPEAG	Data Acquisition Electronics	DAE4	914	Jan. 07, 2016	Jan. 06, 2017
SPEAG	Data Acquisition Electronics	DAE4	1338	Nov. 23, 2015	Nov. 22, 2016
SPEAG	Data Acquisition Electronics	DAE4	1386	Feb. 16, 2016	Feb. 15, 2017
SPEAG	Dosimetric E-Field Probe	EX3DV4	3911	Oct. 01, 2015	Sep. 30, 2016
SPEAG	Dosimetric E-Field Probe	EX3DV4	3958	Jul. 23, 2015	Jul. 22, 2016
SPEAG	Dosimetric E-Field Probe	EX3DV4	3819	Nov. 27, 2015	Nov. 26, 2016
SPEAG	SAM Twin Phantom	QD 000 P40 CD	TP-1670	NCR	NCR
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
Anritsu	Radio communication analyzer	MT8820C	6201300653	Aug. 25, 2015	Aug. 24, 2016
Agilent	Wireless Communication Test Set	E5515C	MY50267224	Aug. 07, 2015	Aug. 06, 2016
Agilent	Network Analyzer	E5071C	MY46523671	Dec. 31, 2015	Dec. 30, 2016
SPEAG	Dielectric Assessment KIT	DAK-3.5	1071	Nov. 24, 2015	Nov. 23, 2016
Agilent	Signal Generator	N5181A	MY50145381	Jan. 12, 2016	Jan. 11, 2017
Anritsu	Power Sensor	MA2411B	1306099	Jan. 12, 2016	Jan. 11, 2017
Anritsu	Power Meter	ML2495A	1349001	Jan. 12, 2016	Jan. 11, 2017
Anritsu	Power Sensor	MA2411B	1207253	Jan. 12, 2016	Jan. 11, 2017
Anritsu	Power Meter	ML2495A	1218010	Jan. 12, 2016	Jan. 11, 2017
R&S	Spectrum Analyzer	FSP7	101634	Aug. 07, 2015	Aug. 06, 2016
ARRA	Power Divider	A3200-2	N/A	Note1	
PASTERNAK	Dual Directional Coupler	PE2214-10	N/A	Note1	
Agilent	Dual Directional Coupler	778D	50422	Note1	
MCL	Attenuation1	BW-S10W5	N/A	Note1	
Weinschel	Attenuation2	3M-20	N/A	Note1	
Zhongjilianhe	Attenuation3	MVE2214-03	N/A	Note1	
AR	Amplifier	5S1G4	333096	Note1	
mini-circuits	Amplifier	ZVE-3W-83+	162601250	Note1	

General Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.

10. System Verification

10.1 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0
For Body								
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7
2600	68.1	0	0	0.1	0	31.8	2.16	52.5

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
750	Head	22.9	0.882	40.803	0.89	41.90	-0.90	-2.62	±5	2016/6/7
835	Head	22.7	0.887	41.987	0.90	41.50	-1.44	1.17	±5	2016/6/7
1750	Head	22.8	1.383	41.300	1.37	40.10	0.95	2.99	±5	2016/6/6
1900	Head	22.8	1.419	40.346	1.40	40.00	1.36	0.86	±5	2016/6/6
2300	Head	22.8	1.693	38.361	1.67	39.50	1.38	-2.88	±5	2016/6/3
2450	Head	22.8	1.865	37.492	1.80	39.20	3.61	-4.36	±5	2016/6/7
2600	Head	22.7	2.054	38.328	1.96	39.00	4.80	-1.72	±5	2016/6/3
5250	Head	22.6	4.597	36.629	4.71	35.95	-2.40	1.89	±5	2016/6/8
5600	Head	22.9	5.004	36.093	5.07	35.50	-1.30	1.67	±5	2016/6/8
5750	Head	22.5	5.173	35.826	5.22	35.35	-0.90	1.35	±5	2016/6/8
750	Body	22.9	0.961	53.917	0.96	55.50	0.10	-2.85	±5	2016/6/5
835	Body	22.7	1.011	56.243	0.97	55.20	4.23	1.89	±5	2016/6/5
1750	Body	22.5	1.526	52.010	1.49	53.40	2.42	-2.60	±5	2016/6/4
1900	Body	22.7	1.512	53.903	1.52	53.30	-0.53	1.13	±5	2016/6/4
2300	Body	22.6	1.766	53.789	1.81	52.90	-2.43	1.68	±5	2016/6/3
2450	Body	22.9	1.921	50.990	1.95	52.70	-1.49	-3.24	±5	2016/6/7
2600	Body	22.5	2.184	50.734	2.16	52.50	1.11	-3.36	±5	2016/6/2
5250	Body	22.8	5.346	49.359	5.36	48.95	-0.26	0.84	±5	2016/6/9
5600	Body	22.5	5.852	48.685	5.77	48.50	1.42	0.38	±5	2016/6/9
5750	Body	22.6	6.010	48.529	5.94	48.28	1.18	0.52	±5	2016/6/9

10.2 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

<For 1g SAR>

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2016/6/7	750	Head	250	1099	3911	914	1.96	8.17	7.84	-4.04
2016/6/7	835	Head	250	4d162	3911	914	2.42	9.14	9.68	5.91
2016/6/6	1750	Head	250	1023	3911	914	9.59	37.20	38.36	3.12
2016/6/6	1900	Head	250	5d182	3911	914	10.20	39.60	40.8	3.03
2016/6/3	2300	Head	250	1006	3911	914	11.70	48.70	46.8	-3.90
2016/6/7	2450	Head	250	924	3958	1338	13.4	52.50	53.6	2.10
2016/6/3	2600	Head	250	1070	3911	914	14.80	58.10	59.2	1.89
2016/6/8	5250	Head	100	1167	3819	914	8.19	80.50	81.9	1.74
2016/6/8	5600	Head	100	1167	3819	914	8.58	82.30	85.8	4.25
2016/6/8	5750	Head	100	1167	3819	914	8.22	78.70	82.2	4.45
2016/6/5	750	Body	250	1099	3911	914	2.15	8.82	8.6	-2.49
2016/6/5	835	Body	250	4d162	3911	914	2.45	9.51	9.8	3.05
2016/6/4	1750	Body	250	1023	3911	914	9.41	37.60	37.64	0.11
2016/6/4	1900	Body	250	5d182	3911	914	10.70	40.60	42.8	5.42
2016/6/3	2300	Body	250	1006	3911	914	12.50	47.70	50	4.82
2016/6/7	2450	Body	250	924	3911	914	13.40	51.40	53.6	4.28
2016/6/2	2600	Body	250	1070	3819	1386	13.40	54.20	53.6	-1.11
2016/6/9	5250	Body	100	1167	3819	914	8.12	76.00	81.2	6.84
2016/6/9	5600	Body	100	1167	3819	914	8.42	80.60	84.2	4.47
2016/6/9	5750	Body	100	1167	3819	914	7.83	75.60	78.3	3.57

<For 10g SAR>

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
2016/6/9	5250	Body	100	1167	3819	914	2.23	21.30	22.3	4.69
2016/6/9	5600	Body	100	1167	3819	914	2.32	22.30	23.2	4.04
2016/6/9	5750	Body	100	1167	3819	914	2.16	20.90	21.6	3.35

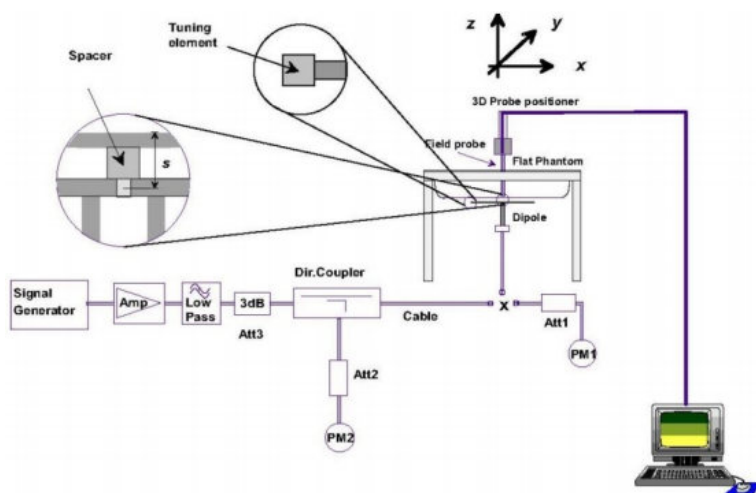


Fig 8.3.1 System Performance Check Setup



Fig 8.3.2 Setup Photo

11. RF Exposure Positions

11.1 Ear and handset reference point

Figure 9.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled "M," the left ear reference point (ERP) is marked "LE," and the right ERP is marked "RE." Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 9.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 9.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 9.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

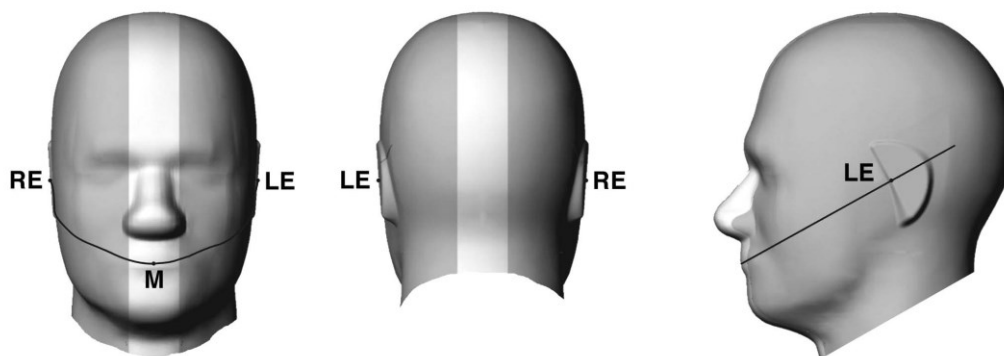


Fig 9.1.1 Front, back, and side views of SAM twin phantom

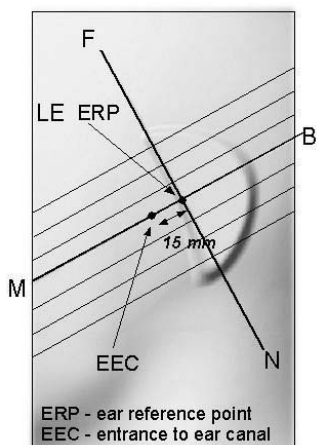


Fig 9.1.2 Close-up side view of phantom showing the ear region.

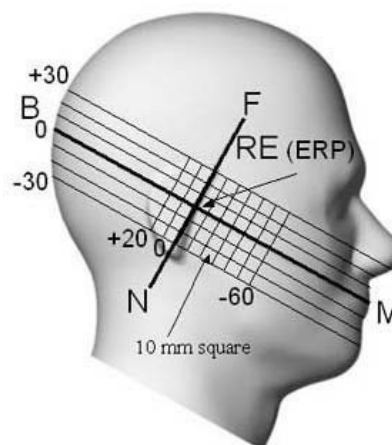


Fig 9.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

11.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 9.2.1 and Figure 9.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 9.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 9.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 9.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 9.2.3. The actual rotation angles should be documented in the test report.

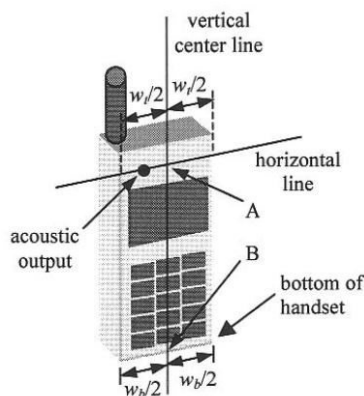


Fig 9.2.1 Handset vertical and horizontal reference lines—“fixed case”

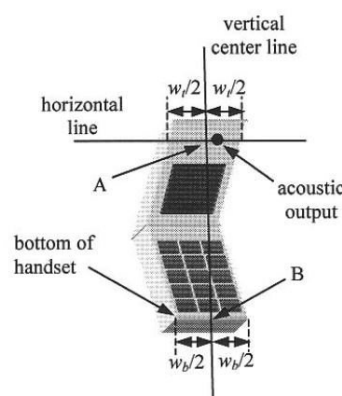


Fig 9.2.2 Handset vertical and horizontal reference lines—“clam-shell case”

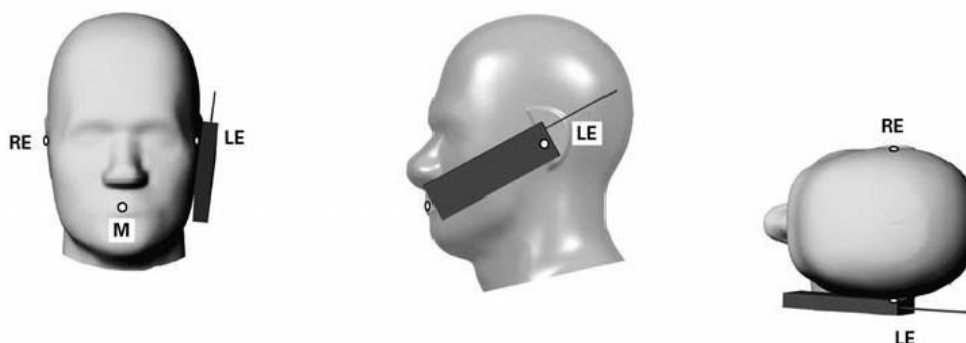


Fig 9.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

11.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15° .
3. Rotate the handset around the horizontal line by 15° .
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 9.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

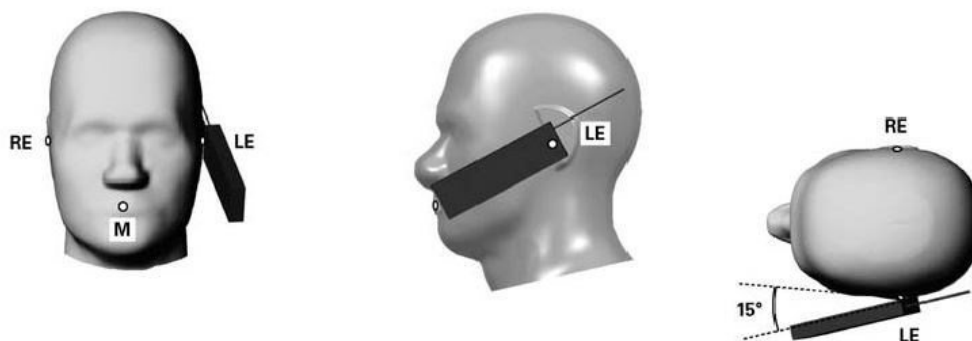


Fig 9.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

11.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 9.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is $< 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

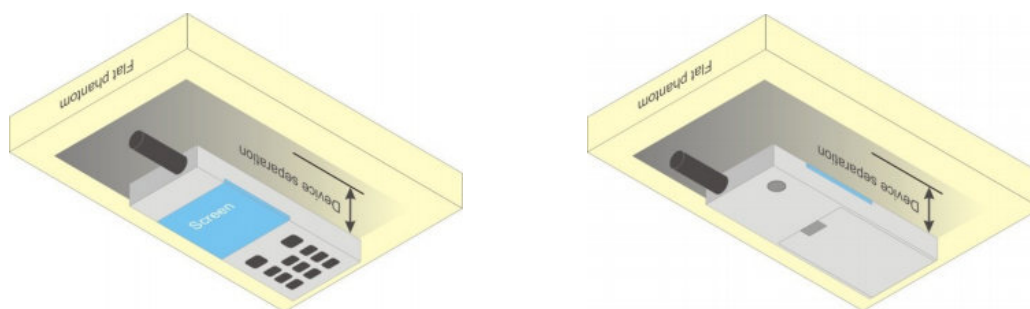


Fig 9.4 Body Worn Position

11.5 Product Specific 10g SAR Exposure

For smart phones with a display diagonal dimension $> 15.0 \text{ cm}$ or an overall diagonal dimension $> 16.0 \text{ cm}$ that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, According to KDB648474 D04v01r03, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance

1. The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.
2. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at $\leq 25 \text{ mm}$ from that surface or edge, in direct contact with a flat phantom, for Product specific 10g SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions.⁶ The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g Product specific 10g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR $> 1.2 \text{ W/kg}$.



11.6 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

12. Conducted RF Output Power (Unit: dBm)

<GSM Conducted Power>

General Note:

1. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (2Tx slots) for GSM850 and GPRS (4Tx slots) for GSM1900 are considered as the primary mode.
3. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode

GSM850	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
TX Channel	128	189	251		128	189	251	
Frequency (MHz)	824.2	836.4	848.8		824.2	836.4	848.8	
GSM 1 Tx slot	32.49	32.46	32.47	33.00	23.49	23.46	23.47	24.00
GPRS 1 Tx slot	32.45	32.43	32.44	33.00	23.45	23.43	23.44	24.00
GPRS 2 Tx slots	29.94	29.87	29.86	30.50	23.94	23.87	23.86	24.50
GPRS 3 Tx slots	27.98	27.88	27.92	28.50	23.72	23.62	23.66	24.24
GPRS 4 Tx slots	26.68	26.57	26.52	27.00	23.68	23.57	23.52	24.00
EDGE 1 Tx slot	26.19	26.11	26.10	27.00	17.19	17.11	17.10	18.00
EDGE 2 Tx slots	23.11	23.03	23.05	24.00	17.11	17.03	17.05	18.00
EDGE 3 Tx slots	21.51	21.41	21.38	22.00	17.25	17.15	17.12	17.74
EDGE 4 Tx slots	20.22	20.14	20.16	21.00	17.22	17.14	17.16	18.00

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.
The calculated method are shown as below:
Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB
Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB
Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB
Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

GSM1900	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
TX Channel	512	661	810		512	661	810	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot	29.65	29.74	29.85	30.00	20.65	20.74	20.85	21.00
GPRS 1 Tx slot	29.61	29.69	29.82	30.00	20.61	20.69	20.82	21.00
GPRS 2 Tx slots	27.63	27.57	27.60	28.00	21.63	21.57	21.60	22.00
GPRS 3 Tx slots	25.71	25.87	25.84	26.00	21.45	21.61	21.58	21.74
GPRS 4 Tx slots	24.53	24.50	24.57	25.00	21.53	21.50	21.57	22.00
EDGE 1 Tx slot	25.55	25.53	25.61	26.00	16.55	16.53	16.61	17.00
EDGE 2 Tx slots	22.49	22.47	22.57	23.00	16.49	16.47	16.57	17.00
EDGE 3 Tx slots	20.64	20.60	20.69	21.00	16.38	16.34	16.43	16.74
EDGE 4 Tx slots	19.27	19.24	19.32	20.00	16.27	16.24	16.32	17.00

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.
The calculated method are shown as below:
Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB
Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB
Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB
Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5
Note 1: Δ_{ACK}, Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{hs} = 24/15 * \beta_c$. Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases. Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.							

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 5) (Note 6)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 6: β_{ed} can not be set directly, it is set by Absolute Grant Value.

Setup Configuration


DC-HSDPA 3GPP release 8 Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set RMC 12.2Kbps + HSDPA mode.
 - ii. Set Cell Power = -25 dBm
 - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
 - iv. Select HSDPA Uplink Parameters
 - v. Set Gain Factors (β_c and β_d) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - a). Subtest 1: $\beta_c/\beta_d=2/15$
 - b). Subtest 2: $\beta_c/\beta_d=12/15$
 - c). Subtest 3: $\beta_c/\beta_d=15/8$
 - d). Subtest 4: $\beta_c/\beta_d=15/4$
 - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
 - vii. Set Ack-Nack Repetition Factor to 3
 - viii. Set CQI Feedback Cycle (k) to 4 ms
 - ix. Set CQI Repetition Factor to 2
 - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12
Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

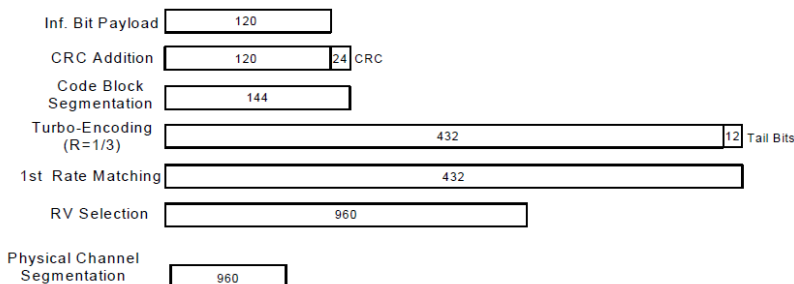
Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)
Setup Configuration

<WCDMA Conducted Power>
General Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. If the maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

Band		WCDMA II			Tune-up Limit (dBm)	WCDMA IV			Tune-up Limit (dBm)	WCDMA V			Tune-up Limit (dBm)
TX Channel		9262	9400	9538		1312	1413	1513		4132	4182	4233	
Rx Channel		9662	9800	9938		1537	1638	1738		4357	4407	4458	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6		826.4	836.4	846.6	
3GPP Rel 99	AMR 12.2Kbps	22.94	23.11	23.17	23.50	22.87	22.83	22.81	23.50	23.06	23.12	23.04	23.50
3GPP Rel 99	RMC 12.2Kbps	22.98	23.14	23.21	23.50	22.92	22.88	22.86	23.50	23.10	23.15	23.07	23.50
3GPP Rel 6	HSDPA Subtest-1	22.47	22.17	22.38	23.00	22.01	22.06	21.93	22.50	21.93	22.01	21.82	22.50
3GPP Rel 6	HSDPA Subtest-2	22.36	22.13	22.36	23.00	21.99	21.96	21.82	22.50	21.91	22.02	21.82	22.50
3GPP Rel 6	HSDPA Subtest-3	21.89	21.66	21.90	22.50	21.52	21.50	21.36	22.00	21.53	21.54	21.34	22.00
3GPP Rel 6	HSDPA Subtest-4	21.87	21.64	21.89	22.50	21.51	21.50	21.35	22.00	21.52	21.54	21.34	22.00
3GPP Rel 8	DC-HSDPA Subtest-1	21.98	22.08	22.26	23.00	21.89	21.93	21.87	22.50	22.03	22.02	22.35	22.50
3GPP Rel 8	DC-HSDPA Subtest-2	21.97	22.11	22.25	23.00	21.92	21.91	21.88	22.50	21.99	22.05	22.07	22.50
3GPP Rel 8	DC-HSDPA Subtest-3	21.35	21.58	21.79	22.50	21.36	21.40	21.37	22.00	21.53	21.51	21.63	22.00
3GPP Rel 8	DC-HSDPA Subtest-4	21.34	21.57	21.72	22.50	21.35	21.41	21.43	22.00	21.43	21.51	21.62	22.00
3GPP Rel 6	HSUPA Subtest-1	21.58	21.00	21.44	22.00	21.26	21.41	20.79	22.00	21.13	20.96	21.29	22.00
3GPP Rel 6	HSUPA Subtest-2	19.31	19.09	19.22	20.00	19.58	18.95	19.25	20.00	19.35	19.27	19.61	20.00
3GPP Rel 6	HSUPA Subtest-3	20.09	20.06	20.14	21.00	20.49	20.08	19.83	21.00	20.42	20.55	20.34	21.00
3GPP Rel 6	HSUPA Subtest-4	19.33	19.08	19.11	20.00	19.44	19.46	19.38	20.00	19.78	19.18	19.48	20.00
3GPP Rel 6	HSUPA Subtest-5	21.70	21.00	21.80	22.00	21.50	21.40	20.80	22.00	21.80	21.10	21.30	22.00

<LTE Conducted Power>**General Note:**

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B12 / B5 / B4 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE band 17 SAR test was covered by Band 12; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band



<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	22.41	22.67	22.78		
20	QPSK	1	49	22.60	23.14	22.80	24.00	0
20	QPSK	1	99	22.41	22.83	22.70	23.00	0-1
20	QPSK	50	0	21.62	21.89	21.75		
20	QPSK	50	24	21.60	21.87	21.75		
20	QPSK	50	50	21.65	21.93	21.80		
20	QPSK	100	0	21.67	21.85	21.75	23.00	0-1
20	16QAM	1	0	21.54	21.60	21.76		
20	16QAM	1	49	21.74	21.72	21.72		
20	16QAM	1	99	21.38	21.71	21.69	22.00	0-2
20	16QAM	50	0	20.49	20.71	20.76		
20	16QAM	50	24	20.41	20.78	20.76		
20	16QAM	50	50	20.62	20.62	20.73		
20	16QAM	100	0	20.59	20.80	20.61	Tune-up limit (dBm)	MPR (dB)
Channel				18675	18900	19125		
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	22.63	22.73	22.81	24.00	0
15	QPSK	1	37	22.78	22.92	22.99		
15	QPSK	1	74	22.53	22.76	22.79		
15	QPSK	36	0	21.56	21.83	21.79	23.00	0-1
15	QPSK	36	20	21.54	21.83	21.74		
15	QPSK	36	39	21.71	21.90	21.80		
15	QPSK	75	0	21.56	21.78	21.75		
15	16QAM	1	0	21.62	21.57	21.85	23.00	0-1
15	16QAM	1	37	21.61	21.71	21.83		
15	16QAM	1	74	21.34	21.74	21.76		
15	16QAM	36	0	20.64	20.73	20.73	22.00	0-2
15	16QAM	36	20	20.60	20.60	20.65		
15	16QAM	36	39	20.68	20.65	20.66		
15	16QAM	75	0	20.52	20.65	20.73		



Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	22.47	22.92	22.72	24.00	0
10	QPSK	1	25	22.39	22.97	23.06		
10	QPSK	1	49	22.27	22.70	22.74		
10	QPSK	25	0	21.58	21.81	21.79	23.00	0-1
10	QPSK	25	12	21.57	21.82	21.75		
10	QPSK	25	25	21.48	21.85	21.80		
10	QPSK	50	0	21.55	21.86	21.74	23.00	0-1
10	16QAM	1	0	21.60	21.60	21.64		
10	16QAM	1	25	21.38	22.19	21.76		
10	16QAM	1	49	21.42	21.73	21.79	22.00	0-2
10	16QAM	25	0	20.52	20.96	20.64		
10	16QAM	25	12	20.60	20.92	20.78		
10	16QAM	25	25	20.45	20.78	20.68	22.00	0-2
10	16QAM	50	0	20.44	20.69	20.70		
Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	22.48	22.66	22.71	24.00	0
5	QPSK	1	12	22.47	23.10	22.83		
5	QPSK	1	24	22.39	22.67	22.60		
5	QPSK	12	0	21.54	21.84	21.74	23.00	0-1
5	QPSK	12	7	21.51	21.87	21.77		
5	QPSK	12	13	21.52	21.78	21.71		
5	QPSK	25	0	21.48	21.93	21.78	23.00	0-1
5	16QAM	1	0	21.43	21.66	21.92		
5	16QAM	1	12	21.45	21.63	21.93		
5	16QAM	1	24	21.23	21.88	21.84	22.00	0-2
5	16QAM	12	0	20.43	20.66	20.62		
5	16QAM	12	7	20.45	20.64	20.79		
5	16QAM	12	13	20.48	20.51	20.83	22.00	0-2
5	16QAM	25	0	20.64	20.47	20.75		

Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	22.43	22.74	22.73	24.00	0
3	QPSK	1	8	22.40	22.58	22.85		
3	QPSK	1	14	22.37	22.81	22.83		
3	QPSK	8	0	21.45	21.87	21.86	23.00	0-1
3	QPSK	8	4	21.57	21.78	21.81		
3	QPSK	8	7	21.48	21.85	21.81		
3	QPSK	15	0	21.50	21.79	21.72	23.00	0-1
3	16QAM	1	0	21.54	21.58	21.71		
3	16QAM	1	8	21.66	21.66	21.68		
3	16QAM	1	14	21.65	21.74	21.83	22.00	0-2
3	16QAM	8	0	20.57	20.92	20.73		
3	16QAM	8	4	20.52	20.88	20.80		
3	16QAM	8	7	20.56	20.88	20.75	22.00	0-2
3	16QAM	15	0	20.27	20.65	20.46		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	22.38	22.77	22.67	24.00	0
1.4	QPSK	1	3	22.42	22.80	22.75		
1.4	QPSK	1	5	22.41	22.63	22.65		
1.4	QPSK	3	0	22.48	22.82	22.92		
1.4	QPSK	3	1	22.59	23.00	22.95		
1.4	QPSK	3	3	22.51	23.01	22.79	23.00	0-1
1.4	QPSK	6	0	21.44	21.80	21.73		
1.4	16QAM	1	0	21.49	21.78	21.97	23.00	0-1
1.4	16QAM	1	3	21.44	22.12	21.74		
1.4	16QAM	1	5	21.20	21.71	21.79		
1.4	16QAM	3	0	21.18	21.67	22.01		
1.4	16QAM	3	1	21.70	21.95	21.90		
1.4	16QAM	3	3	21.74	21.94	21.83	22.00	0-2
1.4	16QAM	6	0	20.26	20.71	20.61		



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300	24.00	0
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	23.18	23.30	23.27		
20	QPSK	1	49	22.93	23.10	23.12	23.00	0-1
20	QPSK	1	99	22.66	22.73	22.73		
20	QPSK	50	0	22.11	22.15	22.06		
20	QPSK	50	24	22.03	21.89	21.96	23.00	0-1
20	QPSK	50	50	21.94	21.82	21.89		
20	QPSK	100	0	22.05	22.08	21.89		
20	16QAM	1	0	22.24	22.26	21.99	23.00	0-1
20	16QAM	1	49	21.99	21.82	22.21		
20	16QAM	1	99	21.75	21.70	21.67		
20	16QAM	50	0	21.19	20.96	21.03	22.00	0-2
20	16QAM	50	24	20.94	20.83	20.90		
20	16QAM	50	50	20.93	20.73	20.91		
20	16QAM	100	0	21.01	20.85	20.97	24.00	0
Channel				20025	20175	20325		
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	23.22	23.02	23.06	24.00	0
15	QPSK	1	37	22.99	23.19	23.24		
15	QPSK	1	74	22.93	22.84	22.69		
15	QPSK	36	0	22.10	21.97	22.01	23.00	0-1
15	QPSK	36	20	22.04	21.89	21.97		
15	QPSK	36	39	21.94	21.87	21.96		
15	QPSK	75	0	21.97	21.85	21.92	23.00	0-1
15	16QAM	1	0	22.09	21.82	21.86		
15	16QAM	1	37	22.18	22.16	22.22		
15	16QAM	1	74	21.79	21.62	21.70	22.00	0-2
15	16QAM	36	0	21.12	20.94	21.00		
15	16QAM	36	20	21.01	20.89	20.90		
15	16QAM	36	39	20.97	20.76	20.87	22.00	0-2
15	16QAM	75	0	21.02	20.75	20.92		



Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	23.15	22.87	22.98	24.00	0
10	QPSK	1	25	22.90	23.02	22.79		
10	QPSK	1	49	22.84	22.70	22.90		
10	QPSK	25	0	22.08	21.89	21.99	23.00	0-1
10	QPSK	25	12	22.00	21.87	21.91		
10	QPSK	25	25	22.00	21.82	21.82		
10	QPSK	50	0	22.03	21.82	21.91	23.00	0-1
10	16QAM	1	0	22.03	21.65	22.24		
10	16QAM	1	25	22.39	22.05	22.12		
10	16QAM	1	49	21.95	21.92	21.77	22.00	0-2
10	16QAM	25	0	21.12	20.87	21.00		
10	16QAM	25	12	20.92	20.87	20.90		
10	16QAM	25	25	21.15	20.84	20.83	20.95	20.73
10	16QAM	50	0	20.95	20.73	20.92		
Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	22.87	22.68	23.01	24.00	0
5	QPSK	1	12	23.07	22.94	23.06		
5	QPSK	1	24	22.94	22.67	22.70		
5	QPSK	12	0	22.00	21.86	21.94	23.00	0-1
5	QPSK	12	7	22.05	21.82	21.92		
5	QPSK	12	13	22.00	21.87	21.87		
5	QPSK	25	0	21.99	21.84	21.86	23.00	0-1
5	16QAM	1	0	21.82	21.71	21.79		
5	16QAM	1	12	22.27	21.73	21.97		
5	16QAM	1	24	22.22	21.93	21.68	22.00	0-2
5	16QAM	12	0	21.02	20.79	20.84		
5	16QAM	12	7	20.99	20.91	20.85		
5	16QAM	12	13	21.10	20.84	20.78	20.84	21.00
5	16QAM	25	0	20.84	21.00	20.89		

Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	23.15	22.94	22.86	24.00	0
3	QPSK	1	8	23.11	22.98	22.82		
3	QPSK	1	14	23.11	23.02	22.74		
3	QPSK	8	0	22.07	21.91	21.98	23.00	0-1
3	QPSK	8	4	22.12	21.92	21.83		
3	QPSK	8	7	22.11	21.91	21.72		
3	QPSK	15	0	22.02	21.80	21.71		
3	16QAM	1	0	22.31	22.19	21.66	23.00	0-1
3	16QAM	1	8	22.32	22.27	21.76		
3	16QAM	1	14	22.37	21.67	21.61		
3	16QAM	8	0	21.08	21.03	20.79	22.00	0-2
3	16QAM	8	4	21.14	20.89	20.74		
3	16QAM	8	7	21.04	20.65	20.75		
3	16QAM	15	0	21.02	20.71	20.67		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	22.88	22.87	22.79	24.00	0
1.4	QPSK	1	3	22.98	22.89	22.78		
1.4	QPSK	1	5	23.13	22.91	22.77		
1.4	QPSK	3	0	23.08	22.90	22.74		
1.4	QPSK	3	1	22.95	22.96	22.86		
1.4	QPSK	3	3	23.08	23.08	22.81		
1.4	QPSK	6	0	21.98	21.82	21.74	23.00	0-1
1.4	16QAM	1	0	22.23	21.60	21.70	23.00	0-1
1.4	16QAM	1	3	22.25	21.90	21.67		
1.4	16QAM	1	5	22.32	21.69	21.62		
1.4	16QAM	3	0	21.81	21.81	21.97		
1.4	16QAM	3	1	22.02	22.10	21.76		
1.4	16QAM	3	3	22.25	22.02	21.98		
1.4	16QAM	6	0	20.95	20.94	20.56	22.00	0-2

<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600	24.00	0
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	22.77	22.78	22.79		
10	QPSK	1	25	22.93	23.15	22.90	23.00	0-1
10	QPSK	1	49	22.76	22.67	22.75		
10	QPSK	25	0	22.00	22.05	21.95		
10	QPSK	25	12	21.96	21.96	21.90	23.00	0-1
10	QPSK	25	25	21.98	21.92	21.92		
10	QPSK	50	0	21.93	22.02	22.01		
10	16QAM	1	0	21.70	21.69	21.74	23.00	0-1
10	16QAM	1	25	21.93	21.96	21.70		
10	16QAM	1	49	21.78	21.69	21.84		
10	16QAM	25	0	20.93	20.94	20.80	22.00	0-2
10	16QAM	25	12	20.91	20.87	20.91		
10	16QAM	25	25	20.85	20.96	20.83		
10	16QAM	50	0	20.87	20.95	20.81	24.00	0
Channel				20425	20525	20625		
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	22.73	22.83	22.91	24.00	0
5	QPSK	1	12	22.95	23.10	22.98		
5	QPSK	1	24	22.65	22.78	22.79		
5	QPSK	12	0	21.97	21.91	22.09	23.00	0-1
5	QPSK	12	7	22.04	21.93	22.07		
5	QPSK	12	13	21.96	21.97	22.06		
5	QPSK	25	0	21.99	21.94	22.00	23.00	0-1
5	16QAM	1	0	21.67	21.75	21.80		
5	16QAM	1	12	21.84	21.76	21.89		
5	16QAM	1	24	21.79	21.68	21.83	22.00	0-2
5	16QAM	12	0	20.96	20.71	20.92		
5	16QAM	12	7	20.97	20.82	20.87		
5	16QAM	12	13	20.77	20.75	20.82	22.00	0-2
5	16QAM	25	0	20.95	20.94	21.03		

Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	22.88	22.87	22.87	24.00	0
3	QPSK	1	8	22.83	22.90	23.06		
3	QPSK	1	14	22.98	22.89	22.86		
3	QPSK	8	0	22.02	22.06	22.02	23.00	0-1
3	QPSK	8	4	22.03	22.01	22.11		
3	QPSK	8	7	22.08	22.00	22.12		
3	QPSK	15	0	22.02	21.95	22.18	23.00	0-1
3	16QAM	1	0	21.58	21.60	21.71		
3	16QAM	1	8	21.85	21.99	21.86		
3	16QAM	1	14	21.70	21.68	21.95	22.00	0-2
3	16QAM	8	0	21.22	20.94	20.93		
3	16QAM	8	4	21.18	21.08	21.09		
3	16QAM	8	7	21.01	20.99	21.16	22.00	0-2
3	16QAM	15	0	20.93	20.99	21.01		
Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	22.85	22.73	23.09	24.00	0
1.4	QPSK	1	3	22.93	22.83	23.04		
1.4	QPSK	1	5	22.96	22.65	23.03		
1.4	QPSK	3	0	22.80	22.97	23.02		
1.4	QPSK	3	1	22.98	23.00	23.01		
1.4	QPSK	3	3	22.93	22.93	23.08	23.00	0-1
1.4	QPSK	6	0	21.93	21.96	22.08		
1.4	16QAM	1	0	21.76	21.86	21.92	23.00	0-1
1.4	16QAM	1	3	21.71	21.81	21.90		
1.4	16QAM	1	5	21.90	21.79	21.90		
1.4	16QAM	3	0	21.86	21.86	22.06		
1.4	16QAM	3	1	21.94	21.55	22.11		
1.4	16QAM	3	3	22.08	22.01	22.08	22.00	0-2
1.4	16QAM	6	0	20.78	20.89	20.90		



<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Measured Power			Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	23.00	23.02	23.25	24.00	0
20	QPSK	1	49	23.52	23.26	23.78		
20	QPSK	1	99	23.21	23.04	23.22		
20	QPSK	50	0	22.38	22.36	22.52	23.00	0-1
20	QPSK	50	24	22.24	22.24	22.48		
20	QPSK	50	50	22.19	22.29	22.34		
20	QPSK	100	0	22.20	22.23	22.49	23.00	0-1
20	16QAM	1	0	21.94	21.42	22.18		
20	16QAM	1	49	22.29	21.90	22.36		
20	16QAM	1	99	22.04	21.98	22.13	22.00	0-2
20	16QAM	50	0	21.28	21.27	21.19		
20	16QAM	50	24	21.16	20.99	21.43		
20	16QAM	50	50	21.13	21.17	21.32	22.00	0-2
20	16QAM	100	0	21.07	21.04	21.40		
Channel				20825	21100	21375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	23.57	23.22	23.37		
15	QPSK	1	37	23.57	23.26	23.42	24.00	0
15	QPSK	1	74	23.62	23.18	23.32		
15	QPSK	36	0	22.32	22.30	22.50	23.00	0-1
15	QPSK	36	20	22.50	22.30	22.53		
15	QPSK	36	39	22.50	22.33	22.43		
15	QPSK	75	0	22.47	22.28	22.51	23.00	0-1
15	16QAM	1	0	22.37	22.03	22.29		
15	16QAM	1	37	22.01	22.14	22.19		
15	16QAM	1	74	22.23	21.90	22.14	22.00	0-2
15	16QAM	36	0	21.23	21.10	21.34		
15	16QAM	36	20	21.37	21.13	21.44		
15	16QAM	36	39	21.47	21.28	21.29	22.00	0-2
15	16QAM	75	0	21.36	21.18	21.50		

Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	23.37	23.06	23.26	24.00	0
10	QPSK	1	25	23.44	23.08	23.18		
10	QPSK	1	49	23.49	22.96	23.27		
10	QPSK	25	0	22.32	22.31	22.50	23.00	0-1
10	QPSK	25	12	22.32	22.29	22.46		
10	QPSK	25	25	22.46	22.26	22.47		
10	QPSK	50	0	22.43	22.29	22.44	23.00	0-1
10	16QAM	1	0	22.21	22.08	22.29		
10	16QAM	1	25	22.11	22.30	22.19		
10	16QAM	1	49	22.23	21.71	21.75	22.00	0-2
10	16QAM	25	0	21.35	21.23	21.48		
10	16QAM	25	12	21.31	21.18	21.38		
10	16QAM	25	25	21.37	21.19	21.35	22.00	0-2
10	16QAM	50	0	21.28	21.20	21.38		
Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	23.00	22.94	23.13	24.00	0
5	QPSK	1	12	23.57	23.12	23.29		
5	QPSK	1	24	23.00	22.86	23.03		
5	QPSK	12	0	22.46	22.18	22.43	23.00	0-1
5	QPSK	12	7	22.43	22.22	22.34		
5	QPSK	12	13	22.34	22.21	22.36		
5	QPSK	25	0	22.27	22.21	22.38	23.00	0-1
5	16QAM	1	0	22.17	21.99	21.92		
5	16QAM	1	12	21.84	21.89	21.85		
5	16QAM	1	24	21.94	21.89	21.65	22.00	0-2
5	16QAM	12	0	21.31	20.90	21.09		
5	16QAM	12	7	21.30	20.96	21.06		
5	16QAM	12	13	21.20	21.07	21.12	22.00	0-2
5	16QAM	25	0	21.23	21.24	21.06		

<LTE Band 12>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23060	23095	23130	24.00	0
Frequency (MHz)				704	707.5	711		
10	QPSK	1	0	22.57	22.92	22.80		
10	QPSK	1	25	23.30	23.35	23.26	23.00	0-1
10	QPSK	1	49	22.68	22.70	22.68		
10	QPSK	25	0	21.93	22.02	22.01		
10	QPSK	25	12	22.10	22.15	22.07	23.00	0-1
10	QPSK	25	25	22.01	21.99	22.00		
10	QPSK	50	0	22.10	22.12	22.06		
10	16QAM	1	0	21.82	21.68	22.11	23.00	0-1
10	16QAM	1	25	21.87	21.77	21.78		
10	16QAM	1	49	21.75	21.75	21.80		
10	16QAM	25	0	20.93	20.98	21.17	22.00	0-2
10	16QAM	25	12	21.27	21.12	21.08		
10	16QAM	25	25	20.99	20.96	21.23		
10	16QAM	50	0	21.00	20.94	21.03	24.00	0
Channel				23035	23095	23155		
Frequency (MHz)				701.5	707.5	713.5		
5	QPSK	1	0	22.60	23.02	22.76	24.00	0
5	QPSK	1	12	23.33	23.12	23.27		
5	QPSK	1	24	22.90	22.56	22.56		
5	QPSK	12	0	22.04	21.95	21.98	23.00	0-1
5	QPSK	12	7	22.05	21.95	22.02		
5	QPSK	12	13	21.97	21.98	21.99		
5	QPSK	25	0	21.97	22.00	21.95	23.00	0-1
5	16QAM	1	0	21.86	21.80	21.67		
5	16QAM	1	12	21.73	21.70	21.72		
5	16QAM	1	24	21.88	21.68	21.68	22.00	0-2
5	16QAM	12	0	21.12	21.07	21.04		
5	16QAM	12	7	21.11	21.04	21.00		
5	16QAM	12	13	21.11	20.93	20.90	22.00	0-2
5	16QAM	25	0	20.94	20.97	21.11		



Channel				23025	23095	23165	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				700.5	707.5	714.5		
3	QPSK	1	0	22.93	22.91	23.01	24.00	0
3	QPSK	1	8	22.90	22.86	23.07		
3	QPSK	1	14	22.86	22.63	22.67		
3	QPSK	8	0	22.02	21.93	22.02	23.00	0-1
3	QPSK	8	4	21.92	21.92	22.01		
3	QPSK	8	7	21.91	21.98	22.03		
3	QPSK	15	0	21.88	21.94	21.93	23.00	0-1
3	16QAM	1	0	21.57	21.80	21.82		
3	16QAM	1	8	22.05	21.63	21.62		
3	16QAM	1	14	21.78	21.70	21.52	22.00	0-2
3	16QAM	8	0	21.37	21.11	20.95		
3	16QAM	8	4	21.16	20.83	21.00		
3	16QAM	8	7	21.08	20.89	21.03	20.93	20.93
3	16QAM	15	0	20.93	20.58	20.93		
Channel				23017	23095	23173	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				699.7	707.5	715.3		
1.4	QPSK	1	0	22.98	22.75	23.10	24.00	0
1.4	QPSK	1	3	23.00	22.74	22.97		
1.4	QPSK	1	5	22.87	23.06	23.06		
1.4	QPSK	3	0	23.05	23.22	23.25		
1.4	QPSK	3	1	23.20	23.18	23.21		
1.4	QPSK	3	3	22.94	22.93	23.08	23.00	0-1
1.4	QPSK	6	0	21.98	22.00	22.06		
1.4	16QAM	1	0	21.99	21.82	21.93	23.00	0-1
1.4	16QAM	1	3	21.84	21.83	21.91		
1.4	16QAM	1	5	21.97	21.87	21.95		
1.4	16QAM	3	0	21.92	22.05	21.91		
1.4	16QAM	3	1	22.28	22.11	22.09		
1.4	16QAM	3	3	22.31	22.07	21.94	22.00	0-2
1.4	16QAM	6	0	21.00	20.85	20.87		



<LTE Band 17>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23780	23790	23800		
Frequency (MHz)				709	710	711		
10	QPSK	1	0	22.71	22.75	22.60		
10	QPSK	1	25	22.58	22.44	22.59	24.00	0
10	QPSK	1	49	22.70	22.59	22.43		
10	QPSK	25	0	21.81	21.85	21.61		
10	QPSK	25	12	21.78	21.61	21.59	23.00	0-1
10	QPSK	25	25	21.68	21.63	21.52		
10	QPSK	50	0	21.69	21.70	21.67		
10	16QAM	1	0	21.39	21.40	21.43	23.00	0-1
10	16QAM	1	25	21.69	21.47	21.49		
10	16QAM	1	49	21.49	21.78	21.43		
10	16QAM	25	0	20.86	20.70	20.76	22.00	0-2
10	16QAM	25	12	20.92	20.75	20.65		
10	16QAM	25	25	20.75	20.84	20.64		
10	16QAM	50	0	20.74	20.68	20.73		
Channel				23755	23790	23825	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				706.5	710	713.5		
5	QPSK	1	0	22.49	22.38	22.47	24.00	0
5	QPSK	1	12	22.58	22.70	22.54		
5	QPSK	1	24	22.38	22.39	22.14		
5	QPSK	12	0	21.66	21.56	21.50	23.00	0-1
5	QPSK	12	7	21.60	21.70	21.50		
5	QPSK	12	13	21.62	21.59	21.53		
5	QPSK	25	0	21.66	21.63	21.50		
5	16QAM	1	0	21.40	21.35	21.60	23.00	0-1
5	16QAM	1	12	21.45	21.36	21.20		
5	16QAM	1	24	21.31	21.32	21.14		
5	16QAM	12	0	20.66	20.44	20.62	22.00	0-2
5	16QAM	12	7	20.56	20.77	20.53		
5	16QAM	12	13	20.58	20.66	20.54		
5	16QAM	25	0	20.82	20.67	20.61		

<LTE Band 30>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				27710				
Frequency (MHz)				2310				
10	QPSK	1	0	23.19			24.00	0
10	QPSK	1	25	23.45				
10	QPSK	1	49	23.00				
10	QPSK	25	0	22.44			23.00	0-1
10	QPSK	25	12	22.41				
10	QPSK	25	25	22.30				
10	QPSK	50	0	22.41			23.00	0-1
10	16QAM	1	0	22.29				
10	16QAM	1	25	22.31				
10	16QAM	1	49	22.19			22.00	0-2
10	16QAM	25	0	21.48				
10	16QAM	25	12	21.30				
10	16QAM	25	25	21.30			22.00	0-2
10	16QAM	50	0	21.23				
Channel				27685	27710	27735	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2307.5	2310	2312.5		
5	QPSK	1	0	22.98	23.37	23.16	24.00	0
5	QPSK	1	12	23.40	23.42	23.41		
5	QPSK	1	24	23.15	23.02	23.03		
5	QPSK	12	0	22.35	22.48	22.37	23.00	0-1
5	QPSK	12	7	22.42	22.49	22.35		
5	QPSK	12	13	22.32	22.31	22.39		
5	QPSK	25	0	22.37	22.44	22.31	23.00	0-1
5	16QAM	1	0	21.56	22.12	21.98		
5	16QAM	1	12	22.09	22.15	21.98		
5	16QAM	1	24	21.99	22.04	22.06	22.00	0-2
5	16QAM	12	0	21.12	21.22	21.30		
5	16QAM	12	7	21.30	21.43	21.28		
5	16QAM	12	13	21.19	21.39	21.27	22.00	0-2
5	16QAM	25	0	21.18	21.42	21.36		

<WLAN Conducted Power>**General Note:**

1. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
2. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
3. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
4. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.18 The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.

<2.4GHz WLAN>

2.4GHz WLAN	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
	802.11b	CH 1	2412	1Mbps	16.80	17.00	98.78
		CH 6	2437		16.57	17.00	
		CH 11	2462		16.83	17.00	
	802.11g	CH 1	2412	6Mbps	15.11	15.50	93.22
		CH 6	2437		14.92	15.50	
		CH 11	2462		14.97	15.50	
	802.11n-HT20	CH 1	2412	MCS0	15.25	15.50	93.31
		CH 6	2437		15.01	15.50	
		CH 11	2462		14.97	15.50	

<5GHz WLAN>

	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11a	CH 36	5180	6Mbps	12.05	12.50	92.71
		CH 40	5200		11.65	12.50	
		CH 44	5220		11.99	12.50	
		CH 48	5240		12.03	12.50	
	802.11n-HT20	CH 36	5180	MCS0	12.07	12.50	92.35
		CH 40	5200		11.76	12.00	
		CH 44	5220		11.98	12.50	
		CH 48	5240		12.03	12.50	
	802.11n-HT40	CH 38	5190	MCS0	12.57	13.00	86.20
		CH 46	5230		12.54	13.00	
	802.11ac-VHT20	CH 36	5180	MCS0	12.50	13.00	82.98
		CH 40	5200		11.74	12.00	
		CH 44	5220		12.45	13.00	
		CH 48	5240		12.49	13.00	
	802.11ac-VHT40	CH 38	5190	MCS0	11.52	12.00	71.08
		CH 46	5230		11.55	12.00	
	802.11ac-VHT80	CH 42	5210	MCS0	10.81	11.50	55.36

	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN	802.11a	CH 52	5260	6Mbps	11.81	12.50	92.71
		CH 56	5280		11.87	12.50	
		CH 60	5300		11.97	12.50	
		CH 64	5320		11.86	12.50	
	802.11n-HT20	CH 52	5260	MCS0	12.02	12.50	92.35
		CH 56	5280		11.67	12.50	
		CH 60	5300		12.15	12.50	
		CH 64	5320		11.92	12.50	
	802.11n-HT40	CH 54	5270	MCS0	12.52	13.00	86.20
		CH 62	5310		12.49	13.00	
	802.11ac-VHT20	CH 52	5260	MCS0	12.47	13.00	82.98
		CH 56	5280		11.64	12.00	
		CH 60	5300		12.59	13.00	
		CH 64	5320		12.40	13.00	
	802.11ac-VHT40	CH 54	5270	MCS0	11.49	12.00	71.08
		CH 62	5310		11.51	12.00	
	802.11ac-VHT80	CH 58	5290	MCS0	10.86	11.00	55.36

	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.5GHz WLAN	802.11a	CH 100	5500	6Mbps	11.85	12.00	92.71
		CH 116	5580		11.72	12.00	
		CH 120	5600		11.72	12.00	
		CH 124	5620		11.35	12.00	
		CH 140	5700		11.51	12.00	
		CH 144	5720		11.66	12.00	
	802.11n-HT20	CH 100	5500	MCS0	11.90	12.50	92.35
		CH 116	5580		11.69	12.00	
		CH 120	5600		11.69	12.50	
		CH 124	5620		11.35	12.50	
		CH 140	5700		11.51	12.50	
		CH 144	5720		11.74	12.50	
	802.11n-HT40	CH 102	5510	MCS0	12.40	13.00	86.20
		CH 118	5590		12.24	13.00	
		CH 126	5630		11.35	13.00	
		CH 134	5670		12.06	13.00	
		CH 142	5710		11.96	13.00	
	802.11ac-VHT20	CH 100	5500	MCS0	12.34	12.50	82.98
		CH 116	5580		12.16	12.50	
		CH 120	5600		12.16	12.50	
		CH 124	5620		11.36	12.50	
		CH 140	5700		12.04	12.50	
		CH 144	5720		11.59	12.50	
	802.11ac-VHT40	CH 102	5510	MCS0	11.34	12.00	71.08
		CH 118	5590		11.03	12.00	
		CH 126	5630		11.33	12.00	
		CH 134	5670		10.94	12.00	
		CH 142	5710		10.73	12.00	
	802.11ac-VHT80	CH 106	5530	MCS0	10.51	11.00	55.36
		CH 122	5610		10.26	11.00	
		CH 138	5690		9.84	11.00	

	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.8GHz WLAN	802.11a	CH 149	5745	6M bps	11.41	12.00	92.71
		CH 157	5785		11.37	12.00	
		CH 165	5825		11.34	12.00	
	802.11n-HT20	CH 149	5745	MCS0	11.45	12.00	92.35
		CH 157	5785		11.47	12.00	
		CH 165	5825		11.40	12.00	
	802.11n-HT40	CH 151	5755	MCS0	11.95	12.50	86.20
		CH 159	5795		11.99	12.50	
	802.11ac-VHT20	CH 149	5745	MCS0	11.88	12.00	82.98
		CH 157	5785		11.86	12.00	
		CH 165	5825		11.79	12.00	
	802.11ac-VHT40	CH 151	5755	MCS0	10.84	11.50	71.08
		CH 159	5795		10.94	11.50	
	802.11ac-VHT80	CH 155	5775	MCS0	10.29	10.50	55.36


<2.4GHz Bluetooth>
General Note:

1. For 2.4GHz Bluetooth SAR testing was selected 1Mbps, due to its highest average power.
2. The duty factor is selected theoretical 83.3% perform Bluetooth SAR testing.

Mode	Channel	Frequency (MHz)	Average power (dBm)		
			1Mbps	2Mbps	3Mbps
v3.0 with EDR	CH 00	2402	9.79	7.70	6.73
	CH 39	2441	11.05	8.94	8.97
	CH 78	2480	10.73	8.64	8.66
Tune-up Limit			11.5		

Mode	Channel	Frequency (MHz)	Average power (dBm)	
			GFSK	
v4.0 with LE	CH 00	2402	-0.87	
	CH 19	2440	0.18	
	CH 39	2480	-0.29	
Tune-up Limit			0.5	

13. Antenna Location

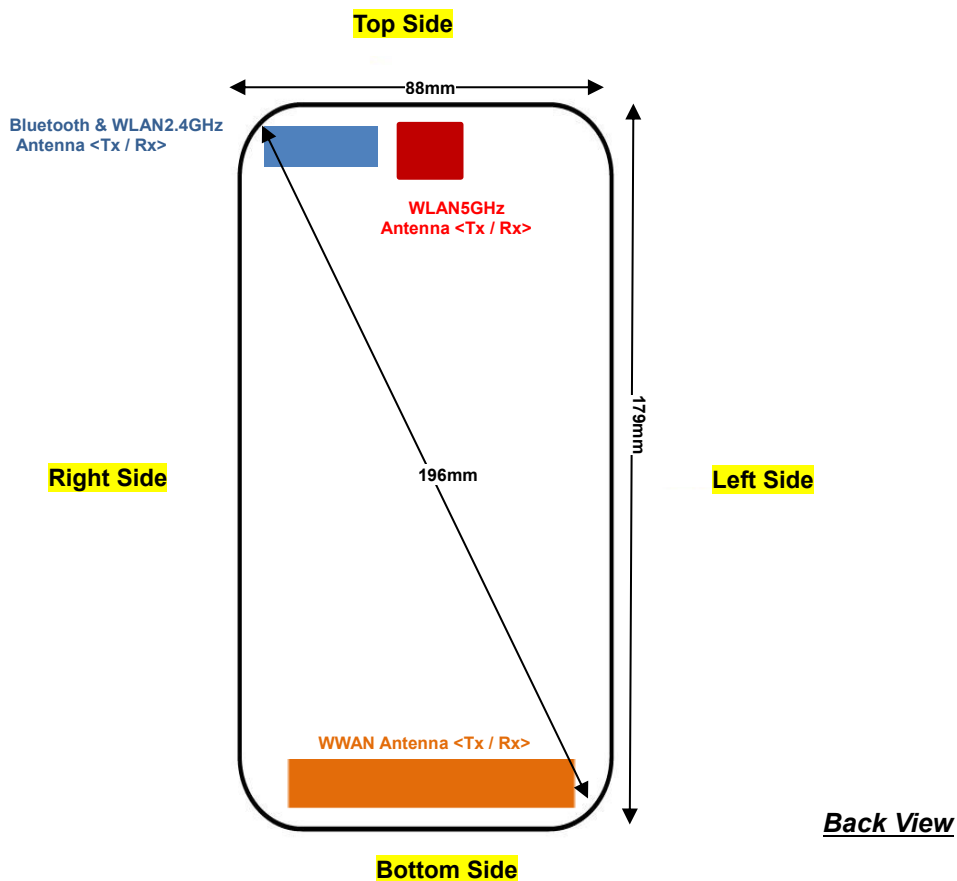

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Main	≤ 25mm	≤ 25mm	172mm	≤ 25mm	≤ 25mm	≤ 25mm
BT&WLAN2.4GHz	≤ 25mm	≤ 25mm	≤ 25mm	175mm	≤ 25mm	57mm
WLAN5GHz	≤ 25mm	≤ 25mm	≤ 25mm	175mm	40.mm	40.mm

Positions for SAR tests; Hotspot mode						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Main	Yes	Yes	No	Yes	Yes	Yes
BT&WLAN2.4GHz	Yes	Yes	Yes	No	Yes	No
WLAN5GHz	Yes	Yes	Yes	No	No	No

General Note:

- Referring to KDB 941225 D06 v02r01, when the overall device length and width are $\geq 9\text{cm} \times 5\text{cm}$, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge

14. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WWAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - d. For WLAN: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 648474 D04v01r03, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is ≤ 1.2 W/kg, SAR testing with a headset connected to the handset is not required.
4. Per KDB648474 D04v01r03, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm, when hotspot mode applies, 10-g Product specific 10g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg, however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold. All hotspot reported SAR are less than 1.2 W/Kg, so no need evaluate Product specific 10g SAR; for WLAN5GHz does not support hotspot function, so Product specific 10g SAR full test.

GSM Note:

1. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (2Tx slots) for GSM850 and the GPRS (4Tx slots) for GSM1900 are considered as the primary mode.
2. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.

UMTS Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2 kbps setting is used to evaluate SAR. If the maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2 Kbps or when the highest reported SAR of the RMC 12.2 Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC 12.2 Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

LTE Note:

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B12 / B5 / B4 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
7. LTE band 17 SAR test was covered by Band 12; according to TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. The maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion.
 - b. The channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band.

WLAN Note:

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. Per KDB 248227 D01v02r02, for U-NII-1 Head and Body-worn SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band.
3. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
5. During SAR testing the WLAN transmission was verified using a spectrum analyzer.

14.1 Head SAR
<GSM SAR>

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS(2 Tx slots)	Right Cheek	128	824.2	29.94	30.50	1.138	-0.06	0.142	0.162
	GSM850	GPRS(2 Tx slots)	Right Tilted	128	824.2	29.94	30.50	1.138	-0.15	0.070	0.080
	GSM850	GPRS(2 Tx slots)	Left Cheek	128	824.2	29.94	30.50	1.138	-0.09	0.133	0.151
	GSM850	GPRS(2 Tx slots)	Left Tilted	128	824.2	29.94	30.50	1.138	0.14	0.082	0.093
	GSM850	GPRS(2 Tx slots)	Right Cheek	189	836.4	29.87	30.50	1.156	-0.06	0.161	0.186
01	GSM850	GPRS(2 Tx slots)	Right Cheek	251	848.8	29.86	30.50	1.159	0.1	0.177	0.205
	GSM1900	GPRS(4 Tx slots)	Right Cheek	810	1909.8	24.57	25.00	1.104	0.11	0.070	0.077
	GSM1900	GPRS(4 Tx slots)	Right Tilted	810	1909.8	24.57	25.00	1.104	0.03	0.056	0.062
	GSM1900	GPRS(4 Tx slots)	Left Cheek	810	1909.8	24.57	25.00	1.104	0.05	0.113	0.125
	GSM1900	GPRS(4 Tx slots)	Left Tilted	810	1909.8	24.57	25.00	1.104	0.1	0.040	0.044
02	GSM1900	GPRS(4 Tx slots)	Left Cheek	512	1850.2	24.53	25.00	1.114	0.07	0.132	0.147
	GSM1900	GPRS(4 Tx slots)	Left Cheek	661	1880	24.50	25.00	1.122	0.18	0.116	0.130

**<WCDMA SAR>**

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA Band V	RMC 12.2Kbps	Right Cheek	4182	836.4	23.15	23.50	1.084	-0.06	0.092	0.100
	WCDMA Band V	RMC 12.2Kbps	Right Tilted	4182	836.4	23.15	23.50	1.084	-0.06	0.046	0.050
	WCDMA Band V	RMC 12.2Kbps	Left Cheek	4182	836.4	23.15	23.50	1.084	0.11	0.083	0.090
	WCDMA Band V	RMC 12.2Kbps	Left Tilted	4182	836.4	23.15	23.50	1.084	-0.19	0.068	0.074
	WCDMA Band V	RMC 12.2Kbps	Right Cheek	4132	826.4	23.10	23.50	1.096	-0.06	0.094	0.103
03	WCDMA Band V	RMC 12.2Kbps	Right Cheek	4233	846.6	23.07	23.50	1.104	-0.02	0.107	0.118
	WCDMA Band IV	RMC 12.2Kbps	Right Cheek	1312	1712.4	22.92	23.50	1.143	0.17	0.088	0.101
	WCDMA Band IV	RMC 12.2Kbps	Right Tilted	1312	1712.4	22.92	23.50	1.143	-0.12	0.082	0.094
	WCDMA Band IV	RMC 12.2Kbps	Left Cheek	1312	1712.4	22.92	23.50	1.143	0.05	0.162	0.185
	WCDMA Band IV	RMC 12.2Kbps	Left Tilted	1312	1712.4	22.92	23.50	1.143	0.08	0.072	0.082
	WCDMA Band IV	RMC 12.2Kbps	Left Cheek	1413	1732.6	22.88	23.50	1.153	0.09	0.162	0.187
04	WCDMA Band IV	RMC 12.2Kbps	Left Cheek	1513	1752.6	22.86	23.50	1.159	0.13	0.162	0.188
	WCDMA Band II	RMC 12.2Kbps	Right Cheek	9538	1907.6	23.21	23.50	1.069	0.07	0.110	0.118
	WCDMA Band II	RMC 12.2Kbps	Right Tilted	9538	1907.6	23.21	23.50	1.069	0.04	0.098	0.105
05	WCDMA Band II	RMC 12.2Kbps	Left Cheek	9538	1907.6	23.21	23.50	1.069	-0.09	0.223	0.238
	WCDMA Band II	RMC 12.2Kbps	Left Tilted	9538	1907.6	23.21	23.50	1.069	0.04	0.061	0.065
	WCDMA Band II	RMC 12.2Kbps	Left Cheek	9262	1852.4	22.98	23.50	1.127	0.06	0.184	0.207
	WCDMA Band II	RMC 12.2Kbps	Left Cheek	9400	1880	23.14	23.50	1.086	0.09	0.192	0.209



<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
06	LTE Band 12	10M	QPSK	1RB	25Offset	Right Cheek	23095	707.5	23.35	24.00	1.161	-0.01	0.098	0.114
	LTE Band 12	10M	QPSK	1RB	25Offset	Right Tilted	23095	707.5	23.35	24.00	1.161	0.08	0.054	0.063
	LTE Band 12	10M	QPSK	1RB	25Offset	Left Cheek	23095	707.5	23.35	24.00	1.161	-0.02	0.093	0.108
	LTE Band 12	10M	QPSK	1RB	25Offset	Left Tilted	23095	707.5	23.35	24.00	1.161	0.01	0.047	0.055
	LTE Band 12	10M	QPSK	25RB	12Offset	Right Cheek	23095	707.5	22.15	23.00	1.216	-0.13	0.077	0.094
	LTE Band 12	10M	QPSK	25RB	12Offset	Right Tilted	23095	707.5	22.15	23.00	1.216	-0.19	0.043	0.052
	LTE Band 12	10M	QPSK	25RB	12Offset	Left Cheek	23095	707.5	22.15	23.00	1.216	0.03	0.073	0.089
	LTE Band 12	10M	QPSK	25RB	12Offset	Left Tilted	23095	707.5	22.15	23.00	1.216	0.06	0.037	0.045
07	LTE Band 5	10M	QPSK	1RB	25Offset	Right Cheek	20525	836.5	23.15	24.00	1.216	-0.15	0.159	0.193
	LTE Band 5	10M	QPSK	1RB	25Offset	Right Tilted	20525	836.5	23.15	24.00	1.216	0.02	0.077	0.094
	LTE Band 5	10M	QPSK	1RB	25Offset	Left Cheek	20525	836.5	23.15	24.00	1.216	-0.05	0.134	0.163
	LTE Band 5	10M	QPSK	1RB	25Offset	Left Tilted	20525	836.5	23.15	24.00	1.216	0.16	0.076	0.092
	LTE Band 5	10M	QPSK	25RB	0Offset	Right Cheek	20525	836.5	22.05	23.00	1.245	-0.04	0.123	0.153
	LTE Band 5	10M	QPSK	25RB	0Offset	Right Tilted	20525	836.5	22.05	23.00	1.245	-0.12	0.064	0.080
	LTE Band 5	10M	QPSK	25RB	0Offset	Left Cheek	20525	836.5	22.05	23.00	1.245	0.02	0.104	0.129
	LTE Band 5	10M	QPSK	25RB	0Offset	Left Tilted	20525	836.5	22.05	23.00	1.245	0.08	0.058	0.072
	LTE Band 4	20M	QPSK	1RB	0Offset	Right Cheek	20175	1732.5	23.30	24.00	1.175	0.09	0.155	0.182
	LTE Band 4	20M	QPSK	1RB	0Offset	Right Tilted	20175	1732.5	23.30	24.00	1.175	0.01	0.143	0.168
08	LTE Band 4	20M	QPSK	1RB	0Offset	Left Cheek	20175	1732.5	23.30	24.00	1.175	0.08	0.241	0.283
	LTE Band 4	20M	QPSK	1RB	0Offset	Left Tilted	20175	1732.5	23.30	24.00	1.175	-0.08	0.116	0.136
	LTE Band 4	20M	QPSK	50RB	0Offset	Right Cheek	20175	1732.5	22.15	23.00	1.216	0.08	0.121	0.147
	LTE Band 4	20M	QPSK	50RB	0Offset	Right Tilted	20175	1732.5	22.15	23.00	1.216	0.09	0.115	0.140
	LTE Band 4	20M	QPSK	50RB	0Offset	Left Cheek	20175	1732.5	22.15	23.00	1.216	0.09	0.196	0.238
	LTE Band 4	20M	QPSK	50RB	0Offset	Left Tilted	20175	1732.5	22.15	23.00	1.216	0.05	0.090	0.109
	LTE Band 2	20M	QPSK	1RB	49Offset	Right Cheek	18900	1880	23.14	24.00	1.219	-0.08	0.183	0.223
	LTE Band 2	20M	QPSK	1RB	49Offset	Right Tilted	18900	1880	23.14	24.00	1.219	0.04	0.139	0.169
09	LTE Band 2	20M	QPSK	1RB	49Offset	Left Cheek	18900	1880	23.14	24.00	1.219	0.05	0.281	0.343
	LTE Band 2	20M	QPSK	1RB	49Offset	Left Tilted	18900	1880	23.14	24.00	1.219	0.14	0.107	0.130
	LTE Band 2	20M	QPSK	1RB	49Offset	Left Cheek	18700	1860	22.60	24.00	1.380	0.11	0.225	0.311
	LTE Band 2	20M	QPSK	1RB	49Offset	Left Cheek	19100	1900	22.80	24.00	1.318	0.06	0.245	0.323
	LTE Band 2	20M	QPSK	50RB	50Offset	Right Cheek	18900	1880	21.93	23.00	1.279	0.09	0.149	0.191
	LTE Band 2	20M	QPSK	50RB	50Offset	Right Tilted	18900	1880	21.93	23.00	1.279	-0.06	0.109	0.139
	LTE Band 2	20M	QPSK	50RB	50Offset	Left Cheek	18900	1880	21.93	23.00	1.279	0.01	0.235	0.301
	LTE Band 2	20M	QPSK	50RB	50Offset	Left Tilted	18900	1880	21.93	23.00	1.279	0.19	0.088	0.113
	LTE Band 30	10M	QPSK	1RB	25Offset	Right Cheek	27710	2310	23.45	24.00	1.135	0.07	0.189	0.215
	LTE Band 30	10M	QPSK	1RB	25Offset	Right Tilted	27710	2310	23.45	24.00	1.135	0.05	0.156	0.177
10	LTE Band 30	10M	QPSK	1RB	25Offset	Left Cheek	27710	2310	23.45	24.00	1.135	0.08	0.285	0.323
	LTE Band 30	10M	QPSK	1RB	25Offset	Left Tilted	27710	2310	23.45	24.00	1.135	0.06	0.132	0.150
	LTE Band 30	10M	QPSK	25RB	0Offset	Right Cheek	27710	2310	22.44	23.00	1.138	0.05	0.149	0.170
	LTE Band 30	10M	QPSK	25RB	0Offset	Right Tilted	27710	2310	22.44	23.00	1.138	0.02	0.144	0.164
	LTE Band 30	10M	QPSK	25RB	0Offset	Left Cheek	27710	2310	22.44	23.00	1.138	0.07	0.212	0.241
	LTE Band 30	10M	QPSK	25RB	0Offset	Left Tilted	27710	2310	22.44	23.00	1.138	0.05	0.092	0.105



FCC SAR Test Report

Report No. : FA651101

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
11	LTE Band 7	20M	QPSK	1RB	49Offset	Right Cheek	21350	2560	23.78	24.00	1.052	0.04	0.165	0.174
	LTE Band 7	20M	QPSK	1RB	49Offset	Right Tilted	21350	2560	23.78	24.00	1.052	0.17	0.297	0.312
	LTE Band 7	20M	QPSK	1RB	49Offset	Left Cheek	21350	2560	23.78	24.00	1.052	0.09	0.241	0.254
	LTE Band 7	20M	QPSK	1RB	49Offset	Left Tilted	21350	2560	23.78	24.00	1.052	0.03	0.145	0.153
	LTE Band 7	20M	QPSK	1RB	49Offset	Right Tilted	20850	2510	23.52	24.00	1.117	-0.04	0.193	0.216
	LTE Band 7	20M	QPSK	1RB	49Offset	Right Tilted	21100	2535	23.26	24.00	1.186	0.07	0.237	0.281
	LTE Band 7	20M	QPSK	50RB	0Offset	Right Cheek	21350	2560	22.52	23.00	1.117	0.07	0.129	0.144
	LTE Band 7	20M	QPSK	50RB	0Offset	Right Tilted	21350	2560	22.52	23.00	1.117	0.09	0.223	0.249
	LTE Band 7	20M	QPSK	50RB	0Offset	Left Cheek	21350	2560	22.52	23.00	1.117	0.01	0.201	0.224
	LTE Band 7	20M	QPSK	50RB	0Offset	Left Tilted	21350	2560	22.52	23.00	1.117	0.07	0.126	0.141

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	11	2462	16.83	17.00	1.040	98.78	1.012	0.04	0.177	0.186
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	11	2462	16.83	17.00	1.040	98.78	1.012	-0.05	0.160	0.168
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	11	2462	16.83	17.00	1.040	98.78	1.012	-0.02	0.581	0.611
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	11	2462	16.83	17.00	1.040	98.78	1.012	-0.02	0.519	0.546
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	1	2412	16.80	17.00	1.047	98.78	1.012	-0.03	0.893	0.946
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	6	2437	16.57	17.00	1.104	98.78	1.012	-0.04	0.818	0.914

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL : 86-755-8637-9589/ FAX : 86-755-8637-9595

FCC ID : O57PB2690Y

Issued Date : Jun. 21, 2016

Form version. : 160427



Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
13	WLAN 5.3GHz	802.11n-HT40 MCS0	Right Cheek	54	5270	12.52	13.00	1.117	86.2	1.160	-0.12	0.391	0.507
	WLAN 5.3GHz	802.11n-HT40 MCS0	Right Tilted	54	5270	12.52	13.00	1.117	86.2	1.160	-0.07	0.359	0.465
	WLAN 5.3GHz	802.11n-HT40 MCS0	Left Cheek	54	5270	12.52	13.00	1.117	86.2	1.160	0.18	0.558	0.723
	WLAN 5.3GHz	802.11n-HT40 MCS0	Left Tilted	54	5270	12.52	13.00	1.117	86.2	1.160	0.03	0.519	0.672
	WLAN 5.3GHz	802.11n-HT40 MCS0	Left Cheek	62	5310	12.49	13.00	1.125	86.2	1.160	0.14	0.537	0.701
	WLAN 5.5GHz	802.11n-HT40 MCS0	Right Cheek	102	5510	12.40	13.00	1.148	86.2	1.160	-0.02	0.387	0.515
	WLAN 5.5GHz	802.11n-HT40 MCS0	Right Tilted	102	5510	12.40	13.00	1.148	86.2	1.160	0.03	0.317	0.422
	WLAN 5.5GHz	802.11n-HT40 MCS0	Left Cheek	102	5510	12.40	13.00	1.148	86.2	1.160	0.13	0.575	0.766
	WLAN 5.5GHz	802.11n-HT40 MCS0	Left Tilted	102	5510	12.40	13.00	1.148	86.2	1.160	0.14	0.481	0.641
	WLAN 5.5GHz	802.11n-HT40 MCS0	Left Cheek	118	5590	12.24	13.00	1.191	86.2	1.160	0.02	0.653	0.902
14	WLAN 5.5GHz	802.11n-HT40 MCS0	Left Cheek	142	5710	11.96	13.00	1.271	86.2	1.160	0.07	0.683	1.007
15	WLAN 5.8GHz	802.11n-HT40 MCS0	Right Cheek	159	5795	11.99	12.50	1.125	86.2	1.160	0.02	0.385	0.502
	WLAN 5.8GHz	802.11n-HT40 MCS0	Right Tilted	159	5795	11.99	12.50	1.125	86.2	1.160	-0.08	0.307	0.400
	WLAN 5.8GHz	802.11n-HT40 MCS0	Left Cheek	159	5795	11.99	12.50	1.125	86.2	1.160	-0.17	0.546	0.712
	WLAN 5.8GHz	802.11n-HT40 MCS0	Left Tilted	159	5795	11.99	12.50	1.125	86.2	1.160	0.09	0.519	0.677
	WLAN 5.8GHz	802.11n-HT40 MCS0	Left Cheek	151	5755	11.95	12.50	1.135	86.2	1.160	0.11	0.539	0.710

**14.2 Hotspot SAR****<GSM SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS(2 Tx slots)	Front	10	128	824.2	29.94	30.50	1.138	0.06	0.247	0.281
	GSM850	GPRS(2 Tx slots)	Back	10	128	824.2	29.94	30.50	1.138	0.16	0.284	0.323
	GSM850	GPRS(2 Tx slots)	Left Side	10	128	824.2	29.94	30.50	1.138	0.09	0.104	0.118
	GSM850	GPRS(2 Tx slots)	Right Side	10	128	824.2	29.94	30.50	1.138	0.08	0.209	0.238
	GSM850	GPRS(2 Tx slots)	Bottom Side	10	128	824.2	29.94	30.50	1.138	0.19	0.167	0.190
	GSM850	GPRS(2 Tx slots)	Back	10	189	836.4	29.87	30.50	1.156	-0.01	0.359	0.415
16	GSM850	GPRS(2 Tx slots)	Back	10	251	848.8	29.86	30.50	1.159	0.15	0.440	0.510
	GSM1900	GPRS(4 Tx slots)	Front	10	810	1909.8	24.57	25.00	1.104	-0.05	0.161	0.178
	GSM1900	GPRS(4 Tx slots)	Back	10	810	1909.8	24.57	25.00	1.104	0.06	0.207	0.229
	GSM1900	GPRS(4 Tx slots)	Left Side	10	810	1909.8	24.57	25.00	1.104	0.05	0.171	0.189
	GSM1900	GPRS(4 Tx slots)	Right Side	10	810	1909.8	24.57	25.00	1.104	-0.09	0.005	0.006
	GSM1900	GPRS(4 Tx slots)	Bottom Side	10	810	1909.8	24.57	25.00	1.104	-0.01	0.079	0.087
17	GSM1900	GPRS(4 Tx slots)	Back	10	512	1850.2	24.53	25.00	1.114	0.06	0.208	0.232
	GSM1900	GPRS(4 Tx slots)	Back	10	661	1880	24.50	25.00	1.122	0.12	0.202	0.227



<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA Band V	RMC 12.2Kbps	Front	10	4182	836.4	23.15	23.50	1.084	0.01	0.301	0.326
	WCDMA Band V	RMC 12.2Kbps	Back	10	4182	836.4	23.15	23.50	1.084	0.07	0.365	0.396
	WCDMA Band V	RMC 12.2Kbps	Left Side	10	4182	836.4	23.15	23.50	1.084	0.13	0.108	0.117
	WCDMA Band V	RMC 12.2Kbps	Right Side	10	4182	836.4	23.15	23.50	1.084	0.15	0.226	0.245
	WCDMA Band V	RMC 12.2Kbps	Bottom Side	10	4182	836.4	23.15	23.50	1.084	0.16	0.178	0.193
	WCDMA Band V	RMC 12.2Kbps	Back	10	4132	826.4	23.10	23.50	1.096	0.09	0.305	0.334
18	WCDMA Band V	RMC 12.2Kbps	Back	10	4233	846.6	23.07	23.50	1.104	0.17	0.404	0.446
	WCDMA Band IV	RMC 12.2Kbps	Front	10	1312	1712.4	22.92	23.50	1.143	0.09	0.370	0.423
	WCDMA Band IV	RMC 12.2Kbps	Back	10	1312	1712.4	22.92	23.50	1.143	-0.05	0.451	0.515
19	WCDMA Band IV	RMC 12.2Kbps	Left Side	10	1312	1712.4	22.92	23.50	1.143	0.01	0.479	0.547
	WCDMA Band IV	RMC 12.2Kbps	Right Side	10	1312	1712.4	22.92	23.50	1.143	0.19	0.069	0.079
	WCDMA Band IV	RMC 12.2Kbps	Bottom Side	10	1312	1712.4	22.92	23.50	1.143	0.03	0.374	0.427
	WCDMA Band IV	RMC 12.2Kbps	Back	10	1413	1732.6	22.88	23.50	1.153	0.02	0.401	0.463
	WCDMA Band IV	RMC 12.2Kbps	Back	10	1513	1752.6	22.86	23.50	1.159	0.03	0.371	0.430
	WCDMA Band IV	RMC 12.2Kbps	Left Side	10	1413	1732.6	22.88	23.50	1.153	0.15	0.473	0.546
	WCDMA Band IV	RMC 12.2Kbps	Left Side	10	1513	1752.6	22.86	23.50	1.159	0.05	0.457	0.530
	WCDMA Band II	RMC 12.2Kbps	Front	10	9538	1907.6	23.21	23.50	1.069	-0.02	0.439	0.469
	WCDMA Band II	RMC 12.2Kbps	Back	10	9538	1907.6	23.21	23.50	1.069	0.13	0.578	0.618
	WCDMA Band II	RMC 12.2Kbps	Left Side	10	9538	1907.6	23.21	23.50	1.069	0.08	0.469	0.501
	WCDMA Band II	RMC 12.2Kbps	Right Side	10	9538	1907.6	23.21	23.50	1.069	-0.08	0.025	0.027
	WCDMA Band II	RMC 12.2Kbps	Bottom Side	10	9538	1907.6	23.21	23.50	1.069	0.04	0.202	0.216
20	WCDMA Band II	RMC 12.2Kbps	Back	10	9262	1852.4	22.98	23.50	1.127	0.11	0.551	0.621
	WCDMA Band II	RMC 12.2Kbps	Back	10	9400	1880	23.14	23.50	1.086	0.16	0.550	0.598



<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 12	10M	QPSK	1RB	25Offset	Front	10	23095	707.5	23.35	24.00	1.161	0.14	0.112	0.130
	LTE Band 12	10M	QPSK	1RB	25Offset	Back	10	23095	707.5	23.35	24.00	1.161	0.09	0.155	0.180
	LTE Band 12	10M	QPSK	1RB	25Offset	Left Side	10	23095	707.5	23.35	24.00	1.161	-0.17	0.106	0.123
21	LTE Band 12	10M	QPSK	1RB	25Offset	Right Side	10	23095	707.5	23.35	24.00	1.161	0.16	0.204	0.237
	LTE Band 12	10M	QPSK	1RB	25Offset	Bottom Side	10	23095	707.5	23.35	24.00	1.161	-0.15	0.058	0.067
	LTE Band 12	10M	QPSK	25RB	12Offset	Front	10	23095	707.5	22.15	23.00	1.216	0.08	0.092	0.112
	LTE Band 12	10M	QPSK	25RB	12Offset	Back	10	23095	707.5	22.15	23.00	1.216	-0.05	0.121	0.147
	LTE Band 12	10M	QPSK	25RB	12Offset	Left Side	10	23095	707.5	22.15	23.00	1.216	-0.15	0.085	0.103
	LTE Band 12	10M	QPSK	25RB	12Offset	Right Side	10	23095	707.5	22.15	23.00	1.216	-0.01	0.164	0.199
	LTE Band 12	10M	QPSK	25RB	12Offset	Bottom Side	10	23095	707.5	22.15	23.00	1.216	-0.06	0.046	0.056
	LTE Band 5	10M	QPSK	1RB	25Offset	Front	10	20525	836.5	23.15	24.00	1.216	0.17	0.303	0.369
22	LTE Band 5	10M	QPSK	1RB	25Offset	Back	10	20525	836.5	23.15	24.00	1.216	0.04	0.374	0.455
	LTE Band 5	10M	QPSK	1RB	25Offset	Left Side	10	20525	836.5	23.15	24.00	1.216	-0.04	0.106	0.129
	LTE Band 5	10M	QPSK	1RB	25Offset	Right Side	10	20525	836.5	23.15	24.00	1.216	0.13	0.243	0.296
	LTE Band 5	10M	QPSK	1RB	25Offset	Bottom Side	10	20525	836.5	23.15	24.00	1.216	-0.07	0.232	0.282
	LTE Band 5	10M	QPSK	25RB	0Offset	Front	10	20525	836.5	22.05	23.00	1.245	0.08	0.225	0.280
	LTE Band 5	10M	QPSK	25RB	0Offset	Back	10	20525	836.5	22.05	23.00	1.245	-0.04	0.279	0.347
	LTE Band 5	10M	QPSK	25RB	0Offset	Left Side	10	20525	836.5	22.05	23.00	1.245	-0.04	0.083	0.103
	LTE Band 5	10M	QPSK	25RB	0Offset	Right Side	10	20525	836.5	22.05	23.00	1.245	0.05	0.184	0.229
	LTE Band 5	10M	QPSK	25RB	0Offset	Bottom Side	10	20525	836.5	22.05	23.00	1.245	0.12	0.165	0.205
	LTE Band 4	20M	QPSK	1RB	0Offset	Front	10	20175	1732.5	23.30	24.00	1.175	0.12	0.387	0.455
	LTE Band 4	20M	QPSK	1RB	0Offset	Back	10	20175	1732.5	23.30	24.00	1.175	-0.14	0.382	0.449
23	LTE Band 4	20M	QPSK	1RB	0Offset	Left Side	10	20175	1732.5	23.30	24.00	1.175	0.09	0.458	0.538
	LTE Band 4	20M	QPSK	1RB	0Offset	Right Side	10	20175	1732.5	23.30	24.00	1.175	0.08	0.048	0.056
	LTE Band 4	20M	QPSK	1RB	0Offset	Bottom Side	10	20175	1732.5	23.30	24.00	1.175	0.01	0.309	0.363
	LTE Band 4	20M	QPSK	50RB	0Offset	Front	10	20175	1732.5	22.15	23.00	1.216	-0.06	0.281	0.342
	LTE Band 4	20M	QPSK	50RB	0Offset	Back	10	20175	1732.5	22.15	23.00	1.216	0.16	0.301	0.366
	LTE Band 4	20M	QPSK	50RB	0Offset	Left Side	10	20175	1732.5	22.15	23.00	1.216	0.19	0.363	0.441
	LTE Band 4	20M	QPSK	50RB	0Offset	Right Side	10	20175	1732.5	22.15	23.00	1.216	0.11	0.035	0.043
	LTE Band 4	20M	QPSK	50RB	0Offset	Bottom Side	10	20175	1732.5	22.15	23.00	1.216	-0.14	0.234	0.285
	LTE Band 2	20M	QPSK	1RB	49Offset	Front	10	18900	1880	23.14	24.00	1.219	0.12	0.403	0.491
	LTE Band 2	20M	QPSK	1RB	49Offset	Back	10	18900	1880	23.14	24.00	1.219	0.15	0.468	0.570
	LTE Band 2	20M	QPSK	1RB	49Offset	Left Side	10	18900	1880	23.14	24.00	1.219	0.03	0.449	0.547
	LTE Band 2	20M	QPSK	1RB	49Offset	Right Side	10	18900	1880	23.14	24.00	1.219	0.16	0.020	0.024
	LTE Band 2	20M	QPSK	1RB	49Offset	Bottom Side	10	18900	1880	23.14	24.00	1.219	-0.04	0.225	0.274
24	LTE Band 2	20M	QPSK	1RB	49Offset	Back	10	18700	1860	22.60	24.00	1.380	0.07	0.474	0.654
	LTE Band 2	20M	QPSK	1RB	49Offset	Back	10	19100	1900	22.80	24.00	1.318	-0.09	0.410	0.540
	LTE Band 2	20M	QPSK	50RB	50Offset	Front	10	18900	1880	21.93	23.00	1.279	0.16	0.335	0.429
	LTE Band 2	20M	QPSK	50RB	50Offset	Back	10	18900	1880	21.93	23.00	1.279	0.14	0.388	0.496
	LTE Band 2	20M	QPSK	50RB	50Offset	Left Side	10	18900	1880	21.93	23.00	1.279	0.07	0.368	0.471
	LTE Band 2	20M	QPSK	50RB	50Offset	Right Side	10	18900	1880	21.93	23.00	1.279	0.08	0.017	0.022
	LTE Band 2	20M	QPSK	50RB	50Offset	Bottom Side	10	18900	1880	21.93	23.00	1.279	-0.05	0.184	0.235



FCC SAR Test Report

Report No. : FA651101

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 30	10M	QPSK	1RB	25Offset	Front	10	27710	2310	23.45	24.00	1.135	0.11	0.706	0.801
	LTE Band 30	10M	QPSK	1RB	25Offset	Back	10	27710	2310	23.45	24.00	1.135	0.06	0.740	0.840
25	LTE Band 30	10M	QPSK	1RB	25Offset	Left Side	10	27710	2310	23.45	24.00	1.135	0.03	0.841	0.955
	LTE Band 30	10M	QPSK	1RB	25Offset	Right Side	10	27710	2310	23.45	24.00	1.135	-0.06	0.027	0.031
	LTE Band 30	10M	QPSK	1RB	25Offset	Bottom Side	10	27710	2310	23.45	24.00	1.135	0.1	0.628	0.713
	LTE Band 30	10M	QPSK	25RB	0Offset	Front	10	27710	2310	22.44	23.00	1.138	0.05	0.540	0.614
	LTE Band 30	10M	QPSK	25RB	0Offset	Back	10	27710	2310	22.44	23.00	1.138	0.01	0.549	0.625
	LTE Band 30	10M	QPSK	25RB	0Offset	Left Side	10	27710	2310	22.44	23.00	1.138	0.09	0.639	0.727
	LTE Band 30	10M	QPSK	25RB	0Offset	Right Side	10	27710	2310	22.44	23.00	1.138	-0.11	0.022	0.025
	LTE Band 30	10M	QPSK	25RB	0Offset	Bottom Side	10	27710	2310	22.44	23.00	1.138	-0.06	0.494	0.562
	LTE Band 30	10M	QPSK	50RB	0Offset	Front	10	27710	2310	22.41	23.00	1.146	-0.09	0.475	0.544
	LTE Band 30	10M	QPSK	50RB	0Offset	Back	10	27710	2310	22.41	23.00	1.146	0.13	0.491	0.562
	LTE Band 30	10M	QPSK	50RB	0Offset	Left Side	10	27710	2310	22.41	23.00	1.146	0.01	0.555	0.636
	LTE Band 7	20M	QPSK	1RB	49Offset	Front	10	21350	2560	23.78	24.00	1.052	-0.17	0.576	0.606
	LTE Band 7	20M	QPSK	1RB	49Offset	Back	10	21350	2560	23.78	24.00	1.052	0.06	0.570	0.600
	LTE Band 7	20M	QPSK	1RB	49Offset	Left Side	10	21350	2560	23.78	24.00	1.052	-0.08	0.737	0.775
	LTE Band 7	20M	QPSK	1RB	49Offset	Right Side	10	21350	2560	23.78	24.00	1.052	0.05	0.012	0.013
	LTE Band 7	20M	QPSK	1RB	49Offset	Bottom Side	10	21350	2560	23.78	24.00	1.052	0.11	0.467	0.491
	LTE Band 7	20M	QPSK	1RB	49Offset	Front	10	20850	2510	23.52	24.00	1.117	0.02	0.530	0.592
	LTE Band 7	20M	QPSK	1RB	49Offset	Front	10	21100	2535	23.26	24.00	1.186	-0.06	0.529	0.627
	LTE Band 7	20M	QPSK	1RB	49Offset	Left Side	10	20850	2510	23.52	24.00	1.117	0.17	0.821	0.917
26	LTE Band 7	20M	QPSK	1RB	49Offset	Left Side	10	21100	2535	23.26	24.00	1.186	-0.03	0.783	0.928
	LTE Band 7	20M	QPSK	50RB	0Offset	Front	10	21350	2560	22.52	23.00	1.117	-0.1	0.461	0.515
	LTE Band 7	20M	QPSK	50RB	0Offset	Back	10	21350	2560	22.52	23.00	1.117	-0.02	0.406	0.453
	LTE Band 7	20M	QPSK	50RB	0Offset	Left Side	10	21350	2560	22.52	23.00	1.117	-0.09	0.589	0.658
	LTE Band 7	20M	QPSK	50RB	0Offset	Right Side	10	21350	2560	22.52	23.00	1.117	-0.09	0.009	0.011
	LTE Band 7	20M	QPSK	50RB	0Offset	Bottom Side	10	21350	2560	22.52	23.00	1.117	-0.11	0.374	0.418
	LTE Band 7	20M	QPSK	100RB	0Offset	Left Side	10	21350	2560	22.49	23.00	1.125	0.01	0.607	0.683

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	10	11	2462	16.83	17.00	1.040	98.78	1.012	-0.07	0.091	0.096
	WLAN2.4GHz	802.11b 1Mbps	Back	10	11	2462	16.83	17.00	1.040	98.78	1.012	-0.07	0.060	0.063
	WLAN2.4GHz	802.11b 1Mbps	Right Side	10	11	2462	16.83	17.00	1.040	98.78	1.012	0.07	0.088	0.093
	WLAN2.4GHz	802.11b 1Mbps	Top Side	10	11	2462	16.83	17.00	1.040	98.78	1.012	0.05	0.090	0.095
27	WLAN2.4GHz	802.11b 1Mbps	Front	10	1	2412	16.80	17.00	1.047	98.78	1.012	0.03	0.111	0.118
	WLAN2.4GHz	802.11b 1Mbps	Front	10	6	2437	16.57	17.00	1.104	98.78	1.012	-0.04	0.093	0.104

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL : 86-755-8637-9589/ FAX : 86-755-8637-9595

FCC ID : O57PB2690Y

Page 66 of 82

Issued Date : Jun. 21, 2016

Form version. : 160427



Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN 5.2GHz	802.11n-HT40 MCS0	Front	10	38	5190	12.57	13.00	1.104	86.2	1.160	0.12	0.119	0.152
	WLAN 5.2GHz	802.11n-HT40 MCS0	Back	10	38	5190	12.57	13.00	1.104	86.2	1.160	0.06	0.024	0.031
	WLAN 5.2GHz	802.11n-HT40 MCS0	Top Side	10	38	5190	12.57	13.00	1.104	86.2	1.160	0.04	0.040	0.051
28	WLAN 5.2GHz	802.11n-HT40 MCS0	Front	10	46	5230	12.54	13.00	1.112	86.2	1.160	-0.08	0.120	0.155
29	WLAN 5.8GHz	802.11n-HT40 MCS0	Front	10	159	5795	11.99	12.50	1.125	86.2	1.160	0.06	0.140	0.183
	WLAN 5.8GHz	802.11n-HT40 MCS0	Back	10	159	5795	11.99	12.50	1.125	86.2	1.160	0.04	0.027	0.035
	WLAN 5.8GHz	802.11n-HT40 MCS0	Top Side	10	159	5795	11.99	12.50	1.125	86.2	1.160	-0.11	0.002	0.003
	WLAN 5.8GHz	802.11n-HT40 MCS0	Front	10	151	5755	11.95	12.50	1.135	86.2	1.160	0.09	0.135	0.178

**14.3 Body Worn Accessory SAR****<GSM SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS(2 Tx slots)	Front	10	128	824.2	29.94	30.50	1.138	0.06	0.247	0.281
	GSM850	GPRS(2 Tx slots)	Back	10	128	824.2	29.94	30.50	1.138	0.16	0.284	0.323
	GSM850	GPRS(2 Tx slots)	Back	10	189	836.4	29.87	30.50	1.156	-0.01	0.359	0.415
16	GSM850	GPRS(2 Tx slots)	Back	10	251	848.8	29.86	30.50	1.159	0.15	0.440	0.510
	GSM1900	GPRS(4 Tx slots)	Front	10	810	1909.8	24.57	25.00	1.104	-0.05	0.161	0.178
	GSM1900	GPRS(4 Tx slots)	Back	10	810	1909.8	24.57	25.00	1.104	0.06	0.207	0.229
17	GSM1900	GPRS(4 Tx slots)	Back	10	512	1850.2	24.53	25.00	1.114	0.06	0.208	0.232
	GSM1900	GPRS(4 Tx slots)	Back	10	661	1880	24.50	25.00	1.122	0.12	0.202	0.227

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA Band V	RMC 12.2Kbps	Front	10	4182	836.4	23.15	23.50	1.084	0.01	0.301	0.326
	WCDMA Band V	RMC 12.2Kbps	Back	10	4182	836.4	23.15	23.50	1.084	0.07	0.365	0.396
	WCDMA Band V	RMC 12.2Kbps	Back	10	4132	826.4	23.10	23.50	1.096	0.09	0.305	0.334
18	WCDMA Band V	RMC 12.2Kbps	Back	10	4233	846.6	23.07	23.50	1.104	0.17	0.404	0.446
	WCDMA Band IV	RMC 12.2Kbps	Front	10	1312	1712.4	22.92	23.50	1.143	0.09	0.370	0.423
30	WCDMA Band IV	RMC 12.2Kbps	Back	10	1312	1712.4	22.92	23.50	1.143	-0.05	0.451	0.515
	WCDMA Band IV	RMC 12.2Kbps	Back	10	1413	1732.6	22.88	23.50	1.153	0.02	0.401	0.463
	WCDMA Band IV	RMC 12.2Kbps	Back	10	1513	1752.6	22.86	23.50	1.159	0.03	0.371	0.430
	WCDMA Band II	RMC 12.2Kbps	Front	10	9538	1907.6	23.21	23.50	1.069	-0.02	0.439	0.469
	WCDMA Band II	RMC 12.2Kbps	Back	10	9538	1907.6	23.21	23.50	1.069	0.13	0.578	0.618
20	WCDMA Band II	RMC 12.2Kbps	Back	10	9262	1852.4	22.98	23.50	1.127	0.11	0.551	0.621
	WCDMA Band II	RMC 12.2Kbps	Back	10	9400	1880	23.14	23.50	1.086	0.16	0.550	0.598



<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 12	10M	QPSK	1RB	25Offset	Front	10	23095	707.5	23.35	24.00	1.161	0.14	0.112	0.130
31	LTE Band 12	10M	QPSK	1RB	25Offset	Back	10	23095	707.5	23.35	24.00	1.161	0.09	0.155	0.180
	LTE Band 12	10M	QPSK	25RB	12Offset	Front	10	23095	707.5	22.15	23.00	1.216	0.08	0.092	0.112
	LTE Band 12	10M	QPSK	25RB	12Offset	Back	10	23095	707.5	22.15	23.00	1.216	-0.05	0.121	0.147
	LTE Band 5	10M	QPSK	1RB	25Offset	Front	10	20525	836.5	23.15	24.00	1.216	0.17	0.303	0.369
22	LTE Band 5	10M	QPSK	1RB	25Offset	Back	10	20525	836.5	23.15	24.00	1.216	0.04	0.374	0.455
	LTE Band 5	10M	QPSK	25RB	0Offset	Front	10	20525	836.5	22.05	23.00	1.245	0.08	0.225	0.280
	LTE Band 5	10M	QPSK	25RB	0Offset	Back	10	20525	836.5	22.05	23.00	1.245	-0.04	0.279	0.347
32	LTE Band 4	20M	QPSK	1RB	0Offset	Front	10	20175	1732.5	23.30	24.00	1.175	0.12	0.387	0.455
	LTE Band 4	20M	QPSK	1RB	0Offset	Back	10	20175	1732.5	23.30	24.00	1.175	-0.14	0.382	0.449
	LTE Band 4	20M	QPSK	50RB	0Offset	Front	10	20175	1732.5	22.15	23.00	1.216	-0.06	0.281	0.342
	LTE Band 4	20M	QPSK	50RB	0Offset	Back	10	20175	1732.5	22.15	23.00	1.216	0.16	0.301	0.366
	LTE Band 2	20M	QPSK	1RB	49Offset	Front	10	18900	1880	23.14	24.00	1.219	0.12	0.403	0.491
	LTE Band 2	20M	QPSK	1RB	49Offset	Back	10	18900	1880	23.14	24.00	1.219	0.15	0.468	0.570
24	LTE Band 2	20M	QPSK	1RB	49Offset	Back	10	18700	1860	22.60	24.00	1.380	0.07	0.474	0.654
	LTE Band 2	20M	QPSK	1RB	49Offset	Back	10	19100	1900	22.80	24.00	1.318	-0.09	0.410	0.540
	LTE Band 2	20M	QPSK	50RB	50Offset	Front	10	18900	1880	21.93	23.00	1.279	0.16	0.335	0.429
	LTE Band 2	20M	QPSK	50RB	50Offset	Back	10	18900	1880	21.93	23.00	1.279	0.14	0.388	0.496
	LTE Band 30	10M	QPSK	1RB	25Offset	Front	10	27710	2310	23.45	24.00	1.135	0.11	0.706	0.801
33	LTE Band 30	10M	QPSK	1RB	25Offset	Back	10	27710	2310	23.45	24.00	1.135	0.06	0.740	0.840
	LTE Band 30	10M	QPSK	25RB	0Offset	Front	10	27710	2310	22.44	23.00	1.138	0.05	0.540	0.614
	LTE Band 30	10M	QPSK	25RB	0Offset	Back	10	27710	2310	22.44	23.00	1.138	0.01	0.549	0.625
	LTE Band 30	10M	QPSK	50RB	0Offset	Front	10	27710	2310	22.41	23.00	1.146	-0.09	0.475	0.544
	LTE Band 30	10M	QPSK	50RB	0Offset	Back	10	27710	2310	22.41	23.00	1.146	0.13	0.491	0.562
	LTE Band 7	20M	QPSK	1RB	49Offset	Front	10	21350	2560	23.78	24.00	1.052	-0.17	0.576	0.606
	LTE Band 7	20M	QPSK	1RB	49Offset	Back	10	21350	2560	23.78	24.00	1.052	0.06	0.570	0.600
	LTE Band 7	20M	QPSK	1RB	49Offset	Front	10	20850	2510	23.52	24.00	1.117	0.02	0.530	0.592
34	LTE Band 7	20M	QPSK	1RB	49Offset	Front	10	21100	2535	23.26	24.00	1.186	-0.06	0.529	0.627
	LTE Band 7	20M	QPSK	50RB	0Offset	Front	10	21350	2560	22.52	23.00	1.117	-0.1	0.461	0.515
	LTE Band 7	20M	QPSK	50RB	0Offset	Back	10	21350	2560	22.52	23.00	1.117	-0.02	0.406	0.453

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	10	11	2462	16.83	17.00	1.040	98.78	1.012	-0.07	0.091	0.096
	WLAN2.4GHz	802.11b 1Mbps	Back	10	11	2462	16.83	17.00	1.040	98.78	1.012	-0.07	0.060	0.063
27	WLAN2.4GHz	802.11b 1Mbps	Front	10	1	2412	16.80	17.00	1.047	98.78	1.012	0.03	0.111	0.118
	WLAN2.4GHz	802.11b 1Mbps	Front	10	6	2437	16.57	17.00	1.104	98.78	1.012	-0.04	0.093	0.104

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN 5.3GHz	802.11n-HT40 MCS0	Front	10	54	5270	12.52	13.00	1.117	86.2	1.160	0.17	0.117	0.152
	WLAN 5.3GHz	802.11n-HT40 MCS0	Back	10	54	5270	12.52	13.00	1.117	86.2	1.160	0.05	0.019	0.025
35	WLAN 5.3GHz	802.11n-HT40 MCS0	Front	10	62	5310	12.49	13.00	1.125	86.2	1.160	0.14	0.144	0.188
	WLAN 5.5GHz	802.11n-HT40 MCS0	Front	10	102	5510	12.40	13.00	1.148	86.2	1.160	0.01	0.152	0.202
	WLAN 5.5GHz	802.11n-HT40 MCS0	Back	10	102	5510	12.40	13.00	1.148	86.2	1.160	0.09	0.023	0.031
	WLAN 5.5GHz	802.11n-HT40 MCS0	Front	10	118	5590	12.24	13.00	1.191	86.2	1.160	-0.01	0.141	0.195
36	WLAN 5.5GHz	802.11n-HT40 MCS0	Front	10	142	5710	11.96	13.00	1.271	86.2	1.160	0.03	0.144	0.212
29	WLAN 5.8GHz	802.11n-HT40 MCS0	Front	10	159	5795	11.99	12.50	1.125	86.2	1.160	0.06	0.140	0.183
	WLAN 5.8GHz	802.11n-HT40 MCS0	Back	10	159	5795	11.99	12.50	1.125	86.2	1.160	0.04	0.027	0.035
	WLAN 5.8GHz	802.11n-HT40 MCS0	Front	10	151	5755	11.95	12.50	1.135	86.2	1.160	0.09	0.135	0.178

<Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
37	Bluetooth	1Mbps	Front	10	39	2441	11.05	11.5	1.109	0.09	0.012	0.013
	Bluetooth	1Mbps	Back	10	39	2441	11.05	11.5	1.109	-0.06	0.006	0.007
	Bluetooth	1Mbps	Front	10	0	2402	9.79	11.5	1.483	0.03	0.007	0.010
	Bluetooth	1Mbps	Front	10	78	2480	10.73	11.5	1.194	-0.03	0.009	0.010

14.4 Product specific 10g SAR

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WLAN 5.3GHz	802.11n-HT40 MCS0	Front	0	54	5270	12.52	13.00	1.117	86.2	1.160	-0.05	0.257	0.333
	WLAN 5.3GHz	802.11n-HT40 MCS0	Top Side	0	54	5270	12.52	13.00	1.117	86.2	1.160	0.07	0.045	0.059
	WLAN 5.3GHz	802.11n-HT40 MCS0	Back	0	54	5270	12.52	13.00	1.117	86.2	1.160	0.03	0.033	0.043
38	WLAN 5.3GHz	802.11n-HT40 MCS0	Front	0	62	5310	12.49	13.00	1.125	86.2	1.160	0.1	0.269	0.351
	WLAN 5.5GHz	802.11n-HT40 MCS0	Front	0	102	5510	12.40	13.00	1.148	86.2	1.160	0.14	0.296	0.394
	WLAN 5.5GHz	802.11n-HT40 MCS0	Top Side	0	102	5510	12.40	13.00	1.148	86.2	1.160	-0.03	0.034	0.046
	WLAN 5.5GHz	802.11n-HT40 MCS0	Back	0	102	5510	12.40	13.00	1.148	86.2	1.160	0.05	0.028	0.037
39	WLAN 5.5GHz	802.11n-HT40 MCS0	Front	0	118	5590	12.24	13.00	1.191	86.2	1.160	0.02	0.308	0.426
	WLAN 5.5GHz	802.11n-HT40 MCS0	Front	0	142	5710	11.96	13.00	1.271	86.2	1.160	0.07	0.276	0.407

14.5 Repeated SAR Measurement

No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	LTE Band 30	10M	QPSK	1RB	25Offset	Left Side	10	27710	2310	23.45	24.00	1.135	-	-	0.03	0.841	1	0.955
2nd	LTE Band 30	10M	QPSK	1RB	25Offset	Left Side	10	27710	2310	23.45	24.00	1.135	-	-	0.11	0.838	1.004	0.951
1st	LTE Band 7	20M	QPSK	1RB	49Offset	Left Side	10	20850	2510	23.52	24.00	1.117	-	-	0.17	0.821	1	0.917
2nd	LTE Band 7	20M	QPSK	1RB	49Offset	Left Side	10	20850	2510	23.52	24.00	1.117	-	-	-0.17	0.813	1.010	0.908
1st	WLAN2.4GHz	-	802.11b 1Mbps	-	-	Left Cheek	-	1	2412	16.80	17.00	1.047	98.78	1.012	-0.03	0.893	1	0.946
2nd	WLAN2.4GHz	-	802.11b 1Mbps	-	-	Left Tilted	-	1	2412	16.80	17.00	1.047	98.78	1.012	-0.08	0.881	1.013	0.934

General Note:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR < 1.45 W/kg, only one repeated measurement is required.
3. Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.
4. The ratio is the difference in percentage between original and repeated *measured* SAR.
5. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

15. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Portable Handset			Note
		Head	Body-worn	Hotspot	
1.	GSM Voice + WLAN2.4GHz	Yes	Yes		
2.	GPRS/EDGE + WLAN2.4GHz	Yes	Yes	Yes	Hotspot
3.	WCDMA + WLAN2.4GHz	Yes	Yes	Yes	Hotspot
4.	LTE + WLAN2.4GHz	Yes	Yes	Yes	Hotspot
5.	GSM Voice + Bluetooth		Yes		
6.	GPRS/EDGE + Bluetooth		Yes		WWAN VoIP
7.	WCDMA+ Bluetooth		Yes		WWAN VoIP
8.	LTE + Bluetooth		Yes		WWAN VoIP
9.	GSM Voice + WLAN5.3/5.5GHz	Yes	Yes		
10.	GPRS/EDGE + WLAN5.3/5.5GHz	Yes	Yes		WWAN VoIP
11.	WCDMA + WLAN5.3/5.5GHz	Yes	Yes		WWAN VoIP
12.	LTE + WLAN5.3/5.5GHz	Yes	Yes		WWAN VoIP
13.	GSM Voice + WLAN5.2/5.8GHz	Yes	Yes	Yes	
14.	GPRS/EDGE + WLAN5.2/5.8GHz	Yes	Yes	Yes	WiFi Direct
15.	WCDMA + WLAN5.2/5.8GHz	Yes	Yes	Yes	WiFi Direct
16.	LTE + WLAN5.2/5.8GHz	Yes	Yes	Yes	WiFi Direct

General Note:

1. This device supported VoIP in GPRS, EGPRS, WCDMA, LTE (e.g. 3rd party VoIP).
2. This device 2.4GHz WLAN supports Hotspot operation, and 2.4GHz /5.2GHz/ 5.8GHz WLAN supports WiFi Direct (GC/GO), and 5.3GHz / 5.5GHz supports WiFi Direct (GC only).
3. EUT will choose each GSM, WCDMA and LTE according to the network signal condition; therefore, they will not operate simultaneously at any moment.
4. WLAN2.4GHz and Bluetooth share the same antenna, and cannot transmit simultaneously.
5. EUT will choose either WLAN 2.4GHz or WLAN 5GHz according to the network signal condition; therefore, 2.4GHz WLAN and 5GHz WLAN will not operate simultaneously at any moment.
6. According to EUT character ,WLAN 5GHz can not transmit simultaneously with Bluetooth.
7. The Scaled SAR summation is calculated based on the same configuration and test position.
8. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - i) Scalar SAR summation < 1.6W/kg.
 - ii) $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - iii) If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.



15.1 Head Exposure Conditions

WWAN Band		Exposure Position	1	2	3	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	SPLSR	Case No
			WWAN	2.4GHz WLAN	5GHz WLAN				
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)				
GSM	GSM850	Right Cheek	0.205	0.186	0.515	0.39	0.72		
		Right Tilted	0.080	0.168	0.465	0.25	0.55		
		Left Cheek	0.151	0.946	1.007	1.10	1.16		
		Left Tilted	0.093	0.546	0.677	0.64	0.77		
	GSM1900	Right Cheek	0.077	0.186	0.515	0.26	0.59		
		Right Tilted	0.062	0.168	0.465	0.23	0.53		
		Left Cheek	0.147	0.946	1.007	1.09	1.15		
		Left Tilted	0.044	0.546	0.677	0.59	0.72		
	WCDMA II	Right Cheek	0.118	0.186	0.515	0.30	0.63		
		Right Tilted	0.105	0.168	0.465	0.27	0.57		
		Left Cheek	0.238	0.946	1.007	1.18	1.25		
		Left Tilted	0.065	0.546	0.677	0.61	0.74		
	WCDMA IV	Right Cheek	0.101	0.186	0.515	0.29	0.62		
		Right Tilted	0.094	0.168	0.465	0.26	0.56		
		Left Cheek	0.188	0.946	1.007	1.13	1.20		
		Left Tilted	0.082	0.546	0.677	0.63	0.76		
	WCDMA V	Right Cheek	0.118	0.186	0.515	0.30	0.63		
		Right Tilted	0.050	0.168	0.465	0.22	0.52		
		Left Cheek	0.090	0.946	1.007	1.04	1.10		
		Left Tilted	0.074	0.546	0.677	0.62	0.75		
WCDMA	LTE Band 2	Right Cheek	0.223	0.186	0.515	0.41	0.74		
		Right Tilted	0.169	0.168	0.465	0.34	0.63		
		Left Cheek	0.343	0.946	1.007	1.29	1.35		
		Left Tilted	0.130	0.546	0.677	0.68	0.81		
	LTE Band 4	Right Cheek	0.182	0.186	0.515	0.37	0.70		
		Right Tilted	0.168	0.168	0.465	0.34	0.63		
		Left Cheek	0.283	0.946	1.007	1.23	1.29		
		Left Tilted	0.136	0.546	0.677	0.68	0.81		
	LTE Band 5	Right Cheek	0.193	0.186	0.515	0.38	0.71		
		Right Tilted	0.094	0.168	0.465	0.26	0.56		
		Left Cheek	0.163	0.946	1.007	1.11	1.17		
		Left Tilted	0.092	0.546	0.677	0.64	0.77		
	LTE Band 7	Right Cheek	0.174	0.186	0.515	0.36	0.69		
		Right Tilted	0.312	0.168	0.465	0.48	0.78		
		Left Cheek	0.254	0.946	1.007	1.20	1.26		
		Left Tilted	0.153	0.546	0.677	0.70	0.83		

**FCC SAR Test Report****Report No. : FA651101**

	LTE Band 12	Right Cheek	0.114	0.186	0.515	0.30	0.63		
		Right Tilted	0.063	0.168	0.465	0.23	0.53		
		Left Cheek	0.108	0.946	1.007	1.05	1.12		
		Left Tilted	0.055	0.546	0.677	0.60	0.73		
	LTE Band 30	Right Cheek	0.215	0.186	0.515	0.40	0.73		
		Right Tilted	0.177	0.168	0.465	0.35	0.64		
		Left Cheek	0.323	0.946	1.007	1.27	1.33		
		Left Tilted	0.150	0.546	0.677	0.70	0.83		



15.2 Hotspot Exposure Conditions

WWAN Band		Exposure Position	1	2	3	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	SPLSR	Case No
			WWAN	2.4GHz WLAN	5GHz WLAN				
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)				
GSM	GSM850	Front	0.281	0.118	0.183	0.40	0.46		
		Back	0.510	0.063	0.035	0.57	0.55		
		Left side	0.118			0.12	0.12		
		Right side	0.238	0.093		0.33	0.24		
		Top side		0.095	0.051	0.10	0.05		
		Bottom side	0.190			0.19	0.19		
	GSM1900	Front	0.178	0.118	0.183	0.30	0.36		
		Back	0.232	0.063	0.035	0.30	0.27		
		Left side	0.189			0.19	0.19		
		Right side	0.006	0.093		0.10	0.01		
		Top side		0.095	0.051	0.10	0.05		
		Bottom side	0.087			0.09	0.09		
WCDMA	WCDMA II	Front	0.469	0.118	0.183	0.59	0.65		
		Back	0.621	0.063	0.035	0.68	0.66		
		Left side	0.501			0.50	0.50		
		Right side	0.027	0.093		0.12	0.03		
		Top side		0.095	0.051	0.10	0.05		
		Bottom side	0.216			0.22	0.22		
	WCDMA IV	Front	0.423	0.118	0.183	0.54	0.61		
		Back	0.515	0.063	0.035	0.58	0.55		
		Left side	0.547			0.55	0.55		
		Right side	0.079	0.093		0.17	0.08		
		Top side		0.095	0.051	0.10	0.05		
		Bottom side	0.427			0.43	0.43		
	WCDMA V	Front	0.326	0.118	0.183	0.44	0.51		
		Back	0.446	0.063	0.035	0.51	0.48		
		Left side	0.117			0.12	0.12		
		Right side	0.245	0.093		0.34	0.25		
		Top side		0.095	0.051	0.10	0.05		
		Bottom side	0.193			0.19	0.19		
LTE	LTE Band 2	Front	0.491	0.118	0.183	0.61	0.67		
		Back	0.654	0.063	0.035	0.72	0.69		
		Left side	0.547			0.55	0.55		
		Right side	0.024	0.093		0.12	0.02		
		Top side		0.095	0.051	0.10	0.05		
		Bottom side	0.274			0.27	0.27		
	LTE Band 4	Front	0.455	0.118	0.183	0.57	0.64		

		Back	0.449	0.063	0.035	0.51	0.48		
		Left side	0.538			0.54	0.54		
		Right side	0.056	0.093		0.15	0.06		
		Top side		0.095	0.051	0.10	0.05		
		Bottom side	0.363			0.36	0.36		
	LTE Band 5	Front	0.369	0.118	0.183	0.49	0.55		
		Back	0.455	0.063	0.035	0.52	0.49		
		Left side	0.129			0.13	0.13		
		Right side	0.296	0.093		0.39	0.30		
		Top side		0.095	0.051	0.10	0.05		
		Bottom side	0.282			0.28	0.28		
	LTE Band 7	Front	0.627	0.118	0.183	0.75	0.81		
		Back	0.600	0.063	0.035	0.66	0.64		
		Left side	0.928			0.93	0.93		
		Right side	0.013	0.093		0.11	0.01		
		Top side		0.095	0.051	0.10	0.05		
		Bottom side	0.491			0.49	0.49		
	LTE Band 12	Front	0.130	0.118	0.183	0.25	0.31		
		Back	0.180	0.063	0.035	0.24	0.22		
		Left side	0.123			0.12	0.12		
		Right side	0.237	0.093		0.33	0.24		
		Top side		0.095	0.051	0.10	0.05		
		Bottom side	0.067			0.07	0.07		
	LTE Band 30	Front	0.801	0.118	0.183	0.92	0.98		
		Back	0.840	0.063	0.035	0.90	0.88		
		Left side	0.955			0.96	0.96		
		Right side	0.031	0.093		0.12	0.03		
		Top side		0.095	0.051	0.10	0.05		
		Bottom side	0.713			0.71	0.71		



15.3 Body-Worn Accessory Exposure Conditions

WWAN Band		Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)	SPLSR	Case No
			WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth					
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)					
GSM	GSM850	Front	0.281	0.118	0.212	0.013	0.40	0.49	0.29		
		Back	0.510	0.063	0.035	0.007	0.57	0.55	0.52		
	GSM1900	Front	0.178	0.118	0.212	0.013	0.30	0.39	0.19		
		Back	0.232	0.063	0.035	0.007	0.30	0.27	0.24		
WCDMA	WCDMA II	Front	0.469	0.118	0.212	0.013	0.59	0.68	0.48		
		Back	0.621	0.063	0.035	0.007	0.68	0.66	0.63		
	WCDMA IV	Front	0.423	0.118	0.212	0.013	0.54	0.64	0.44		
		Back	0.515	0.063	0.035	0.007	0.58	0.55	0.52		
	WCDMA V	Front	0.326	0.118	0.212	0.013	0.44	0.54	0.34		
		Back	0.446	0.063	0.035	0.007	0.51	0.48	0.45		
LTE	LTE Band 2	Front	0.491	0.118	0.212	0.013	0.61	0.70	0.50		
		Back	0.654	0.063	0.035	0.007	0.72	0.69	0.66		
	LTE Band 4	Front	0.455	0.118	0.212	0.013	0.57	0.67	0.47		
		Back	0.449	0.063	0.035	0.007	0.51	0.48	0.46		
	LTE Band 5	Front	0.369	0.118	0.212	0.013	0.49	0.58	0.38		
		Back	0.455	0.063	0.035	0.007	0.52	0.49	0.46		
	LTE Band 7	Front	0.627	0.118	0.212	0.013	0.75	0.84	0.64		
		Back	0.600	0.063	0.035	0.007	0.66	0.64	0.61		
	LTE Band 12	Front	0.130	0.118	0.212	0.013	0.25	0.34	0.14		
		Back	0.180	0.063	0.035	0.007	0.24	0.22	0.19		
	LTE Band 30	Front	0.801	0.118	0.212	0.013	0.92	1.01	0.81		
		Back	0.840	0.063	0.035	0.007	0.90	0.88	0.85		

Test Engineer : Luke Lu

16. Uncertainty Assessment

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in table below.

Uncertainty Distributions	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor ^(a)	1/ κ ^(b)	1/ $\sqrt{3}$	1/ $\sqrt{6}$	1/ $\sqrt{2}$

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b) κ is the coverage factor

Table 16.1. Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.

Error Description	Uncertainty Value (±%)	Probability	Divisor	(Ci) 1g	(Ci) 10g	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)
Measurement System							
Probe Calibration	6.0	N	1	1	1	6.0	6.0
Axial Isotropy	4.7	R	1.732	0.7	0.7	1.9	1.9
Hemispherical Isotropy	9.6	R	1.732	0.7	0.7	3.9	3.9
Boundary Effects	1.0	R	1.732	1	1	0.6	0.6
Linearity	4.7	R	1.732	1	1	2.7	2.7
System Detection Limits	1.0	R	1.732	1	1	0.6	0.6
Modulation Response	3.2	R	1.732	1	1	1.8	1.8
Readout Electronics	0.3	N	1	1	1	0.3	0.3
Response Time	0.0	R	1.732	1	1	0.0	0.0
Integration Time	2.6	R	1.732	1	1	1.5	1.5
RF Ambient Noise	3.0	R	1.732	1	1	1.7	1.7
RF Ambient Reflections	3.0	R	1.732	1	1	1.7	1.7
Probe Positioner	0.4	R	1.732	1	1	0.2	0.2
Probe Positioning	2.9	R	1.732	1	1	1.7	1.7
Max. SAR Eval.	2.0	R	1.732	1	1	1.2	1.2
Test Sample Related							
Device Positioning	3.0	N	1	1	1	3.0	3.0
Device Holder	3.6	N	1	1	1	3.6	3.6
Power Drift	5.0	R	1.732	1	1	2.9	2.9
Power Scaling	0.0	R	1.732	1	1	0.0	0.0
Phantom and Setup							
Phantom Uncertainty	6.1	R	1.732	1	1	3.5	3.5
SAR correction	0.0	R	1.732	1	0.84	0.0	0.0
Liquid Conductivity Repeatability	0.2	N	1	0.78	0.71	0.1	0.1
Liquid Conductivity (target)	5.0	R	1.732	0.78	0.71	2.3	2.0
Liquid Conductivity (mea.)	2.5	R	1.732	0.78	0.71	1.1	1.0
Temp. unc. - Conductivity	3.4	R	1.732	0.78	0.71	1.5	1.4
Liquid Permittivity Repeatability	0.15	N	1	0.23	0.26	0.0	0.0
Liquid Permittivity (target)	5.0	R	1.732	0.23	0.26	0.7	0.8
Liquid Permittivity (mea.)	2.5	R	1.732	0.23	0.26	0.3	0.4
Temp. unc. - Permittivity	0.83	R	1.732	0.23	0.26	0.1	0.1
Combined Std. Uncertainty						11.4%	11.4%
Coverage Factor for 95 %						K=2	K=2
Expanded STD Uncertainty						22.9%	22.7%

Table 16.2. Uncertainty Budget for frequency range 300 MHz to 3 GHz

Error Description	Uncertainty Value (±%)	Probability	Divisor	(Ci) 1g	(Ci) 10g	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)
Measurement System							
Probe Calibration	7.0	N	1	1	1	7.0	7.0
Axial Isotropy	4.7	R	1.732	0.7	0.7	1.9	1.9
Hemispherical Isotropy	9.6	R	1.732	0.7	0.7	3.9	3.9
Boundary Effects	2.0	R	1.732	1	1	1.2	1.2
Linearity	4.7	R	1.732	1	1	2.7	2.7
System Detection Limits	1.0	R	1.732	1	1	0.6	0.6
Modulation Response	3.2	R	1.732	1	1	1.8	1.8
Readout Electronics	0.3	N	1	1	1	0.3	0.3
Response Time	0.0	R	1.732	1	1	0.0	0.0
Integration Time	2.6	R	1.732	1	1	1.5	1.5
RF Ambient Noise	3.0	R	1.732	1	1	1.7	1.7
RF Ambient Reflections	3.0	R	1.732	1	1	1.7	1.7
Probe Positioner	0.4	R	1.732	1	1	0.2	0.2
Probe Positioning	6.7	R	1.732	1	1	3.9	3.9
Max. SAR Eval.	4.0	R	1.732	1	1	2.3	2.3
Test Sample Related							
Device Positioning	3.0	N	1	1	1	3.0	3.0
Device Holder	3.6	N	1	1	1	3.6	3.6
Power Drift	5.0	R	1.732	1	1	2.9	2.9
Power Scaling	0.0	R	1.732	1	1	0.0	0.0
Phantom and Setup							
Phantom Uncertainty	6.6	R	1.732	1	1	3.8	3.8
SAR correction	0.0	R	1.732	1	0.84	0.0	0.0
Liquid Conductivity Repeatability	0.2	N	1	0.78	0.71	0.1	0.1
Liquid Conductivity (target)	5.0	R	1.732	0.78	0.71	2.3	2.0
Liquid Conductivity (mea.)	2.5	R	1.732	0.78	0.71	1.1	1.0
Temp. unc. - Conductivity	3.4	R	1.732	0.78	0.71	1.5	1.4
Liquid Permittivity Repeatability	0.15	N	1	0.23	0.26	0.0	0.0
Liquid Permittivity (target)	5.0	R	1.732	0.23	0.26	0.7	0.8
Liquid Permittivity (mea.)	2.5	R	1.732	0.23	0.26	0.3	0.4
Temp. unc. - Permittivity	0.83	R	1.732	0.23	0.26	0.1	0.1
Combined Std. Uncertainty						12.8%	12.7%
Coverage Factor for 95 %						K=2	K=2
Expanded STD Uncertainty						25.5%	25.4%

Table 16.3. Uncertainty Budget for frequency range 3 GHz to 6 GHz

17. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [6] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [7] FCC KDB 648474 D04 v01r03, "SAR Evaluation Considerations for Wireless Handsets", Oct 2015.
- [8] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [9] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [10] FCC KDB 941225 D06 v02r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2015.
- [11] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [12] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.



Appendix A. Plots of System Performance Check

The plots are shown as follows.

#System Check_Head_750MHz_160607**DUT: D750V3**

Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1

Medium: HSL_750_160607 Medium parameters used: $f = 750$ MHz; $\sigma = 0.882$ S/m; $\epsilon_r = 40.803$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(10.06, 10.06, 10.06); Calibrated: 2015.10.01;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 2016.01.07
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 2.43 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 53.75 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 2.79 W/kg

SAR(1 g) = 1.96 W/kg; SAR(10 g) = 1.32 W/kg

Maximum value of SAR (measured) = 2.44 W/kg

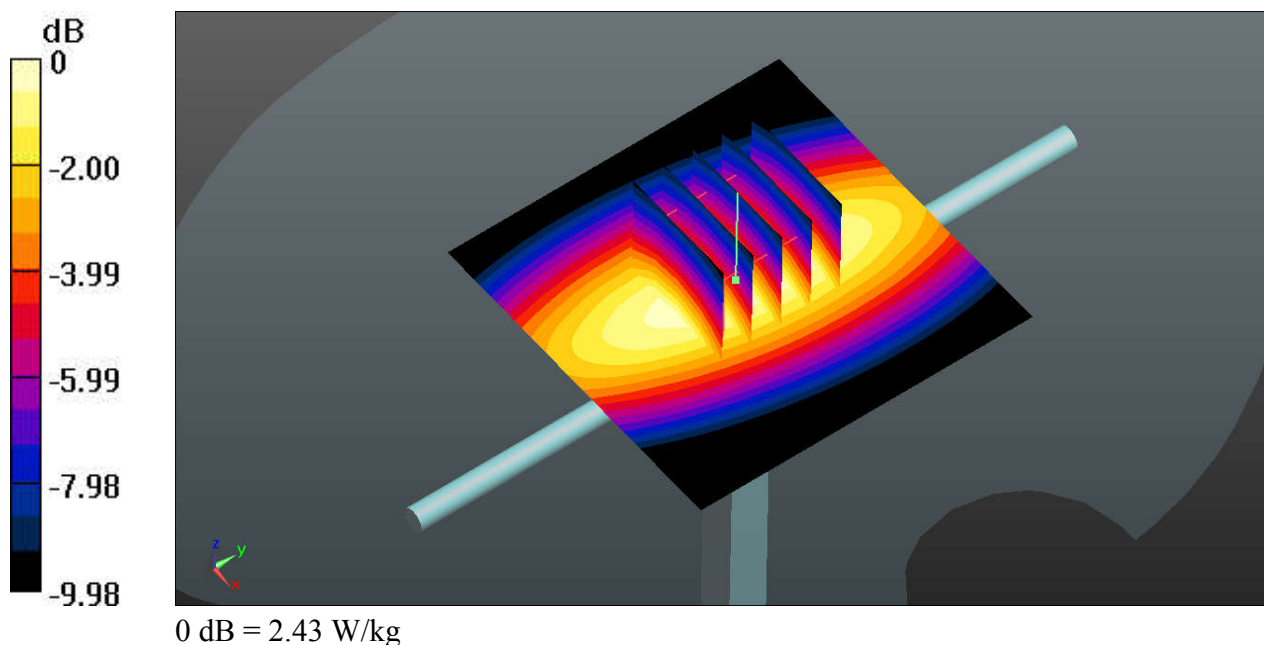

#System Check_Head_835MHz_160607**DUT: Dipole 835 MHz**

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL_835_160607 Medium parameters used: $f = 835$ MHz; $\sigma = 0.887$ S/m; $\epsilon_r = 41.987$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(9.75, 9.75, 9.75); Calibrated: 2015.10.01;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 2016.01.07
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 3.02 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 57.11 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 3.58 W/kg

SAR(1 g) = 2.42 W/kg; SAR(10 g) = 1.59 W/kg

Maximum value of SAR (measured) = 3.05 W/kg

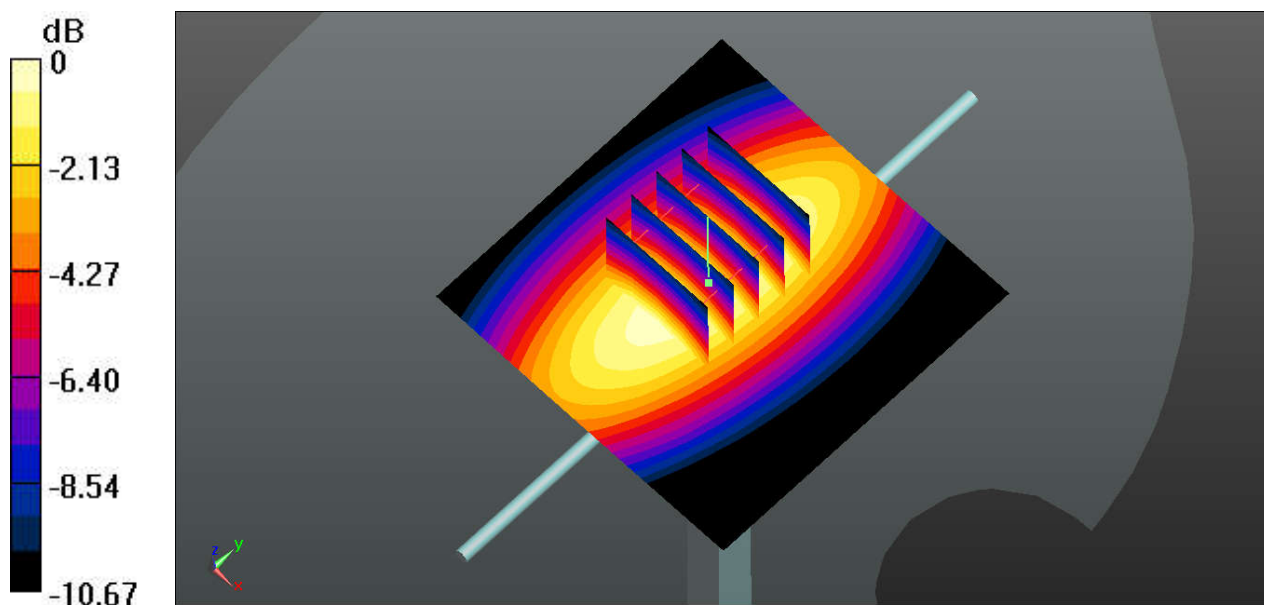

0 dB = 3.02 W/kg

#System Check_Head_1750MHz_160606**DUT: Dipole 1750 MHz**

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: HSL_1800_160606 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.383$ S/m; $\epsilon_r = 41.3$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(8.41, 8.41, 8.41); Calibrated: 2015.10.01;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 2016.01.07
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 13.4 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 98.66 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 16.8 W/kg

SAR(1 g) = 9.59 W/kg; SAR(10 g) = 5.18 W/kg

Maximum value of SAR (measured) = 13.4 W/kg

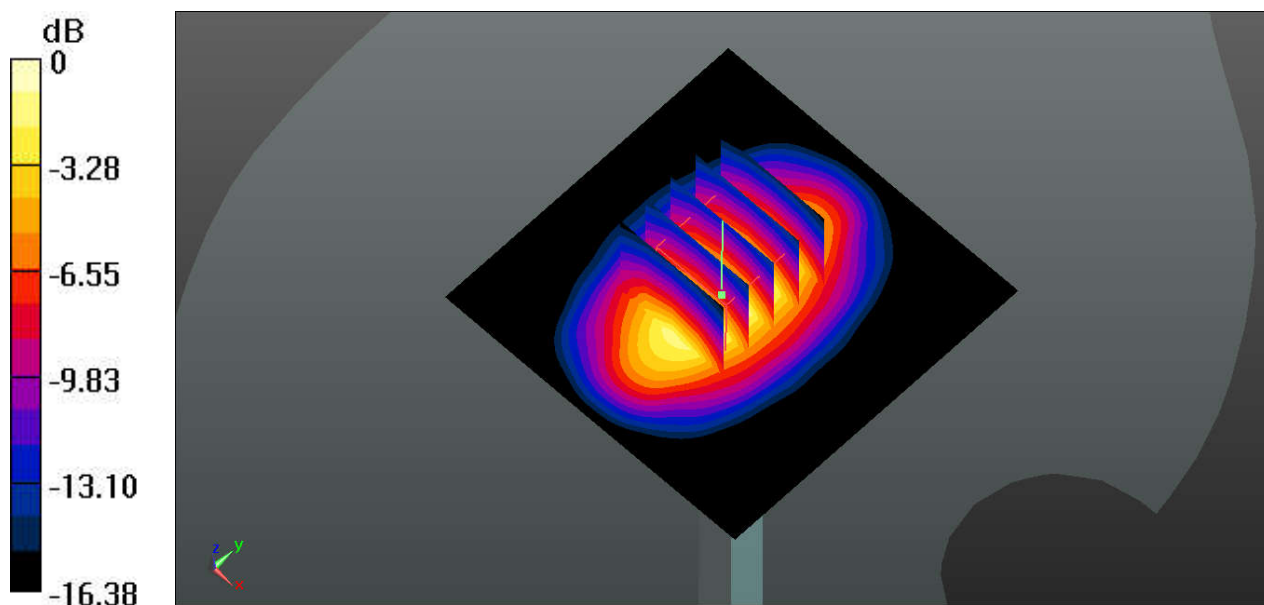

0 dB = 13.4 W/kg

#System Check_Head_1900MHz_160606**DUT: Dipole 1900 MHz**

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL_1900_160606 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.419$ S/m; $\epsilon_r = 40.346$;
 $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(8.12, 8.12, 8.12); Calibrated: 2015.10.01;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 2016.01.07
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 14.8 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 101.7 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 18.6 W/kg

SAR(1 g) = 10.2 W/kg; SAR(10 g) = 5.34 W/kg

Maximum value of SAR (measured) = 14.4 W/kg

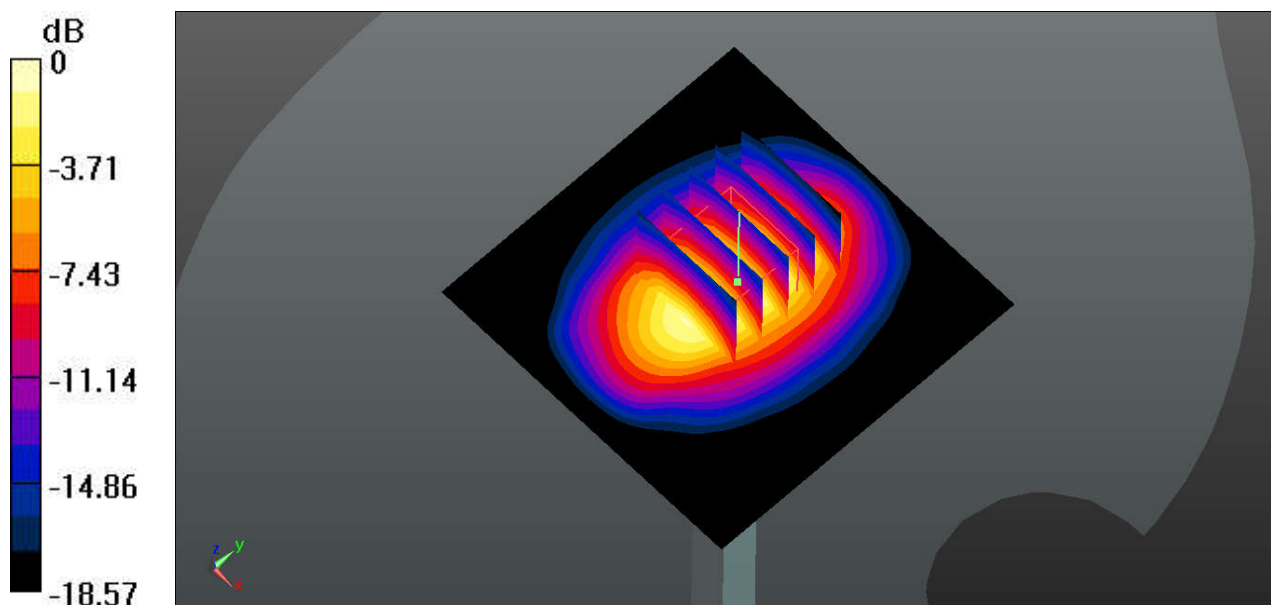

#System Check_Head_2300MHz_160603**DUT: D2300V2**

Communication System: UID 0, CW ; Frequency: 2300 MHz;Duty Cycle: 1:1

Medium: HSL_2300_160603 Medium parameters used: $f = 2300$ MHz; $\sigma = 1.693$ S/m; $\epsilon_r = 38.361$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(7.75, 7.75, 7.75); Calibrated: 2015.10.01;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 2016.01.07
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 18.2 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 108.0 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 24.3 W/kg

SAR(1 g) = 11.7 W/kg; SAR(10 g) = 5.51 W/kg

Maximum value of SAR (measured) = 14.9 W/kg

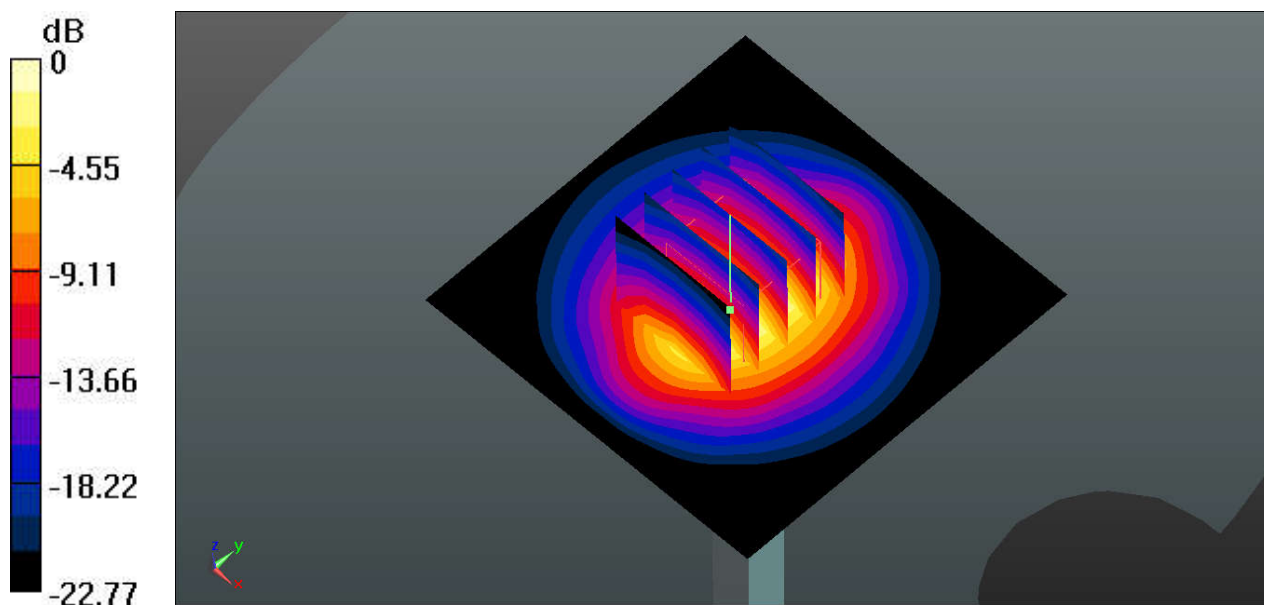

0 dB = 18.2 W/kg

#System Check_Head_2450MHz_160607**DUT: Dipole 2450 MHz**

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: HSL_2450_160607 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.865$ S/m; $\epsilon_r = 37.492$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3958; ConvF(7.58, 7.58, 7.58); Calibrated: 2015.07.23;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2015.11.23
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (81x81x1): Interpolated grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 20.8 W/kg


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 91.09 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 27.1 W/kg

SAR(1 g) = 13.4 W/kg; SAR(10 g) = 6.23 W/kg

Maximum value of SAR (measured) = 20.3 W/kg

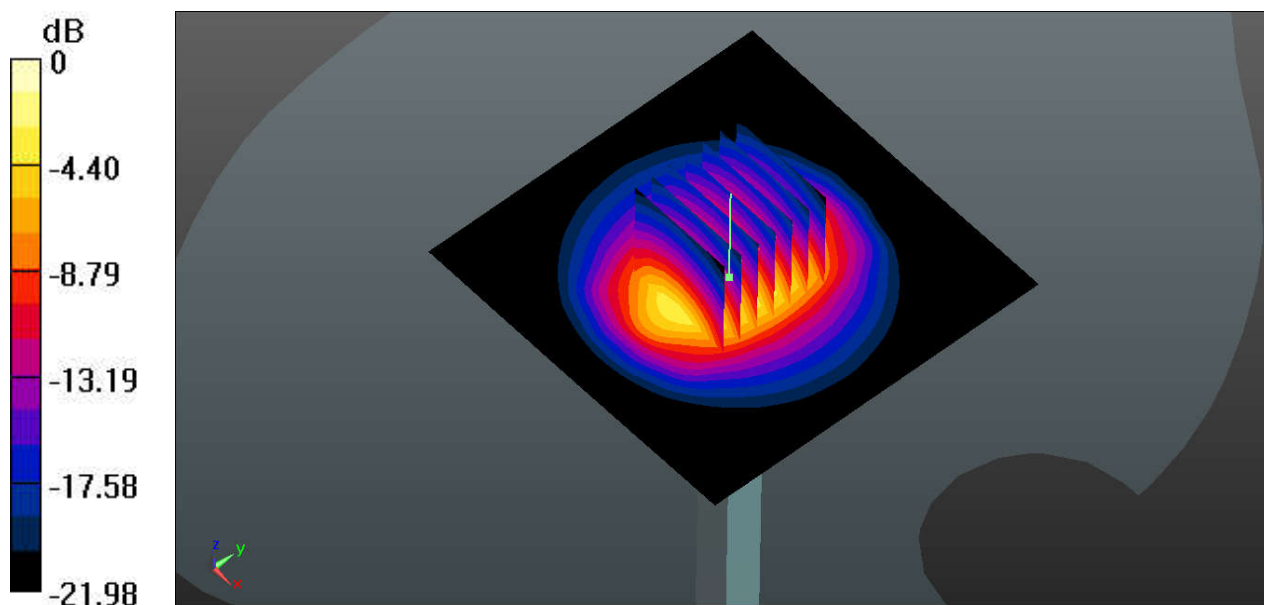

0 dB = 20.8 W/kg

#System Check_Head_2600MHz_160603**DUT: Dipole 2600 MHz**

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: HSL_2600_160603 Medium parameters used: $f = 2600$ MHz; $\sigma = 2.054$ S/m; $\epsilon_r = 38.328$;
 $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(7.18, 7.18, 7.18); Calibrated: 2015.10.01;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 2016.01.07
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 23.4 W/kg


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 104.3 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 31.4 W/kg

SAR(1 g) = 14.8 W/kg; SAR(10 g) = 6.6 W/kg

Maximum value of SAR (measured) = 22.9 W/kg

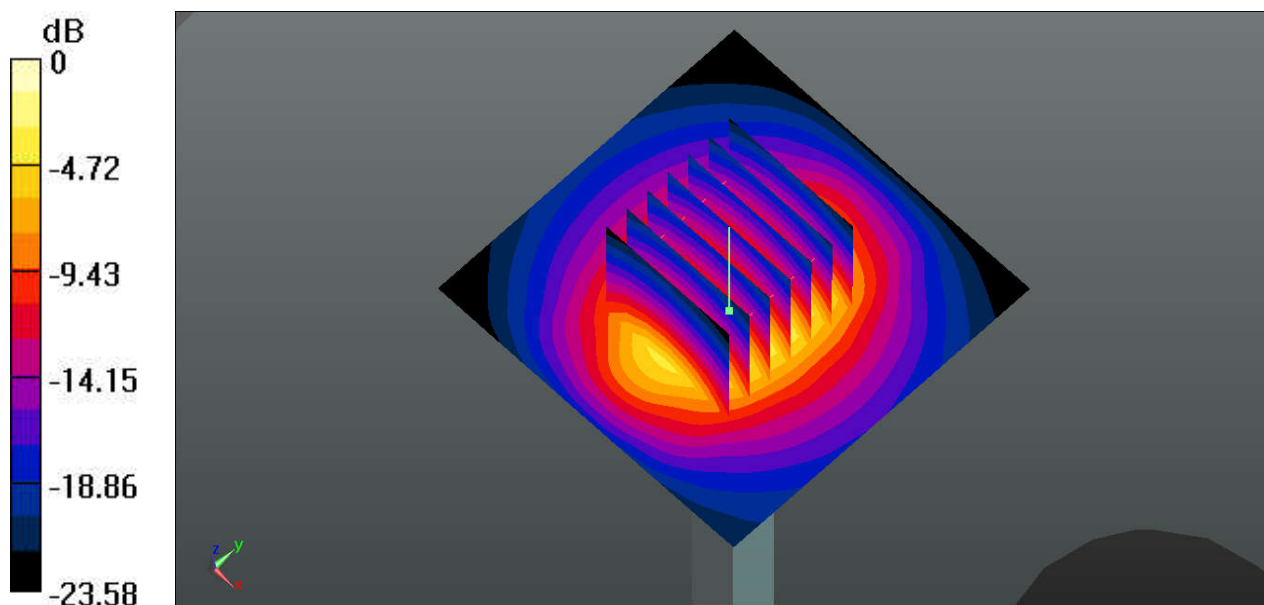

0 dB = 29.3 W/kg

#System Check_Head_5250MHz_160608**DUT: Dipole 5GHz**

Communication System: UID 0, CW (0); Frequency: 5250 MHz; Duty Cycle: 1:1

Medium: HSL_5250_160608 Medium parameters used: $f = 5250$ MHz; $\sigma = 4.597$ S/m; $\epsilon_r = 36.629$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(4.99, 4.99, 4.99); Calibrated: 2015.11.27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 2016.01.07
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=100mW/Area Scan (71x71x1): Interpolated grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 20.1 W/kg


Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 56.62 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 34.4 W/kg

SAR(1 g) = 8.19 W/kg; SAR(10 g) = 2.24 W/kg

Maximum value of SAR (measured) = 20.6 W/kg

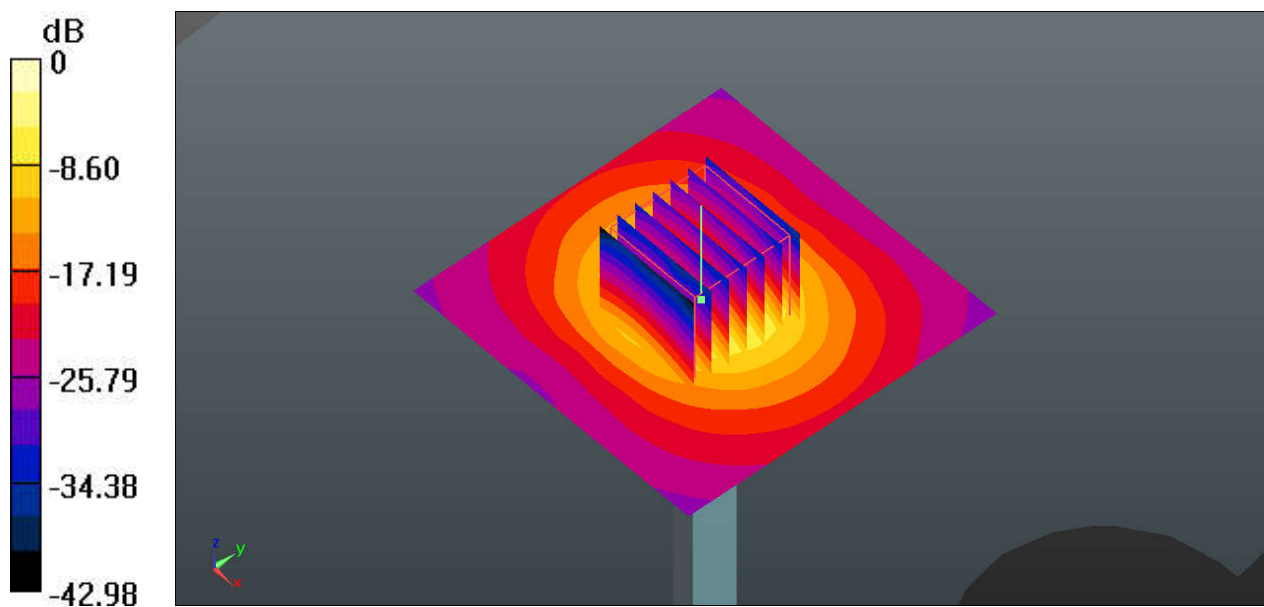

0 dB = 20.1 W/kg

#System Check_Head_5600MHz_160608**DUT: Dipole 5GHz**

Communication System: UID 0, CW (0); Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: HSL_5600_160608 Medium parameters used: $f = 5600$ MHz; $\sigma = 5.004$ S/m; $\epsilon_r = 36.093$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(4.28, 4.28, 4.28); Calibrated: 2015.11.27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 2016.01.07
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=100mW/Area Scan (71x71x1): Interpolated grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 21.3 W/kg


Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 56.50 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 36.5 W/kg

SAR(1 g) = 8.58 W/kg; SAR(10 g) = 2.35 W/kg

Maximum value of SAR (measured) = 22.0 W/kg

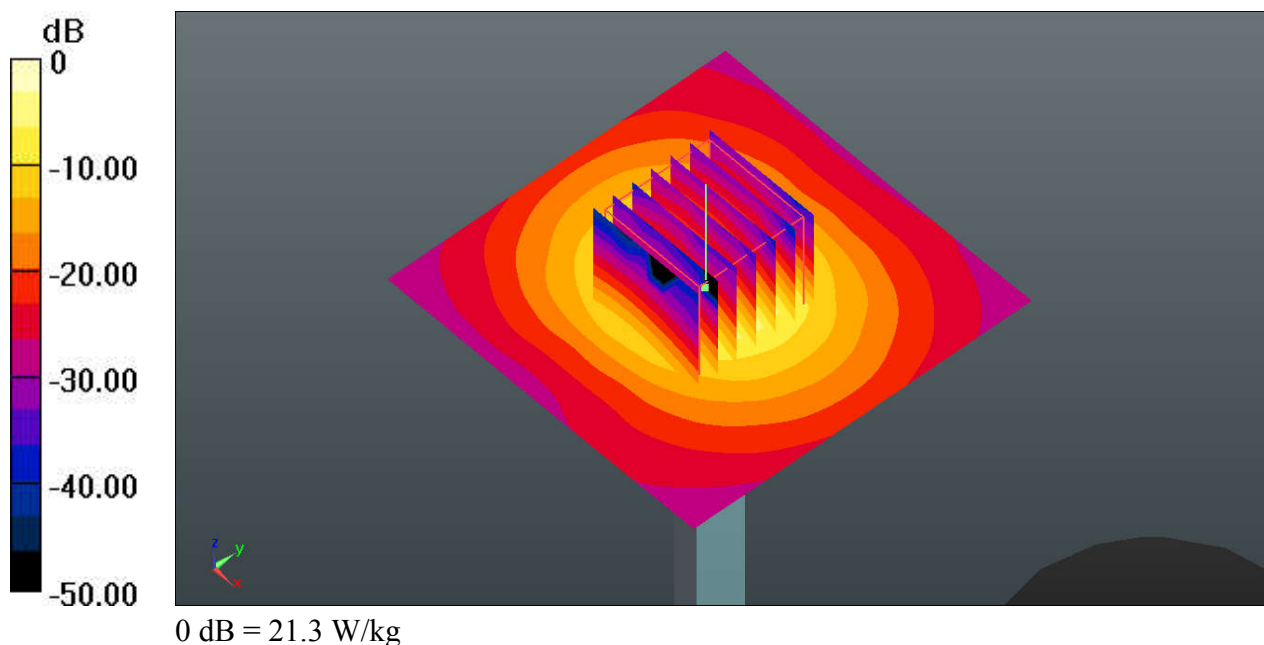

#System Check_Head_5750MHz_160608**DUT: Dipole 5GHz**

Communication System: UID 0, CW (0); Frequency: 5750 MHz; Duty Cycle: 1:1

Medium: HSL_5750_160608 Medium parameters used: $f = 5750$ MHz; $\sigma = 5.173$ S/m; $\epsilon_r = 35.826$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(4.4, 4.4, 4.4); Calibrated: 2015.11.27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 2016.01.07
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=100mW/Area Scan (71x71x1): Interpolated grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 20.3 W/kg


Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 54.45 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 35.8 W/kg

SAR(1 g) = 8.22 W/kg; SAR(10 g) = 2.25 W/kg

Maximum value of SAR (measured) = 20.9 W/kg

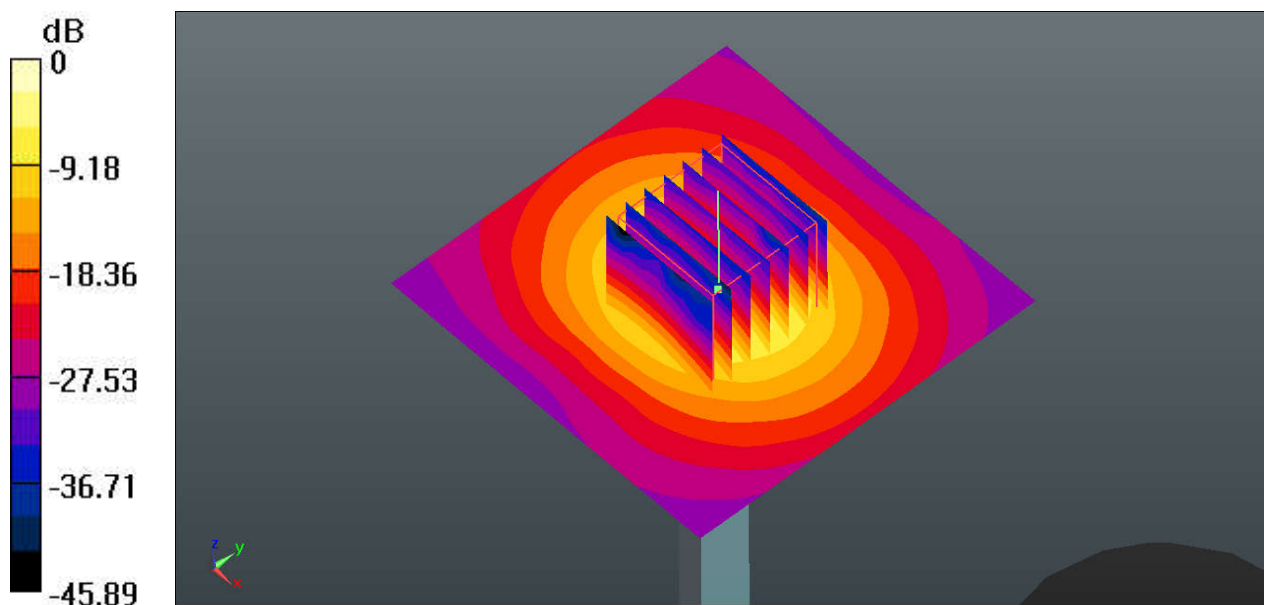

#System Check_Body_750MHz_160605**DUT: Dipole 750 MHz**

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: MSL_750_160605 Medium parameters used: $f = 750$ MHz; $\sigma = 0.961$ S/m; $\epsilon_r = 53.917$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(10.08, 10.08, 10.08); Calibrated: 2015.10.01;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 2016.01.07
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 2.69 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 49.00 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 3.13 W/kg

SAR(1 g) = 2.15 W/kg; SAR(10 g) = 1.45 W/kg

Maximum value of SAR (measured) = 2.67 W/kg

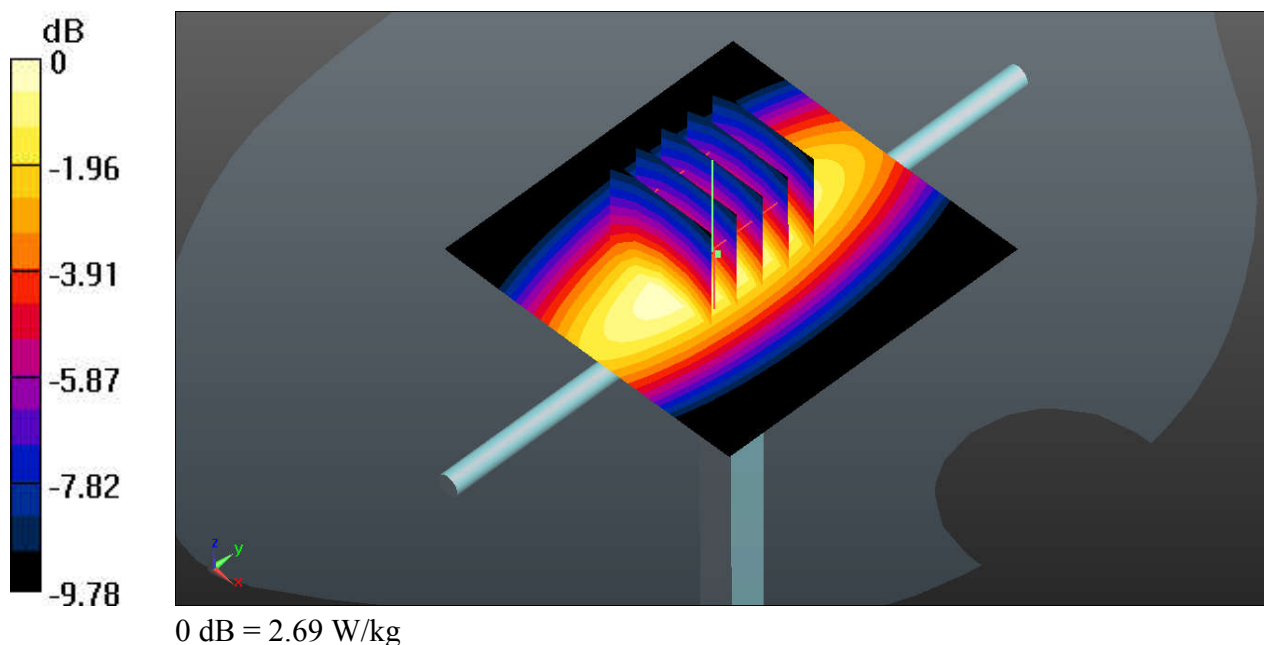

#System Check_Body_835MHz_160605**DUT: Dipole 835 MHz**

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: MSL_835_160605 Medium parameters used: $f = 835$ MHz; $\sigma = 1.011$ S/m; $\epsilon_r = 56.243$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(9.8, 9.8, 9.8); Calibrated: 2015.10.01;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 2016.01.07
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 2.63 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 50.94 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 3.60 W/kg

SAR(1 g) = 2.45 W/kg; SAR(10 g) = 1.61 W/kg

Maximum value of SAR (measured) = 2.62 W/kg

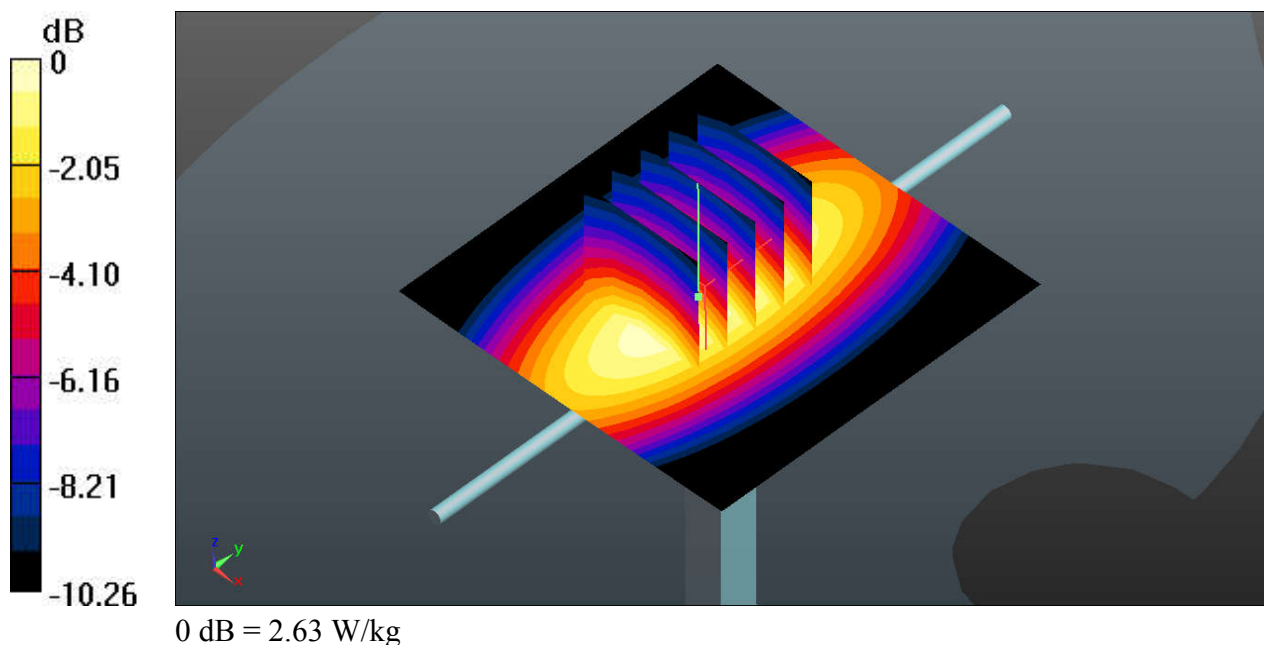

#System Check_Body_1750MHz_160604**DUT: Dipole 1750 MHz**

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: MSL_1800_160604 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.526$ S/m; $\epsilon_r = 52.01$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(8.01, 8.01, 8.01); Calibrated: 2015.10.01;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 2016.01.07
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 13.3 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 95.62 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 16.4 W/kg

SAR(1 g) = 9.41 W/kg; SAR(10 g) = 5.03 W/kg

Maximum value of SAR (measured) = 13.1 W/kg

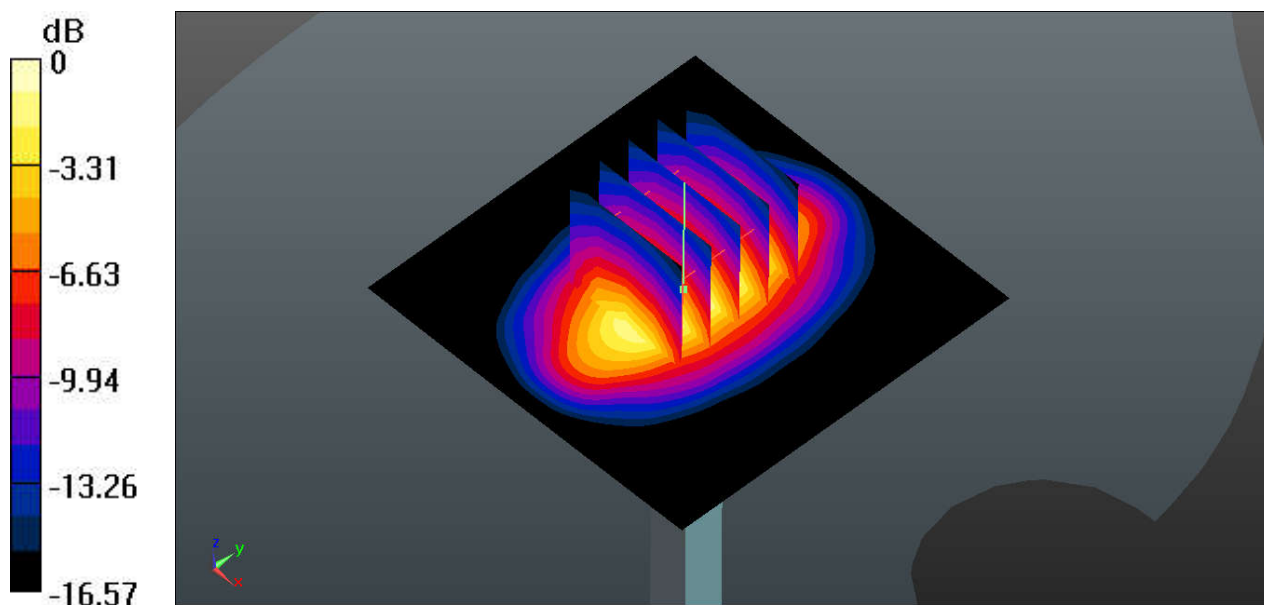

0 dB = 13.3 W/kg

#System Check_Body_1900MHz_160604**DUT: Dipole 1900 MHz**

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL_1900_160604 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.512$ S/m; $\epsilon_r = 53.903$;
 $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(7.75, 7.75, 7.75); Calibrated: 2015.10.01;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 2016.01.07
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 15.2 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 88.44 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 19.4 W/kg

SAR(1 g) = 10.7 W/kg; SAR(10 g) = 5.54 W/kg

Maximum value of SAR (measured) = 15.3 W/kg

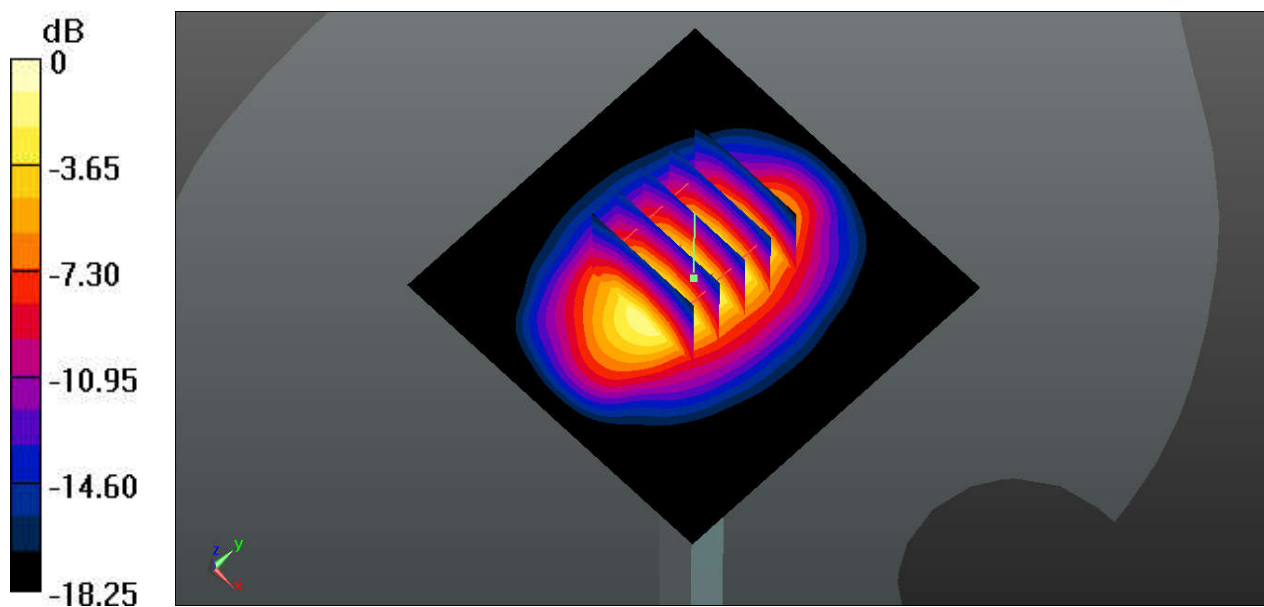

#System Check_Body_2300MHz_160603**DUT: D2300V2**

Communication System: UID 0, CW; Frequency: 2300 MHz; Duty Cycle: 1:1

Medium: MSL_2300_160603 Medium parameters used: $f = 2300$ MHz; $\sigma = 1.766$ S/m; $\epsilon_r = 53.789$;
 $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(7.55, 7.55, 7.55); Calibrated: 2015.10.01;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 2016.01.07
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 18.6 W/kg


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 102.3 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 24.1 W/kg

SAR(1 g) = 12.5 W/kg; SAR(10 g) = 6.07 W/kg

Maximum value of SAR (measured) = 18.5 W/kg

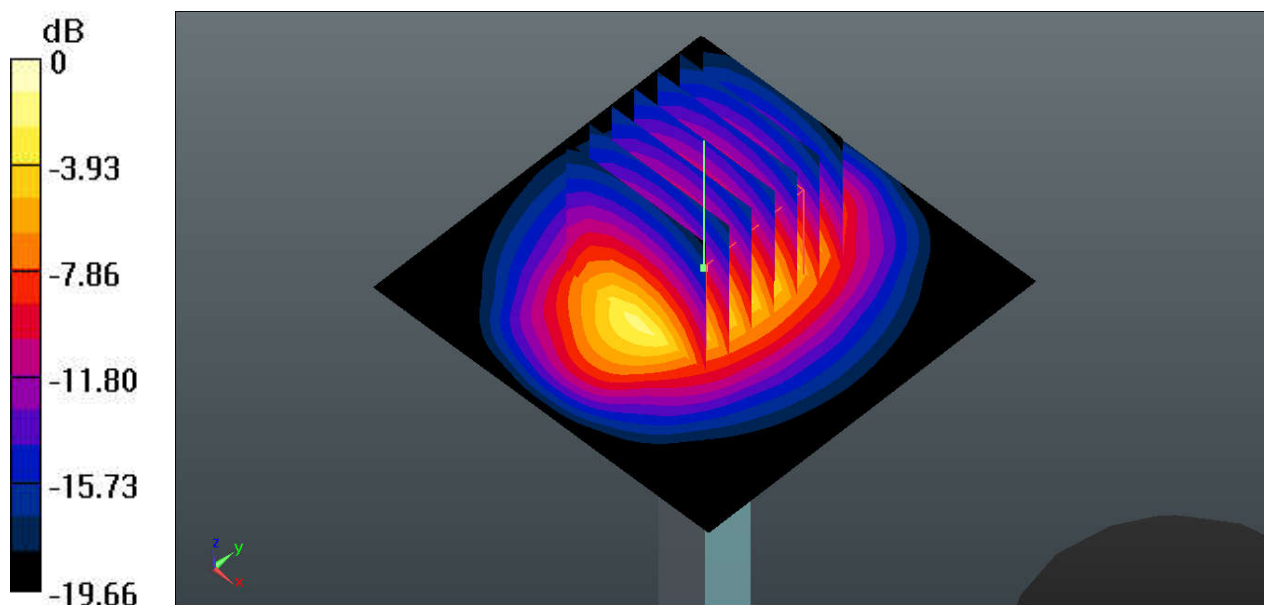

0 dB = 18.6 W/kg

#System Check_Body_2450MHz_160607**DUT: Dipole 2450 MHz**

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: MSL_2450_160607 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.921$ S/m; $\epsilon_r = 50.99$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C ; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(7.34, 7.34, 7.34); Calibrated: 2015.10.01;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 2016.01.07
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (81x81x1): Interpolated grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 20.7 W/kg


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 87.47 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 27.7 W/kg

SAR(1 g) = 13.4 W/kg; SAR(10 g) = 6.21 W/kg

Maximum value of SAR (measured) = 20.6 W/kg

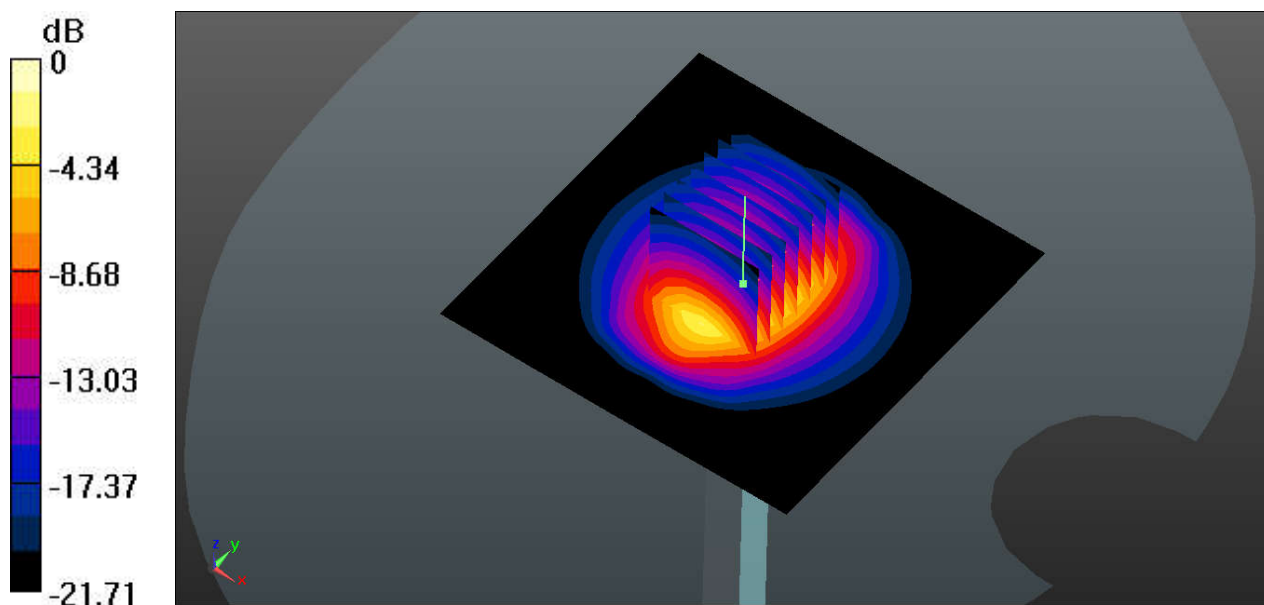

0 dB = 23.8 W/kg

#System Check_Body_2600MHz_160602**DUT: D2600V2**

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: MSL_2600_160602 Medium parameters used: $f = 2600$ MHz; $\sigma = 2.184$ S/m; $\epsilon_r = 50.734$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(6.79, 6.79, 6.79); Calibrated: 2015.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2016.02.16
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x71x1): Interpolated grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 22.8 W/kg


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 99.26 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 29.0 W/kg

SAR(1 g) = 13.4 W/kg; SAR(10 g) = 5.9 W/kg

Maximum value of SAR (measured) = 21.1 W/kg

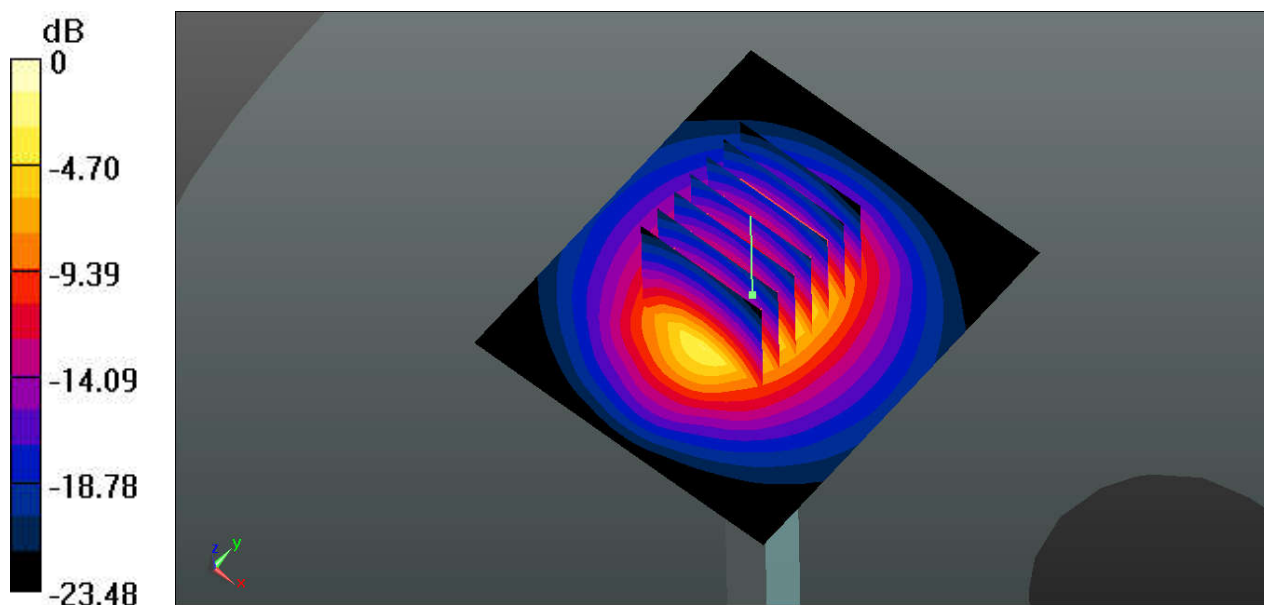

0 dB = 22.8 W/kg

#System Check_Body_5250MHz_160609**DUT: Dipole 5GHz**

Communication System: UID 0, CW (0); Frequency: 5250 MHz; Duty Cycle: 1:1

Medium: MSL_5250_160609 Medium parameters used: $f = 5250$ MHz; $\sigma = 5.346$ S/m; $\epsilon_r = 49.359$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(4.2, 4.2, 4.2); Calibrated: 2015.11.27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 2016.01.07
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=100mW/Area Scan (71x71x1): Interpolated grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 19.3 W/kg


Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 47.92 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 33.3 W/kg

SAR(1 g) = 8.12 W/kg; SAR(10 g) = 2.23 W/kg

Maximum value of SAR (measured) = 20.2 W/kg

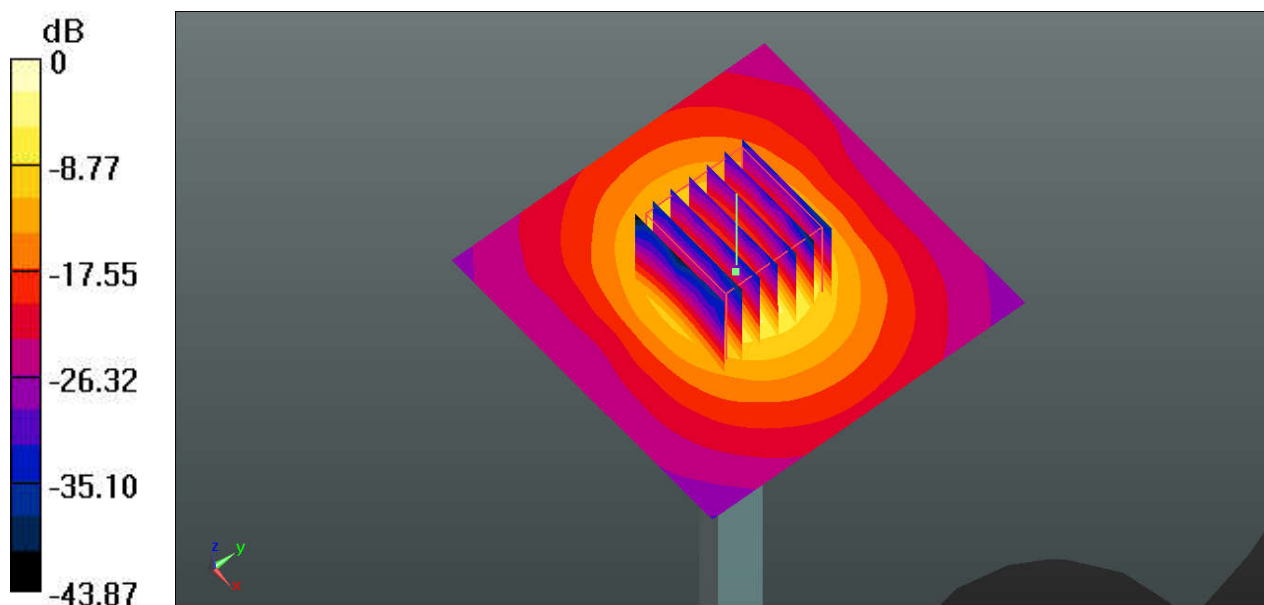

0 dB = 19.3 W/kg

#System Check_Body_5600MHz_160609**DUT: Dipole 5GHz**

Communication System: UID 0, CW (0); Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: MSL_5600_160609 Medium parameters used: $f = 5600$ MHz; $\sigma = 5.852$ S/m; $\epsilon_r = 48.685$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(3.67, 3.67, 3.67); Calibrated: 2015.11.27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 2016.01.07
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=100mW/Area Scan (71x71x1): Interpolated grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 21.6 W/kg


Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 44.82 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 35.8 W/kg

SAR(1 g) = 8.42 W/kg; SAR(10 g) = 2.32 W/kg

Maximum value of SAR (measured) = 20.4 W/kg

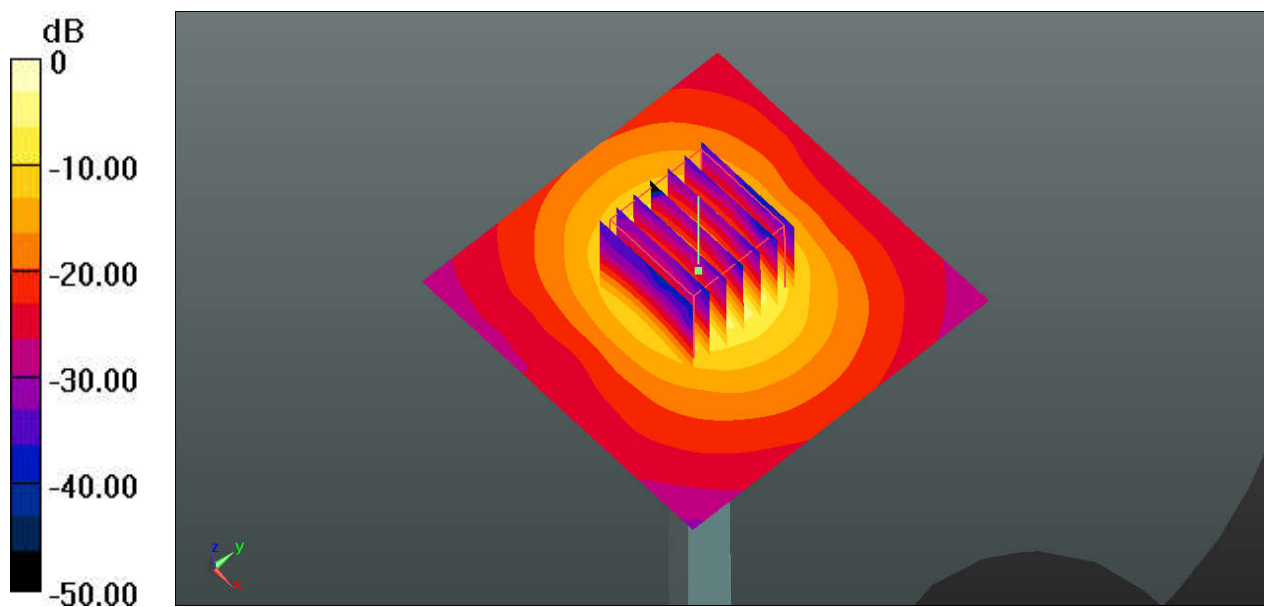

0 dB = 21.6 W/kg

#System Check_Body_5750MHz_160609**DUT: Dipole 5GHz**

Communication System: UID 0, CW (0); Frequency: 5750 MHz; Duty Cycle: 1:1

Medium: MSL_5750_160609 Medium parameters used: $f = 5750$ MHz; $\sigma = 6.01$ S/m; $\epsilon_r = 48.529$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(3.73, 3.73, 3.73); Calibrated: 2015.11.27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 2016.01.07
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=100mW/Area Scan (71x71x1): Interpolated grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 19.2 W/kg


Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 44.41 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 33.0 W/kg

SAR(1 g) = 7.83 W/kg; SAR(10 g) = 2.16 W/kg

Maximum value of SAR (measured) = 19.4 W/kg

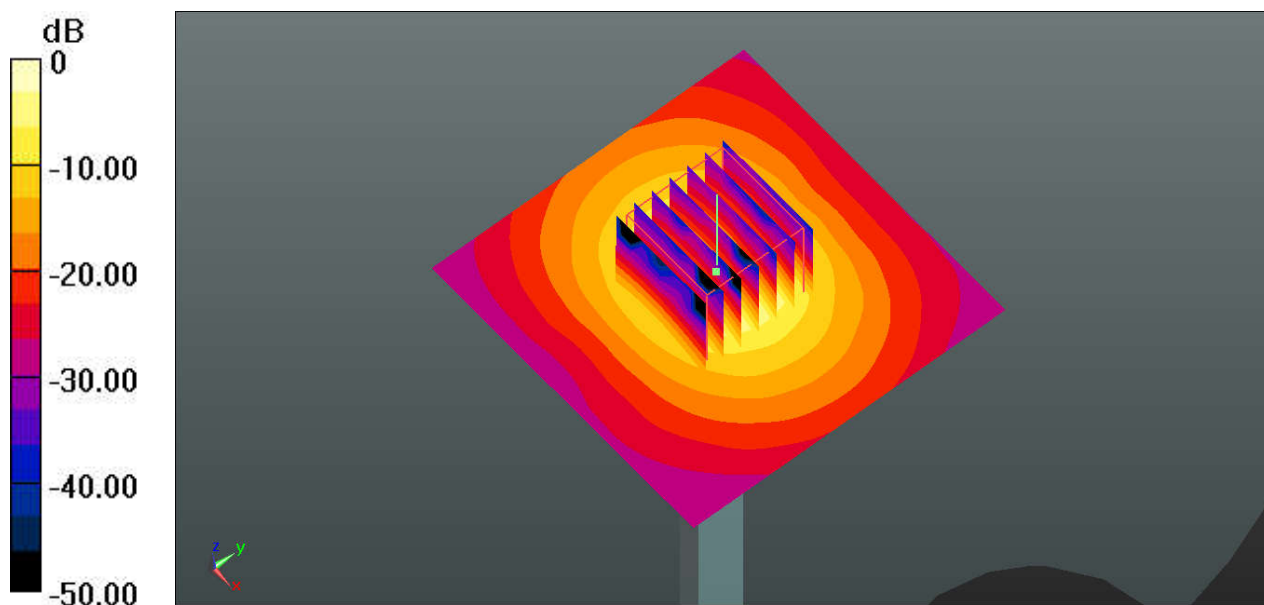

0 dB = 19.2 W/kg



Appendix B. Plots of High SAR Measurement

The plots are shown as follows.

#01_GSM850_GPRS(2 Tx slots)_Right Cheek_Ch251

Communication System: UID 0, GPRS/EDGE10 (0); Frequency: 848.8 MHz; Duty Cycle: 1:4.15
Medium: HSL_835_160607 Medium parameters used: $f = 848.8$ MHz; $\sigma = 0.883$ S/m; $\epsilon_r = 41.543$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.6 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(9.75, 9.75, 9.75); Calibrated: 2015.10.01;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 2016.01.07
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch251/Area Scan (81x141x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.202 W/kg


Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.824 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.214 W/kg

SAR(1 g) = 0.177 W/kg; SAR(10 g) = 0.137 W/kg

Maximum value of SAR (measured) = 0.199 W/kg

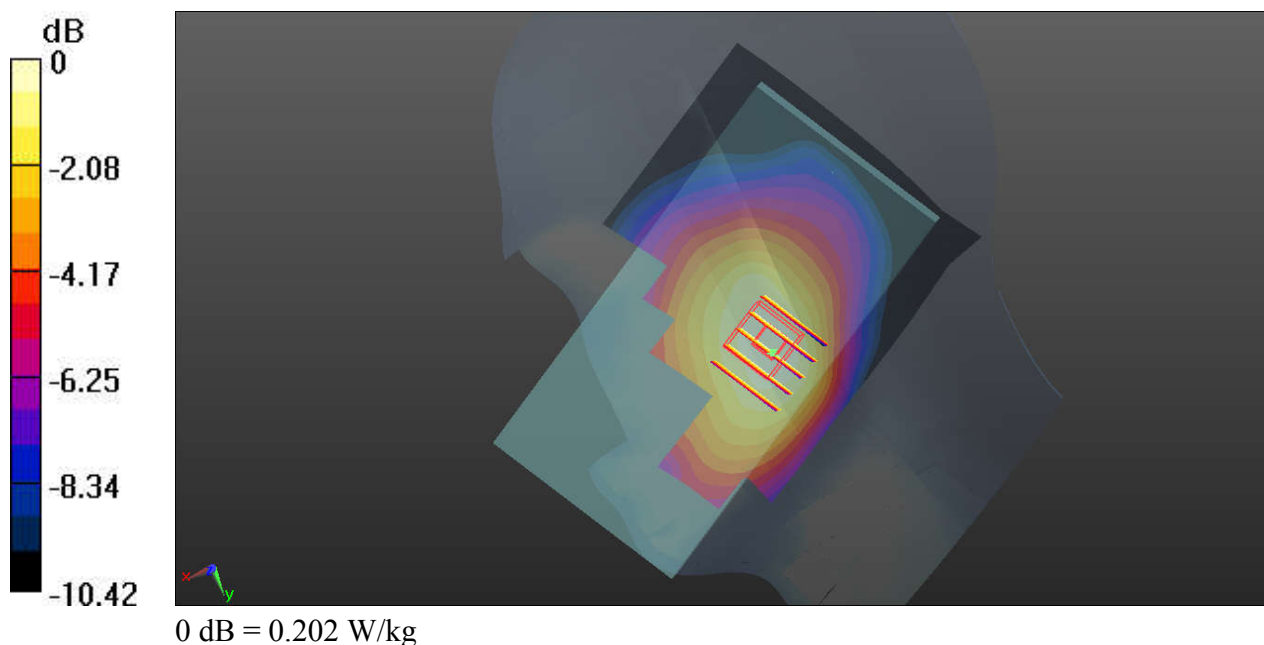

#02_GSM1900_GPRS(4 Tx slots)_Left Cheek_Ch512

Communication System: UID 0, GPRS/EDGE12 (0); Frequency: 1850.2 MHz; Duty Cycle: 1:2.08
Medium: HSL_1900_160606 Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.369$ S/m; $\epsilon_r = 40.567$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(8.12, 8.12, 8.12); Calibrated: 2015.10.01;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 2016.01.07
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch512/Area Scan (81x141x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.167 W/kg


Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.055 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.194 W/kg

SAR(1 g) = 0.132 W/kg; SAR(10 g) = 0.083 W/kg

Maximum value of SAR (measured) = 0.161 W/kg

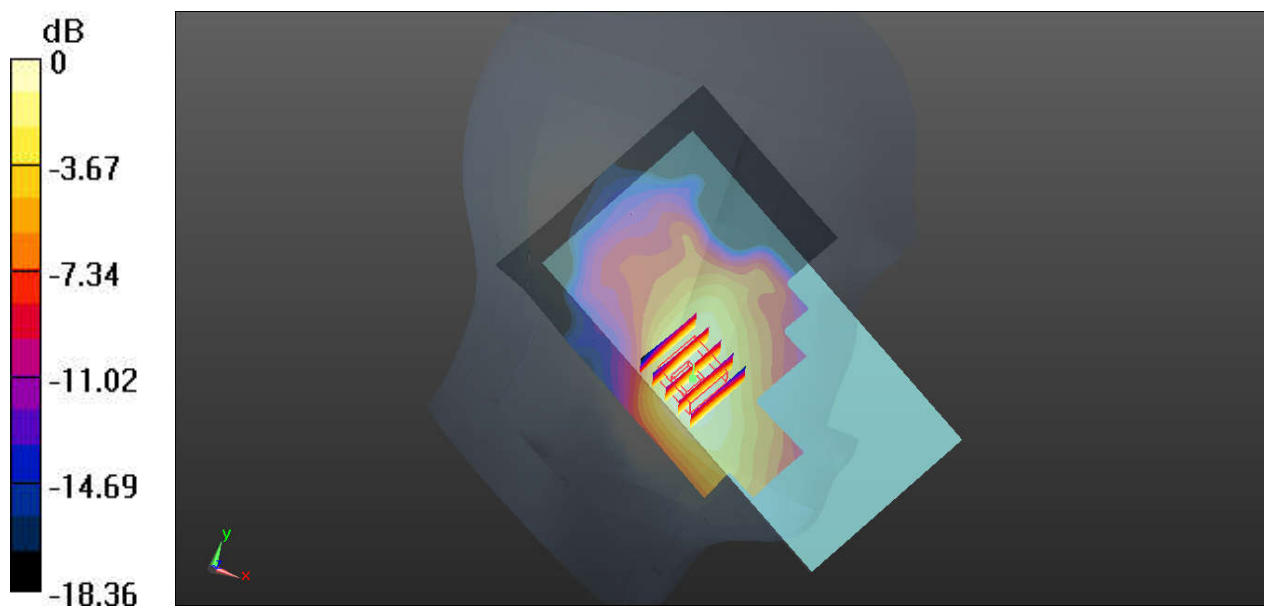

0 dB = 0.167 W/kg

#03_WCDMA V_RMC 12.2Kbps_Right Cheek_Ch4233

Communication System: UID 0, UMTS (0); Frequency: 846.6 MHz; Duty Cycle: 1:1
Medium: HSL_835_160607 Medium parameters used: $f = 846.6$ MHz; $\sigma = 0.884$ S/m; $\epsilon_r = 41.628$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.6 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(9.75, 9.75, 9.75); Calibrated: 2015.10.01;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 2016.01.07
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch4233/Area Scan (81x141x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.127 W/kg


Ch4233/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.048 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.129 W/kg

SAR(1 g) = 0.107 W/kg; SAR(10 g) = 0.083 W/kg

Maximum value of SAR (measured) = 0.120 W/kg

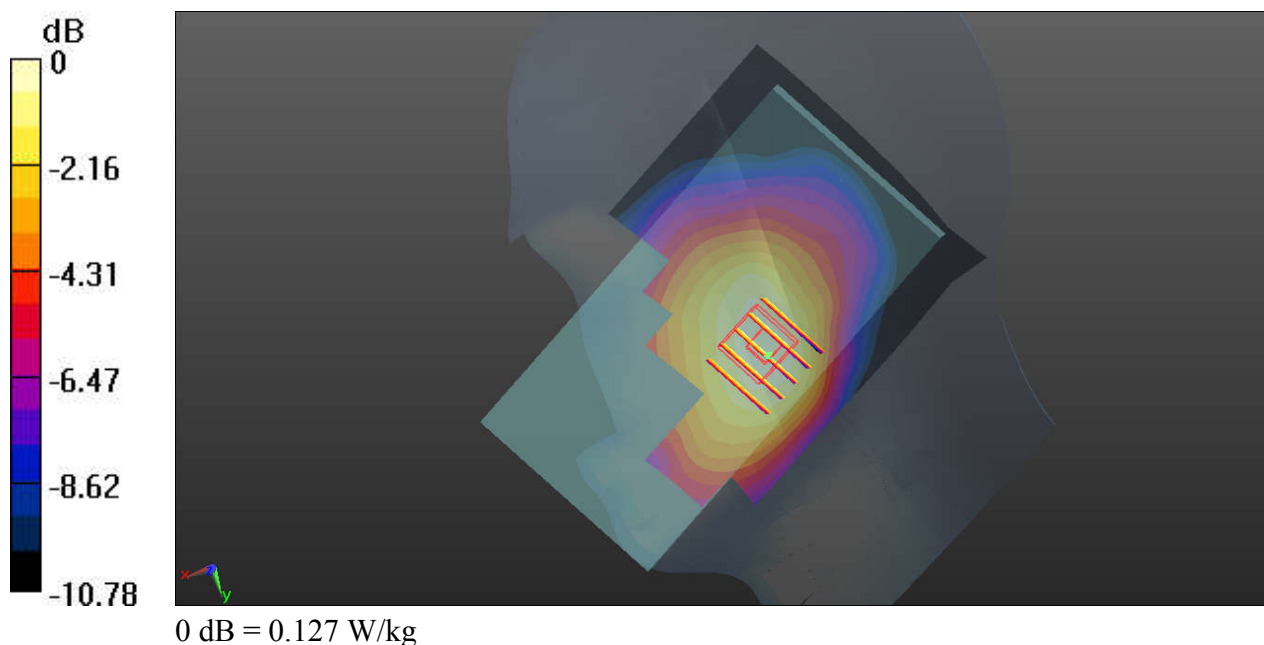

#04_WCDMA IV_RMC 12.2Kbps_Left Cheek_Ch1513

Communication System: UID 0, UMTS (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1
Medium: HSL_1800_160606 Medium parameters used: $f = 1752.6$ MHz; $\sigma = 1.386$ S/m; $\epsilon_r = 41.285$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(8.41, 8.41, 8.41); Calibrated: 2015.10.01;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 2016.01.07
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch1513/Area Scan (81x141x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.205 W/kg


Ch1513/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.709 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.231 W/kg

SAR(1 g) = 0.162 W/kg; SAR(10 g) = 0.105 W/kg

Maximum value of SAR (measured) = 0.199 W/kg

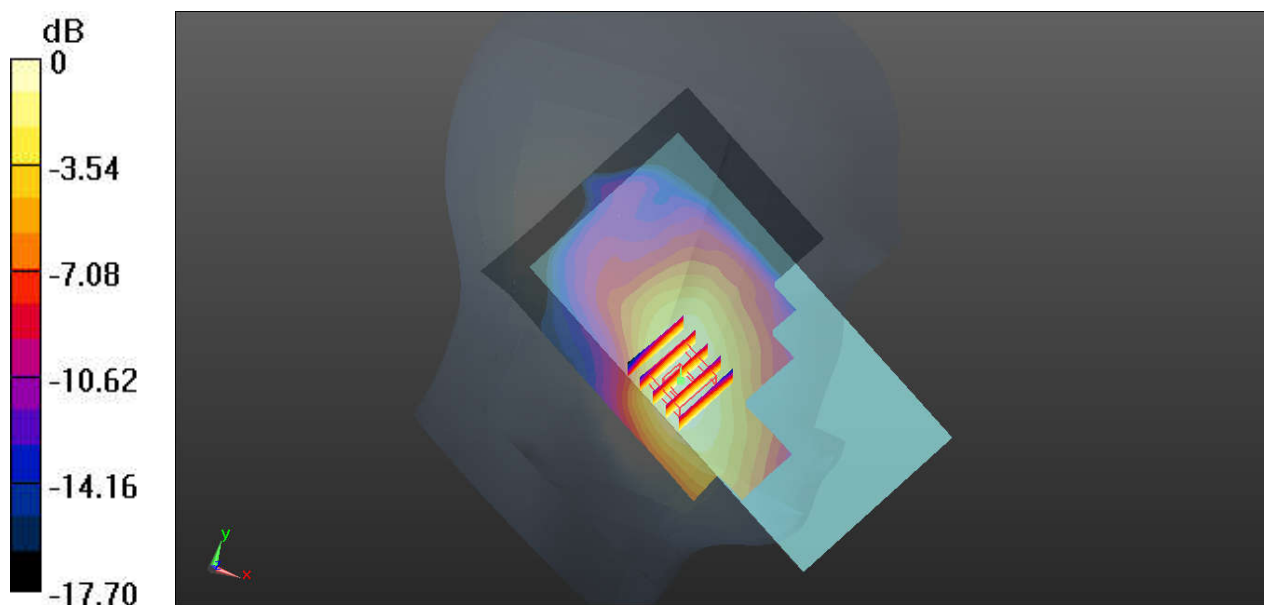

0 dB = 0.205 W/kg

#05_WCDMA II_RMC 12.2Kbps_Left Cheek_Ch9538

Communication System: UID 0, UMTS (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1
Medium: HSL_1900_160606 Medium parameters used: $f = 1907.6$ MHz; $\sigma = 1.427$ S/m; $\epsilon_r = 40.307$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(8.12, 8.12, 8.12); Calibrated: 2015.10.01;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 2016.01.07
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch9538/Area Scan (81x141x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.279 W/kg


Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.035 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.334 W/kg

SAR(1 g) = 0.223 W/kg; SAR(10 g) = 0.140 W/kg

Maximum value of SAR (measured) = 0.277 W/kg

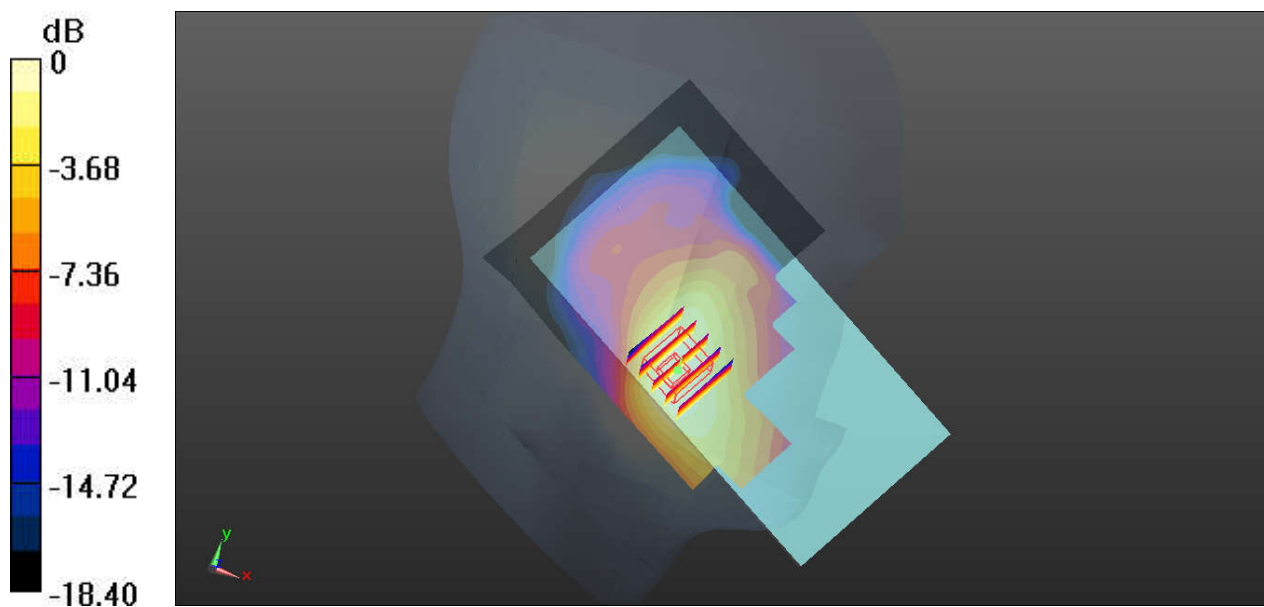

0 dB = 0.279 W/kg

#06_LTE Band 12_10M_QPSK_1RB_25Offset_Right Cheek_Ch23095

Communication System: UID 0, LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL_750_160607 Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.859$ S/m; $\epsilon_r = 41.717$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3911; ConvF(10.06, 10.06, 10.06); Calibrated: 2015.10.01;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 2016.01.07
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch23095/Area Scan (81x141x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.106 W/kg

Ch23095/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.020 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.119 W/kg

SAR(1 g) = 0.098 W/kg; SAR(10 g) = 0.079 W/kg

Maximum value of SAR (measured) = 0.112 W/kg

