

## Partial FCC Test Report

### (PART 24)

**Report No.:** RF180629C15-5

**FCC ID:** O57T77W980

**Test Model:** T77W980

**Received Date:** Jun. 23, 2018

**Test Date:** Aug. 07, 2018 ~ Aug. 09, 2018

**Issued Date:** Aug. 16, 2018

**Applicant:** Lenovo(Shanghai) Electronics Technology Co., Ltd.

**Address:** NO.68 BUILDING, 199 FENJU RD, China (Shanghai) Pilot Free Trade Zone, 200131, CHINA

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan ( R.O.C )

**Test Location (1):** No. 19, Hwa Ya 2nd Rd, Wen Hwa Vil, Kwei Shan Dist., Taoyuan City 33383, Taiwan (R.O.C)

**Test Location (2):** No.215, Sec. 3, Beixin Rd., Xindian Dist., New Taipei City 231, Taiwan, R.O.C

**FCC Registration /  
Designation Number:** 427177 / TW0011



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

## Table of Contents

<b>Release Control Record .....</b>	<b>3</b>
<b>1 Certificate of Conformity .....</b>	<b>4</b>
<b>2 Summary of Test Results.....</b>	<b>5</b>
2.1 Measurement Uncertainty.....	5
2.2 Test Site and Instruments .....	6
<b>3 General Information .....</b>	<b>7</b>
3.1 General Description of EUT .....	7
3.2 Configuration of System under Test.....	9
3.2.1 Description of Support Units .....	9
3.3 Test Mode Applicability and Tested Channel Detail .....	9
3.4 EUT Operating Conditions .....	12
3.5 General Description of Applied Standards.....	12
<b>4 Test Types and Results .....</b>	<b>13</b>
4.1 Output Power Measurement.....	13
4.1.1 Limits of Output Power Measurement .....	13
4.1.2 Test Procedures.....	13
4.1.3 Test Setup.....	14
4.1.4 Test Results .....	15
4.2 Radiated Emission Measurement.....	30
4.2.1 Limits of Radiated Emission Measurement .....	30
4.2.2 Test Procedure .....	30
4.2.3 Deviation from Test Standard .....	30
4.2.4 Test Setup.....	31
4.2.5 Test Results .....	32
<b>5 Pictures of Test Arrangements.....</b>	<b>50</b>
<b>Appendix – Information on the Testing Laboratories .....</b>	<b>51</b>

### Release Control Record

Issue No.	Description	Date Issued
RF180629C15-5	Original Release	Aug. 16, 2018

## 1 Certificate of Conformity

**Product:** Gigabit RF Card

**Brand:** FOXCONN

**Test Model:** T77W980

**Sample Status:** Identical Prototype

**Applicant:** Lenovo(Shanghai) Electronics Technology Co., Ltd.

**Test Date:** Aug. 07, 2018 ~ Aug. 09, 2018

**Standards:** FCC Part 24, Subpart E

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

**Prepared by :**



**Date:**

Aug. 16, 2018

Gina Liu / Specialist

**Approved by :**



**Date:**

Aug. 16, 2018

Dylan Chiou / Project Engineer

## 2 Summary of Test Results

Applied Standard: FCC Part 24 & Part 2			
FCC Clause	Test Item	Result	Remarks
2.1046 24.232	Effective Isotropic Radiated Power	Pass	Meet the requirement of limit.
2.1047	Modulation Characteristics	N/A	Refer to Note
2.1046 24.232(d)	Peak to Average Ratio	N/A	Refer to Note
2.1055 24.235	Frequency Stability	N/A	Refer to Note
2.1049 24.238(b)	Occupied Bandwidth	N/A	Refer to Note
24.238(b)	Band Edge Measurements	N/A	Refer to Note
2.1051 24.238	Conducted Spurious Emissions	N/A	Refer to Note
2.1053 24.238	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -36.68 dB at 3720.00 MHz.

### Note:

This report is a Class II change Partial report. Therefore, only test item of Effective Radiated Power and Radiated Spurious Emissions tests were performed for this report. Other testing data please refer to BV CPS report no.: RF180503E05-1 for module (Brand: FOXCONN, Model: T77W980)

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Radiated Emissions up to 1 GHz	30 MHz ~ 200 MHz	2.0153 dB
	200 MHz ~ 1000 MHz	2.0224 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	1.0121 dB
	18 GHz ~ 40 GHz	1.1508 dB

## 2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver Agilent	N9038A	MY51210203	Mar. 16, 2018	Mar. 15, 2019
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Jan. 11, 2018	Jan. 10, 2019
BILOG Antenna SCHWARZBECK	VULB 9168	9168-153	Dec. 06, 2017	Dec. 05, 2018
Double Ridge Guide Horn Antenna EMCO	3115	5619	Nov. 30, 2017	Nov. 29, 2018
Fixed Attenuator Mini-Circuits	BW-N4W5+	PAD-ATT4-01	Jan. 29, 2018	Jan. 28, 2019
MXG Vector signal generator Agilent	N5182B	MY53050430	Oct. 24, 2017	Oct. 23, 2018
Preamplifier Agilent	310N	187226	Jun. 19, 2018	Jun. 18, 2019
Preamplifier Agilent	83017A	MY39501357	Jun. 19, 2018	Jun. 18, 2019
HORN Antenna Schwarzbeck	BBHA 9120D	BBHA 9120D	Dec. 12, 2017	Dec. 11, 2018
RF signal cable ETS-LINDGREN	5D-FB	Cable-CH1-01(RF C-SMS-100-SMS- 120+RFC-SMS-1 00-SMS-400)	Jun. 19, 2018	Jun. 18, 2019
RF signal cable ETS-LINDGREN	8D-FB	Cable-CH1-02(RF C-SMS-100-SMS- 24)	Jun. 19, 2018	Jun. 18, 2019
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
Software BV ADT	E3 8.130425b	NA	NA	NA
Antenna Tower MF	NA	NA	NA	NA
Turn Table MF	NA	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA
Communications Tester-Wireless Agilent	8960 Series 10	MY53201073	Jun. 28, 2017	Jun. 27, 2019
Radio Communication Analyzer Anritsu	MT8820C	6201010284	Dec. 28, 2017	Dec. 27, 2018
Temperature & Humidity Chamber	GTH-120-40-CP-AR	MAA1306-019	Sep. 08, 2017	Sep. 07, 2018
Digital Multimeter Fluke	87-III	70360742	Jun. 29, 2018	Jun. 28, 2018

- Note:
1. The calibration interval of the above test instruments is 12 / 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
  2. The test was performed in HsinTien Chamber 1.
  3. The horn antenna and preamplifier (model: 83017A) are used only for the measurement of emission frequency above 1 GHz if tested.
  4. The IC Site Registration No. is IC7450I-1.

### 3 General Information

#### 3.1 General Description of EUT

<b>Product</b>	Gigabit RF Card	
<b>Brand</b>	FOXCONN	
<b>Test Model</b>	T77W980	
<b>Status of EUT</b>	Identical Prototype	
<b>Power Supply Rating</b>	20 / 15 / 9 / 5 Vdc (adapter) 7.68 Vdc (Li-ion battery)	
<b>Modulation Type</b>	WCDMA	QPSK
	LTE	QPSK, 16QAM, 64QAM
<b>Frequency Range</b>	WCDMA	1852.4 ~ 1907.6 MHz
	LTE Band 2 (Channel Bandwidth: 1.4 MHz)	1850.7 ~ 1909.3 MHz
	LTE Band 2 (Channel Bandwidth: 3 MHz)	1851.5 ~ 1908.5 MHz
	LTE Band 2 (Channel Bandwidth: 5 MHz)	1852.5 ~ 1907.5 MHz
	LTE Band 2 (Channel Bandwidth: 10 MHz)	1855.0 ~ 1905.0 MHz
	LTE Band 2 (Channel Bandwidth: 15 MHz)	1857.5 ~ 1902.5 MHz
	LTE Band 2 (Channel Bandwidth: 20 MHz)	1860.0 ~ 1900.0 MHz
	LTE Band 25 (Channel Bandwidth: 1.4 MHz)	1850.7 ~ 1914.3 MHz
	LTE Band 25 (Channel Bandwidth: 3 MHz)	1851.5 ~ 1913.5 MHz
	LTE Band 25 (Channel Bandwidth: 5 MHz)	1852.5 ~ 1912.5 MHz
	LTE Band 25 (Channel Bandwidth: 10 MHz)	1855.0 ~ 1910.0 MHz
	LTE Band 25 (Channel Bandwidth: 15 MHz)	1857.5 ~ 1907.5 MHz
	LTE Band 25 (Channel Bandwidth: 20 MHz)	1860.0 ~ 1905.0 MHz
	<b>Max. EIRP Power</b>	WCDMA
LTE Band 2 (Channel Bandwidth: 1.4 MHz)		287.08 mW
LTE Band 2 (Channel Bandwidth: 3 MHz)		294.44 mW
LTE Band 2 (Channel Bandwidth: 5 MHz)		303.39 mW
LTE Band 2 (Channel Bandwidth: 10 MHz)		312.61 mW
LTE Band 2 (Channel Bandwidth: 15 MHz)		267.92 mW
LTE Band 2 (Channel Bandwidth: 20 MHz)		326.59 mW
LTE Band 25 (Channel Bandwidth: 1.4 MHz)		302.69 mW
LTE Band 25 (Channel Bandwidth: 3 MHz)		304.09 mW
LTE Band 25 (Channel Bandwidth: 5 MHz)		315.50 mW
LTE Band 25 (Channel Bandwidth: 10 MHz)		293.97 mW
LTE Band 25 (Channel Bandwidth: 15 MHz)		303.39 mW
LTE Band 25 (Channel Bandwidth: 20 MHz)	326.59 mW	
<b>Antenna Type</b>	Refer to Note as below	
<b>Accessory Device</b>	Refer to Note as below	
<b>Data Cable Supplied</b>	Refer to Note as below	

Note:

1. The change list for EUT is listed as below.
  - Adding a specific host.
  - Changing antenna.
  - Changing SW (to disable LTE Band 71 and to disable CA\_38C for configurations of CA).
2. The End-product contains following accessory devices.

Product	Brand	Model	Description
Adapter	Lenovo	ADLX45YLC3D	I/P: 100-240 Vac, 50-60 Hz, 1.3 A O/P: 20 Vdc, 2.25 A / 15 Vdc, 3A / 9 Vdc, 2A / 5 Vdc, 2A
Battery	Lenovo	L17M4PH3	7.68 Vdc, 7680 mAh
WWAN Module	FOXCONN	T77W980	--

3. The EUT is authorized for use in specific End-product. Please refer to below for more details.


Product	Brand	Model
Notebook Computer	Lenovo	Lenovo YOGA C630-13Q50*****, 81JL *****, (*=0~9, A~Z, a~z, "-" or blank, for marketing use only, with no impact on RF compliance of the product)

Antenna Type	Manufacturer	Parts Number	Antenna Gain		
			WCDMA II	LTE B2	LTE B25
PIFA	<b>Tablet Mode</b>				
	ACON Corporation	ANF6Y-100046 (DC330026L00)	-4.24	-4.24	-4.24
	<b>Laptop Mode</b>				
	ACON Corporation	ANF6Y-100046 (DC330026L00)	0.15	0.15	0.15

4. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.



### 3.2 Configuration of System under Test

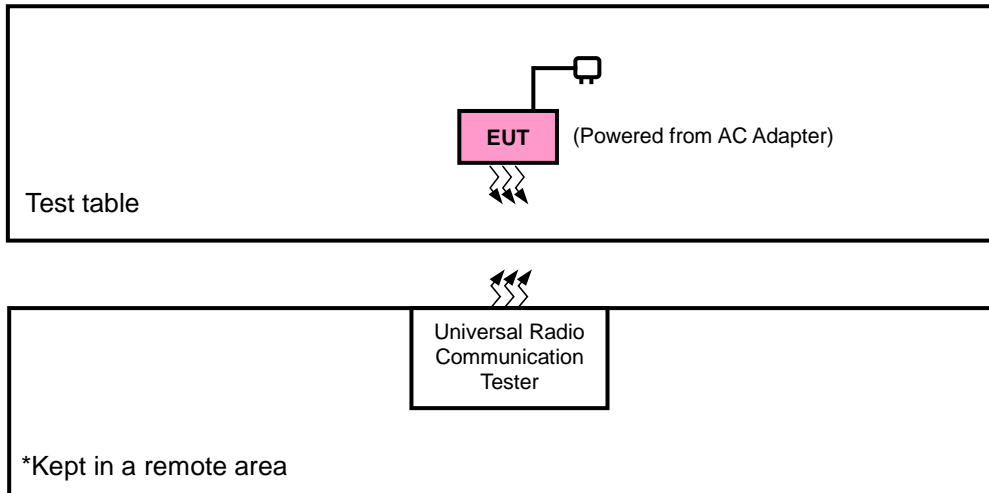

#### 3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units.

### 3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis, and antenna ports.

The worst case was found when positioned as the table below. Following channel(s) was (were) selected for the final test as listed below:

Band	EIRP	Radiated Emission
WCDMA	Z-plane	Z-axis
LTE Band 2	Z-plane	Z-axis
LTE Band 25	X-plane	Z-axis

#### WCDMA

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Mode
-	EIRP	9262 to 9538	9262, 9400, 9538	WCDMA
-	Radiated Emission Below 1GHz	9262 to 9538	9262	WCDMA
-	Radiated Emission Above 1GHz	9262 to 9538	9262, 9400, 9538	WCDMA

## LTE Band 2

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	EIRP	18607 to 19193	18607, 18900, 19193	1.4 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
-	Radiated Emission Below 1GHz	18700 to 19100	18700	20 MHz	QPSK	1 RB / 0 RB Offset
-	Radiated Emission Above 1GHz	18700 to 19100	18700, 18900, 19100	20 MHz	QPSK	1 RB / 0 RB Offset

**Note:** This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

### LTE Band 25

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	EIRP	26047 to 26683	26047, 26365, 26683	1.4 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		26055 to 26675	26055, 26365, 26675	3 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		26065 to 26665	26065, 26365, 26665	5 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		26090 to 26640	26090, 26365, 26640	10 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		26115 to 26615	26115, 26365, 26615	15 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
		26140 to 26590	26140, 26365, 26590	20 MHz	QPSK, 16QAM, 64QAM	1 RB / 0 RB Offset
-	Radiated Emission Below 1GHz	26140 to 26590	26365	20 MHz	QPSK	1 RB / 0 RB Offset
-	Radiated Emission Above 1GHz	26140 to 26590	26140, 26365, 26590	20 MHz	QPSK	1 RB / 0 RB Offset

**Note:** This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

#### Test Condition:

Test Item	Environmental Conditions	Input Power	Tested By
EIRP	26 deg. C, 58 % RH	120 Vac, 60 Hz	Karl Lee, Harry Hsueh
Radiated Emission	25 deg. C, 65 % RH	120 Vac, 60 Hz	Karl Lee, Harry Hsueh

### **3.4 EUT Operating Conditions**

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

### **3.5 General Description of Applied Standards**

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC 47 CFR Part 2**

**FCC 47 CFR Part 24**

**KDB 971168 D01 Power Meas License Digital Systems v03r01**

**ANSI/TIA/EIA-603-E 2016**

**ANSI 63.26-2015**

**NOTE:** All test items have been performed and recorded as per the above standards.

## 4 Test Types and Results

### 4.1 Output Power Measurement

#### 4.1.1 Limits of Output Power Measurement

Mobile / Portable station are limited to 2 watts e.i.r.p.

#### 4.1.2 Test Procedures

##### **EIRP / ERP Measurement:**

- a. All measurements were done at low, middle and high operational frequency range. RBW and VBW is 1 MHz for GSM, GPRS & EDGE, 5 MHz for WCDMA and CDMA, and 10 MHz for LTE mode.
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step b. Record the power level of S.G.
- d.  $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$ . E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole,  $E.R.P \text{ power} = E.I.R.P \text{ power} - 2.15 \text{ dB}$ .


##### **Conducted Power Measurement:**

The EUT was set up for the maximum power with GSM, GPRS, EDGE, WCDMA, CDMA, and LTE link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.


4.1.3 Test Setup

**EIRP / ERP Measurement:**

**<Radiated Emission below or equal 1 GHz>**

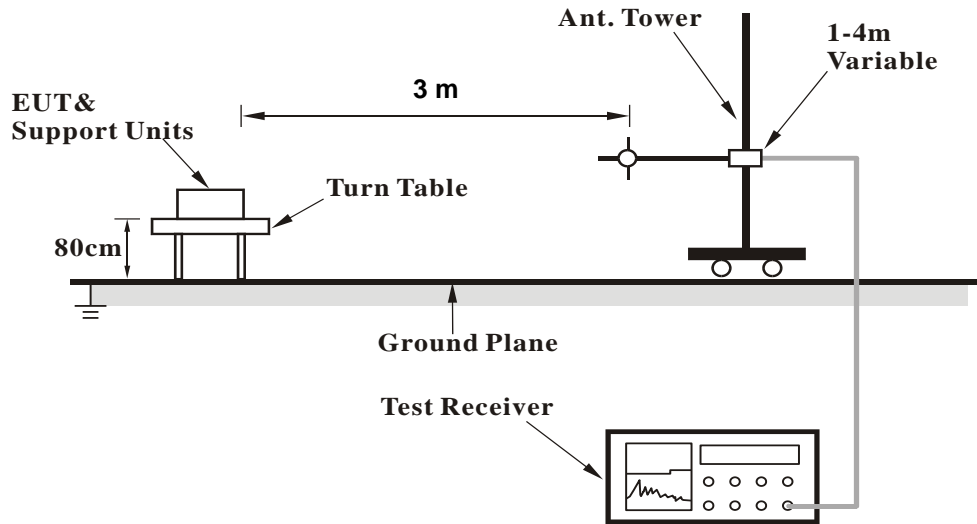


**<Radiated Emission above 1 GHz>**

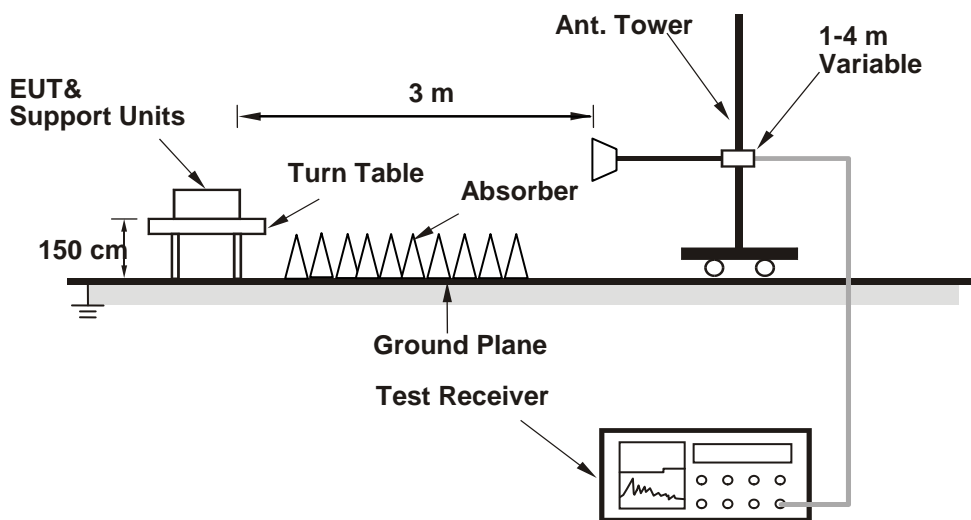

For the actual test configuration, please refer to the attached file (Test Setup Photo).

**Conducted Power Measurement:**



#### 4.1.4 Test Results

##### Conducted Output Power (dBm)

Band	WCDMA II		
	9262	9400	9538
Channel	1852.4	1880.0	1907.6
Frequency (MHz)	1852.4	1880.0	1907.6
RMC 12.2K	23.43	23.35	23.77
HSDPA Subtest-1	22.31	22.23	22.65
HSDPA Subtest-2	22.30	22.22	22.64
HSDPA Subtest-3	21.98	21.90	22.32
HSDPA Subtest-4	21.97	21.89	22.31
DC-HSDPA Subtest-1	22.19	22.11	22.53
DC-HSDPA Subtest-2	22.18	22.10	22.52
DC-HSDPA Subtest-3	21.86	21.78	22.20
DC-HSDPA Subtest-4	21.85	21.77	22.19
HSUPA Subtest-1	22.34	22.26	22.68
HSUPA Subtest-2	20.39	20.31	20.73
HSUPA Subtest-3	21.37	21.29	21.71
HSUPA Subtest-4	20.38	20.30	20.72
HSUPA Subtest-5	22.41	22.33	22.75
HSPA+ Subtest-1	19.86	19.78	20.20

LTE Band 2																
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	
				18700	18900	19100						18675	18900	19125		
				Channel Frequency (MHz)	1860.0	1880.0						1900.0	Channel Frequency (MHz)	1857.5		1880.0
20M	QPSK	1	0	23.22	23.31	23.89	0	15M	QPSK	1	0	23.17	23.26	23.84	0	
		1	50	23.12	23.21	23.79	0			1	37	23.07	23.16	23.74	0	
		1	99	23.06	23.15	23.73	0			1	74	23.01	23.10	23.68	0	
		50	0	22.27	22.36	22.94	1			36	0	22.22	22.31	22.89	1	
		50	25	22.17	22.26	22.84	1			36	19	22.12	22.21	22.79	1	
		50	50	22.08	22.17	22.75	1			36	39	22.03	22.12	22.70	1	
	100	0	22.20	22.29	22.87	1	75		0	22.15	22.24	22.82	1			
	16QAM	1	0	22.23	22.32	22.90	1		16QAM	1	0	22.18	22.27	22.85	1	
		1	50	22.13	22.22	22.80	1			1	37	22.08	22.17	22.75	1	
		1	99	22.07	22.16	22.74	1			1	74	22.02	22.11	22.69	1	
		50	0	21.28	21.37	21.95	2			36	0	21.23	21.32	21.90	2	
		50	25	21.18	21.27	21.85	2			36	19	21.13	21.22	21.80	2	
		50	50	21.09	21.18	21.76	2			36	39	21.04	21.13	21.71	2	
	100	0	21.21	21.30	21.88	2	75		0	21.16	21.25	21.83	2			
	64QAM	1	0	21.22	21.31	21.89	2		64QAM	1	0	21.17	21.26	21.84	2	
		1	50	21.12	21.21	21.79	2			1	37	21.07	21.16	21.74	2	
		1	99	21.06	21.15	21.73	2			1	74	21.01	21.10	21.68	2	
		50	0	20.27	20.36	20.94	3			36	0	20.22	20.31	20.89	3	
50		25	20.17	20.26	20.84	3	36	19		20.12	20.21	20.79	3			
50		50	20.08	20.17	20.75	3	36	39		20.03	20.12	20.70	3			
100	0	20.20	20.29	20.87	3	75	0	20.15	20.24	20.82	3					
10M	QPSK	1	0	23.10	23.19	23.77	0	5M	QPSK	1	0	23.07	23.16	23.74	0	
		1	24	23.00	23.09	23.67	0			1	12	22.97	23.06	23.64	0	
		1	49	22.94	23.03	23.61	0			1	24	22.91	23.00	23.58	0	
		25	0	22.15	22.24	22.82	1			12	0	22.12	22.21	22.79	1	
		25	12	22.05	22.14	22.72	1			12	6	22.02	22.11	22.69	1	
		25	25	21.96	22.05	22.63	1			12	13	21.93	22.02	22.60	1	
	50	0	22.08	22.17	22.75	1	25		0	22.05	22.14	22.72	1			
	16QAM	1	0	22.11	22.20	22.78	1		16QAM	1	0	22.08	22.17	22.75	1	
		1	24	22.01	22.10	22.68	1			1	12	21.98	22.07	22.65	1	
		1	49	21.95	22.04	22.62	1			1	24	21.92	22.01	22.59	1	
		25	0	21.16	21.25	21.83	2			12	0	21.13	21.22	21.80	2	
		25	12	21.06	21.15	21.73	2			12	6	21.03	21.12	21.70	2	
		25	25	20.97	21.06	21.64	2			12	13	20.94	21.03	21.61	2	
	50	0	21.09	21.18	21.76	2	25		0	21.06	21.15	21.73	2			
	64QAM	1	0	21.10	21.19	21.77	2		64QAM	1	0	21.07	21.16	21.74	2	
		1	24	21.00	21.09	21.67	2			1	12	20.97	21.06	21.64	2	
		1	49	20.94	21.03	21.61	2			1	24	20.91	21.00	21.58	2	
		25	0	20.15	20.24	20.82	3			12	0	20.12	20.21	20.79	3	
25		12	20.05	20.14	20.72	3	12	6		20.02	20.11	20.69	3			
25		25	19.96	20.05	20.63	3	12	13		19.93	20.02	20.60	3			
50	0	20.08	20.17	20.75	3	25	0	20.05	20.14	20.72	3					
3M	QPSK	1	0	23.02	23.11	23.69	0	1.4M	QPSK	1	0	22.97	23.06	23.64	0	
		1	7	22.92	23.01	23.59	0			1	2	22.87	22.96	23.54	0	
		1	14	22.86	22.95	23.53	0			1	5	22.81	22.90	23.48	0	
		8	0	22.07	22.16	22.74	1			3	0	22.72	22.81	23.39	0	
		8	3	21.97	22.06	22.64	1			3	1	22.62	22.71	23.29	0	
		8	7	21.88	21.97	22.55	1			3	3	22.53	22.62	23.20	0	
	15	0	22.00	22.09	22.67	1	6		0	21.95	22.04	22.62	1			
	16QAM	1	0	22.03	22.12	22.70	1		16QAM	1	0	22.03	22.12	22.70	1	
		1	7	21.93	22.02	22.60	1			1	2	21.88	21.97	22.55	1	
		1	14	21.87	21.96	22.54	1			1	5	21.82	21.91	22.49	1	
		8	0	21.08	21.17	21.75	2			3	0	21.73	21.82	22.40	1	
		8	3	20.98	21.07	21.65	2			3	1	21.63	21.72	22.30	1	
		8	7	20.89	20.98	21.56	2			3	3	21.54	21.63	22.21	1	
	15	0	21.01	21.10	21.68	2	6		0	20.96	21.05	21.63	2			
	64QAM	1	0	21.02	21.11	21.69	2		64QAM	1	0	20.97	21.06	21.64	2	
		1	7	20.92	21.01	21.59	2			1	2	20.87	20.96	21.54	2	
		1	14	20.86	20.95	21.53	2			1	5	20.81	20.90	21.48	2	
		8	0	20.07	20.16	20.74	3			3	0	20.72	20.81	21.39	2	
8		3	19.97	20.06	20.64	3	3	1		20.62	20.71	21.29	2			
8		7	19.88	19.97	20.55	3	3	3		20.53	20.62	21.20	2			
15	0	20.00	20.09	20.67	3	6	0	19.95	20.04	20.62	3					



**LTE Band 25**

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)	BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
				26140	26365	26590						26115	26365	26615	
				Channel Frequency (MHz)	1860.0	1882.5						1905.0	Channel Frequency (MHz)	1857.5	
20M	QPSK	1	0	22.82	23.03	23.36	0	15M	QPSK	1	0	22.75	22.96	23.29	0
		1	50	22.67	22.88	23.21	0			1	37	22.60	22.81	23.14	0
		1	99	22.61	22.82	23.15	0			1	74	22.54	22.75	23.08	0
		50	0	21.71	21.92	22.25	1			36	0	21.64	21.85	22.18	1
		50	25	21.62	21.83	22.16	1			36	19	21.55	21.76	22.09	1
		50	50	21.61	21.82	22.15	1			36	39	21.54	21.75	22.08	1
		100	0	21.64	21.85	22.18	1			75	0	21.57	21.78	22.11	1
	16QAM	1	0	21.80	22.01	22.34	1		16QAM	1	0	21.73	21.94	22.27	1
		1	50	21.65	21.86	22.19	1			1	37	21.58	21.79	22.12	1
		1	99	21.59	21.80	22.13	1			1	74	21.52	21.73	22.06	1
		50	0	20.69	20.90	21.23	2			36	0	20.62	20.83	21.16	2
		50	25	20.60	20.81	21.14	2			36	19	20.53	20.74	21.07	2
		50	50	20.59	20.80	21.13	2			36	39	20.52	20.73	21.06	2
	100	0	20.62	20.83	21.16	2	75		0	20.55	20.76	21.09	2		
	64QAM	1	0	20.72	20.93	21.26	2		64QAM	1	0	20.65	20.86	21.19	2
		1	50	20.57	20.78	21.11	2			1	37	20.50	20.71	21.04	2
		1	99	20.51	20.72	21.05	2			1	74	20.44	20.65	20.98	2
		50	0	19.61	19.82	20.15	3			36	0	19.54	19.75	20.08	3
		50	25	19.52	19.73	20.06	3			36	19	19.45	19.66	19.99	3
		50	50	19.51	19.72	20.05	3			36	39	19.44	19.65	19.98	3
	100	0	19.54	19.75	20.08	3	75		0	19.47	19.68	20.01	3		
10M	QPSK	1	0	22.69	22.90	23.23	0	5M	QPSK	1	0	22.64	22.85	23.18	0
		1	24	22.54	22.75	23.08	0			1	12	22.49	22.70	23.03	0
		1	49	22.48	22.69	23.02	0			1	24	22.43	22.64	22.97	0
		25	0	21.58	21.79	22.12	1			12	0	21.53	21.74	22.07	1
		25	12	21.49	21.70	22.03	1			12	6	21.44	21.65	21.98	1
		25	25	21.48	21.69	22.02	1			12	13	21.43	21.64	21.97	1
		50	0	21.51	21.72	22.05	1			25	0	21.46	21.67	22.00	1
	16QAM	1	0	21.67	21.88	22.21	1		16QAM	1	0	21.62	21.83	22.16	1
		1	24	21.52	21.73	22.06	1			1	12	21.47	21.68	22.01	1
		1	49	21.46	21.67	22.00	1			1	24	21.41	21.62	21.95	1
		25	0	20.56	20.77	21.10	2			12	0	20.51	20.72	21.05	2
		25	12	20.47	20.68	21.01	2			12	6	20.42	20.63	20.96	2
		25	25	20.46	20.67	21.00	2			12	13	20.41	20.62	20.95	2
	50	0	20.49	20.70	21.03	2	25		0	20.44	20.65	20.98	2		
	64QAM	1	0	20.59	20.80	21.13	2		64QAM	1	0	20.54	20.75	21.08	2
		1	24	20.44	20.65	20.98	2			1	12	20.39	20.60	20.93	2
		1	49	20.38	20.59	20.92	2			1	24	20.33	20.54	20.87	2
		25	0	19.48	19.69	20.02	3			12	0	19.43	19.64	19.97	3
		25	12	19.39	19.60	19.93	3			12	6	19.34	19.55	19.88	3
		25	25	19.38	19.59	19.92	3			12	13	19.33	19.54	19.87	3
	50	0	19.41	19.62	19.95	3	25		0	19.36	19.57	19.90	3		
3M	QPSK	1	0	22.59	22.80	23.13	0	1.4M	QPSK	1	0	23.49	23.37	23.47	0
		1	7	22.44	22.65	22.98	0			1	2	23.45	23.33	23.43	0
		1	14	22.38	22.59	22.92	0			1	5	23.40	23.28	23.38	0
		8	0	21.48	21.69	22.02	1			3	0	22.55	22.43	22.53	0
		8	3	21.39	21.60	21.93	1			3	1	22.52	22.40	22.50	0
		8	7	21.38	21.59	21.92	1			3	3	22.50	22.38	22.48	0
		15	0	21.41	21.62	21.95	1			6	0	22.51	22.39	22.49	1
	16QAM	1	0	21.57	21.78	22.11	1		16QAM	1	0	22.46	22.34	22.44	1
		1	7	21.42	21.63	21.96	1			1	2	22.42	22.30	22.40	1
		1	14	21.36	21.57	21.90	1			1	5	22.37	22.25	22.35	1
		8	0	20.46	20.67	21.00	2			3	0	21.52	21.40	21.50	1
		8	3	20.37	20.58	20.91	2			3	1	21.49	21.37	21.47	1
		8	7	20.36	20.57	20.90	2			3	3	21.47	21.35	21.45	1
	15	0	20.39	20.60	20.93	2	6		0	21.48	21.36	21.46	2		
	64QAM	1	0	20.49	20.70	21.03	2		64QAM	1	0	21.48	21.36	21.46	2
		1	7	20.34	20.55	20.88	2			1	2	21.44	21.32	21.42	2
		1	14	20.28	20.49	20.82	2			1	5	21.39	21.27	21.37	2
		8	0	19.38	19.59	19.92	3			3	0	20.54	20.42	20.52	2
		8	3	19.29	19.50	19.83	3			3	1	20.51	20.39	20.49	2
		8	7	19.28	19.49	19.82	3			3	3	20.49	20.37	20.47	2
	15	0	19.31	19.52	19.85	3	6		0	20.50	20.38	20.48	3		

**EIRP Power (dBm)**

WCDMA							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Z	9262	1852.4	-13.10	38.19	25.09	322.85	H
	9400	1880.0	-13.67	38.70	25.03	318.42	
	9538	1907.6	-14.22	39.35	25.13	325.84	
	9262	1852.4	-17.38	38.48	21.10	128.82	V
	9400	1880.0	-17.54	38.59	21.05	127.35	
	9538	1907.6	-17.72	38.87	21.15	130.32	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 2							
Channel Bandwidth: 1.4 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Z	18607	1850.7	-20.12	44.70	24.58	287.08	H
	18900	1880.0	-20.14	44.70	24.56	285.76	
	19193	1909.3	-20.42	44.57	24.15	260.20	
	18607	1850.7	-23.56	44.27	20.71	117.76	V
	18900	1880.0	-23.99	44.87	20.88	122.46	
	19193	1909.3	-24.12	44.61	20.49	112.02	
Channel Bandwidth: 1.4 MHz / 16QAM							
Z	18607	1850.7	-20.77	44.70	23.93	247.17	H
	18900	1880.0	-20.85	44.70	23.85	242.66	
	19193	1909.3	-20.81	44.57	23.76	237.63	
	18607	1850.7	-24.58	44.27	19.69	93.11	V
	18900	1880.0	-24.98	44.87	19.89	97.50	
	19193	1909.3	-24.88	44.61	19.73	94.04	
Channel Bandwidth: 1.4 MHz / 64QAM							
Z	18607	1850.7	-21.89	44.70	22.81	190.99	H
	18900	1880.0	-21.91	44.70	22.79	190.11	
	19193	1909.3	-21.85	44.57	22.72	187.20	
	18607	1850.7	-25.65	44.27	18.62	72.78	V
	18900	1880.0	-25.98	44.87	18.89	77.45	
	19193	1909.3	-25.87	44.61	18.74	74.87	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 2							
Channel Bandwidth: 3 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Z	18615	1851.5	-20.01	44.70	24.69	294.44	H
	18900	1880.0	-20.55	44.70	24.15	260.02	
	19185	1908.5	-20.16	44.57	24.42	276.50	
	18615	1851.5	-23.84	44.27	20.43	110.41	V
	18900	1880.0	-23.91	44.87	20.96	124.74	
	19185	1908.5	-24.10	44.61	20.51	112.54	
Channel Bandwidth: 3 MHz / 16QAM							
Z	18615	1851.5	-20.94	44.70	23.76	237.68	H
	18900	1880.0	-21.12	44.70	23.58	228.03	
	19185	1908.5	-21.55	44.57	23.02	200.59	
	18615	1851.5	-24.52	44.27	19.75	94.41	V
	18900	1880.0	-25.12	44.87	19.75	94.41	
	19185	1908.5	-25.27	44.61	19.35	86.04	
Channel Bandwidth: 3 MHz / 64QAM							
Z	18615	1851.5	-21.75	44.70	22.95	197.24	H
	18900	1880.0	-21.77	44.70	22.93	196.34	
	19185	1908.5	-21.68	44.57	22.89	194.67	
	18615	1851.5	-25.52	44.27	18.75	74.99	V
	18900	1880.0	-25.95	44.87	18.92	77.98	
	19185	1908.5	-26.21	44.61	18.40	69.23	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 2							
Channel Bandwidth: 5 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Z	18625	1852.5	-19.88	44.70	24.82	303.39	H
	18900	1880.0	-20.12	44.70	24.58	287.08	
	19175	1907.5	-20.35	44.57	24.22	264.42	
	18625	1852.5	-24.01	44.27	20.26	106.17	V
	18900	1880.0	-24.25	44.87	20.62	115.35	
	19175	1907.5	-23.75	44.61	20.86	121.98	
Channel Bandwidth: 5 MHz / 16QAM							
Z	18625	1852.5	-20.89	44.70	23.81	240.44	H
	18900	1880.0	-21.14	44.70	23.56	226.99	
	19175	1907.5	-21.19	44.57	23.38	217.92	
	18625	1852.5	-24.85	44.27	19.42	87.50	V
	18900	1880.0	-25.32	44.87	19.55	90.16	
	19175	1907.5	-24.78	44.61	19.83	96.23	
Channel Bandwidth: 5 MHz / 64QAM							
Z	18625	1852.5	-21.88	44.70	22.82	191.43	H
	18900	1880.0	-21.78	44.70	22.92	195.88	
	19175	1907.5	-21.81	44.57	22.76	188.93	
	18625	1852.5	-25.56	44.27	18.71	74.30	V
	18900	1880.0	-26.12	44.87	18.75	74.99	
	19175	1907.5	-25.96	44.61	18.65	73.33	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 2							
Channel Bandwidth: 10 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Z	18650	1855.0	-20.23	44.70	24.47	279.90	H
	18900	1880.0	-19.75	44.70	24.95	312.61	
	19150	1905.0	-19.88	44.57	24.69	294.65	
	18650	1855.0	-23.78	44.27	20.49	111.94	V
	18900	1880.0	-24.12	44.87	20.75	118.85	
	19150	1905.0	-23.89	44.61	20.72	118.11	
Channel Bandwidth: 10 MHz / 16QAM							
Z	18650	1855.0	-21.62	44.70	23.08	203.24	H
	18900	1880.0	-21.45	44.70	23.25	211.35	
	19150	1905.0	-21.52	44.57	23.05	201.98	
	18650	1855.0	-24.95	44.27	19.32	85.51	V
	18900	1880.0	-25.60	44.87	19.27	84.53	
	19150	1905.0	-25.00	44.61	19.61	91.50	
Channel Bandwidth: 10 MHz / 64QAM							
Z	18650	1855.0	-22.12	44.70	22.58	181.13	H
	18900	1880.0	-21.87	44.70	22.83	191.87	
	19150	1905.0	-21.91	44.57	22.66	184.63	
	18650	1855.0	-26.14	44.27	18.13	65.01	V
	18900	1880.0	-25.90	44.87	18.97	78.89	
	19150	1905.0	-25.88	44.61	18.73	74.70	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 2							
Channel Bandwidth: 15 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Z	18675	1857.5	-20.68	44.70	24.02	252.35	H
	18900	1880.0	-20.42	44.70	24.28	267.92	
	19125	1902.5	-20.57	44.57	24.00	251.36	
	18675	1857.5	-23.70	44.27	20.57	114.02	V
	18900	1880.0	-23.95	44.87	20.92	123.48	
	19125	1902.5	-23.84	44.61	20.77	119.42	
Channel Bandwidth: 15 MHz / 16QAM							
Z	18675	1857.5	-21.62	44.70	23.08	203.24	H
	18900	1880.0	-21.51	44.70	23.19	208.45	
	19125	1902.5	-20.85	44.57	23.72	235.67	
	18675	1857.5	-25.21	44.27	19.06	80.54	V
	18900	1880.0	-25.40	44.87	19.47	88.59	
	19125	1902.5	-24.94	44.61	19.67	92.73	
Channel Bandwidth: 15 MHz / 64QAM							
Z	18675	1857.5	-21.93	44.70	22.77	189.23	H
	18900	1880.0	-21.89	44.70	22.81	190.99	
	19125	1902.5	-21.76	44.57	22.81	191.12	
	18675	1857.5	-26.20	44.27	18.07	64.12	V
	18900	1880.0	-25.91	44.87	18.96	78.70	
	19125	1902.5	-25.87	44.61	18.74	74.87	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 2							
Channel Bandwidth: 20 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Z	18700	1860.0	-19.56	44.70	25.14	326.59	H
	18900	1880.0	-20.65	44.70	24.05	254.10	
	19100	1900.0	-19.87	44.57	24.70	295.32	
	18700	1860.0	-23.81	44.27	20.46	111.17	V
	18900	1880.0	-24.22	44.87	20.65	116.14	
	19100	1900.0	-24.36	44.61	20.25	106.00	
Channel Bandwidth: 20 MHz / 16QAM							
Z	18700	1860.0	-21.23	44.70	23.47	222.33	H
	18900	1880.0	-20.65	44.70	24.05	254.10	
	19100	1900.0	-21.57	44.57	23.00	199.48	
	18700	1860.0	-25.01	44.27	19.26	84.33	V
	18900	1880.0	-24.89	44.87	19.98	99.54	
	19100	1900.0	-24.91	44.61	19.70	93.39	
Channel Bandwidth: 20 MHz / 64QAM							
Z	18700	1860.0	-21.65	44.70	23.05	201.84	H
	18900	1880.0	-22.00	44.70	22.70	186.21	
	19100	1900.0	-22.41	44.57	22.16	164.55	
	18700	1860.0	-25.86	44.27	18.41	69.34	V
	18900	1880.0	-25.91	44.87	18.96	78.70	
	19100	1900.0	-25.78	44.61	18.83	76.44	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 25							
Channel Bandwidth: 1.4 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
X	26047	1850.7	-19.89	44.70	24.81	302.69	H
	26365	1882.5	-20.12	44.70	24.58	287.08	
	26683	1914.3	-19.78	44.57	24.79	301.51	
	26047	1850.7	-23.36	44.27	20.91	123.42	V
	26365	1882.5	-24.58	44.87	20.29	106.91	
	26683	1914.3	-23.97	44.61	20.64	115.96	
Channel Bandwidth: 1.4 MHz / 16QAM							
X	26047	1850.7	-20.85	44.70	23.85	242.66	H
	26365	1882.5	-20.91	44.70	23.79	239.22	
	26683	1914.3	-20.66	44.57	23.91	246.21	
	26047	1850.7	-24.58	44.27	19.69	93.11	V
	26365	1882.5	-25.23	44.87	19.64	92.04	
	26683	1914.3	-25.27	44.61	19.34	85.96	
Channel Bandwidth: 1.4 MHz / 64QAM							
X	26047	1850.7	-21.79	44.70	22.91	195.43	H
	26365	1882.5	-21.95	44.70	22.75	188.36	
	26683	1914.3	-21.78	44.57	22.79	190.24	
	26047	1850.7	-25.33	44.27	18.94	78.34	V
	26365	1882.5	-26.25	44.87	18.62	72.78	
	26683	1914.3	-26.26	44.61	18.35	68.44	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)



LTE Band 25							
Channel Bandwidth: 3 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
X	26055	1851.5	-19.87	44.70	24.83	304.09	H
	26365	1882.5	-19.89	44.70	24.81	302.69	
	26675	1913.5	-20.57	44.57	24.00	251.36	
	26055	1851.5	-23.65	44.27	20.62	115.35	V
	26365	1882.5	-24.25	44.87	20.62	115.35	
	26675	1913.5	-24.57	44.61	20.04	101.00	
Channel Bandwidth: 3 MHz / 16QAM							
X	26055	1851.5	-21.36	44.70	23.34	215.77	H
	26365	1882.5	-20.85	44.70	23.85	242.66	
	26675	1913.5	-20.99	44.57	23.58	228.19	
	26055	1851.5	-24.57	44.27	19.70	93.33	V
	26365	1882.5	-25.62	44.87	19.25	84.14	
	26675	1913.5	-24.89	44.61	19.72	93.82	
Channel Bandwidth: 3 MHz / 64QAM							
X	26055	1851.5	-21.78	44.70	22.92	195.88	H
	26365	1882.5	-21.95	44.70	22.75	188.36	
	26675	1913.5	-22.36	44.57	22.21	166.46	
	26055	1851.5	-25.54	44.27	18.73	74.64	V
	26365	1882.5	-25.89	44.87	18.98	79.07	
	26675	1913.5	-26.21	44.61	18.40	69.23	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 25							
Channel Bandwidth: 5 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
X	26065	1852.5	-19.71	44.70	24.99	315.50	H
	26365	1882.5	-20.36	44.70	24.34	271.64	
	26665	1912.5	-19.89	44.57	24.68	293.97	
	26065	1852.5	-23.62	44.27	20.65	116.14	V
	26365	1882.5	-24.87	44.87	20.00	100.00	
	26665	1912.5	-24.20	44.61	20.41	109.98	
Channel Bandwidth: 5 MHz / 16QAM							
X	26065	1852.5	-20.81	44.70	23.89	244.91	H
	26365	1882.5	-21.25	44.70	23.45	221.31	
	26665	1912.5	-20.89	44.57	23.68	233.51	
	26065	1852.5	-24.36	44.27	19.91	97.95	V
	26365	1882.5	-25.27	44.87	19.60	91.20	
	26665	1912.5	-24.88	44.61	19.73	94.04	
Channel Bandwidth: 5 MHz / 64QAM							
X	26065	1852.5	-21.85	44.70	22.85	192.75	H
	26365	1882.5	-21.98	44.70	22.72	187.07	
	26665	1912.5	-22.51	44.57	22.06	160.81	
	26065	1852.5	-26.25	44.27	18.02	63.39	V
	26365	1882.5	-25.91	44.87	18.96	78.70	
	26665	1912.5	-26.32	44.61	18.29	67.50	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 25							
Channel Bandwidth: 10 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
X	26090	1855.0	-20.62	44.70	24.08	255.86	H
	26365	1882.5	-20.58	44.70	24.12	258.23	
	26640	1910.0	-19.89	44.57	24.68	293.97	
	26090	1855.0	-23.36	44.27	20.91	123.31	V
	26365	1882.5	-23.99	44.87	20.88	122.49	
	26640	1910.0	-23.91	44.61	20.70	117.57	
Channel Bandwidth: 10 MHz / 16QAM							
X	26090	1855.0	-21.58	44.70	23.12	205.12	H
	26365	1882.5	-20.98	44.70	23.72	235.50	
	26640	1910.0	-20.83	44.57	23.74	236.76	
	26090	1855.0	-24.30	44.27	19.97	99.31	V
	26365	1882.5	-25.62	44.87	19.25	84.14	
	26640	1910.0	-24.88	44.61	19.73	94.04	
Channel Bandwidth: 10 MHz / 64QAM							
X	26090	1855.0	-22.21	44.70	22.49	177.42	H
	26365	1882.5	-22.54	44.70	22.16	164.44	
	26640	1910.0	-21.89	44.57	22.68	185.48	
	26090	1855.0	-25.36	44.27	18.91	77.80	V
	26365	1882.5	-26.25	44.87	18.62	72.78	
	26640	1910.0	-26.61	44.61	18.00	63.14	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 25							
Channel Bandwidth: 15 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
X	26115	1857.5	-20.23	44.70	24.47	279.90	H
	26365	1882.5	-19.88	44.70	24.82	303.39	
	26615	1907.5	-19.91	44.57	24.66	292.62	
	26115	1857.5	-24.26	44.27	20.01	100.23	V
	26365	1882.5	-24.25	44.87	20.62	115.35	
	26615	1907.5	-24.15	44.61	20.46	111.25	
Channel Bandwidth: 15 MHz / 16QAM							
X	26115	1857.5	-21.25	44.70	23.45	221.31	H
	26365	1882.5	-20.89	44.70	23.81	240.44	
	26615	1907.5	-20.91	44.57	23.66	232.43	
	26115	1857.5	-25.15	44.27	19.12	81.58	V
	26365	1882.5	-25.62	44.87	19.25	84.14	
	26615	1907.5	-25.58	44.61	19.04	80.08	
Channel Bandwidth: 15 MHz / 64QAM							
X	26115	1857.5	-22.01	44.70	22.69	185.78	H
	26365	1882.5	-21.89	44.70	22.81	191.03	
	26615	1907.5	-21.81	44.57	22.76	188.93	
	26115	1857.5	-26.25	44.27	18.02	63.39	V
	26365	1882.5	-25.91	44.87	18.96	78.70	
	26615	1907.5	-26.25	44.61	18.36	68.53	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 25							
Channel Bandwidth: 20 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
X	26140	1860.0	-19.56	44.70	25.14	326.59	H
	26365	1882.5	-20.57	44.70	24.13	259.06	
	26590	1905.0	-19.90	44.57	24.68	293.56	
	26140	1860.0	-23.57	44.27	20.70	117.49	V
	26365	1882.5	-23.88	44.87	20.99	125.60	
	26590	1905.0	-23.81	44.61	20.80	120.31	
Channel Bandwidth: 20 MHz / 16QAM							
X	26140	1860.0	-20.58	44.70	24.12	258.23	H
	26365	1882.5	-21.52	44.70	23.18	207.97	
	26590	1905.0	-20.84	44.57	23.73	236.16	
	26140	1860.0	-25.00	44.27	19.27	84.53	V
	26365	1882.5	-25.66	44.87	19.21	83.37	
	26590	1905.0	-24.87	44.61	19.74	94.25	
Channel Bandwidth: 20 MHz / 64QAM							
X	26140	1860.0	-21.59	44.70	23.11	204.64	H
	26365	1882.5	-22.62	44.70	22.08	161.44	
	26590	1905.0	-22.14	44.57	22.43	175.11	
	26140	1860.0	-25.87	44.27	18.40	69.18	V
	26365	1882.5	-26.25	44.87	18.62	72.78	
	26590	1905.0	-26.36	44.61	18.25	66.88	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

## 4.2 Radiated Emission Measurement

### 4.2.1 Limits of Radiated Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. The emission limit is equal to -13 dBm.

### 4.2.2 Test Procedure

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G.
- c. EIRP = Output power level of S.G – TX cable loss + Antenna gain of substitution horn.
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, E.R.P power = E.I.R.P power - 2.15 dB.


**NOTE:** The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz/3 MHz.

### 4.2.3 Deviation from Test Standard


No deviation.

#### 4.2.4 Test Setup

##### <Radiated Emission below or equal 1 GHz>

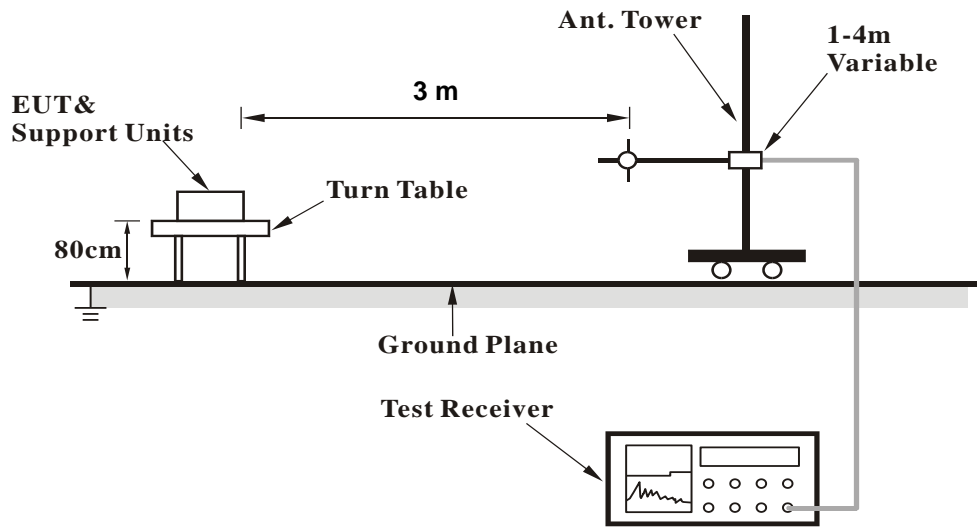

##### <Radiated Emission above 1 GHz>

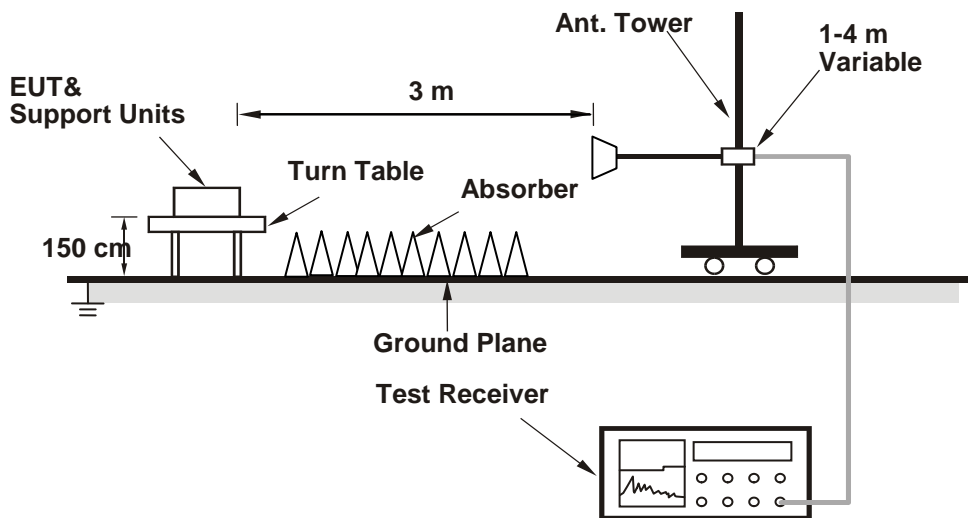

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.5 Test Results

WCDMA:

Low Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 13

Date: 2018-08-09

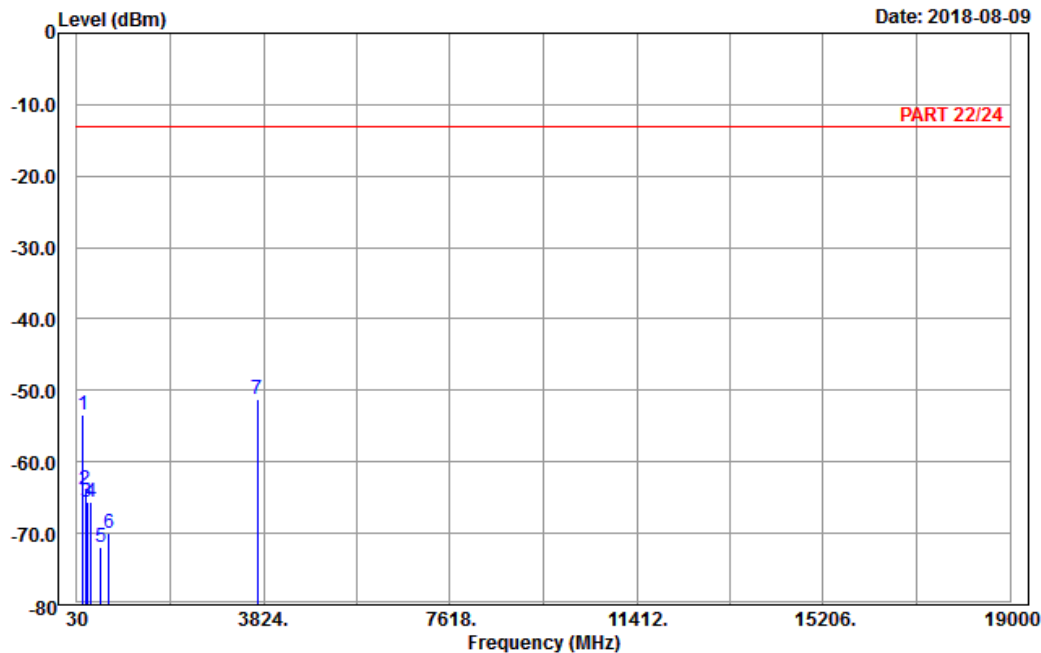

Site : 966 chamber 1  
 Condition: PART 22/24 Horizontal  
 Remark : Band II\_Link\_CH9262  
 Tested by: Karl Lee

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	161.76	-53.41	-45.94	-13.00	-40.41	-7.47	Peak
2	204.96	-63.81	-57.69	-13.00	-50.81	-6.12	Peak
3	242.76	-65.62	-60.01	-13.00	-52.62	-5.61	Peak
4	323.80	-65.67	-59.99	-13.00	-52.67	-5.68	Peak
5	524.00	-72.02	-68.44	-13.00	-59.02	-3.58	Peak
6	686.40	-69.91	-69.60	-13.00	-56.91	-0.31	Peak
7 pp	3704.80	-51.17	-67.05	-13.00	-38.17	15.88	Peak






Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 14

Date: 2018-08-09

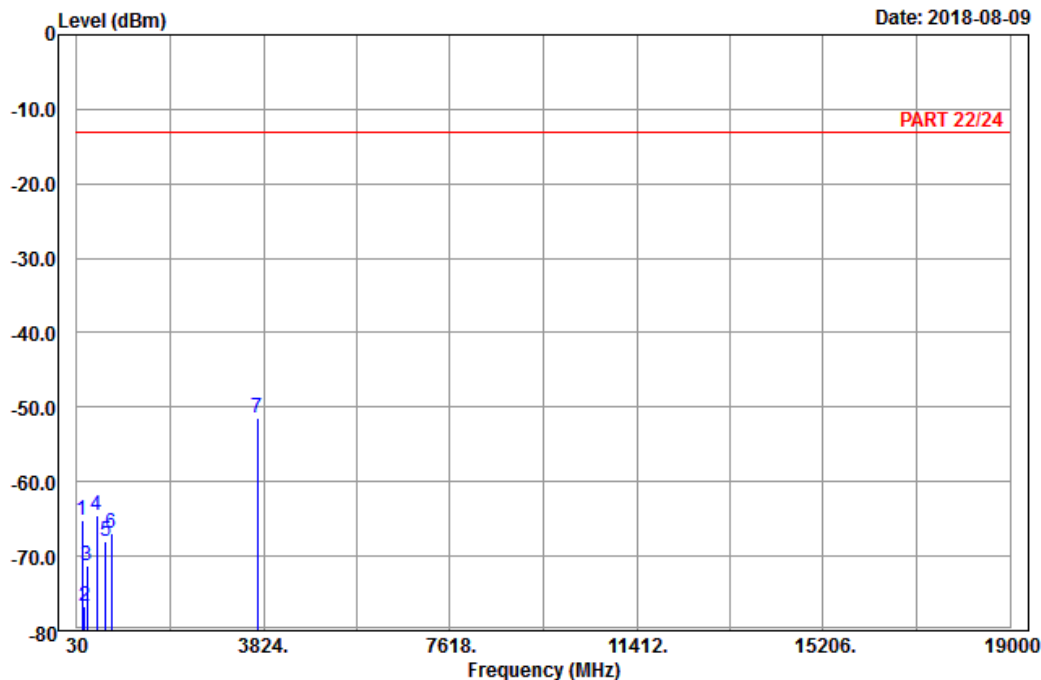

Site : 966 chamber 1  
 Condition: PART 22/24 Vertical  
 Remark : Band II\_Link\_CH9262  
 Tested by: Karl Lee

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	139.62	-65.11	-57.42	-13.00	-52.11	-7.69	Peak
2	193.08	-76.68	-70.81	-13.00	-63.68	-5.87	Peak
3	240.87	-71.31	-65.67	-13.00	-58.31	-5.64	Peak
4	431.60	-64.52	-61.08	-13.00	-51.52	-3.44	Peak
5	619.20	-67.95	-68.17	-13.00	-54.95	0.22	Peak
6	731.90	-67.03	-66.05	-13.00	-54.03	-0.98	Peak
7 pp	3704.80	-51.51	-67.39	-13.00	-38.51	15.88	Peak

Middle Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 9

Date: 2018-08-09

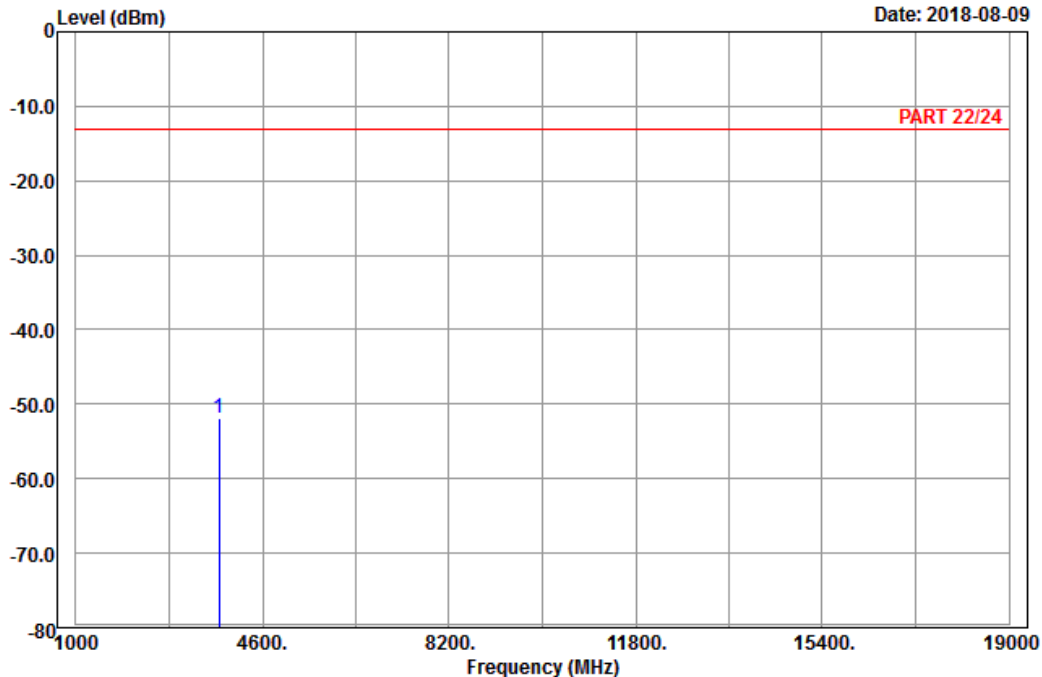

Site : 966 chamber 1  
 Condition: PART 22/24 Horizontal  
 Remark : Band II\_Link\_CH9400  
 Tested by: Karl Lee


Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 3760.00	-51.92	-68.06	-13.00	-38.92	16.14	Peak



A D T

Data: 10

Date: 2018-08-09

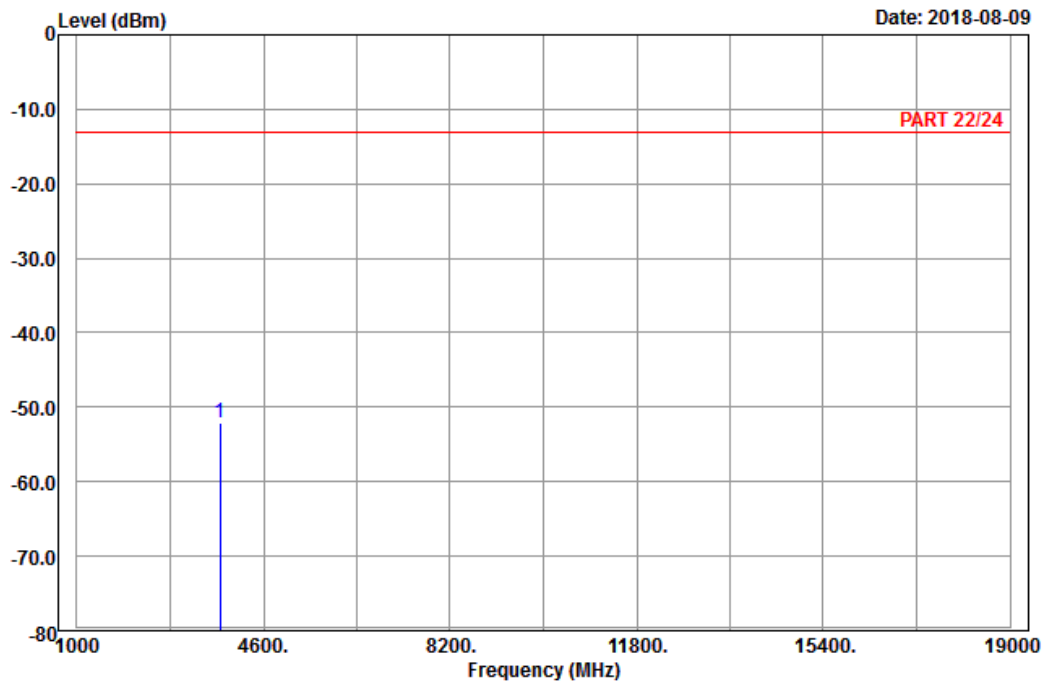

Site : 966 chamber 1  
 Condition: PART 22/24 Vertical  
 Remark : Band II\_Link\_CH9400  
 Tested by: Karl Lee

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	pp 3760.00	-52.02	-68.16	-13.00	-39.02	16.14	Peak

High Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 9

Date: 2018-08-09

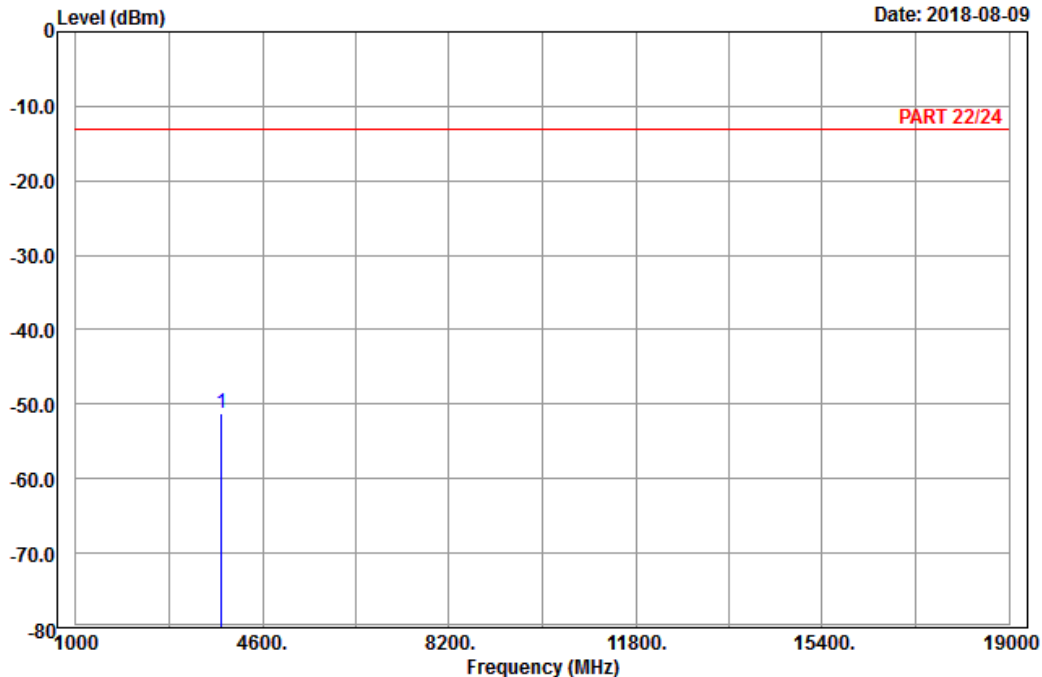

Site : 966 chamber 1  
 Condition: PART 22/24 Horizontal  
 Remark : Band II\_Link\_CH9538  
 Tested by: Karl Lee


Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 3815.20	-51.31	-67.72	-13.00	-38.31	16.41	Peak



A D T

Data: 10

Date: 2018-08-09

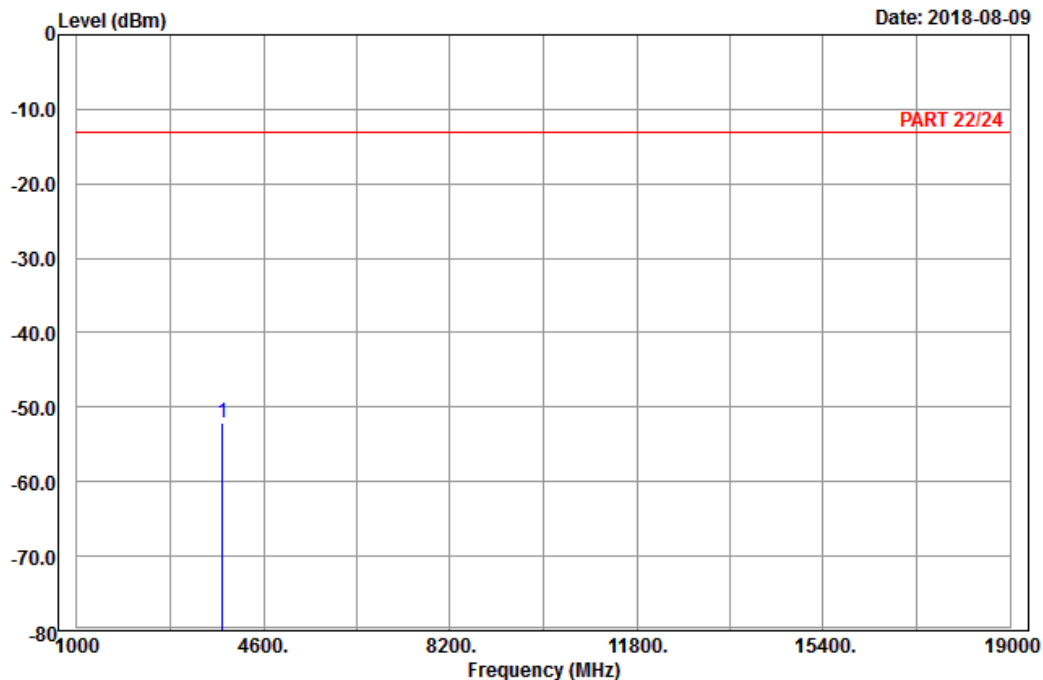

Site : 966 chamber 1  
 Condition: PART 22/24 Vertical  
 Remark : Band II\_Link\_CH9538  
 Tested by: Karl Lee

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1 pp	3815.20	-52.12	-68.53	-13.00	-39.12	16.41	Peak

LTE Band 2  
Channel Bandwidth: 20 MHz / QPSK  
Low Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 13

Date: 2018-08-07

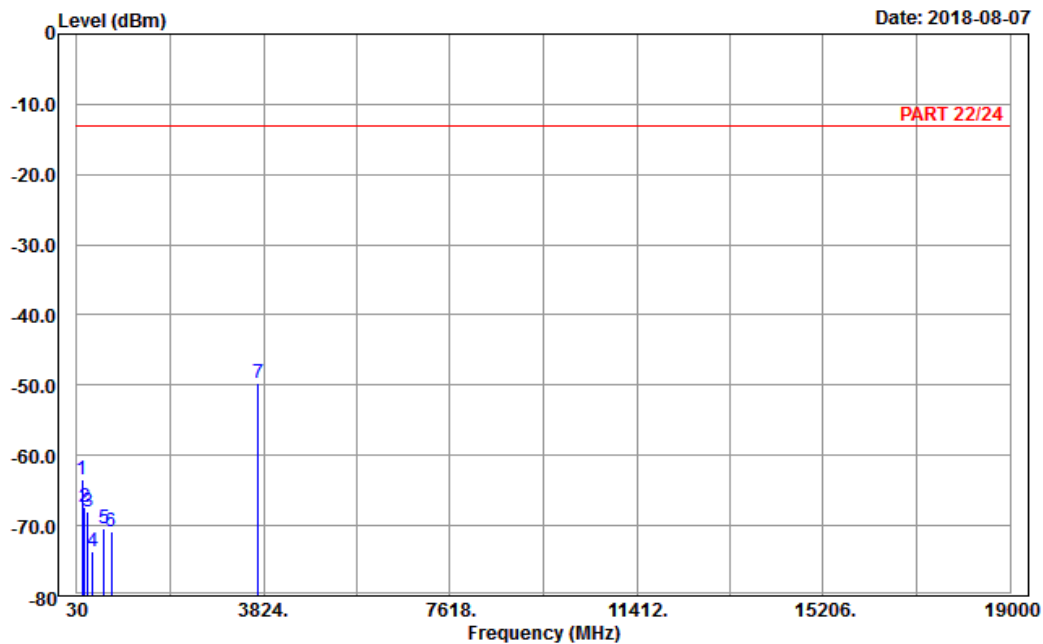

Site : 966 chamber 1  
Condition: PART 22/24 Horizontal  
Remark : LTE\_Band 2\_Link\_CH18700  
Tested by: Harry Hsueh


	Read	Limit	Over				
Freq	Level	Level	Line	Limit	Factor	Remark	
MHz	dBm	dBm	dBm	dB	dB		
1	137.73	-63.53	-55.85	-13.00	-50.53	-7.68	Peak
2	190.65	-67.32	-61.54	-13.00	-54.32	-5.78	Peak
3	245.73	-68.00	-62.43	-13.00	-55.00	-5.57	Peak
4	347.60	-73.61	-68.20	-13.00	-60.61	-5.41	Peak
5	590.50	-70.42	-70.45	-13.00	-57.42	0.03	Peak
6	737.50	-70.83	-69.76	-13.00	-57.83	-1.07	Peak
7 pp	3720.00	-49.68	-65.65	-13.00	-36.68	15.97	Peak



A D T

Data: 14

Date: 2018-08-07

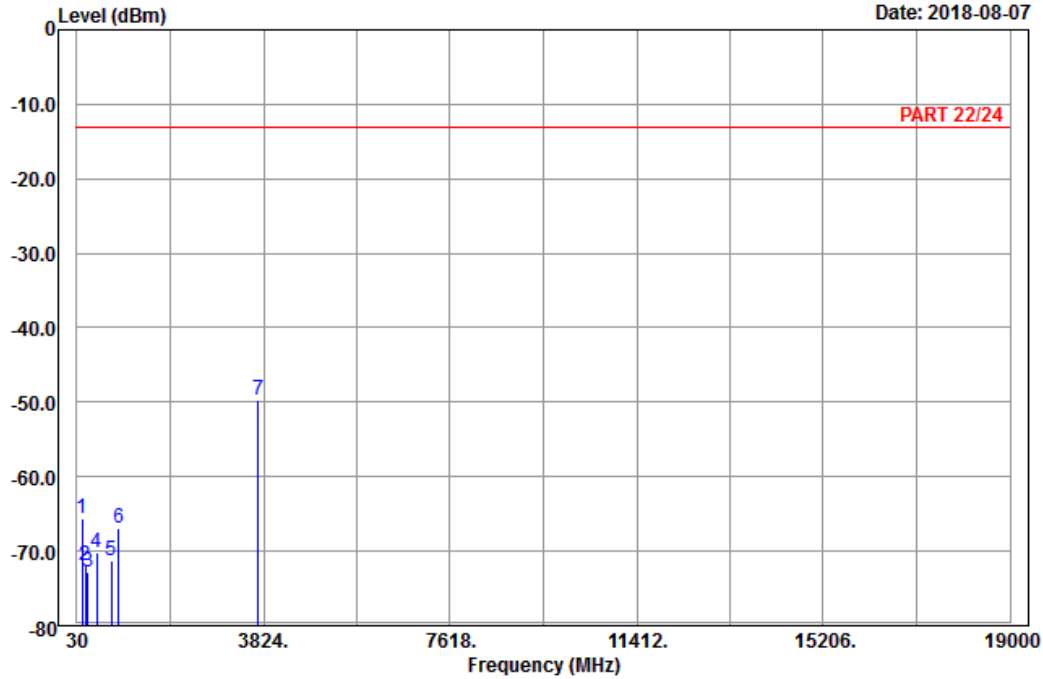

Site : 966 chamber 1  
 Condition: PART 22/24 Vertical  
 Remark : LTE\_Band 2\_Link\_CH18700  
 Tested by: Harry Hsueh

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	138.54	-65.58	-57.89	-13.00	-52.58	-7.69	Peak
2	201.99	-71.98	-65.82	-13.00	-58.98	-6.16	Peak
3	256.53	-72.73	-67.16	-13.00	-59.73	-5.57	Peak
4	440.70	-70.13	-66.50	-13.00	-57.13	-3.63	Peak
5	729.10	-71.36	-70.43	-13.00	-58.36	-0.93	Peak
6	884.50	-66.97	-69.41	-13.00	-53.97	2.44	Peak
7 pp	3720.00	-49.69	-65.66	-13.00	-36.69	15.97	Peak

Middle Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 9

Date: 2018-08-07

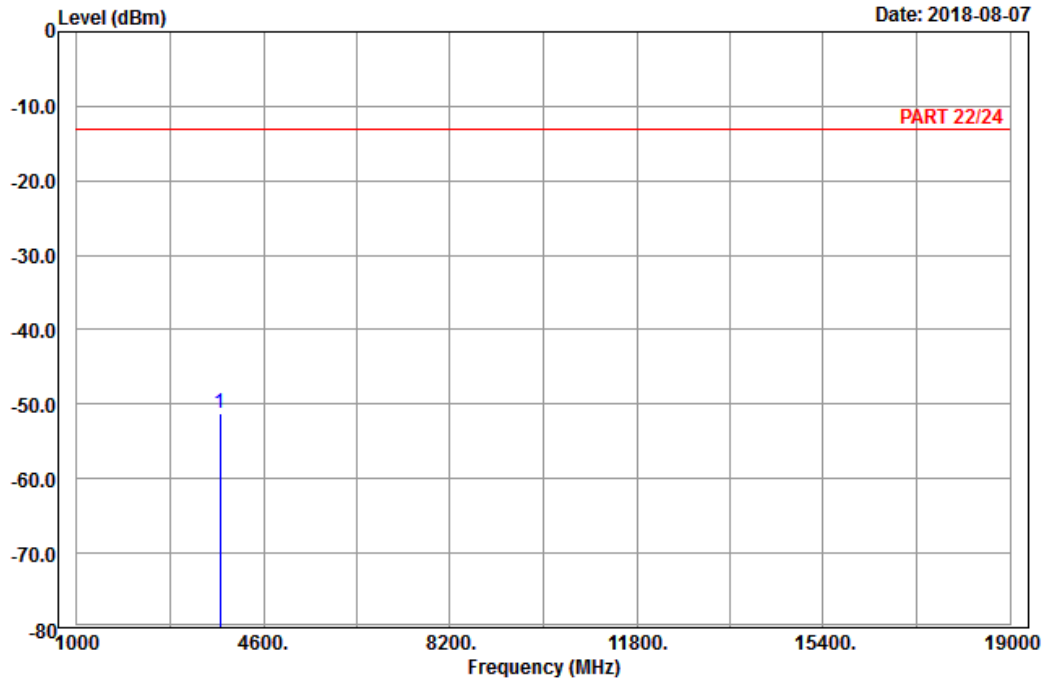

Site : 966 chamber 1  
 Condition: PART 22/24 Horizontal  
 Remark : LTE\_Band 2\_Link\_CH18900  
 Tested by: Harry Hsueh

	Read	Limit	Over			
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 3760.00	-51.22	-67.36	-13.00	-38.22	16.14	Peak






A D T

Data: 10

Date: 2018-08-07

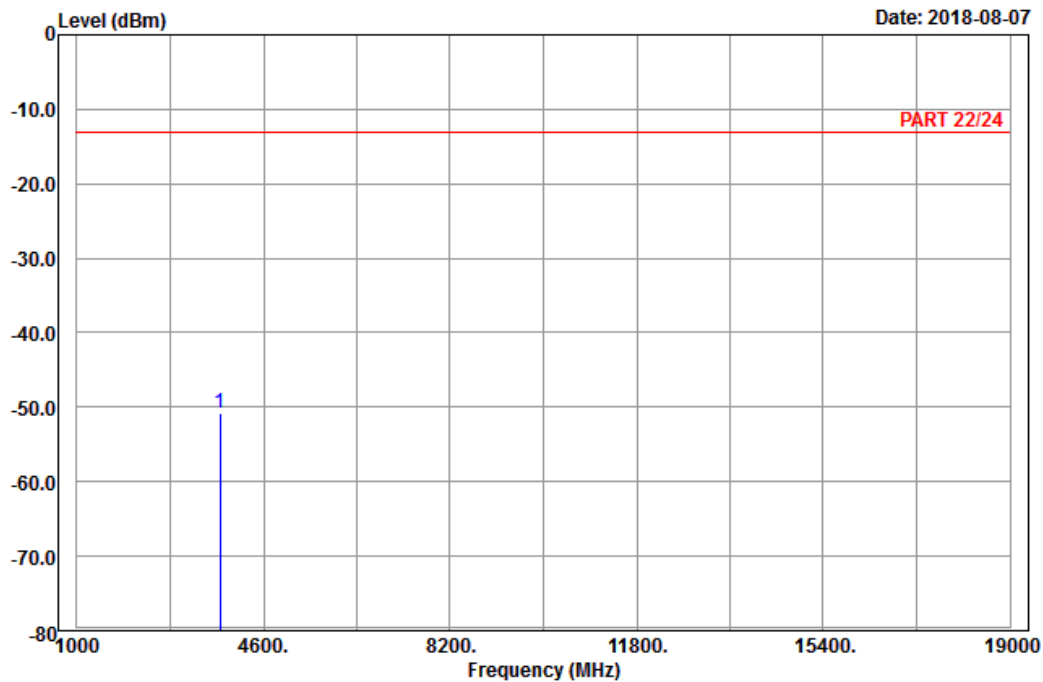

Site : 966 chamber 1  
 Condition: PART 22/24 Vertical  
 Remark : LTE\_Band 2\_Link\_CH18900  
 Tested by: Harry Hsueh

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	pp 3760.00	-50.89	-67.03	-13.00	-37.89	16.14	Peak

High Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 9

Date: 2018-08-07

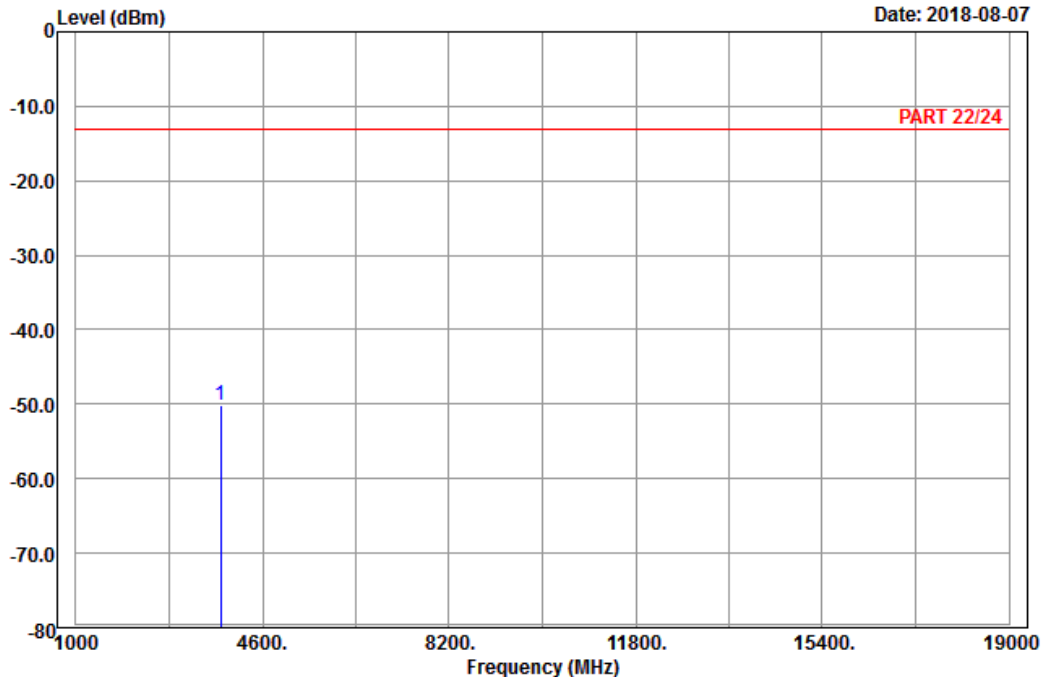

Site : 966 chamber 1  
 Condition: PART 22/24 Horizontal  
 Remark : LTE\_Band 2\_Link\_CH19100  
 Tested by: Harry Hsueh


	Read	Limit	Over			
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 3800.00	-50.16	-66.57	-13.00	-37.16	16.41	Peak



A D T

Data: 10

Date: 2018-08-07

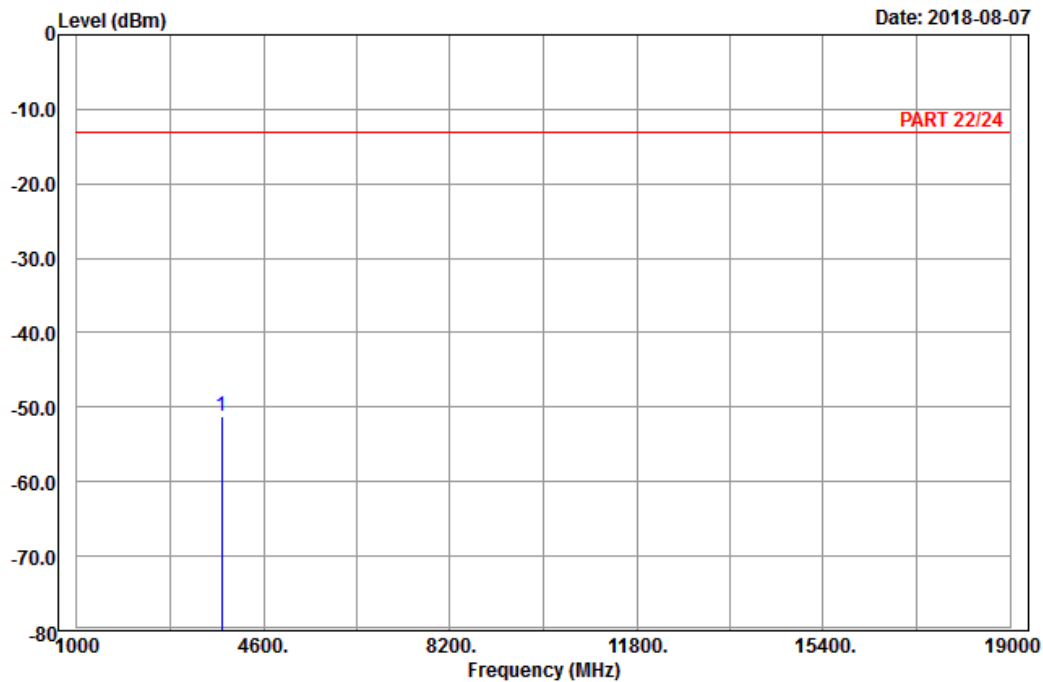

Site : 966 chamber 1  
 Condition: PART 22/24 Vertical  
 Remark : LTE\_Band 2\_Link\_CH19100  
 Tested by: Harry Hsueh

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1 pp	3800.00	-51.13	-67.54	-13.00	-38.13	16.41	Peak

LTE Band 25  
Channel Bandwidth: 20 MHz / QPSK  
Low Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 9

Date: 2018-08-07

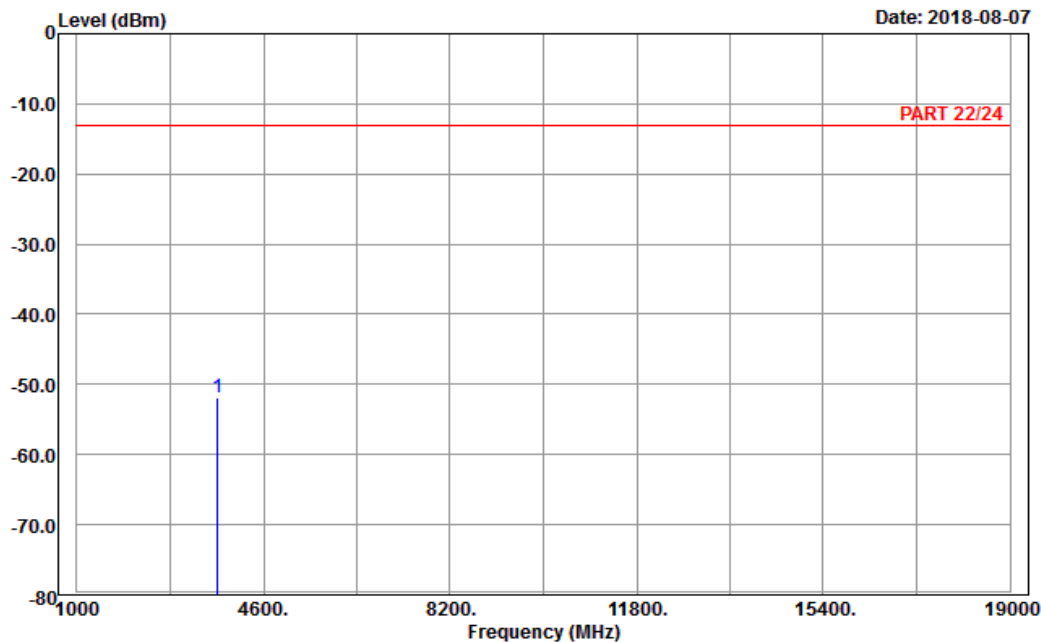

Site : 966 chamber 1  
Condition: PART 22/24 Horizontal  
Remark : LTE\_Band 25\_Link\_CH26140  
Tested by: Karl Lee


	Read	Limit	Over			
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 3720.00	-51.92	-67.89	-13.00	-38.92	15.97	Peak



A D T

Data: 10

Date: 2018-08-07

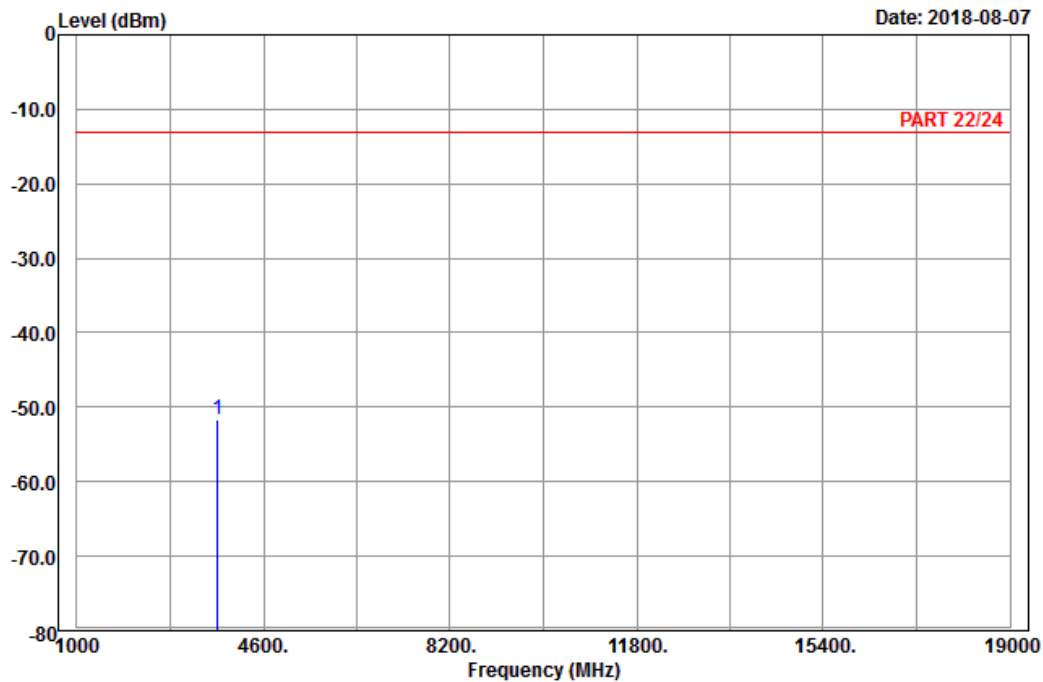

Site : 966 chamber 1  
 Condition: PART 22/24 Vertical  
 Remark : LTE\_Band 25\_Link\_CH26140  
 Tested by: Karl Lee

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1 pp	3720.00	-51.67	-67.64	-13.00	-38.67	15.97	Peak


Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 13

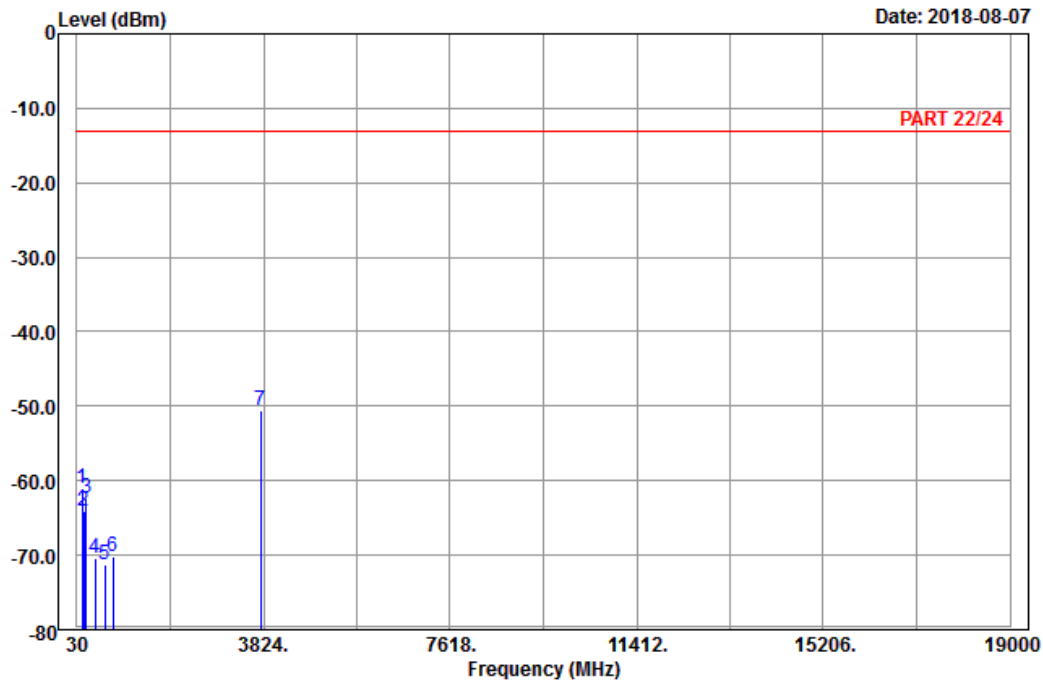

Site : 966 chamber 1  
 Condition: PART 22/24 Horizontal  
 Remark : LTE\_Band 25\_Link\_CH26365  
 Tested by: Karl Lee


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	144.21	-61.02	-53.21	-13.00	-48.02	-7.81	Peak
2	173.37	-64.00	-57.70	-13.00	-51.00	-6.30	Peak
3	223.05	-62.39	-56.52	-13.00	-49.39	-5.87	Peak
4	398.70	-70.34	-67.55	-13.00	-57.34	-2.79	Peak
5	602.40	-71.21	-71.61	-13.00	-58.21	0.40	Peak
6	762.00	-70.16	-69.68	-13.00	-57.16	-0.48	Peak
7 pp	3765.00	-50.66	-66.89	-13.00	-37.66	16.23	Peak



A D T

Data: 14

Date: 2018-08-07

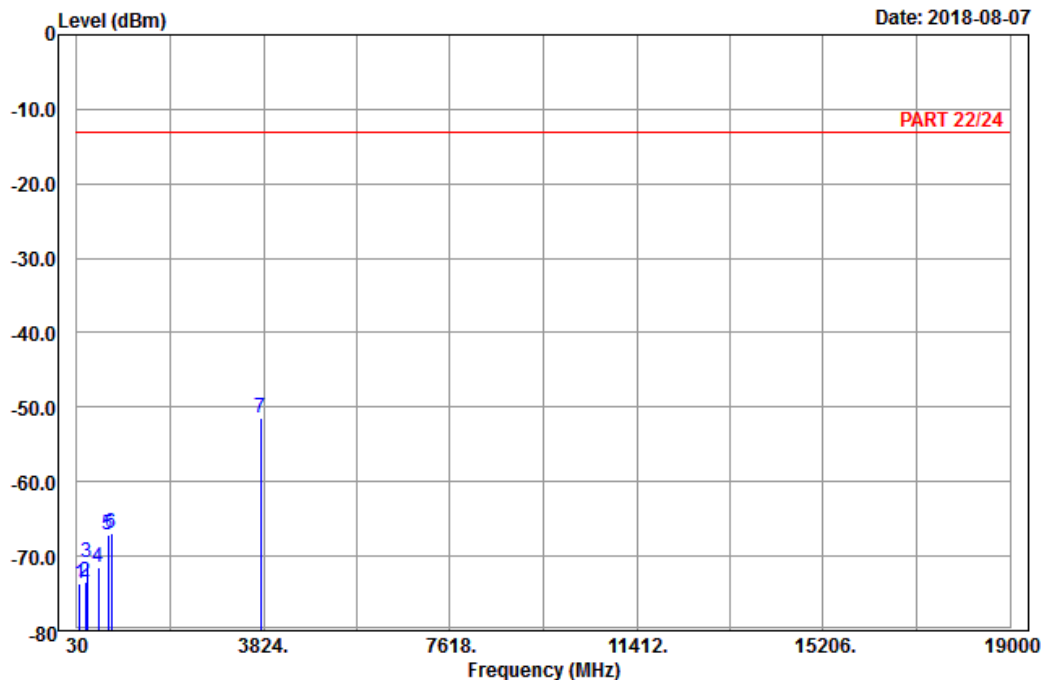

Site : 966 chamber 1  
 Condition: PART 22/24 Vertical  
 Remark : LTE\_Band 25\_Link\_CH26365  
 Tested by: Karl Lee

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	82.65	-73.76	-62.21	-13.00	-60.76	-11.55	Peak
2	201.72	-73.42	-67.26	-13.00	-60.42	-6.16	Peak
3	242.49	-70.86	-65.25	-13.00	-57.86	-5.61	Peak
4	473.60	-71.54	-67.03	-13.00	-58.54	-4.51	Peak
5	659.80	-67.11	-66.93	-13.00	-54.11	-0.18	Peak
6	731.90	-67.03	-66.05	-13.00	-54.03	-0.98	Peak
7 pp	3765.00	-51.36	-67.59	-13.00	-38.36	16.23	Peak

High Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 9

Date: 2018-08-07

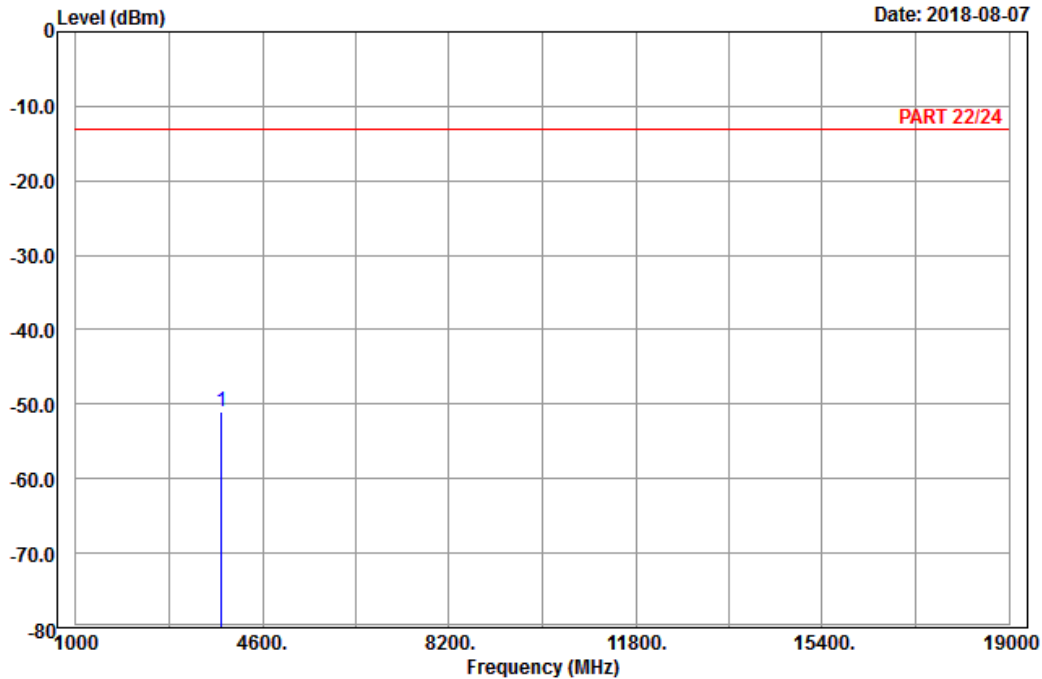

Site : 966 chamber 1  
 Condition: PART 22/24 Horizontal  
 Remark : LTE\_Band 25\_Link\_CH26590  
 Tested by: Karl Lee

	Read	Limit	Over			
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 3810.00	-51.00	-67.41	-13.00	-38.00	16.41	Peak






A D T

Data: 10

Date: 2018-08-07

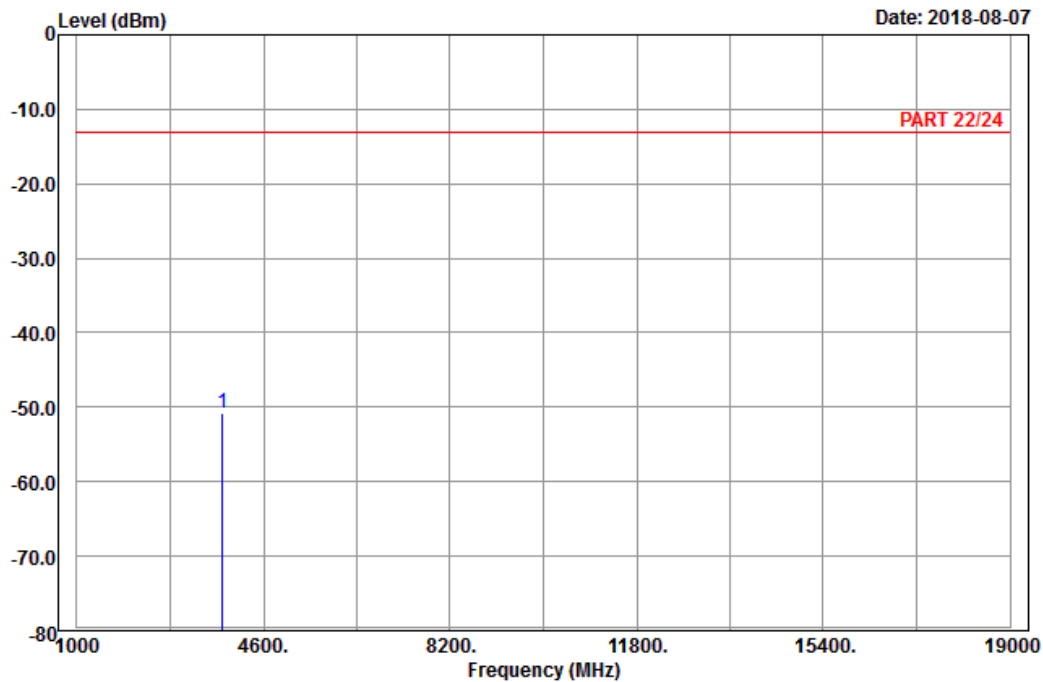

Site : 966 chamber 1  
 Condition: PART 22/24 Vertical  
 Remark : LTE\_Band 25\_Link\_CH26590  
 Tested by: Karl Lee

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	pp 3810.00	-50.76	-67.17	-13.00	-37.76	16.41	Peak

## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

## Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---