



# FCC RF Test Report

**APPLICANT** : Lenovo (Shanghai) Electronics Technology Co., Ltd.  
**EQUIPMENT** : Portable Tablet Computer  
**BRAND NAME** : Lenovo  
**MODEL NAME** : 501LV, 502LV  
**MARKETING NAME** : Lenovo TAB2  
**FCC ID** : O57TAB2A8  
**STANDARD** : FCC Part 15 Subpart C §15.247  
**CLASSIFICATION** : (DTS) Digital Transmission System

The product testing was completed on Aug. 05, 2016. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Prepared by: James Huang / Manager

Approved by: Jones Tsai / Manager



**SPORTON INTERNATIONAL (KUNSHAN) INC.**  
**No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China**



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION ..... 5**

    1.1 Applicant ..... 5

    1.2 Manufacturer ..... 5

    1.3 Product Feature of Equipment Under Test..... 5

    1.4 Product Specification subjective to this standard ..... 5

    1.5 Modification of EUT ..... 6

    1.6 Component List..... 6

    1.7 Testing Location ..... 7

    1.8 Applicable Standards..... 7

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 8**

    2.1 Carrier Frequency Channel ..... 8

    2.2 Test Mode..... 9

    2.3 Connection Diagram of Test System..... 10

    2.4 Support Unit used in test configuration and system ..... 11

    2.5 EUT Operation Test Setup ..... 11

    2.6 Measurement Results Explanation Example..... 12

**3 TEST RESULT ..... 13**

    3.1 6dB and 99% Bandwidth Measurement ..... 13

    3.2 Output Power Measurement..... 15

    3.3 Power Spectral Density Measurement ..... 16

    3.4 Conducted Band Edges and Spurious Emission Measurement ..... 18

    3.5 Radiated Band Edges and Spurious Emission Measurement ..... 31

    3.6 AC Conducted Emission Measurement..... 35

    3.7 Antenna Requirements ..... 40

**4 LIST OF MEASURING EQUIPMENT ..... 41**

**5 UNCERTAINTY OF EVALUATION ..... 43**

**APPENDIX A. CONDUCTED TEST RESULTS**

**APPENDIX B. RADIATED TEST RESULTS**

**APPENDIX C. DUTY CYCLE PLOTS**

**APPENDIX D. SETUP PHOTOGRAPHS**



### REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR672904	Rev. 01	This report for 501LV, 502LV that only added the spec information and test data of 802.11n HT40, and other test cases were leveraged from original report (Sporton Report Number FR550402C).	Aug. 10, 2016



### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Pass	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.31 dB at 154.160 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 9.81 dB at 0.490 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-



# 1 General Description

## 1.1 Applicant

**Lenovo (Shanghai) Electronics Technology Co., Ltd.**  
 No. 68 Building, 199 Fenju Road, Wai Gao Qiao FTZ, Shanghai, China

## 1.2 Manufacturer

**Lenovo PC HK Limited**  
 23/F, Lincoln House, Taikoo Place 979 King's Road, Quarry Bay, Hong Kong

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Portable Tablet Computer
Brand Name	Lenovo
Model Name	501LV, 502LV
Marketing Name	Lenovo TAB2
FCC ID	O57TAB2A8
EUT supports Radios application	GPRS/EGPRS/LTE/ WLAN2.4GHz 802.11b/g/n HT20/HT40 Bluetooth v3.0+EDR/Bluetooth v4.0 LE
HW Version	LenovoPad A8-50F
SW Version	A8-50F_150520
EUT Stage	Identical Prototype

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

## 1.4 Product Specification subjective to this standard

Product Specification subjective to this standard	
Tx/Rx Channel Frequency Range	802.11b/g/n : 2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to Antenna	802.11b : 17.03 dBm (0.0505 W) 802.11g : 21.98 dBm (0.1578 W) 802.11n HT20 : 20.59 dBm (0.1146 W) 802.11n HT40 : 20.52 dBm (0.1127 W)
99% Occupied Bandwidth	802.11b : 12.45MHz 802.11g : 17.40MHz 802.11n HT20 : 18.20MHz 802.11n HT40 : 36.26MHz
Antenna Type / Gain	PIFA Antenna with gain 1.90 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)



### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

### 1.6 Component List

**Note:** There are two types of EUT, the difference between Sample 1 and Sample 2 are for LCM/back camera. The details refer the following table. We only choose sample 1 to perform full tests.

Component	Sample 1	Sample 2
LCM	TFT_8"_1280X800_TTV080WXM-NL0 (BOE)	TFT_8"_1280X800_D0800CS00 (Dongshan)
Back_camera	Camera_500W_AF_L545A00 (O-Film)	Camera_500W-AF_BTBTB_30PIN_FH545AB (Q-tech)



### 1.7 Testing Location

<b>Test Site</b>	SPORTON INTERNATIONAL (KUNSHAN) INC.			
<b>Test Site Location</b>	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958			
<b>Test Site No.</b>	<b>Sporton Site No.</b>			<b>FCC Registration No.</b>
	TH01-KS	03CH03-KS	CO01-KS	306251

<b>Test Site</b>	SPORTON INTERNATIONAL (SHENZHEN) INC.		
<b>Test Site Location</b>	No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District, Shenzhen, Guangdong, P. R. China TEL: +86-755- 3320-2398		
<b>Test Site No.</b>	<b>Sporton Site No.</b>		<b>FCC Registration No.</b>
	03CH01-SZ		831040

**Note:** The test site complies with ANSI C63.4 2014 requirement.

### 1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05
- ANSI C63.10-2013

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z/X plane) were recorded in this report.

### 2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-





## 2.2 Test Mode


Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0


Test Cases	
<b>AC Conducted</b>	Mode 1 : GPRS850 Idle + Bluetooth Link + WLAN Link + Adapter 1 + Earphone
<b>Emission</b>	Mode 2 : GPRS850 Idle + Bluetooth Link + WLAN Link + Adapter 2 + Earphone
<b>Remark:</b>	
1. The worst case of conducted emission is mode 2; only the test data of it is reported.	
2. For radiated test cases, the tests were performed with adapter 1 and earphone.	

## 2.3 Connection Diagram of Test System

### <WLAN Tx Mode>

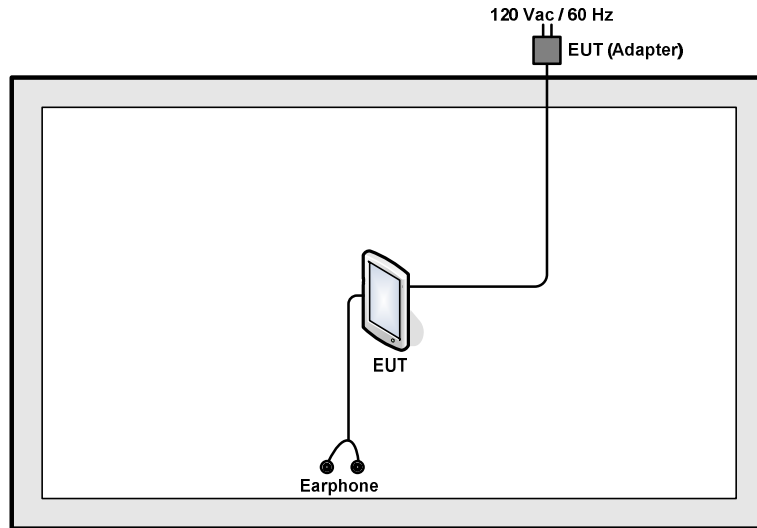

### <AC Conducted Emission Mode>

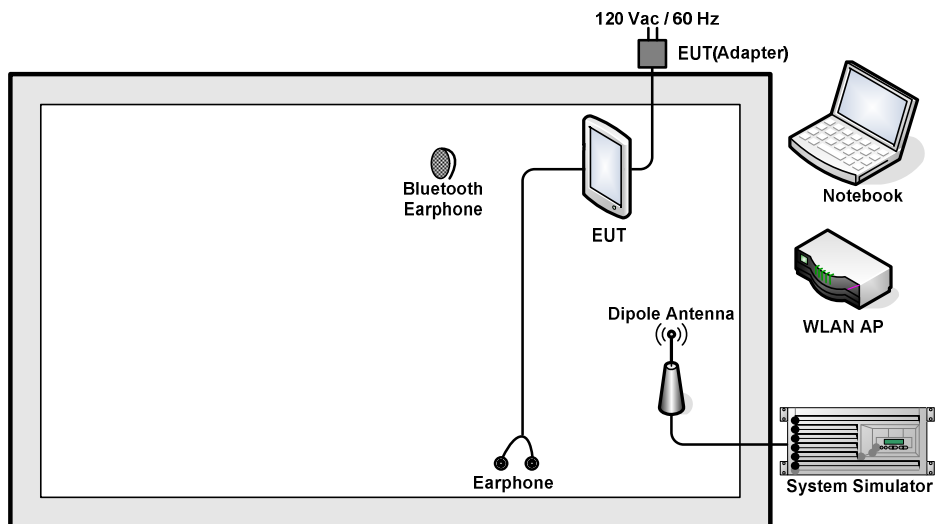

## 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8m
2.	WLAN AP	D-Link	DIR-855	KA2DIR855A2	N/A	Unshielded, 1.8 m
3.	Notebook	Lenovo	G480	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	Bluetooth Earphone	Lenovo	LBH505	N/A	N/A	N/A
5.	Earphone	Lenovo	SH100	N/A	Unshielded, 1.2 m	N/A

## 2.5 EUT Operation Test Setup

For WLAN function, the engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.



## 2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss.

*Offset = RF cable loss*

Following shows an offset computation example with cable loss 5.5 dB.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} \\ &= 5.5 \text{ (dB)} \end{aligned}$$

### 3 Test Result

#### 3.1 6dB and 99% Bandwidth Measurement

##### 3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v03r05.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1MHz and set the Video bandwidth (VBW) = 3MHz.
6. Measure and record the results in the test report.


##### 3.1.4 Test Setup

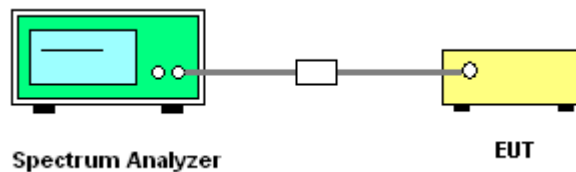



### 3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A of this test report.

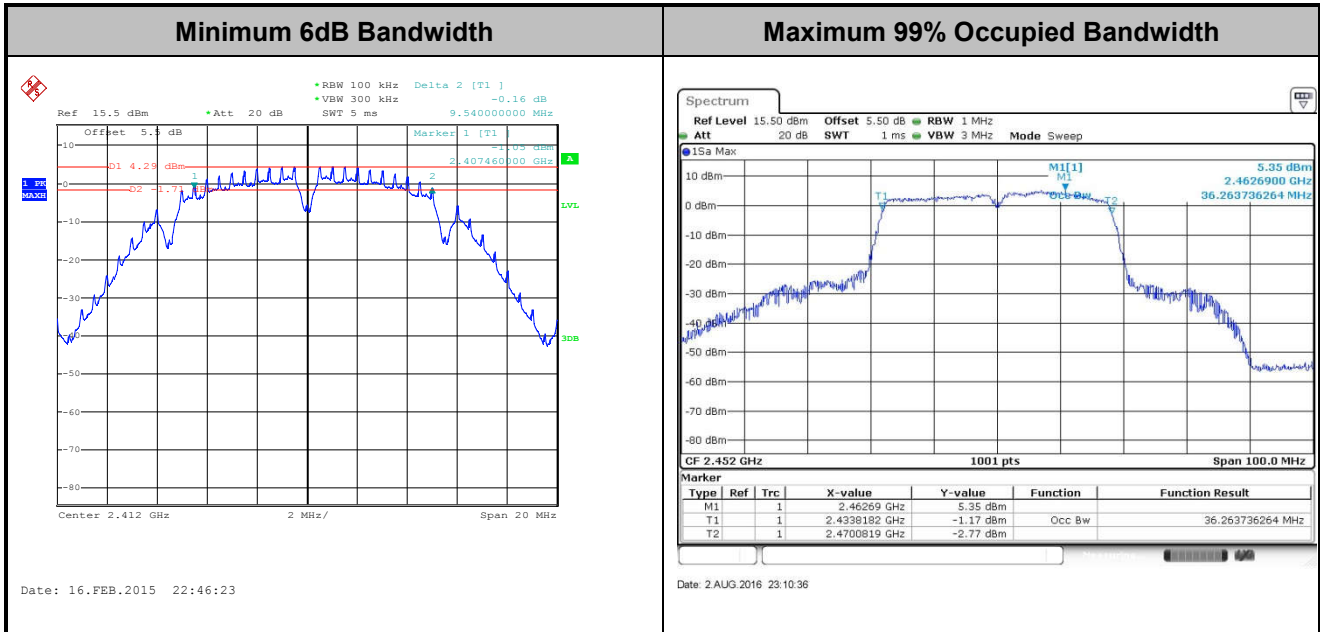

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

## 3.2 Output Power Measurement

### 3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting Antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the Antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the Antenna exceeds 6dBi.


### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v03r05 section 9.1.2 PKPM1 Peak power meter method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

### 3.2.4 Test Setup

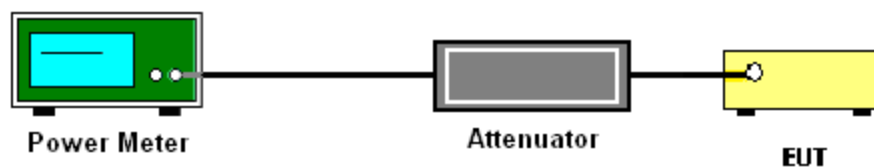

### 3.2.5 Test Result of Peak Output Power

Please refer to Appendix A of this test report.

### 3.2.6 Test Result of Average output Power (Reporting Only)

Please refer to Appendix A of this test report.

### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

#### 3.3.4 Test Setup

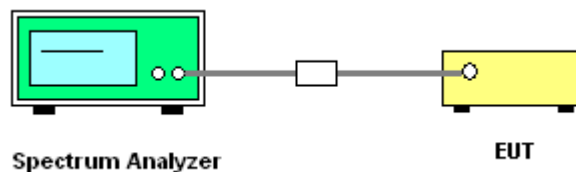






### 3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A of this test report.

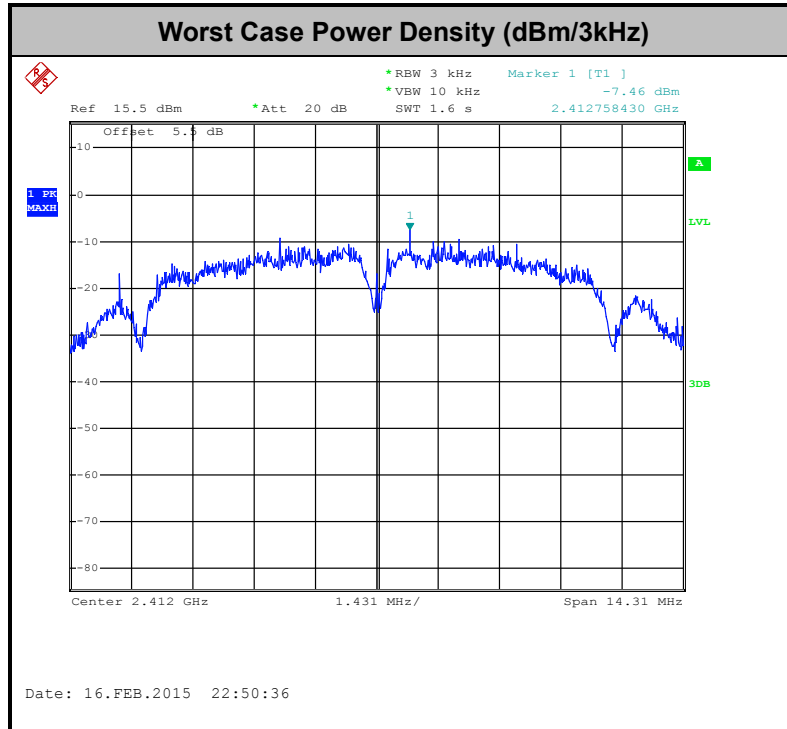

## 3.4 Conducted Band Edges and Spurious Emission Measurement

### 3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).


### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.4.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

### 3.4.4 Test Setup

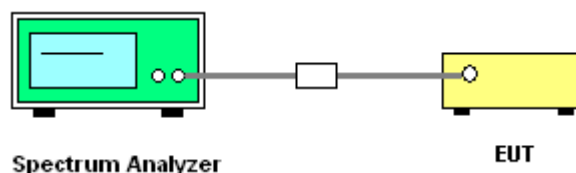




### 3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Test Mode :	802.11b	Temperature :	21~25°C
Test Band :	2.4GHz Low	Relative Humidity :	51~54%
Test Channel :	01	Test Engineer :	Issac Song


#### WLAN 802.11b Channel 01

##### 100kHz PSD reference Level

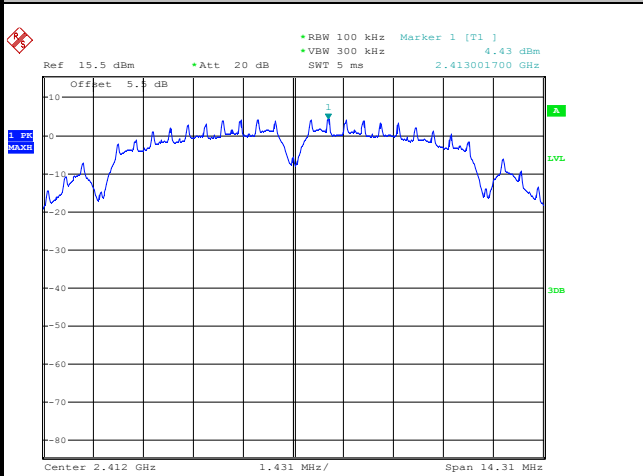


Date: 16.FEB.2015 22:49:34

##### Low Channel Plot

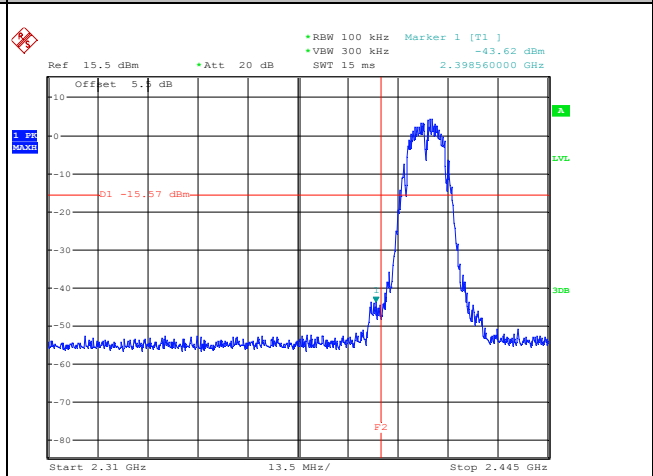


Date: 16.FEB.2015 22:51:21

##### Spurious Emission 30MHz~3GHz

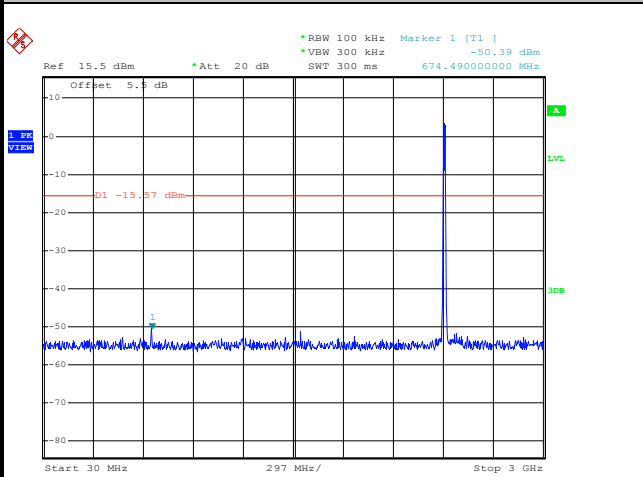

Date: 16.FEB.2015 23:00:01

##### Spurious Emission 2GHz~25GHz

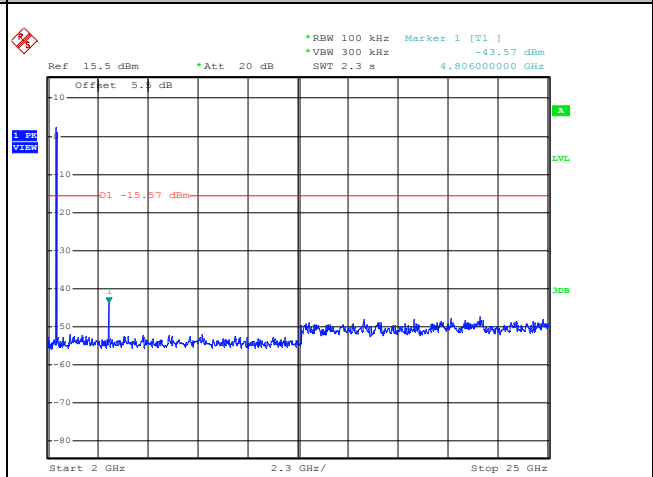


Date: 16.FEB.2015 23:00:19



Test Mode :	802.11b	Temperature :	21~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	51~54%
Test Channel :	06	Test Engineer :	Issac Song


WLAN 802.11b Channel 06

100kHz PSD reference Level

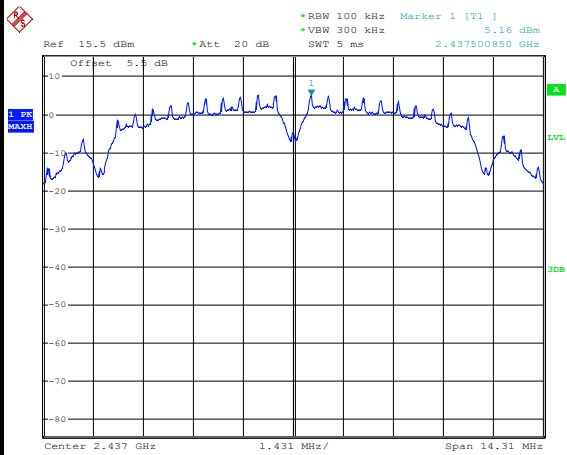


Date: 17.FEB.2015 03:55:33

Spurious Emission 30MHz~3GHz

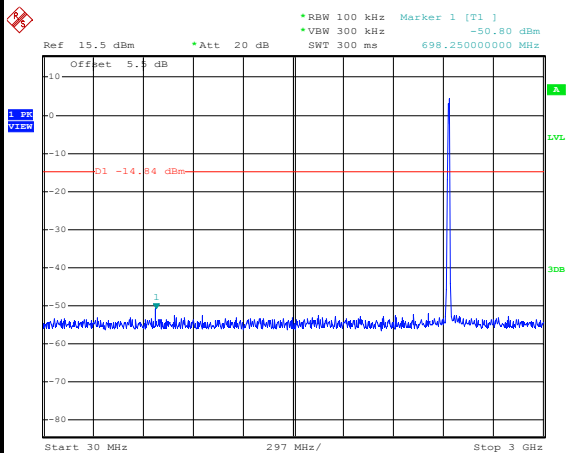

Date: 17.FEB.2015 03:55:55

Spurious Emission 2GHz~25GHz

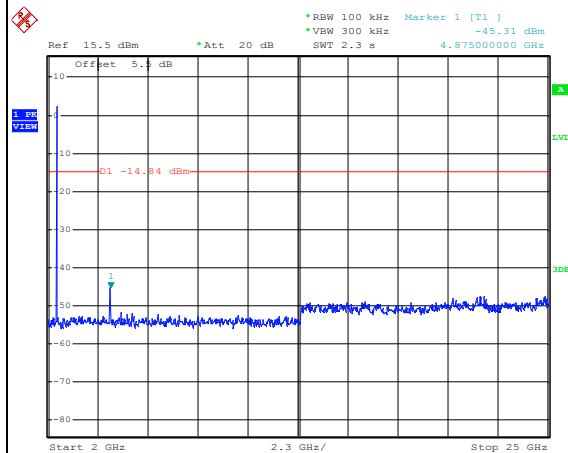


Date: 17.FEB.2015 03:56:13




Test Mode :	802.11b	Temperature :	21~25°C
Test Band :	2.4GHz High	Relative Humidity :	51~54%
Test Channel :	11	Test Engineer :	Issac Song

WLAN 802.11b Channel 11


100kHz PSD reference Level

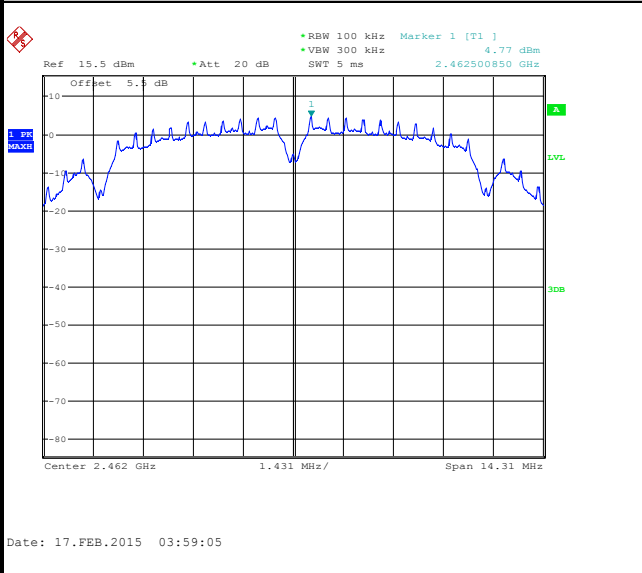


High Channel Plot

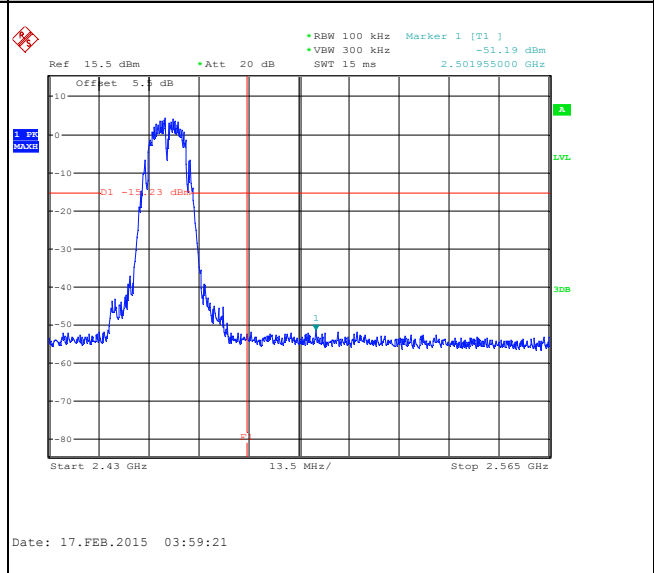

Spurious Emission 30MHz~3GHz

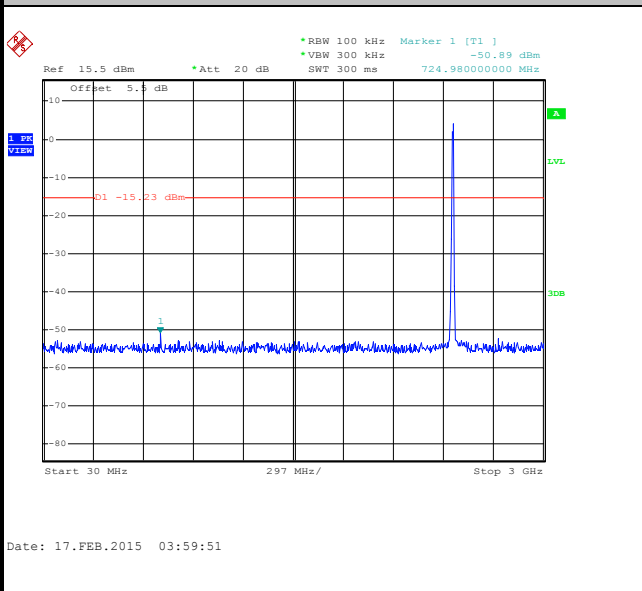

Spurious Emission 2GHz~25GHz

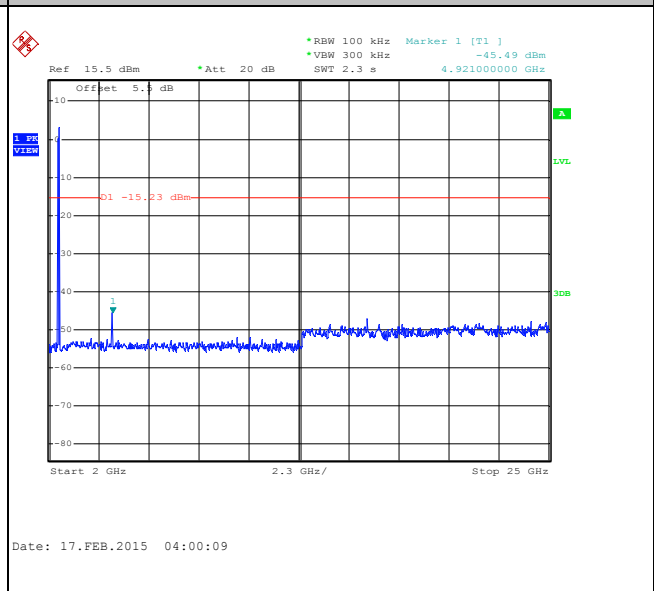





Test Mode :	802.11g	Temperature :	21~25°C
Test Band :	2.4GHz Low	Relative Humidity :	51~54%
Test Channel :	01	Test Engineer :	Issac Song

WLAN 802.11g Channel 01


100kHz PSD reference Level

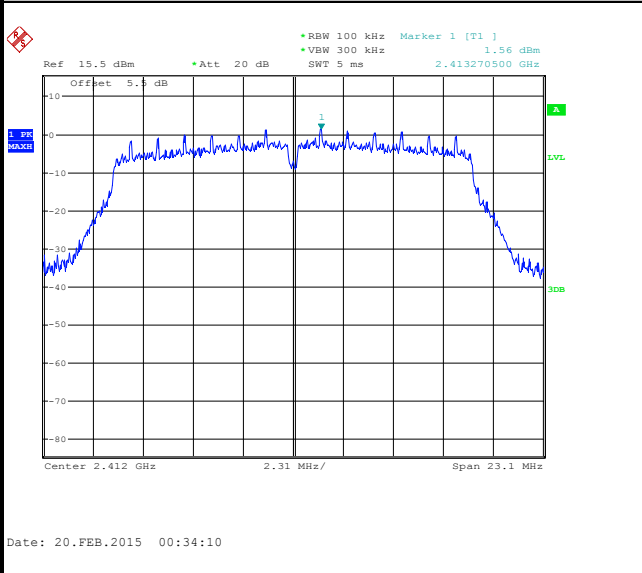


Low Channel Plot

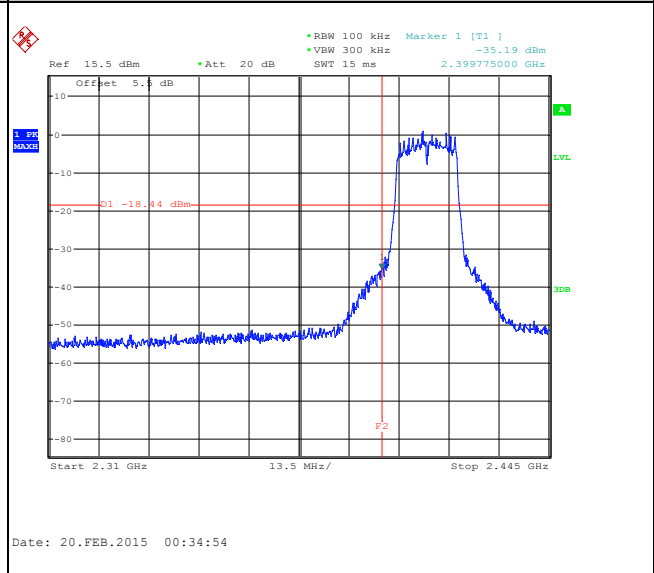

Spurious Emission 30MHz~3GHz

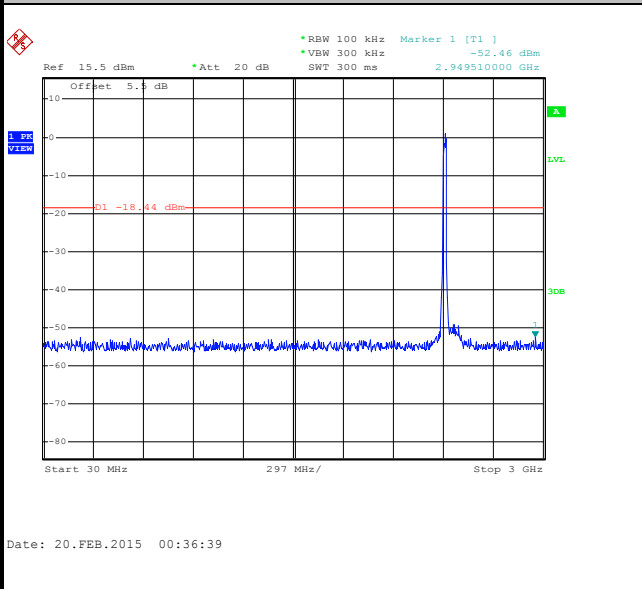

Spurious Emission 2GHz~25GHz

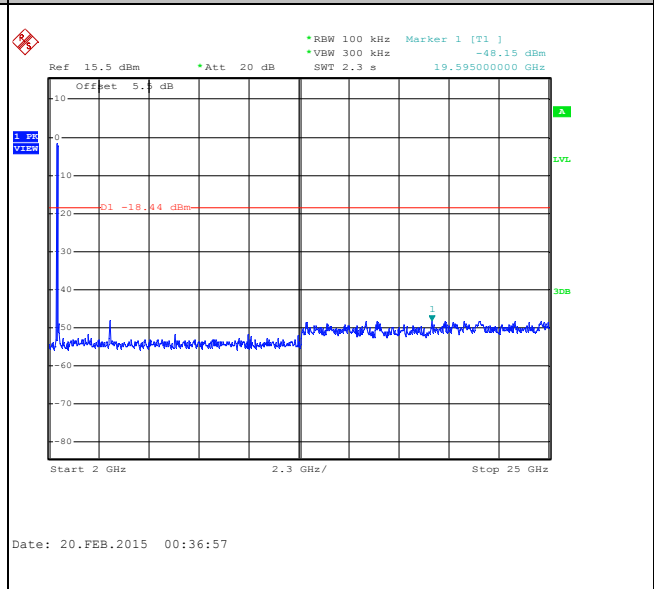





Test Mode :	802.11g	Temperature :	21~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	51~54%
Test Channel :	06	Test Engineer :	Issac Song

WLAN 802.11g Channel 06


100kHz PSD reference Level

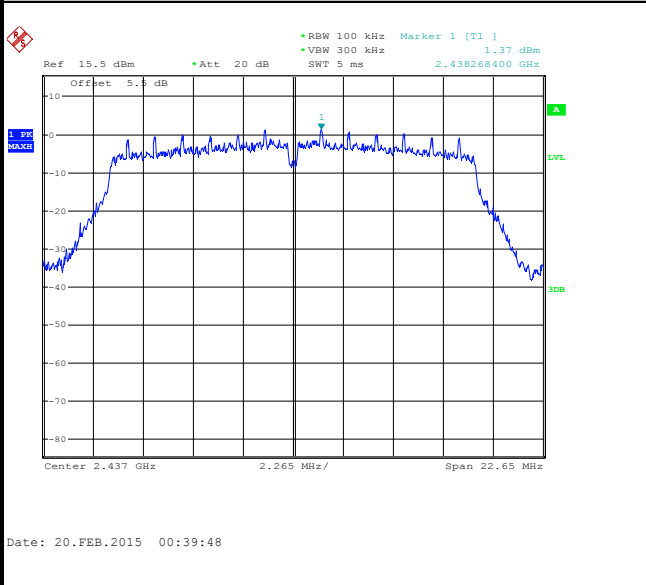

Spurious Emission 30MHz~3GHz

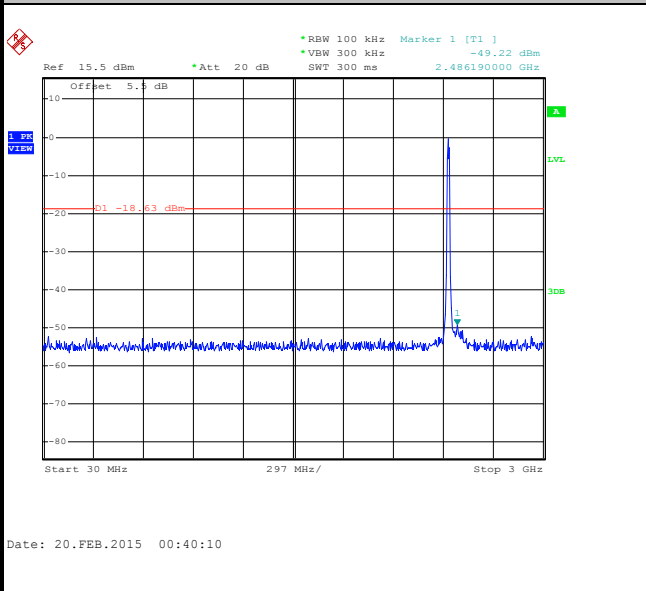

Spurious Emission 2GHz~25GHz

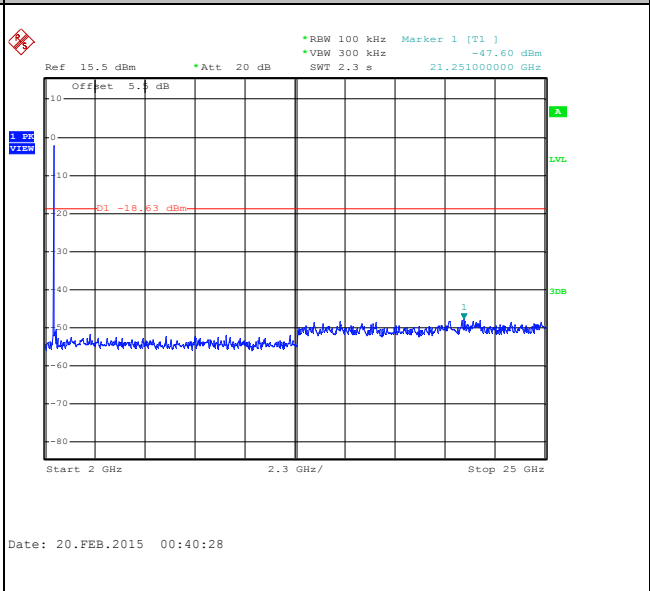





Test Mode :	802.11g	Temperature :	21~25°C
Test Band :	2.4GHz High	Relative Humidity :	51~54%
Test Channel :	11	Test Engineer :	Issac Song

WLAN 802.11g Channel 11


100kHz PSD reference Level

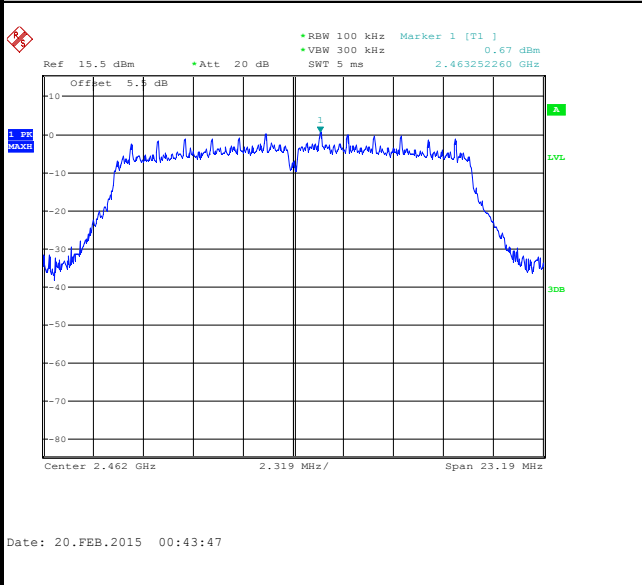


High Channel Plot

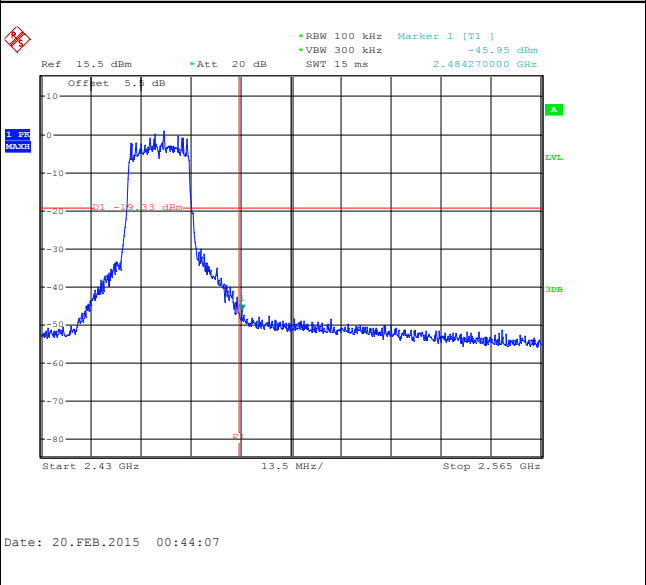

Spurious Emission 30MHz~3GHz

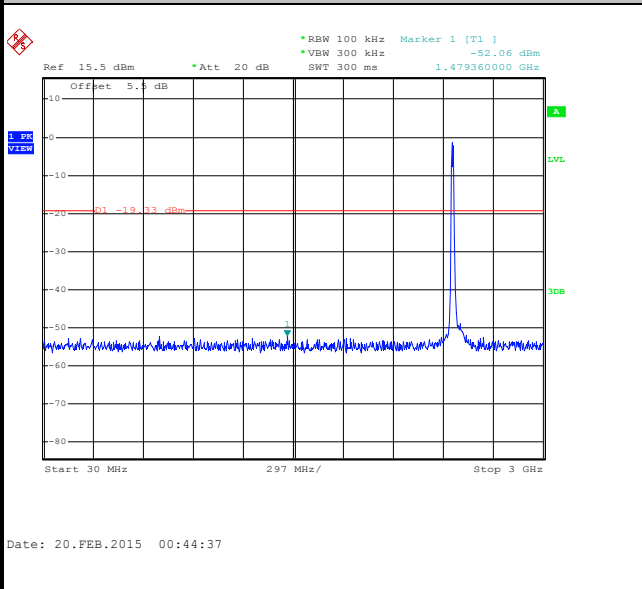

Spurious Emission 2GHz~25GHz

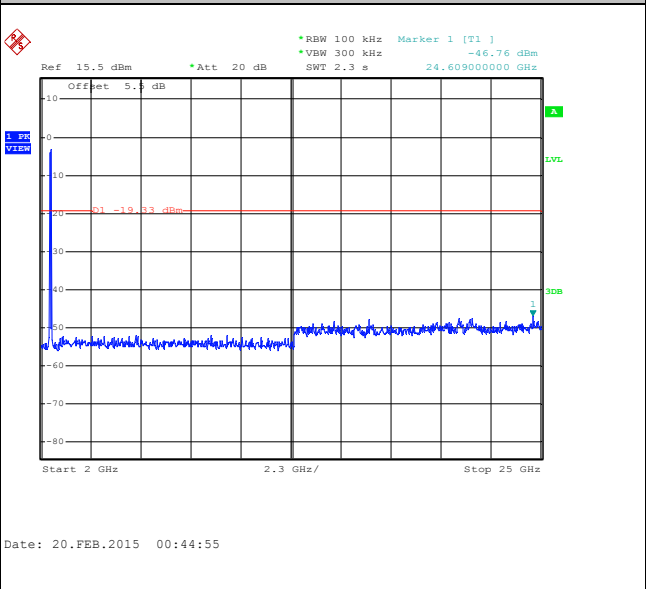







Test Mode :	802.11n HT20	Temperature :	21~25°C
Test Band :	2.4GHz Low	Relative Humidity :	51~54%
Test Channel :	01	Test Engineer :	Issac Song

WLAN 802.11n HT20 Channel 01


100kHz PSD reference Level

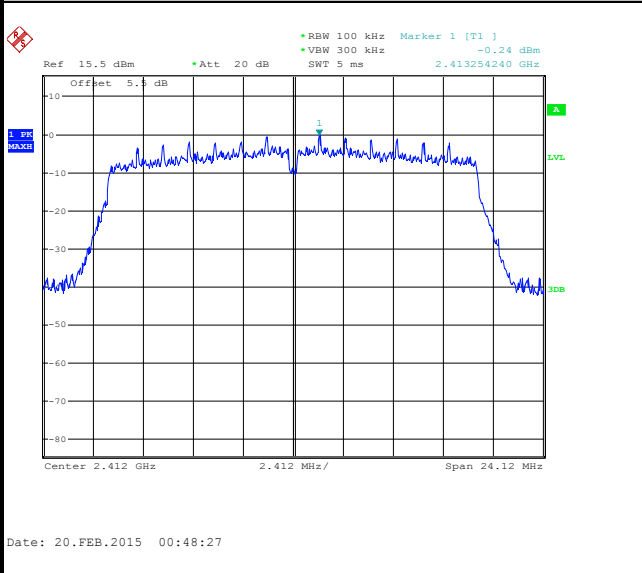


Low Channel Plot

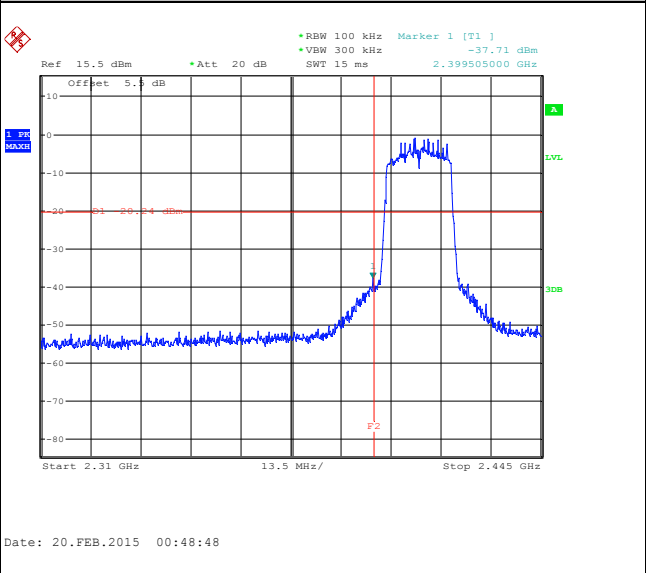

Spurious Emission 30MHz~3GHz

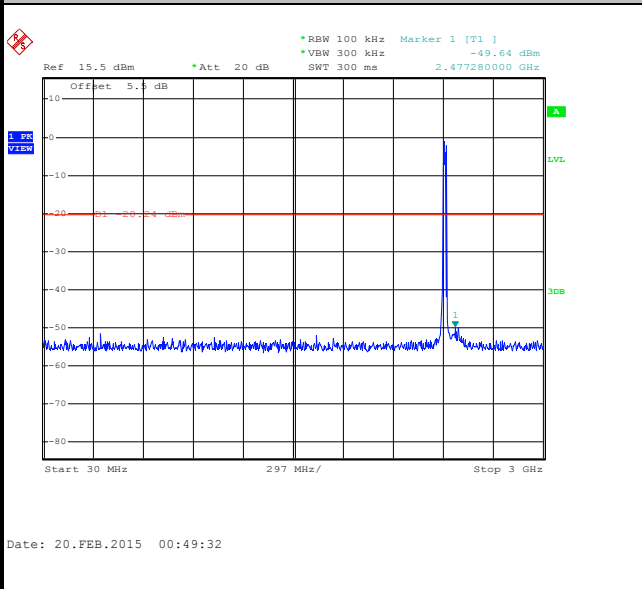

Spurious Emission 2GHz~25GHz

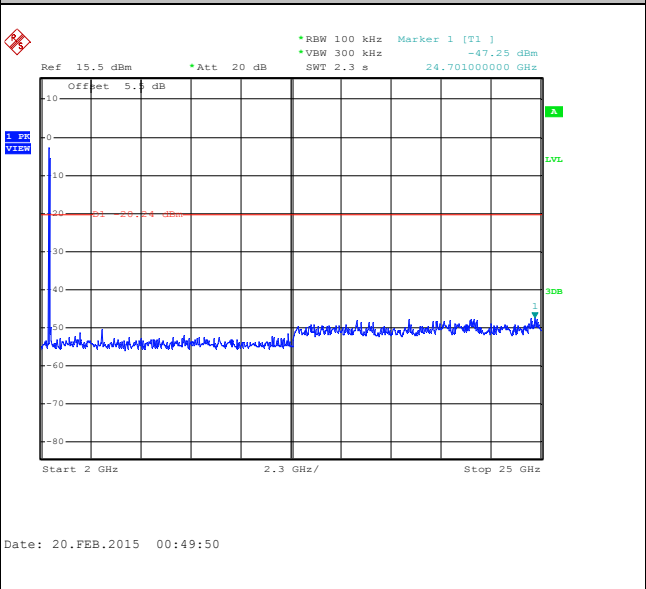





Test Mode :	802.11n HT20	Temperature :	21~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	51~54%
Test Channel :	06	Test Engineer :	Issac Song

WLAN 802.11n HT20 Channel 06


100kHz PSD reference Level

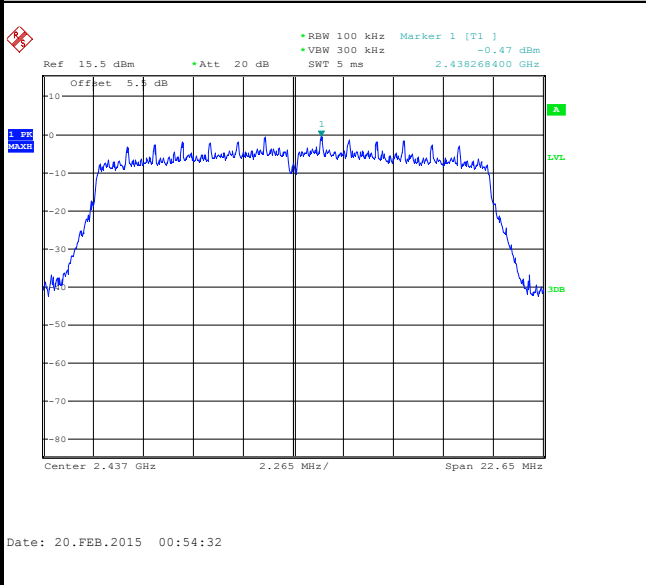

Spurious Emission 30MHz~3GHz

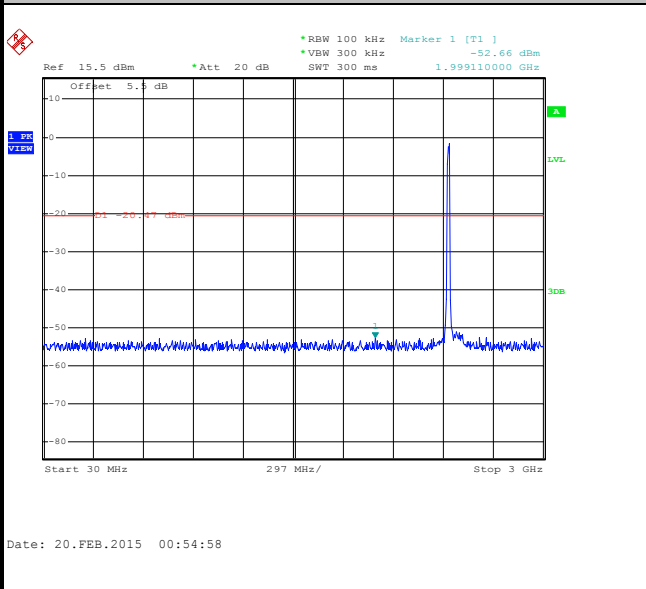

Spurious Emission 2GHz~25GHz

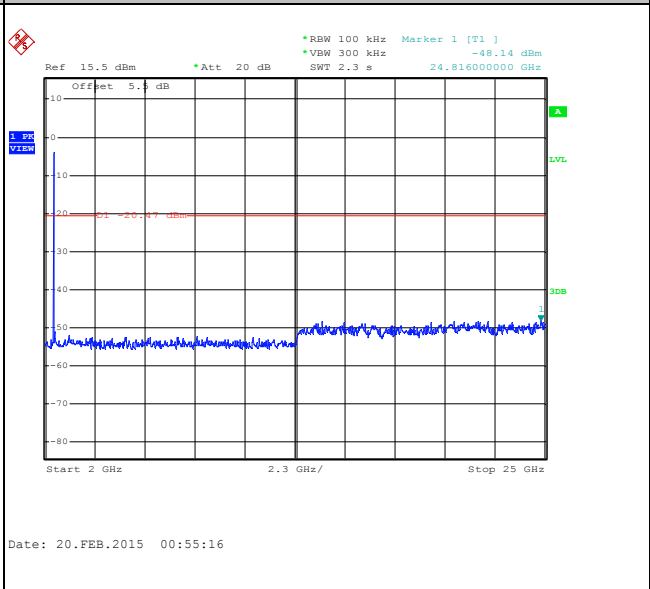




Test Mode :	802.11n HT20	Temperature :	21~25°C
Test Band :	2.4GHz High	Relative Humidity :	51~54%
Test Channel :	11	Test Engineer :	Issac Song


WLAN 802.11n HT20 Channel 11

100kHz PSD reference Level

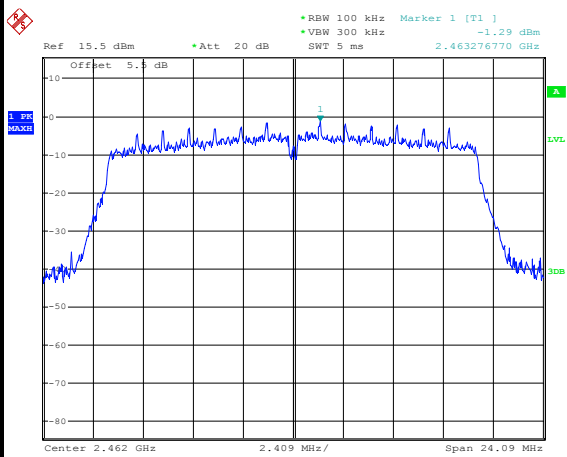


Date: 20.FEB.2015 00:59:34

High Channel Plot

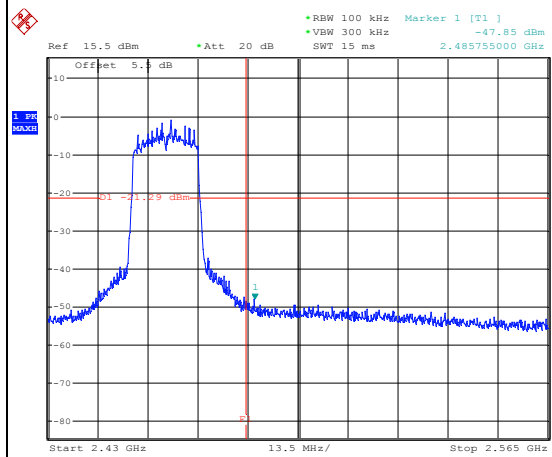


Date: 20.FEB.2015 01:00:14

Spurious Emission 30MHz~3GHz

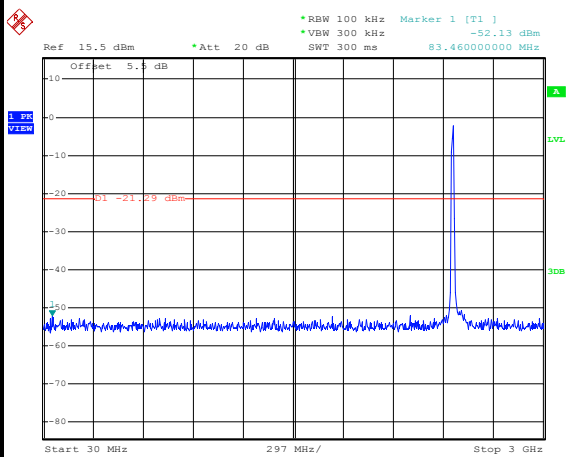

Date: 20.FEB.2015 01:00:59


Spurious Emission 2GHz~25GHz

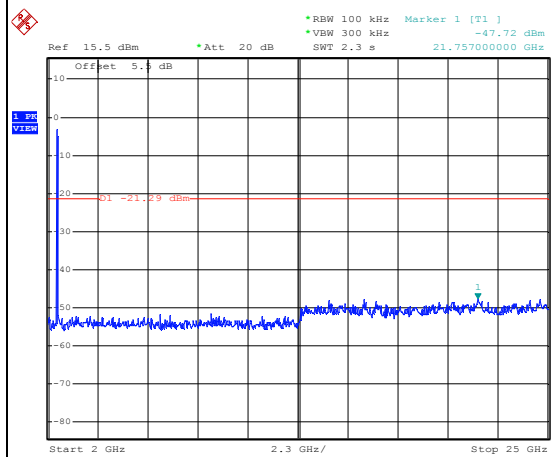

Date: 20.FEB.2015 01:01:17



Test Mode :	802.11n HT40	Temperature :	21~25°C
Test Band :	2.4GHz Low	Relative Humidity :	51~54%
Test Channel :	03	Test Engineer :	Issac Song

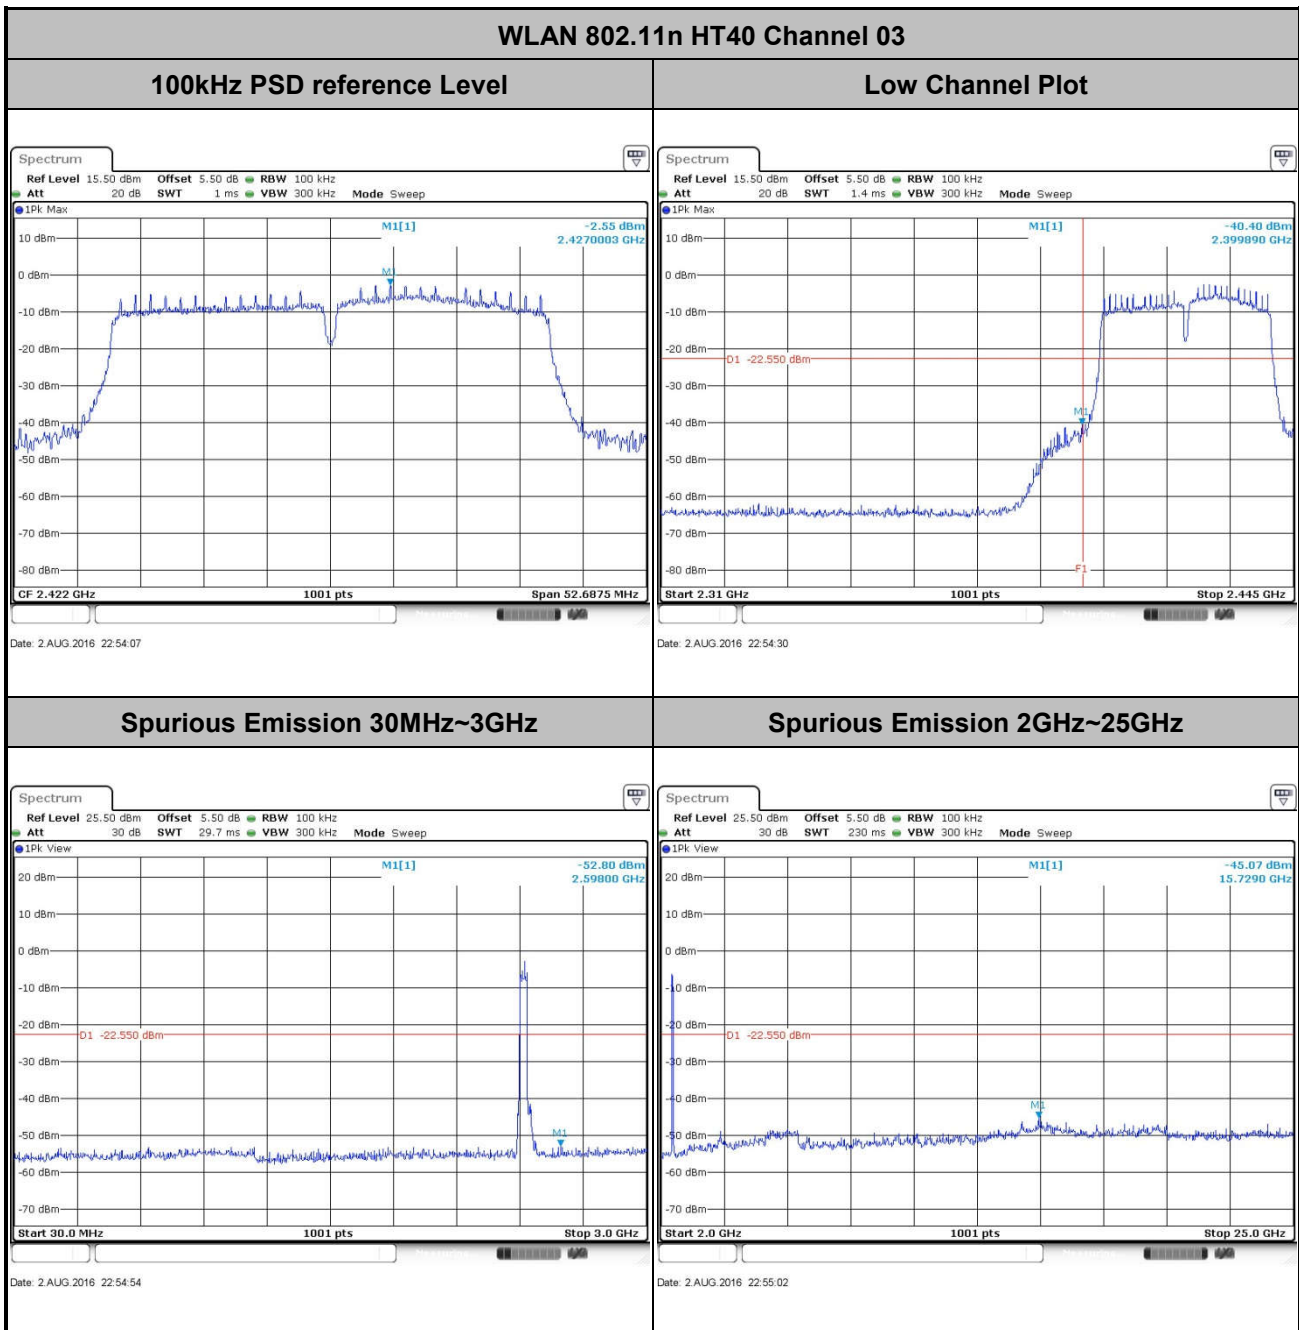





Test Mode :	802.11n HT40	Temperature :	21~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	51~54%
Test Channel :	06	Test Engineer :	Issac Song

WLAN 802.11n HT40 Channel 06


100kHz PSD reference Level

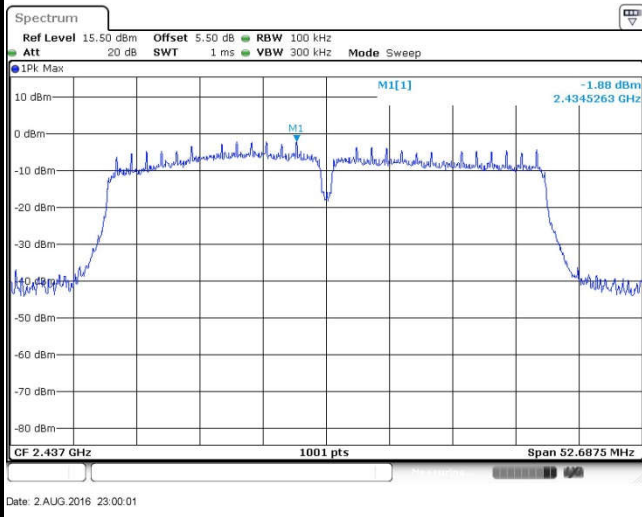

Spurious Emission 30MHz~3GHz

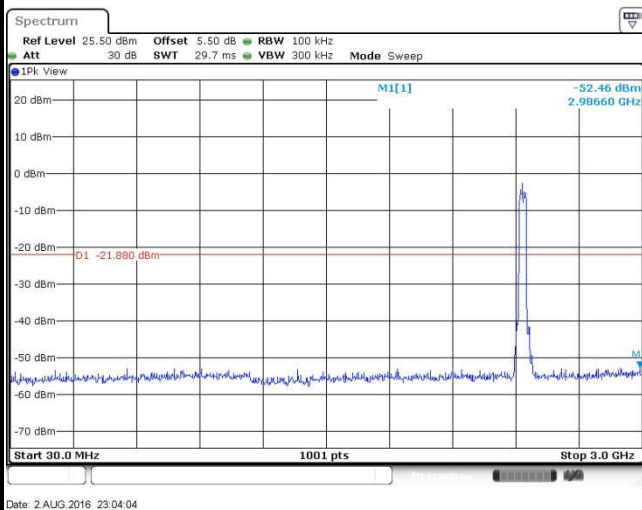

Spurious Emission 2GHz~25GHz

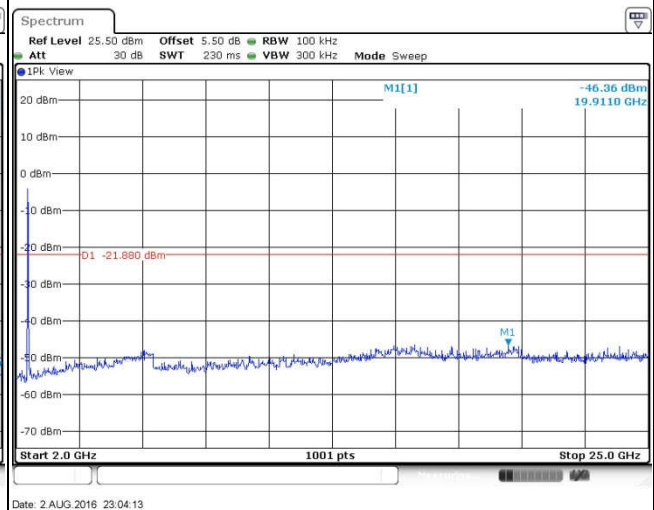




Test Mode :	802.11n HT40	Temperature :	21~25°C
Test Band :	2.4GHz High	Relative Humidity :	51~54%
Test Channel :	09	Test Engineer :	Issac Song


WLAN 802.11n HT40 Channel 09

100kHz PSD reference Level

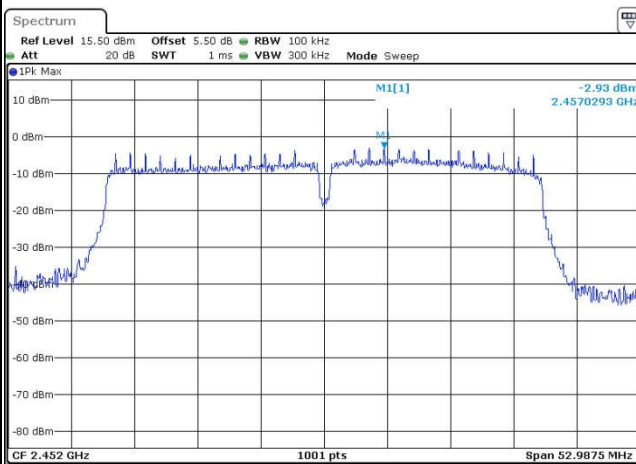


Date: 2 AUG.2016 23:08:54

High Channel Plot

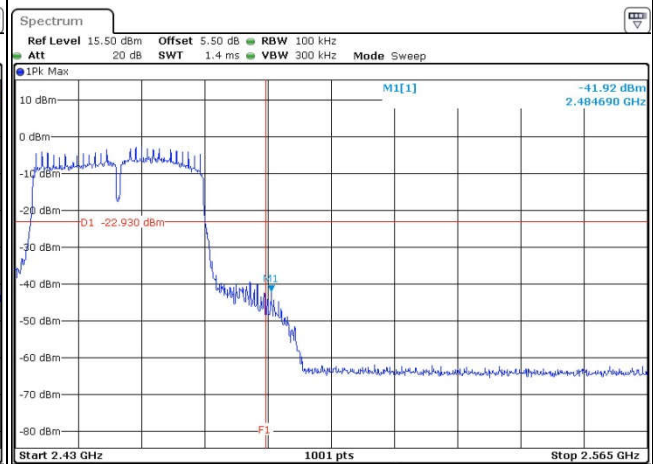


Date: 2 AUG.2016 23:09:24

Spurious Emission 30MHz~3GHz

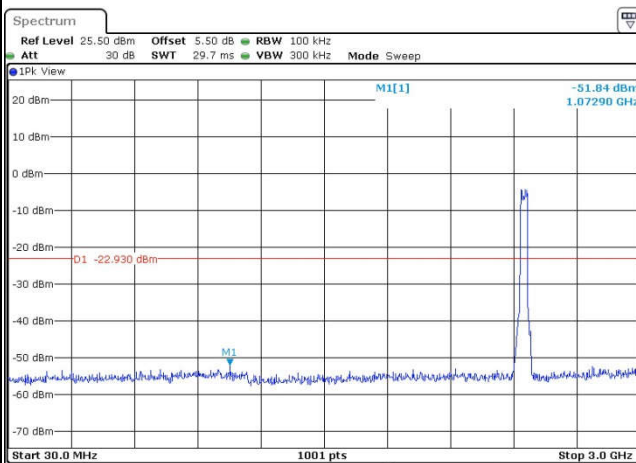

Date: 2 AUG.2016 23:10:15

Spurious Emission 2GHz~25GHz

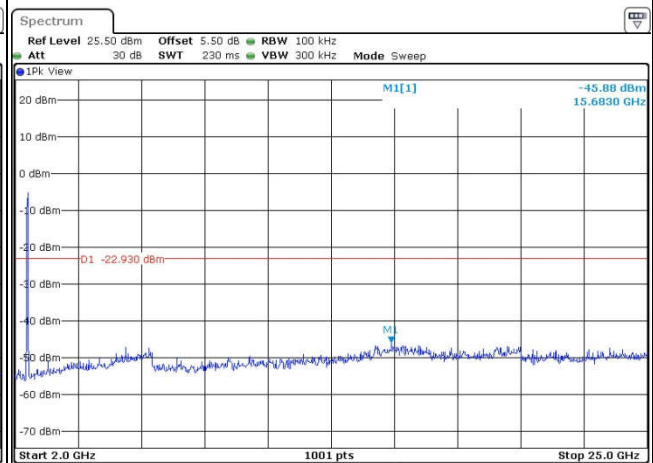

Date: 2 AUG.2016 23:10:24



### 3.5 Radiated Band Edges and Spurious Emission Measurement

#### 3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




### 3.5.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW= 3MHz for  $f \geq 1$  GHz for peak measurement.  
For average measurement:
    - VBW = 10 Hz, when duty cycle is no less than 98 percent.
    - VBW  $\geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.




### 3.5.4 Test Setup


For radiated emissions below 30MHz

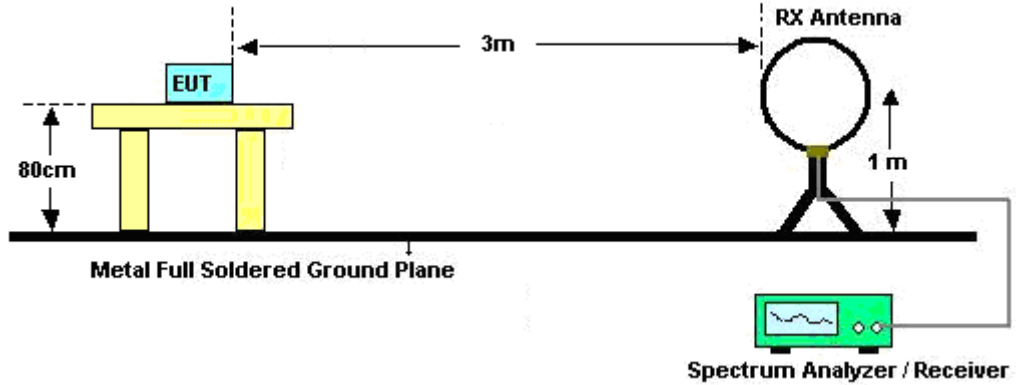

For radiated emissions from 30MHz to 1GHz

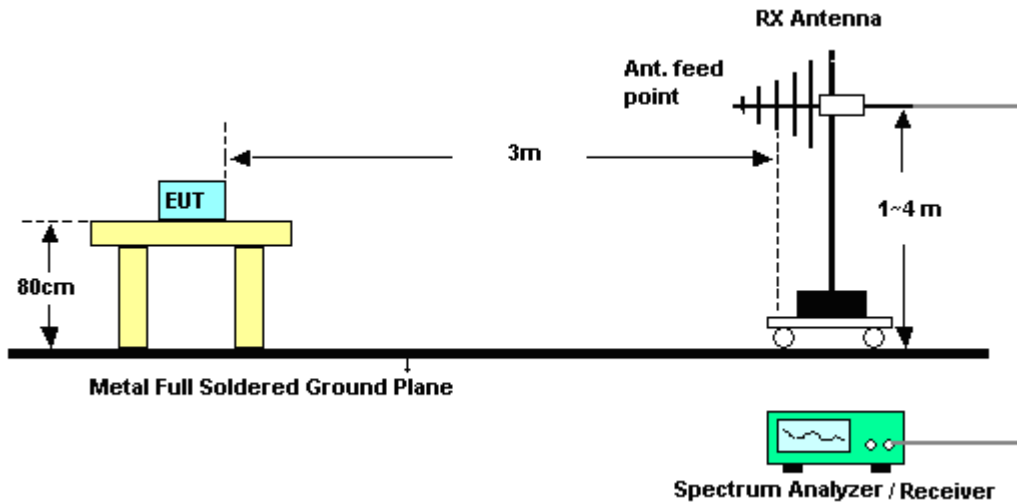

For radiated emissions above 1GHz

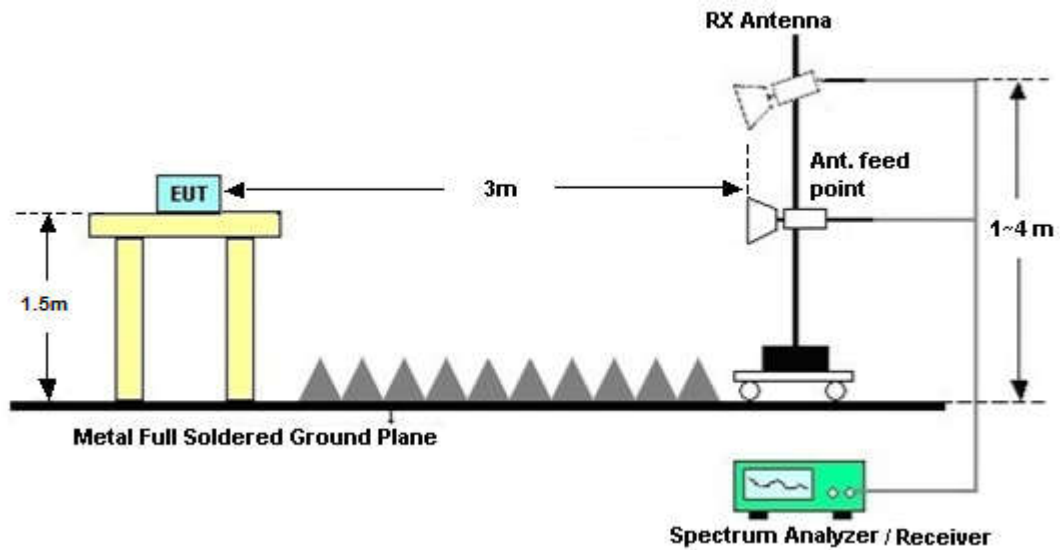

### 3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

### 3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B.

### 3.5.7 Duty Cycle

Please refer to Appendix C.

### 3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10<sup>th</sup> Harmonic)

Please refer to Appendix B.



### 3.6 AC Conducted Emission Measurement

#### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.


### 3.6.4 Test Setup

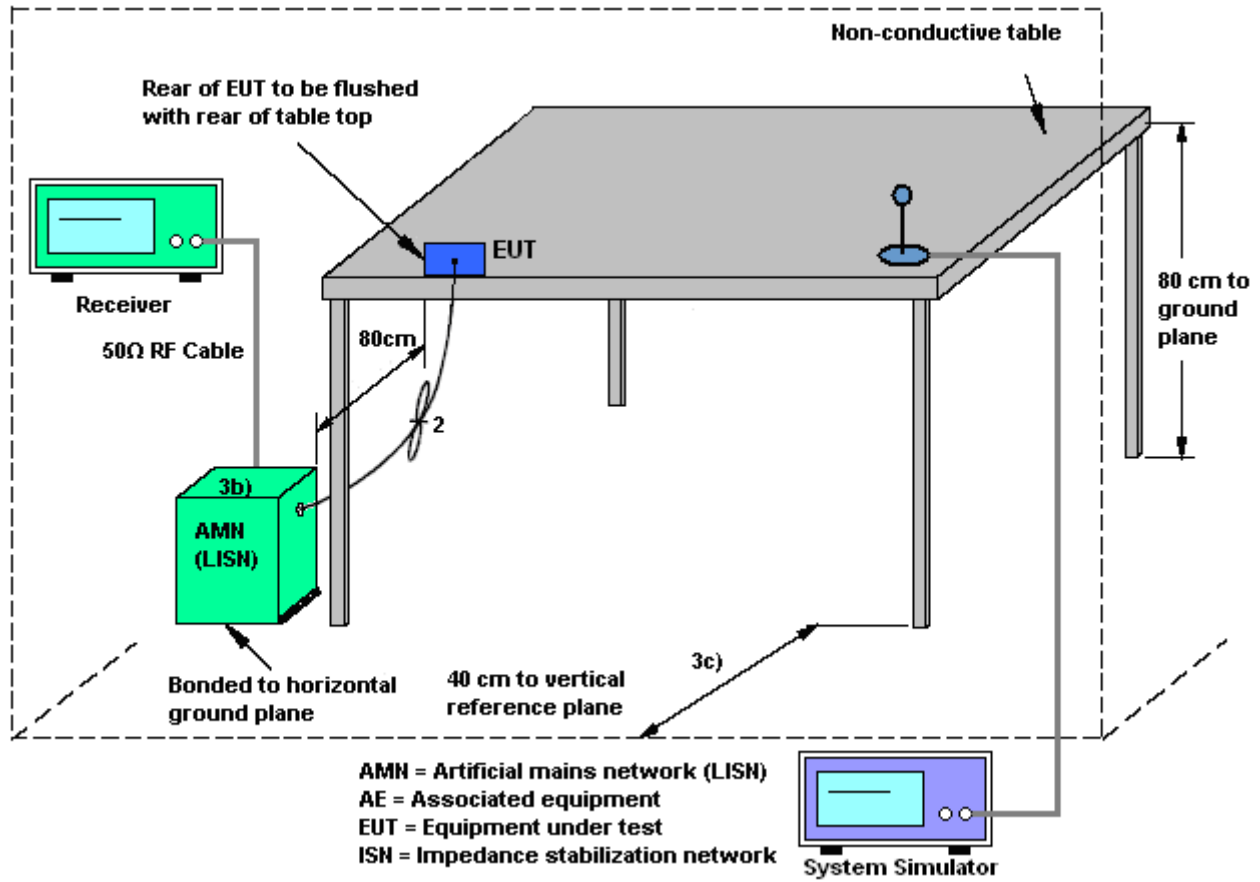



3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 2	Temperature :	22~24°C
Test Engineer :	Eko Guan	Relative Humidity :	37~39%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GPRS850 Idle + Bluetooth Link + WLAN Link + Adapter 2 + Earphone		

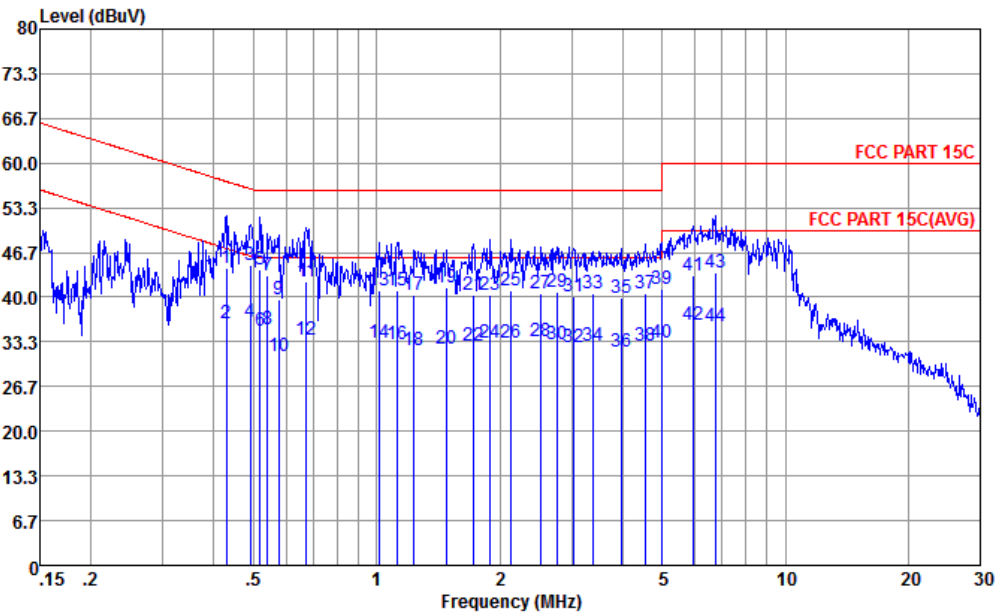


Site : CO01-KS  
 Condition : FCC PART 15C LISN-L20140306 LINE

mode : Mode 2

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.43	44.40	-12.89	57.29	33.50	0.28	10.62	QP
2	0.43	36.20	-11.09	47.29	25.30	0.28	10.62	Average
3	0.49	44.73	-11.41	56.14	33.90	0.21	10.62	QP
4 *	0.49	36.33	-9.81	46.14	25.50	0.21	10.62	Average
5	0.52	44.03	-11.97	56.00	33.20	0.20	10.63	QP
6	0.52	35.03	-10.97	46.00	24.20	0.20	10.63	Average
7	0.54	43.33	-12.67	56.00	32.50	0.20	10.63	QP
8	0.54	35.13	-10.87	46.00	24.30	0.20	10.63	Average
9	0.58	39.73	-16.27	56.00	28.90	0.20	10.63	QP
10	0.58	31.13	-14.87	46.00	20.30	0.20	10.63	Average
11	0.67	42.34	-13.66	56.00	31.50	0.20	10.64	QP
12	0.67	33.64	-12.36	46.00	22.80	0.20	10.64	Average
13	1.02	41.05	-14.95	56.00	30.30	0.10	10.65	QP
14	1.02	33.25	-12.75	46.00	22.50	0.10	10.65	Average
15	1.12	40.96	-15.04	56.00	30.20	0.10	10.66	QP
16	1.12	33.06	-12.94	46.00	22.30	0.10	10.66	Average
17	1.24	40.36	-15.64	56.00	29.60	0.10	10.66	QP
18	1.24	32.16	-13.84	46.00	21.40	0.10	10.66	Average
19	1.48	41.38	-14.62	56.00	30.60	0.10	10.68	QP
20	1.48	32.28	-13.72	46.00	21.50	0.10	10.68	Average
21	1.73	40.39	-15.61	56.00	29.60	0.10	10.69	QP
22	1.73	32.69	-13.31	46.00	21.90	0.10	10.69	Average
23	1.90	40.40	-15.60	56.00	29.60	0.10	10.70	QP
24	1.90	33.30	-12.70	46.00	22.50	0.10	10.70	Average
25	2.13	41.01	-14.99	56.00	30.20	0.10	10.71	QP



Test Mode :	Mode 2	Temperature :	22~24°C
Test Engineer :	Eko Guan	Relative Humidity :	37~39%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GPRS850 Idle + Bluetooth Link + WLAN Link + Adapter 2 + Earphone		

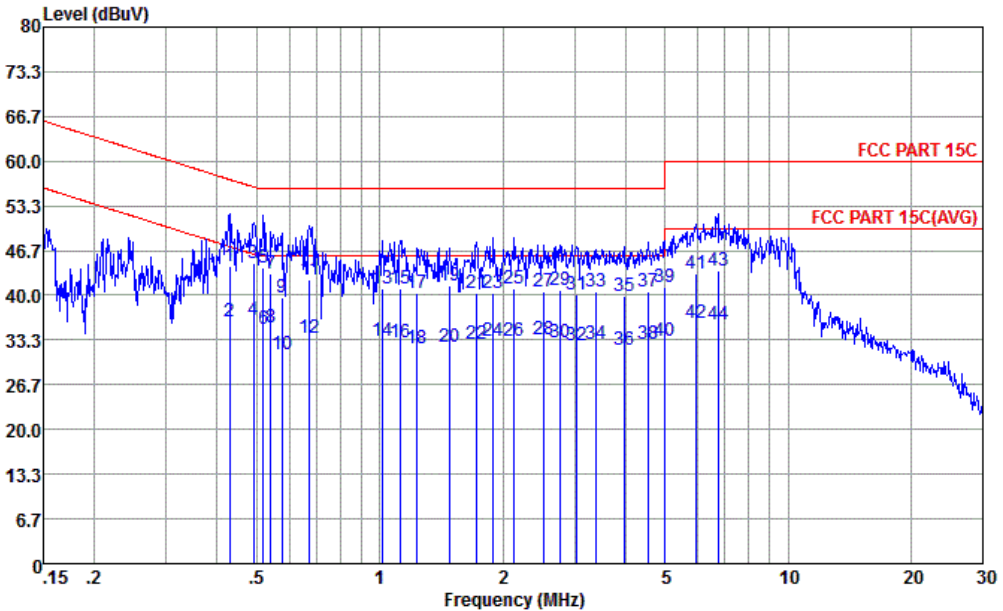


Site : CO01-KS  
 Condition : FCC PART 15C LISN-L20140306 LINE

mode : Mode 2

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
26	2.13	33.11	-12.89	46.00	22.30	0.10	10.71	Average
27	2.53	40.45	-15.55	56.00	29.60	0.12	10.73	QP
28	2.53	33.35	-12.65	46.00	22.60	0.12	10.73	Average
29	2.76	40.78	-15.22	56.00	29.89	0.13	10.76	QP
30	2.76	33.08	-12.92	46.00	22.19	0.13	10.76	Average
31	3.03	40.03	-15.97	56.00	29.10	0.14	10.79	QP
32	3.03	32.53	-13.47	46.00	21.60	0.14	10.79	Average
33	3.38	40.47	-15.53	56.00	29.60	0.16	10.81	QP
34	3.38	32.67	-13.33	46.00	21.70	0.16	10.81	Average
35	3.96	39.81	-16.19	56.00	28.80	0.18	10.83	QP
36	3.96	31.81	-14.19	46.00	20.80	0.18	10.83	Average
37	4.55	40.63	-15.37	56.00	29.60	0.19	10.84	QP
38	4.55	32.83	-13.17	46.00	21.80	0.19	10.84	Average
39	4.98	41.25	-14.75	56.00	30.20	0.20	10.85	QP
40	4.98	33.25	-12.75	46.00	22.20	0.20	10.85	Average
41	5.96	43.28	-16.72	60.00	32.20	0.20	10.88	QP
42	5.96	35.88	-14.12	50.00	24.80	0.20	10.88	Average
43	6.73	43.71	-16.29	60.00	32.60	0.20	10.91	QP
44	6.73	35.61	-14.39	50.00	24.50	0.20	10.91	Average



Test Mode :	Mode 2	Temperature :	22~24°C
Test Engineer :	Eko Guan	Relative Humidity :	37~39%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GPRS850 Idle + Bluetooth Link + WLAN Link + Adapter 2 + Earphone		

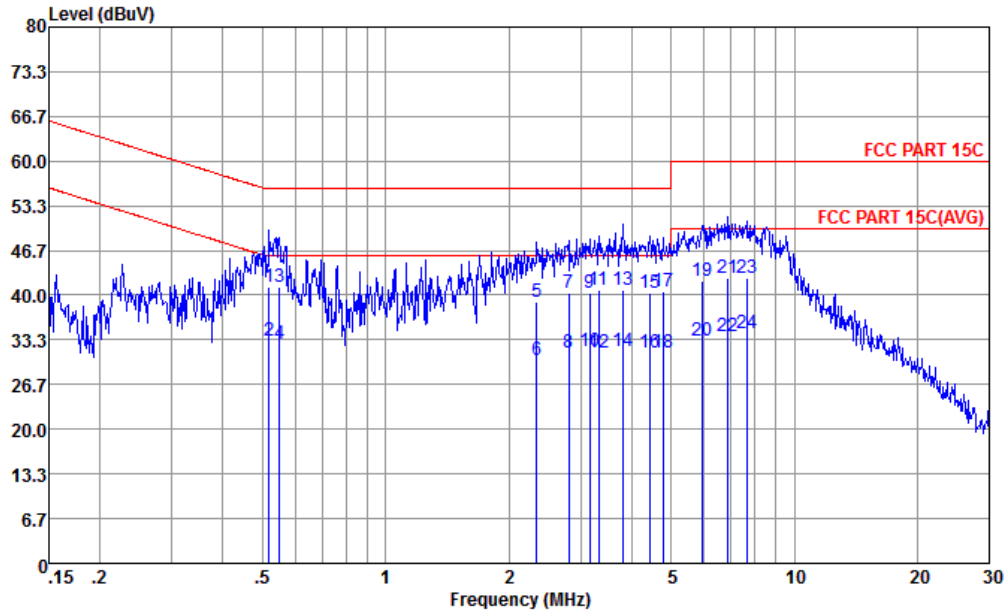

Site : CO01-KS  
 Condition : FCC PART 15C LISN-N20140306 NEUTRAL

mode : Mode 2

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.52	41.12	-14.88	56.00	30.20	0.29	10.63	QP
2 *	0.52	33.12	-12.88	46.00	22.20	0.29	10.63	Average
3	0.55	41.21	-14.79	56.00	30.30	0.28	10.63	QP
4	0.55	32.71	-13.29	46.00	21.80	0.28	10.63	Average
5	2.35	39.03	-16.97	56.00	28.20	0.11	10.72	QP
6	2.35	30.33	-15.67	46.00	19.50	0.11	10.72	Average
7	2.81	40.39	-15.61	56.00	29.50	0.13	10.76	QP
8	2.81	31.49	-14.51	46.00	20.60	0.13	10.76	Average
9	3.16	40.45	-15.55	56.00	29.50	0.15	10.80	QP
10	3.16	31.55	-14.45	46.00	20.60	0.15	10.80	Average
11	3.33	40.77	-15.23	56.00	29.80	0.16	10.81	QP
12	3.33	31.47	-14.53	46.00	20.50	0.16	10.81	Average
13	3.80	40.80	-15.20	56.00	29.80	0.18	10.82	QP
14	3.80	31.60	-14.40	46.00	20.60	0.18	10.82	Average
15	4.43	40.33	-15.67	56.00	29.30	0.19	10.84	QP
16	4.43	31.33	-14.67	46.00	20.30	0.19	10.84	Average
17	4.77	40.54	-15.46	56.00	29.50	0.20	10.84	QP
18	4.77	31.34	-14.66	46.00	20.30	0.20	10.84	Average
19	5.93	42.18	-17.82	60.00	31.10	0.20	10.88	QP
20	5.93	33.28	-16.72	50.00	22.20	0.20	10.88	Average
21	6.88	42.62	-17.38	60.00	31.50	0.20	10.92	QP
22	6.88	33.92	-16.08	50.00	22.80	0.20	10.92	Average
23	7.65	42.63	-17.37	60.00	31.50	0.20	10.93	QP
24	7.65	34.33	-15.67	50.00	23.20	0.20	10.93	Average



## **3.7 Antenna Requirements**

### **3.7.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

### **3.7.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.7.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.





## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Oct. 28, 2014	Feb. 16, 2015~ Feb. 20, 2015	Oct. 27, 2015	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	30MHz~40GHz	Jan. 23, 2015	Feb. 16, 2015~ Feb. 20, 2015	Jan. 22, 2016	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 23, 2015	Feb. 16, 2015~ Feb. 20, 2015	Jan. 22, 2016	Conducted (TH01-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Sep. 10, 2015	Jul. 31, 2016~ Aug. 02, 2016	Sep. 09, 2016	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 20, 2016	Jul. 31, 2016~ Aug. 02, 2016	Jan. 19, 2017	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 20, 2016	Jul. 31, 2016~ Aug. 02, 2016	Jan. 19, 2017	Conducted (TH01-KS)
EMI Test Receiver&SA	Agilent Technologies	N9038A	MY522601 85	20Hz~26.5GHz	May 26, 2015	Jun. 11, 2015	May 25, 2016	Radiation (03CH01-SZ)
Spectrum Analyzer	R&S	FSV40	101041	10kHz~40GHz; Max 30dBm	Sep. 25, 2014	Jun. 11, 2015	Sep. 24, 2015	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	May 06, 2015	Jun. 11, 2015	May 05, 2016	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	23188	30MHz~2GHz	Nov. 07, 2014	Jun. 11, 2015	Nov. 06, 2015	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Oct. 15, 2014	Jun. 11, 2015	Oct. 14, 2015	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz~40GHz	Sep. 04, 2014	Jun. 11, 2015	Sep. 03, 2015	Radiation (03CH01-SZ)
Amplifier	ADVANTEST	BB525C	E9007003	9kHz~3000MHz / 30 dB	Jan. 28, 2015	Jun. 11, 2015	Jan. 27, 2016	Radiation (03CH01-SZ)
Amplifier	Yiai	AV3860B	04030	2GHz~26.5GHz	May 05, 2015	Jun. 11, 2015	May 04, 2016	Radiation (03CH01-SZ)
Amplifier	Agilent Technologies	83017A	MY395013 02	500MHz~26.5GHz	Jan. 28, 2015	Jun. 11, 2015	Jan. 27, 2016	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	616010001 985	N/A	NCR	Jun. 11, 2015	NCR	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Jun. 11, 2015	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Jun. 11, 2015	NCR	Radiation (03CH01-SZ)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz; Max 30dBm	Sep. 10, 2015	Jul. 31, 2016~ Aug. 05, 2016	Sep. 09, 2016	Radiation (03CH03-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY551502 44	10Hz~44GHz	Apr. 22, 2016	Jul. 31, 2016~ Aug. 05, 2016	Apr. 21, 2017	Radiation (03CH03-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Nov. 07, 2015	Jul. 31, 2016~ Aug. 05, 2016	Nov. 06, 2016	Radiation (03CH03-KS)
Bilog Antenna	TeseQ	CBL6112D	35406	25MHz~2GHz	Apr. 16, 2016	Jul. 31, 2016~ Aug. 05, 2016	Apr. 15, 2017	Radiation (03CH03-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-135 6	1GHz~18GHz	Apr. 16, 2016	Jul. 31, 2016~ Aug. 05, 2016	Apr. 15, 2017	Radiation (03CH03-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA1702 49	15GHz ~40GHz	Mar. 03, 2016	Jul. 31, 2016~ Aug. 05, 2016	Mar. 02, 2017	Radiation (03CH03-KS)



SHF-EHF Horn	com-power	AH-840	101070	18Ghz-40Ghz	Oct. 10, 2015	Jul. 31, 2016~ Aug. 05, 2016	Oct. 09, 2016	Radiation (03CH02-KS)
Amplifier	Burgeon	BPA-530	102212	0.01MHz-3000M Hz	Aug. 10, 2015	Jul. 31, 2016~ Aug. 05, 2016	Aug. 09, 2016	Radiation (03CH03-KS)
Amplifier	MITEQ	TTA1840-35- HG	1887435	18~40GHz	Aug. 27, 2015	Jul. 31, 2016~ Aug. 05, 2016	Aug. 26, 2016	Radiation (03CH03-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	1889560	1GHz-18GHz	Aug. 10, 2015	Jul. 31, 2016~ Aug. 05, 2016	Aug. 09, 2016	Radiation (03CH03-KS)
Amplifier	Agilent	8449B	3008A023 70	1GHz~26.5GHz	Oct. 24, 2015	Jul. 31, 2016~ Aug. 05, 2016	Oct. 23, 2016	Radiation (03CH03-KS)
AC Power Source	Chroma	61601	F1040900 04	N/A	NCR	Jul. 31, 2016~ Aug. 05, 2016	NCR	Radiation (03CH03-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jul. 31, 2016~ Aug. 05, 2016	NCR	Radiation (03CH03-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jul. 31, 2016~ Aug. 05, 2016	NCR	Radiation (03CH03-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz	May 04, 2015	Jun. 02, 2015	May 03, 2016	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 25, 2014	Jun. 02, 2015	Oct. 24, 2015	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Oct. 25, 2014	Jun. 02, 2015	Oct. 24, 2015	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000 0811	AC 0V~300V, 45Hz~1000Hz	Oct. 25, 2014	Jun. 02, 2015	Oct. 24, 2015	Conduction (CO01-KS)

NCR: No Calibration Required



## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.3 dB
---	--------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz) for 03CH01-SZ

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.8 dB
---	--------

### Uncertainty of Radiated Emission Measurement (1GHz ~ 18GHz) for 03CH01-SZ

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.8 dB
---	--------

### Uncertainty of Radiated Emission Measurement (18GHz~40GHz) for 03CH01-SZ

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB
---	--------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz) for 03CH03-KS

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.5 dB
---	--------

### Uncertainty of Radiated Emission Measurement (1GHz ~ 18GHz) for 03CH03-KS

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.5 dB
---	--------

### Uncertainty of Radiated Emission Measurement (18GHz~40GHz) for 03CH03-KS

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.6 dB
---	--------



## **Appendix A. Conducted Test Results**

**A1 - DTS Part**

Test Engineer:	Ivan Zhang	Temperature:	24~25	°C
Test Date:	Feb. 16, 2015 ~ Aug. 02, 2016	Relative Humidity:	54~55	%

**TEST RESULTS DATA**  
**6dB and 99% Occupied Bandwidth**

2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
11b	1Mbps	1	1	2412	12.45	9.54	0.50	Pass
11b	1Mbps	1	6	2437	12.35	9.54	0.50	Pass
11b	1Mbps	1	11	2462	12.35	9.54	0.50	Pass
11g	6Mbps	1	1	2412	17.40	15.40	0.50	Pass
11g	6Mbps	1	6	2437	17.35	15.10	0.50	Pass
11g	6Mbps	1	11	2462	17.40	15.46	0.50	Pass
HT20	MCS0	1	1	2412	18.10	16.08	0.50	Pass
HT20	MCS0	1	6	2437	18.20	15.10	0.50	Pass
HT20	MCS0	1	11	2462	18.15	16.06	0.50	Pass
HT40	MCS0	1	3	2422	35.86	35.13	0.50	Pass
HT40	MCS0	1	6	2437	35.96	35.13	0.50	Pass
HT40	MCS0	1	9	2452	36.26	35.33	0.50	Pass

**TEST RESULTS DATA**  
**Peak Power Table**

2.4GHz Band										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
11b	1Mbps	1	1	2412	16.47	30.00	1.90	18.37	36.00	Pass
11b	1Mbps	1	6	2437	17.03	30.00	1.90	18.93	36.00	Pass
11b	1Mbps	1	11	2462	16.53	30.00	1.90	18.43	36.00	Pass
11g	6Mbps	1	1	2412	21.59	30.00	1.90	23.49	36.00	Pass
11g	6Mbps	1	6	2437	21.98	30.00	1.90	23.88	36.00	Pass
11g	6Mbps	1	11	2462	21.64	30.00	1.90	23.54	36.00	Pass
HT20	MCS0	1	1	2412	20.19	30.00	1.90	22.09	36.00	Pass
HT20	MCS0	1	6	2437	20.59	30.00	1.90	22.49	36.00	Pass
HT20	MCS0	1	11	2462	20.32	30.00	1.90	22.22	36.00	Pass
HT40	MCS0	1	3	2422	20.48	30.00	1.90	22.38	36.00	Pass
HT40	MCS0	1	6	2437	20.52	30.00	1.90	22.42	36.00	Pass
HT40	MCS0	1	9	2452	20.47	30.00	1.90	22.37	36.00	Pass

**TEST RESULTS DATA**  
**Average Power Table**  
**(Reporting Only)**

2.4GHz Band						
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
11b	1Mbps	1	1	2412	0.08	13.34
11b	1Mbps	1	6	2437	0.08	13.85
11b	1Mbps	1	11	2462	0.08	13.47
11g	6Mbps	1	1	2412	0.50	12.47
11g	6Mbps	1	6	2437	0.50	12.83
11g	6Mbps	1	11	2462	0.50	12.56
HT20	MCS0	1	1	2412	0.57	10.45
HT20	MCS0	1	6	2437	0.57	10.80
HT20	MCS0	1	11	2462	0.57	10.54
HT40	MCS0	1	3	2422	1.03	10.40
HT40	MCS0	1	6	2437	1.03	10.79
HT40	MCS0	1	9	2452	1.03	10.66



**TEST RESULTS DATA**  
**Peak Power Density**

2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
11b	1Mbps	1	1	2412	-7.46	1.90	8.00	Pass
11b	1Mbps	1	6	2437	-9.93	1.90	8.00	Pass
11b	1Mbps	1	11	2462	-8.29	1.90	8.00	Pass
11g	6Mbps	1	1	2412	-12.27	1.90	8.00	Pass
11g	6Mbps	1	6	2437	-12.63	1.90	8.00	Pass
11g	6Mbps	1	11	2462	-13.52	1.90	8.00	Pass
HT20	MCS0	1	1	2412	-15.13	1.90	8.00	Pass
HT20	MCS0	1	6	2437	-13.94	1.90	8.00	Pass
HT20	MCS0	1	11	2462	-13.87	1.90	8.00	Pass
HT40	MCS0	1	3	2422	-17.36	1.90	8.00	Pass
HT40	MCS0	1	6	2437	-15.27	1.90	8.00	Pass
HT40	MCS0	1	9	2452	-17.04	1.90	8.00	Pass



## Appendix B. Radiated Spurious Emission

15C 2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
802.11b CH 01 2412MHz		2388.48	43.35	-30.65	74	44.01	27.25	9.32	37.23	177	128	P	H
		2389.92	29.92	-24.08	54	30.58	27.25	9.32	37.23	177	128	A	H
	*	2412	104.56	-	-	105.06	27.31	9.43	37.24	177	128	P	H
	*	2412	99.86	-	-	100.36	27.31	9.43	37.24	177	128	A	H
		2343.39	43.56	-30.44	74	44.47	27.07	9.2	37.18	249	95	P	V
		2389.92	29.61	-24.39	54	30.27	27.25	9.32	37.23	249	95	A	V
	*	2412	103.85	-	-	104.35	27.31	9.43	37.24	249	95	P	V
	*	2412	99.13	-	-	99.63	27.31	9.43	37.24	249	95	A	V
802.11b CH 06 2437MHz		2331.96	43.32	-30.68	74	44.27	27.01	9.2	37.16	177	128	P	H
		2374.71	30.91	-23.09	54	31.61	27.19	9.32	37.21	158	107	A	H
	*	2437	104.68	-	-	105.1	27.42	9.43	37.27	177	128	P	H
	*	2437	99.72	-	-	100.14	27.42	9.43	37.27	177	128	A	H
		2484.12	47	-27	74	47.21	27.54	9.55	37.3	177	128	P	H
		2485.12	32.95	-21.05	54	33.16	27.54	9.55	37.3	177	128	A	H
		2368.23	43.21	-30.79	74	44.07	27.13	9.2	37.19	158	107	P	V
		2389.92	29.45	-24.55	54	30.11	27.25	9.32	37.23	158	107	A	V
	*	2437	104.06	-	-	104.48	27.42	9.43	37.27	158	107	P	V
	*	2437	99.17	-	-	99.59	27.42	9.43	37.27	158	107	A	V
		2484.32	47.27	-26.73	74	47.48	27.54	9.55	37.3	158	107	P	V
	2483.76	33	-21	54	33.21	27.54	9.55	37.3	158	107	A	V	



<b>802.11b</b> <b>CH 11</b> <b>2462MHz</b>	*	2462	105.56	-	-	105.82	27.48	9.55	37.29	177	128	P	H
	*	2462	100.24	-	-	100.5	27.48	9.55	37.29	177	128	A	H
		2486.44	46.98	-27.02	74	47.19	27.54	9.55	37.3	177	128	P	H
		2485.28	34.27	-19.73	54	34.48	27.54	9.55	37.3	177	128	A	H
	*	2462	104.83	-	-	105.09	27.48	9.55	37.29	249	96	P	V
	*	2462	99.7	-	-	99.96	27.48	9.55	37.29	249	96	A	V
		2485.48	47.15	-26.85	74	47.36	27.54	9.55	37.3	249	96	P	V
		2485.28	33.94	-20.06	54	34.15	27.54	9.55	37.3	249	96	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**15C 2.4GHz 2400~2483.5MHz  
WIFI 802.11b (Harmonic @ 3m)**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
		( MHz )	( dBμV/m )	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
				( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11b CH 01 2412MHz		4824	41.83	-32.17	74	33.68	31.26	13.37	36.48	105	198	P	H
		4824	43.12	-30.88	74	34.97	31.26	13.37	36.48	105	198	P	V
802.11b CH 06 2437MHz		4874	42.48	-31.52	74	34.09	31.36	13.48	36.45	145	265	P	H
		7311	47.71	-26.29	74	32.78	35.96	16.59	37.62	174	321	P	H
		4874	43.06	-30.94	74	34.67	31.36	13.48	36.45	145	265	P	V
		7311	48.32	-25.68	74	33.39	35.96	16.59	37.62	174	321	P	V
802.11b CH 11 2462MHz		4924	41.41	-32.59	74	32.78	31.46	13.59	36.42	146	347	P	H
		7386	46.38	-27.62	74	31.27	36.08	16.66	37.63	145	274	P	H
		4924	42.01	-31.99	74	33.38	31.46	13.59	36.42	146	347	P	V
		7386	44.93	-29.07	74	29.82	36.08	16.66	37.63	145	274	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**15C 2.4GHz 2400~2483.5MHz  
WIFI 802.11g (Band Edge @ 3m)**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
		( MHz )	( dBμV/m )	( dB )	Limit	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
					Line	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11g CH 01 2412MHz		2389.92	51.12	-22.88	74	51.78	27.25	9.32	37.23	168	129	P	H
		2389.92	34.09	-19.91	54	34.75	27.25	9.32	37.23	168	129	A	H
	*	2412	107.08	-	-	107.58	27.31	9.43	37.24	168	129	P	H
	*	2412	97.43	-	-	97.93	27.31	9.43	37.24	168	129	A	H
		2389.83	47.39	-26.61	74	48.05	27.25	9.32	37.23	170	86	P	V
		2389.92	32.86	-21.14	54	33.52	27.25	9.32	37.23	170	86	A	V
	*	2412	105.63	-	-	106.13	27.31	9.43	37.24	170	86	P	V
	*	2412	96.02	-	-	96.52	27.31	9.43	37.24	170	86	A	V
802.11g CH 06 2437MHz		2353.83	43.17	-30.83	74	44.03	27.13	9.2	37.19	169	129	P	H
		2389.92	30.94	-23.06	54	31.6	27.25	9.32	37.23	169	129	A	H
	*	2437	107.33	-	-	107.75	27.42	9.43	37.27	169	129	P	H
	*	2437	96.75	-	-	97.17	27.42	9.43	37.27	169	129	A	H
		2485.6	53.23	-20.77	74	53.44	27.54	9.55	37.3	169	129	P	H
		2484.12	37.4	-16.6	54	37.61	27.54	9.55	37.3	169	129	A	H
		2364.09	43.17	-30.83	74	44.03	27.13	9.2	37.19	250	91	P	V
		2389.92	30.65	-23.35	54	31.31	27.25	9.32	37.23	250	91	A	V
	*	2437	105.84	-	-	106.26	27.42	9.43	37.27	250	91	P	V
	*	2437	95.93	-	-	96.35	27.42	9.43	37.27	250	91	A	V
		2486.12	52.79	-21.21	74	53	27.54	9.55	37.3	250	91	P	V
		2483.76	37.09	-16.91	54	37.3	27.54	9.55	37.3	250	91	A	V



<b>802.11g CH 11 2462MHz</b>	*	2462	108.37	-	-	108.63	27.48	9.55	37.29	150	120	P	H
	*	2462	97.85	-	-	98.11	27.48	9.55	37.29	150	120	A	H
		2484.16	64.64	-9.36	74	64.85	27.54	9.55	37.3	150	120	P	H
		2483.52	45.1	-8.9	54	45.31	27.54	9.55	37.3	150	120	A	H
	*	2462	106.06	-	-	106.32	27.48	9.55	37.29	228	109	P	V
	*	2462	95.67	-	-	95.93	27.48	9.55	37.29	228	109	A	V
		2483.72	64.82	-9.18	74	65.03	27.54	9.55	37.3	228	109	P	V
		2483.52	43.72	-10.28	54	43.93	27.54	9.55	37.3	228	109	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**15C 2.4GHz 2400~2483.5MHz  
WIFI 802.11g (Harmonic @ 3m)**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
		( MHz )	( dBμV/m )	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
				( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11g CH 01 2412MHz		4824	39.13	-34.87	74	30.98	31.26	13.37	36.48	105	198	P	H
		4824	43.08	-30.92	74	34.93	31.26	13.37	36.48	105	198	P	V
802.11g CH 06 2437MHz		4874	44.81	-29.19	74	36.42	31.36	13.48	36.45	145	265	P	H
		7311	50.79	-23.21	74	35.86	35.96	16.59	37.62	174	321	P	H
		4874	43.35	-30.65	74	34.96	31.36	13.48	36.45	145	265	P	V
		7311	50.13	-23.87	74	35.2	35.96	16.59	37.62	174	321	P	V
802.11g CH 11 2462MHz		4924	43.55	-30.45	74	34.92	31.46	13.59	36.42	146	347	P	H
		7386	46.84	-27.16	74	31.73	36.08	16.66	37.63	145	274	P	H
		4924	42.26	-31.74	74	33.63	31.46	13.59	36.42	146	347	P	V
		7386	46.55	-27.45	74	31.44	36.08	16.66	37.63	145	274	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**15C 2.4GHz 2400~2483.5MHz  
WIFI 802.11n HT20 (Band Edge @ 3m)**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
		( MHz )	( dBμV/m )	( dB )	Limit	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
					Line	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11n HT20 CH 01 2412MHz		2389.74	46.87	-27.13	74	47.53	27.25	9.32	37.23	152	130	P	H
		2389.92	32.84	-21.16	54	33.5	27.25	9.32	37.23	152	130	A	H
	*	2412	104.23	-	-	104.73	27.31	9.43	37.24	152	130	P	H
	*	2412	94.26	-	-	94.76	27.31	9.43	37.24	152	130	A	H
		2389.92	45.89	-28.11	74	46.55	27.25	9.32	37.23	248	114	P	V
		2389.92	31.71	-22.29	54	32.37	27.25	9.32	37.23	248	114	A	V
	*	2412	103.65	-	-	104.15	27.31	9.43	37.24	248	114	P	V
	*	2412	93.56	-	-	94.06	27.31	9.43	37.24	248	114	A	V
802.11n HT20 CH 06 2437MHz		2384.97	43.03	-30.97	74	43.73	27.19	9.32	37.21	152	130	P	H
		2389.92	31.01	-22.99	54	31.67	27.25	9.32	37.23	152	130	A	H
	*	2437	105.05	-	-	105.47	27.42	9.43	37.27	152	130	P	H
	*	2437	95.39	-	-	95.81	27.42	9.43	37.27	152	130	A	H
		2483.56	51.64	-22.36	74	51.85	27.54	9.55	37.3	152	130	P	H
		2483.52	37.86	-16.14	54	38.07	27.54	9.55	37.3	152	130	A	H
		2383.17	43.28	-30.72	74	43.98	27.19	9.32	37.21	248	114	P	V
		2389.92	30.55	-23.45	54	31.21	27.25	9.32	37.23	248	114	A	V
	*	2437	104.1	-	-	104.52	27.42	9.43	37.27	248	114	P	V
	*	2437	94.29	-	-	94.71	27.42	9.43	37.27	248	114	A	V
		2485.88	50.56	-23.44	74	50.77	27.54	9.55	37.3	248	114	P	V
	2483.52	36.92	-17.08	54	37.13	27.54	9.55	37.3	248	114	A	V	





<b>802.11n</b> <b>HT20</b> <b>CH 11</b> <b>2462MHz</b>	*	2462	105.18	-	-	105.44	27.48	9.55	37.29	150	132	P	H
	*	2462	95.27	-	-	95.53	27.48	9.55	37.29	150	132	A	H
		2483.68	62.16	-11.84	74	62.37	27.54	9.55	37.3	150	132	P	H
		2483.52	42.21	-11.79	54	42.42	27.54	9.55	37.3	150	132	A	H
	*	2462	103.61	-	-	103.87	27.48	9.55	37.29	248	114	P	V
	*	2462	93.61	-	-	93.87	27.48	9.55	37.29	248	114	A	V
		2483.56	60.92	-13.08	74	61.13	27.54	9.55	37.3	248	114	P	V
		2483.52	41.83	-12.17	54	42.04	27.54	9.55	37.3	248	114	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**15C 2.4GHz 2400~2483.5MHz**  
**WIFI 802.11n HT20 (Harmonic @ 3m)**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
		( MHz )	( dBμV/m )	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
				( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11n HT20 CH 01 2412MHz		4824	38.85	-35.15	74	30.7	31.26	13.37	36.48	105	198	P	H
		4824	42.44	-31.56	74	34.29	31.26	13.37	36.48	105	198	P	V
802.11n HT20 CH 06 2437MHz		4874	38.79	-35.21	74	30.4	31.36	13.48	36.45	145	265	P	H
		7311	44.2	-29.8	74	29.27	35.96	16.59	37.62	174	321	P	H
		4874	38.74	-35.26	74	30.35	31.36	13.48	36.45	145	265	P	V
		7311	44.88	-29.12	74	29.95	35.96	16.59	37.62	174	321	P	V
802.11n HT20 CH 11 2462MHz		4924	43.97	-30.03	74	35.34	31.46	13.59	36.42	146	347	P	H
		7386	47.04	-26.96	74	31.93	36.08	16.66	37.63	145	274	P	H
		4924	39.91	-34.09	74	31.28	31.46	13.59	36.42	146	347	P	V
		7386	43.69	-30.31	74	28.58	36.08	16.66	37.63	145	274	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15C 2.4GHz 2400~2483.5MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
802.11n HT40 CH 03 2422MHz		2389.3	63.79	-10.21	74	68.34	27	5.47	37.02	100	237	P	H
	!	2389.56	48.62	-5.38	54	53.17	27	5.47	37.02	100	237	A	H
	*	2427.304	101	-	-	105.25	27.26	5.48	36.99	100	237	P	H
	*	2428.306	93.15	-	-	97.4	27.26	5.48	36.99	100	237	A	H
		2484.7	52.32	-21.68	74	56.11	27.64	5.51	36.94	100	237	P	H
		2483.74	42.55	-11.45	54	46.34	27.64	5.51	36.94	100	237	A	H
		2389.56	64.9	-9.1	74	69.45	27	5.47	37.02	397	281	P	V
	!	2389.82	49.57	-4.43	54	54.12	27	5.47	37.02	397	281	A	V
	*	2428.808	100.59	-	-	104.84	27.26	5.48	36.99	397	281	P	V
	*	2428.056	92.75	-	-	97	27.26	5.48	36.99	397	281	A	V
		2488.72	51.89	-22.11	74	55.53	27.77	5.52	36.93	397	281	P	V
		2483.56	42.31	-11.69	54	46.1	27.64	5.51	36.94	397	281	A	V
802.11n HT40 CH 06 2437MHz		2389.04	52.44	-21.56	74	56.99	27	5.47	37.02	100	240	P	H
		2389.82	43.2	-10.8	54	47.75	27	5.47	37.02	100	240	A	H
	*	2432.398	102.86	-	-	107.11	27.26	5.48	36.99	100	240	P	H
	*	2430.06	94.79	-	-	99.04	27.26	5.48	36.99	100	240	A	H
		2483.5	52.92	-21.08	74	56.71	27.64	5.51	36.94	100	240	P	H
		2483.56	43.81	-10.19	54	47.6	27.64	5.51	36.94	100	240	A	H
		2389.3	52.56	-21.44	74	57.11	27	5.47	37.02	400	276	P	V
		2389.95	46.09	-7.91	54	50.64	27	5.47	37.02	400	276	A	V
	*	2427.471	101.57	-	-	105.82	27.26	5.48	36.99	400	276	P	V
	*	2430.394	93.6	-	-	97.85	27.26	5.48	36.99	400	276	A	V
		2484.58	52.47	-21.53	74	56.26	27.64	5.51	36.94	400	276	P	V
		2483.86	42.94	-11.06	54	46.73	27.64	5.51	36.94	400	276	A	V



<b>802.11n</b>  <b>HT40</b>  <b>CH 09</b>  <b>2452MHz</b>		2389.43	50.75	-23.25	74	55.3	27	5.47	37.02	100	255	P	H
		2389.95	42.06	-11.94	54	46.61	27	5.47	37.02	100	255	A	H
	*	2463.376	101.72	-	-	105.67	27.51	5.5	36.96	100	255	P	H
	*	2461.874	94.09	-	-	98.04	27.51	5.5	36.96	100	255	A	H
		2483.5	65.7	-8.3	74	69.49	27.64	5.51	36.94	100	255	P	H
	!	2483.5	49.67	-4.33	54	53.46	27.64	5.51	36.94	100	255	A	H
		2349.39	51.36	-22.64	74	56.1	26.86	5.41	37.01	397	275	P	V
		2389.3	41.34	-12.66	54	45.89	27	5.47	37.02	397	275	A	V
	*	2462.959	100.73	-	-	104.68	27.51	5.5	36.96	397	275	P	V
	*	2462.041	93.11	-	-	97.06	27.51	5.5	36.96	397	275	A	V
		2483.5	66.12	-7.88	74	69.91	27.64	5.51	36.94	397	275	P	V
	!	2483.5	49.27	-4.73	54	53.06	27.64	5.51	36.94	397	275	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**15C 2.4GHz 2400~2483.5MHz  
WIFI 802.11n HT40 (Harmonic @ 3m)**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	Avg.	
												(P/A)	(H/V)
802.11n HT40 CH 03 2422MHz		4842	36.78	-37.22	74	58.83	31.53	5.72	59.3	100	360	P	H
		4842	36.29	-37.71	74	58.34	31.53	5.72	59.3	100	360	P	V
		7266	39.34	-34.66	74	54.79	33.93	9	58.38	100	360	P	H
		7266	38.7	-35.3	74	54.15	33.93	9	58.38	100	360	P	V
802.11n HT40 CH 06 2437MHz		4872	37.24	-36.76	74	59.26	31.59	5.53	59.14	100	360	P	H
		4872	36.55	-37.45	74	58.57	31.59	5.53	59.14	100	360	P	V
		7308	38.6	-35.4	74	54.05	34.03	9.07	58.55	100	360	P	H
		7308	38.6	-35.4	74	54.05	34.03	9.07	58.55	100	360	P	V
802.11n HT40 CH 09 2452MHz		4902	36.08	-37.92	74	58.08	31.64	5.34	58.98	100	360	P	H
		4902	35.32	-38.68	74	57.32	31.64	5.34	58.98	100	360	P	V
		7356	37.33	-36.67	74	52.77	34.19	9.18	58.81	100	360	P	H
		7356	37.81	-36.19	74	53.25	34.19	9.18	58.81	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**15C Emission below 1GHz  
2.4GHz WIFI 802.11n HT40 (LF)**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
2.4GHz 802.11n HT40 LF		108.57	35.36	-8.14	43.5	55.22	12.11	1.38	33.35	-	-	P	H
		154.16	40.19	-3.31	43.5	60.79	11.1	1.53	33.23	100	360	P	H
		183.26	39.61	-3.89	43.5	60.76	10.46	1.57	33.18	-	-	P	H
		236.61	40.66	-5.34	46	60.5	11.47	1.8	33.11	-	-	P	H
		294.81	36.21	-9.79	46	53.7	13.62	1.94	33.05	-	-	P	H
		355.92	37.18	-8.82	46	52.71	15.32	2.04	32.89	-	-	P	H
		30	35.59	-4.41	40	49.75	18.2	1	33.36	100	250	P	V
		107.6	34.78	-8.72	43.5	54.62	12.13	1.38	33.35	-	-	P	V
		154.16	34.21	-9.29	43.5	54.81	11.1	1.53	33.23	-	-	P	V
		184.23	38.41	-5.09	43.5	59.58	10.44	1.57	33.18	-	-	P	V
		233.7	35.63	-10.37	46	55.59	11.36	1.8	33.12	-	-	P	V
	294.81	37.68	-8.32	46	55.17	13.62	1.94	33.05	-	-	P	V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency per 15.209(c).
!	Test result is <b>over limit</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

- Level(dBμV/m) =  
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

- Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
- Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**

- Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
- Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)

**Both peak and average measured complies with the limit line, so test result is “PASS”.**






### Appendix C. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	98.13	-	-	10Hz
802.11g	89.17	1.40	0.71	1kHz
2.4GHz 802.11n HT20	87.77	1.31	0.77	1kHz
2.4GHz 802.11n HT40	78.85	0.64	1.57	3kHz

#### 802.11b

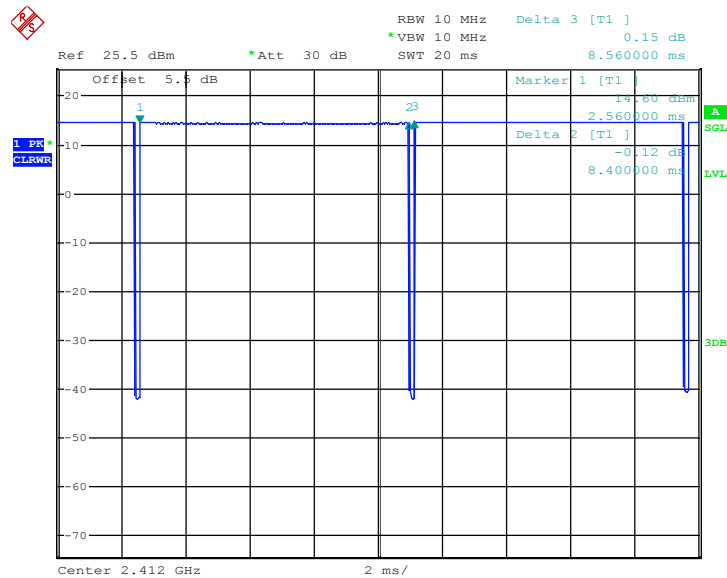




802.11g

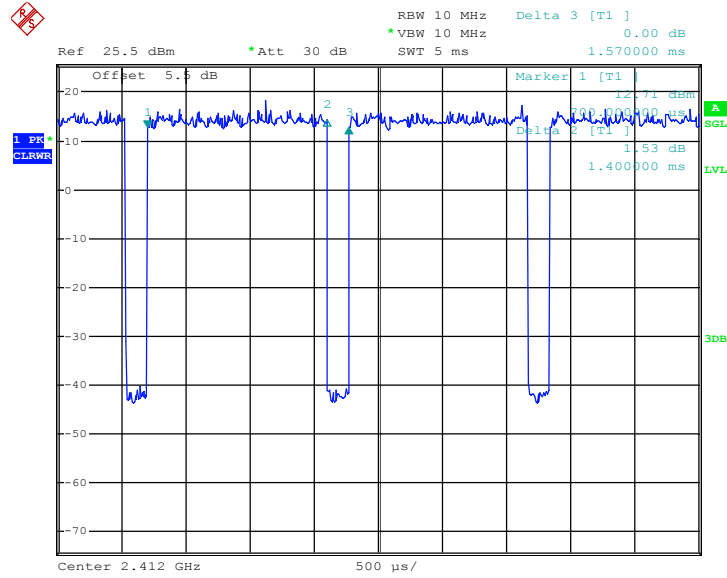

802.11n HT20

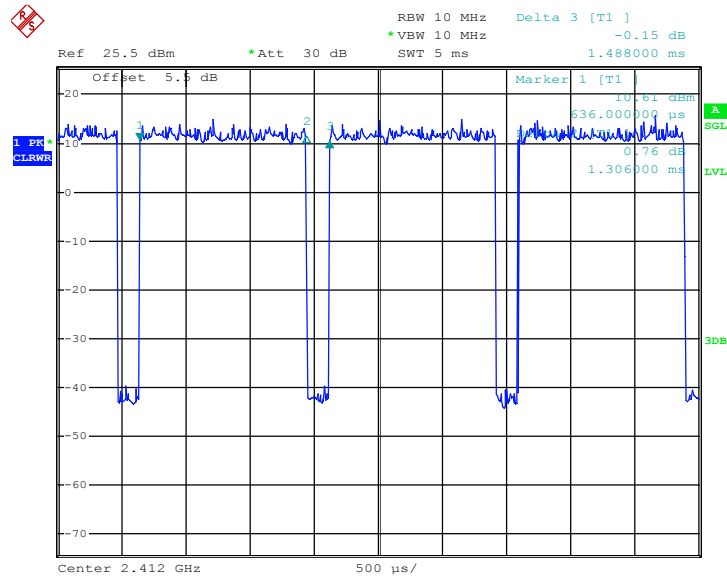



802.11n HT40

