



# FCC RF Test Report

**APPLICANT** : Lenovo (Shanghai) Electronics Technology Co., Ltd.  
**EQUIPMENT** : Portable Tablet Computer  
**BRAND NAME** : Lenovo  
**MODEL NAME** : TB310FU  
**FCC ID** : O57TB310FU  
**STANDARD** : FCC Part 15 Subpart E §15.407  
**CLASSIFICATION** : (NII) Unlicensed National Information Infrastructure  
**TEST DATE(S)** : Oct. 10, 2022 ~ Oct. 12, 2022

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

This report contains data that were produced under subcontract by Sporton International Inc. (Shenzhen)

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

**Sporton International Inc. (Kunshan)**

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300  
People's Republic of China**



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION ..... 5**

1.1 Applicant ..... 5

1.2 Manufacturer..... 5

1.3 Product Feature of Equipment Under Test..... 5

1.4 Product Specification of Equipment Under Test..... 6

1.5 Modification of EUT ..... 7

1.6 Testing Location ..... 8

1.7 Test Software..... 8

1.8 Applicable Standards..... 9

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 10**

2.1 Carrier Frequency and Channel ..... 10

2.2 Test Mode..... 12

2.3 Connection Diagram of Test System..... 14

2.4 Support Unit used in test configuration and system ..... 15

2.5 EUT Operation Test Setup ..... 15

2.6 Measurement Results Explanation Example..... 15

**3 TEST RESULT..... 16**

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement ..... 16

3.2 Maximum Conducted Output Power Measurement ..... 18

3.3 Power Spectral Density Measurement ..... 20

3.4 Unwanted Emissions Measurement ..... 23

3.5 AC Conducted Emission Measurement..... 28

3.6 Antenna Requirements ..... 30

**4 LIST OF MEASURING EQUIPMENT ..... 31**

**5 UNCERTAINTY OF EVALUATION ..... 32**

**APPENDIX A. CONDUCTED TEST RESULTS**

**APPENDIX B. AC CONDUCTED EMISSION TEST RESULT**

**APPENDIX C. RADIATED SPURIOUS EMISSION**

**APPENDIX D. DUTY CYCLE PLOTS**

**APPENDIX E. SETUP PHOTOGRAPHS**





### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit for U-NII-1/2A/2C	Limit for U-NII-3	Result	Remark
3.1	2.1049 & 15.403(i)	6dB, 26dB & 99% Bandwidth	-	> 500kHz	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power/EIRP	≤ 24 dBm	≤ 30 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 11 dBm/MHz	≤ 30 dBm/500kHz	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b) & 15.209(a)	15.407(b)(4)(i) & 15.209(a)	Pass	Under limit 3.03 dB at 5726.60 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	15.207(a)	Pass	Under limit 7.03 dB at 0.708 MHz
3.6	15.203 & 15.407(a)	Antenna Requirement	15.203 & 15.407(a)	15.203 & 15.407(a)	Pass	-

**Declaration of Conformity:**  
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

**Comments and Explanations:**  
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



# 1 General Description

## 1.1 Applicant

**Lenovo (Shanghai) Electronics Technology Co., Ltd.**

Section 304-305, Building No. 4, # 222, Meiyue Road, China (Shanghai) Pilot Free Trade Zone

## 1.2 Manufacturer

**Lenovo PC HK Limited**

23/F, Lincoln House, Taikoo Place 979 King's Road, Quarry Bay, Hong Kong, China

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Portable Tablet Computer
Brand Name	Lenovo
Model Name	TB310FU
FCC ID	O57TB310FU
HW Version	Lenovo Tablet TB310FU
SW Version	TB310FU_RF01_220917
EUT Stage	Identical Prototype

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



### 1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
<b>Tx/Rx Frequency Range</b>	5180 MHz ~ 5240 MHz, 5260 MHz ~ 5320 MHz 5500 MHz ~ 5720 MHz, 5745 MHz ~ 5825 MHz
<b>Maximum Output Power to Antenna</b>	<p><b>&lt;5180 MHz ~ 5240 MHz&gt;</b>  802.11a : 17.31 dBm / 0.0538 W  802.11n HT20 : 15.55 dBm / 0.0359 W  802.11n HT40 : 15.53 dBm / 0.0357 W  802.11ac VHT20: 15.50 dBm / 0.0355 W  802.11ac VHT40: 14.93 dBm / 0.0311 W  802.11ac VHT80: 11.20 dBm / 0.0132 W</p> <p><b>&lt;5260 MHz ~ 5320 MHz&gt;</b>  802.11a : 17.46 dBm / 0.0557 W  802.11n HT20 : 15.52 dBm / 0.0356 W  802.11n HT40 : 15.57 dBm / 0.0361 W  802.11ac VHT20: 15.48 dBm / 0.0353 W  802.11ac VHT40: 15.03 dBm / 0.0318 W  802.11ac VHT80: 10.84 dBm / 0.0121 W</p> <p><b>&lt;5500 MHz ~ 5720 MHz &gt;</b>  802.11a : 17.49 dBm / 0.0561 W  802.11n HT20 : 15.47 dBm / 0.0352 W  802.11n HT40 : 15.55 dBm / 0.0359 W  802.11ac VHT20: 15.43 dBm / 0.0349 W  802.11ac VHT40: 15.06 dBm / 0.0321 W  802.11ac VHT80: 14.01 dBm / 0.0252 W</p> <p><b>&lt;5745 MHz ~ 5825 MHz&gt;</b>  802.11a : 17.41 dBm / 0.0551 W  802.11n HT20 : 15.51 dBm / 0.0356 W  802.11n HT40 : 15.52 dBm / 0.0356 W  802.11ac VHT20: 15.44 dBm / 0.0350 W  802.11ac VHT40: 14.99 dBm / 0.0316 W  802.11ac VHT80: 13.90 dBm / 0.0245 W</p>
<b>99% Occupied Bandwidth</b>	<p><b>&lt;5180 MHz ~ 5240 MHz&gt;</b>  802.11a : 17.383 MHz  802.11n HT20: 18.222 MHz  802.11n HT40: 36.763 MHz  802.11ac VHT80: 75.604 MHz</p> <p><b>&lt;5260 MHz ~ 5320 MHz&gt;</b>  802.11a : 17.423 MHz  802.11n HT20: 18.222 MHz  802.11n HT40: 36.683 MHz  802.11ac VHT80: 75.604 MHz</p> <p><b>&lt;5500 MHz ~ 5720 MHz&gt;</b>  802.11a : 17.383 MHz  802.11n HT20: 18.182 MHz  802.11n HT40: 36.603 MHz  802.11ac VHT80: 75.764 MHz</p> <p><b>&lt;5745 MHz ~ 5825 MHz&gt;</b>  802.11a : 17.463 MHz  802.11n HT20: 18.222 MHz  802.11n HT40: 36.763 MHz  802.11ac VHT80: 75.445 MHz</p>



<b>Antenna Type / Gain</b>	<p>&lt;5180 MHz ~ 5240 MHz&gt;  PIFA Antenna with gain -4.00 dBi</p> <p>&lt;5260 MHz ~ 5320 MHz&gt;  PIFA Antenna with gain -4.50 dBi</p> <p>&lt;5500 MHz ~ 5720 MHz&gt;  PIFA Antenna with gain -4.50 dBi</p> <p>&lt;5745 MHz ~ 5825 MHz&gt;  PIFA Antenna with gain -5.00 dBi</p>
<b>Type of Modulation</b>	<p>802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)</p> <p>802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)</p>

**Note:**

For 802.11n HT20 / ac VHT20 and 802.11n HT40 / ac VHT40 mode, the whole testing has assessed only 802.11n HT20 / HT40 by referring to their higher output power.

### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.



### 1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

<b>Test Firm</b>	Sporton International Inc. (Kunshan)		
<b>Test Site Location</b>	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	CO01-KS TH01-KS	CN1257	314309

Sporton International Inc. (Shenzhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

<b>Test Firm</b>	Sporton International Inc. (Shenzhen)		
<b>Test Site Location</b>	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City Guangdong Province China 518103 TEL: +86-755-33202398		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	03CH01-SZ	CN1256	421272

Test data subcontracted: conducted test case for RSE in section 3.4 of this report.

### 1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	CO01-KS	AUDIX	E3	6.2009-8-24
2.	03CH01-SZ	AUDIX	E3	6.2009-8-24





## 1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ ANSI C63.10-2013

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

## 2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.
  
- b. AC power line Conducted Emission was tested under maximum output power.

### 2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5180-5240 MHz U-NII-1	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240
	42 <sup>#</sup>	5210	-	-

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5260-5320 MHz U-NII-2A	52	5260	60	5300
	54*	5270	62*	5310
	56	5280	64	5320
	58 <sup>#</sup>	5290	-	-

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5500-5720MHz U-NII-2C	100	5500	112	5560
	102*	5510	116	5580
	104	5520	132	5660
	106 <sup>#</sup>	5530	134*	5670
	108	5540	136	5680
	110*	5550	140	5700



Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5745-5825 MHz U-NII-3	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155 <sup>#</sup>	5775	165	5825

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
TDWR Channel	118*	5590	124	5620
	120	5600	126*	5630
	122 <sup>#</sup>	5610	128	5640

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
Straddle Channel	138 <sup>#</sup>	5690	144	5720
	142*	5710	-	-

Note:

1. The above Frequency and Channel in "\*" were 802.11n HT40 and 802.11ac VHT40.
2. The above Frequency and Channel in "<sup>#</sup>" were 802.11ac VHT80.



## 2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

### Single Mode

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20 (Cover VHT20)	MCS0
802.11n HT40 (Cover VHT40)	MCS0
802.11ac VHT80	MCS0

<b>AC Conducted Emission</b>	Mode 1 : Bluetooth Link+ WLAN Link(5G)+ USB Cable2(Charging from Adapter2) + Earphone + Sample1
<b>Remark:</b> For Radiated Test Cases, The tests were performance with Adapter, Earphone and USB Cable. Only the worst test data show in the report.	



Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		5180-5240 MHz	5260-5320 MHz	5500-5720MHz	5745-5825 MHz
		802.11a	802.11a	802.11a	802.11a
L	Low	36	52	100	149
M	Middle	44	60	116	157
H	High	48	64	140	165
Straddle		-	-	144	-


Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		5180-5240 MHz	5260-5320 MHz	5500-5720MHz	5745-5825 MHz
		802.11n HT20	802.11n HT20	802.11n HT20	802.11n HT20
L	Low	36	52	100	149
M	Middle	44	60	116	157
H	High	48	64	140	165
Straddle		-	-	144	-

Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		5180-5240 MHz	5260-5320 MHz	5500-5720MHz	5745-5825 MHz
		802.11n HT40	802.11n HT40	802.11n HT40	802.11n HT40
L	Low	38	54	102	151
M	Middle	-	-	110	-
H	High	46	62	134	159
Straddle		-	-	142	-


Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		5180-5240 MHz	5260-5320 MHz	5500-5720MHz	5745-5825 MHz
		802.11ac VHT80	802.11ac VHT80	802.11ac VHT80	802.11ac VHT80
L	Low	-	-	106	-
M	Middle	42	58	-	155
H	High	-	-	122	-
Straddle		-	-	138	-

## 2.3 Connection Diagram of Test System

AC Conducted Emission:

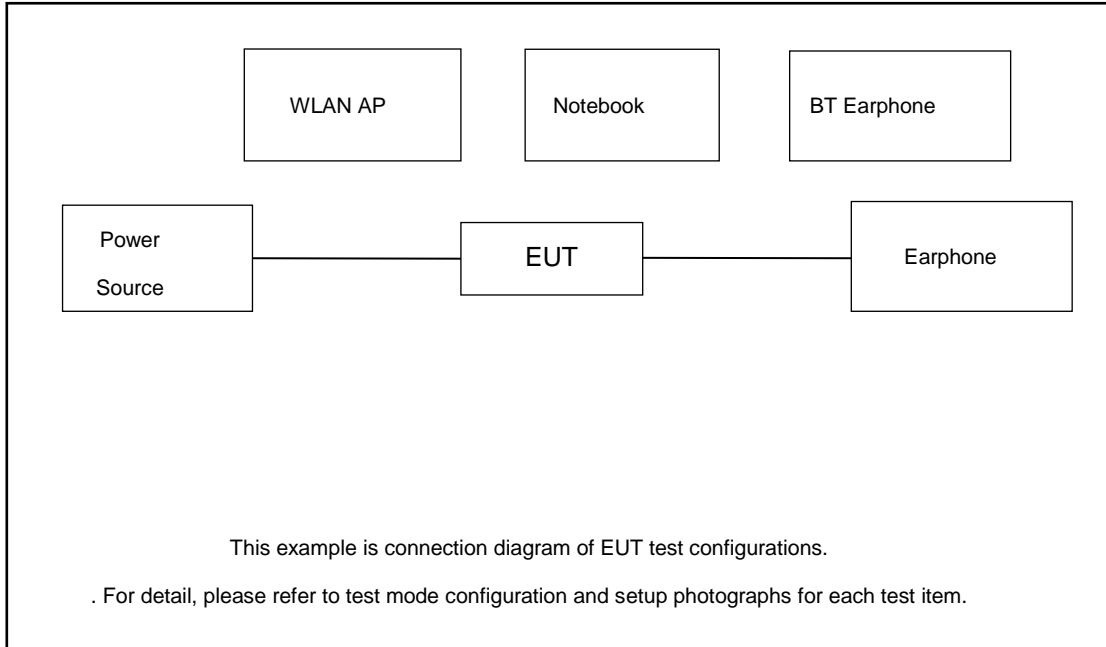

Radiated Emission:

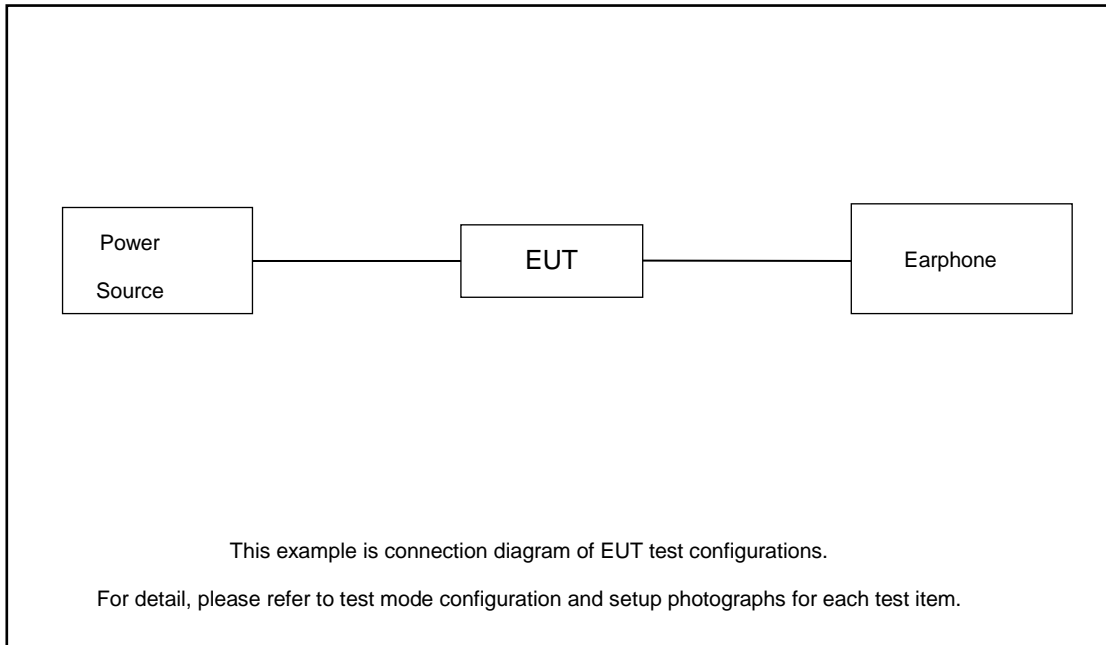

## 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded, 1.8m
2.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	shielded cable DC O/P 1.8m Unshielded AC I/P cable 1.8m
3.	Bluetooth Earphone	Lenovo	LBH308	N/A	N/A	N/A
4.	SD Card	Kingston	8GB	N/A	N/A	N/A
5.	Earphone	Eimuse	E-500MV	Fcc DoC	Shielded, 2.2m	N/A

## 2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

## 2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 6.75 dB and 10dB attenuator.

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\
 &= 6.75 + 10 = 16.75 \text{ (dB)}
 \end{aligned}$$



### 3 Test Result

#### 3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

##### 3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.

##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


##### 3.1.3 Test Procedures

- The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

<input checked="" type="checkbox"/>	Section C) Bandwidth Measurement 1. Emission Bandwidth (EBW) and 99% OBW
	<ol style="list-style-type: none"> <li>Set RBW = approximately 1% of the emission bandwidth.</li> <li>Set the VBW &gt; RBW.</li> <li>Detector = Peak.</li> <li>Trace mode = max hold</li> <li>Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.</li> <li>For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1%~5% of OBW, and set the Video bandwidth (VBW) ≥ 3 * RBW.</li> <li>Measure and record the results in the test report.</li> </ol>
<input checked="" type="checkbox"/>	Section C) Bandwidth Measurement 2. Minimum Emission Bandwidth for the band 5.725 - 5.85 GHz
	<ol style="list-style-type: none"> <li>Set RBW = 100kHz.</li> <li>Set the VBW ≥ 3 x RBW.</li> <li>Detector = Peak.</li> <li>Trace mode = max hold</li> <li>Measure the maximum width of the emission that is 6 dB down from the peak of the emission.</li> <li>Measure and record the results in the test report.</li> </ol>



### 3.1.4 Test Setup

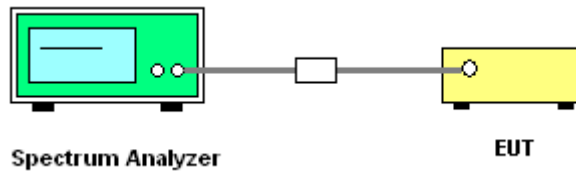

### 3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.



## 3.2 Maximum Conducted Output Power Measurement

### 3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW.

For the 5.25–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz.

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.2.3 Test Procedures


The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor,  $10 \log(1/x)$ , where  $x$  is the duty cycle.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

### 3.2.4 Test Setup

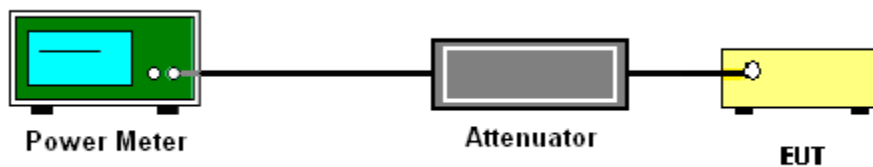

### 3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

For the 5.25–5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.



### 3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04.  
Section F) Maximum power spectral density.

#### # Method SA-2 #

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz.
- Set VBW  $\geq$  3 MHz.
- Number of points in sweep  $\geq$  2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add  $10 \log(1/x)$ , where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add  $10 \log(1/0.25) = 6$  dB if the duty cycle is 25 percent.

#### For devices operating in the band 5.725 - 5.85 GHz


#### # Method SA-2 #

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 500 kHz.
- Set VBW  $\geq$  1 MHz.
- Number of points in sweep  $\geq$  2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add  $10 \log(1/x)$ , where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add  $10 \log(1/0.25) = 6$  dB if the duty cycle is 25 percent.

1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.

### 3.3.4 Test Setup

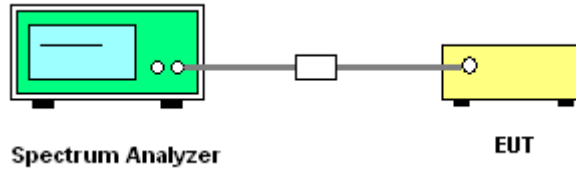

### 3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.



### 3.4 Unwanted Emissions Measurement

This section as specified in FCC Part 15.407(b) is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement. The unwanted emissions shall comply with 15.407(b)(1) to (6), and restricted bands per FCC Part 15.205.

#### 3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of  $-27$  dBm/MHz.

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of  $-27$  dBm/MHz. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of  $-27$  dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5600 MHz and 5650-5725 MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725 MHz band shall not exceed an EIRP of  $-27$  dBm/MHz.

- (2) For transmitters operating in the 5.725-5.85 GHz band:  
15.407(b)(4)(i) All emissions shall be limited to a level of  $-27$  dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to  $10$  dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of  $15.6$  dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of  $27$  dBm/MHz at the band edge.



(3) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

(4) EIRP (dBm)	Field Strength at 3m (dBµV/m)
- 27	68.3

Note: The following formula is used to convert the EIRP to field strength.

$$EIRP = E_{Meas} + 20\log (d_{Meas}) -104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E<sub>Meas</sub> is the field strength of the emission at the measurement distance, in dBµV/m

d<sub>Meas</sub> is the measurement distance, in m

(4) ANSI C63.10-2013 clause 12.7.3 note 97

As specified by regulatory requirements, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit. However, an out-of-band emission that complies with both the average and peak general regulatory limits is not required to satisfy the peak emission limit.

### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.






### 3.4.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04. Section G) Unwanted emissions measurement.
  - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
    - RBW = 120 kHz
    - VBW = 300 kHz
    - Detector = Peak
    - Trace mode = max hold
  - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
    - RBW = 1 MHz
    - VBW  $\geq$  3 MHz
    - Detector = Peak
    - Sweep time = auto
    - Trace mode = max hold
  - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
    - RBW = 1 MHz
    - VBW = 10 Hz, when duty cycle is no less than 98 percent.
    - VBW  $\geq$  1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

### 3.4.4 Test Setup


For radiated emissions below 30MHz

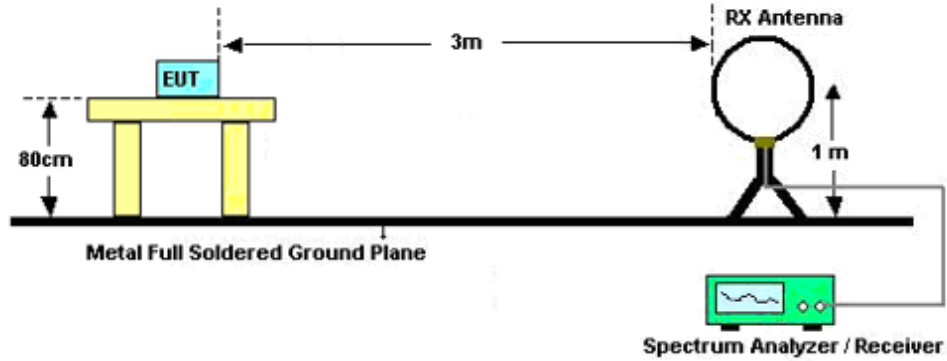

For radiated emissions from 30MHz to 1GHz

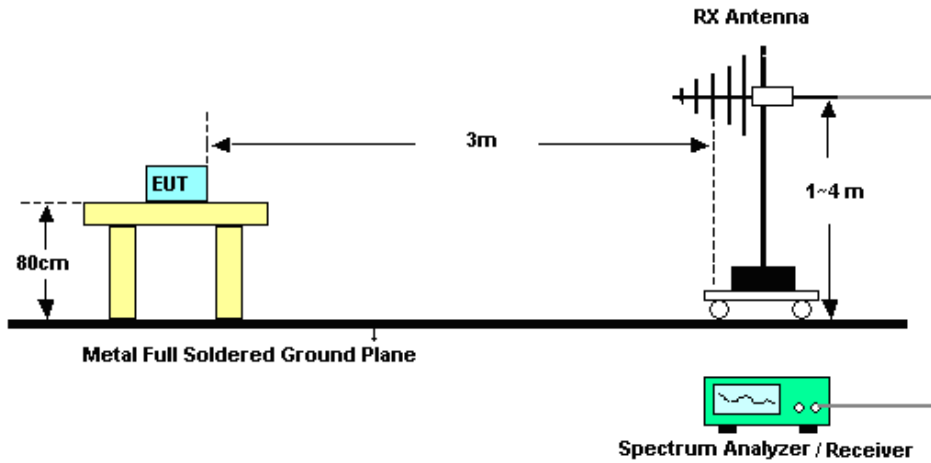

For radiated emissions above 1GHz

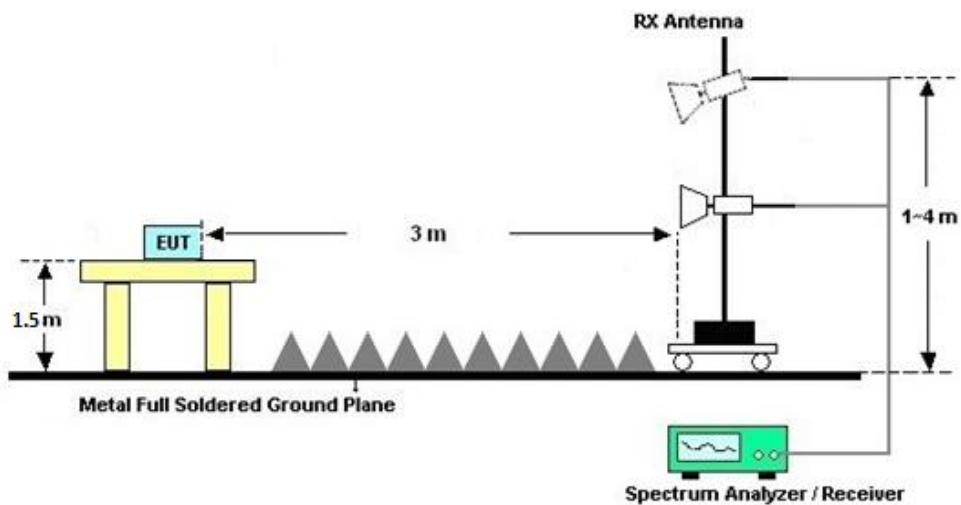



### **3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

### **3.4.6 Test Result of Radiated Spurious at Band Edges**

Please refer to Appendix C.

### **3.4.7 Duty Cycle**

Please refer to Appendix D.

### **3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)**

Please refer to Appendix C.



### 3.5 AC Conducted Emission Measurement

#### 3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

### 3.5.4 Test Setup

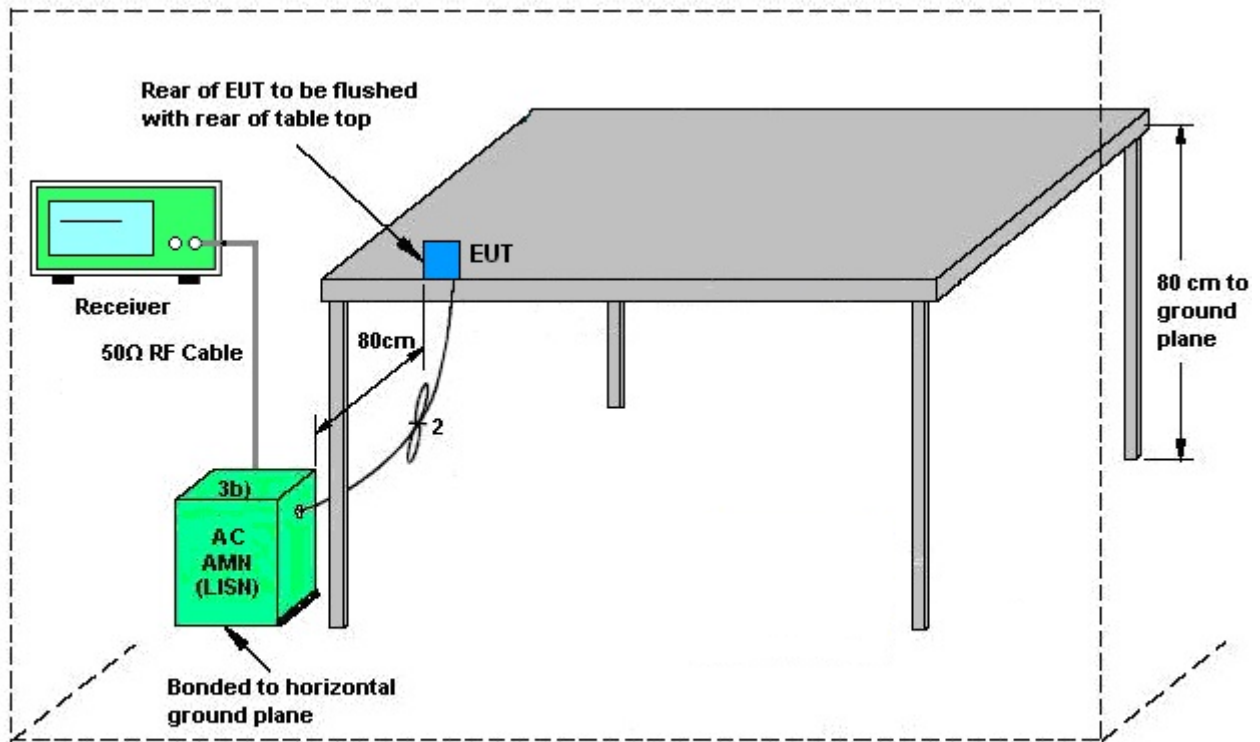

AMN = Artificial mains network (LISH)  
AE = Associated equipment  
EUT = Equipment under test  
ISN = Impedance stabilization network

### 3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



## **3.6 Antenna Requirements**

### **3.6.1 Standard Applicable**

According to FCC 47 CFR Section 15.407(a)(1)(2), if transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### **3.6.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.6.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 14, 2021	Oct. 10, 2022	Oct. 13, 2022	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 05, 2022	Oct. 10, 2022	Jan. 04, 2023	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 05, 2022	Oct. 10, 2022	Jan. 04, 2023	Conducted (TH01-KS)
EMI Test Receiver&SA	Agilent	N9038A	MY52260185	20Hz~26.5GHz	Dec.27, 2021	Oct. 11, 2022	Dec.26, 2022	Radiation (03CH01-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 07, 2022	Oct. 11, 2022	Jul. 06, 2023	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jul. 28, 2022	Oct. 11, 2022	Jun. 27, 2024	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz-2GHz	Sep. 28, 2021	Oct. 11, 2022	Sep. 27, 2023	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 07, 2022	Oct. 11, 2022	Jul. 06, 2023	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz-40GHz	Apr.10, 2022	Oct. 11, 2022	Apr.09 2023	Radiation (03CH01-SZ)
LF Amplifier	Burgeon	BPA-530	102209	0.01~3000Mhz	Apr. 06, 2022	Oct. 11, 2022	Apr. 05, 2023	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	AMF-7D-00101 800-30-10P-R	1943528	1GHz~18GHz	Oct. 22, 2021	Oct. 11, 2022	Oct. 21, 2022	Radiation (03CH01-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5GHz	Oct. 22, 2021	Oct. 11, 2022	Oct. 21, 2022	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	TTA1840-35-H G	1871923	18GHz~40GHz	Jul. 6. 2022	Oct. 11, 2022	Jul. 5. 2023	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	6160100019 85	N/A	NCR	Oct. 11, 2022	NCR	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Oct. 11, 2022	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Oct. 11, 2022	NCR	Radiation (03CH01-SZ)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	May 24, 2022	Oct. 12, 2022	May 23, 2023	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 14, 2021	Oct. 12, 2022	Oct. 13, 2022	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	May 24, 2022	Oct. 12, 2022	May 23, 2023	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP0000008 11	AC 0V~300V, 45Hz~1000Hz	Oct. 14, 2021	Oct. 12, 2022	Oct. 13, 2022	Conduction (CO01-KS)

NCR: No Calibration Required.



## 5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

### Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	±0.46 dB
Conducted Emissions	±0.48 dB
Occupied Channel Bandwidth	±0.1 %
Conducted Power Spectral Density	±0.40 dB

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.78dB
---------------------------------------------------------------------	--------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.2dB
---------------------------------------------------------------------	-------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---------------------------------------------------------------------	-------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.3dB
---------------------------------------------------------------------	-------





## Appendix A. Conducted Test Results

**A1. Conducted Test Results**

Test Engineer:	Jacob Zhang	Temperature:	21~25	°C
Test Date:	2022/10/10	Relative Humidity:	51~54	%

**TEST RESULTS DATA**  
**Average Power Table**

FCC U-NII-1 single antenna										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power with duty factor (dBm)		FCC Conducted Power Limit		DG (dBi)	Pass/Fail
					Ant 1	SUM	Ant 1	Ant 1		
11a	6Mbps	1	36	5180	17.31		24.00	-4.00		Pass
11a	6Mbps	1	44	5220	17.27		24.00	-4.00		Pass
11a	6Mbps	1	48	5240	17.25		24.00	-4.00		Pass
HT20	MCS0	1	36	5180	15.50		24.00	-4.00		Pass
HT20	MCS0	1	44	5220	15.53		24.00	-4.00		Pass
HT20	MCS0	1	48	5240	15.55		24.00	-4.00		Pass
HT40	MCS0	1	38	5190	14.56		24.00	-4.00		Pass
HT40	MCS0	1	46	5230	15.53		24.00	-4.00		Pass
VHT20	MCS0	1	36	5180	15.44		24.00	-4.00		Pass
VHT20	MCS0	1	44	5220	15.43		24.00	-4.00		Pass
VHT20	MCS0	1	48	5240	15.50		24.00	-4.00		Pass
VHT40	MCS0	1	38	5190	14.45		24.00	-4.00		Pass
VHT40	MCS0	1	46	5230	14.93		24.00	-4.00		Pass
VHT80	MCS0	1	42	5210	11.20		24.00	-4.00		Pass

**TEST RESULTS DATA**  
**Average Power Table**

FCC U-NII-2A single antenna										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power with duty factor (dBm)		FCC Conducted Power Limit		EIRP Power Limit (dBm)	Pass/Fail
					Ant 1	SUM	Ant 1	Ant 1		
11a	6Mbps	1	52	5260	17.36		23.98	-4.50	26.99	Pass
11a	6Mbps	1	60	5300	17.29		23.98	-4.50	26.99	Pass
11a	6Mbps	1	64	5320	17.46		23.98	-4.50	26.99	Pass
HT20	MCS0	1	52	5260	15.43		23.98	-4.50	26.99	Pass
HT20	MCS0	1	60	5300	15.46		23.98	-4.50	26.99	Pass
HT20	MCS0	1	64	5320	15.52		23.98	-4.50	26.99	Pass
HT40	MCS0	1	54	5270	15.57		23.98	-4.50	26.99	Pass
HT40	MCS0	1	62	5310	14.45		23.98	-4.50	26.99	Pass
VHT20	MCS0	1	52	5260	15.46		23.98	-4.50	26.99	Pass
VHT20	MCS0	1	60	5300	15.42		23.98	-4.50	26.99	Pass
VHT20	MCS0	1	64	5320	15.48		23.98	-4.50	26.99	Pass
VHT40	MCS0	1	54	5270	15.03		23.98	-4.50	26.99	Pass
VHT40	MCS0	1	62	5310	14.36		23.98	-4.50	26.99	Pass
VHT80	MCS0	1	58	5290	10.84		23.98	-4.50	26.99	Pass

**TEST RESULTS DATA**  
**Average Power Table**

FCC U-NII-2C single antenna											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power with duty factor (dBm)		FCC Conducted Power Limit	DG (dBi)		EIRP Power Limit (dBm)	Pass/Fai
					Ant 1	SUM		Ant 1	Ant 1		
11a	6Mbps	1	100	5500	17.49		23.98	-4.50	26.99	Pass	
11a	6Mbps	1	116	5580	17.38		23.98	-4.50	26.99	Pass	
11a	6Mbps	1	140	5700	16.25		23.98	-4.50	26.99	Pass	
HT20	MCS0	1	100	5500	15.47		23.98	-4.50	26.99	Pass	
HT20	MCS0	1	116	5580	15.44		23.98	-4.50	26.99	Pass	
HT20	MCS0	1	140	5700	13.99		23.98	-4.50	26.99	Pass	
HT40	MCS0	1	102	5510	15.25		23.98	-4.50	26.99	Pass	
HT40	MCS0	1	110	5550	15.49		23.98	-4.50	26.99	Pass	
HT40	MCS0	1	134	5670	15.55		23.98	-4.50	26.99	Pass	
VHT20	MCS0	1	100	5500	15.43		23.98	-4.50	26.99	Pass	
VHT20	MCS0	1	116	5580	15.40		23.98	-4.50	26.99	Pass	
VHT20	MCS0	1	140	5700	13.87		23.98	-4.50	26.99	Pass	
VHT40	MCS0	1	102	5510	14.97		23.98	-4.50	26.99	Pass	
VHT40	MCS0	1	110	5550	15.00		23.98	-4.50	26.99	Pass	
VHT40	MCS0	1	134	5670	15.06		23.98	-4.50	26.99	Pass	
VHT80	MCS0	1	106	5530	13.94		23.98	-4.50	26.99	Pass	
VHT80	MCS0	1	122	5610	13.96		23.98	-4.50	26.99	Pass	

FCC U-NII-2C straddle channel single antenna											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power with duty factor (dBm)		FCC Conducted Power Limit	DG (dBi)		EIRP Power Limit (dBm)	Pass/Fai
					Ant 1	SUM		Ant 1	Ant 1		
11a	6Mbps	1	144	5720	17.39		23.98	-4.50	26.99	Pass	
HT20	MCS0	1	144	5720	15.45		23.98	-4.50	26.99	Pass	
HT40	MCS0	1	142	5710	15.50		23.98	-4.50	26.99	Pass	
VHT20	MCS0	1	144	5720	15.39		23.98	-4.50	26.99	Pass	
VHT40	MCS0	1	142	5710	14.93		23.98	-4.50	26.99	Pass	
VHT80	MCS0	1	138	5690	14.01		23.98	-4.50	26.99	Pass	

**TEST RESULTS DATA**  
**Average Power Table**

U-NII-3 single antenna												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	149	5745	17.41	-		30.00	-	-5.00	-	Pass
11a	6Mbps	1	157	5785	17.32	-		30.00	-	-5.00	-	Pass
11a	6Mbps	1	165	5825	17.18	-		30.00	-	-5.00	-	Pass
HT20	MCS0	1	149	5745	15.51	-		30.00	-	-5.00	-	Pass
HT20	MCS0	1	157	5785	15.46	-		30.00	-	-5.00	-	Pass
HT20	MCS0	1	165	5825	15.40	-		30.00	-	-5.00	-	Pass
HT40	MCS0	1	151	5755	15.52	-		30.00	-	-5.00	-	Pass
HT40	MCS0	1	159	5795	15.48	-		30.00	-	-5.00	-	Pass
VHT20	MCS0	1	149	5745	15.40	-		30.00	-	-5.00	-	Pass
VHT20	MCS0	1	157	5785	15.44	-		30.00	-	-5.00	-	Pass
VHT20	MCS0	1	165	5825	15.39	-		30.00	-	-5.00	-	Pass
VHT40	MCS0	1	151	5755	14.99	-		30.00	-	-5.00	-	Pass
VHT40	MCS0	1	159	5795	14.94	-		30.00	-	-5.00	-	Pass
VHT80	MCS0	1	155	5775	13.90	-		30.00	-	-5.00	-	Pass



Ambient Condition: <u>25</u> °C, <u>45</u> %RH	
Test Date: <u>2022.10.10</u>	Test Engineer: <u>Jiang Jun</u>

### Emission Bandwidth

#### Test Result

TestMode	Antenna	Freq(MHz)	26dB EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5180	19.80	5170.16	5189.96	---	---
		5220	19.72	5210.16	5229.88	---	---
		5240	19.80	5230.08	5249.88	---	---
		5260	22.52	5247.52	5270.04	---	---
		5300	20.48	5289.40	5309.88	---	---
		5320	19.92	5310.08	5330.00	---	---
		5500	19.72	5490.12	5509.84	---	---
		5580	19.80	5570.08	5589.88	---	---
		5700	19.92	5690.04	5709.96	---	---
		5720	19.84	5710.00	5729.84	---	---
		5745	20.32	5734.44	5754.76	---	---
		5785	21.00	5773.96	5794.96	---	---
		5825	21.84	5813.00	5834.84	---	---
11N20SISO	Ant1	5180	20.04	5170.08	5190.12	---	---
		5220	20.12	5209.96	5230.08	---	---
		5240	20.12	5230.08	5250.20	---	---
		5260	19.96	5250.00	5269.96	---	---
		5300	20.12	5289.92	5310.04	---	---
		5320	19.96	5310.04	5330.00	---	---
		5500	20.12	5490.00	5510.12	---	---
		5580	20.12	5569.92	5590.04	---	---
		5700	19.88	5690.12	5710.00	---	---
		5720	19.88	5710.16	5730.04	---	---
		5745	19.92	5735.12	5755.04	---	---
		5785	21.28	5773.80	5795.08	---	---
		5825	20.00	5815.04	5835.04	---	---





11N40SISO	Ant1	5190	40.88	5169.68	5210.56	---	---
		5230	42.72	5208.72	5251.44	---	---
		5270	40.96	5249.52	5290.48	---	---
		5310	40.72	5289.68	5330.40	---	---
		5510	42.88	5487.68	5530.56	---	---
		5550	52.56	5518.00	5570.56	---	---
		5670	40.72	5649.76	5690.48	---	---
		5710	41.04	5689.60	5730.64	---	---
		5755	40.96	5734.44	5775.40	---	---
		5795	52.64	5763.00	5815.64	---	---
11AC80SISO	Ant1	5210	81.28	5169.52	5250.80	---	---
		5290	81.28	5249.52	5330.80	---	---
		5530	81.76	5489.20	5570.96	---	---
		5610	81.12	5569.68	5650.80	---	---
		5690	80.96	5649.68	5730.64	---	---
		5775	81.44	5734.20	5815.64	---	---








Test Graphs

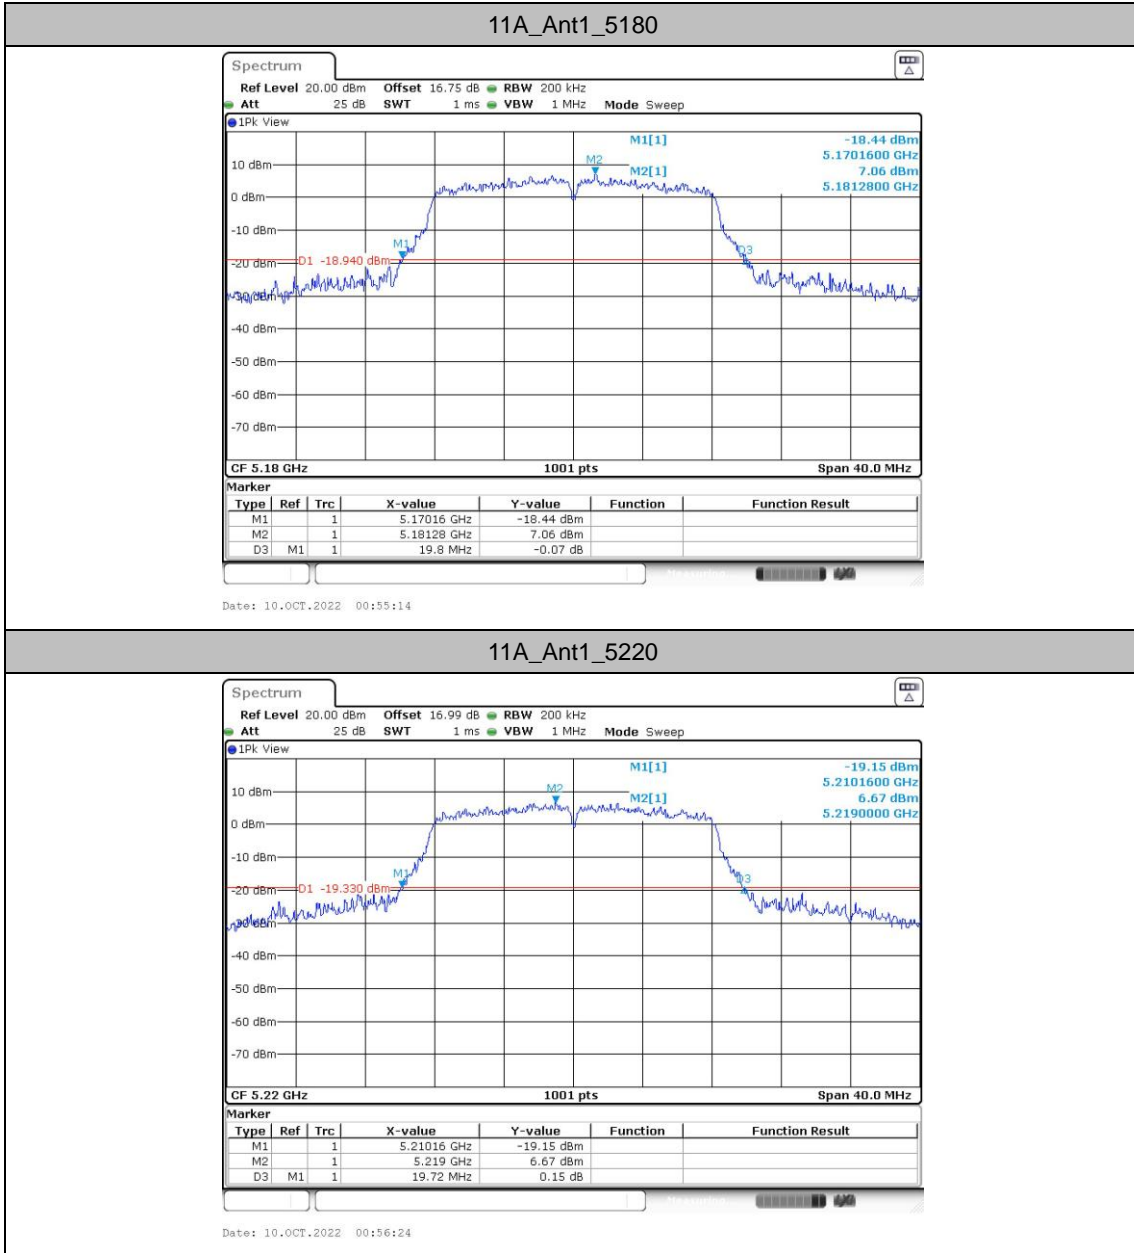


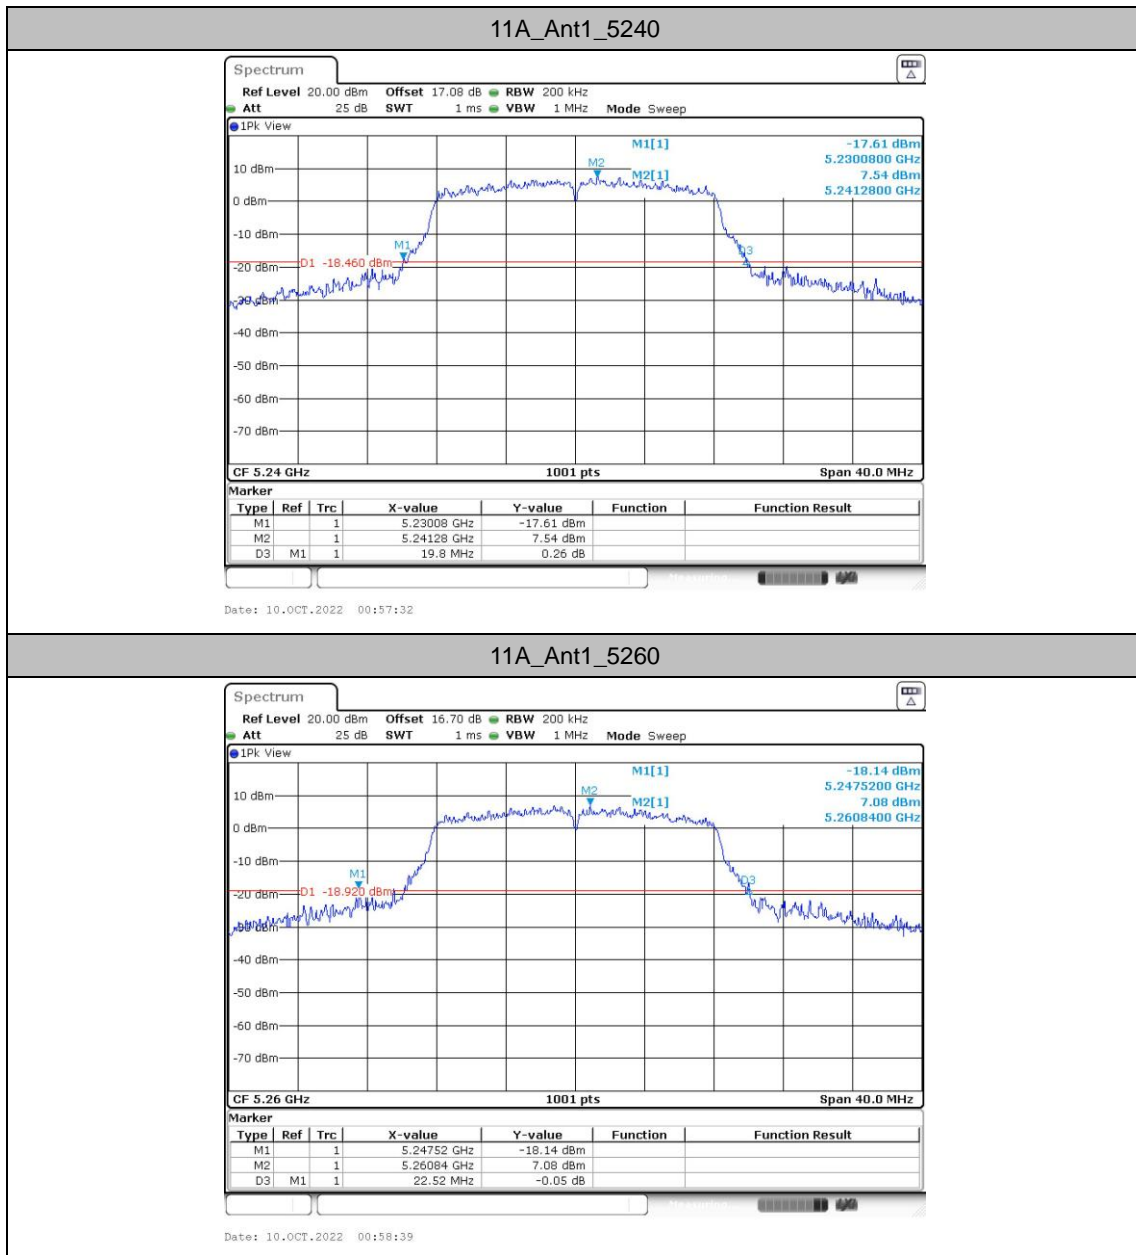


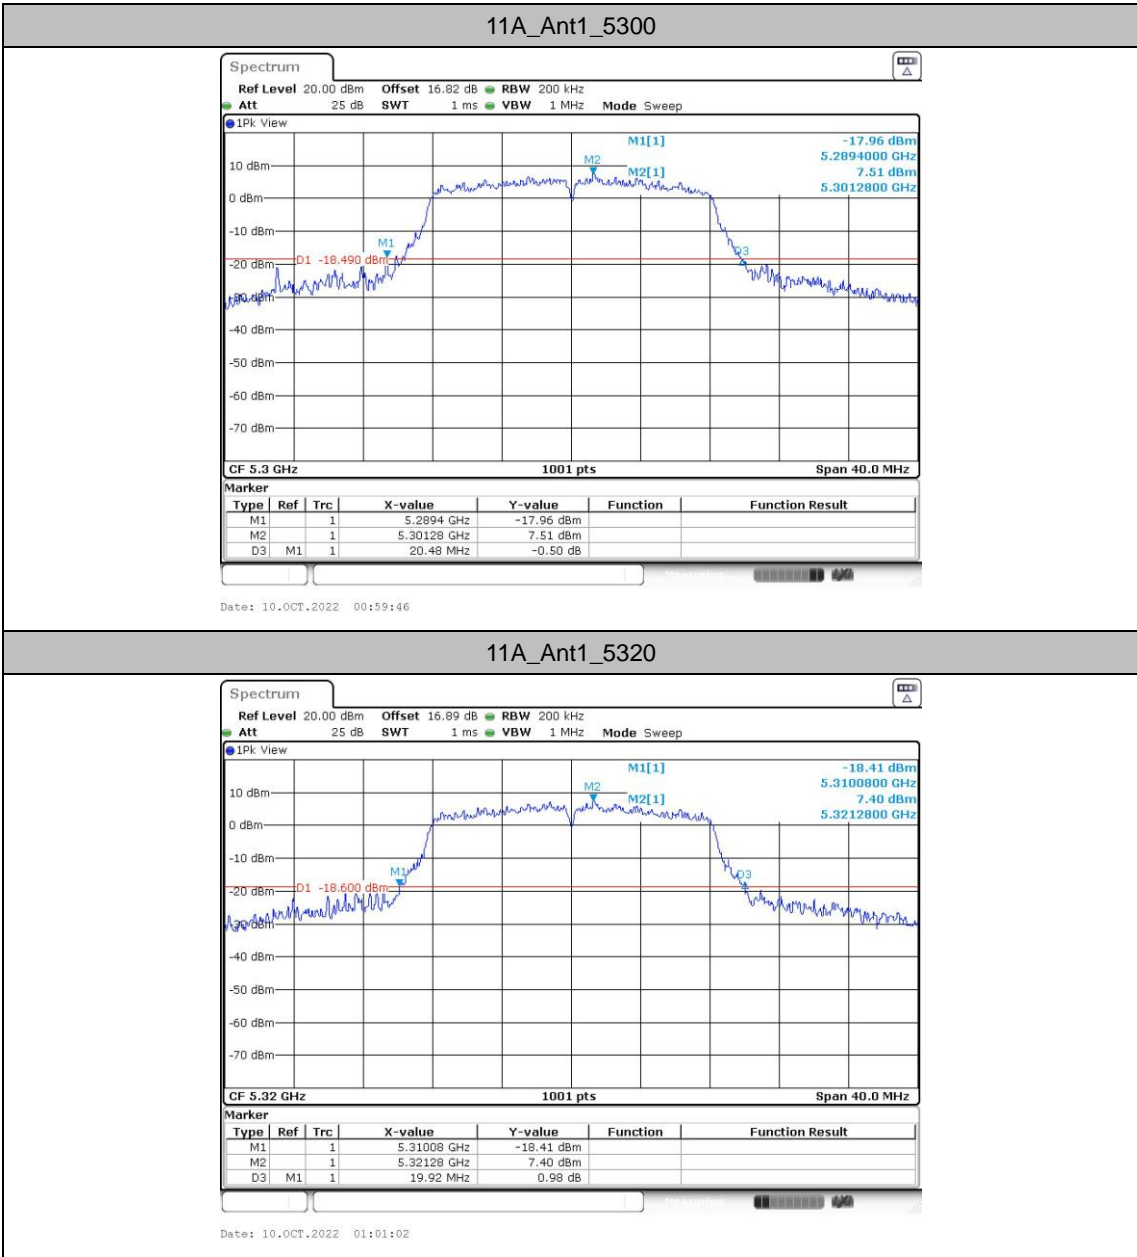


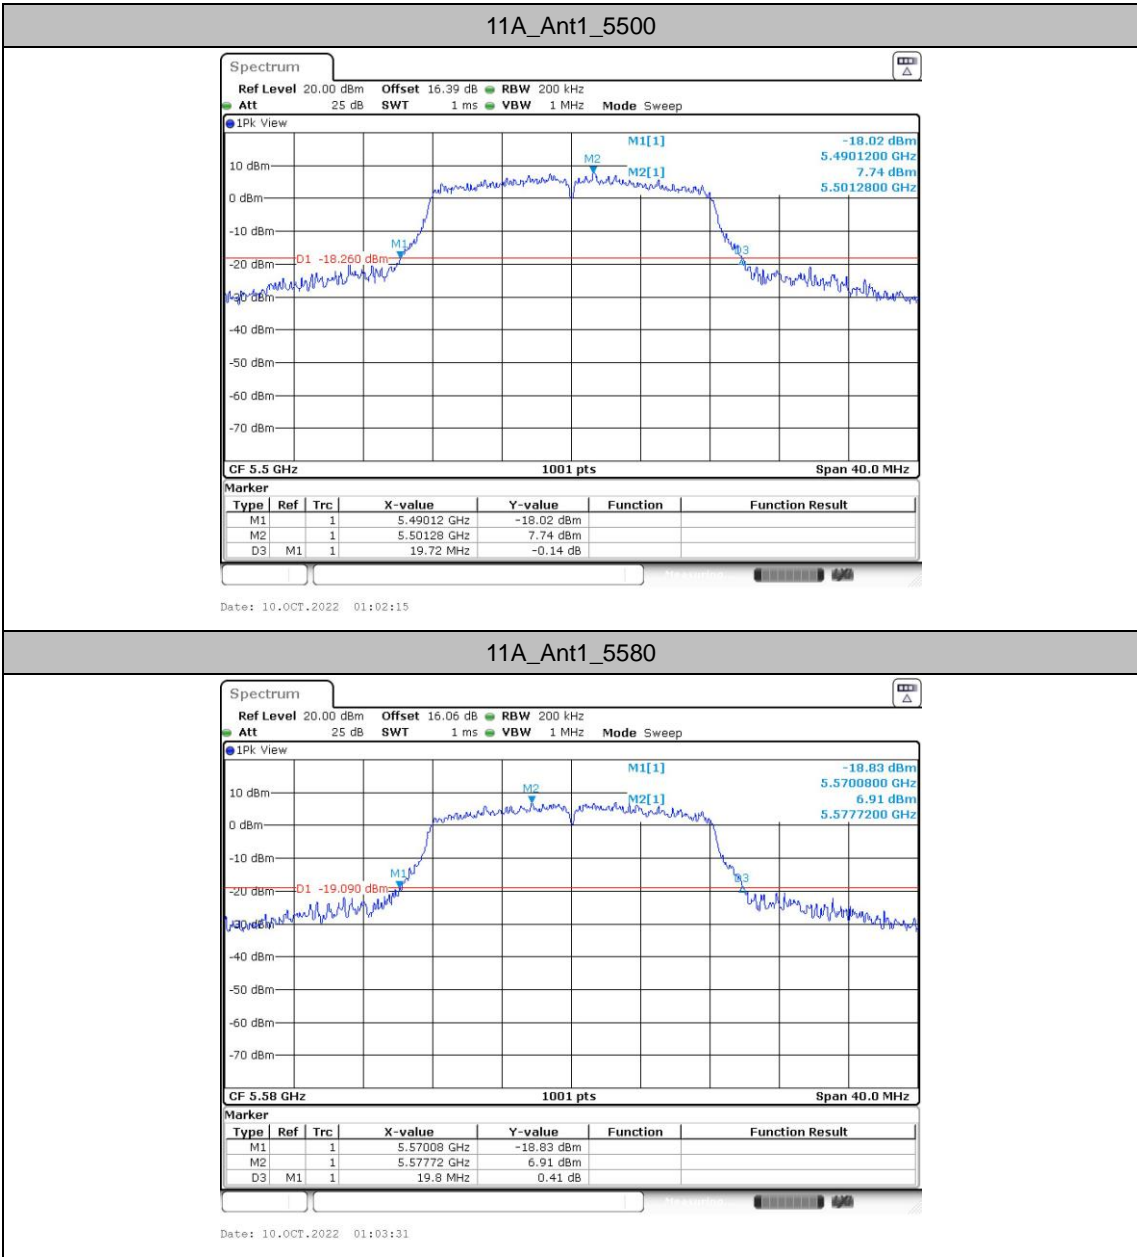

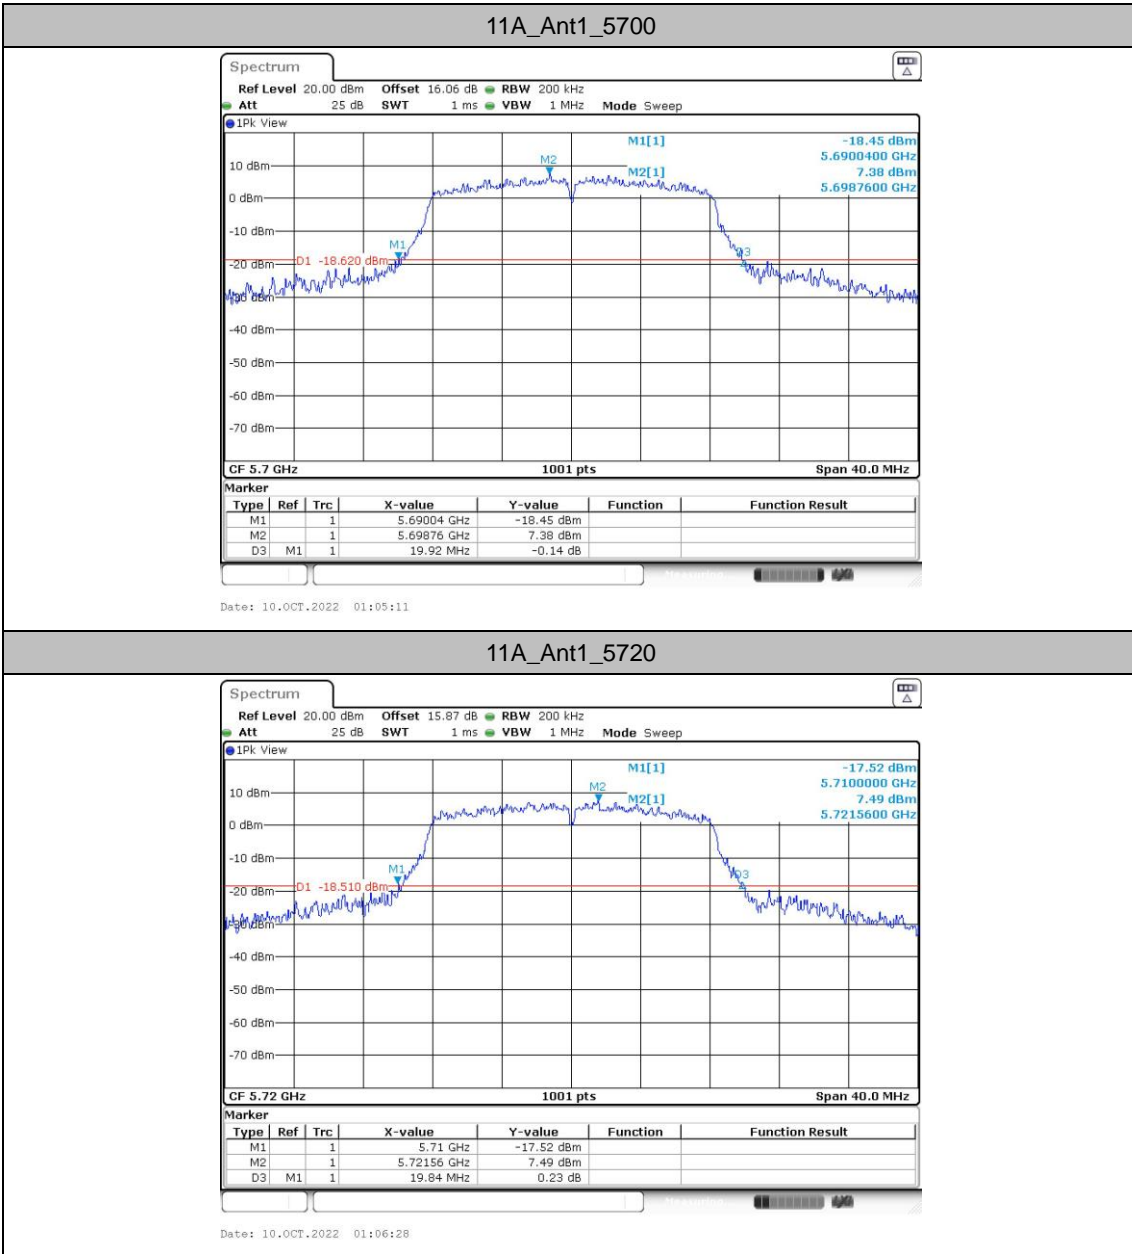


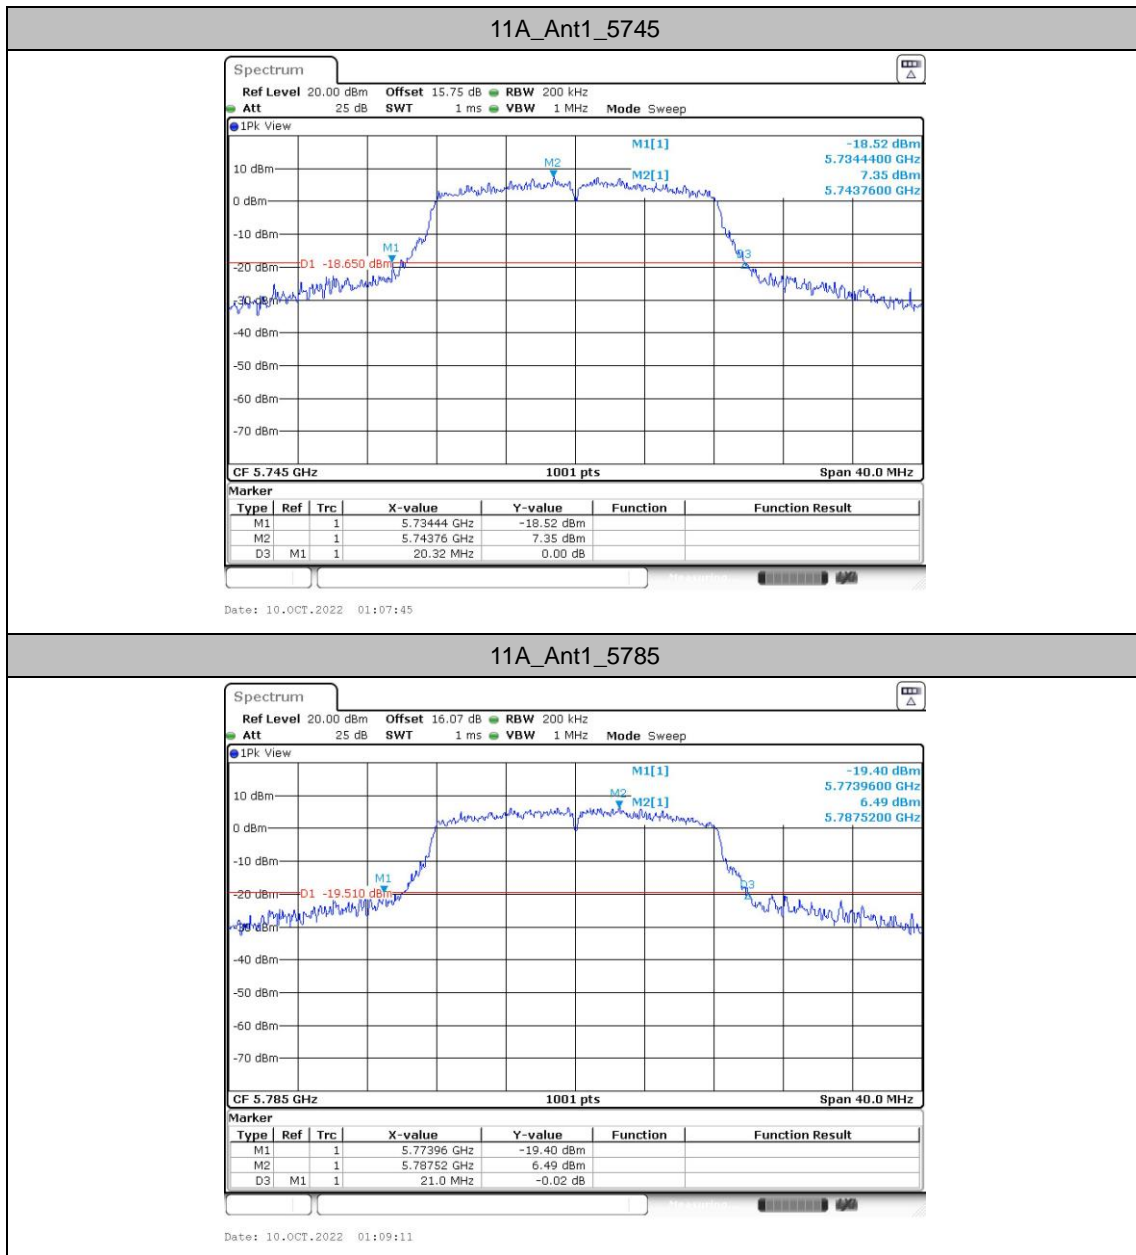


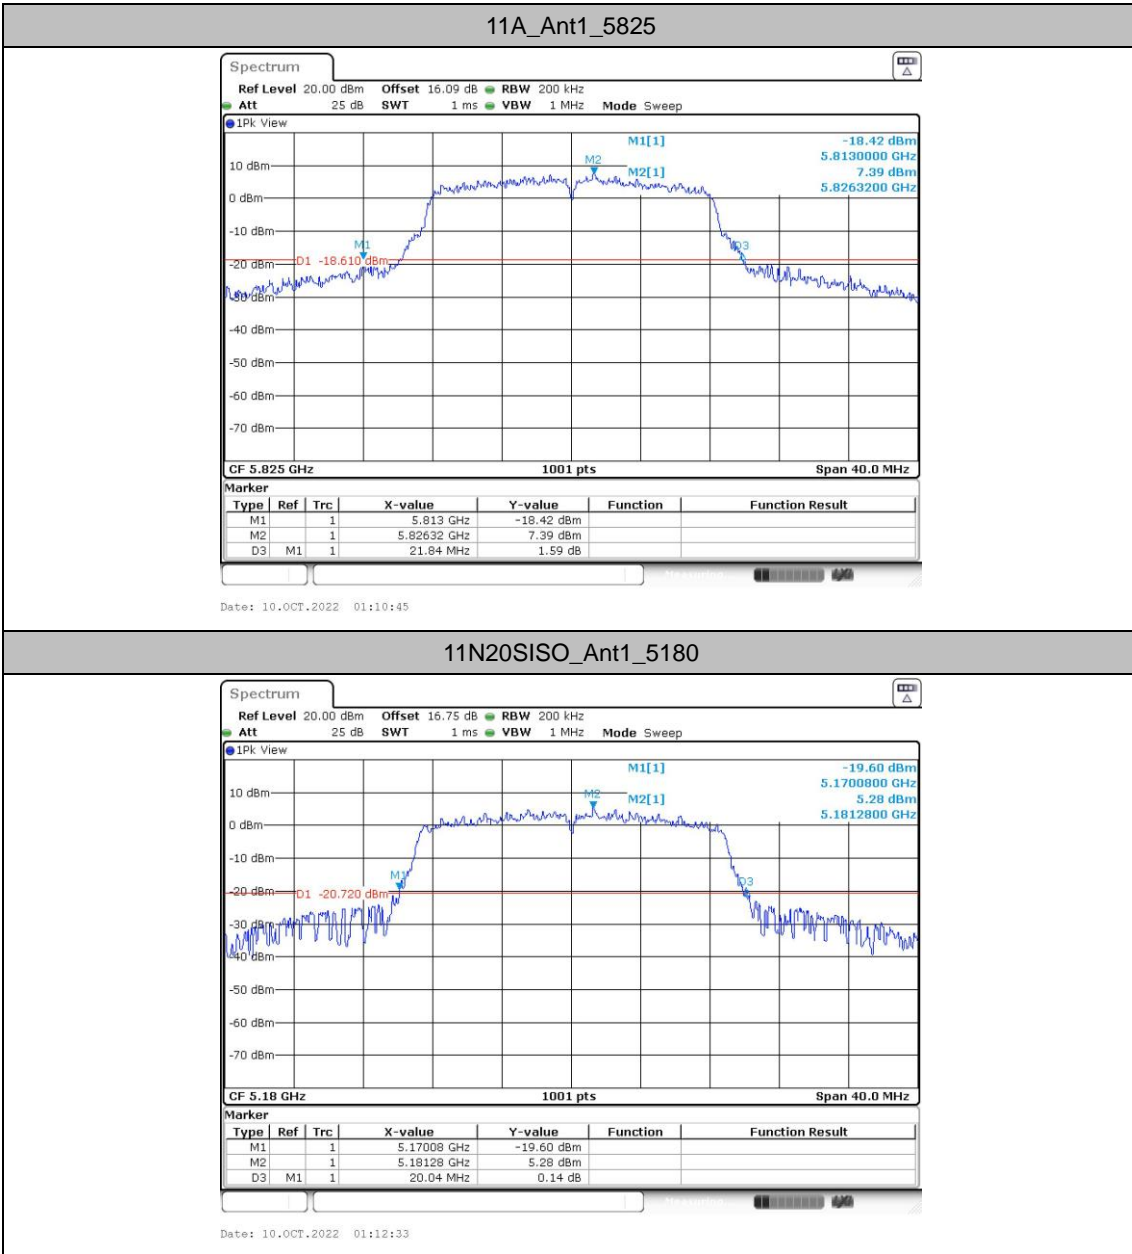


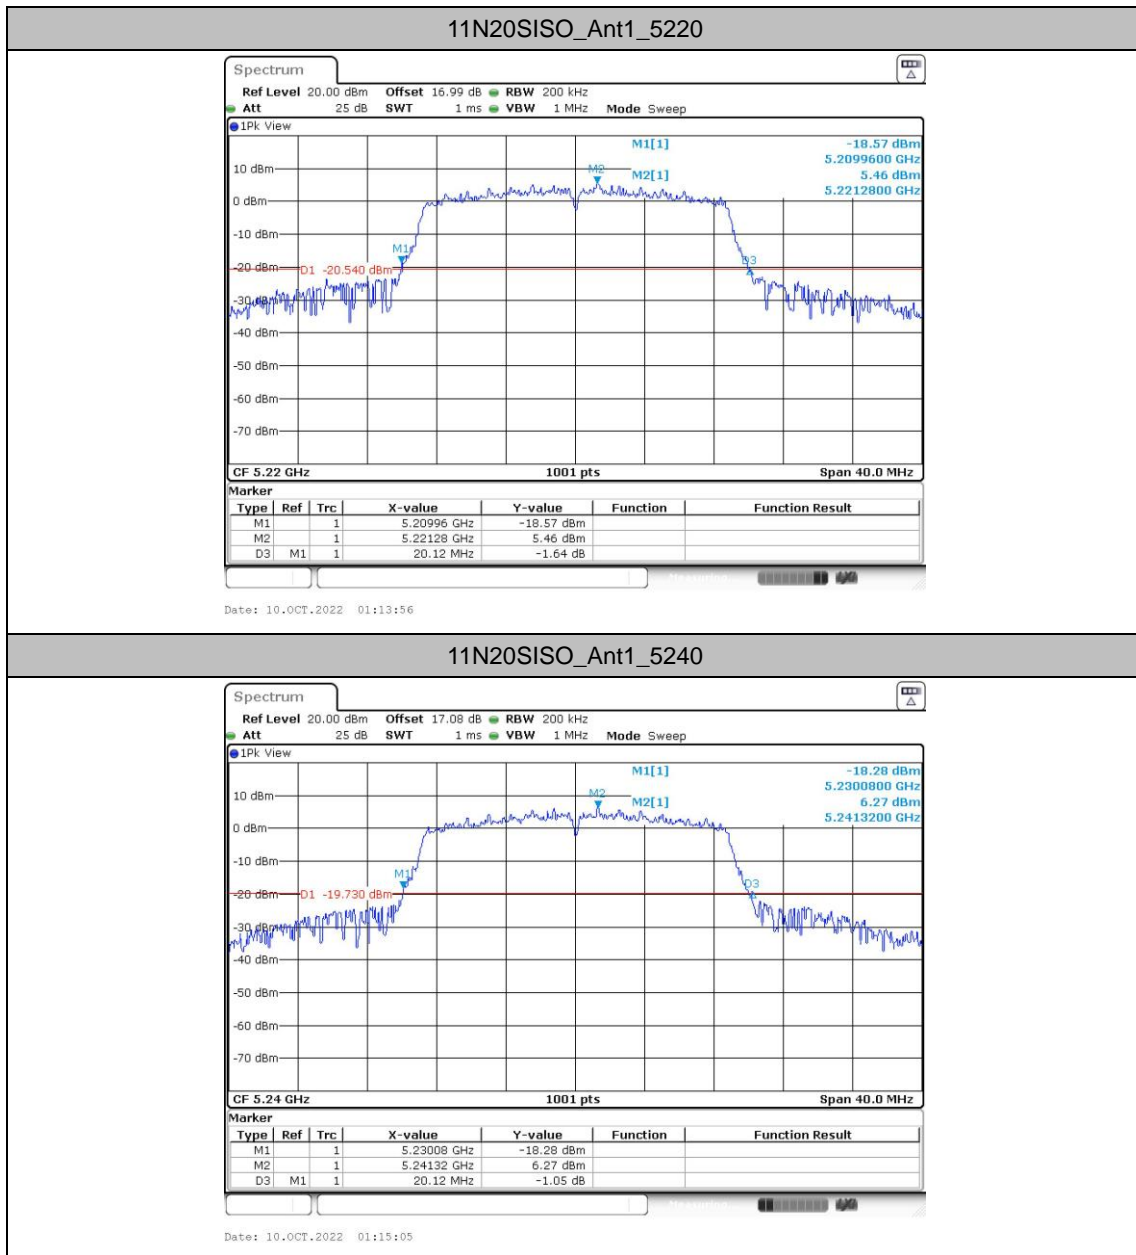





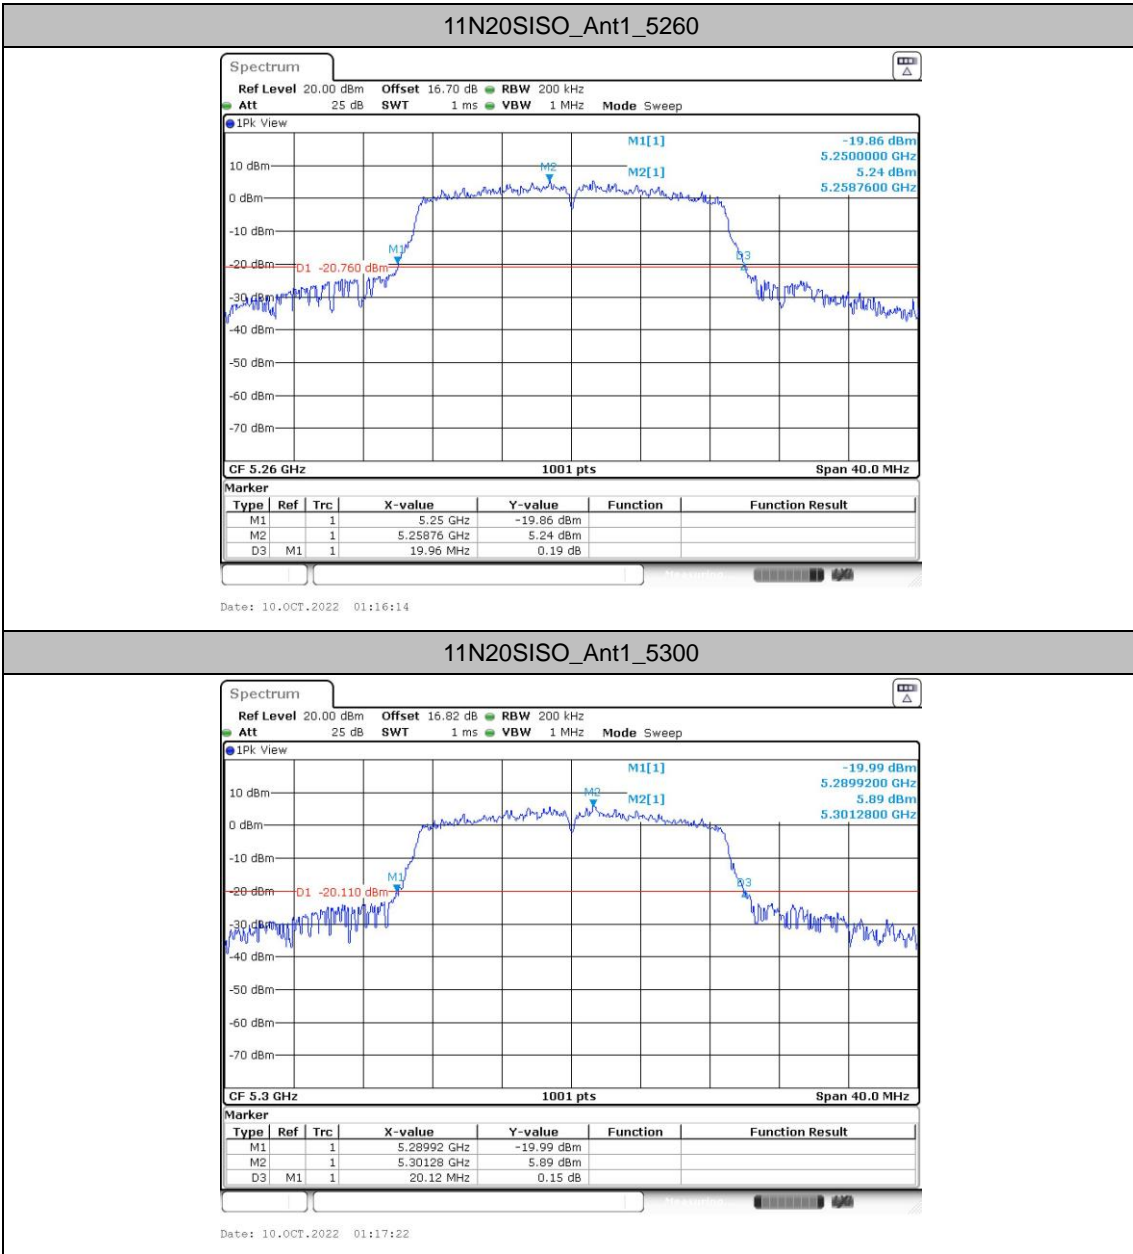


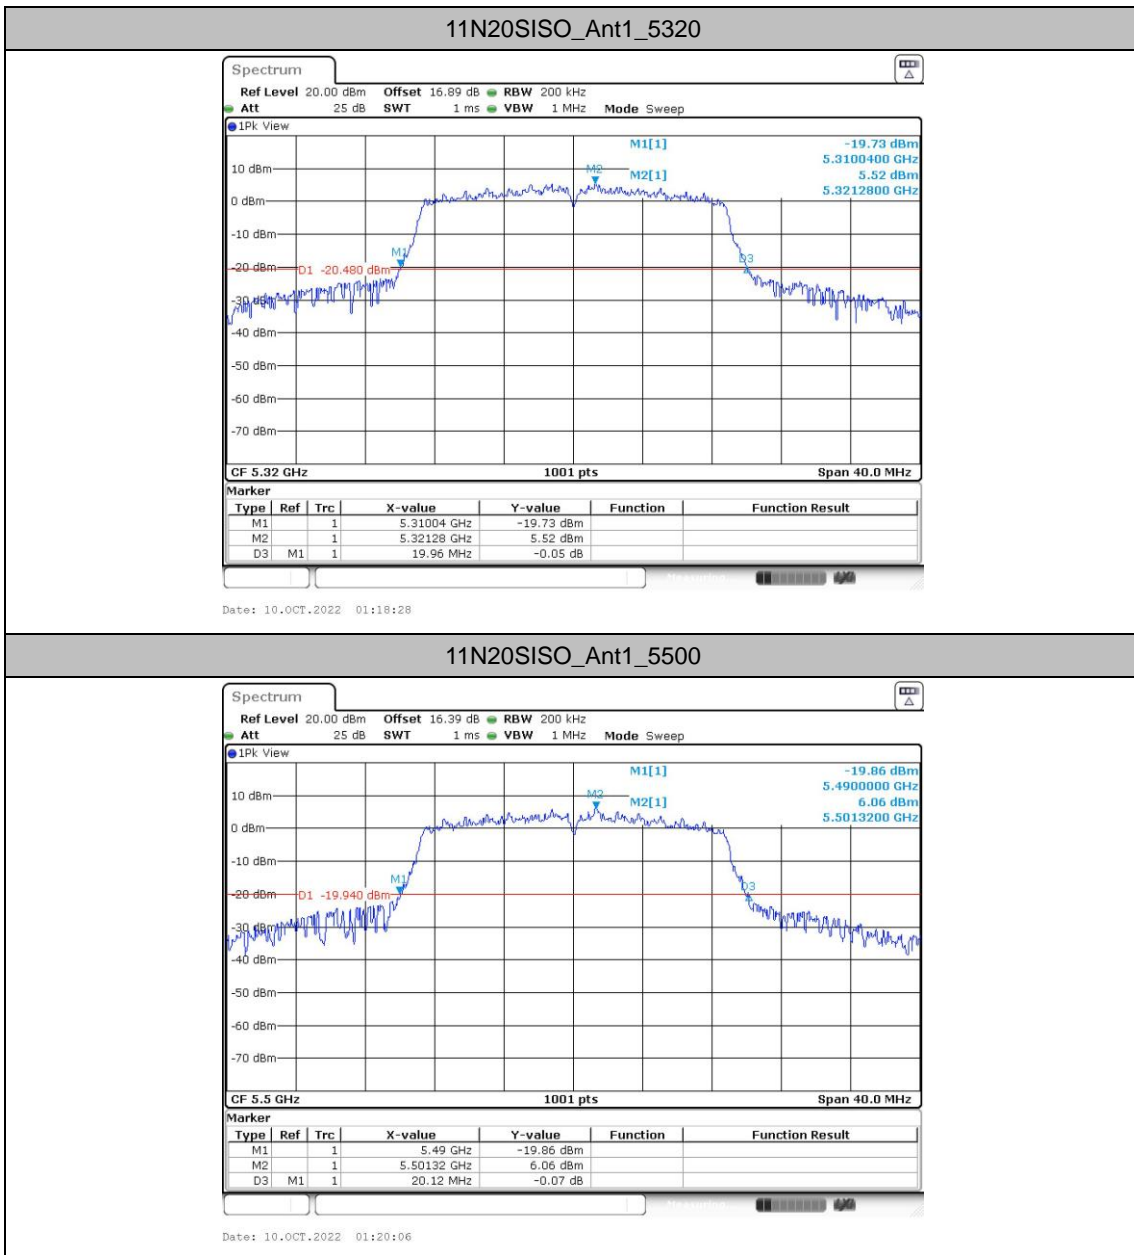


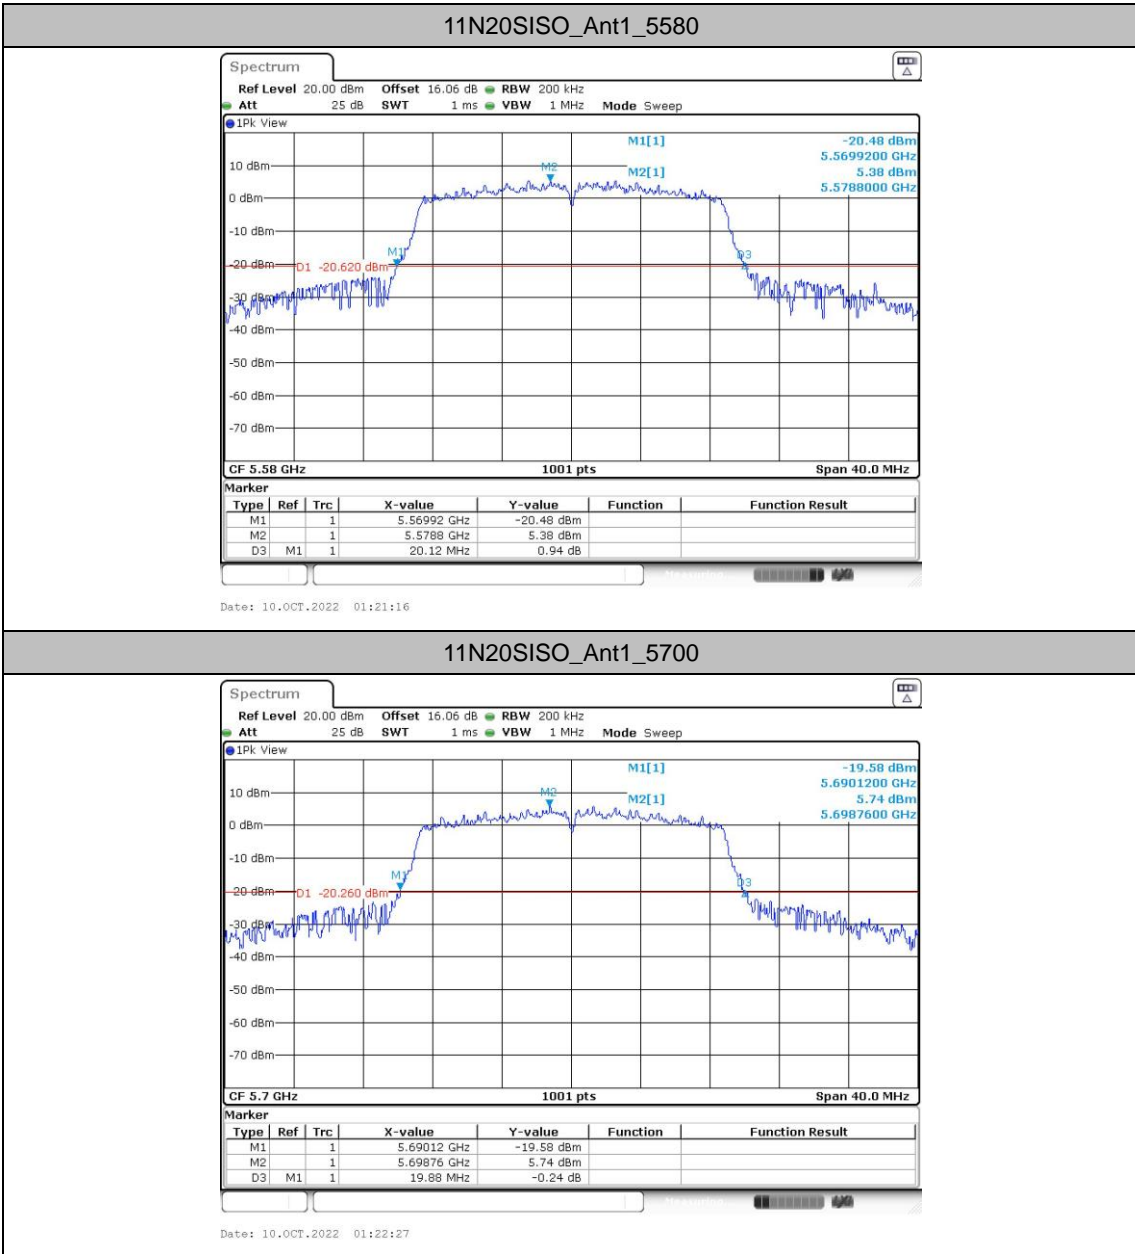


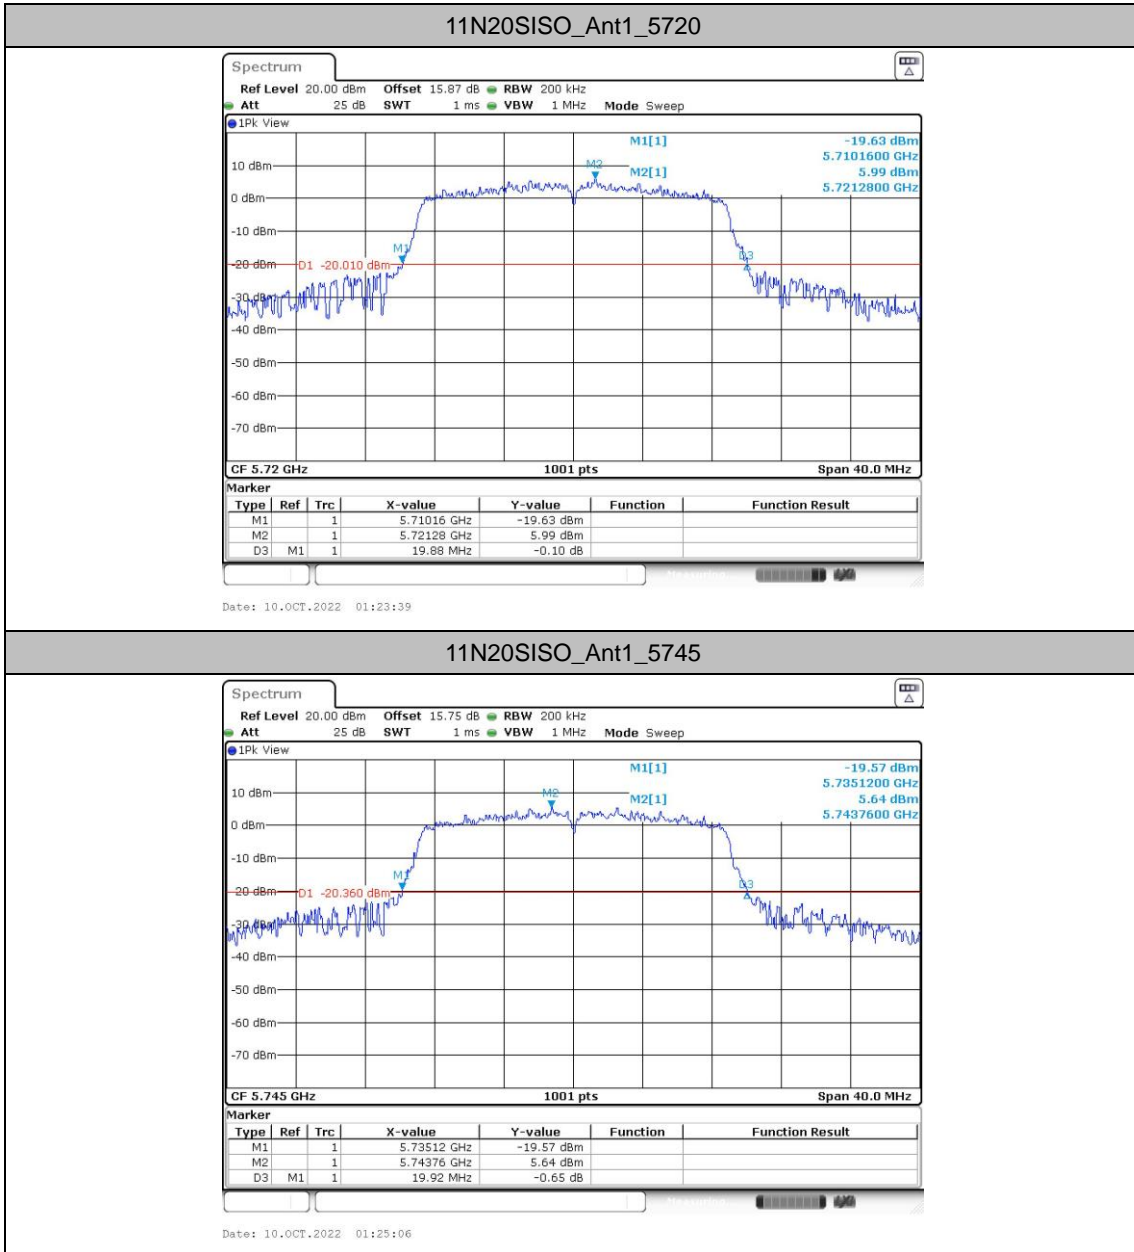

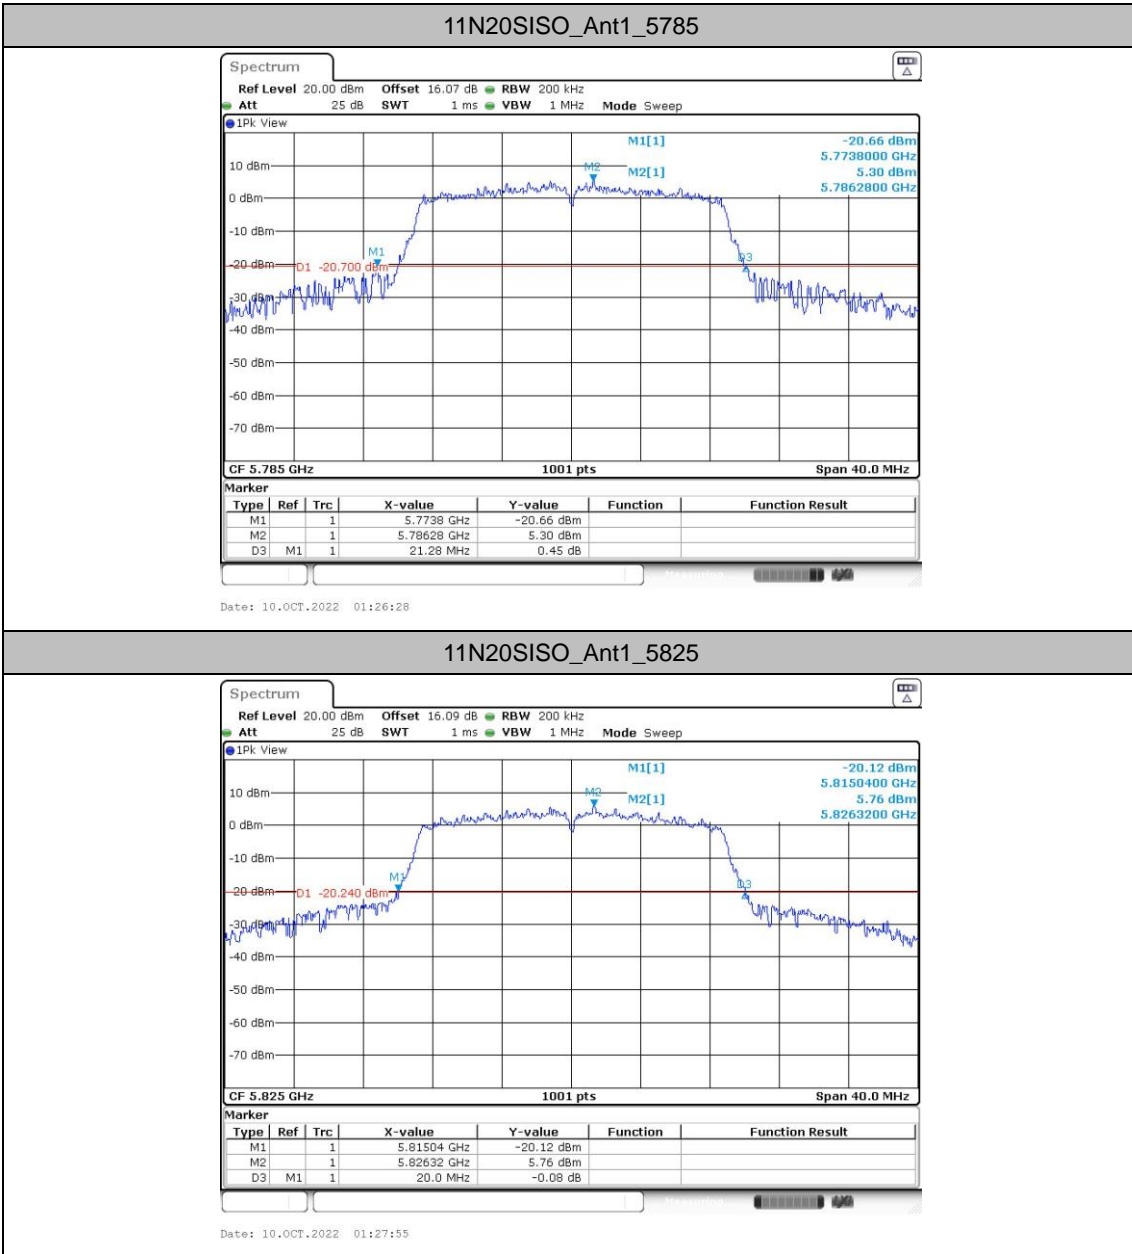


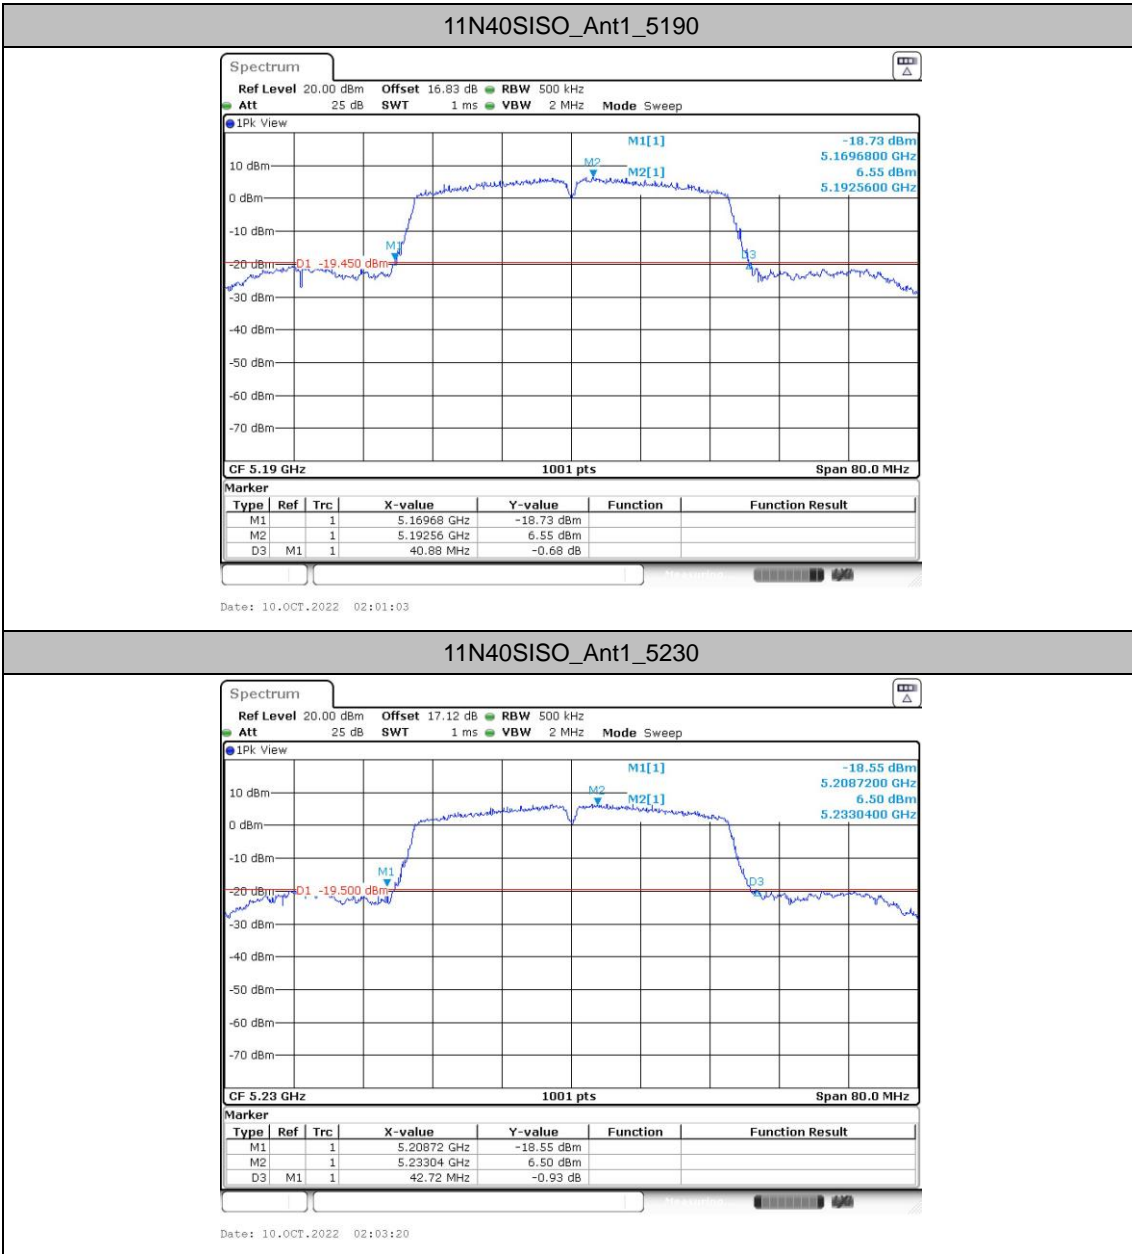


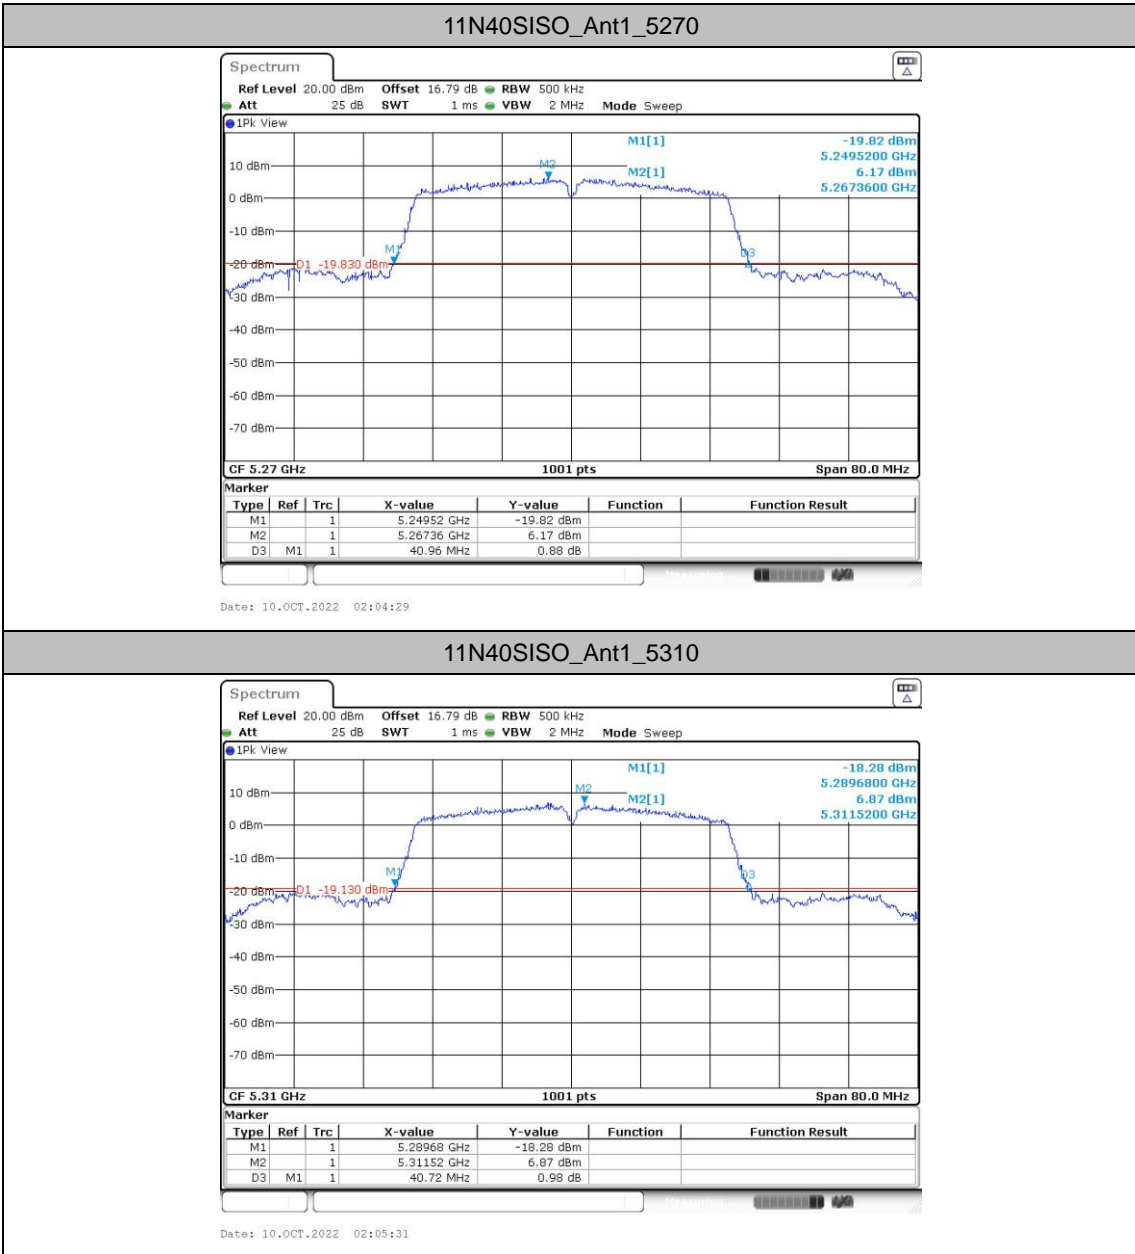


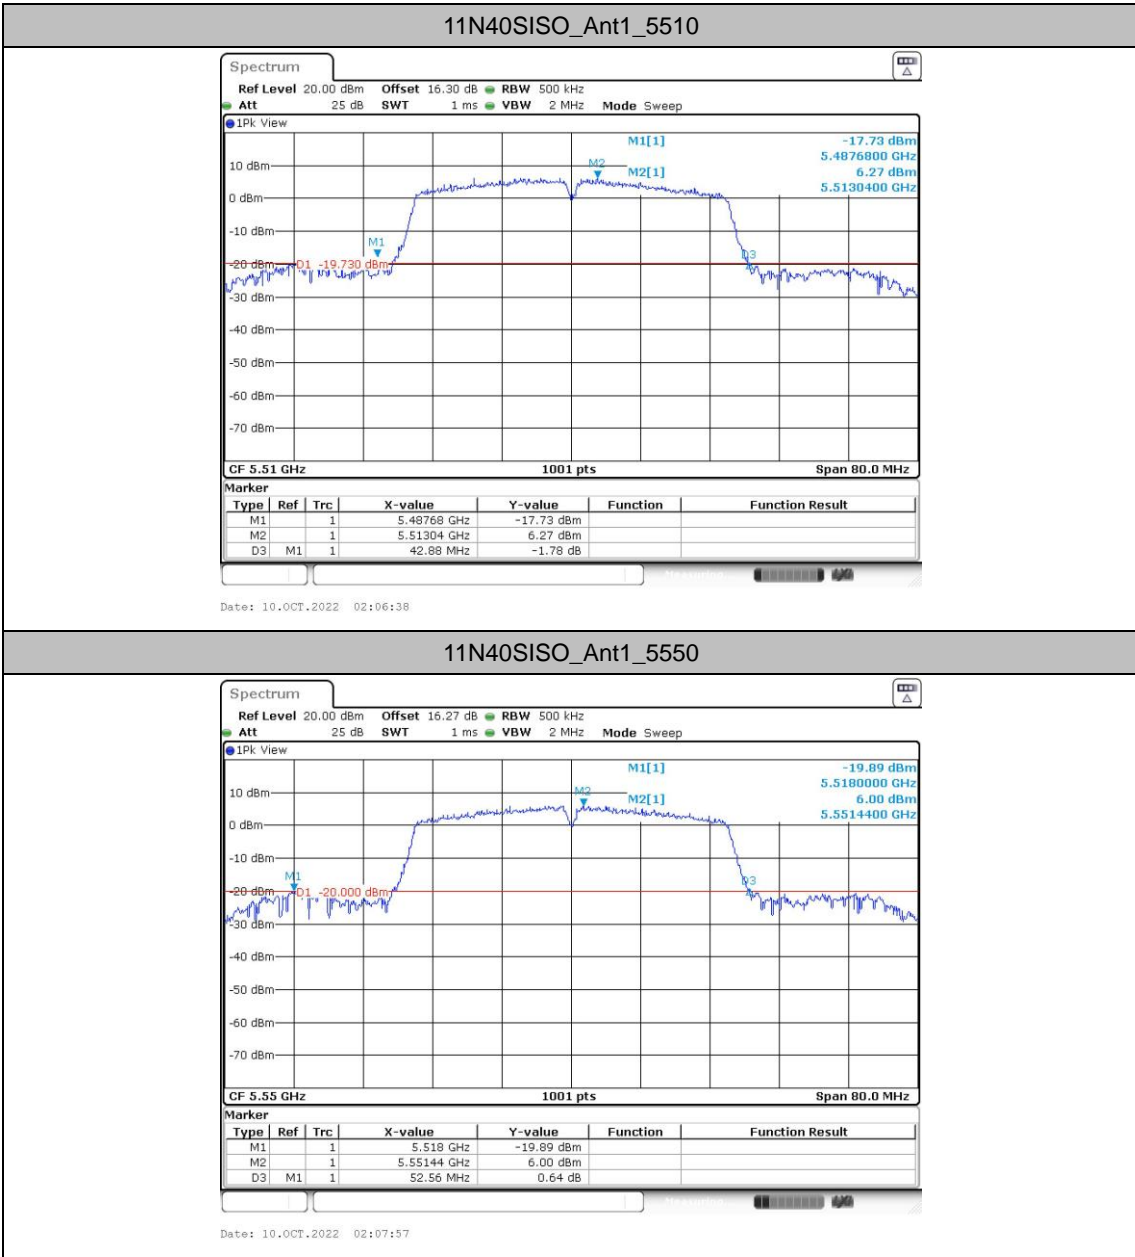




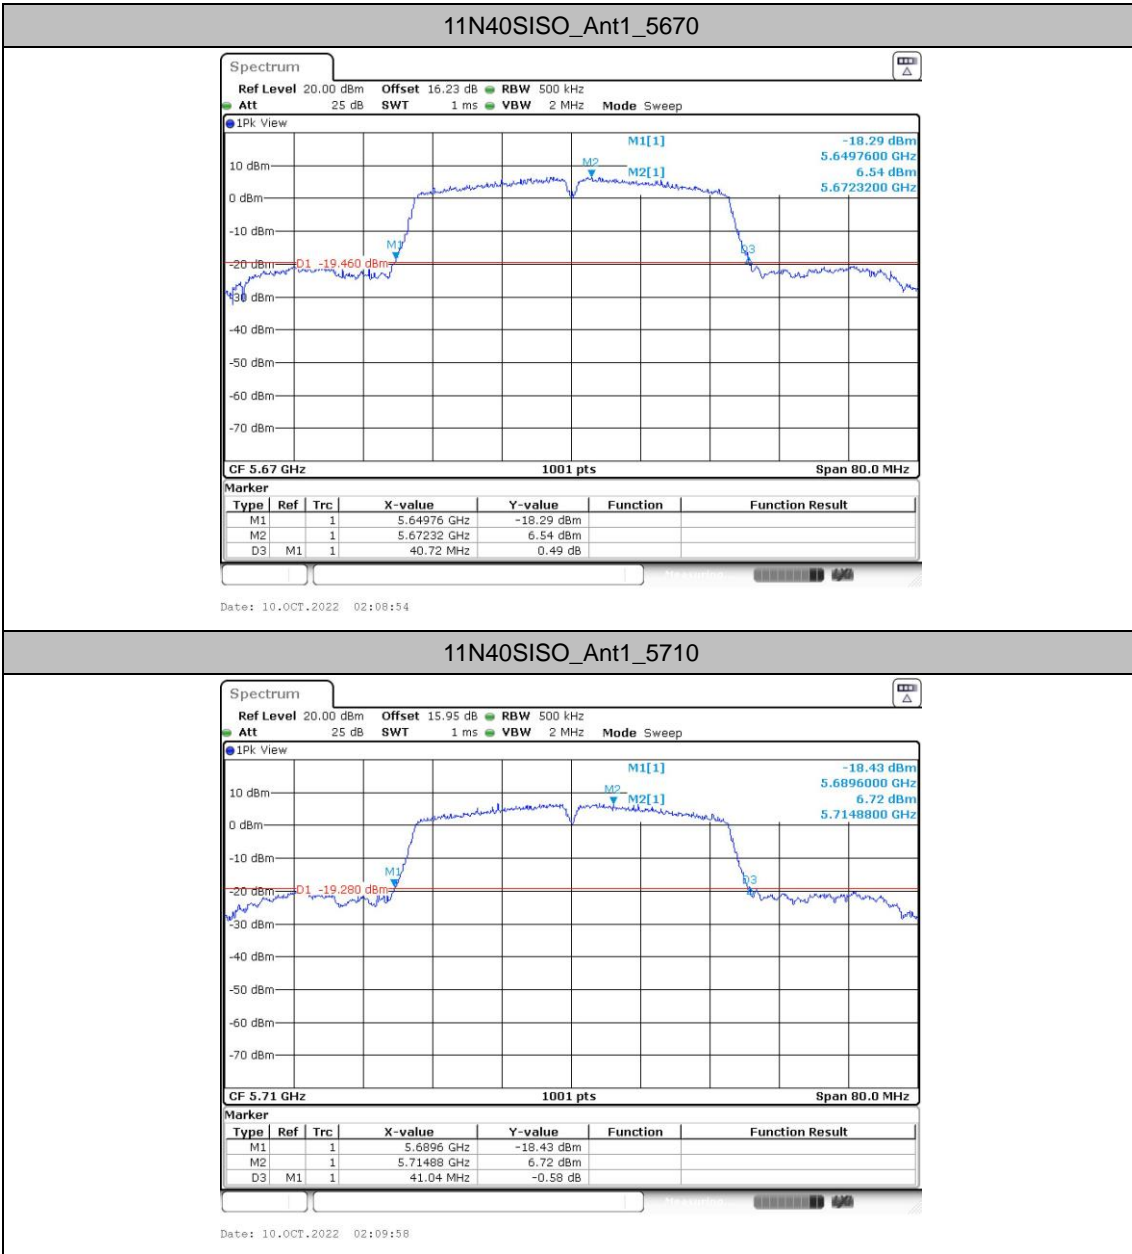

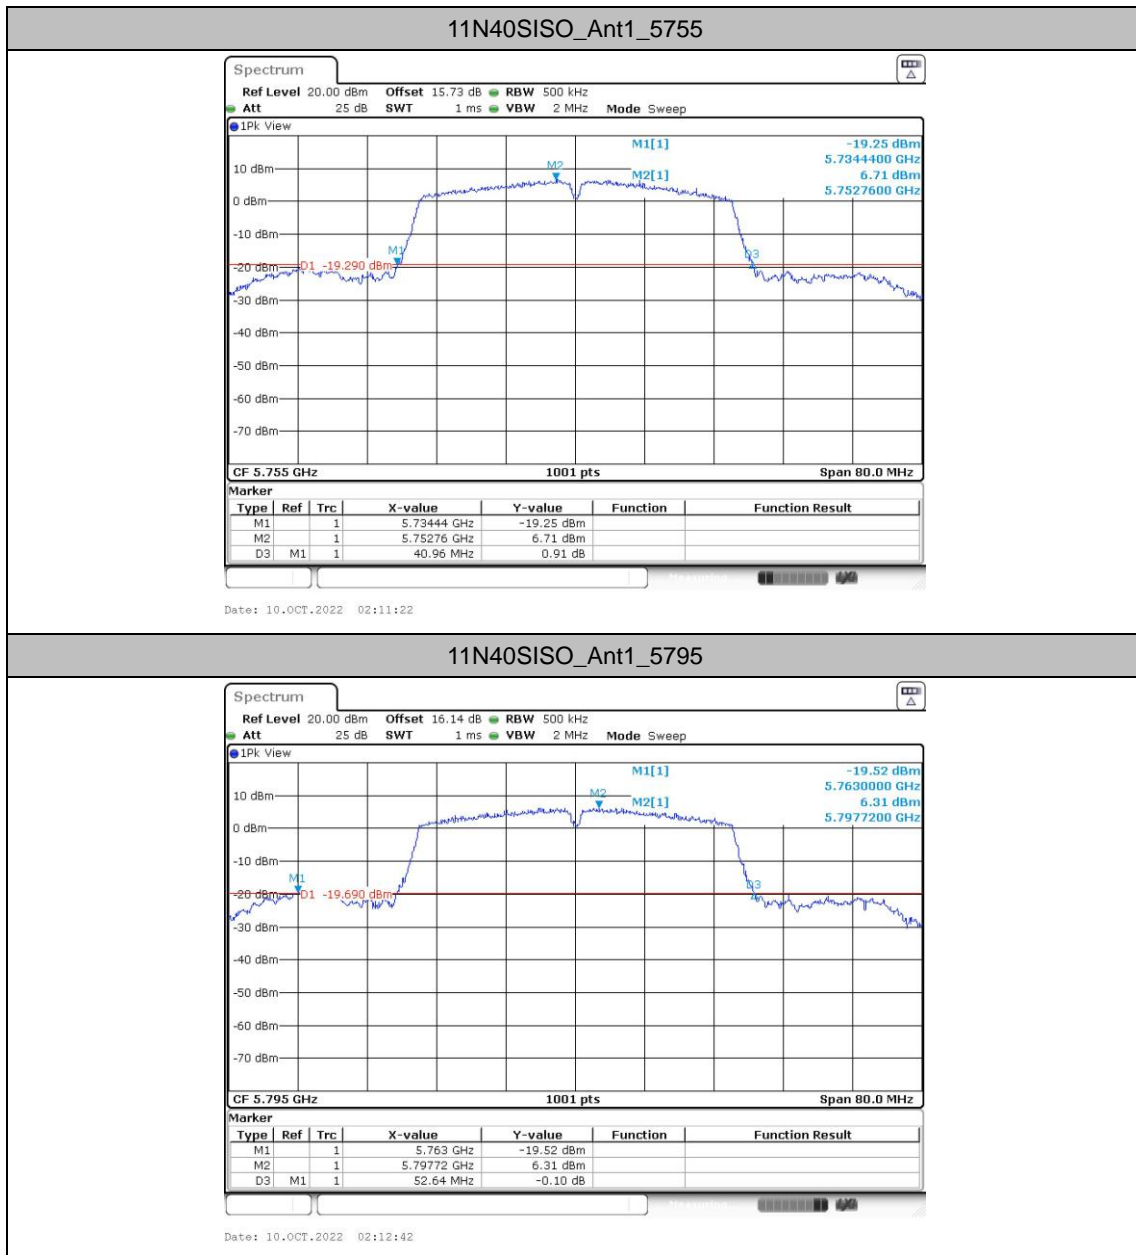


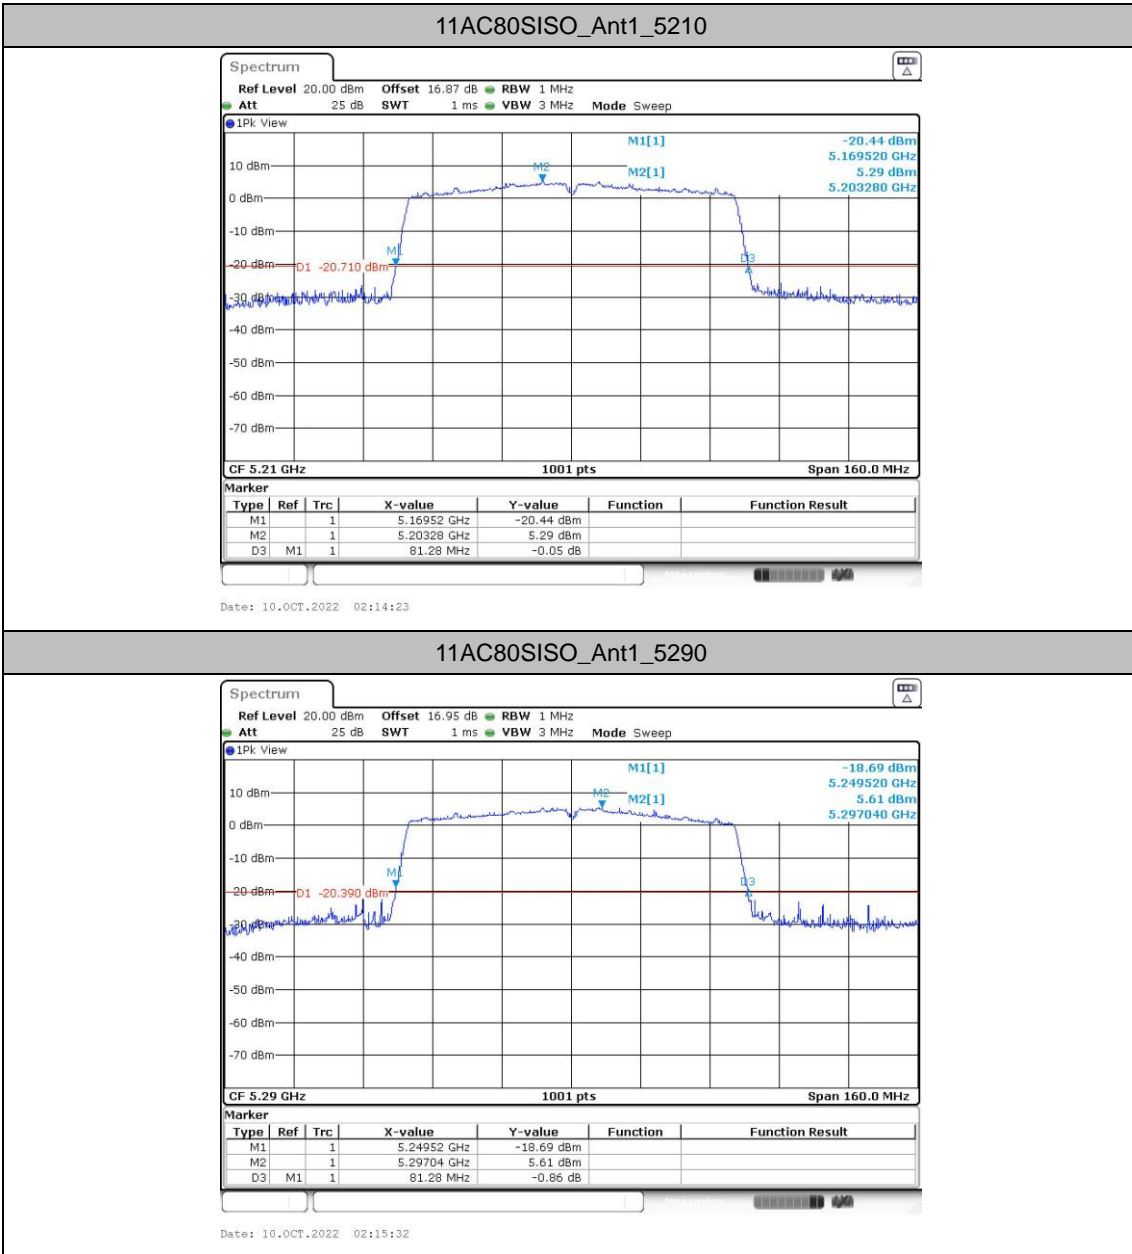

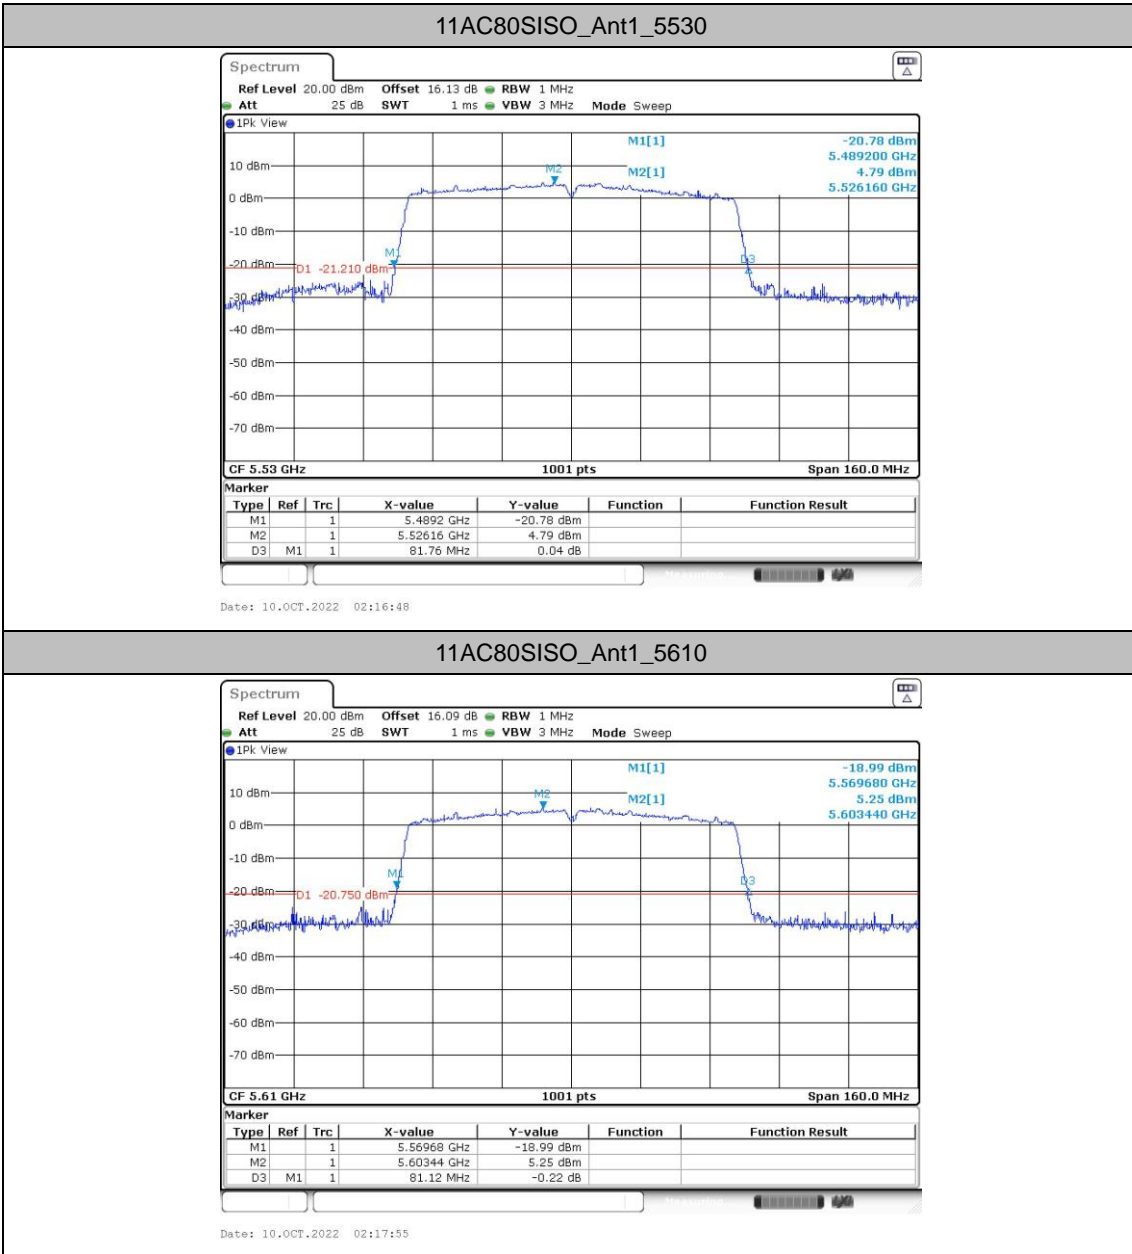




11AC80SISO\_Ant1\_5690

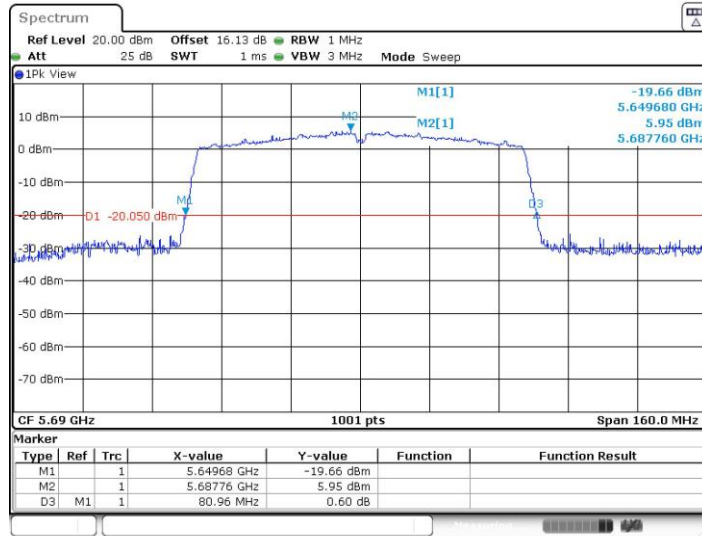

11AC80SISO\_Ant1\_5775

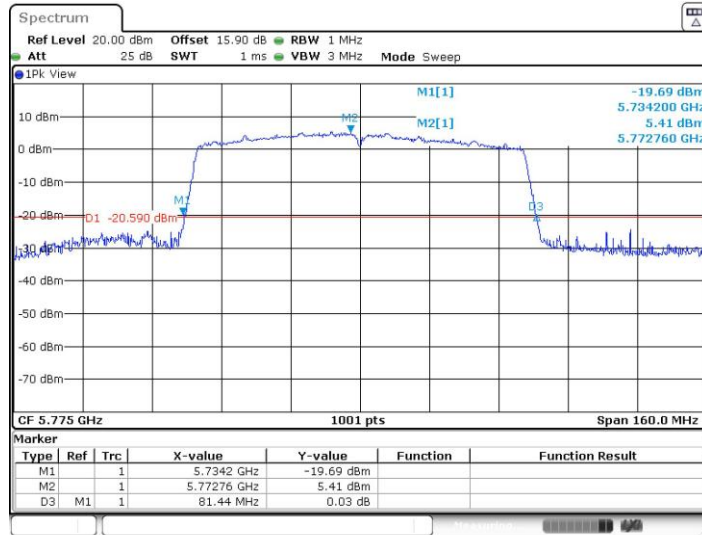



### Occupied channel bandwidth

#### Test Result

TestMode	Antenna	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5180	17.383	5171.3287	5188.7113	---	---
		5220	17.383	5211.3287	5228.7113	---	---
		5240	17.303	5231.4086	5248.7113	---	---
		5260	17.303	5251.3287	5268.6314	---	---
		5300	17.263	5291.3287	5308.5914	---	---
		5320	17.423	5311.3287	5328.7512	---	---
		5500	17.303	5491.3287	5508.6314	---	---
		5580	17.263	5571.4086	5588.6713	---	---
		5700	17.343	5691.3686	5708.7113	---	---
		5720	17.383	5711.2887	5728.6713	---	---
		5745	17.303	5736.3686	5753.6713	---	---
		5785	17.463	5776.2488	5793.7113	---	---
		5825	17.343	5816.2887	5833.6314	---	---
11N20SISO	Ant1	5180	18.222	5170.8891	5189.1109	---	---
		5220	18.182	5210.8891	5229.0709	---	---
		5240	18.182	5230.9690	5249.1508	---	---
		5260	18.222	5250.8492	5269.0709	---	---
		5300	18.182	5290.8891	5309.0709	---	---
		5320	18.222	5310.8891	5329.1109	---	---
		5500	18.142	5490.8891	5509.0310	---	---
		5580	18.182	5570.9291	5589.1109	---	---
		5700	18.182	5690.9291	5709.1109	---	---
		5720	18.182	5710.8891	5729.0709	---	---
		5745	18.222	5735.8891	5754.1109	---	---
		5785	18.222	5775.8492	5794.0709	---	---
		5825	18.182	5815.8891	5834.0709	---	---
11N40SISO	Ant1	5190	36.603	5171.6983	5208.3017	---	---
		5230	36.763	5211.6983	5248.4615	---	---
		5270	36.683	5251.6184	5288.3017	---	---
		5310	36.683	5291.6184	5328.3017	---	---
		5510	36.444	5491.6184	5528.0619	---	---
		5550	36.603	5531.6983	5568.3017	---	---
		5670	36.523	5651.7782	5688.3017	---	---



		5710	36.523	5691.7782	5728.3017	---	---
		5755	36.523	5736.6983	5773.2218	---	---
		5795	36.763	5776.5385	5813.3017	---	---
11AC80SISO	Ant1	5210	75.604	5172.2777	5247.8821	---	---
		5290	75.604	5252.1179	5327.7223	---	---
		5530	75.764	5491.9580	5567.7223	---	---
		5610	75.604	5572.2777	5647.8821	---	---
		5690	75.445	5652.4376	5727.8821	---	---
		5775	75.445	5737.1179	5812.5624	---	---



Test Graphs

