

FCC SAR Test Report

Report No. : SA20210104W001
Applicant : Lenovo (Shanghai) Electronics Technology Co., Ltd.
Address : Section 304-305, Building No. 4, # 222, Meiyue Road, China (Shanghai) Pilot Free Trade Zone
Product : Portable Tablet Computer
FCC ID : O57TB7306X
Brand : Lenovo
Model No. : Lenovo TB-7306X
Standards : FCC 47 CFR Part 2 (2.1093) / IEEE C95.1:1992 / IEEE 1528:2013
 KDB 865664 D01 v01r04 / KDB 865664 D02 v01r02 / KDB 248227 D01 v02r02
 KDB 447498 D01 v06 / KDB 648474 D04 v01r03 / KDB 941225 D01 v03r01
 KDB 941225 D05 v02r05 / KDB 941225 D05A v01r02 / KDB 941225 D06 v02r01
Sample Received Date : Jan. 04, 2021
Date of Testing : Jan. 08, 2020 ~ Feb. 16, 2020
FCC Designation No. : CN1171

CERTIFICATION: The above equipment have been tested by **BV 7LAYERS COMMUNICATIONS TECHNOLOGY (SHENZHEN) CO. LTD.**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's SAR characteristics under the conditions specified in this report. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product certification, approval, or endorsement by A2LA or any government agencies.

Prepared By : Jerry Chen
 Jerry Chen / Engineer
Approved By : Luke Lu
 Luke Lu / Manager



This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	3
1. Summary of Maximum SAR Value	4
2. Description of Equipment Under Test	5
3. SAR Measurement System	6
3.1 Definition of Specific Absorption Rate (SAR).....	6
3.2 SPEAG DASY System	6
3.2.1 Robot.....	7
3.2.2 Probes.....	8
3.2.3 Data Acquisition Electronics (DAE)	8
3.2.4 Phantoms	9
3.2.5 Device Holder.....	10
3.2.6 System Validation Dipoles.....	10
3.2.7 Tissue Simulating Liquids.....	11
3.3 SAR System Verification	13
3.4 SAR Measurement Procedure	14
3.4.1 Area & Zoom Scan Procedure	14
3.4.2 Volume Scan Procedure.....	14
3.4.3 Power Drift Monitoring.....	15
3.4.4 Spatial Peak SAR Evaluation	15
3.4.5 SAR Averaged Methods	15
4. SAR Measurement Evaluation	16
4.1 EUT Configuration and Setting.....	16
4.2 EUT Testing Position	23
4.2.1 Head Exposure Conditions.....	23
4.2.2 Body-worn Accessory Exposure Conditions	25
4.2.3 Hotspot Mode Exposure Conditions	26
4.2.4 Extremity Exposure Conditions	27
4.2.5 SAR Test Exclusion Evaluations	27
4.3 Tissue Verification	28
4.4 System Verification.....	28
4.5 Maximum Output Power.....	29
4.5.1 Maximum Conducted Power	29
4.5.2 Measured Conducted Power Result.....	30
4.6 SAR Testing Results.....	67
4.6.1 SAR Test Reduction Considerations	67
4.6.2 SAR Results for Head Exposure Condition	69
4.6.3 SAR Results for Body-worn Exposure Condition (Separation Distance is 1.0 cm Gap)	72
4.6.4 SAR Results for Hotspot Exposure Condition (Separation Distance is 1.0 cm Gap).....	75
4.6.5 SAR Results for Extremity Exposure Condition (Separation Distance is 0 cm Gap)	79
4.6.6 SAR Measurement Variability.....	80
4.6.7 Simultaneous Multi-band Transmission Evaluation	81
5. Calibration of Test Equipment.....	86
6. Measurement Uncertainty.....	86
7. Information on the Testing Laboratories.....	87
Appendix A. SAR Plots of System Verification	
Appendix B. SAR Plots of SAR Measurement	
Appendix C. Calibration Certificate for Probe and Dipole	
Appendix D. Photographs of EUT and Setup	

1. Summary of Maximum SAR Value

Equipment Class	Mode	Highest Reported Head SAR _{1g} (W/kg)	Highest Reported Body-worn SAR _{1g} (1.0 cm Gap) (W/kg)	Highest Reported Hotspot SAR _{1g} (1.0 cm Gap) (W/kg)	Highest Reported Extremity SAR _{10g} (0 cm Gap) (W/kg)
PCE	GSM850	1.09	0.34	0.34	0.57
	GSM1900	1.09	0.30	0.30	-
	LTE 2	0.57	0.63	0.63	-
	LTE 4	1.06	0.61	0.61	-
	LTE 5	1.05	0.45	0.45	-
	LTE 7	0.73	1.06	1.13	0.40
	LTE 41 / 38	0.86	0.43	0.53	0.45
DTS	2.4G WLAN	0.56	0.31	0.31	--
NII	5.2G WLAN	--	--	0.21	-
	5.3G WLAN	0.64	0.42	--	0.44
	5.6G WLAN	0.56	0.22	--	0.42
	5.8G WLAN	0.41	0.17	0.17	--
DSS	Bluetooth	0.11	0.03	0.03	--
Highest Simultaneous Transmission SAR		Head (W/kg)	Body-worn (W/kg)	Hotspot (W/kg)	Extremity (W/kg)
		1.49	1.24	1.24	0.80

Note:

- The SAR limit (Head & Body: SAR_{1g} 1.6 W/kg, Extremity: SAR_{10g} 4.0 W/kg) for general population / uncontrolled exposure is specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992.

2. Description of Equipment Under Test

EUT Type	Portable Tablet Computer
FCC ID	O57TB7306X
Brand Name	Lenovo
Model Name	Lenovo TB-7306X
Tx Frequency Bands (Unit: MHz)	GSM850 : 824.2 ~ 848.8 GSM1900 : 1850.2 ~ 1909.8 LTE Band 2 : 1850.7 ~ 1909.3 LTE Band 4 : 1710.7 ~ 1754.3 LTE Band 5 : 824.7 ~ 848.3 LTE Band 7 : 2502.5 ~ 2567.5 LTE Band 38 : 2572.5 ~ 2617.5 LTE Band 41 : 2498.5 ~ 2687.5 WLAN : 2412 ~ 2462, 5180 ~ 5240, 5260 ~ 5320, 5500 ~ 5700, 5745 ~ 5825 Bluetooth : 2402 ~ 2480
Uplink Modulations	GSM & GPRS : GMSK EDGE : 8PSK WCDMA : QPSK , 16QAM LTE : QPSK, 16QAM, 64QAM 802.11b : DSSS 802.11a/g/n/ac : OFDM Bluetooth : GFSK, π/4-DQPSK, 8-DPSK
Maximum Tune-up Conducted Power (Unit: dBm)	Please refer to section 4.5.1 of this report
Antenna Type	WLAN: PIFA Antenna WWAN: PIFA Antenna
EUT Stage	Identical Prototype

Note:

- The above EUT information is declared by manufacturer and for more detailed features description please refers to the manufacturer's specifications or User's Manual.
- Since the supported frequency span for LTE B38 falls completely within the LTE B41 , they have the same target power, and share the same transmission path, therefore SAR was only assessed for LTE B41 ;
- There were Sample 1, 2 for this project, the difference is as below:

SAMPLE	EUT CONFIGURATION INFORMATION
1	LCD Panel 1+Photo Camera 1+ Video Camera 1+CPU+EMMC1+ RAM 1+ BT/WLAN Module+ Battery 1
2	LCD Panel 2+Photo Camera 1+ Video Camera 2+CPU+EMMC1+ RAM 1+ BT/WLAN Module+ Battery 2

- Power reduction for RF exposure consideration

Test Scenario	SAR sensor	TX Power reduce
Head	On	Yes
Body-Worn	On	Yes
Hotspot	On	Yes
Extremity	On	Yes

3. SAR Measurement System

3.1 Definition of Specific Absorption Rate (SAR)

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

3.2 SPEAG DASY System

DASY system consists of high precision robot, probe alignment sensor, phantom, robot controller, controlled measurement server and near-field probe. The robot includes six axes that can move to the precision position of the DASY5 software defined. The DASY software can define the area that is detected by the probe. The robot is connected to controlled box. Controlled measurement server is connected to the controlled robot box. The DAE includes amplifier, signal multiplexing, AD converter, offset measurement and surface detection. It is connected to the Electro-optical coupler (ECO). The ECO performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC.

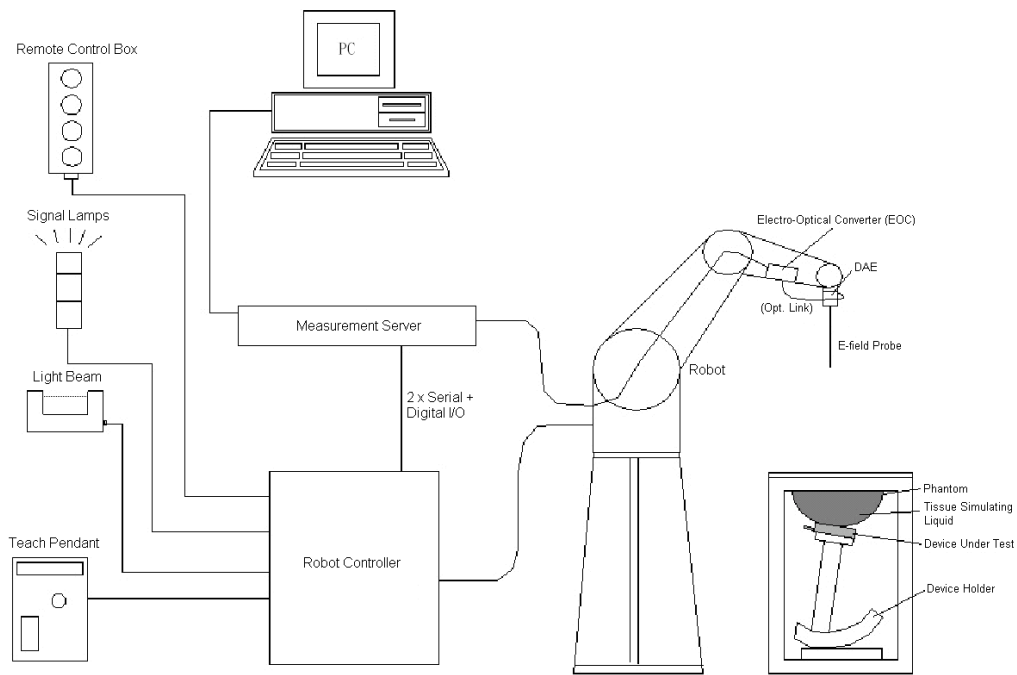


Fig-3.1 DASY System Setup

3.2.1 Robot

The DASY system uses the high precision robots from Stäubli SA (France). For the 6-axis controller system, the robot controller version (DASY5: CS8c) from Stäubli is used. The Stäubli robot series have many features that are important for our application:


- High precision (repeatability ± 0.035 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)




Fig-3.2 DASY5


3.2.2 Probes

The SAR measurement is conducted with the dosimetric probe. The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency.


Model	EX3DV4	
Construction	Symmetrical design with triangular core. Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE).	
Frequency	10 MHz to 6 GHz Linearity: ± 0.2 dB	
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)	
Dynamic Range	10 μ W/g to 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)	
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	


Model	ES3DV3	
Construction	Symmetrical design with triangular core. Interleaved sensors. Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE).	
Frequency	10 MHz to 4 GHz Linearity: ± 0.2 dB	
Directivity	± 0.2 dB in HSL (rotation around probe axis) ± 0.3 dB in tissue material (rotation normal to probe axis)	
Dynamic Range	5 μ W/g to 100 mW/g Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 3.9 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.0 mm	

3.2.3 Data Acquisition Electronics (DAE)


Model	DAE3, DAE4	
Construction	Signal amplifier, multiplexer, A/D converter and control logic. Serial optical link for communication with DASY embedded system (fully remote controlled). Two step probe touch detector for mechanical surface detection and emergency robot stop.	
Measurement Range	-100 to +300 mV (16 bit resolution and two range settings: 4mV, 400mV)	
Input Offset Voltage	< 5 μ V (with auto zero)	
Input Bias Current	< 50 fA	
Dimensions	60 x 60 x 68 mm	


3.2.4 Phantoms

Model	Twin SAM	
Construction	The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.	
Material	Vinylester, glass fiber reinforced (VE-GF)	
Shell Thickness	2 ± 0.2 mm (6 ± 0.2 mm at ear point)	
Dimensions	Length: 1000 mm Width: 500 mm Height: adjustable feet	
Filling Volume	approx. 25 liters	


Model	ELI	
Construction	Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.	
Material	Vinylester, glass fiber reinforced (VE-GF)	
Shell Thickness	2.0 ± 0.2 mm (bottom plate)	
Dimensions	Major axis: 600 mm Minor axis: 400 mm	
Filling Volume	approx. 30 liters	

3.2.5 Device Holder

Model	Mounting Device	
Construction	In combination with the Twin SAM Phantom or ELI4, the Mounting Device enables the rotation of the mounted transmitter device in spherical coordinates. Rotation point is the ear opening point. Transmitter devices can be easily and accurately positioned according to IEC, IEEE, FCC or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat).	
Material	POM	


Model	Laptop Extensions Kit	
Construction	Simple but effective and easy-to-use extension for Mounting Device that facilitates the testing of larger devices according to IEC 62209-2 (e.g., laptops, cameras, etc.). It is lightweight and fits easily on the upper part of the Mounting Device in place of the phone positioner.	
Material	POM, Acrylic glass, Foam	

3.2.6 System Validation Dipoles

Model	D-Serial	
Construction	Symmetrical dipole with 1/4 balun. Enables measurement of feed point impedance with NWA. Matched for use near flat phantoms filled with tissue simulating solutions.	
Frequency	750 MHz to 5800 MHz	
Return Loss	> 20 dB	
Power Capability	> 100 W (f < 1GHz), > 40 W (f > 1GHz)	

3.2.7 Tissue Simulating Liquids

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5% are listed in Table-3.1.

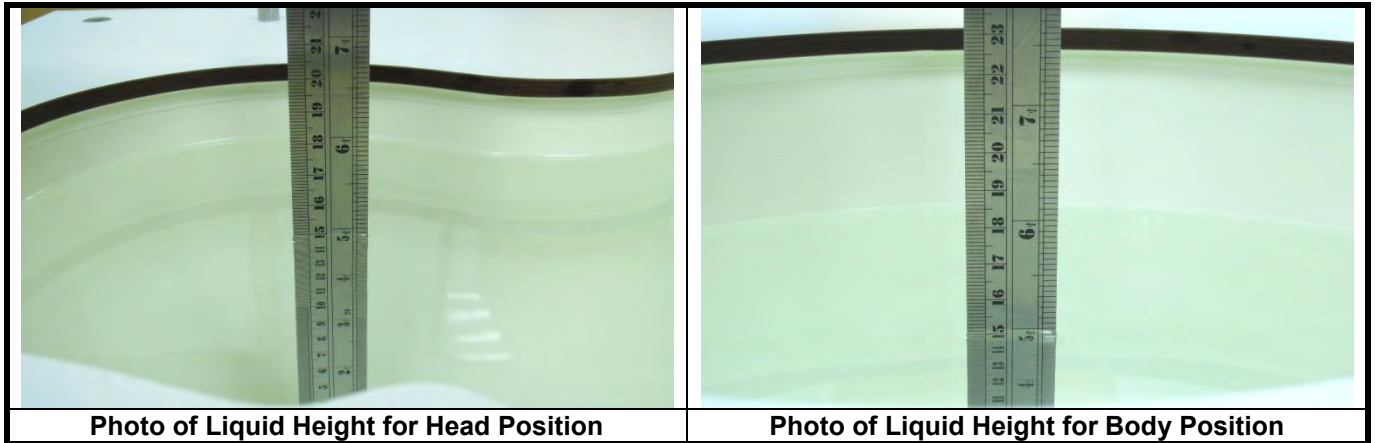

The dielectric properties of the head tissue simulating liquids are defined in IEEE 1528, and KDB 865664 D01 Appendix A. The dielectric properties of the tissue simulating liquids were verified prior to the SAR evaluation using a dielectric assessment kit and a network analyzer.

Table-3.1 Targets of Tissue Simulating Liquid

Frequency (MHz)	Target Permittivity	Range of ±5%	Target Conductivity	Range of ±5%
For Head				
750	41.9	39.8 ~ 44.0	0.89	0.85 ~ 0.93
835	41.5	39.4 ~ 43.6	0.90	0.86 ~ 0.95
900	41.5	39.4 ~ 43.6	0.97	0.92 ~ 1.02
1450	40.5	38.5 ~ 42.5	1.20	1.14 ~ 1.26
1640	40.3	38.3 ~ 42.3	1.29	1.23 ~ 1.35
1750	40.1	38.1 ~ 42.1	1.37	1.30 ~ 1.44
1800	40.0	38.0 ~ 42.0	1.40	1.33 ~ 1.47
1900	40.0	38.0 ~ 42.0	1.40	1.33 ~ 1.47
2000	40.0	38.0 ~ 42.0	1.40	1.33 ~ 1.47
2300	39.5	37.5 ~ 41.5	1.67	1.59 ~ 1.75
2450	39.2	37.2 ~ 41.2	1.80	1.71 ~ 1.89
2600	39.0	37.1 ~ 41.0	1.96	1.86 ~ 2.06
3500	37.9	36.0 ~ 39.8	2.91	2.76 ~ 3.06
5200	36.0	34.2 ~ 37.8	4.66	4.43 ~ 4.89
5300	35.9	34.1 ~ 37.7	4.76	4.52 ~ 5.00
5500	35.6	33.8 ~ 37.4	4.96	4.71 ~ 5.21
5600	35.5	33.7 ~ 37.3	5.07	4.82 ~ 5.32
5800	35.3	33.5 ~ 37.1	5.27	5.01 ~ 5.53

The following table gives the recipes for tissue simulating liquids.

Table-3.2 Recipes of Tissue Simulating Liquid

Tissue Type	Bactericide	DGBE	HEC	NaCl	Sucrose	Triton X-100	Water	Diethylene Glycol Mono-hexylether
H750	0.2	-	0.2	1.5	56.0	-	42.1	-
H835	0.2	-	0.2	1.5	57.0	-	41.1	-
H900	0.2	-	0.2	1.4	58.0	-	40.2	-
H1450	-	43.3	-	0.6	-	-	56.1	-
H1640	-	45.8	-	0.5	-	-	53.7	-
H1750	-	47.0	-	0.4	-	-	52.6	-
H1800	-	44.5	-	0.3	-	-	55.2	-
H1900	-	44.5	-	0.2	-	-	55.3	-
H2000	-	44.5	-	0.1	-	-	55.4	-
H2300	-	44.9	-	0.1	-	-	55.0	-
H2450	-	45.0	-	0.1	-	-	54.9	-
H2600	-	45.1	-	0.1	-	-	54.8	-
H3500	-	8.0	-	0.2	-	20.0	71.8	-
H5G	-	-	-	-	-	17.2	65.5	17.3

3.3 SAR System Verification

The system check verifies that the system operates within its specifications. It is performed daily or before every SAR measurement. The system check uses normal SAR measurements in the flat section of the phantom with a matched dipole at a specified distance. The system verification setup is shown as below.

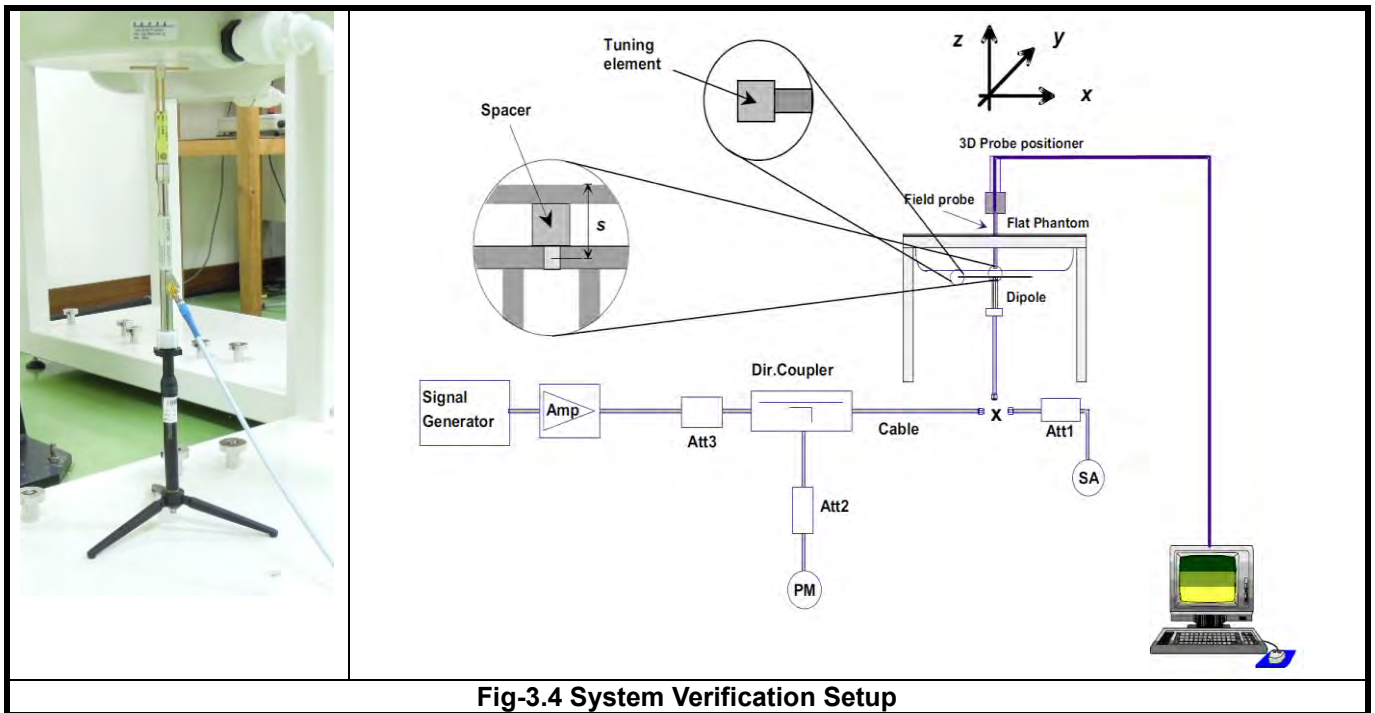


Fig-3.4 System Verification Setup

The validation dipole is placed beneath the flat phantom with the specific spacer in place. The distance spacer is touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The spectrum analyzer measures the forward power at the location of the system check dipole connector. The signal generator is adjusted for the desired forward power (250 mW is used for 700 MHz to 3 GHz, 100 mW is used for 3.5 GHz to 6 GHz) at the dipole connector and the power meter is read at that level. After connecting the cable to the dipole, the signal generator is readjusted for the same reading at power meter.

After system check testing, the SAR result will be normalized to 1W forward input power and compared with the reference SAR value derived from validation dipole certificate report. The deviation of system check should be within 10 %.

3.4 SAR Measurement Procedure

According to the SAR test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

The SAR measurement procedures for each of test conditions are as follows:

- (a) Make EUT to transmit maximum output power
- (b) Measure conducted output power through RF cable
- (c) Place the EUT in the specific position of phantom
- (d) Perform SAR testing steps on the DASY system
- (e) Record the SAR value

3.4.1 Area & Zoom Scan Procedure

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g. According to KDB 865664 D01, the resolution for Area and Zoom scan is specified in the table below.

Items	<= 2 GHz	2-3 GHz	3-4 GHz	4-5 GHz	5-6 GHz
Area Scan ($\Delta x, \Delta y$)	<= 15 mm	<= 12 mm	<= 12 mm	<= 10 mm	<= 10 mm
Zoom Scan ($\Delta x, \Delta y$)	<= 8 mm	<= 5 mm	<= 5 mm	<= 4 mm	<= 4 mm
Zoom Scan (Δz)	<= 5 mm	<= 5 mm	<= 4 mm	<= 3 mm	<= 2 mm
Zoom Scan Volume	>= 30 mm	>= 30 mm	>= 28 mm	>= 25 mm	>= 22 mm

Note:

When zoom scan is required and report SAR is <= 1.4 W/kg, the zoom scan resolution of $\Delta x / \Delta y$ (2-3GHz: <= 8 mm, 3-4GHz: <= 7 mm, 4-6GHz: <= 5 mm) may be applied.

3.4.2 Volume Scan Procedure

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

3.4.3 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASYS measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.

3.4.4 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASYS software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

3.4.5 SAR Averaged Methods

In DASYS, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.

4. SAR Measurement Evaluation

4.1 EUT Configuration and Setting

<Considerations Related to Proximity Sensor>

The device supports WWAN, WLAN, and Bluetooth capabilities. It is designed with two proximity sensor which can trigger/not trigger power reduction for GSM LTE and WLAN on Front Face, Rear Face and Top Side of EUT for SAR compliance. Others RF capability (Bluetooth) have no power reduction. The power levels for all wireless technologies and the power reduction please refer to section 4.5 of this report.

Proximity Sensor Triggering Distances (KDB 616217 D04 §6.2)

The proximity sensor triggering distance was determined per KDB 616217 for rear face and applicable edge. Summary for power verification per distance was tabulated in the below table.

WWAN

Output Power Verification in dBm for EUT Front Face											
Distance (mm)	18	19	20	21	22	23	24	25	26	27	28
GSM850	21.5	21.5	21.5	21.5	21.5	28.5	28.5	28.5	28.5	28.5	28.5
GSM1900	23.5	23.5	23.5	23.5	23.5	25.0	25.0	25.0	25.0	25.0	25.0
LTE 2	15.0	15.0	15.0	15.0	15.0	23.5	23.5	23.5	23.5	23.5	23.5
LTE 4	18.0	18.0	18.0	18.0	18.0	23.5	23.5	23.5	23.5	23.5	23.5
LTE 5	20.0	20.0	20.0	20.0	20.0	25.0	25.0	25.0	25.0	25.0	25.0
LTE 7	13.0	13.0	13.0	13.0	13.0	23.0	23.0	23.0	23.0	23.0	23.0
LTE 38	16.0	16.0	16.0	16.0	16.0	24.0	24.0	24.0	24.0	24.0	24.0
LTE 41	16.0	16.0	16.0	16.0	16.0	24.0	24.0	24.0	24.0	24.0	24.0

Output Power Verification in dBm for EUT Rear Face											
Distance (mm)	11	12	13	14	15	16	17	18	19	20	21
GSM850	21.5	21.5	21.5	21.5	21.5	28.5	28.5	28.5	28.5	28.5	28.5
GSM1900	23.5	23.5	23.5	23.5	23.5	25.0	25.0	25.0	25.0	25.0	25.0
LTE 2	15.0	15.0	15.0	15.0	15.0	23.5	23.5	23.5	23.5	23.5	23.5
LTE 4	18.0	18.0	18.0	18.0	18.0	23.5	23.5	23.5	23.5	23.5	23.5
LTE 5	20.0	20.0	20.0	20.0	20.0	25.0	25.0	25.0	25.0	25.0	25.0
LTE 7	13.0	13.0	13.0	13.0	13.0	23.0	23.0	23.0	23.0	23.0	23.0
LTE 38	16.0	16.0	16.0	16.0	16.0	24.0	24.0	24.0	24.0	24.0	24.0
LTE 41	16.0	16.0	16.0	16.0	16.0	24.0	24.0	24.0	24.0	24.0	24.0

Output Power Verification in dBm for EUT Top Side											
Distance (mm)	20	21	22	23	24	25	26	27	28	29	30
GSM850	21.5	21.5	21.5	21.5	21.5	28.5	28.5	28.5	28.5	28.5	28.5
GSM1900	23.5	23.5	23.5	23.5	23.5	25.0	25.0	25.0	25.0	25.0	25.0
LTE 2	15.0	15.0	15.0	15.0	15.0	23.5	23.5	23.5	23.5	23.5	23.5
LTE 4	18.0	18.0	18.0	18.0	18.0	23.5	23.5	23.5	23.5	23.5	23.5
LTE 5	20.0	20.0	20.0	20.0	20.0	25.0	25.0	25.0	25.0	25.0	25.0
LTE 7	13.0	13.0	13.0	13.0	13.0	23.0	23.0	23.0	23.0	23.0	23.0
LTE 38	16.0	16.0	16.0	16.0	16.0	24.0	24.0	24.0	24.0	24.0	24.0
LTE 41	16.0	16.0	16.0	16.0	16.0	24.0	24.0	24.0	24.0	24.0	24.0

WLAN

Output Power Verification in dBm for EUT Front Face											
Distance (mm)	10	11	12	13	14	15	16	17	18	19	20
WLAN2.4G	14.3	14.3	14.3	14.3	14.3	19.8	19.8	19.8	19.8	19.8	19.8
WLAN5.2G	14.5	14.5	14.5	14.5	14.5	17.0	17.0	17.0	17.0	17.0	17.0
WLAN5.3G	14.5	14.5	14.5	14.5	14.5	17.0	17.0	17.0	17.0	17.0	17.0
WLAN5.6G	14.5	14.5	14.5	14.5	14.5	17.0	17.0	17.0	17.0	17.0	17.0
WLAN5.8G	14.5	14.5	14.5	14.5	14.5	17.0	17.0	17.0	17.0	17.0	17.0

Output Power Verification in dBm for EUT Rear Face											
Distance (mm)	3	4	5	6	7	8	9	10	11	12	13
WLAN2.4G	14.3	14.3	14.3	14.3	14.3	19.8	19.8	19.8	19.8	19.8	19.8
WLAN5.2G	14.5	14.5	14.5	14.5	14.5	17.0	17.0	17.0	17.0	17.0	17.0
WLAN5.3G	14.5	14.5	14.5	14.5	14.5	17.0	17.0	17.0	17.0	17.0	17.0
WLAN5.6G	14.5	14.5	14.5	14.5	14.5	17.0	17.0	17.0	17.0	17.0	17.0
WLAN5.8G	14.5	14.5	14.5	14.5	14.5	17.0	17.0	17.0	17.0	17.0	17.0


Output Power Verification in dBm for EUT Top Side											
Distance (mm)	12	13	14	15	16	17	18	19	20	21	22
WLAN2.4G	14.3	14.3	14.3	14.3	14.3	19.8	19.8	19.8	19.8	19.8	19.8
WLAN5.2G	14.5	14.5	14.5	14.5	14.5	17.0	17.0	17.0	17.0	17.0	17.0
WLAN5.3G	14.5	14.5	14.5	14.5	14.5	17.0	17.0	17.0	17.0	17.0	17.0
WLAN5.6G	14.5	14.5	14.5	14.5	14.5	17.0	17.0	17.0	17.0	17.0	17.0
WLAN5.8G	14.5	14.5	14.5	14.5	14.5	17.0	17.0	17.0	17.0	17.0	17.0

Proximity Sensor Coverage (KDB 616217 D04 §6.3)

Since the proximity sensor is collocated with antenna in one component, the procedure for proximity sensor coverage is not required.

Proximity Sensor Tilt Angle Influences(KDB 616217 D04 §6.4)

The proximity sensor tilt angle influence was determined per KDB 616217 for applicable edge. Summary for proximity sensor tilt angle influence is shown in below.

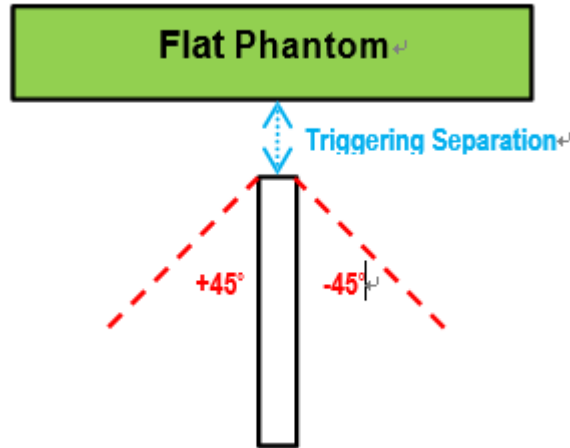

WWAN

Orientation	Separation Distance (mm)	Tilt Angle										
		-45°	-40°	-30°	-20°	-10°	0°	10°	20°	30°	40°	45°
Top Side	24	On	On	On	On	On	On	On	On	On	On	On

WLAN

Orientation	Separation Distance (mm)	Tilt Angle										
		-45°	-40°	-30°	-20°	-10°	0°	10°	20°	30°	40°	45°
Top Side	16	On	On	On	On	On	On	On	On	On	On	On

Summary for Proximity Sensor Triggering Test

According to the procedures noticed in KDB 616217 D04,

The WWAN for proximity sensor triggering distance is 22 mm for EUT Front Face, 15 mm for EUT Rear Face and 24 mm for Top Side. The separation distance of 24 mm determined by the smallest triggering distance on Top Side is used to access the tilt angle influence and the sensor does not release during ±45 degree. Therefore, the smallest separation distance for tilt angle influence is 24 mm for the Top Side. The conservation triggering distances based on the separation distance for the sensor trigger / not triggered as EUT with power reduction at 0 mm.

The WLAN for proximity sensor triggering distance is 14 mm for EUT Front Face, 7 mm for EUT Rear Face and 16 mm for Top Side. The separation distance of 16 mm determined by the smallest triggering distance on Top Side is used to access the tilt angle influence and the sensor does not release during ±45 degree. Therefore, the smallest separation distance for tilt angle influence is 16 mm for the Top Side. The conservation triggering distances based on the separation distance for the sensor trigger / not triggered as EUT with power reduction at 0 mm.

The power reduction is depends on the proximity sensor input. For a steady SAR test, the power reduction was enabled or disabled manually by engineering software during SAR testing.

<Connections between EUT and System Simulator>

For WWAN SAR testing, the EUT was linked and controlled by base station emulator. Communication between the EUT and the emulator was established by air link. The distance between the EUT and the communicating antenna of the emulator is larger than 50 cm and the output power radiated from the emulator antenna is at least 30 dB smaller than the output power of EUT. The EUT was set from the emulator to radiate maximum output power during SAR testing.

<Considerations Related to GSM / GPRS / EDGE for Setup and Testing>

The maximum multi-slot capability supported by this device is as below.

1. This EUT is class B device
2. This EUT supports GPRS multi-slot class 33 (max. uplink: 4, max. downlink: 5, total timeslots: 6)
3. This EUT supports EDGE multi-slot class 33 (max. uplink: 4, max. downlink: 5, total timeslots: 6)

For GSM850 frequency band, the power control level is set to 5 for GSM mode and GPRS (GMSK: CS1), and set to 8 for EDGE (GMSK: MCS1, 8PSK: MCS9). For GSM1900 frequency band, the power control level is set to 0 for GSM mode and GPRS (GMSK: CS1), and set to 2 for EDGE (GMSK: MCS1, 8PSK: MCS9).

SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

<Considerations Related to LTE for Setup and Testing>

This device contains LTE transmitter which follows 3GPP standards, is category 3, supports both QPSK and 16QAM modulations, and supported LTE band and channel bandwidth is listed in below. The output power was tested per 3GPP TS 36.521-1 maximum transmit procedures for both QPSK and 16QAM modulation. The results please refer to section 4.6 of this report.

EUT Supported LTE Band and Channel Bandwidth						
LTE Band	BW 1.4 MHz	BW 3 MHz	BW 5 MHz	BW 10 MHz	BW 15 MHz	BW 20 MHz
2	V	V	V	V	V	V
4	V	V	V	V	V	V
5	V	V	V	V		
7			V	V	V	V
38			V	V	V	V
41			V	V	V	V

The LTE maximum power reduction (MPR) in accordance with 3GPP TS 36.101 is active all times during LTE operation. The allowed MPR for the maximum output power is specified in below.

Modulation	Channel Bandwidth / RB Configurations						LTE MPR Setting (dB)
	BW 1.4 MHz	BW 3 MHz	BW 5 MHz	BW 10 MHz	BW 15 MHz	BW 20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	1
16QAM	<= 5	<= 4	<= 8	<= 12	<= 16	<= 18	1
16QAM	> 5	> 4	> 8	> 12	> 16	> 18	2

64QAM	<= 5	<= 4	<= 8	<= 12	<= 16	<= 18	2
64QAM	> 5	> 4	> 8	> 12	> 16	> 18	3


Note: MPR is according to the standard and implemented in the circuit (mandatory).

In addition, the device is compliant with additional maximum power reduction (A-MPR) requirements defined in 3GPP TS 36.101 section 6.2.4 that was disabled for all FCC compliance testing.

During LTE SAR testing, the related parameters of operating band, channel bandwidth, uplink channel number, modulation type, and RB was set in base station simulator. When the EUT has registered and communicated to base station simulator, the simulator set to make EUT transmitting the maximum radiated power.

TDD-LTE Setup Configurations

According to KDB 941225 D05, SAR testing for TDD-LTE device must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP TDD-LTE configurations. The TDD-LTE of this device supports frame structure type 2 defined in 3GPP TS 36.211 section 4.2, and the frame structure configuration can be referred to below.

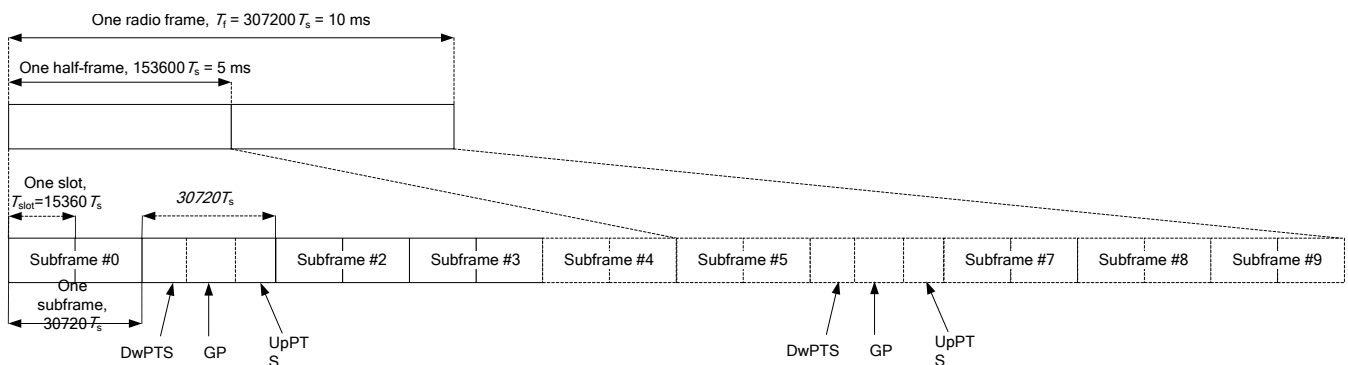

3GPP TS 36.211 Figure 4.2-1: Frame Structure Type 2

Special Subframe Configuration	Normal Cyclic Prefix in Downlink			Extended Cyclic Prefix in Downlink			
	DwPTS	UpPTS		DwPTS	UpPTS		
		Normal Cyclic Prefix in Uplink	Extended Cyclic Prefix in Uplink		Normal Cyclic Prefix in Uplink	Extended Cyclic Prefix in Uplink	
0	6592·Ts	2192·Ts	2560·Ts	7680·Ts	2192·Ts	2560·Ts	
1	19760·Ts			20480·Ts			
2	21952·Ts			23040·Ts			
3	24144·Ts			25600·Ts			
4	26336·Ts			7680·Ts			
5	6592·Ts	4384·Ts	5120·Ts	20480·Ts	4384·Ts	5120·Ts	
6	19760·Ts			23040·Ts			
7	21952·Ts			12800·Ts			
8	24144·Ts			-			-
9	13168·Ts			-			-

3GPP TS 36.211 Table 4.2-1: Configuration of Special Subframe

Uplink-Downlink Configuration	Downlink-to-Uplink Switch-Point Periodicity	Subframe Number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

3GPP TS 36.211 Table 4.2-2: Uplink-Downlink Configurations

The variety of different TD-LTE uplink-downlink configurations allows a network operator to allocate the network's capacity between uplink and downlink traffic to meet the needs of the network. The uplink duty cycle of these seven configurations can readily be computed and shown in below.

UL-DL Configuration	0	1	2	3	4	5	6
Highest Duty-Cycle	63.33%	43.33%	23.33%	31.67%	21.67%	11.67%	53.33%

Considering the highest transmission duty cycle, TDD-LTE was tested using Uplink-Downlink Configuration 0 with 6 uplink subframe and 2 special subframe. The special subframe was set to special subframe configuration 7 using extended cyclic prefix uplink. Therefore, SAR testing for TDD-LTE was performed at the maximum output power with highest transmission duty cycle of 63.33%.

<Considerations Related to WLAN for Setup and Testing>

In general, various vendor specific external test software and chipset based internal test modes are typically used for SAR measurement. These chipset based test mode utilities are generally hardware and manufacturer dependent, and often include substantial flexibility to reconfigure or reprogram a device. A Wi-Fi device must be configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools for SAR measurement. The test frequencies established using test mode must correspond to the actual channel frequencies. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 - 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. In addition, a periodic transmission duty factor is required for current generation SAR systems to measure SAR correctly. The reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

According to KDB 248227 D01, this device has installed WLAN engineering testing software which can provide continuous transmitting RF signal. During WLAN SAR testing, this device was operated to transmit continuously at the maximum transmission duty with specified transmission mode, operating frequency, lowest data rate, and maximum output power.

Initial Test Configuration

An initial test configuration is determined for OFDM transmission modes in 2.4 GHz and 5 GHz bands according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified

for production units in each standalone and aggregated frequency band. When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.

Subsequent Test Configuration

SAR measurement requirements for the remaining 802.11 transmission mode configurations that have not been tested in the initial test configuration are determined separately for each standalone and aggregated frequency band, in each exposure condition, according to the maximum output power specified for production units. Additional power measurements may be required to determine if SAR measurements are required for subsequent highest output power channels in a subsequent test configuration. When the highest reported SAR for the initial test configuration according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for that subsequent test configuration.

SAR Test Configuration and Channel Selection

When multiple channel bandwidth configurations in a frequency band have the same specified maximum output power, the initial test configuration is using largest channel bandwidth, lowest order modulation, lowest data rate, and lowest order 802.11 mode (i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n). After an initial test configuration is determined, if multiple test channels have the same measured maximum output power, the channel chosen for SAR measurement is determined according to the following.

- 1) The channel closest to mid-band frequency is selected for SAR measurement.
- 2) For channels with equal separation from mid-band frequency; for example, high and low channels or two mid-band channels, the higher frequency (number) channel is selected for SAR measurement.

Test Reduction for U-NII-1 (5.2 GHz) and U-NII-2A (5.3 GHz) Bands

For devices that operate in both U-NII bands using the same transmitter and antenna(s), SAR test reduction is determined according to the following.

- 1) When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition).
- 2) When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration.

<Considerations Related to Bluetooth for Setup and Testing>

This device has installed Bluetooth engineering testing software which can provide continuous transmitting RF signal. During Bluetooth SAR testing, this device was operated to transmit continuously at the maximum transmission duty with specified transmission mode, operating frequency, lowest data rate, and maximum output power.

4.2 EUT Testing Position

4.2.1 Head Exposure Conditions

Head exposure is limited to next to the ear voice mode operations. Head SAR compliance is tested according to the test positions defined in IEEE Std 1528-2003 using the SAM phantom illustrated as below.

1. Define two imaginary lines on the handset
 - (a) The vertical centerline passes through two points on the front side of the handset - the midpoint of the width w_t of the handset at the level of the acoustic output, and the midpoint of the width w_b of the bottom of the handset.
 - (b) The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output. The horizontal line is also tangential to the face of the handset at point A.
 - (c) The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.

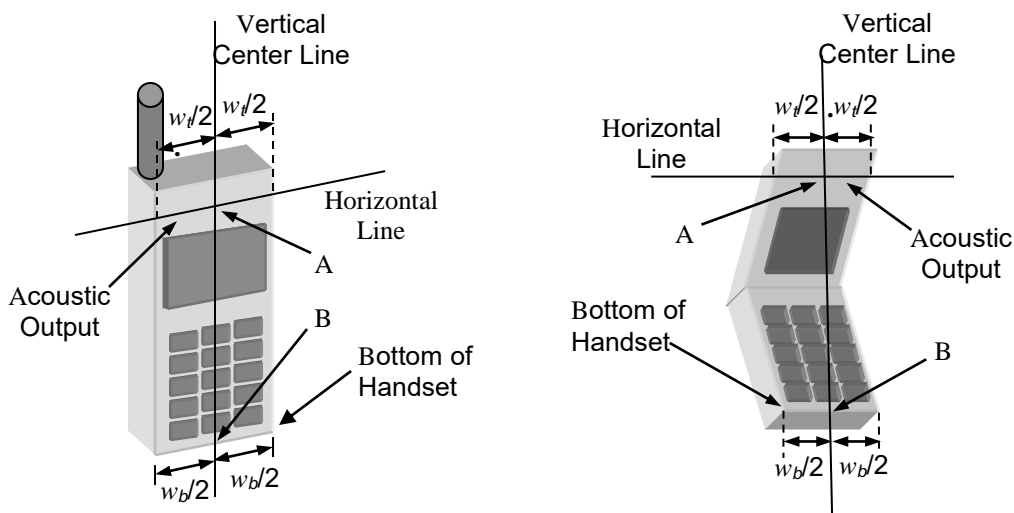


Fig-4.1 Illustration for Handset Vertical and Horizontal Reference Lines

2. Cheek Position

- (a) To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the three ear and mouth reference point (M: Mouth, RE: Right Ear, and LE: Left Ear) and align the center of the ear piece with the line RE-LE.
- (b) To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost (see Fig-4.2).

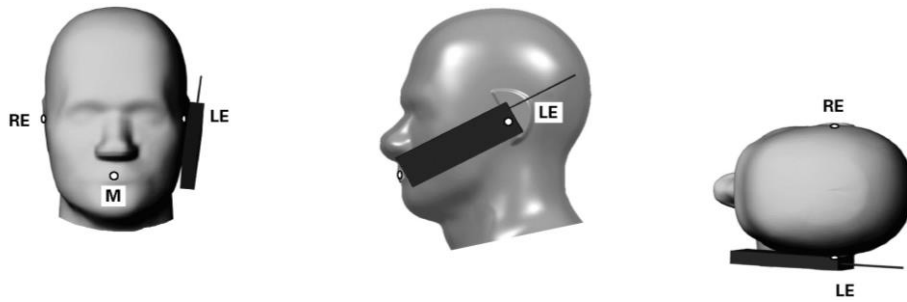


Fig-4.2 Illustration for Cheek Position

3. Tilted Position

- (a) To position the device in the “cheek” position described above.
- (b) While maintaining the device the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost (see Fig-4.3).

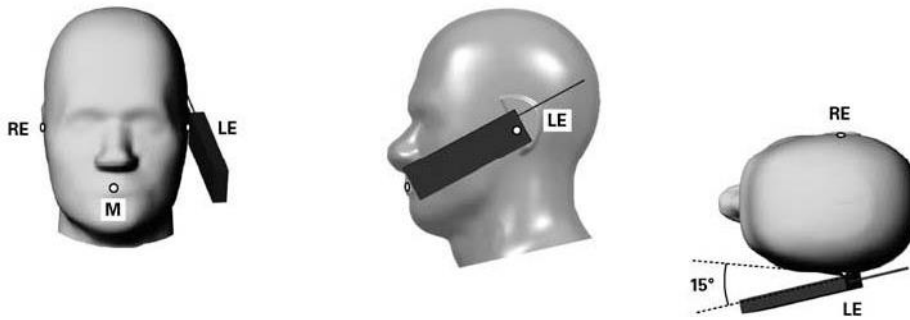


Fig-4.3 Illustration for Tilted Position

4.2.2 Body-worn Accessory Exposure Conditions

Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in KDB 447498 D01 are used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Body-worn accessories that do not contain metallic or conductive components may be tested according to worst-case exposure configurations, typically according to the smallest test separation distance required for the group of body-worn accessories with similar operating and exposure characteristics. All body-worn accessories containing metallic components are tested in conjunction with the host device.

Body-worn accessory SAR compliance is based on a single minimum test separation distance for all wireless and operating modes applicable to each body-worn accessory used by the host, and according to the relevant voice and/or data mode transmissions and operations. If a body-worn accessory supports voice only operations in its normal and expected use conditions, testing of data mode for body-worn compliance is not required.

A conservative minimum test separation distance for supporting off-the-shelf body-worn accessories that may be acquired by users of consumer handsets is used to test for body-worn accessory SAR compliance. This distance is determined by the handset manufacturer, according to the requirements of Supplement C 01-01. Devices that are designed to operate on the body of users using lanyards and straps, or without requiring additional body-worn accessories, will be tested using a conservative minimum test separation distance ≤ 5 mm to support compliance.


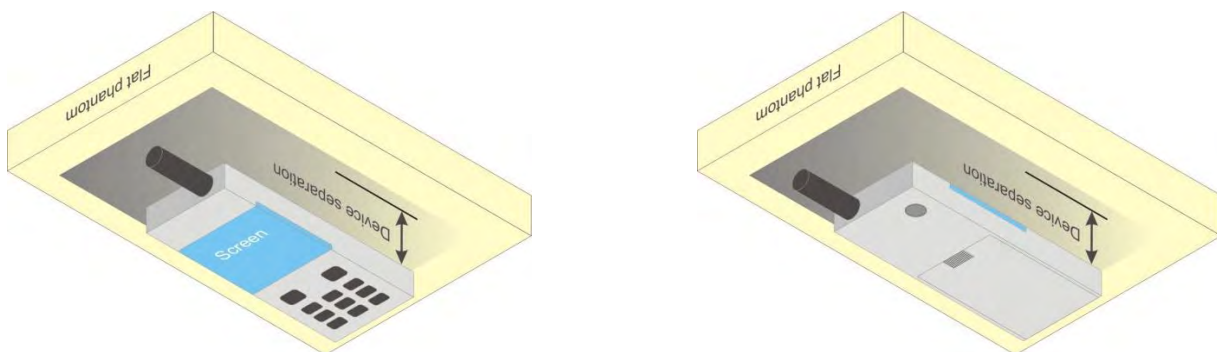


Fig-4.4 Illustration for Body Worn Position

4.2.3 Hotspot Mode Exposure Conditions

For handsets that support hotspot mode operations, with wireless router capabilities and various web browsing functions, the relevant hand and body exposure conditions are tested according to the hotspot SAR procedures in KDB 941225 D06. A test separation distance of 10 mm is required between the phantom and all surfaces and edges with a transmitting antenna located within 25 mm from that surface or edge. When the form factor of a handset is smaller than 9 cm x 5 cm, a test separation distance of 5 mm (instead of 10 mm) is required for testing hotspot mode. When the separation distance required for body-worn accessory testing is larger than or equal to that tested for hotspot mode, in the same wireless mode and for the same surface of the phone, the hotspot mode SAR data may be used to support body-worn accessory SAR compliance for that particular configuration (surface).

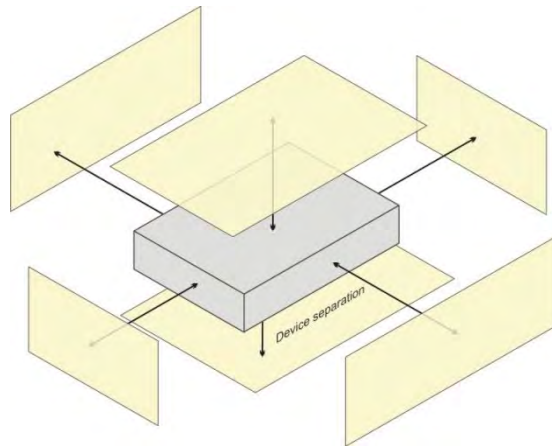

Based on the antenna location shown on appendix D of this report, the SAR testing required for hotspot mode is listed as below.

Antenna	Front Face	Rear Face	Left Side	Right Side	Top Side	Bottom Side
WWAN	✓	✓		✓	✓	
WLAN	✓	✓	✓		✓	

4.2.4 Extremity Exposure Conditions

For smart phones with a display diagonal dimension > 15 cm or an overall diagonal dimension > 16 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance.

1. The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.
2. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at <= 25 mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions. The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g SAR > 1.2 W/kg. The normal tablet procedures in KDB 616217 are required when the over diagonal dimension of the device is > 20 cm. Hotspot mode SAR is not required when normal tablet procedures are applied. Extremity 10-g SAR is also not required for the front (top) surface of large form factor full size tablets. The more conservative tablet SAR results can be used to support the 10-g extremity SAR for phablet mode.
3. The simultaneous transmission operating configurations applicable to voice and data transmissions for both phone and mini-tablet modes must be taken into consideration separately for 1-g and 10-g SAR to determine the simultaneous transmission SAR test exclusion and measurement requirements for the relevant wireless modes and exposure conditions.

4.2.5 SAR Test Exclusion Evaluations

According to KDB 447498 D01, the SAR test exclusion condition is based on source-based time-averaged maximum conducted output power, adjusted for tune-up tolerance, and the minimum test separation distance required for the exposure conditions. The SAR exclusion threshold is determined by the following formula.

$$\frac{\text{Max. Tune up Power}_{(mW)}}{\text{Min. Test Separation Distance}_{(mm)}} \times \sqrt{f_{(GHz)}} \leq 3.0 \text{ for SAR-1g, } \leq 7.5 \text{ for SAR-10g}$$

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Mode	Max. Tune-up Power (dBm)	Max. Tune-up Power (mW)	Ant. to Surface (mm)	Calculated Result	Require SAR Testing?
BT	10.5	11.22	5	3.53	Yes

Note:

1. When separation distance <= 50 mm and the calculated result shown in above table is <= 3.0 for SAR-1g exposure condition, or <= 7.5 for SAR-10g exposure condition, the SAR testing exclusion is applied.

4.3 Tissue Verification

The measuring results for tissue simulating liquid are shown as below.

Test Date	Tissue Type	Frequency (MHz)	Liquid Temp. (°C)	Measured Conductivity (σ)	Measured Permittivity (ε _r)	Target Conductivity (σ)	Target Permittivity (ε _r)	Conductivity Deviation (%)	Permittivity Deviation (%)
Jan. 08, 2021	Head	835	22.3	0.904	41.721	0.90	41.50	0.44	0.53
Jan. 09, 2021	Head	1750	22.5	1.349	40.761	1.37	40.10	-1.53	1.65
Jan. 10, 2021	Head	1900	22.4	1.430	39.760	1.40	40.00	2.14	-0.60
Jan. 11, 2021	Head	2450	22.3	1.832	38.661	1.80	39.20	1.78	-1.38
Jan. 12, 2021	Head	2600	22.2	2.019	38.932	1.96	39.00	3.01	-0.17
Jan. 16, 2021	Head	2600	22.8	2.055	38.321	1.96	39.00	4.85	-1.74
Jan. 13, 2021	Head	5250	22.4	4.723	37.284	4.71	35.90	0.28	3.86
Jan. 14, 2021	Head	5600	22.3	5.065	36.806	5.07	35.50	-0.10	3.68
Jan. 15, 2021	Head	5800	22.5	5.268	36.541	5.27	35.30	-0.04	3.52

Note:

The dielectric properties of the tissue simulating liquid must be measured within 24 hours before the SAR testing and within ±5% of the target values. Liquid temperature during the SAR testing must be within ±2 °C.

4.4 System Verification

The measuring result for system verification is tabulated as below.

Test Date	Frequency (MHz)	1W Target SAR-1g (W/kg)	Measured SAR-1g (W/kg)	Normalized to 1W SAR-1g (W/kg)	Deviation (%)	Dipole S/N	Probe S/N	DAE S/N
Jan. 08, 2021	835	9.69	2.46	9.84	1.55	4d139	3873	1341
Jan. 09, 2021	1750	35.60	9.31	37.24	4.61	1071	3873	1341
Jan. 10, 2021	1900	39.40	10.40	41.60	5.58	5d159	3873	1341
Jan. 11, 2021	2450	53.10	13.20	52.80	-0.56	893	3873	1341
Jan. 12, 2021	2600	57.30	14.20	56.80	-0.87	1110	3873	1341
Jan. 16, 2021	2600	57.30	14.90	59.60	4.01	1110	3873	1341
Jan. 13, 2021	5250	79.00	8.05	80.50	1.90	1133	3873	1341
Jan. 14, 2021	5600	84.30	7.97	79.70	-5.46	1133	3873	1341
Jan. 15, 2021	5800	81.10	8.69	86.90	7.15	1133	3873	1341

Note:

Comparing to the reference SAR value provided by SPEAG, the validation data should be within its specification of 10 %. The result indicates the system check can meet the variation criterion and the plots can be referred to Appendix A of this report.

4.5 Maximum Output Power

4.5.1 Maximum Conducted Power

The maximum conducted average power (Unit: dBm) including tune-up tolerance is shown as below.

Mode	GSM850		GSM1900	
	Full Power	Reduce Power	Full Power	Reduce Power
GSM (GMSK, 1Tx-slot)	34.0	27.5	31.0	28.0
GPRS (GMSK, 1Tx-slot)	34.0	27.5	31.0	28.0
GPRS (GMSK, 2Tx-slot)	31.5	24.5	27.5	25.0
GPRS (GMSK, 3Tx-slot)	29.5	22.5	26.0	24.5
GPRS (GMSK, 4Tx-slot)	28.5	21.5	25.0	23.5
EDGE (8PSK, 1Tx-slot)	27.0	23.0	26.5	24.5
EDGE (8PSK, 2Tx-slot)	25.0	20.0	23.5	21.5
EDGE (8PSK, 3Tx-slot)	23.5	18.0	22.5	21.5
EDGE (8PSK, 4Tx-slot)	21.5	17.0	21.5	21.0

Mode	LTE 2		LTE 4		LTE 5		LTE 7		LTE 38 / 41	
	Full Power	Reduce Power	Full Power	Reduce Power	Full Power	Reduce Power	Full Power	Reduce Power	Full Power	Reduce Power
QPSK	23.5	15.5	23.5	18.0	25.0	20.0	23.0	13.0	24.0	16.0
16QAM	22.5	15.5	22.5	18.0	24.0	20.0	22.0	13.0	23.0	16.0
64QAM	21.5	15.5	21.5	18.0	23.0	20.0	21.0	13.0	22.0	16.0

Mode	2.4G WLAN		5.2G WLAN		5.3G WLAN		5.6G WLAN		5.8G WLAN	
	Full Power	Reduce Power	Full Power	Reduce Power	Full Power	Reduce Power	Full Power	Reduce Power	Full Power	Reduce Power
802.11b	19.8	14.3	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11g	17.8	14.3	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
802.11a	N/A	N/A	17.0	14.5	17.0	14.5	17.0	14.5	17.0	14.5
802.11n HT20	16.8	14.3	15.8	13.8	15.8	13.8	15.8	13.8	15.8	13.8
802.11n HT40	N/A	N/A	15.8	13.8	15.8	13.8	15.8	13.8	15.8	13.8
802.11ac VHT20	N/A	N/A	16.3	13.8	16.3	13.8	16.3	13.8	16.3	13.8
802.11ac VHT40	N/A	N/A	14.3	13.8	14.3	13.8	14.3	13.8	14.3	13.8
802.11ac VHT80	N/A	N/A	14.3	13.8	14.3	13.8	14.3	13.8	14.3	13.8

Mode	2.4G Bluetooth
BR/EDR	10.5
LE	-1.5

4.5.2 Measured Conducted Power Result

The measuring conducted average power (Unit: dBm) is shown as below.

<Full Power>

Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency (MHz)	824.2	836.4	848.8	1850.2	1880.0	1909.8
Maximum Burst-Averaged Output Power						
GSM (GMSK, 1Tx-slot)	32.56	32.60	32.64	29.39	29.49	29.72
GPRS (GMSK, 1Tx-slot)	32.53	32.58	32.61	29.37	29.51	29.67
GPRS (GMSK, 2Tx-slot)	29.51	29.55	29.61	25.96	26.04	26.26
GPRS (GMSK, 3Tx-slot)	27.89	28.01	28.04	24.51	24.65	24.83
GPRS (GMSK, 4Tx-slot)	26.86	26.98	27.02	23.45	23.71	23.85
EDGE (8PSK, 1Tx-slot)	25.67	25.83	25.52	24.61	24.67	24.54
EDGE (8PSK, 2Tx-slot)	23.14	23.12	23.25	22.44	22.03	21.91
EDGE (8PSK, 3Tx-slot)	21.78	21.96	21.77	21.22	21.06	20.98
EDGE (8PSK, 4Tx-slot)	20.16	20.24	19.94	19.98	19.79	19.72
Maximum Frame-Averaged Output Power						
GSM (GMSK, 1Tx-slot)	23.56	23.60	23.64	20.39	20.49	20.72
GPRS (GMSK, 1Tx-slot)	23.53	23.58	23.61	20.37	20.51	20.67
GPRS (GMSK, 2Tx-slot)	23.51	23.55	23.61	19.96	20.04	20.26
GPRS (GMSK, 3Tx-slot)	23.63	23.75	23.78	20.25	20.39	20.57
GPRS (GMSK, 4Tx-slot)	23.86	23.98	24.02	20.45	20.71	20.85
EDGE (8PSK, 1Tx-slot)	16.67	16.83	16.52	15.61	15.67	15.54
EDGE (8PSK, 2Tx-slot)	17.14	17.12	17.25	16.44	16.03	15.91
EDGE (8PSK, 3Tx-slot)	17.52	17.70	17.51	16.96	16.80	16.72
EDGE (8PSK, 4Tx-slot)	17.16	17.24	16.94	16.98	16.79	16.72

Note:

- SAR testing was performed on the maximum frame-averaged power mode.
- The frame-averaged power is linearly proportion to the slot number configured and it is linearly scaled the maximum burst-averaged power based on time slots. The calculated method is shown as below:

$$\text{Frame-averaged power} = 10 \times \log (\text{Burst-averaged power mW} \times \text{Slot used} / 8)$$

LTE Band 2							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		18700	18900	19100	
		Frequency (MHz)		1860	1880	1900	
20M	QPSK	1	0	22.22	21.93	22.08	0
		1	50	22.51	22.22	22.37	0
		1	99	22.09	21.80	21.95	0
		50	0	21.79	21.50	21.65	1
		50	25	21.81	21.52	21.67	1
		50	50	21.80	21.51	21.66	1
		100	0	21.88	21.59	21.74	1
	16QAM	1	0	21.71	21.42	21.57	1
		1	50	22.04	21.75	21.90	1
		1	99	21.91	21.62	21.77	1
		50	0	21.32	21.03	21.18	2
		50	25	21.35	21.06	21.21	2
		50	50	21.47	21.18	21.33	2
		100	0	21.38	21.09	21.24	2
	64QAM	1	0	20.15	19.86	20.01	2
		1	50	20.44	20.15	20.30	2
		1	99	20.01	19.72	19.87	2
		50	0	19.30	19.01	19.16	3
		50	25	19.28	18.99	19.14	3
		50	50	19.41	19.12	19.27	3
		100	0	19.37	19.08	19.23	3
BW	MCS Index	Channel		18675	18900	19125	3GPP MPR
		Frequency (MHz)		1857.5	1880	1902.5	
15M	QPSK	1	0	22.21	21.89	22.00	0
		1	37	22.47	22.19	22.31	0
		1	74	22.07	21.79	21.91	0
		36	0	21.73	21.45	21.64	1
		36	19	21.80	21.50	21.62	1
		36	39	21.72	21.44	21.64	1
		75	0	21.87	21.55	21.71	1
	16QAM	1	0	21.68	21.41	21.51	1
		1	37	22.00	21.70	21.88	1
		1	74	21.85	21.60	21.74	1
		36	0	21.30	20.95	21.17	2
		36	19	21.27	21.02	21.16	2
		36	39	21.44	21.12	21.31	2
		75	0	21.37	21.04	21.16	2
	64QAM	1	0	20.09	19.83	19.97	2
		1	37	20.42	20.08	20.25	2
		1	74	19.95	19.64	19.85	2
		36	0	19.29	18.99	19.08	3
		36	19	19.21	18.91	19.08	3
		36	39	19.39	19.11	19.23	3
		75	0	19.35	19.00	19.22	3

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR
		Channel		18650	18900	19150	
		Frequency (MHz)		1855	1880	1905	
10M	QPSK	1	0	22.14	21.89	22.03	0
		1	24	22.49	22.14	22.36	0
		1	49	22.01	21.76	21.90	0
		25	0	21.76	21.44	21.63	1
		25	12	21.79	21.45	21.62	1
		25	25	21.74	21.43	21.64	1
		50	0	21.87	21.57	21.66	1
	16QAM	1	0	21.64	21.34	21.51	1
		1	24	22.01	21.69	21.88	1
		1	49	21.89	21.55	21.72	1
		25	0	21.26	20.95	21.16	2
		25	12	21.33	20.98	21.20	2
		25	25	21.39	21.14	21.28	2
		50	0	21.36	21.01	21.23	2
	64QAM	1	0	20.07	19.82	19.96	2
		1	24	20.41	20.09	20.28	2
		1	49	19.99	19.65	19.82	2
		25	0	19.24	18.93	19.14	3
		25	12	19.27	18.97	19.06	3
		25	25	19.36	19.04	19.21	3
		50	0	19.36	19.02	19.21	3
BW	MCS Index	Channel		18625	18900	19175	3GPP MPR
		Frequency (MHz)		1852.5	1880	1907.5	
5M	QPSK	1	0	22.17	21.86	22.03	0
		1	12	22.49	22.14	22.35	0
		1	24	22.04	21.72	21.94	0
		12	0	21.75	21.45	21.60	1
		12	6	21.73	21.51	21.62	1
		12	13	21.76	21.46	21.65	1
		25	0	21.82	21.57	21.69	1
	16QAM	1	0	21.64	21.37	21.55	1
		1	12	21.96	21.73	21.85	1
		1	24	21.89	21.54	21.75	1
		12	0	21.24	20.97	21.10	2
		12	6	21.29	21.04	21.15	2
		12	13	21.40	21.13	21.31	2
		25	0	21.32	21.02	21.19	2
	64QAM	1	0	20.08	19.81	19.99	2
		1	12	20.36	20.13	20.24	2
		1	24	19.93	19.71	19.85	2
		12	0	19.26	18.96	19.08	3
		12	6	19.20	18.98	19.12	3
		12	13	19.37	19.07	19.19	3
		25	0	19.31	19.06	19.20	3

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR
		Channel		18615	18900	19185	
		Frequency (MHz)		1851.5	1880	1908.5	
3M	QPSK	1	0	22.16	21.91	22.02	0
		1	12	22.44	22.17	22.35	0
		1	24	22.03	21.73	21.90	0
		12	0	21.72	21.45	21.63	1
		12	6	21.73	21.50	21.61	1
		12	13	21.72	21.50	21.64	1
		25	0	21.84	21.54	21.66	1
	16QAM	1	0	21.63	21.41	21.55	1
		1	12	21.99	21.70	21.86	1
		1	24	21.89	21.54	21.76	1
		12	0	21.24	20.99	21.13	2
		12	6	21.32	21.00	21.19	2
		12	13	21.45	21.11	21.28	2
		25	0	21.32	21.01	21.22	2
	64QAM	1	0	20.14	19.84	19.93	2
		1	12	20.39	20.07	20.24	2
		1	24	20.00	19.66	19.85	2
		12	0	19.25	18.99	19.09	3
		12	6	19.26	18.91	19.13	3
		12	13	19.33	19.08	19.22	3
		25	0	19.35	19.00	19.22	3
BW	MCS Index	Channel		18700	18900	19100	3GPP MPR
		Frequency (MHz)		1860	1880	1900	
1.4M	QPSK	1	0	22.14	21.89	22.03	0
		1	12	22.48	22.16	22.35	0
		1	24	22.07	21.73	21.90	0
		12	0	22.73	22.42	22.63	1
		12	6	22.80	22.50	22.59	1
		12	13	22.75	22.43	22.60	1
		25	0	21.87	21.53	21.72	1
	16QAM	1	0	21.66	21.35	21.52	1
		1	12	22.02	21.67	21.88	1
		1	24	21.86	21.54	21.76	1
		12	0	22.28	21.98	22.13	2
		12	6	22.27	22.05	22.16	2
		12	13	22.43	22.13	22.32	2
		25	0	21.32	21.07	21.19	2
	64QAM	1	0	20.08	19.81	19.99	2
		1	12	20.36	20.13	20.25	2
		1	24	19.99	19.64	19.85	2
		12	0	20.22	19.95	20.08	3
		12	6	20.22	19.97	20.08	3
		12	13	20.36	20.04	20.26	3
		25	0	19.33	19.03	19.18	3

LTE Band 4							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20050	20175	20300	
		Frequency (MHz)		1720	1732.5	1745	
20M	QPSK	1	0	21.87	22.07	22.12	0
		1	50	22.28	22.48	22.53	0
		1	99	21.90	22.10	22.15	0
		50	0	21.70	21.90	21.95	1
		50	25	21.79	21.99	22.04	1
		50	50	21.78	21.98	22.03	1
	16QAM	100	0	21.76	21.96	22.01	1
		1	0	21.53	21.73	21.78	1
		1	50	21.82	22.02	22.07	1
		1	99	21.47	21.67	21.72	1
		50	0	21.22	21.42	21.47	2
		50	25	21.19	21.39	21.44	2
	64QAM	50	50	21.31	21.51	21.56	2
		100	0	21.27	21.47	21.52	2
		1	0	20.03	20.23	20.28	2
		1	50	20.23	20.43	20.48	2
		1	99	19.92	20.12	20.17	2
		50	0	19.18	19.38	19.43	3
15M	QPSK	50	25	19.12	19.32	19.37	3
		50	50	19.17	19.37	19.42	3
		100	0	19.15	19.35	19.40	3
		1	0	21.86	22.03	22.04	0
		1	37	22.24	22.45	22.47	0
		1	74	21.88	22.09	22.11	0
	16QAM	36	0	21.64	21.85	21.94	1
		36	19	21.78	21.97	21.99	1
		36	39	21.70	21.91	22.01	1
		75	0	21.75	21.92	21.98	1
		1	0	21.50	21.72	21.72	1
		1	37	21.78	21.97	22.05	1
	64QAM	1	74	21.41	21.65	21.69	1
		36	0	21.20	21.34	21.46	2
		36	19	21.11	21.35	21.39	2
		36	39	21.28	21.45	21.54	2
		75	0	21.26	21.42	21.44	2
		1	0	19.97	20.20	20.24	2
15M	64QAM	1	37	20.21	20.36	20.43	2
		1	74	19.86	20.04	20.15	2
		36	0	19.17	19.36	19.35	3
		36	19	19.05	19.24	19.31	3
		36	39	19.15	19.36	19.38	3
		75	0	19.13	19.27	19.39	3

BW	MCS Index	Channel		20000	20175	20350	3GPP MPR
		Frequency (MHz)		1715	1732.5	1750	
10M	QPSK	1	0	21.79	22.03	22.07	0
		1	24	22.26	22.40	22.52	0
		1	49	21.82	22.06	22.10	0
		25	0	21.67	21.84	21.93	1
		25	12	21.77	21.92	21.99	1
		25	25	21.72	21.90	22.01	1
		50	0	21.75	21.94	21.93	1
	16QAM	1	0	21.46	21.65	21.72	1
		1	24	21.79	21.96	22.05	1
		1	49	21.45	21.60	21.67	1
		25	0	21.16	21.34	21.45	2
		25	12	21.17	21.31	21.43	2
		25	25	21.23	21.47	21.51	2
		50	0	21.25	21.39	21.51	2
	64QAM	1	0	19.95	20.19	20.23	2
		1	24	20.20	20.37	20.46	2
		1	49	19.90	20.05	20.12	2
		25	0	19.12	19.30	19.41	3
		25	12	19.11	19.30	19.29	3
		25	25	19.12	19.29	19.36	3
		50	0	19.14	19.29	19.38	3
BW	MCS Index	Channel		19975	20175	20375	3GPP MPR
		Frequency (MHz)		1712.5	1732.5	1752.5	
5M	QPSK	1	0	21.82	22.00	22.07	0
		1	12	22.26	22.40	22.51	0
		1	24	21.85	22.02	22.14	0
		12	0	21.66	21.85	21.90	1
		12	6	21.71	21.98	21.99	1
		12	13	21.74	21.93	22.02	1
		25	0	21.70	21.94	21.96	1
	16QAM	1	0	21.46	21.68	21.76	1
		1	12	21.74	22.00	22.02	1
		1	24	21.45	21.59	21.70	1
		12	0	21.14	21.36	21.39	2
		12	6	21.13	21.37	21.38	2
		12	13	21.24	21.46	21.54	2
		25	0	21.21	21.40	21.47	2
	64QAM	1	0	19.96	20.18	20.26	2
		1	12	20.15	20.41	20.42	2
		1	24	19.84	20.11	20.15	2
		12	0	19.14	19.33	19.35	3
		12	6	19.04	19.31	19.35	3
		12	13	19.13	19.32	19.34	3
		25	0	19.09	19.33	19.37	3

BW	MCS Index	Channel		19965	20175	20385	3GPP MPR
		Frequency (MHz)		1711.5	1732.5	1753.5	
3M	QPSK	1	0	21.81	22.05	22.06	0
		1	7	22.21	22.43	22.51	0
		1	14	21.84	22.03	22.10	0
		8	0	21.63	21.85	21.93	1
		8	3	21.71	21.97	21.98	1
		8	7	21.70	21.97	22.01	1
		15	0	21.72	21.91	21.93	1
	16QAM	1	0	21.45	21.72	21.76	1
		1	7	21.77	21.97	22.03	1
		1	14	21.45	21.59	21.71	1
		8	0	21.14	21.38	21.42	2
		8	3	21.16	21.33	21.42	2
		8	7	21.29	21.44	21.51	2
		15	0	21.21	21.39	21.50	2
	64QAM	1	0	20.02	20.21	20.20	2
		1	7	20.18	20.35	20.42	2
		1	14	19.91	20.06	20.15	2
		8	0	19.13	19.36	19.36	3
		8	3	19.10	19.24	19.36	3
		8	7	19.09	19.33	19.37	3
		15	0	19.13	19.27	19.39	3
BW	MCS Index	Channel		19957	20175	20393	3GPP MPR
Frequency (MHz)		1710.7	1732.5	1754.3			
1.4M	QPSK	1	0	21.79	22.03	22.07	0
		1	2	22.25	22.42	22.51	0
		1	5	21.88	22.03	22.10	0
		3	0	22.14	22.32	22.43	0
		3	1	22.28	22.47	22.46	0
		3	3	22.23	22.40	22.47	0
		6	0	21.75	21.90	21.99	1
	16QAM	1	0	21.48	21.66	21.73	1
		1	2	21.80	21.94	22.05	1
		1	5	21.42	21.59	21.71	1
		3	0	21.68	21.87	21.92	1
		3	1	21.61	21.88	21.89	1
		3	3	21.77	21.96	22.05	1
		6	0	21.21	21.45	21.47	2
	64QAM	1	0	19.96	20.18	20.26	2
		1	2	20.15	20.41	20.43	2
		1	5	19.90	20.04	20.15	2
		3	0	19.60	19.82	19.85	2
		3	1	19.56	19.80	19.81	2
		3	3	19.62	19.79	19.91	2
		6	0	19.11	19.30	19.35	3

LTE Band 5							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20450	20525	20600	
		Frequency (MHz)		829	836.5	844	
10M	QPSK	1	0	23.25	23.28	23.22	0
		1	24	23.42	23.45	23.39	0
		1	49	23.24	23.27	23.21	0
		25	0	22.40	22.43	22.37	1
		25	12	22.38	22.41	22.35	1
		25	25	22.36	22.39	22.33	1
	16QAM	50	0	22.35	22.38	22.32	1
		1	0	22.43	22.46	22.40	1
		1	24	22.54	22.57	22.51	1
		1	49	22.39	22.42	22.36	1
		25	0	21.38	21.41	21.35	2
		25	12	21.43	21.46	21.40	2
	64QAM	25	25	21.41	21.44	21.38	2
		50	0	21.36	21.39	21.33	2
		1	0	21.41	21.44	21.38	2
		1	24	21.47	21.50	21.44	2
		1	49	21.46	21.49	21.43	2
		25	0	20.29	20.32	20.26	3
5M	QPSK	25	12	20.25	20.28	20.22	3
		25	25	20.38	20.41	20.35	3
		50	0	20.30	20.33	20.27	3
		1	0	23.20	23.21	23.17	0
		1	12	23.40	23.37	23.37	0
		1	24	23.19	23.19	23.20	0
	16QAM	12	0	22.36	22.38	22.32	1
		12	6	22.30	22.40	22.30	1
		12	13	22.32	22.34	22.32	1
		25	0	22.29	22.36	22.27	1
		1	0	22.36	22.41	22.38	1
		1	12	22.46	22.55	22.46	1
	64QAM	1	24	22.37	22.34	22.34	1
		12	0	21.30	21.35	21.27	2
		12	6	21.37	21.44	21.34	2
		12	13	21.34	21.39	21.36	2
		25	0	21.30	21.32	21.28	2
		1	0	21.34	21.39	21.36	2
QPSK	1	12	21.39	21.48	21.38	2	
	1	24	21.38	21.48	21.41	2	
	12	0	20.25	20.27	20.18	3	
	12	6	20.17	20.27	20.20	3	
	12	13	20.34	20.36	20.27	3	
	25	0	20.24	20.31	20.24	3	

BW	MCS Index	Channel		20415	20525	20635	3GPP MPR
		Frequency (MHz)		825.5	836.5	847.5	
3M	QPSK	1	0	23.19	23.26	23.16	0
		1	7	23.35	23.40	23.37	0
		1	14	23.18	23.20	23.16	0
		8	0	22.33	22.38	22.35	1
		8	3	22.30	22.39	22.29	1
		8	7	22.28	22.38	22.31	1
	16QAM	15	0	22.31	22.33	22.24	1
		1	0	22.35	22.45	22.38	1
		1	7	22.49	22.52	22.47	1
		1	14	22.37	22.34	22.35	1
		8	0	21.30	21.37	21.30	2
		8	3	21.40	21.40	21.38	2
	64QAM	8	7	21.39	21.37	21.33	2
		15	0	21.30	21.31	21.31	2
		1	0	21.40	21.42	21.30	2
		1	7	21.42	21.42	21.38	2
		1	14	21.45	21.43	21.41	2
		8	0	20.24	20.30	20.19	3
1.4M	QPSK	8	3	20.23	20.20	20.21	3
		8	7	20.30	20.37	20.30	3
		15	0	20.28	20.25	20.26	3
		1	0	23.17	23.24	23.17	0
		1	2	23.39	23.39	23.37	0
		1	5	23.22	23.20	23.16	0
	16QAM	3	0	23.34	23.35	23.35	0
		3	1	23.37	23.39	23.27	0
		3	3	23.31	23.31	23.27	0
		6	0	22.34	22.32	22.30	1
		1	0	22.38	22.39	22.35	1
		1	2	22.52	22.49	22.49	1
	64QAM	1	5	22.34	22.34	22.35	1
		3	0	22.34	22.36	22.30	1
		3	1	22.35	22.45	22.35	1
		3	3	22.37	22.39	22.37	1
		6	0	21.30	21.37	21.28	2
		1	0	21.34	21.39	21.36	2
16QAM	1	2	21.39	21.48	21.39	2	
	1	5	21.44	21.41	21.41	2	
	3	0	21.21	21.26	21.18	2	
	3	1	21.19	21.26	21.16	2	
	3	3	21.33	21.33	21.34	2	
	6	0	20.26	20.28	20.22	3	

LTE Band 7							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20850	21100	21350	
		Frequency (MHz)		2510	2535	2560	
20M	QPSK	1	0	22.23	22.14	22.07	0
		1	50	22.52	22.43	22.36	0
		1	99	22.11	22.02	21.95	0
		50	0	21.86	21.77	21.70	1
		50	25	21.91	21.82	21.75	1
		50	50	21.88	21.79	21.72	1
	16QAM	100	0	21.90	21.81	21.74	1
		1	0	21.91	21.82	21.75	1
		1	50	22.13	22.04	21.97	1
		1	99	21.78	21.69	21.62	1
		50	0	21.42	21.33	21.26	2
		50	25	21.47	21.38	21.31	2
	64QAM	50	50	21.45	21.36	21.29	2
		100	0	21.43	21.34	21.27	2
		1	0	20.42	20.33	20.26	2
		1	50	20.78	20.69	20.62	2
		1	99	20.51	20.42	20.35	2
		50	0	19.50	19.41	19.34	3
15M	QPSK	50	25	19.59	19.50	19.43	3
		50	50	19.64	19.55	19.48	3
		100	0	19.57	19.48	19.41	3
		1	0	22.22	22.10	21.99	0
		1	37	22.48	22.40	22.30	0
		1	74	22.09	22.01	21.91	0
	16QAM	36	0	21.80	21.72	21.69	1
		36	19	21.90	21.80	21.70	1
		36	39	21.80	21.72	21.70	1
		75	0	21.89	21.77	21.71	1
		1	0	21.88	21.81	21.69	1
		1	37	22.09	21.99	21.95	1
	64QAM	1	74	21.72	21.67	21.59	1
		36	0	21.40	21.25	21.25	2
		36	19	21.39	21.34	21.26	2
		36	39	21.42	21.30	21.27	2
		75	0	21.42	21.29	21.19	2
		1	0	20.36	20.30	20.22	2
64QAM	1	37	20.76	20.62	20.57	2	
	1	74	20.45	20.34	20.33	2	
	36	0	19.49	19.39	19.26	3	
	36	19	19.52	19.42	19.37	3	
	36	39	19.62	19.54	19.44	3	
	75	0	19.55	19.40	19.40	3	

BW	MCS Index	Channel		20800	21100	21400	3GPP MPR
		Frequency (MHz)		2505	2535	2565	
10M	QPSK	1	0	22.15	22.10	22.02	0
		1	24	22.50	22.35	22.35	0
		1	49	22.03	21.98	21.90	0
		25	0	21.83	21.71	21.68	1
		25	12	21.89	21.75	21.70	1
		25	25	21.82	21.71	21.70	1
		50	0	21.89	21.79	21.66	1
	16QAM	1	0	21.84	21.74	21.69	1
		1	24	22.10	21.98	21.95	1
		1	49	21.76	21.62	21.57	1
		25	0	21.36	21.25	21.24	2
		25	12	21.45	21.30	21.30	2
		25	25	21.37	21.32	21.24	2
		50	0	21.41	21.26	21.26	2
	64QAM	1	0	20.34	20.29	20.21	2
		1	24	20.75	20.63	20.60	2
		1	49	20.49	20.35	20.30	2
		25	0	19.44	19.33	19.32	3
		25	12	19.58	19.48	19.35	3
		25	25	19.59	19.47	19.42	3
		50	0	19.56	19.42	19.39	3
BW	MCS Index	Channel		20775	21100	21425	3GPP MPR
Frequency (MHz)		2502.5	2535	2567.5			
5M	QPSK	1	0	22.18	22.07	22.02	0
		1	12	22.50	22.35	22.34	0
		1	24	22.06	21.94	21.94	0
		12	0	21.82	21.72	21.65	1
		12	6	21.83	21.81	21.70	1
		12	13	21.84	21.74	21.71	1
		25	0	21.84	21.79	21.69	1
	16QAM	1	0	21.84	21.77	21.73	1
		1	12	22.05	22.02	21.92	1
		1	24	21.76	21.61	21.60	1
		12	0	21.34	21.27	21.18	2
		12	6	21.41	21.36	21.25	2
		12	13	21.38	21.31	21.27	2
		25	0	21.37	21.27	21.22	2
	64QAM	1	0	20.35	20.28	20.24	2
		1	12	20.70	20.67	20.56	2
		1	24	20.43	20.41	20.33	2
		12	0	19.46	19.36	19.26	3
		12	6	19.51	19.49	19.41	3
		12	13	19.60	19.50	19.40	3
		25	0	19.51	19.46	19.38	3

LTE Band 38							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		37850	38000	38150	
		Frequency (MHz)		2580	2595	2610	
20M	QPSK	1	0	22.23	22.25	22.19	0
		1	50	22.50	22.52	22.46	0
		1	99	22.14	22.16	22.10	0
		50	0	21.85	21.87	21.81	1
		50	25	21.88	21.90	21.84	1
		50	50	21.84	21.86	21.80	1
		100	0	21.86	21.88	21.82	1
	16QAM	1	0	21.61	21.63	21.57	1
		1	50	21.90	21.92	21.86	1
		1	99	21.56	21.58	21.52	1
		50	0	21.39	21.41	21.35	2
		50	25	21.36	21.38	21.32	2
		50	50	21.29	21.31	21.25	2
		100	0	21.34	21.36	21.30	2
	64QAM	1	0	20.16	20.18	20.12	2
		1	50	20.46	20.48	20.42	2
		1	99	20.15	20.17	20.11	2
		50	0	19.60	19.62	19.56	3
		50	25	19.63	19.65	19.59	3
		50	50	19.55	19.57	19.51	3
		100	0	19.59	19.61	19.55	3
BW	MCS Index	Channel		37825	38000	38175	3GPP MPR
		Frequency (MHz)		2577.5	2595	2612.5	
15M	QPSK	1	0	22.22	22.21	22.11	0
		1	37	22.46	22.49	22.40	0
		1	74	22.12	22.15	22.06	0
		36	0	21.79	21.82	21.80	1
		36	19	21.87	21.88	21.79	1
		36	39	21.76	21.79	21.78	1
		75	0	21.85	21.84	21.79	1
	16QAM	1	0	21.58	21.62	21.51	1
		1	37	21.86	21.87	21.84	1
		1	74	21.50	21.56	21.49	1
		36	0	21.37	21.33	21.34	2
		36	19	21.28	21.34	21.27	2
		36	39	21.26	21.25	21.23	2
		75	0	21.33	21.31	21.22	2
	64QAM	1	0	20.10	20.15	20.08	2
		1	37	20.44	20.41	20.37	2
		1	74	20.09	20.09	20.09	2
		36	0	19.59	19.60	19.48	3
		36	19	19.56	19.57	19.53	3
		36	39	19.53	19.56	19.47	3
		75	0	19.57	19.53	19.54	3

BW	MCS Index	Channel		37800	38000	38200	3GPP MPR
		Frequency (MHz)		2575	2595	2615	
10M	QPSK	1	0	22.15	22.21	22.14	0
		1	24	22.48	22.44	22.45	0
		1	49	22.06	22.12	22.05	0
		25	0	21.82	21.81	21.79	1
		25	12	21.86	21.83	21.79	1
		25	25	21.78	21.78	21.78	1
		50	0	21.85	21.86	21.74	1
	16QAM	1	0	21.54	21.55	21.51	1
		1	24	21.87	21.86	21.84	1
		1	49	21.54	21.51	21.47	1
		25	0	21.33	21.33	21.33	2
		25	12	21.34	21.30	21.31	2
		25	25	21.21	21.27	21.20	2
		50	0	21.32	21.28	21.29	2
	64QAM	1	0	20.08	20.14	20.07	2
		1	24	20.43	20.42	20.40	2
		1	49	20.13	20.10	20.06	2
		25	0	19.54	19.54	19.54	3
		25	12	19.62	19.63	19.51	3
		25	25	19.50	19.49	19.45	3
		50	0	19.58	19.55	19.53	3
BW	MCS Index	Channel		37775	38000	38225	3GPP MPR
		Frequency (MHz)		2572.5	2595	2617.5	
5M	QPSK	1	0	22.18	22.18	22.14	0
		1	12	22.48	22.44	22.44	0
		1	24	22.09	22.08	22.09	0
		12	0	21.81	21.82	21.76	1
		12	6	21.80	21.89	21.79	1
		12	13	21.80	21.81	21.79	1
		25	0	21.80	21.86	21.77	1
	16QAM	1	0	21.54	21.58	21.55	1
		1	12	21.82	21.90	21.81	1
		1	24	21.54	21.50	21.50	1
		12	0	21.31	21.35	21.27	2
		12	6	21.30	21.36	21.26	2
		12	13	21.22	21.26	21.23	2
		25	0	21.28	21.29	21.25	2
	64QAM	1	0	20.09	20.13	20.10	2
		1	12	20.38	20.46	20.36	2
		1	24	20.07	20.16	20.09	2
		12	0	19.56	19.57	19.48	3
		12	6	19.55	19.64	19.57	3
		12	13	19.51	19.52	19.43	3
		25	0	19.53	19.59	19.52	3

LTE Band 41									
BW	MCS Index	RB Size	RB Offset	Low	Mid	Mid	Mid	High	3GPP MPR (dB)
		Channel		39750	40185	40620	41055	41490	
		Frequency (MHz)		2506	2549.5	2593	2636.5	2680	
20M	QPSK	1	0	22.15	22.28	22.23	22.29	22.35	0
		1	50	22.54	22.67	22.62	22.68	22.74	0
		1	99	22.31	22.44	22.39	22.45	22.51	0
		50	0	21.98	22.11	22.06	22.12	22.18	1
		50	25	21.96	22.09	22.04	22.10	22.16	1
		50	50	21.92	22.05	22.00	22.06	22.12	1
	16QAM	100	0	21.89	22.02	21.97	22.03	22.09	1
		1	0	21.69	21.82	21.77	21.83	21.89	1
		1	50	22.09	22.22	22.17	22.23	22.29	1
		1	99	21.87	22.00	21.95	22.01	22.07	1
		50	0	21.46	21.59	21.54	21.60	21.66	2
		50	25	21.48	21.61	21.56	21.62	21.68	2
	64QAM	50	50	21.39	21.52	21.47	21.53	21.59	2
		100	0	21.40	21.53	21.48	21.54	21.60	2
		1	0	20.00	20.13	20.08	20.14	20.20	2
		1	50	20.36	20.49	20.44	20.50	20.56	2
		1	99	20.04	20.17	20.12	20.18	20.24	2
		50	0	19.45	19.58	19.53	19.59	19.65	3
15M	QPSK	50	25	19.54	19.67	19.62	19.68	19.74	3
		50	50	19.48	19.61	19.56	19.62	19.68	3
		100	0	19.50	19.63	19.58	19.64	19.70	3
		1	0	22.14	22.24	22.15	22.27	22.29	0
		1	37	22.50	22.64	22.56	22.60	22.72	0
		1	74	22.29	22.43	22.35	22.39	22.45	0
	16QAM	36	0	21.92	22.06	22.05	22.08	22.17	1
		36	19	21.95	22.07	21.99	22.09	22.09	1
		36	39	21.84	21.98	21.98	22.01	22.10	1
		75	0	21.88	21.98	21.94	22.00	22.04	1
		1	0	21.66	21.81	21.71	21.76	21.87	1
		1	37	22.05	22.17	22.15	22.15	22.22	1
	64QAM	1	74	21.81	21.98	21.92	21.99	22.03	1
		36	0	21.44	21.51	21.53	21.56	21.65	2
		36	19	21.40	21.57	21.51	21.56	21.63	2
		36	39	21.36	21.46	21.45	21.51	21.57	2
		75	0	21.39	21.48	21.40	21.46	21.54	2
		1	0	19.94	20.10	20.04	20.11	20.19	2
64QAM	1	37	20.34	20.42	20.39	20.49	20.48	2	
	1	74	19.98	20.09	20.10	20.12	20.23	2	
	36	0	19.44	19.56	19.45	19.56	19.62	3	
	36	19	19.47	19.59	19.56	19.67	19.70	3	
	36	39	19.46	19.60	19.52	19.57	19.66	3	
	75	0	19.48	19.55	19.57	19.62	19.67	3	

BW	MCS Index	Channel		39700	40160	40620	41080	41540	3GPP MPR
		Frequency (MHz)		2501	2547	2593	2639	2685	
10M	QPSK	1	0	22.07	22.24	22.18	22.22	22.27	0
		1	24	22.52	22.59	22.61	22.60	22.72	0
		1	49	22.23	22.40	22.34	22.43	22.43	0
		25	0	21.95	22.05	22.04	22.04	22.15	1
		25	12	21.94	22.02	21.99	22.04	22.14	1
		25	25	21.86	21.97	21.98	22.05	22.07	1
		50	0	21.88	22.00	21.89	21.98	22.07	1
	16QAM	1	0	21.62	21.74	21.71	21.81	21.84	1
		1	24	22.06	22.16	22.15	22.18	22.27	1
		1	49	21.85	21.93	21.90	21.99	21.99	1
		25	0	21.40	21.51	21.52	21.52	21.60	2
		25	12	21.46	21.53	21.55	21.59	21.62	2
		25	25	21.31	21.48	21.42	21.51	21.52	2
		50	0	21.38	21.45	21.47	21.48	21.52	2
	64QAM	1	0	19.92	20.09	20.03	20.12	20.18	2
		1	24	20.33	20.43	20.42	20.42	20.48	2
		1	49	20.02	20.10	20.07	20.16	20.18	2
		25	0	19.39	19.50	19.51	19.51	19.58	3
		25	12	19.53	19.65	19.54	19.65	19.71	3
		25	25	19.43	19.53	19.50	19.57	19.66	3
		50	0	19.49	19.57	19.56	19.62	19.64	3
BW	MCS Index	Channel		39675	40148	40620	41093	41565	3GPP MPR
Frequency (MHz)		2498.5	2545.8	2593	2640.3	2687.5			
5M	QPSK	1	0	22.10	22.21	22.18	22.24	22.29	0
		1	12	22.52	22.59	22.60	22.64	22.67	0
		1	24	22.26	22.36	22.38	22.37	22.45	0
		12	0	21.94	22.06	22.01	22.08	22.11	1
		12	6	21.88	22.08	21.99	22.04	22.08	1
		12	13	21.88	22.00	21.99	21.99	22.06	1
		25	0	21.83	22.00	21.92	21.95	22.07	1
	16QAM	1	0	21.62	21.77	21.75	21.75	21.84	1
		1	12	22.01	22.20	22.12	22.19	22.28	1
		1	24	21.85	21.92	21.93	21.93	22.02	1
		12	0	21.38	21.53	21.46	21.56	21.64	2
		12	6	21.42	21.59	21.50	21.56	21.63	2
		12	13	21.32	21.47	21.45	21.52	21.57	2
		25	0	21.34	21.46	21.43	21.49	21.59	2
	64QAM	1	0	19.93	20.08	20.06	20.09	20.15	2
		1	12	20.28	20.47	20.38	20.49	20.51	2
		1	24	19.96	20.16	20.10	20.13	20.23	2
		12	0	19.41	19.53	19.45	19.57	19.63	3
		12	6	19.46	19.66	19.60	19.63	19.69	3
		12	13	19.44	19.56	19.48	19.60	19.64	3
		25	0	19.44	19.61	19.55	19.56	19.62	3

<WLAN 2.4G>

Mode	Channel	Frequency (MHz)	Avg. Power (dBm)	Duty cycle %
802.11b	1	2412	18.61	99.50
	6	2437	18.45	
	11	2462	18.65	
802.11g	1	2412	16.09	96.70
	6	2437	15.84	
	11	2462	16.17	
802.11n HT20	1	2412	14.95	96.40
	6	2437	14.83	
	11	2462	14.14	

Bluetooth				
Mode	Channel	Frequency (MHz)	Avg. Power (dBm)	
BR / EDR	0	2402	9.06	
	39	2441	8.75	
	78	2480	9.98	
BT 4.0 LE	0	2402	-3.19	
	19	2440	-2.57	
	39	2480	-3.50	
BT 5.0 LE	0	2402	-4.92	
	19	2440	-4.12	
	39	2480	-5.12	

<WLAN 5.2G>

Mode	Channel	Frequency (MHz)	Avg. Power (dBm)	Duty cycle %
802.11a	36	5180	15.18	97.10
	40	5200	15.24	
	44	5220	15.17	
	48	5240	15.10	
802.11n HT20	36	5180	13.96	96.60
	40	5200	13.92	
	44	5220	13.91	
	48	5240	13.80	
802.11n HT40	38	5190	13.86	93.30
	46	5230	13.89	
802.11ac VHT20	36	5180	14.48	96.40
	40	5200	14.49	
	44	5220	14.42	
	48	5240	14.60	
802.11ac VHT40	38	5190	12.69	93.30
	46	5230	12.63	
802.11ac VHT80	42	5210	12.43	87.90

<WLAN 5.3G>

Mode	Channel	Frequency (MHz)	Avg. Power (dBm)	Duty cycle %
802.11a	52	5260	15.16	97.10
	56	5280	15.20	
	60	5300	15.19	
	64	5320	15.21	
802.11n HT20	52	5260	14.01	96.60
	56	5280	13.95	
	60	5300	14.15	
	64	5320	14.11	
802.11n HT40	54	5270	13.95	93.30
	62	5310	14.06	
802.11ac VHT20	52	5260	14.56	96.40
	56	5280	14.53	
	60	5300	14.54	
	64	5320	14.58	
802.11ac VHT40	54	5270	12.62	93.30
	62	5310	12.73	
802.11ac VHT80	58	5290	12.54	87.90

<WLAN 5.6G>

Mode	Channel	Frequency (MHz)	Avg. Power (dBm)	Duty cycle %
802.11a	100	5500	15.05	97.10
	116	5580	15.07	
	124	5620	15.04	
	132	5660	15.27	
	140	5700	15.23	
802.11n HT20	100	5500	14.17	96.60
	116	5580	14.22	
	124	5620	14.05	
	132	5660	14.00	
	140	5700	14.02	
802.11n HT40	102	5510	14.18	93.30
	110	5550	14.06	
	126	5630	14.01	
	134	5670	13.93	
802.11ac VHT20	100	5500	14.46	96.40
	116	5580	14.36	
	124	5620	14.33	
	132	5660	14.47	
	140	5700	14.56	
802.11ac VHT40	102	5510	12.62	93.30
	110	5550	12.55	
	126	5630	12.47	
	134	5670	12.60	
802.11ac VHT80	106	5530	12.61	87.90
	122	5610	12.68	

<WLAN 5.8G>

Mode	Channel	Frequency (MHz)	Avg. Power (dBm)	Duty cycle %
802.11a	149	5745	15.20	97.10
	157	5785	15.06	
	165	5825	15.29	
802.11n HT20	149	5745	13.91	96.60
	157	5785	14.12	
	165	5825	14.16	
802.11n HT40	151	5755	14.23	93.30
	159	5795	14.15	
802.11ac VHT20	149	5745	14.51	96.40
	157	5785	14.35	
	165	5825	14.63	
802.11ac VHT40	151	5755	12.51	93.30
	159	5795	12.46	
802.11ac VHT80	155	5775	12.64	87.90

<Reduce Power>

Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency (MHz)	824.2	836.4	848.8	1850.2	1880.0	1909.8
Maximum Burst-Averaged Output Power						
GSM (GMSK, 1Tx-slot)	26.93	26.91	26.95	26.22	26.20	26.24
GPRS (GMSK, 1Tx-slot)	26.88	26.90	26.91	26.19	26.18	26.20
GPRS (GMSK, 2Tx-slot)	23.89	23.96	23.99	23.13	23.15	23.25
GPRS (GMSK, 3Tx-slot)	21.89	21.96	22.01	23.10	23.11	23.23
GPRS (GMSK, 4Tx-slot)	20.85	20.90	20.95	23.05	23.09	23.20
EDGE (8PSK, 1Tx-slot)	21.33	21.23	21.28	22.57	22.52	22.58
EDGE (8PSK, 2Tx-slot)	18.33	18.37	18.29	19.64	19.74	19.75
EDGE (8PSK, 3Tx-slot)	16.25	16.32	16.43	19.66	19.64	19.54
EDGE (8PSK, 4Tx-slot)	15.15	15.18	15.28	19.45	19.40	19.34
Maximum Frame-Averaged Output Power						
GSM (GMSK, 1Tx-slot)	17.93	17.91	17.95	17.22	17.20	17.24
GPRS (GMSK, 1Tx-slot)	17.88	17.90	17.91	17.19	17.18	17.20
GPRS (GMSK, 2Tx-slot)	17.89	17.96	17.99	17.13	17.15	17.25
GPRS (GMSK, 3Tx-slot)	17.63	17.70	17.75	18.84	18.85	18.97
GPRS (GMSK, 4Tx-slot)	17.85	17.90	17.95	20.05	20.09	20.20
EDGE (8PSK, 1Tx-slot)	12.33	12.23	12.28	13.57	13.52	13.58
EDGE (8PSK, 2Tx-slot)	12.33	12.37	12.29	13.64	13.74	13.75
EDGE (8PSK, 3Tx-slot)	11.99	12.06	12.17	15.40	15.38	15.28
EDGE (8PSK, 4Tx-slot)	12.15	12.18	12.28	16.45	16.40	16.34

Note:

- SAR testing was performed on the maximum frame-averaged power mode.
- The frame-averaged power is linearly proportion to the slot number configured and it is linearly scaled the maximum burst-averaged power based on time slots. The calculated method is shown as below:

$$\text{Frame-averaged power} = 10 \times \log (\text{Burst-averaged power mW} \times \text{Slot used} / 8)$$

LTE Band 2							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		18700	18900	19100	
		Frequency (MHz)		1860	1880	1900	
20M	QPSK	1	0	13.69	13.54	13.58	0
		1	50	14.01	13.86	13.90	0
		1	99	13.55	13.40	13.44	0
		50	0	13.73	13.58	13.62	1
		50	25	13.86	13.71	13.75	1
		50	50	13.46	13.31	13.35	1
		100	0	13.92	13.77	13.81	1
	16QAM	1	0	13.66	13.51	13.55	1
		1	50	13.97	13.82	13.86	1
		1	99	13.51	13.36	13.40	1
		50	0	13.69	13.54	13.58	2
		50	25	13.81	13.66	13.70	2
		50	50	13.44	13.29	13.33	2
		100	0	13.88	13.73	13.77	2
	64QAM	1	0	13.67	13.52	13.56	2
		1	50	13.99	13.84	13.88	2
		1	99	13.54	13.39	13.43	2
		50	0	13.71	13.56	13.60	3
		50	25	13.82	13.67	13.71	3
		50	50	13.45	13.30	13.34	3
		100	0	13.86	13.71	13.75	3
BW	MCS Index	Channel		18675	18900	19125	3GPP MPR
		Frequency (MHz)		1857.5	1880	1902.5	
15M	QPSK	1	0	13.68	13.50	13.50	0
		1	37	13.97	13.83	13.84	0
		1	74	13.53	13.39	13.40	0
		36	0	13.67	13.53	13.61	1
		36	19	13.85	13.69	13.70	1
		36	39	13.38	13.24	13.33	1
		75	0	13.91	13.73	13.78	1
	16QAM	1	0	13.63	13.50	13.49	1
		1	37	13.93	13.77	13.84	1
		1	74	13.45	13.34	13.37	1
		36	0	13.67	13.46	13.57	2
		36	19	13.73	13.62	13.65	2
		36	39	13.41	13.23	13.31	2
		75	0	13.87	13.68	13.69	2
	64QAM	1	0	13.61	13.49	13.52	2
		1	37	13.97	13.77	13.83	2
		1	74	13.48	13.31	13.41	2
		36	0	13.70	13.54	13.52	3
		36	19	13.75	13.59	13.65	3
		36	39	13.43	13.29	13.30	3
		75	0	13.84	13.63	13.74	3

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR
		Channel		18650	18900	19150	
		Frequency (MHz)		1855	1880	1905	
10M	QPSK	1	0	13.61	13.50	13.53	0
		1	24	13.99	13.78	13.89	0
		1	49	13.47	13.36	13.39	0
		25	0	13.70	13.52	13.60	1
		25	12	13.84	13.64	13.70	1
		25	25	13.40	13.23	13.33	1
		50	0	13.91	13.75	13.73	1
	16QAM	1	0	13.59	13.43	13.49	1
		1	24	13.94	13.76	13.84	1
		1	49	13.49	13.29	13.35	1
		25	0	13.63	13.46	13.56	2
		25	12	13.79	13.58	13.69	2
		25	25	13.36	13.25	13.28	2
		50	0	13.86	13.65	13.76	2
	64QAM	1	0	13.59	13.48	13.51	2
		1	24	13.96	13.78	13.86	2
		1	49	13.52	13.32	13.38	2
		25	0	13.65	13.48	13.58	3
		25	12	13.81	13.65	13.63	3
		25	25	13.40	13.22	13.28	3
		50	0	13.85	13.65	13.73	3
BW	MCS Index	Channel		18625	18900	19175	3GPP MPR
		Frequency (MHz)		1852.5	1880	1907.5	
5M	QPSK	1	0	13.64	13.47	13.53	0
		1	12	13.99	13.78	13.88	0
		1	24	13.50	13.32	13.43	0
		12	0	13.69	13.53	13.57	1
		12	6	13.78	13.70	13.70	1
		12	13	13.42	13.26	13.34	1
		25	0	13.86	13.75	13.76	1
	16QAM	1	0	13.59	13.46	13.53	1
		1	12	13.89	13.80	13.81	1
		1	24	13.49	13.28	13.38	1
		12	0	13.61	13.48	13.50	2
		12	6	13.75	13.64	13.64	2
		12	13	13.37	13.24	13.31	2
		25	0	13.82	13.66	13.72	2
	64QAM	1	0	13.60	13.47	13.54	2
		1	12	13.91	13.82	13.82	2
		1	24	13.46	13.38	13.41	2
		12	0	13.67	13.51	13.52	3
		12	6	13.74	13.66	13.69	3
		12	13	13.41	13.25	13.26	3
		25	0	13.80	13.69	13.72	3

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR
		Channel		18615	18900	19185	
		Frequency (MHz)		1851.5	1880	1908.5	
3M	QPSK	1	0	13.63	13.52	13.52	0
		1	12	13.94	13.81	13.88	0
		1	24	13.49	13.33	13.39	0
		12	0	13.66	13.53	13.60	1
		12	6	13.78	13.69	13.69	1
		12	13	13.38	13.30	13.33	1
		25	0	13.88	13.72	13.73	1
	16QAM	1	0	13.58	13.50	13.53	1
		1	12	13.92	13.77	13.82	1
		1	24	13.49	13.28	13.39	1
		12	0	13.61	13.50	13.53	2
		12	6	13.78	13.60	13.68	2
		12	13	13.42	13.22	13.28	2
		25	0	13.82	13.65	13.75	2
	64QAM	1	0	13.66	13.50	13.48	2
		1	12	13.94	13.76	13.82	2
		1	24	13.53	13.33	13.41	2
		12	0	13.66	13.54	13.53	3
		12	6	13.80	13.59	13.70	3
		12	13	13.37	13.26	13.29	3
		25	0	13.84	13.63	13.74	3
BW	MCS Index	Channel		18700	18900	19100	3GPP MPR
		Frequency (MHz)		1860	1880	1900	
1.4M	QPSK	1	0	13.61	13.50	13.53	0
		1	12	13.98	13.80	13.88	0
		1	24	13.53	13.33	13.39	0
		12	0	13.67	13.50	13.60	1
		12	6	13.85	13.69	13.67	1
		12	13	13.41	13.23	13.29	1
		25	0	13.91	13.71	13.79	1
	16QAM	1	0	13.61	13.44	13.50	1
		1	12	13.95	13.74	13.84	1
		1	24	13.46	13.28	13.39	1
		12	0	13.65	13.49	13.53	2
		12	6	13.73	13.65	13.65	2
		12	13	13.40	13.24	13.32	2
		25	0	13.82	13.71	13.72	2
	64QAM	1	0	13.60	13.47	13.54	2
		1	12	13.91	13.82	13.83	2
		1	24	13.52	13.31	13.41	2
		12	0	13.63	13.50	13.52	3
		12	6	13.76	13.65	13.65	3
		12	13	13.40	13.22	13.33	3
		25	0	13.82	13.66	13.70	3

LTE Band 4							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20050	20175	20300	
		Frequency (MHz)		1720	1732.5	1745	
20M	QPSK	1	0	16.46	16.73	16.81	0
		1	50	16.78	17.05	17.13	0
		1	99	16.46	16.73	16.81	0
		50	0	16.62	16.89	16.97	1
		50	25	16.64	16.91	16.99	1
		50	50	16.60	16.87	16.95	1
		100	0	16.59	16.86	16.94	1
	16QAM	1	0	16.44	16.71	16.79	1
		1	50	16.76	17.03	17.11	1
		1	99	16.43	16.70	16.78	1
		50	0	16.59	16.86	16.94	2
		50	25	16.61	16.88	16.96	2
		50	50	16.57	16.84	16.92	2
		100	0	16.55	16.82	16.90	2
	64QAM	1	0	16.41	16.68	16.76	2
		1	50	16.72	16.99	17.07	2
		1	99	16.40	16.67	16.75	2
		50	0	16.60	16.87	16.95	3
		50	25	16.59	16.86	16.94	3
		50	50	16.57	16.84	16.92	3
		100	0	16.54	16.81	16.89	3
BW	MCS Index	Channel		20025	20175	20325	3GPP MPR
		Frequency (MHz)		1717.5	1732.5	1747.5	
15M	QPSK	1	0	16.45	16.69	16.73	0
		1	37	16.74	17.02	17.07	0
		1	74	16.44	16.72	16.77	0
		36	0	16.56	16.84	16.96	1
		36	19	16.63	16.89	16.94	1
		36	39	16.52	16.80	16.93	1
		75	0	16.58	16.82	16.91	1
	16QAM	1	0	16.41	16.70	16.73	1
		1	37	16.72	16.98	17.09	1
		1	74	16.37	16.68	16.75	1
		36	0	16.57	16.78	16.93	2
		36	19	16.53	16.84	16.91	2
		36	39	16.54	16.78	16.90	2
		75	0	16.54	16.77	16.82	2
	64QAM	1	0	16.35	16.65	16.72	2
		1	37	16.70	16.92	17.02	2
		1	74	16.34	16.59	16.73	2
		36	0	16.59	16.85	16.87	3
		36	19	16.52	16.78	16.88	3
		36	39	16.55	16.83	16.88	3
		75	0	16.52	16.73	16.88	3

BW	MCS Index	Channel		20000	20175	20350	3GPP MPR
		Frequency (MHz)		1715	1732.5	1750	
10M	QPSK	1	0	16.38	16.69	16.76	0
		1	24	16.76	16.97	17.12	0
		1	49	16.38	16.69	16.76	0
		25	0	16.59	16.83	16.95	1
		25	12	16.62	16.84	16.94	1
		25	25	16.54	16.79	16.93	1
		50	0	16.58	16.84	16.86	1
	16QAM	1	0	16.37	16.63	16.73	1
		1	24	16.73	16.97	17.09	1
		1	49	16.41	16.63	16.73	1
		25	0	16.53	16.78	16.92	2
		25	12	16.59	16.80	16.95	2
		25	25	16.49	16.80	16.87	2
		50	0	16.53	16.74	16.89	2
	64QAM	1	0	16.33	16.64	16.71	2
		1	24	16.69	16.93	17.05	2
		1	49	16.38	16.60	16.70	2
		25	0	16.54	16.79	16.93	3
		25	12	16.58	16.84	16.86	3
		25	25	16.52	16.76	16.86	3
		50	0	16.53	16.75	16.87	3
BW	MCS Index	Channel		19975	20175	20375	3GPP MPR
		Frequency (MHz)		1712.5	1732.5	1752.5	
5M	QPSK	1	0	16.41	16.66	16.76	0
		1	12	16.76	16.97	17.11	0
		1	24	16.41	16.65	16.80	0
		12	0	16.58	16.84	16.92	1
		12	6	16.56	16.90	16.94	1
		12	13	16.56	16.82	16.94	1
		25	0	16.53	16.84	16.89	1
	16QAM	1	0	16.37	16.66	16.77	1
		1	12	16.68	17.01	17.06	1
		1	24	16.41	16.62	16.76	1
		12	0	16.51	16.80	16.86	2
		12	6	16.55	16.86	16.90	2
		12	13	16.50	16.79	16.90	2
		25	0	16.49	16.75	16.85	2
	64QAM	1	0	16.34	16.63	16.74	2
		1	12	16.64	16.97	17.01	2
		1	24	16.32	16.66	16.73	2
		12	0	16.56	16.82	16.87	3
		12	6	16.51	16.85	16.92	3
		12	13	16.53	16.79	16.84	3
		25	0	16.48	16.79	16.86	3

BW	MCS Index	Channel		19965	20175	20385	3GPP MPR
		Frequency (MHz)		1711.5	1732.5	1753.5	
3M	QPSK	1	0	16.40	16.71	16.75	0
		1	7	16.71	17.00	17.11	0
		1	14	16.40	16.66	16.76	0
		8	0	16.55	16.84	16.95	1
		8	3	16.56	16.89	16.93	1
		8	7	16.52	16.86	16.93	1
		15	0	16.55	16.81	16.86	1
	16QAM	1	0	16.36	16.70	16.77	1
		1	7	16.71	16.98	17.07	1
		1	14	16.41	16.62	16.77	1
		8	0	16.51	16.82	16.89	2
		8	3	16.58	16.82	16.94	2
		8	7	16.55	16.77	16.87	2
		15	0	16.49	16.74	16.88	2
	64QAM	1	0	16.40	16.66	16.68	2
		1	7	16.67	16.91	17.01	2
		1	14	16.39	16.61	16.73	2
		8	0	16.55	16.85	16.88	3
		8	3	16.57	16.78	16.93	3
		8	7	16.49	16.80	16.87	3
		15	0	16.52	16.73	16.88	3
BW	MCS Index	Channel		19957	20175	20393	3GPP MPR
Frequency (MHz)		1710.7	1732.5	1754.3			
1.4M	QPSK	1	0	16.38	16.69	16.76	0
		1	2	16.75	16.99	17.11	0
		1	5	16.44	16.66	16.76	0
		3	0	16.56	16.81	16.95	0
		3	1	16.63	16.89	16.91	0
		3	3	16.55	16.79	16.89	0
		6	0	16.58	16.80	16.92	1
	16QAM	1	0	16.39	16.64	16.74	1
		1	2	16.74	16.95	17.09	1
		1	5	16.38	16.62	16.77	1
		3	0	16.55	16.81	16.89	1
		3	1	16.53	16.87	16.91	1
		3	3	16.53	16.79	16.91	1
		6	0	16.49	16.80	16.85	2
	64QAM	1	0	16.34	16.63	16.74	2
		1	2	16.64	16.97	17.02	2
		1	5	16.38	16.59	16.73	2
		3	0	16.52	16.81	16.87	2
		3	1	16.53	16.84	16.88	2
		3	3	16.52	16.76	16.91	2
		6	0	16.50	16.76	16.84	3