



*Full*

# TEST REPORT

**No. I18D00006-SRD05**

*For*

**Client : Lenovo(Shanghai) Electronics  
Technology Co., Ltd.**

**Production : Portable Tablet Computer**

**Model Name : Lenovo TB-8504X**

**FCC ID: O57TB8504X**

**Hardware Version: Lenovo Tablet TB-8504X**

**Software Version: TB-8504X\_RF01\_170520**

**Issued date: 2018-02-05**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of ECIT Shanghai.

**Test Laboratory:**

ECIT Shanghai, East China Institute of Telecommunications

Add: 7-8F, G Area, No.668, Beijing East Road, Huangpu District, Shanghai, P. R. China

Tel: (+86)-021-63843300, E-Mail: [welcome@ecit.org.cn](mailto:welcome@ecit.org.cn)

**Revision Version**

<b>Report Number</b>	<b>Revision</b>	<b>Date</b>	<b>Memo</b>
I18D00006-SRD05	00	2018-01-26	Initial creation of test report
I18D00006-SRD05	01	2018-02-05	Second creation of test report

## CONTENTS

1.	TEST LABORATORY .....	5
1.1.	TESTING LOCATION .....	5
1.2.	TESTING ENVIRONMENT .....	5
1.3.	PROJECT DATA.....	5
1.4.	SIGNATURE .....	5
2.	CLIENT INFORMATION .....	6
2.1.	APPLICANT INFORMATION .....	6
2.2.	MANUFACTURER INFORMATION .....	6
3.	EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....	7
3.1.	ABOUT EUT .....	7
3.2.	INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST.....	7
3.3.	INTERNAL IDENTIFICATION OF AE USED DURING THE TEST .....	7
3.4.	STATEMENTS.....	7
4.	REFERENCE DOCUMENTS.....	8
4.1.	REFERENCE DOCUMENTS FOR TESTING .....	8
5.	SUMMARY OF TEST RESULTS.....	9
6.	TEST EQUIPMENT UTILIZED .....	10
7.	TEST ENVIRONMENT .....	12
ANNEX A.	MEASUREMENT RESULTS.....	13
ANNEX A.1.	OUTPUT POWER .....	13
ANNEX A.2.	EMISSION LIMIT.....	22
ANNEX A.3.	FREQUENCY STABILITY.....	26
ANNEX A.4.	OCCUPIED BANDWIDTH .....	28
ANNEX A.5.	EMISSION BANDWIDTH.....	37
ANNEX A.6.	BAND EDGE COMPLIANCE.....	46

<b>ANNEX A.7. CONDUCTED SPURIOUS EMISSION.....</b>	<b>53</b>
<b>ANNEX A.8. PEAK-TO-AVERAGE POWER RATIO.....</b>	<b>55</b>
<b>ANNEX B. DEVIATIONS FROM PRESCRIBED TEST METHODS.....</b>	<b>58</b>

## 1. Test Laboratory

### 1.1. Testing Location

Company Name:	ECIT Shanghai, East China Institute of Telecommunications
Address:	7-8F, G Area, No. 668, Beijing East Road, Huangpu District, Shanghai, P. R. China
Postal Code:	200001
Telephone:	(+86)-021-63843300
Fax:	(+86)-021-63843301


### 1.2. Testing Environment

Normal Temperature:	15-35°C
Extreme Temperature:	-10/+55°C
Relative Humidity:	25-75%


### 1.3. Project data

Project Leader:	Yu Yuting
Testing Start Date:	2018-01-09
Testing End Date:	2018-01-10


### 1.4. Signature



Shi Hongqi  
(Prepared this test report)



Ding Li  
(Reviewed this test report)



Zheng Zhongbin  
Director of the laboratory  
(Approved this test report)

## 2. Client Information

### 2.1. Applicant Information

Company Name: Lenovo(Shanghai) Electronics Technology Co., Ltd.  
Address: NO.68 BUILDING, 199 FENJU RD, China (Shanghai) Pilot Free Trade Zone, 200131, CHINA  
Postcode: N/A  
Telephone: 18116117205

### 2.2. Manufacturer Information

Company Name: Lenovo(Shanghai) Electronics Technology Co., Ltd.  
Address: 23/F, Lincoln House, Taikoo Place 979 King's Road, Quarry Bay, Hong Kong  
Postcode: N/A  
Telephone: 18116117205

### 3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

#### 3.1. About EUT

EUT Description	Portable Tablet Computer
Model name	Lenovo TB-8504X
FCC ID	O57TB8504X
Frequency	GSM850/900/1800/1900; WCDMA Band I/II/V/VIII LTE FDD1/3/5/7/8/20 TDD38/40
Extreme Temperature	-10/+55 °C
Nominal Voltage	3.85V
Extreme High Voltage	4.4V
Extreme Low Voltage	3.65V

Note: Photographs of EUT are shown in ANNEX A of this test report.

#### 3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version	Date of receipt
N07	863768030010993	Lenovo Tablet TB-8504X	TB-8504X_RF01_1705 20	2018-01-08

\*EUT ID: is used to identify the test sample in the lab internally.

#### 3.3. Internal Identification of AE used during the test

AE ID*	Description	SN
AE1	RF cable	---
AE2	Dummy Battery	---

\*AE ID: is used to identify the test sample in the lab internally.

#### 3.4. Statements

The Lenovo TB-8504X, supporting GSM/GPRS/EDGE/WCDMA/LTE/WLAN/BT/BLE/GPS, manufactured by Lenovo PC HK Limited, which is a new product for testing.

ECIT has verified that the compliance of the tested device specified in section 5 of this test report is successfully evaluated according to the procedure and test methods as defined in type certification requirement listed in section 5 of this test report.

## 4. Reference Documents

### 4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 22	PUBLIC MOBILE SERVICES	2014
FCC Part 27	MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES	2014
ANSI/TIA-603-E	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards	2016
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2014
KDB 971168 D01	Measurement Guidance for Certification of Licensed Digital Transmitters	v03



## 5. SUMMARY OF TEST RESULTS

### LTE Band 5

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	§2.1046(a), 22.913(a)	A.1	P
2	Emission Limit	22.917, 2.1051	A.2	P
3	Frequency Stability	22.235, 2.1055	A.3	P
4	Occupied Bandwidth	2.1049(h)(i)	A.4	P
5	Emission Bandwidth	22.917(b)	A.5	P
6	Band Edge Compliance	22.917(b)	A.6	P
7	Conducted Spurious Emission	22.917, 2.1057	A.7	P

### LTE Band 7

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	27.50(h)(2)	A.1	P
2	Emission Limit	27.53(m), 2.1051	A.2	P
3	Frequency Stability	27.54, 2.1055	A.3	P
4	Occupied Bandwidth	2.1049(h)(i)	A.4	P
5	Emission Bandwidth	27.53(m)	A.5	P
6	Band Edge Compliance	27.53(m)	A.6	P
7	Conducted Spurious Emission	27.53(m), 2.1057	A.7	P
8	Peak to Average Power Ratio	27.50(a)	A.8	P

## 6. Test Equipment Utilized

### Climate chamber

No.	Equipment	Model	Serial Number	Manufacturer	Calibration date	Cal.interval
1	Climate chamber	SH-641	92012011	ESPEC	2017-12-25	2 Year

### Radiated emission test system

The test equipment and ancillaries used are as follows.

No.	Equipment	Model	Serial Number	Manufacturer	Calibration date	Cal.interval
1	Universal Radio Communication Tester	CMW500	104178	R&S	2017-05-11	1 Year
2	Test Receiver	ESU40	100307	R&S	2017-05-11	1 Year
3	TRILOG Broadband Antenna	VULB9163	VULB9163-515	Schwarzbeck	2017-02-25	3 Year
4	Double Ridged Guide Antenna	ETS-3117	135890	ETS	2017-01-11	3 Year
5	2-Line V-Network	ENV216	101380	R&S	2017-05-11	1 Year
6	Substitution Antenna	ETS-3117	00135890	ETS	2017-01-11	3 Year
7	RF Signal Generator	SMF100A	102314	R&S	2017-05-11	1 Year
8	Substitution Antenna	VUBA9117	9117-266	Schwarzbeck	2017-11-18	3 Year
9	Amplifier	SCU08	10146	R&S	2017-05-11	1 Year

**Conducted test system**

No.	Name	Type	SN	Manufacture	Calibration date	Cal.interval
1	Vector Signal Analyser	FSQ26	101096	Rohde&Schwarz	2017-05-11	1 Year
2	Wireless communication comprehensive tester	CMW500	148904	Rohde&Schwarz	2017-08-21	1 Year
3	DC Power Supply	ZUP60-14	LOC-220Z 006 -0007	TDL-Lambda	2017-05-11	1 Year

**Software**

Name	Version
Eagle FCC LTE auto test system	V3.0
EMC32	V9.15

## 7. Test Environment

**Shielding Room1** (6.0 meters×3.0 meters×2.7 meters) did not exceed following limits along the conducted RF performance testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20%, Max. = 75 %
Shielding effectiveness	> 100 dB
Ground system resistance	< 0.5 Ω

**Control room** did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. =25 %, Max. =75 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

**Fully-anechoic chamber1** (6.9 meters×10.9 meters×5.4 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 25 %, Max. = 75 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
VSWR	Between 0 and 6 dB, from 1GHz to 18GHz
Site Attenuation Deviation	Between -4 and 4 dB,30MHz to 1GHz
Uniformity of field strength	Between 0 and 6 dB, from 80MHz to 3000 MHz

## ANNEX A. MEASUREMENT RESULTS

### ANNEX A.1. OUTPUT POWER

#### A.1.1. Summary

During the process of testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication tester (CMW500) to ensure max power transmission and proper modulation. In all cases, output power is within the specified limits.

#### A.1.2. Conducted

##### A.1.2.1. Method of Measurements

The EUT was set up for the max output power with pseudo random data modulation. These measurements were done at 3 frequencies (bottom, middle and top of operational frequency range) for each bandwidth.

##### A.1.2.2 Measurement result

###### LTE band 5

Bandwidth	RB size/offset	Frequency (MHz)	Power(dBm)	
			QPSK	16QAM
1.4MHz	1 RB high	848.3	23.11	22.84
		836.5	23.28	22.29
		824.7	23.69	23.58
	1 RB low	848.3	23.08	22.73
		836.5	23.11	22.22
		824.7	23.72	23.36
	50% RB mid	848.3	23.32	23.31
		836.5	23.16	23.15
		824.7	23.17	23.02
	100% RB	848.3	22.16	21.15
		836.5	22.25	21.05
		824.7	22.33	21.34
3MHz	1 RB high	847.5	23.08	22.52
		836.5	23.11	22.44
		825.5	23.45	22.19
	1 RB low	847.5	23.28	22.81
		836.5	23.12	22.5
		825.5	23.11	22.13
	50% RB mid	847.5	22.17	21.18
		836.5	22.17	21.22

	100% RB	825.5	22.2	21.13
		847.5	22.07	21.09
		836.5	22.23	21.17
		825.5	22.2	21.34
5MHz	1 RB high	846.5	22.96	22.4
		836.5	23	21.63
		826.5	23	22.49
	1 RB low	846.5	22.94	22.27
		836.5	23.05	21.61
		826.5	23.18	22.5
	50% RB mid	846.5	22.13	22.24
		836.5	22.21	22.22
		826.5	22.24	22.23
	100% RB	846.5	22.18	21.23
		836.5	22.2	21.43
		826.5	22.22	21.28
10MHz	1 RB high	844.0	23.19	22.5
		836.5	22.94	22.48
		829.0	22.84	22.78
	1 RB low	844.0	23.2	22.52
		836.5	23.18	22.44
		829.0	23.16	22.93
	50% RB mid	844.0	22.27	22.27
		836.5	22.27	22.26
		829.0	22.26	22.26
	100% RB	844.0	22.29	21.27
		836.5	22.27	21.23
		829.0	22.26	21.32

## LTE band 7

Bandwidth	RB size/offset	Frequency (MHz)	Power(dBm)	
			QPSK	16QAM
5MHz	1 RB high	2502.5	21.71	21.02
		2535	21.79	20.19
		2567.5	21.55	20.7
	1 RB low	2502.5	21.69	20.91
		2535	21.8	20.24
		2567.5	21.67	21.02
	50% RB mid	2502.5	20.81	20.81
		2535	20.75	20.75
		2567.5	20.45	20.45
	100% RB	2502.5	20.82	19.88
		2535	20.74	19.98
		2567.5	20.55	19.64
10MHz	1 RB high	2505	22.03	21.48
		2535	21.82	21.03
		2565	21.84	21.22
	1 RB low	2505	21.86	21.35
		2535	21.94	21.88
		2565	21.7	21.39
	50% RB mid	2505	20.9	20.9
		2535	20.9	20.82
		2565	20.49	20.49
	100% RB	2505	20.89	19.66
		2535	20.84	19.81
		2565	20.62	19.7
15MHz	1 RB high	2507.5	21.62	21.55
		2535	21.75	21.33
		2562.5	21.75	20.98
	1 RB low	2507.5	21.99	21.37
		2535	21.86	21.48
		2562.5	21.87	21.19
	50% RB mid	2507.5	20.93	20.94
		2535	20.83	20.83
		2562.5	20.53	20.53
	100% RB	2507.5	20.89	19.9
		2535	20.85	19.76

		2562.5	20.62	19.73
20MHz	1 RB high	2510	22.03	20.91
		2535	21.81	21.26
		2560	21.93	20.89
	1 RB low	2510	22.01	20.86
		2535	21.88	21.34
		2560	21.99	20.78
	50% RB mid	2510	20.96	20.96
		2535	20.91	20.92
		2560	20.72	20.71
	100% RB	2510	20.95	19.84
		2535	20.86	19.86
		2560	20.64	19.54

**A.1.3 Radiated**

**A.1.3.1 Description**

This is the test for the maximum radiated power from the EUT.

Rule Part 27.50(d) specifies “Fixed, mobile, and portable (handheld) stations operating in the 1710–1755 MHz band are limited to 1 watt EIRP”.


Rule Part 27.50(h)(2) specifies “Mobile stations are limited to 2.0 watts EIRP.”.

Rule Part 27.50(c) specifies “Portable stations (hand-held de-vices) are limited to 3 watts ERP.”.

**A.1.3.2 Method of Measurement**

The measurements procedures in TIA-603E-2016 are used.


1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.

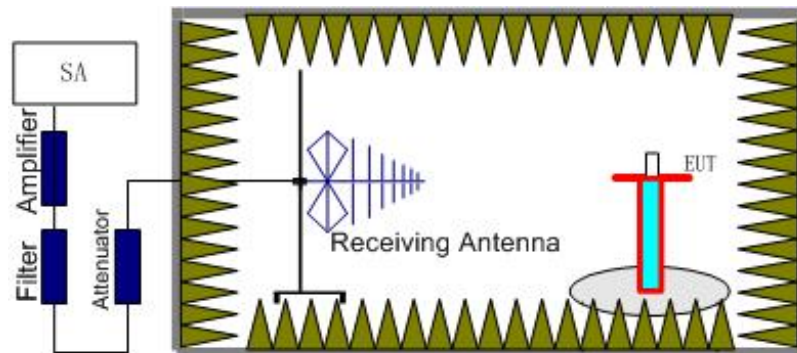

2. The EUT is then put into continuously transmitting mode at its maximum power level during



- the test. And the maximum value of the receiver should be recorded as (Pr).
- The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

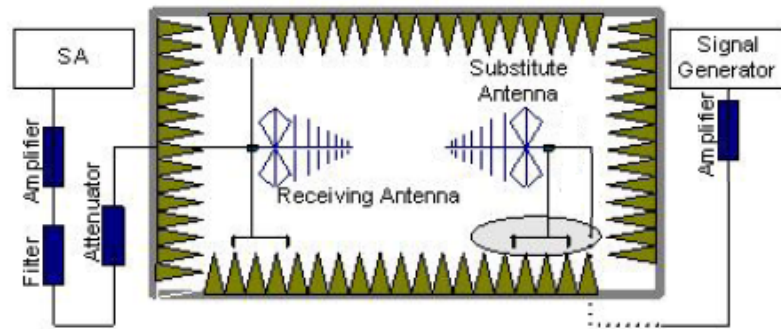

- In the chamber, a substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power ( $P_{Mea}$ ) is applied to the input of the substitution antenna. Adjust the level of the signal generator output until the value of the receiver reaches the previously recorded ( $P_r$ ). The power of signal source ( $P_{Mea}$ ) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
- An amplifier should be connected to the Signal Source output port. And the cable should be connected between the amplifier and the substitution antenna. The cable loss ( $P_{cl}$ ), the substitution antenna Gain ( $G_a$ ) and the amplifier Gain ( $P_{Ag}$ ) should be recorded after test. The measurement results are obtained as described below:  

$$\text{Power (EIRP)} = P_{Mea} - P_{Ag} - P_{cl} - G_a$$
  - This value is EIRP since the measurement is calibrated using an antenna of known gain (unit dBi) and known input power.
  - ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15$ .

**A.1.3.3 Measurement result**

**LTE Band 5- ERP 22.913(a)**

**Limits:**  $\leq 38.45\text{dBm}$  (7W)

**LTE Band 5\_1.4MHz\_QPSK**

Frequency(MHz)	$P_{Mea}$ (dBm)	$P_{cl}$ (dB)	$P_{Ag}$ (dB)	$G_a$ Antenna Gain(dB)	ERP(dBm)	Limit(dBm)
824.70	-13.56	3.1	37	-2.87	19.62	38.45
836.50	-9.92	3.1	37	-3.11	20.87	38.45
848.30	-11.25	3.1	37	-3.11	21.69	38.45

**LTE Band 5\_3MHz\_QPSK**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>c</sub> (dB)	P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	ERP(dBm)	Limit(dBm)
825.50	-13.14	3.1	37	-2.87	20.04	38.45
836.50	-10.18	3.1	37	-3.11	20.61	38.45
847.50	-11.35	3.1	37	-3.11	21.59	38.45

### LTE Band 5\_5MHz\_QPSK

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>c</sub> (dB)	P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	ERP(dBm)	Limit(dBm)
826.50	-13.18	3.1	37	-2.87	20	38.45
836.50	-10.13	3.1	37	-3.11	20.66	38.45
846.50	-11.47	3.1	37	-3.11	21.47	38.45

### LTE Band 5\_10MHz\_QPSK

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>c</sub> (dB)	P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	ERP(dBm)	Limit(dBm)
829.00	-13.13	3.1	37	-2.87	20.05	38.45
836.50	-10.14	3.1	37	-3.11	20.65	38.45
844.00	-11.87	3.1	37	-3.11	21.07	38.45

### LTE Band 5\_1.4MHz\_16QAM

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	ERP(dBm)	Limit(dBm)
824.70	-13.08	3.1	37	-2.87	20.1	38.45
836.50	-10.17	3.1	37	-3.11	20.62	38.45
848.30	-11.13	3.1	37	-3.11	21.81	38.45

### LTE Band 5\_3MHz\_16QAM

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	ERP(dBm)	Limit(dBm)
825.50	-13.18	3.1	37	-2.87	20	38.45
836.50	-10.09	3.1	37	-3.11	20.7	38.45
847.50	-11.35	3.1	37	-3.11	21.59	38.45

### LTE Band 5\_5MHz\_16QAM

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	ERP(dBm)	Limit(dBm)
826.50	-13.27	3.1	37	-2.87	19.91	38.45
836.50	-10.06	3.1	37	-3.11	20.73	38.45
846.50	-11.43	3.1	37	-3.11	21.51	38.45

### LTE Band 5\_10MHz\_16QAM

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	ERP(dBm)	Limit(dBm)
829.00	-12.84	3.1	37	-2.87	20.34	38.45
836.50	-9.91	3.1	37	-3.11	20.88	38.45
844.00	-11.41	3.1	37	-3.11	21.53	38.45

Peak ERP(dBm)=P<sub>Mea</sub>(-12.84dBm)+G<sub>a</sub>(-2.87dBi)-P<sub>Ag</sub>(37dB)-P<sub>cl</sub>(3.1dB) = 20.34dBm

**LTE Band 7- EIRP 27.50(h)(2)**

**Limits:** ≤33 dBm (2W)

**LTE Band 7\_5MHz\_QPSK**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)
2502.50	-14.04	5.4	34.7	5.6	20.86	33.00
2535.00	-14.16	5.4	35.1	5.8	21.34	33.00
2567.50	-14.26	5.4	34.8	6.1	21.24	33.00

**LTE Band 7\_10MHz\_QPSK**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)
2505.00	-13.56	5.4	34.7	5.6	21.34	33.00
2535.00	-14.04	5.4	35.1	5.8	21.46	33.00
2565.00	-13.88	5.4	34.8	6.1	21.62	33.00

**LTE Band 7\_15MHz\_QPSK**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)
2507.50	-13.41	5.4	34.7	5.6	21.49	33.00
2535.00	-14.11	5.4	35.1	5.8	21.39	33.00
2562.50	-13.93	5.4	34.8	6.1	21.57	33.00

**LTE Band 7\_20MHz\_QPSK**

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)
2510.00	-13.36	5.4	34.7	5.6	21.54	33.00
2535.00	-14.3	5.4	35.1	5.8	21.2	33.00
2560.00	-13.75	5.4	34.8	6.1	21.75	33.00

### LTE Band 7\_5MHz\_16QAM

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)
2502.50	-13.98	5.4	34.7	5.6	20.92	33.00
2535.00	-14.22	5.4	35.1	5.8	21.28	33.00
2567.50	-14.52	5.4	34.8	6.1	20.98	33.00

### LTE Band 7\_10MHz\_16QAM

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)
2505.00	-13.66	5.4	34.7	5.6	21.24	33.00
2535.00	-14.22	5.4	35.1	5.8	21.28	33.00
2565.00	-14.08	5.4	34.8	6.1	21.42	33.00

### LTE Band 7\_15MHz\_16QAM

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)
2507.50	-13.39	5.4	34.7	5.6	21.51	33.00
2535.00	-13.98	5.4	35.1	5.8	21.52	33.00
2562.50	-13.92	5.4	34.8	6.1	21.58	33.00

### LTE Band 7\_20MHz\_16QAM

Frequency(MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	P <sub>Ag</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)
2510.00	-13.28	5.4	34.7	5.6	21.62	33.00
2535.00	-14.04	5.4	35.1	5.8	21.46	33.00
2560.00	-14.05	5.4	34.8	6.1	21.45	33.00

Peak EIRP(dBm) = P<sub>Mea</sub>(-13.28dBm) + G<sub>a</sub> (5.6dBi) + P<sub>Ag</sub> (34.7dB) - P<sub>cl</sub> (5.4dB) = 21.62dBm

**ANALYZER SETTINGS:**

RBW = VBW = 8MHz for occupied bandwidths equal to or less than 5MHz.

RBW = VBW = 20MHz for occupied bandwidths equal to or greater than 10MHz.

**ANNEX A.2. EMISSION LIMIT**

**Reference**

FCC: CFR 2.1051, 22.917, 27.53(g), 27.53(h) , 27.53(m).


**A.2.1 Measurement Method**

The measurements procedures in TIA-603E-2016 are used. This measurement is carried out in fully-anechoic chamber FAC-3.


The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier. The resolution bandwidth is set 1MHz as outlined in Part 22.917, Part 27.53(g), Part 27.53(h), Part 27.53(m). The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the LTE Bands,5,7,

**The procedure of radiated spurious emissions is as follows:**

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector.

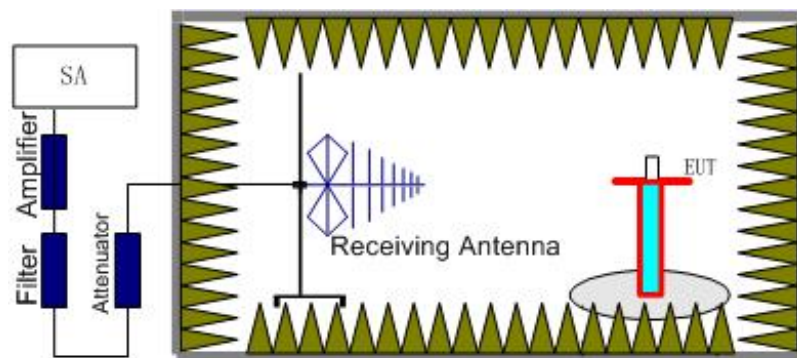

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

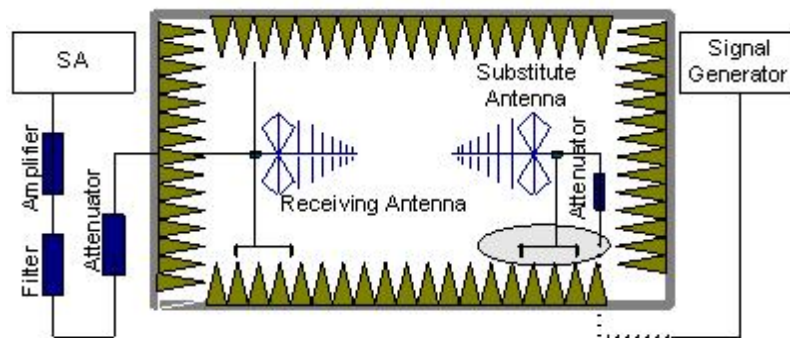

In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power ( $P_{Mea}$ ) is applied to the input of the substitution antenna. Adjust the level of the signal generator output until the value of the receiver reaches the previously recorded ( $P_r$ ). The power of signal source ( $P_{Mea}$ ) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. The Path loss ( $P_{pl}$ ) between the Signal Source with the Substitution Antenna and the Substitution Antenna Gain ( $G_a$ ) should be recorded after test.

An amplifier should be connected in for the test.

The Path loss ( $P_{pl}$ ) is the summation of the cable loss and the gain of the amplifier.

The measurement results are obtained as described below:

$$\text{Power (EIRP)} = P_{Mea} + P_{pl} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (unit: dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15\text{dB}$ .

## A.2.2 Measurement Limit

Part 22.917, Part 27.53(g), Part 27.53(h), Part 27.53(m) all specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power ( $P$ ) by a factor of at least  $43 + 10 \log(P)$  dB. The specification that emissions shall be attenuated below the transmitter power ( $P$ ) by at least  $43 + 10 \log(P)$  dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

## A.2.3 Measurement Results

7. Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the LTE Bands 5,7. It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the LTE Bands 5,7. into any of the other blocks. The equipment

must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this. The evaluated frequency range is from 30MHz to 26GHz.

### LTE Band 5, 1.4MHz, QPSK, Channel 20407

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
1689.5	-49	4.4	5	-48.4	-13.00	35.40	H
2539.230769	-41.62	5.4	5.6	-41.42	-13.00	28.42	V
3187.2	-52.73	6.1	6.8	-52.03	-13.00	39.03	V
4272	-54.32	7.1	8.9	-52.52	-13.00	39.52	V
5604.8	-53.19	8.3	10	-51.49	-13.00	38.49	V
6448	-51.23	8.9	10.4	-49.73	-13.00	36.73	H

### LTE Band 5, 1.4MHz, QPSK, Channel 20525

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
1672.192308	-47.42	4.4	5	-46.82	-13.00	33.82	V
2465	-41.48	5.4	5.6	-41.28	-13.00	28.28	H
3181.2	-52.47	6.1	6.8	-51.77	-13.00	38.77	V
4017.2	-54.77	6.9	8.6	-53.07	-13.00	40.07	H
4854.4	-53.21	7.6	9.3	-51.51	-13.00	38.51	H
5647.6	-53.2	8.3	10	-51.5	-13.00	38.50	V

### LTE Band 5, 1.4MHz, QPSK, Channel 20643

Frequency(MHz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
1746.269231	-45.4	4.5	4.7	-45.2	-13.00	32.20	V
2541.538462	-40.13	5.4	5.6	-39.93	-13.00	26.93	V
3191.6	-52.22	6.1	6.8	-51.52	-13.00	38.52	V
4031.6	-54.19	6.9	8.6	-52.49	-13.00	39.49	V
4810.4	-51.02	7.6	9	-49.62	-13.00	36.62	H
5701.6	-53.17	8.5	10.2	-51.47	-13.00	38.47	H



### LTE Band 7, 5 MHz, QPSK, Channel 20775

Frequency(M Hz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
3833.2	-50.02	6.7	8.1	-48.62	-13.00	35.62	H
5000.8	-48.83	7.8	9.8	-46.83	-13.00	33.83	V
7288.4	-46.92	9.6	11.4	-45.12	-13.00	32.12	V
10266.8	-39.56	11.3	12.4	-38.46	-13.00	25.46	V
12911	-32.58	13	13.1	-32.48	-13.00	19.48	H
15196.5	-28.66	14.5	13.9	-29.26	-13.00	16.26	H

### LTE Band 7, 5 MHz, QPSK, Channel 21100

Frequency(M Hz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
3799.2	-50.58	6.6	8	-49.18	-13.00	36.18	V
4985.6	-49.41	7.8	9.8	-47.41	-13.00	34.41	V
7559.6	-45.72	9.7	11.5	-43.92	-13.00	30.92	V
9983.2	-42.36	11.3	12.4	-41.26	-13.00	28.26	V
12562.75	-34	13	13.1	-33.9	-13.00	20.90	H
15147.5	-29.18	14.5	13.9	-29.78	-13.00	16.78	H

### LTE Band 7, 5 MHz, QPSK, Channel 21425

Frequency(M Hz)	P <sub>Mea</sub> (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
3578.8	-51.89	6.4	7.9	-50.39	-13.00	37.39	H
5050.8	-48.85	7.8	9.8	-46.85	-13.00	33.85	V
7253.6	-46.97	9.5	11.3	-45.17	-13.00	32.17	H
10090	-41.61	11.3	12.4	-40.51	-13.00	27.51	V
12795.5	-33.44	13	13.1	-33.34	-13.00	20.34	H
15702.25	-28.2	14.5	13.9	-28.8	-13.00	15.80	H

Note: The maximum value of expanded measurement uncertainty for this test item is  $U = 4.2$  dB,  $k = 2$ .

## **ANNEX A.3. FREQUENCY STABILITY**

### **Reference**

FCC: CFR Part 2.1055, 22.235, 27.54.

### **A.3.1 Method of Measurement**

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMW500 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on middle channel for LTE band 5,7, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1.5 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 °C decrements from +50°C to -30°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

### **A.3.2 Measurement Limit**

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d) (2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.65VDC and 4.4VDC, with a nominal voltage of 3.85VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. For the purposes of measuring frequency stability these voltage limits are to be used.

### A.3.3 Measurement results

#### LTE Band 5, 1.4MHz bandwidth (worst case of all bandwidths)

##### Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
3.65	-2.23	10.43	0.003	0.012
3.85	-3.93	10.17	0.005	0.012
4.4	-4.13	10.26	0.005	0.012

##### Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
50°	-3.85	9.8	0.005	0.012
40°	-3.39	9.36	0.004	0.011
30°	-3.33	9.63	0.004	0.012
20°	-4.72	10.97	0.006	0.013
10°	-3.92	11.82	0.005	0.014
0°	-3.6	10.6	0.004	0.013
- 10°	-2.73	9.77	0.003	0.012
- 20°	-3.3	10.57	0.004	0.013
- 30°	-3.48	10.3	0.004	0.012

#### LTE Band 7, 5MHz bandwidth (worst case of all bandwidths)

##### Frequency Error vs Voltage

Voltage (V)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
3.65	-8.14	12.02	0.003	0.005
3.85	-5.87	11.01	0.002	0.004
4.4	-8.91	-12.1	0.004	0.005

##### Frequency Error vs Temperature

Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)	
	QPSK	16QAM	QPSK	16QAM
50°	-6.04	-10.74	0.002	0.004
40°	-5.09	-11.33	0.002	0.004
30°	-7.04	9.84	0.003	0.004
20°	-8.68	9.36	0.003	0.004
10°	-6.72	-10.73	0.003	0.004
0°	-6.84	10.46	0.003	0.004
- 10°	-5.35	11.63	0.002	0.005
- 20°	-7.51	10.49	0.003	0.004
- 30°	-6.44	11.14	0.003	0.004

## ANNEX A.4. OCCUPIED BANDWIDTH

### Reference

FCC: CFR Part 2.1049(h)(i)

#### A.4.1 Occupied Bandwidth Results


Occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the US Cellular/PCS frequency bands. The table below lists the measured 99% BW. Spectrum analyzer plots are included on the following pages.

The measurement method is from KDB 971168 4.:

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (i.e., two to five times the OBW).
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
- c) Set the reference level of the instrument as required to keep the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope must be at least  $10\log(\text{OBW} / \text{RBW})$  below the reference level.
- d) Set the detection mode to peak, and the trace mode to max hold.
- e) Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.


#### LTE band 5, 1.4MHz (99%)

Frequency(MHz)	Occupied Bandwidth (99%)( MHz)	
836.5	QPSK	16QAM
	1.098	1.106

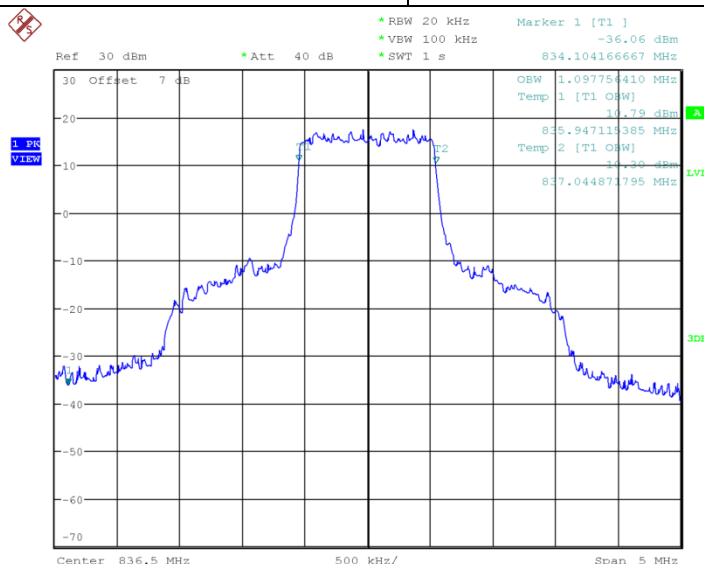

Date: 2.JAN.2003 05:07:31

#### LTE band 5, 1.4MHz Bandwidth, QPSK (99% BW)

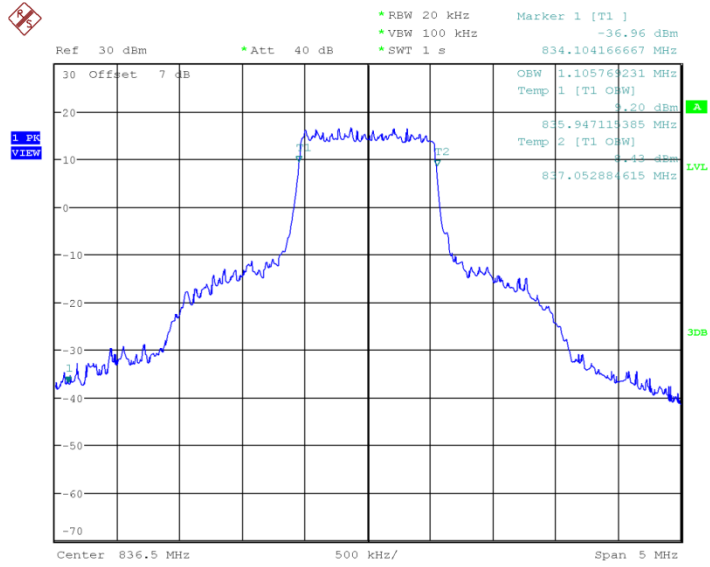


Date: 2.JAN.2003 05:07:57

## LTE band 5, 1.4MHz Bandwidth, 16QAM (99% BW)


## LTE band 5, 3MHz (99%)

Frequency(MHz)	Occupied Bandwidth (99%)( MHz)	
	QPSK	16QAM
836.5	2.708	2.692

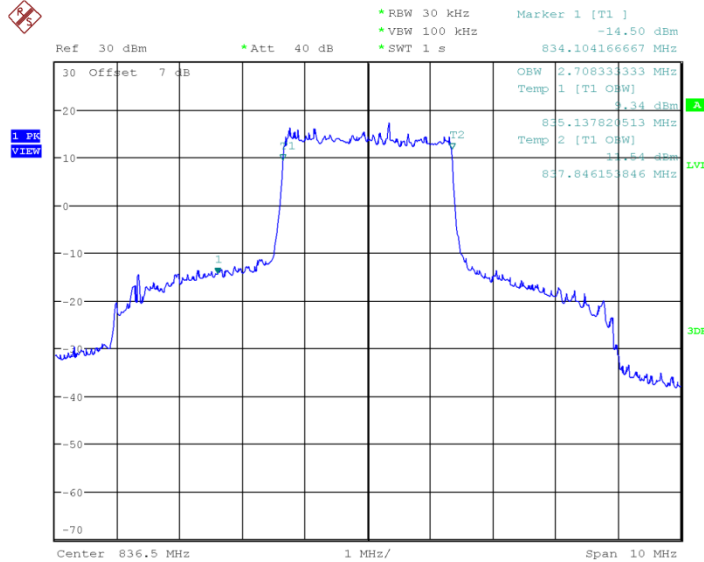

Date: 2.JAN.2003 05:08:32

## LTE band 5, 3MHz Bandwidth, QPSK (99% BW)

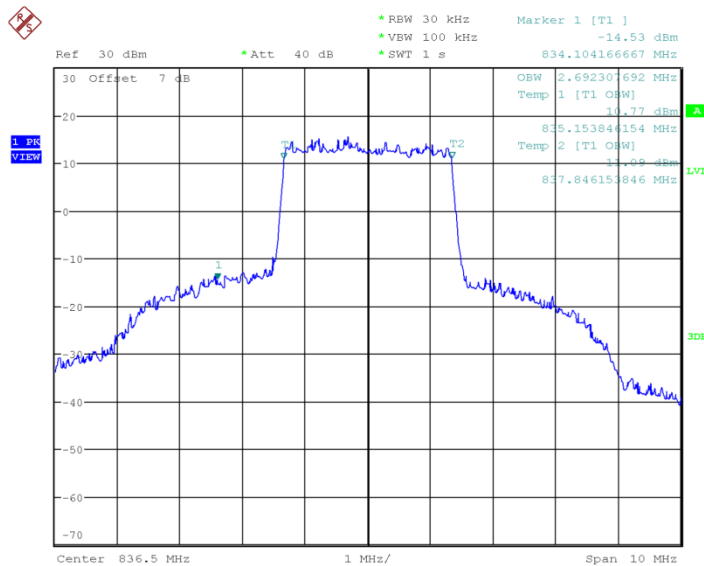


Date: 2.JAN.2003 05:08:58

## LTE band 5, 3MHz Bandwidth, 16QAM (99% BW)


## LTE band 5, 5MHz (99%)

Frequency(MHz)	Occupied Bandwidth (99%)( MHz)	
	836.5	QPSK
	4.519	4.495

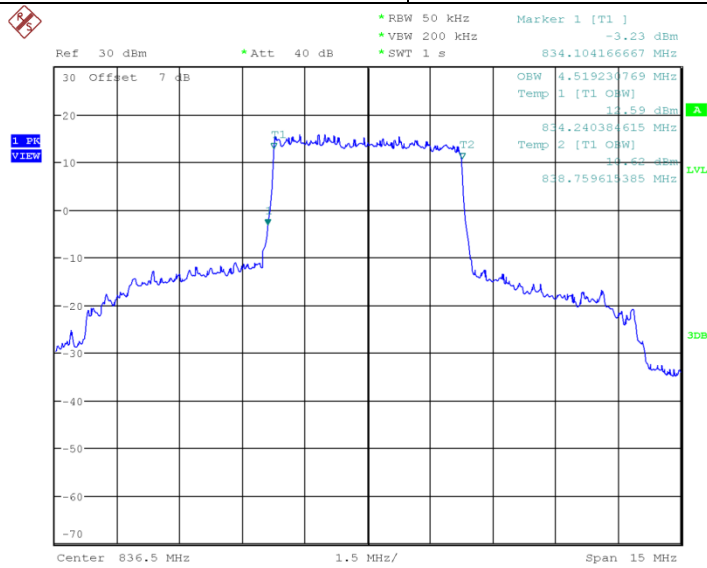

Date: 2.JAN.2003 05:09:33

### LTE band 5, 5MHz Bandwidth, QPSK (99% BW)

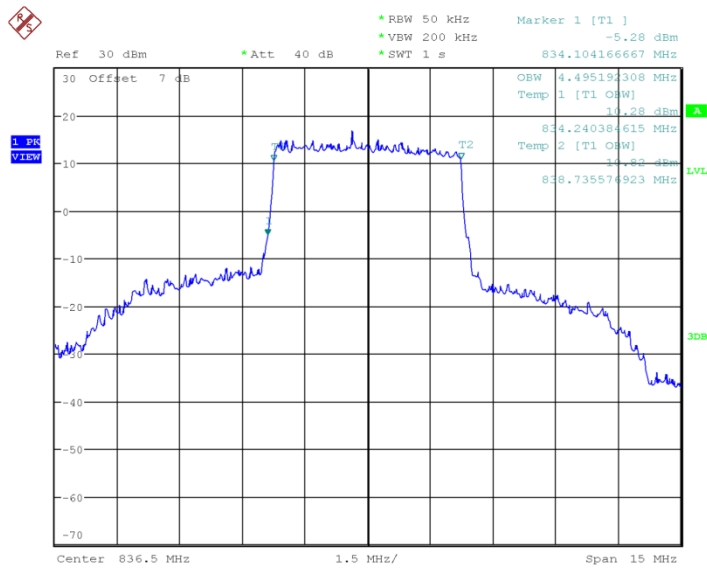


Date: 2.JAN.2003 05:10:00

### LTE band 5, 5MHz Bandwidth,16QAM (99% BW)

#### LTE band 5, 10MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)( MHz)	
	836.5	QPSK

	<b>8.99</b>	<b>8.99</b>
--	-------------	-------------

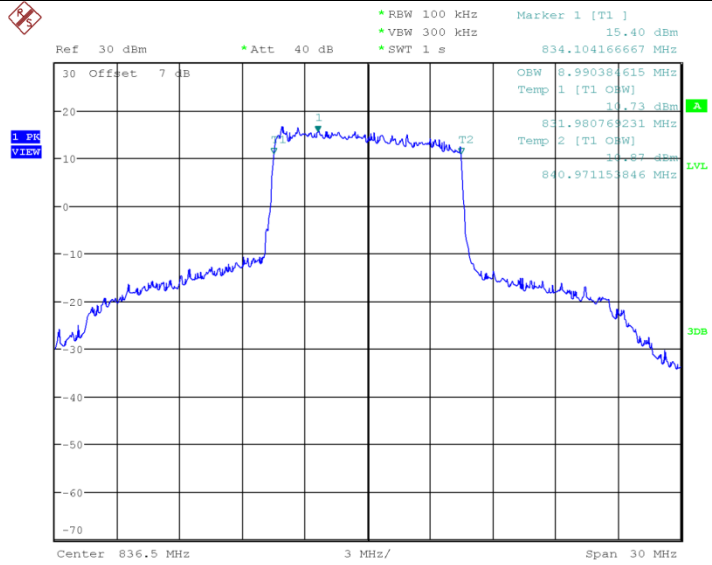

Date: 2.JAN.2003 05:10:35

### LTE band 5, 10MHz Bandwidth, QPSK (99% BW)

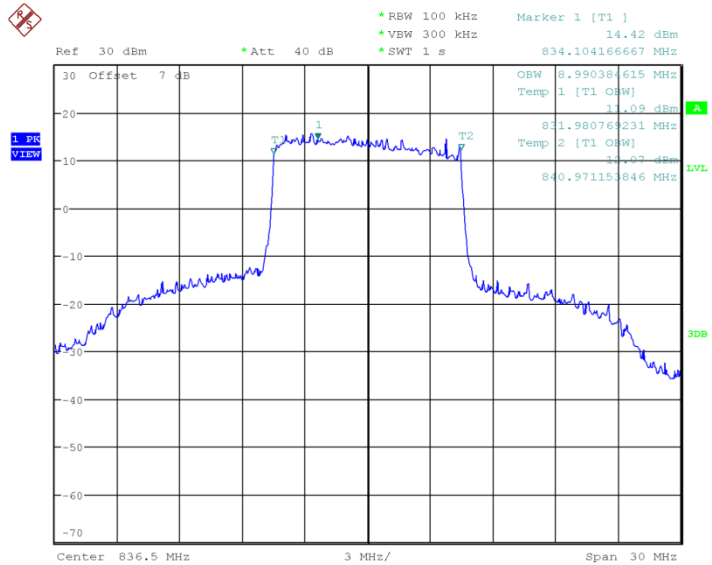


Date: 2.JAN.2003 05:11:02

### LTE band 5, 10MHz Bandwidth, 16QAM (99% BW)




## LTE band 7, 5MHz (99%)

Frequency(MHz)	Occupied Bandwidth (99%)( MHz)	
	QPSK	16QAM
2535.0	4.495	4.471

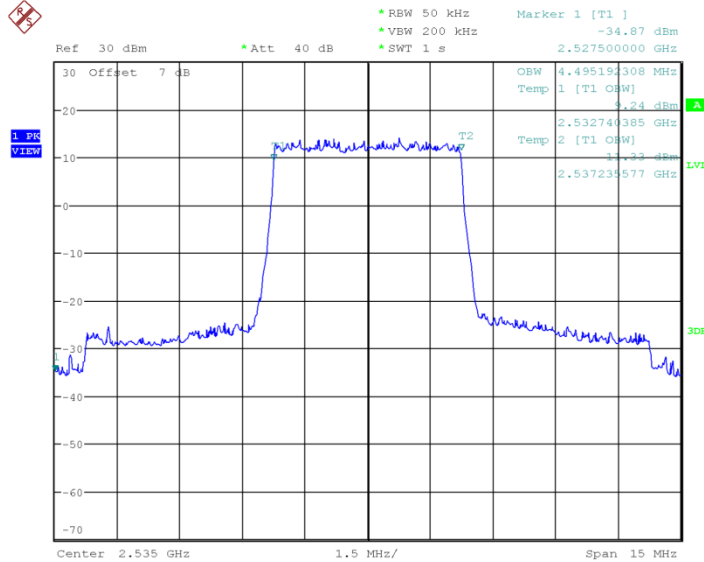

Date: 2.JAN.2003 05:11:37

## LTE band 7, 5MHz Bandwidth, QPSK (99% BW)

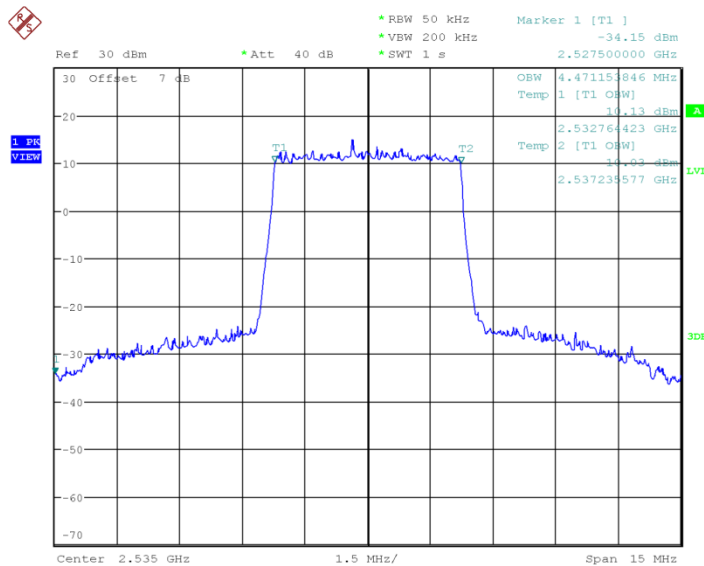


Date: 2.JAN.2003 05:12:04

## LTE band 7, 5MHz Bandwidth,16QAM (99% BW)


## LTE band 7, 10MHz (99%)

Frequency(MHz)	Occupied Bandwidth (99%)( MHz)	
	2535.0	QPSK
	8.942	8.942

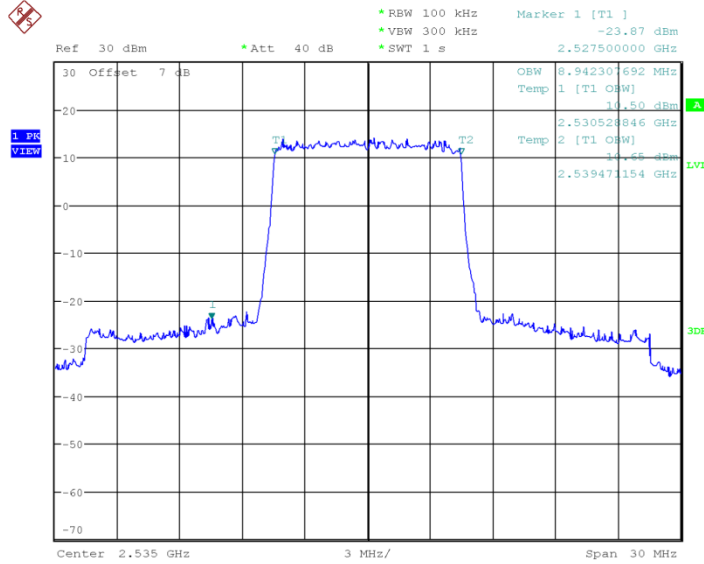

Date: 2.JAN.2003 05:12:38

## LTE band 7, 10MHz Bandwidth, QPSK (99% BW)

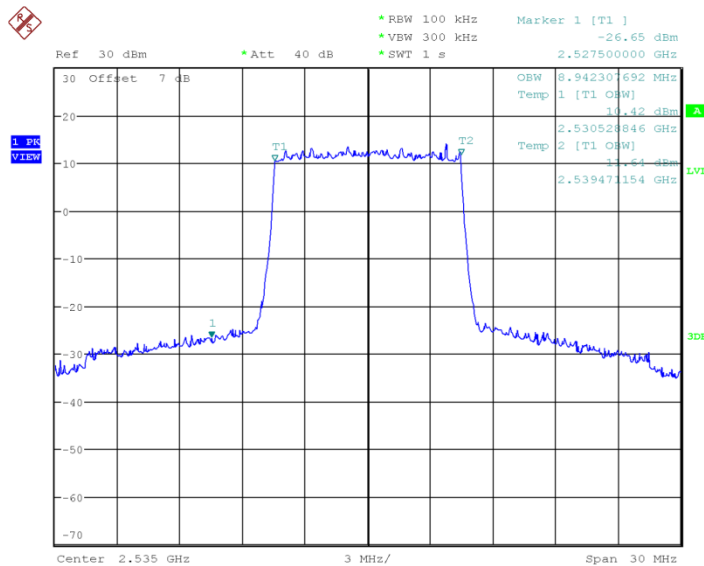


Date: 2.JAN.2003 05:13:05

## LTE band 7, 10MHz Bandwidth, 16QAM (99% BW)


## LTE band 7, 15MHz (99%)

Frequency(MHz)	Occupied Bandwidth (99%)( MHz)	
	2535.0	QPSK
	13.486	13.413

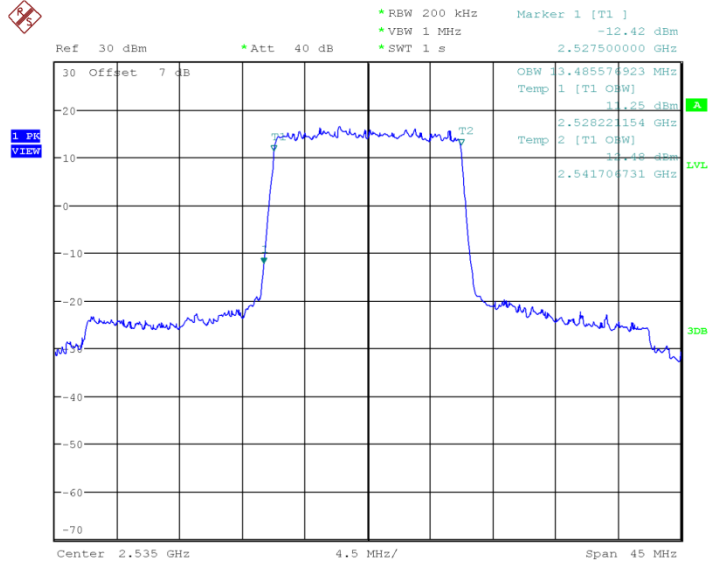

Date: 2.JAN.2003 05:13:39

## LTE band 7, 15MHz Bandwidth, QPSK (99% BW)

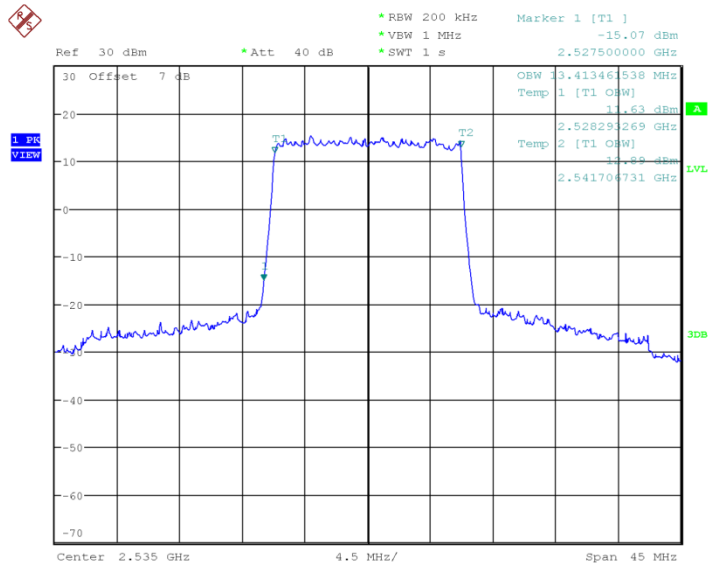


Date: 2.JAN.2003 05:14:06

## LTE band 7, 15MHz Bandwidth, 16QAM (99% BW)


## LTE band 7, 20MHz (99%)

Frequency(MHz)	Occupied Bandwidth (99%)( MHz)	
	2535.0	QPSK
	17.885	17.885

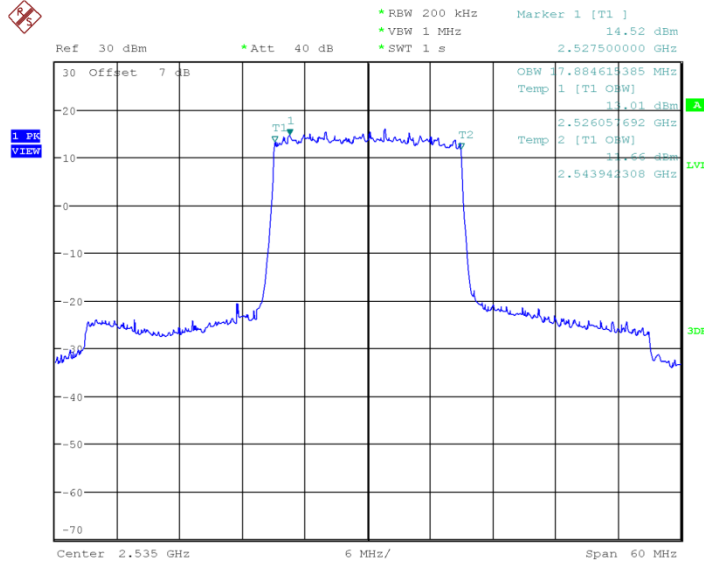

Date: 2.JAN.2003 05:14:40

## LTE band 7, 20MHz Bandwidth, QPSK (99% BW)

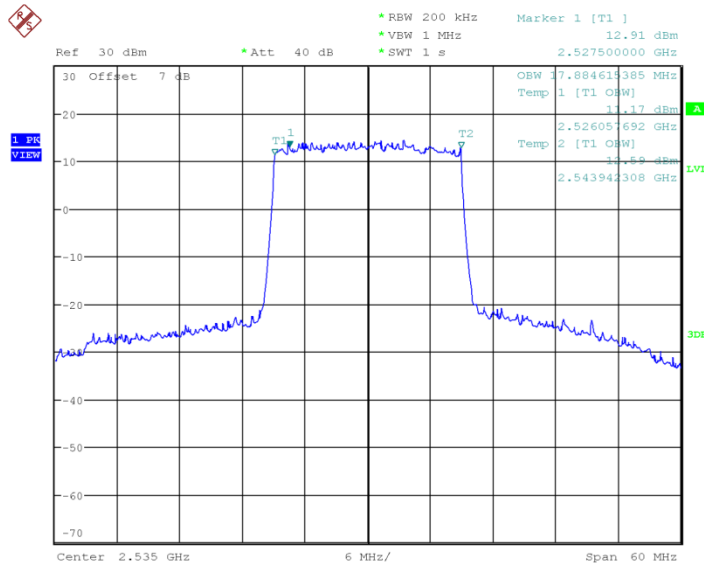

Date: 2.JAN.2003 05:15:07

## LTE band 7, 20MHz Bandwidth, 16QAM (99% BW)

## ANNEX A.5. EMISSION BANDWIDTH

### Reference


FCC: CFR Part 22.917(b), 27.53(g), 27.53(h), 27.53(m)

### A.5.1 Emission Bandwidth Results

The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power. Table below lists the measured -26dBc BW. Spectrum analyzer plots are included on the following pages.


#### LTE band 5, 1.4MHz (-26dBc)

Frequency(MHz)	Occupied Bandwidth (-26dBc)( MHz)	
	QPSK	16QAM
836.5	1.322	1.338

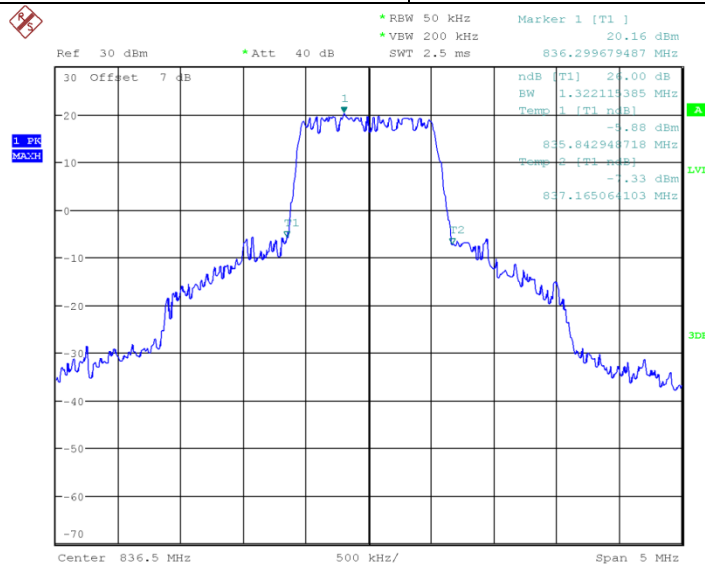

Date: 2.JAN.2003 04:07:13

#### LTE band 5, 1.4MHz Bandwidth, QPSK (-26dBc BW)

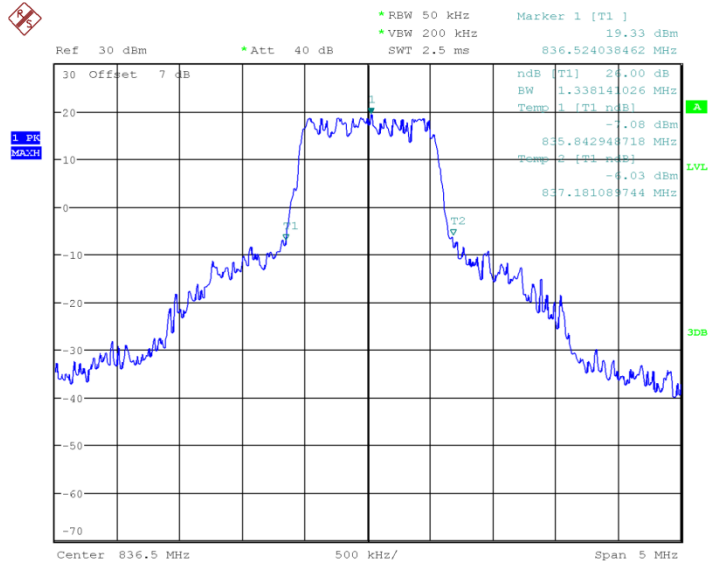


Date: 2.JAN.2003 04:07:27

## LTE band 5, 1.4MHz Bandwidth, 16QAM (-26dBc BW)


## LTE band 5, 3MHz (-26dBc)

Frequency(MHz)	Occupied Bandwidth (-26dBc)( MHz)	
	QPSK	16QAM
836.5	2.964	2.933

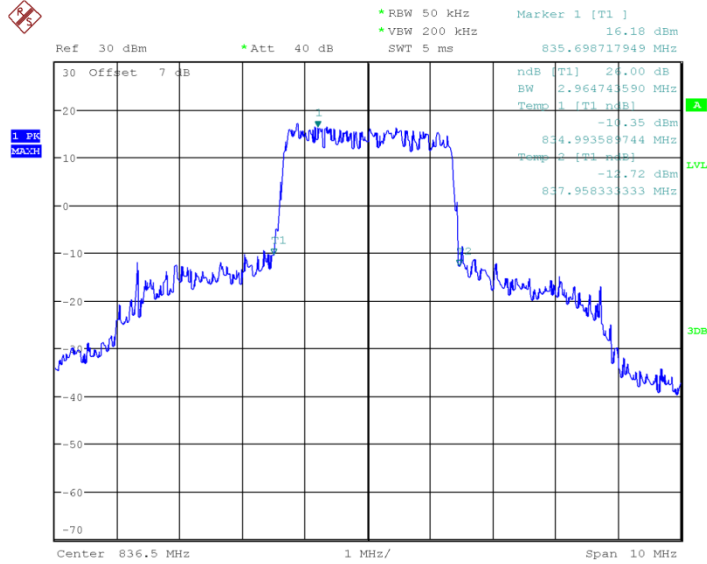

Date: 2.JAN.2003 04:07:51

## LTE band 5, 3MHz Bandwidth, QPSK (-26dBc BW)

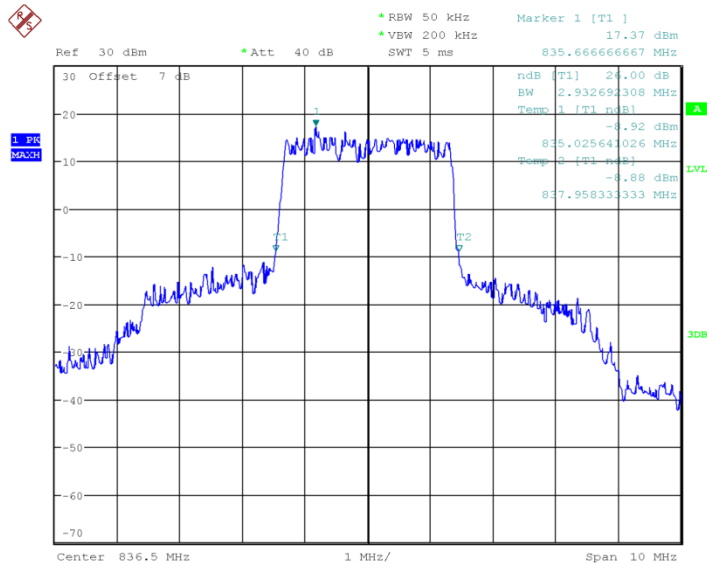


Date: 2.JAN.2003 04:08:04

## LTE band 5, 3MHz Bandwidth, 16QAM (-26dBc BW)


## LTE band 5, 5MHz (-26dBc)

Frequency(MHz)	Occupied Bandwidth (-26dBc)( MHz)	
	QPSK	16QAM
836.5	5.048	4.904

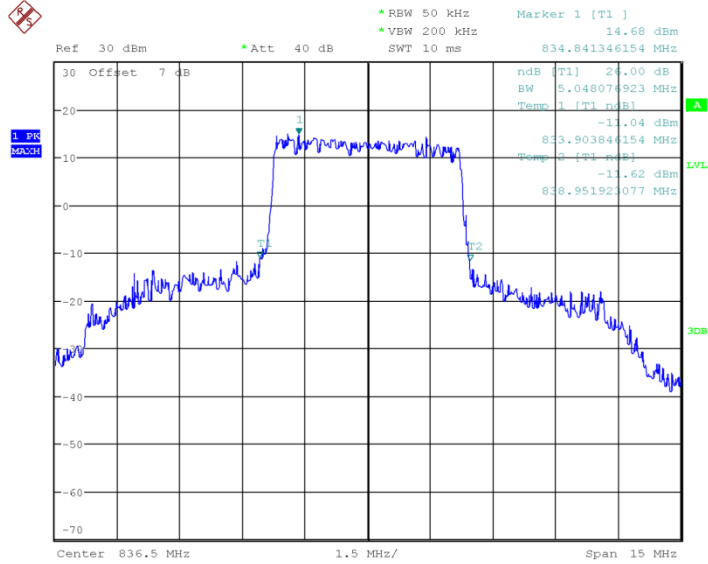

Date: 2.JAN.2003 04:08:25

## LTE band 5, 5MHz Bandwidth, QPSK (-26dBc BW)

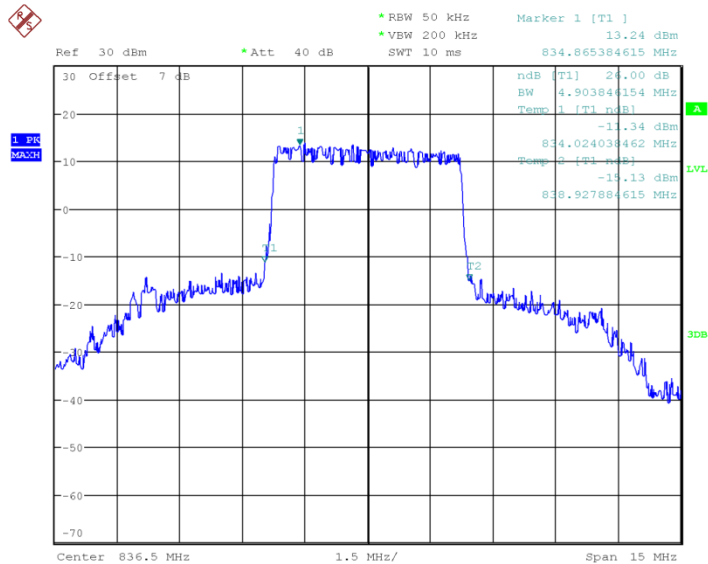


Date: 2.JAN.2003 04:08:38

## LTE band 5, 5MHz Bandwidth, 16QAM (-26dBc BW)




## LTE band 5, 10MHz (-26dBc)

Frequency(MHz)	Occupied Bandwidth (-26dBc)( MHz)	
	836.5	QPSK
	9.760	9.712

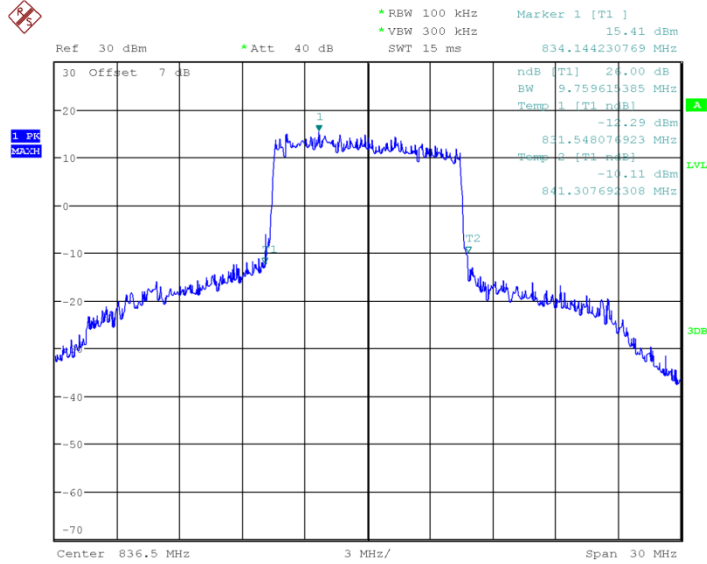

Date: 2.JAN.2003 04:08:58

## LTE band 5, 10MHz Bandwidth, QPSK (-26dBc BW)

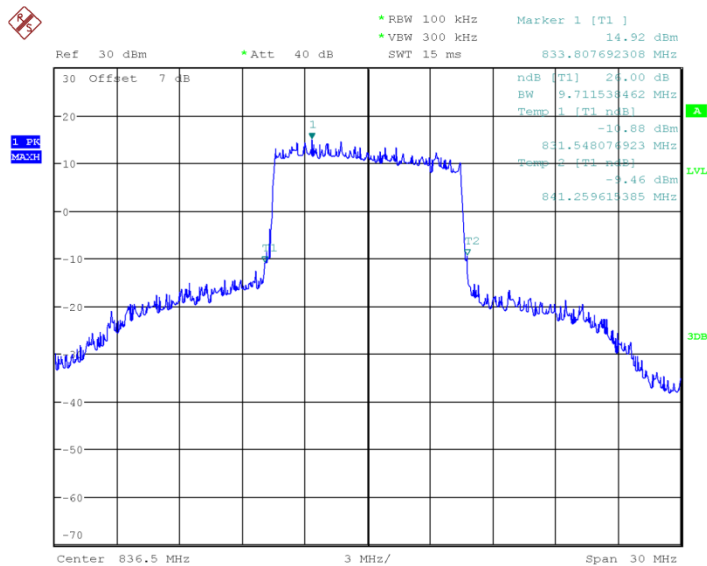


Date: 2.JAN.2003 04:09:10

## LTE band 5, 10MHz Bandwidth, 16QAM (-26dBc BW)


## LTE band 7, 5MHz (-26dBc)

Frequency(MHz)	Occupied Bandwidth (-26dBc)( MHz)	
	QPSK	16QAM
2535.0	4.880	4.832

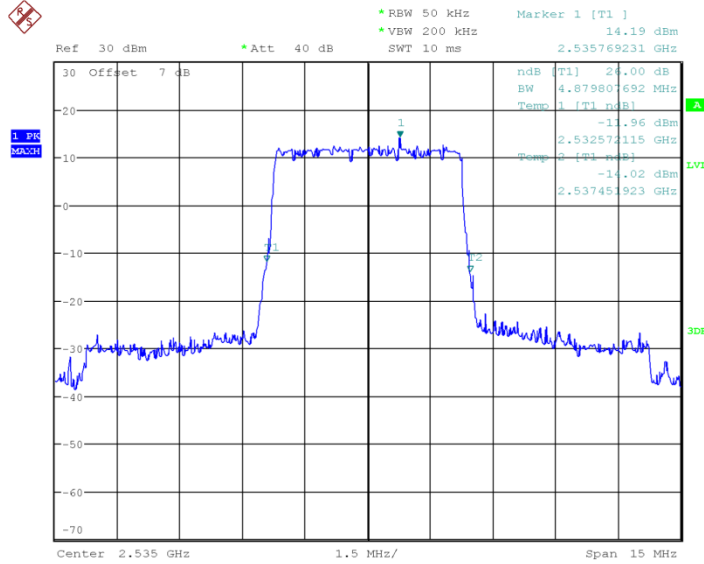

Date: 2.JAN.2003 04:09:31

## LTE band 7, 5MHz Bandwidth, QPSK (-26dBc BW)

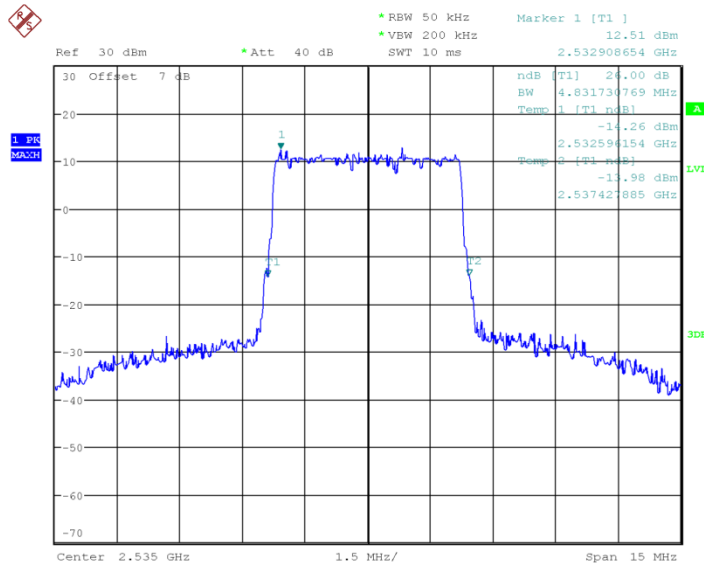


Date: 2.JAN.2003 04:09:44

## LTE band 7, 5MHz Bandwidth,16QAM (-26dBc BW)


## LTE band 7, 10MHz (-26dBc)

Frequency(MHz)	Occupied Bandwidth (-26dBc)( MHz)	
	QPSK	16QAM
2535.0	9.663	9.663

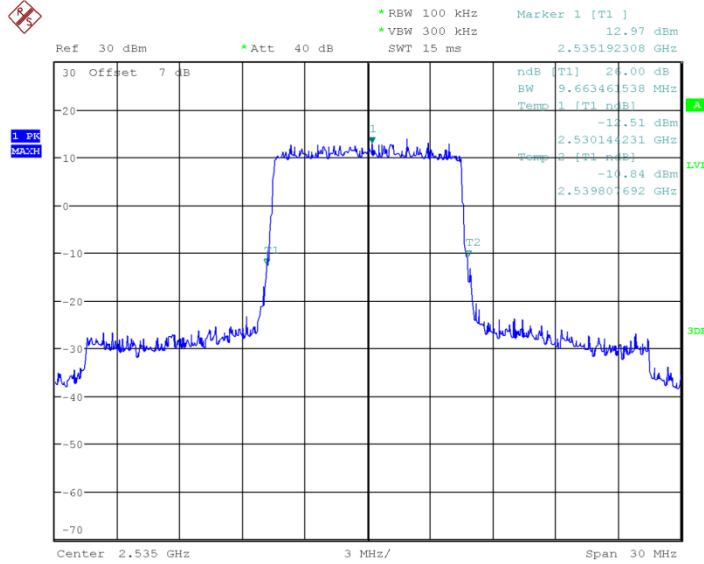

Date: 2.JAN.2003 04:10:04

## LTE band 7, 10MHz Bandwidth, QPSK (-26dBc BW)

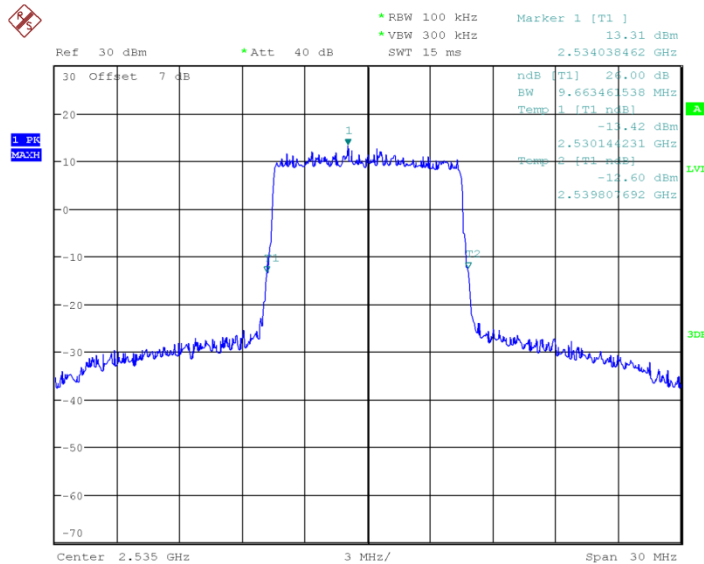


Date: 2.JAN.2003 04:10:16

## LTE band 7, 10MHz Bandwidth, 16QAM (-26dBc BW)


## LTE band 7, 15MHz (-26dBc)

Frequency(MHz)	Occupied Bandwidth (-26dBc)( MHz)	
	QPSK	16QAM
2535.0	14.423	14.351

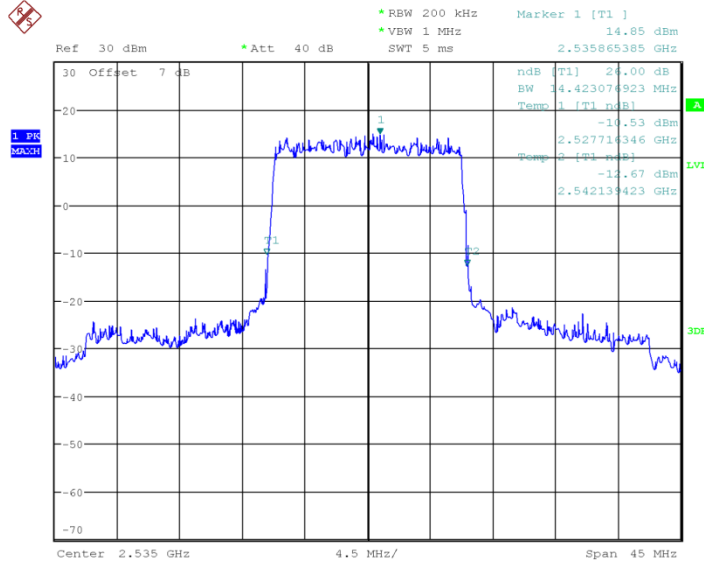

Date: 2.JAN.2003 04:10:36

## LTE band 7, 15MHz Bandwidth, QPSK (-26dBc BW)

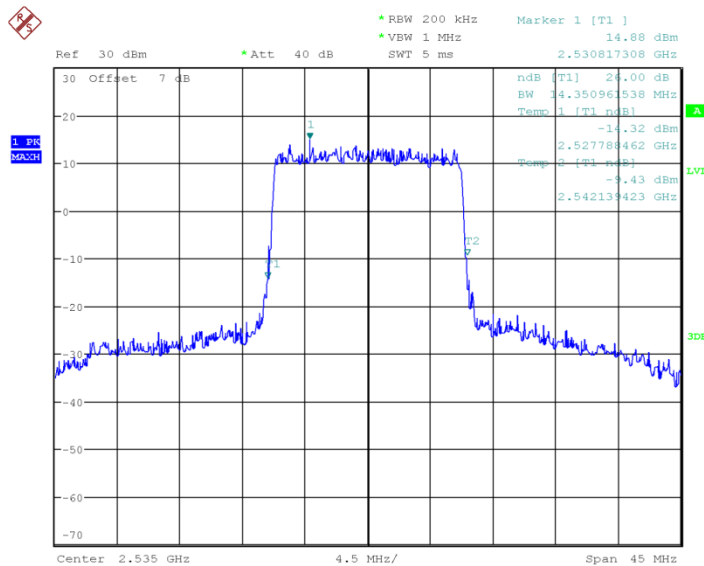


Date: 2.JAN.2003 04:10:49

## LTE band 7, 15MHz Bandwidth, 16QAM (-26dBc BW)


## LTE band 7, 20MHz (-26dBc)

Frequency(MHz)	Occupied Bandwidth (-26dBc)( MHz)	
	2535.0	QPSK
19.038		19.038

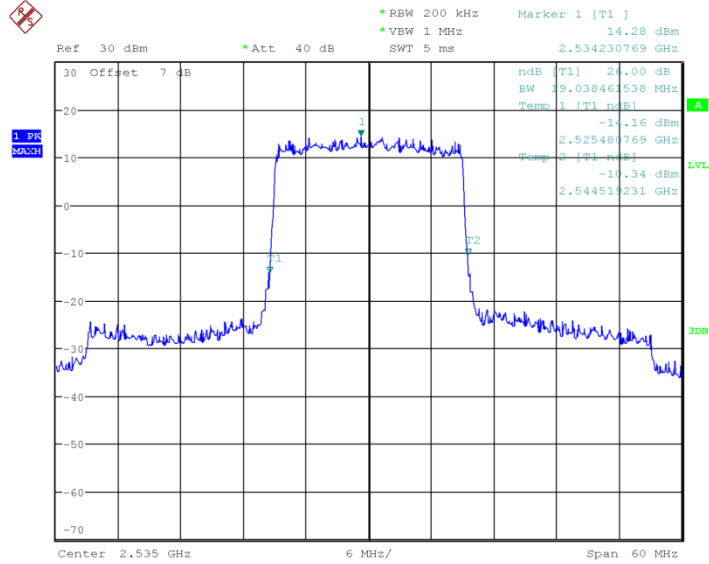

Date: 2.JAN.2003 04:11:09

## LTE band 7, 20MHz Bandwidth, QPSK (-26dBc BW)

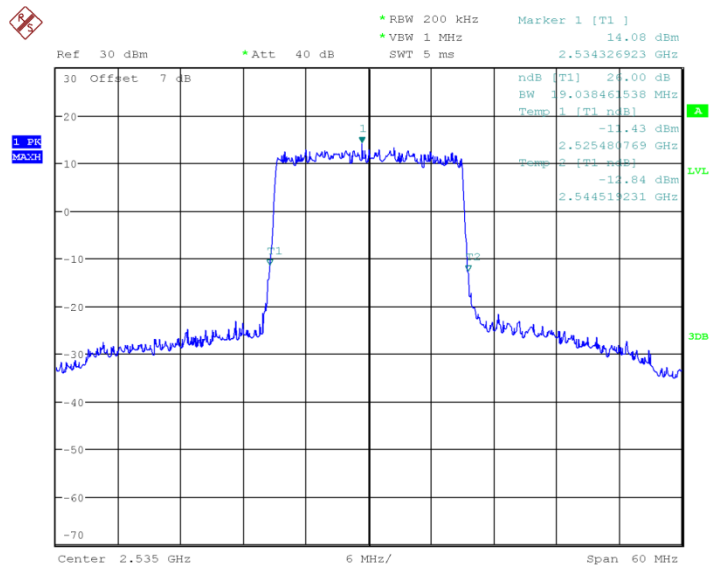

Date: 2.JAN.2003 04:11:21

## LTE band 7, 20MHz Bandwidth, 16QAM (-26dBc BW)

**ANNEX A.6. BAND EDGE COMPLIANCE****Reference**

FCC: CFR Part 22.917(b), 27.53(g),27.53(h), 27.53(m)

**A.6.1 Measurement limit**

Part 22.917(b), 27.53(g),27.53(h), 27.53(m) state that on any frequency outside frequency band of the US Cellular/PCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least  $43+10\log(P)$  dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

According to KDB 971168 6, a relaxation of the reference bandwidth is often provided for measurements within a specified frequency range at the edge of the authorized frequency block/band. This is often implemented by permitting the use of a narrower RBW (typically limited to a minimum RBW of 1% of the OBW) for measuring the out-of-band emissions without a requirement to integrate the result over the full reference bandwidth.


Part 27.53(m) states that for mobile digital stations, the attenuation factor shall be not less than  $40 + 10 \log(P)$  dB on all frequencies between the channel edge and 5 megahertz from the channel edge,  $43 + 10 \log(P)$  dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and  $55 + 10 \log(P)$  dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that  $43 + 10 \log(P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz and  $55 + 10 \log(P)$  dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

## A.6.2 Measurement result

Only worst case result is given below


LTE band 5

OBW: 1RB-low\_offset

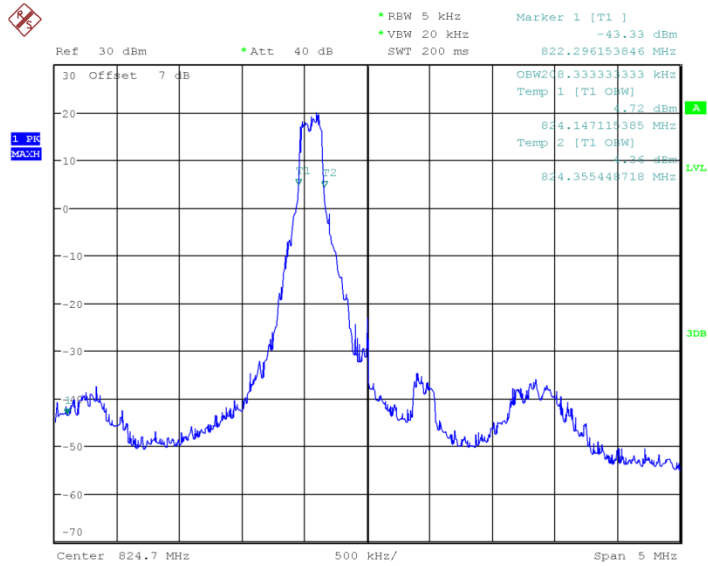


Date: 2.JAN.2003 05:21:37

## LOW BAND EDGE BLOCK-1RB-low\_offset

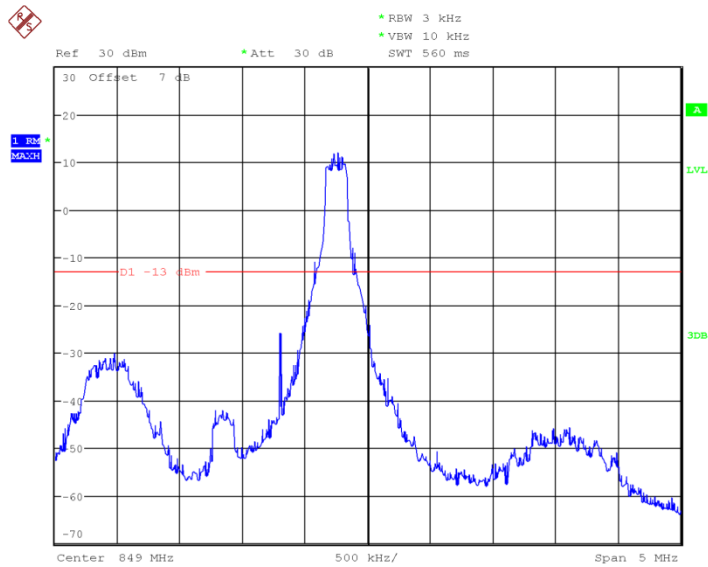


Date: 2.JAN.2003 04:19:48

## OBW: 1RB-high\_offset

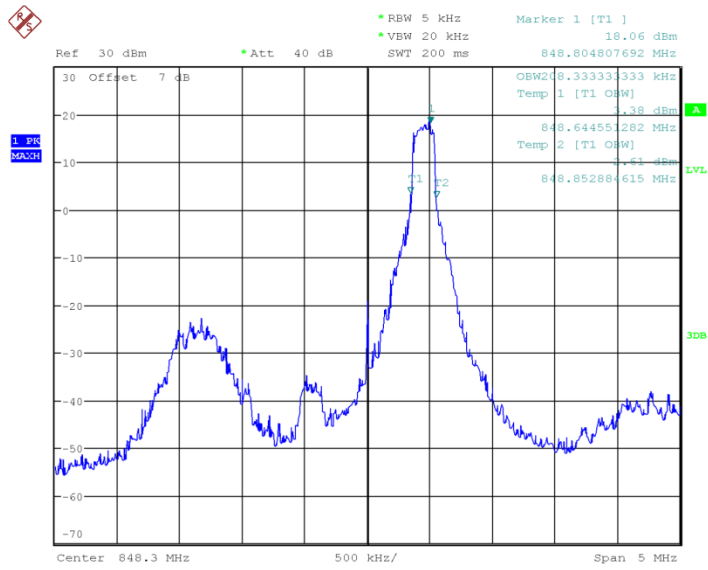

Date: 2.JAN.2003 05:23:01


## HIGH BAND EDGE BLOCK-1RB-high\_offset

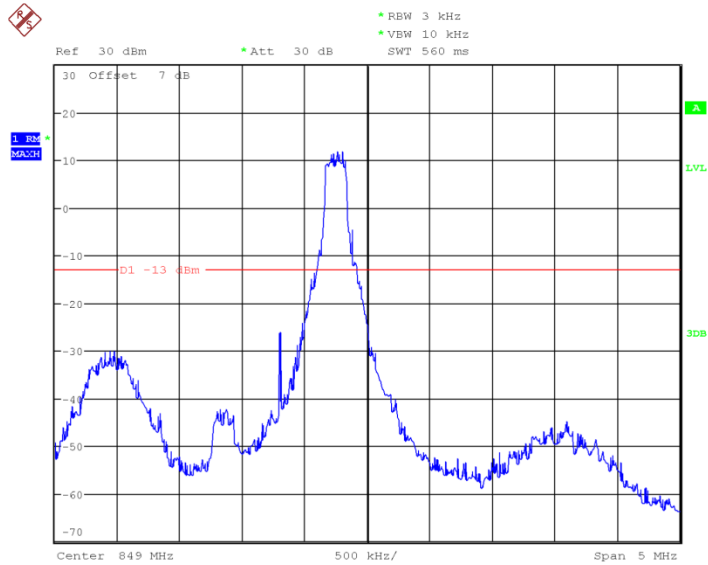

Date: 2.JAN.2003 05:23:23




## LOW BAND EDGE BLOCK-QPSK-10MHz-100%RB

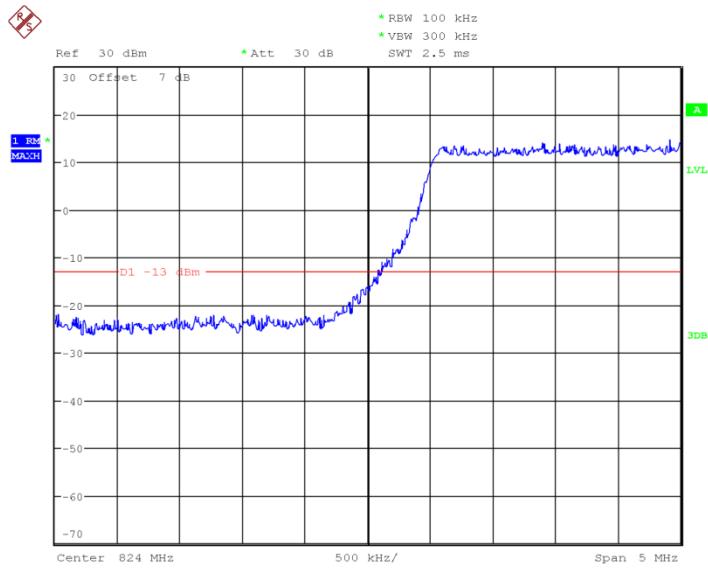

Date: 2.JAN.2003 04:18:54


## HIGH BAND EDGE BLOCK-QPSK-10MHz-100%RB

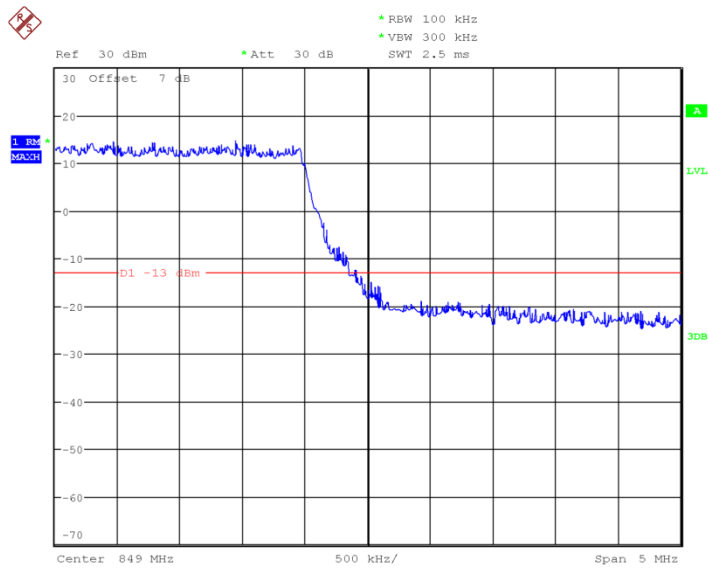

Date: 2.JAN.2003 04:20:17


## LTE band 7

### OBW: 1RB-low\_offset

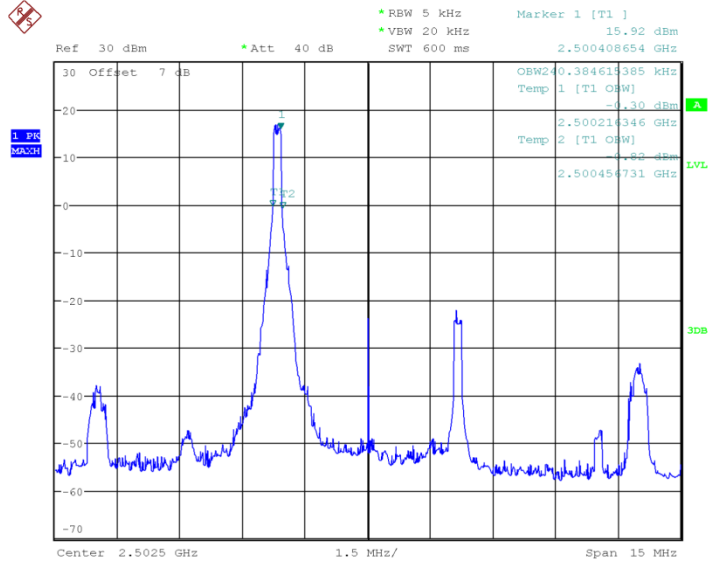


Date: 2.JAN.2003 04:20:49

### LOW BAND EDGE BLOCK-1RB-low\_offset

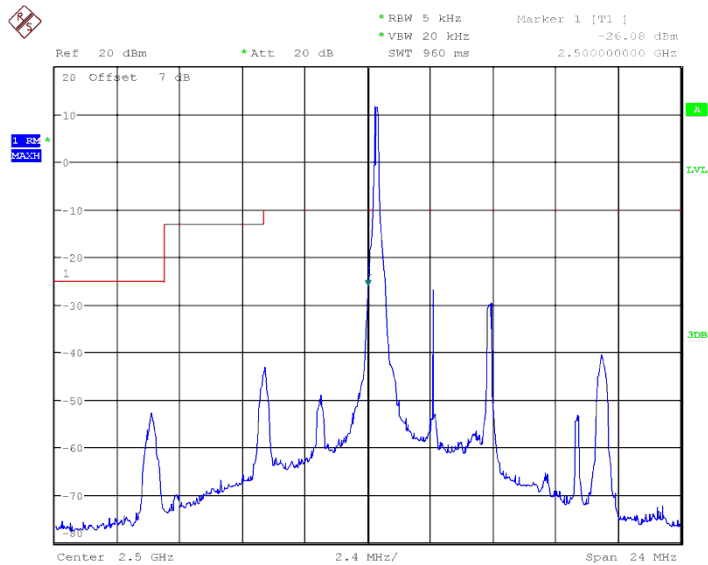


Date: 3.JAN.2003 01:00:57

## OBW: 1RB-high\_offset

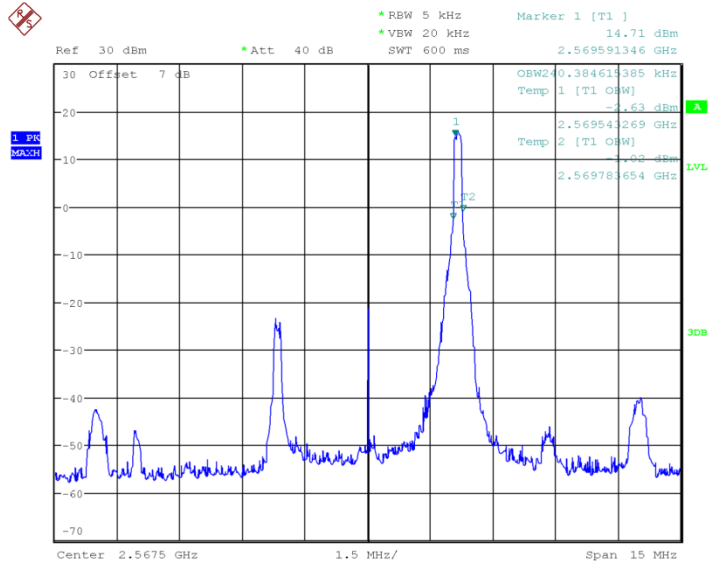


Date: 2.JAN.2003 04:22:12

## HIGH BAND EDGE BLOCK-1RB-high\_offset

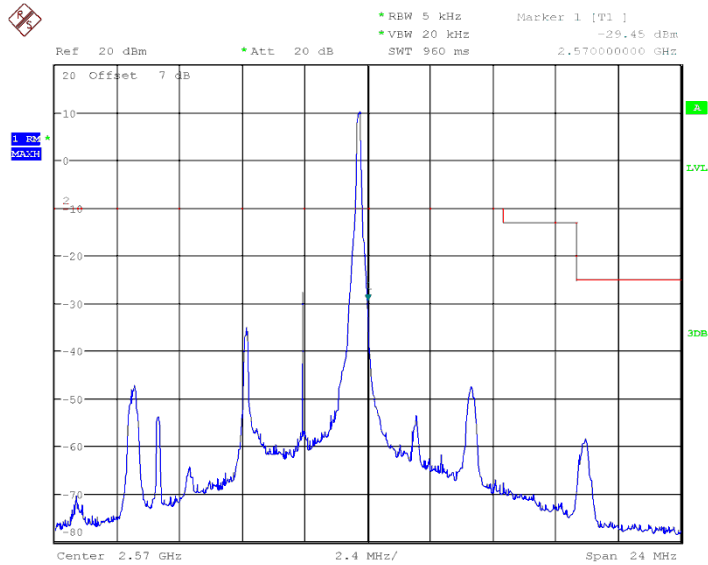


Date: 3.JAN.2003 01:05:16

## LOW BAND EDGE BLOCK-20MHz-100%RB

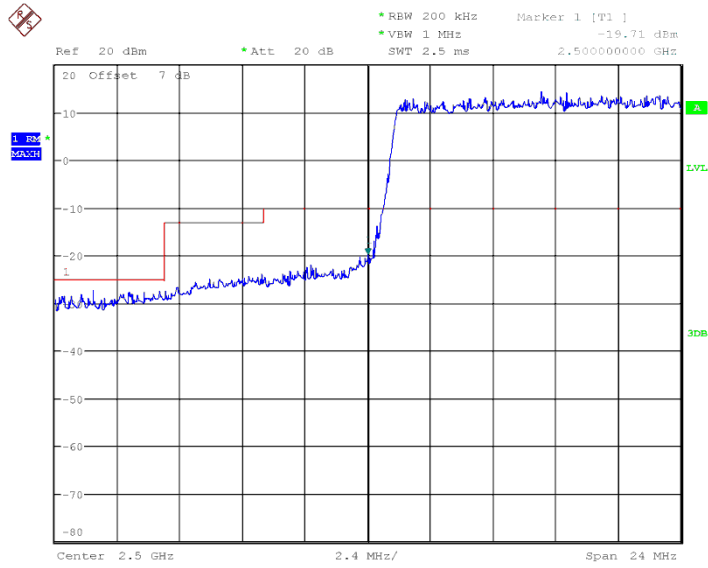

Date: 3.JAN.2003 01:08:49

## HIGH BAND EDGE BLOCK-20MHz-100%RB

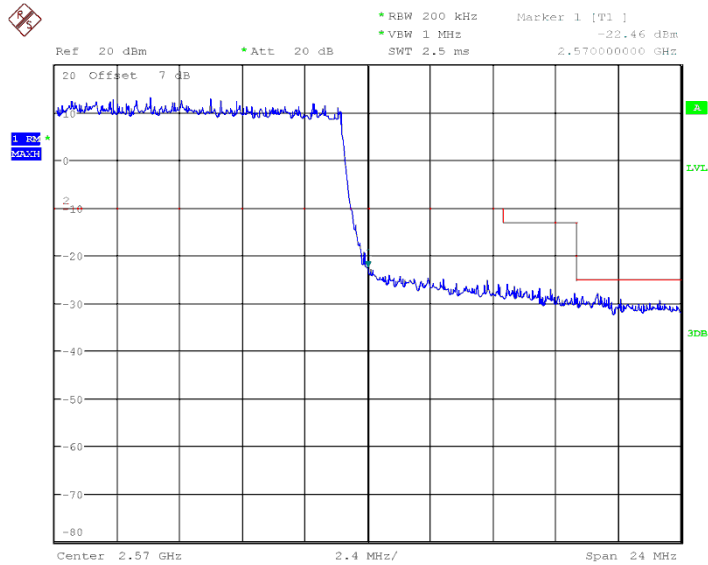

Date: 3.JAN.2003 01:07:13

## **ANNEX A.7. CONDUCTED SPURIOUS EMISSION**

### **Reference**

FCC: CFR Part 22.917(b), 27.53(g),27.53(h), 27.53(m)

### **A.7.1 Measurement Method**

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the mobile station equipment tested, this equates to a frequency range of 13 MHz to 9 GHz, data taken from 10 MHz to 25 GHz.
2. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.
3. The number of sweep points of spectrum analyzer is set to 30001 which is greater than span/RBW.

### **A. 7.2 Measurement Limit**

Part 22.917(b),

27.53(g),27.53(h), 27.53(m) specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.


Part 27.53(m)(4) specifies for mobile digital stations, the attenuation factor shall be not less than  $40 + 10 \log(P)$  dB on all frequencies between the channel edge and 5 megahertz from the channel edge,  $43 + 10 \log(P)$  dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and  $55 + 10 \log(P)$  dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than  $43 + 10 \log(P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz and  $55 + 10 \log(P)$  dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

## A. 7.3 Measurement result

Only worst case result is given below

**LTE band 5: 30MHz – 10GHz**


Spurious emission limit –13dBm.

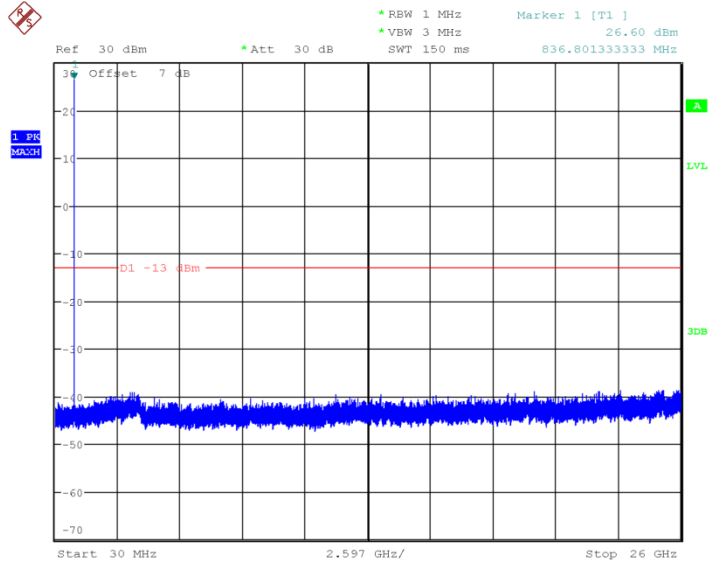

Date: 2.JAN.2003 04:40:39

**LTE band 7: 30MHz – 26GHz**

Spurious emission limit –13dBm.

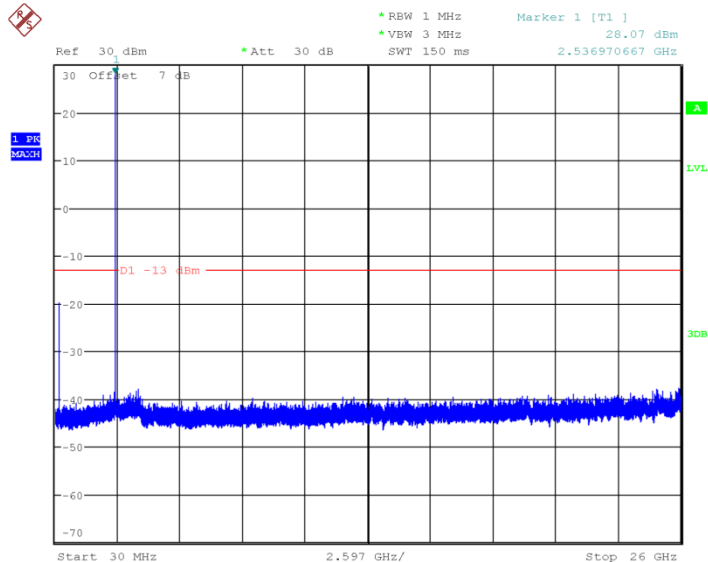

Date: 2.JAN.2003 04:41:30

## ANNEX A.8. PEAK-TO-AVERAGE POWER RATIO

### Reference

FCC: CFR Part 22.232 (d), 27.50(a)

The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB. The PAPR measurements should be made using either an instrument with complementary cumulative distribution function (CCDF) capabilities to determine that PAPR will not exceed 13 dB for more than 0.1 percent of the time or other Commission approved procedure. The measurement must be performed using a signal corresponding to the highest PAPR expected during periods of continuous transmission.

According to KDB 971168 v03 5.7:

- a) Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
- b) Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
- c) Set the number of counts to a value that stabilizes the measured CCDF curve;
- d) Set the measurement interval to 1 ms
- e) Record the maximum PAPR level associated with a probability of 0.1%

### A.8.1 Measurement limit


not exceed 13 dB

### A.8.2 Measurement results


**Note: only the worst case wrote in the report.**

**LTE band 5, 10MHz**

Frequency(MHz)	PAPR(dB)	
	QPSK	16QAM
1745.0	4.46	5.19

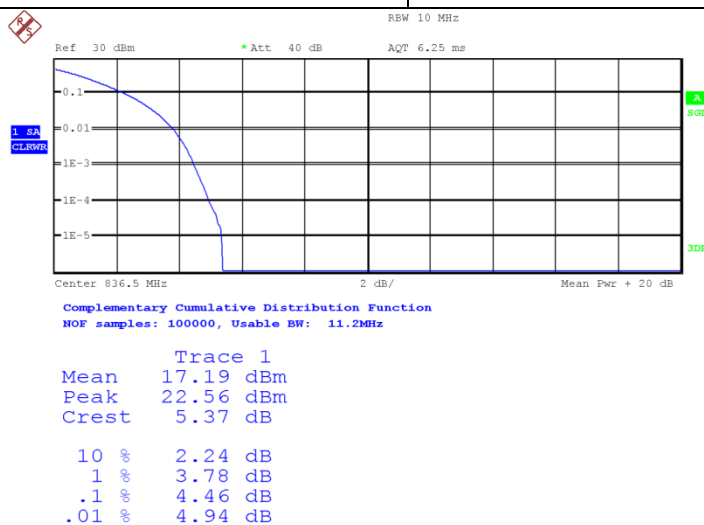

Date: 2.JAN.2003 04:52:26

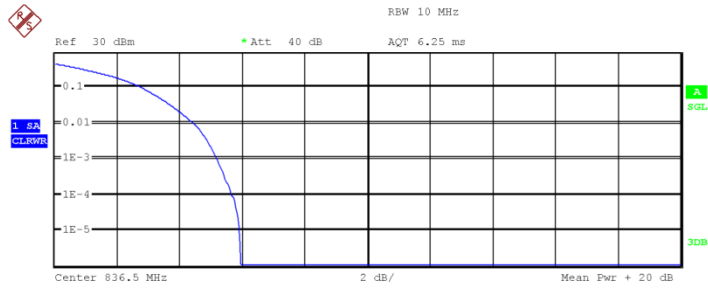


Complementary Cumulative Distribution Function  
NOF samples: 100000, Usable BW: 11.2MHz

Trace 1  
Mean 16.27 dBm  
Peak 22.21 dBm  
Crest 5.94 dB  
  
10 % 2.79 dB  
1 % 4.42 dB  
.1 % 5.19 dB  
.01 % 5.67 dB

Date: 2.JAN.2003 04:52:51

## LTE band 7, 20MHz

Frequency(MHz)	PAPR(dB)	
	QPSK	16QAM
2510.0	4.49	6.25

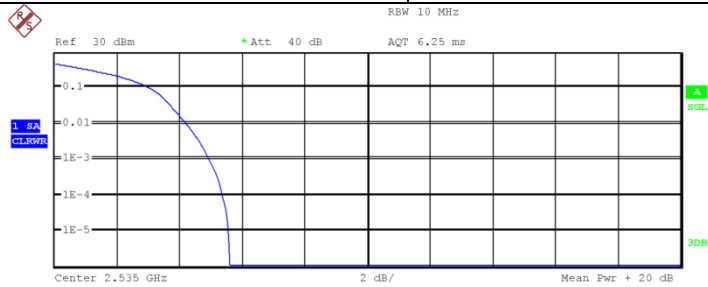


Complementary Cumulative Distribution Function  
NOF samples: 100000, Usable BW: 11.2MHz

Trace 1  
Mean 13.86 dBm  
Peak 19.45 dBm  
Crest 5.59 dB  
  
10 % 3.04 dB  
1 % 4.20 dB  
.1 % 4.94 dB  
.01 % 5.35 dB

Date: 2.JAN.2003 04:56:23



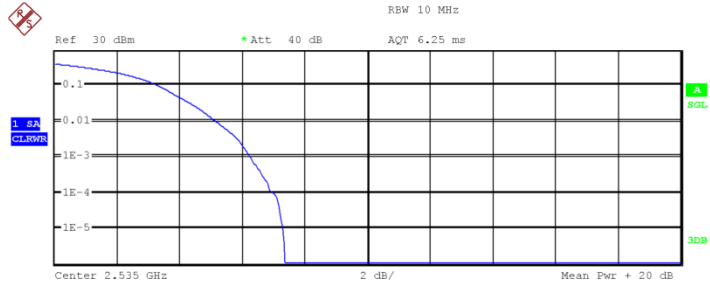

Complementary Cumulative Distribution Function  
NOF samples: 100000, Usable BW: 11.2MHz

Trace 1	
Mean	12.94 dBm
Peak	20.29 dBm
Crest	7.36 dB
10 %	3.33 dB
1 %	5.16 dB
.1 %	6.25 dB
.01 %	6.99 dB

Date: 2.JAN.2003 04:56:47

## **ANNEX B. Deviations from Prescribed Test Methods**

No deviation from Prescribed Test Methods.

**\*\*\*\*\*END OF REPORT\*\*\*\*\***