





MEASUREMENT REPORT

FCC PART 15.407 / RSS-247 WLAN 802.11a/n/ac

FCC ID: O57VR3030S
IC: 10407A-VR3030S
Applicant: Lenovo (Shanghai) Electronics Technology Co., Ltd
Application Type: Certification
Product: Standalone VR Headset
Model No.: Lenovo VR-3030S
FCC Classification: Unlicensed National Information Infrastructure (UNII)
FCC Rule Part(s): Part 15 Subpart E (Section 15.407)
IC Rule(s): RSS-247 Issue 2, RSS-GEN Issue 5
Test Procedure(s): ANSI C63.10-2013, KDB 789033 D02v02r01,
KDB 662911 D01v02r01
Test Date: December 02 ~ 20, 2019

Reviewed By: 
(Sunny Sun)

Approved By: 
(Robin Wu)



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
1911RSU052-U4	Rev. 01	Initial Report	12-26-2019	Valid

CONTENTS

Description	Page
1. INTRODUCTION	7
1.1. Scope	7
1.2. MRT Test Location	7
2. PRODUCT INFORMATION	8
2.1. Equipment Description.....	8
2.2. Product Specification Subjective to this Report.....	8
2.3. Operation Frequency / Channel list.....	9
2.4. Description of Available Antennas	10
2.5. Test Mode	10
2.6. Description of Test Software	10
2.7. Duty Cycle	11
2.8. Test Configuration	12
2.9. EMI Suppression Device(s)/Modifications	12
2.10. Labeling Requirements	12
3. DESCRIPTION OF TEST	13
3.1. Evaluation Procedure	13
3.2. AC Line Conducted Emissions	13
3.3. Radiated Emissions	14
4. ANTENNA REQUIREMENTS.....	15
5. TEST EQUIPMENT CALIBRATION DATE.....	16
6. MEASUREMENT UNCERTAINTY.....	18
7. TEST RESULT	19
7.1. Summary	19
7.2. 26dB and 99% Bandwidth Measurement.....	20
7.2.1. Test Limit	20
7.2.2. Test Procedure used.....	20
7.2.3. Test Setting.....	20
7.2.4. Test Setup	20
7.2.5. Test Result.....	21
7.3. 6dB Bandwidth Measurement.....	38
7.3.1. Test Limit	38
7.3.2. Test Procedure used.....	38
7.3.3. Test Setting.....	38

7.3.4. Test Setup	38
7.3.5. Test Result.....	39
7.4. Output Power Measurement	44
7.4.1. Test Limit	44
7.4.2. Test Procedure Used	44
7.4.3. Test Setting.....	45
7.4.4. Test Setup	45
7.4.5. Test Result.....	46
7.5. Transmit Power Control	54
7.5.1. Test Limit	54
7.5.2. Test Procedure Used	54
7.5.3. Test Setting.....	54
7.5.4. Test Setup	54
7.5.5. Test Result.....	54
7.6. Power Spectral Density Measurement	55
7.6.1. Test Limit	55
7.6.2. Test Procedure Used	55
7.6.3. Test Setting.....	55
7.6.4. Test Setup	56
7.6.5. Test Result.....	57
7.7. Frequency Stability Measurement.....	93
7.7.1. Test Limit	93
7.7.2. Test Procedure Used	93
7.7.3. Test Setup	94
7.7.4. Test Result.....	95
7.8. Radiated Spurious Emission Measurement	96
7.8.1. Test Limit	96
7.8.2. Test Procedure Used	96
7.8.3. Test Setting.....	96
7.8.4. Test Setup	98
7.8.5. Test Result.....	99
7.9. Radiated Restricted Band Edge Measurement	171
7.9.1. Test Limit	171
7.9.2. Test Procedure Used	173
7.9.3. Test Setting.....	173
7.9.4. Test Setup	174
7.9.5. Test Result.....	175
7.10. AC Conducted Emissions Measurement.....	277

7.10.1. Test Limit	277
7.10.2. Test Setup	277
7.10.3. Test Result.....	278
8. CONCLUSION.....	280
Appendix A - Test Setup Photograph	281
Appendix B - EUT Photograph.....	282

General Information

Applicant:	Lenovo (Shanghai) Electronics Technology Co., Ltd.
Applicant Address:	Section 304-305, Building No. 4, # 222, Meiyue Road, China (Shanghai) Pilot Free Trade Zone
Manufacturer:	Lenovo PC HK Limited
Manufacturer Address:	23/F, Lincoln House, Taikoo Place 979 King's Road, Quarry Bay, Hong Kong, P.R.China
Test Site:	MRT Technology (Suzhou) Co., Ltd
Test Site Address:	D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China
Test Device Serial No.:	N/A <input type="checkbox"/> Production <input checked="" type="checkbox"/> Pre-Production <input type="checkbox"/> Engineering

Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Tian'edang Rd., Suzhou, China.

- MRT facility is a FCC accredited (MRT Designation No. CN1166) test facility with the site description report on file and has met all the requirements specified in ANSI C63.4-2014.
- MRT facility is an IC registered (MRT Reg. No. 11384A-1) test laboratory with the site description on file at Industry Canada.
- MRT facility is a VCCI registered (R-20025, G-20034, C-20020, T-20020) test laboratory with the site description on file at VCCI Council.
- MRT Lab is accredited to ISO 17025 by the American Association for Laboratory Accreditation (A2LA) under the American Association for Laboratory Accreditation Program (A2LA Cert. No. 3628.01) in EMC, Telecommunications, Radio and SAR testing.



1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taihu Lake. These measurement tests were conducted at the MRT Technology (Suzhou) Co., Ltd. Facility located at D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China. The measurement facility compliant with the test site requirements specified in ANSI C63.4-2014.



2. PRODUCT INFORMATION

2.1. Equipment Description

Product Name	Standalone VR Headset
Model No.	Lenovo VR-3030S
WLAN Specification	802.11a/b/g/n/ac
Bluetooth Version	v4.2 dual mode
Antenna Specification	Refer to section 2.4
Accessories	
Adapter	MODEL/MODELO: UC13US PRI/ENTRADA: 100-240V ~ 50/60Hz, 0.35A SEC/SALIDA: 5Vdc, 2A

2.2. Product Specification Subjective to this Report

Frequency Range	For 802.11a/n-HT20/ac-VHT20: 5180~5320MHz, 5500~5720MHz, 5745~5825MHz For 802.11n-HT40/ac-VHT40: 5190~5310MHz, 5510~5710MHz, 5755~5795MHz For 802.11ac-VHT80: 5210MHz, 5290MHz, 5530MHz, 5610MHz, 5690MHz, 5775MHz
Type of Modulation	802.11a/n/ac: OFDM
Data Rate	802.11a: 6/9/12/18/24/36/48/54Mbps 802.11n: up to 300Mbps 802.11ac: up to 866.6Mbps

Note: For other features of this EUT, test report will be issued separately.

2.3. Operation Frequency / Channel list

802.11a/n-HT20/ac-VHT20

Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180 MHz	40	5200 MHz	44	5220 MHz
48	5240 MHz	52	5260 MHz	56	5280 MHz
60	5300 MHz	64	5320 MHz	100	5500 MHz
104	5520 MHz	108	5540 MHz	112	5560 MHz
116	5580 MHz	120	5600 MHz	124	5620 MHz
128	5640 MHz	132	5660 MHz	136	5680 MHz
140	5700 MHz	144	5720 MHz	149	5745 MHz
153	5765 MHz	157	5785 MHz	161	5805 MHz
165	5825 MHz	---	---	---	---

802.11n-HT40/ac-VHT40

Channel	Frequency	Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz	54	5270 MHz
62	5310 MHz	102	5510 MHz	110	5550 MHz
118	5590 MHz	126	5630 MHz	134	5670 MHz
142	5710 MHz	151	5755 MHz	159	5795 MHz

802.11ac-VHT80

Channel	Frequency	Channel	Frequency	Channel	Frequency
42	5210 MHz	58	5290 MHz	106	5530 MHz
122	5610 MHz	138	5690 MHz	155	5775 MHz

Note: Frequencies fall between 5600 ~ 5650 are not used in Canada

2.4. Description of Available Antennas

Antenna Type	Frequency Band (GHz)	T _x Paths	Max Peak Gain (dBi)		Directional Gain (dBi)	
			Ant 1	Ant 2	For Power	For PSD
WLAN Internal Antenna						
FPC	2.4	2	2.40	2.25	2.40	5.41
	5	2	4.10	4.28	4.28	7.29
Bluetooth Internal Antenna						
FPC	2.4	1	2.40	--	--	--

Note 1: The EUT supports Cyclic Delay Diversity (CDD) mode, and CDD signals are correlated.

For CDD transmissions, directional gain is calculated as follows, $N_{\text{ANT}} = 2$, $N_{\text{SS}} = 1$.

Directional gain = $G_{\text{ANT}} + \text{Array Gain}$, where Array Gain is as follows.

- For power spectral density (PSD) measurements on all devices, Array Gain = $10 \log (N_{\text{ANT}}/ N_{\text{SS}})$ dB = 3.01;
- For power measurements on IEEE 802.11 devices, Array Gain = 0 dB for $N_{\text{ANT}} \leq 4$;

Note 2: WLAN and Bluetooth share Ant 1 port together.

2.5. Test Mode

Test Mode	Mode 1: Transmit by 802.11a (6Mbps)
	Mode 2: Transmit by 802.11n-HT20 (MCS0)
	Mode 3: Transmit by 802.11n-HT40 (MCS0)
	Mode 4: Transmit by 802.11ac-VHT20 (MCS0)
	Mode 5: Transmit by 802.11ac-VHT40 (MCS0)
	Mode 6: Transmit by 802.11ac-VHT80 (MCS0)

2.6. Description of Test Software


The test utility software used during testing was “QRCT”, and the version was “3.0.268.0”.


2.7. Duty Cycle

5GHz (UNII) operation is possible in 20MHz, 40MHz and 80MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz.

The duty cycles are as follows:

Test Mode	Duty Cycle
802.11a	95.60 %
802.11n-HT20	95.06 %
802.11n-HT40	91.19 %
802.11ac-VHT20	95.07 %
802.11ac-VHT40	91.20 %
802.11ac-VHT80	84.12 %

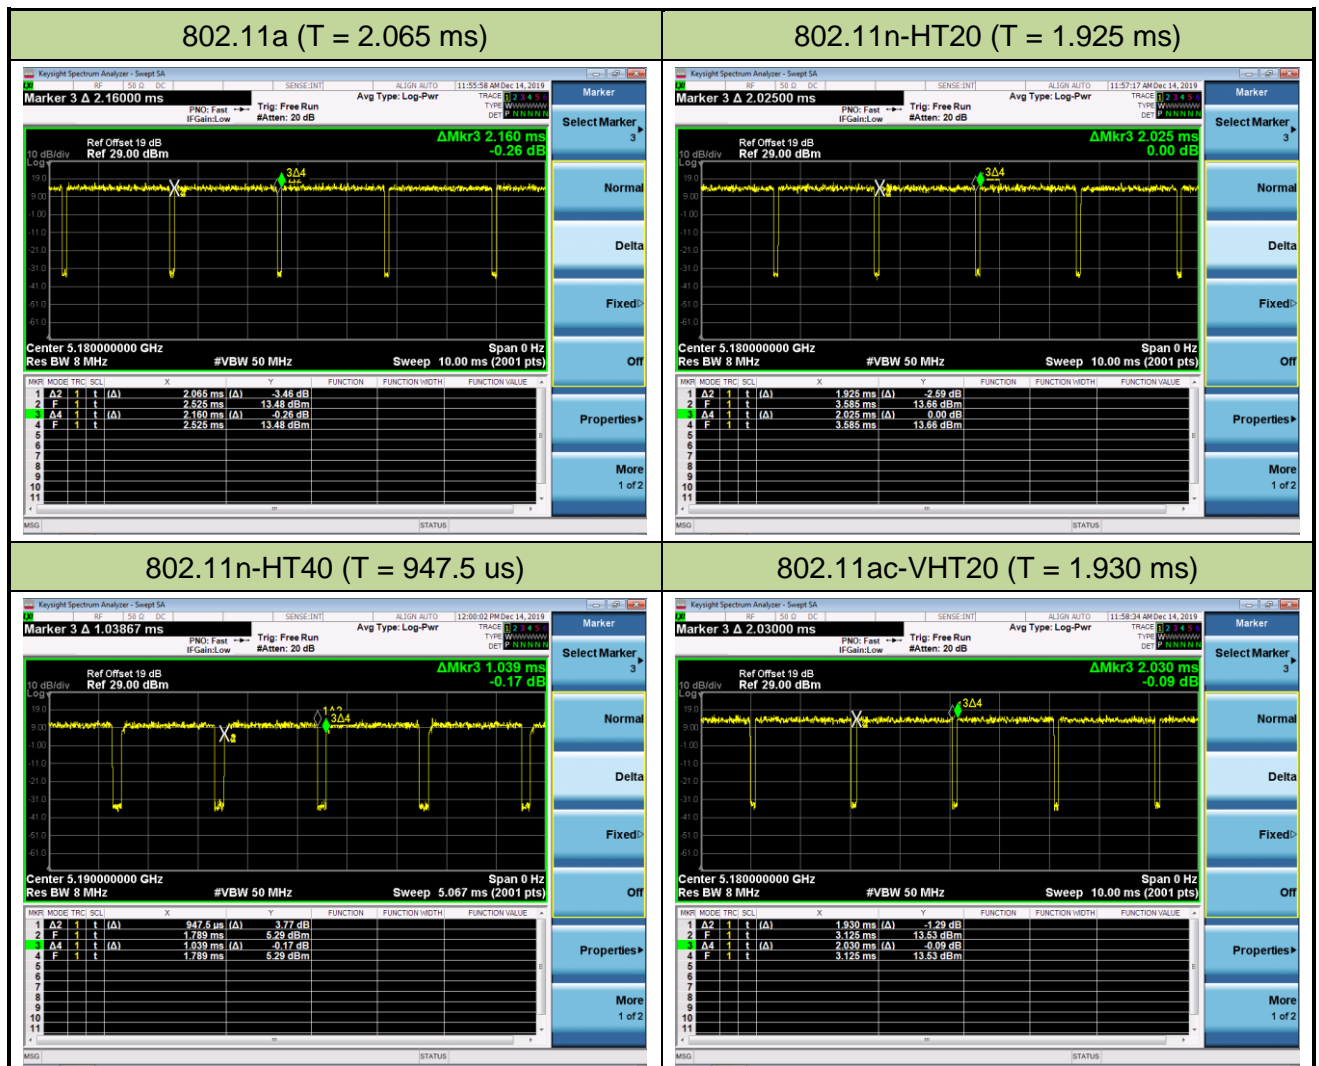

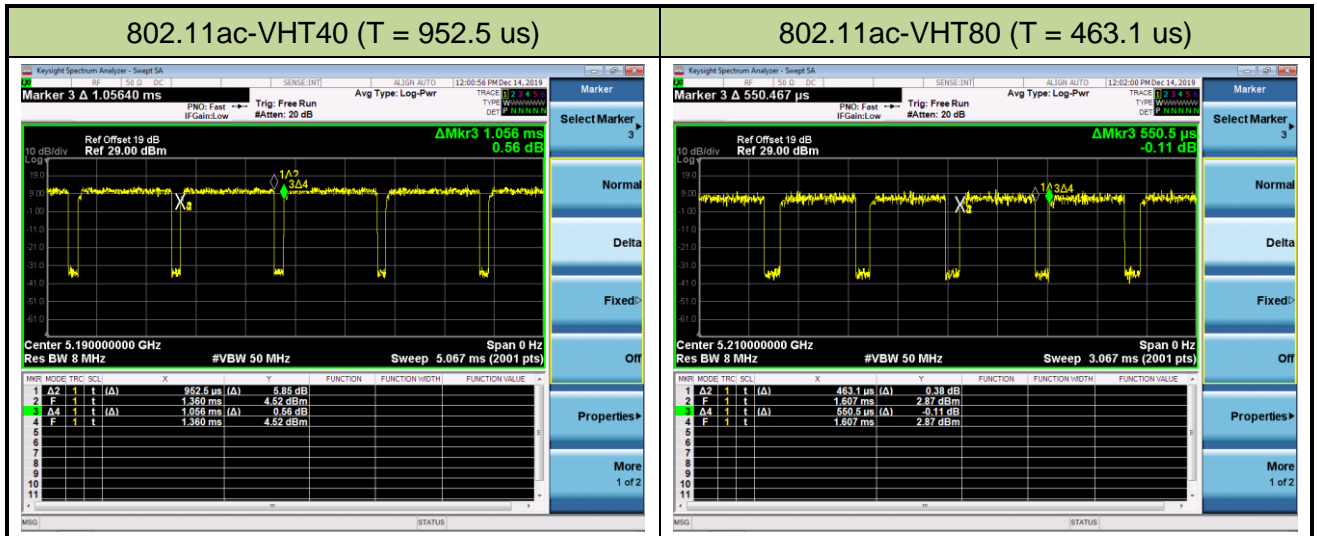

2.8. Test Configuration

The device was tested per the guidance of ANSI C63.10-2013. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

2.9. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.10. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

RSP-100 Issue 12 Section 5

In addition to complying with the applicable RSSs and RSP-100, each unit of a product model (i.e. of a radio apparatus) shall meet the labelling requirements set out in this section prior to being marketed in Canada or imported into Canada.

If the dimensions of the product are extremely small or it is not practical to place the label or marking on the product, and if electronic labelling cannot be implemented, the label shall be placed in a prominent location in the user manual supplied with the product, as agreed upon with ISED prior to the certification application. The user manual may be in an electronic format; if it is not supplied to the user, the user manual must be readily available.

3. DESCRIPTION OF TEST

3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2013), and the guidance provided in the measurement of the device.

Deviation from measurement procedure.....None

3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable. For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-40GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

4. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the device is **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The device unit complies with the requirement of §15.203.

5. TEST EQUIPMENT CALIBRATION DATE

Conducted Emissions - SR2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR3	MRTSUE06185	1 year	2020/04/15
Two-Line V-Network	R&S	ENV 216	MRTSUE06002	1 year	2020/06/13
Two-Line V-Network	R&S	ENV 216	MRTSUE06003	1 year	2020/06/13
Thermohygrometer	Testo	608-H1	MRTSUE06404	1 year	2020/08/08
Shielding Room	MIX-BEP	Chamber-SR2	MRTSUE06215	N/A	N/A

Radiated Emissions - AC1

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2020/08/01
PXA Signal Analyzer	Keysight	9030B	MRTSUE06395	1 year	2020/09/03
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2020/11/13
Bilog Period Antenna	Schwarzbeck	VULB 9168	MRTSUE06172	1 year	2020/03/31
Broad Band Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06023	1 year	2020/10/13
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06024	1 year	2020/12/17
Microwave System Amplifier	Agilent	83017A	MRTSUE06076	1 year	2020/11/15
Preamplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2020/06/11
Thermohygrometer	Testo	608-H1	MRTSUE06403	1 year	2020/08/08
Anechoic Chamber	TDK	Chamber-AC1	MRTSUE06212	1 year	2020/04/30

Radiated Emission - AC2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Spectrum Analyzer	Keysight	N9038A	MRTSUE06125	1 year	2020/08/01
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2020/11/13
Bilog Period Antenna	Schwarzbeck	VULB 9162	MRTSUE06022	1 year	2020/10/13
Horn Antenna	Schwarzbeck	BBHA9120D	MRTSUE06171	1 year	2020/10/27
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06024	1 year	2020/12/17
Broadband Coaxial Preamplifier	Schwarzbeck	BBV 9718	MRTSUE06176	1 year	2020/11/15
Preamplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2020/06/11
Temperature/Humidity Meter	Minggao	ETH529	MRTSUE06170	1 year	2020/12/15
Anechoic Chamber	RIKEN	Chamber-AC2	MRTSUE06213	1 year	2020/04/30

Conducted Test Equipment - TR3

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EXA Signal Analyzer	Agilent	N9020A	MRTSUE06106	1 year	2020/04/15
EXA Signal Analyzer	Keysight	N9010B	MRTSUE06452	1 year	2020/07/11
Signal Analyzer	R&S	FSV40	MRTSUE06218	1 year	2020/04/15
Power Meter	Agilent	U2021XA	MRTSUE06030	1 year	2020/11/18
USB wideband power sensor	Keysight	U2021XA	MRTSUE06446	1 year	2020/06/30
USB wideband power sensor	Keysight	U2021XA	MRTSUE06447	1 year	2020/06/30
Bluetooth Test Set	Anritsu	MT8852B-042	MRTSUE06389	1 year	2020/06/13
Audio Analyzer	Agilent	U8903B	MRTSUE06143	1 year	2020/06/13
Modulation Analyzer	HP	8901A	MRTSUE06098	1 year	2020/10/10
Wideband Radio Communication Tester	R&S	CMW 500	MRTSUE06243	1 year	2020/11/07
DC Power Supply	GWINSTEK	DPS-3303C	MRTSUE06064	N/A	N/A
Temperature & Humidity Chamber	BAOYT	BYH-150CL	MRTSUE06051	1 year	2020/11/07
Thermohygrometer	testo	608-H1	MRTSUE06401	1 year	2020/08/08

Software	Version	Function
EMI Software	V3	EMI Test Software

6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

Conducted Emission Measurement - SR2
<p>The maximum measurement uncertainty is evaluated as:</p> <p>9kHz~150kHz: 3.84dB</p> <p>150kHz~30MHz: 3.46dB</p>
Radiated Emission Measurement - AC1
<p>The maximum measurement uncertainty is evaluated as:</p> <p>Horizontal: 30MHz~300MHz: 4.07dB</p> <p> 300MHz~1GHz: 3.63dB</p> <p> 1GHz~18GHz: 4.16dB</p> <p>Vertical: 30MHz~300MHz: 4.18dB</p> <p> 300MHz~1GHz: 3.60dB</p> <p> 1GHz~18GHz: 4.76dB</p>
Radiated Emission Measurement - AC2
<p>The maximum measurement uncertainty is evaluated as:</p> <p>Horizontal: 30MHz~300MHz: 3.75dB</p> <p> 300MHz~1GHz: 3.53dB</p> <p> 1GHz~18GHz: 4.28dB</p> <p>Vertical: 30MHz~300MHz: 3.86dB</p> <p> 300MHz~1GHz: 3.53dB</p> <p> 1GHz~18GHz: 4.33dB</p>

7. TEST RESULT

7.1. Summary

FCC Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.407(a)	RSS-247 §6.2	26dB Bandwidth	N/A	Conducted	Pass	Section 7.2
15.407(e)	RSS-247 §6.2.4	6dB Bandwidth	≥ 500kHz		Pass	Section 7.3
15.407(a)(1) (iv), (2), (3)	RSS-247 §6.2.1, §6.2.2, §6.2.2, §6.2.4	Maximum Conducted Output Power	≤ 23.98 dBm U-NII-1 ≤ 23.98 dBm U-NII-2A ≤ 23.98 dBm U-NII-2C		Pass	Section 7.4
		Maximum E.I.R.P	≤ 30 dBm U-NII-3			
15.407(h)(1)	RSS-247 §6.2.2, §6.2.3	Transmit Power Control	≤ 24 dBm		Pass	Section 7.5
15.407(a) (1)(iv), (2), (3), (5)	RSS-247 §6.2.1, §6.2.2, §6.2.2, §6.2.4	Peak Power Spectral Density	Refer to Section 7.5		Pass	Section 7.6
15.407(g)	RSS-Gen [8.11]	Frequency Stability	N/A		Pass	Section 7.7
15.407(b) (1), (2), (3), (4)(i)	RSS-247 §6.2.1, §6.2.2, §6.2.2, §6.2.4	Undesirable Emissions	Refer to section 7.8	Radiated	Pass	Section 7.8 & 7.9
15.205, 15.209 15.407(b) (5), (6), (7)	RSS-247 §6.2.1, §6.2.2, §6.2.2, §6.2.4	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209		Pass	Section 7.10
15.207	RSS-Gen [8.8]	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits		Line Conducted	Pass

Notes:

- 1) All channels, modes, and modulations/data rates were investigated among all UNII bands. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) Test Items “26dB Bandwidth” & “6dB Bandwidth” have been assessed MIMO transmission, and showed the worst test data in this report.

7.2. 26dB and 99% Bandwidth Measurement

7.2.1. Test Limit

N/A


7.2.2. Test Procedure used

ANSI C63.10-2013 - Section 6.9.3

7.2.3. Test Setting

1. The analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 26$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediated power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth.
3. VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = Max hold.

7.2.4. Test Setup

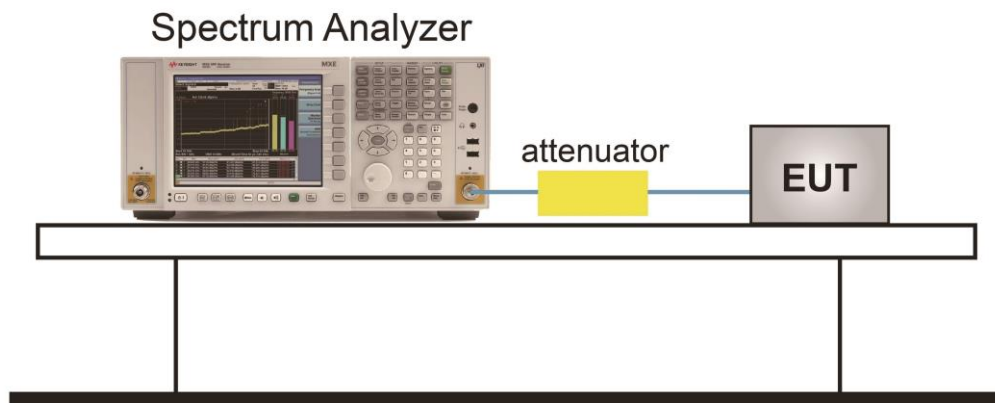

7.2.5. Test Result

Product	Standalone VR Headset	Temperature	24°C
Test Engineer	Dandy Li	Relative Humidity	54%
Test Site	TR3	Test Date	2019/12/14


Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)	Result
Ant 2 / Ant 1 + 2						
802.11a	6	36	5180	21.61	16.56	Pass
802.11a	6	44	5220	22.24	16.60	Pass
802.11a	6	48	5240	23.16	16.58	Pass
802.11a	6	52	5260	22.33	16.55	Pass
802.11a	6	60	5300	22.76	16.56	Pass
802.11a	6	64	5320	22.22	16.58	Pass
802.11a	6	100	5500	22.50	16.56	Pass
802.11a	6	116	5580	22.21	16.63	Pass
802.11a	6	120	5600	22.11	16.54	Pass
802.11a	6	140	5700	21.94	16.53	Pass
802.11a	6	144	5720	21.56	16.54	Pass
802.11a	6	149	5745	22.10	16.50	Pass
802.11a	6	157	5785	22.58	16.58	Pass
802.11a	6	165	5825	21.60	16.59	Pass
802.11n-HT20	MCS0	36	5180	22.17	17.76	Pass
802.11n-HT20	MCS0	44	5220	22.34	17.72	Pass
802.11n-HT20	MCS0	48	5240	21.94	17.76	Pass
802.11n-HT20	MCS0	52	5260	22.35	17.78	Pass
802.11n-HT20	MCS0	60	5300	23.62	17.72	Pass
802.11n-HT20	MCS0	64	5320	21.77	17.74	Pass
802.11n-HT20	MCS0	100	5500	22.00	17.77	Pass
802.11n-HT20	MCS0	116	5580	22.43	17.82	Pass
802.11n-HT20	MCS0	120	5600	22.87	17.76	Pass
802.11n-HT20	MCS0	140	5700	22.69	17.69	Pass
802.11n-HT20	MCS0	144	5720	22.46	17.77	Pass
802.11n-HT20	MCS0	149	5745	23.13	17.76	Pass
802.11n-HT20	MCS0	157	5785	22.48	17.70	Pass
802.11n-HT20	MCS0	165	5825	22.68	17.79	Pass




Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)	Result
Ant 2 / Ant 1 + 2						
802.11n-HT40	MCS0	38	5190	41.46	36.11	Pass
802.11n-HT40	MCS0	46	5230	41.01	36.16	Pass
802.11n-HT40	MCS0	54	5270	41.09	36.19	Pass
802.11n-HT40	MCS0	62	5310	41.14	36.19	Pass
802.11n-HT40	MCS0	102	5510	40.62	36.12	Pass
802.11n-HT40	MCS0	110	5550	41.61	36.20	Pass
802.11n-HT40	MCS0	118	5590	40.43	36.11	Pass
802.11n-HT40	MCS0	134	5670	41.12	36.15	Pass
802.11n-HT40	MCS0	142	5710	40.50	36.08	Pass
802.11n-HT40	MCS0	151	5755	40.19	36.17	Pass
802.11n-HT40	MCS0	159	5795	40.17	36.21	Pass
802.11ac-VHT20	MCS0	36	5180	22.99	17.77	Pass
802.11ac-VHT20	MCS0	44	5220	22.59	17.76	Pass
802.11ac-VHT20	MCS0	48	5240	21.72	17.75	Pass
802.11ac-VHT20	MCS0	52	5260	22.34	17.77	Pass
802.11ac-VHT20	MCS0	60	5300	23.65	17.77	Pass
802.11ac-VHT20	MCS0	64	5320	23.18	17.76	Pass
802.11ac-VHT20	MCS0	100	5500	23.10	17.77	Pass
802.11ac-VHT20	MCS0	116	5580	23.28	17.81	Pass
802.11ac-VHT20	MCS0	120	5600	22.41	17.71	Pass
802.11ac-VHT20	MCS0	140	5700	22.67	17.78	Pass
802.11ac-VHT20	MCS0	144	5720	23.43	17.79	Pass
802.11ac-VHT20	MCS0	149	5745	22.31	17.79	Pass
802.11ac-VHT20	MCS0	157	5785	21.82	17.70	Pass
802.11ac-VHT20	MCS0	165	5825	22.79	17.74	Pass

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)	Result
802.11ac-VHT40	MCS0	38	5190	40.81	36.14	Pass
802.11ac-VHT40	MCS0	46	5230	40.95	36.23	Pass
802.11ac-VHT40	MCS0	54	5270	40.85	36.20	Pass
802.11ac-VHT40	MCS0	62	5310	40.97	36.14	Pass
802.11ac-VHT40	MCS0	102	5510	40.18	36.16	Pass
802.11ac-VHT40	MCS0	110	5550	41.32	36.22	Pass
802.11ac-VHT40	MCS0	118	5590	41.59	36.18	Pass
802.11ac-VHT40	MCS0	134	5670	40.87	36.17	Pass
802.11ac-VHT40	MCS0	142	5710	40.36	36.14	Pass
802.11ac-VHT40	MCS0	151	5755	40.24	36.12	Pass
802.11ac-VHT40	MCS0	159	5795	41.38	36.19	Pass
802.11ac-VHT80	MCS0	42	5210	82.38	75.64	Pass
802.11ac-VHT80	MCS0	58	5290	82.29	75.79	Pass
802.11ac-VHT80	MCS0	106	5530	82.46	75.66	Pass
802.11ac-VHT80	MCS0	122	5610	81.95	75.64	Pass
802.11ac-VHT80	MCS0	138	5690	81.80	75.65	Pass
802.11ac-VHT80	MCS0	155	5775	82.19	75.75	Pass

802.11a 26dB & 99% Bandwidth - Ant 2 / Ant 1 + 2

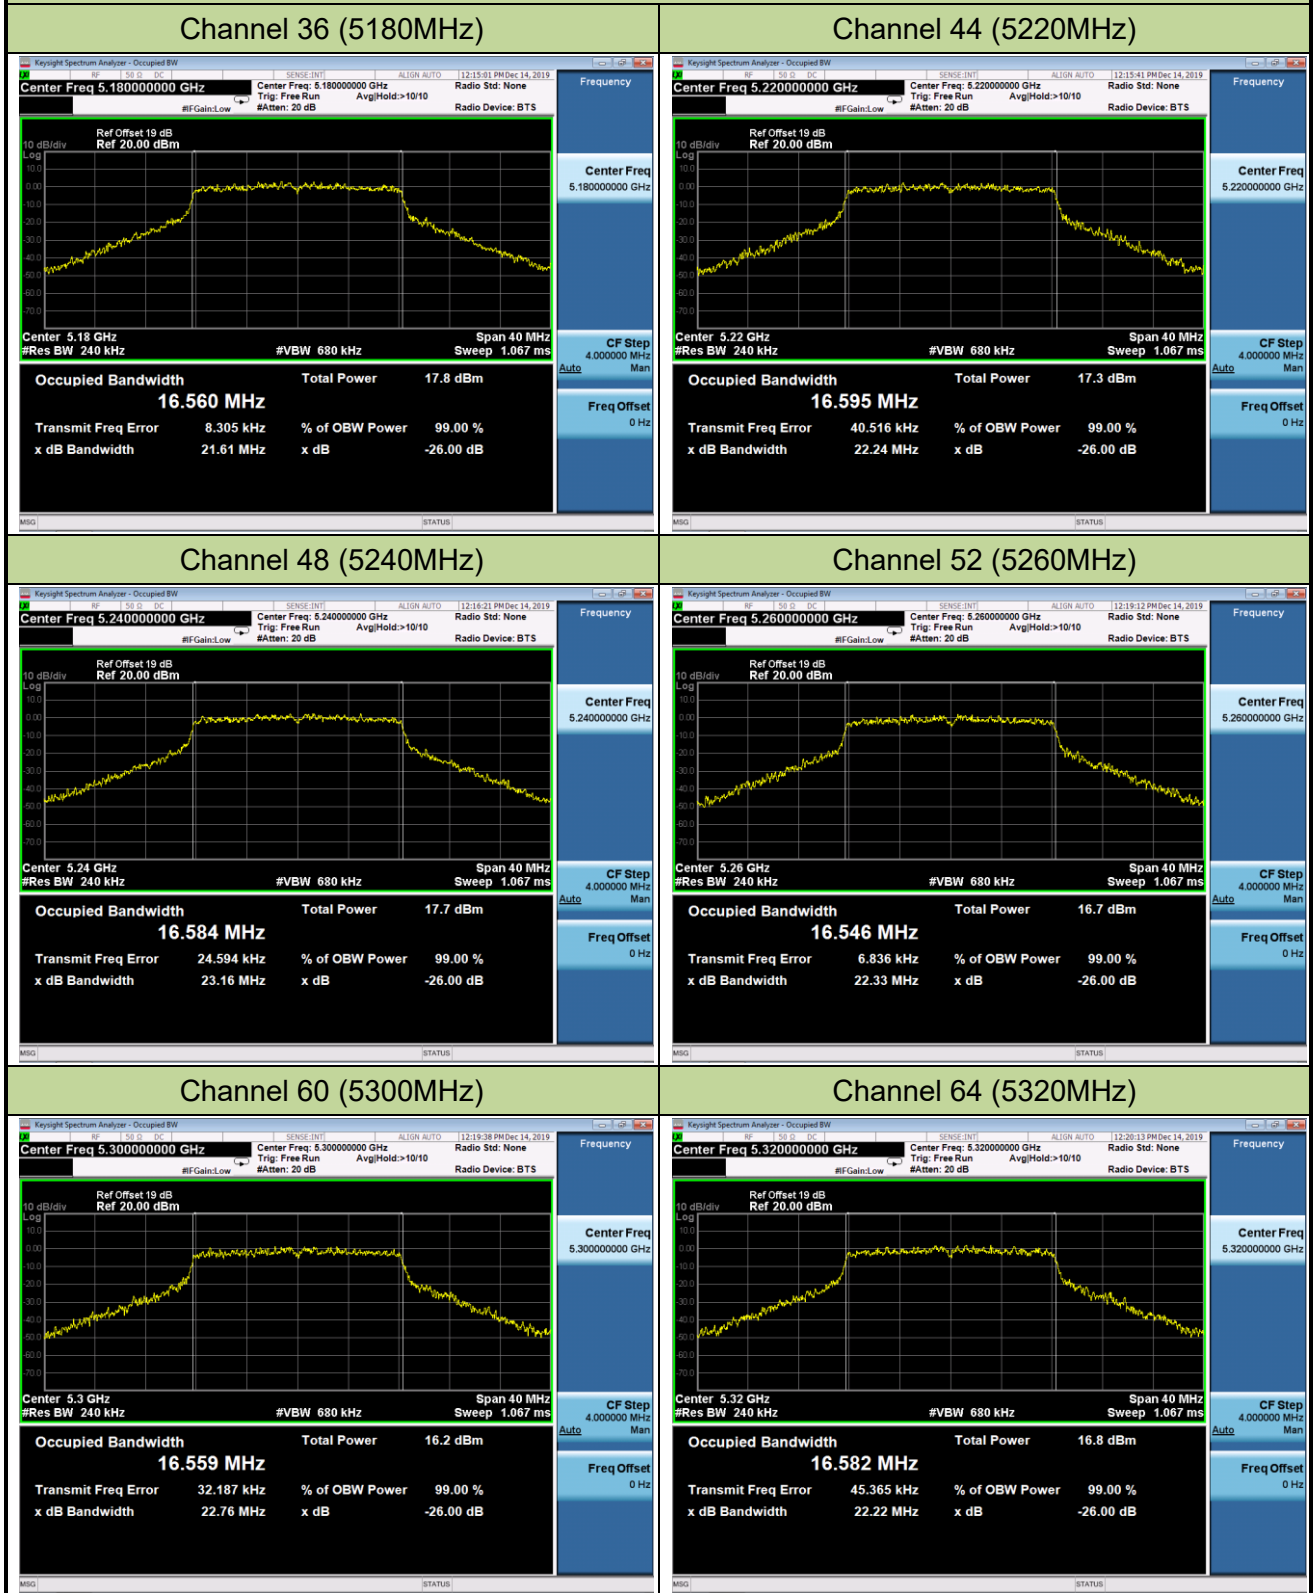


802.11a 26dB & 99% Bandwidth - Ant 2 / Ant 1 + 2

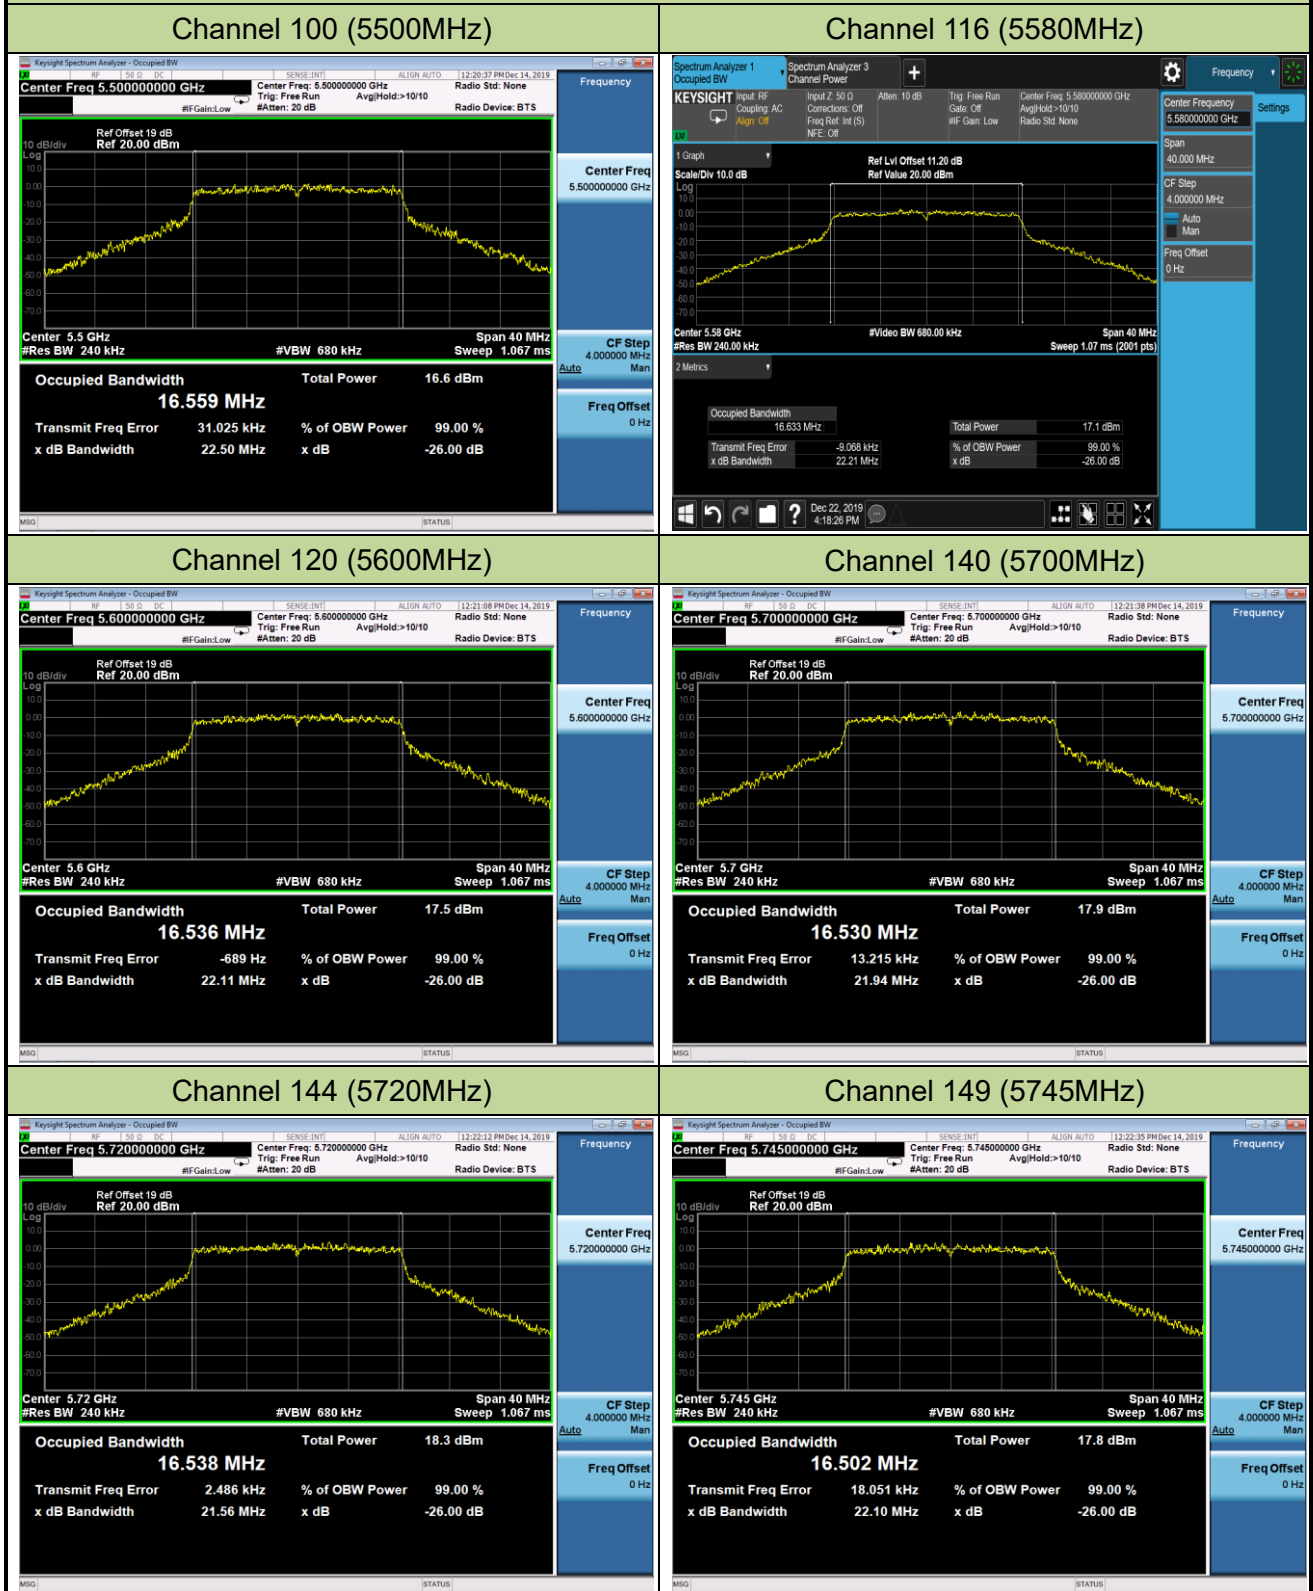




802.11n-HT20 26dB & 99% Bandwidth - Ant 2 / Ant 1 + 2


Channel 36 (5180MHz)

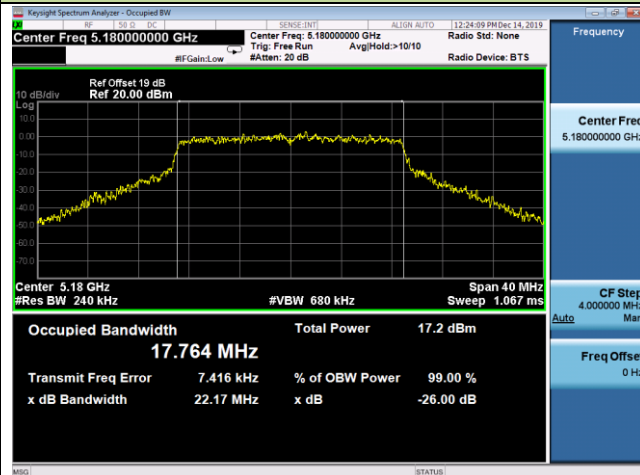


Channel 44 (5220MHz)

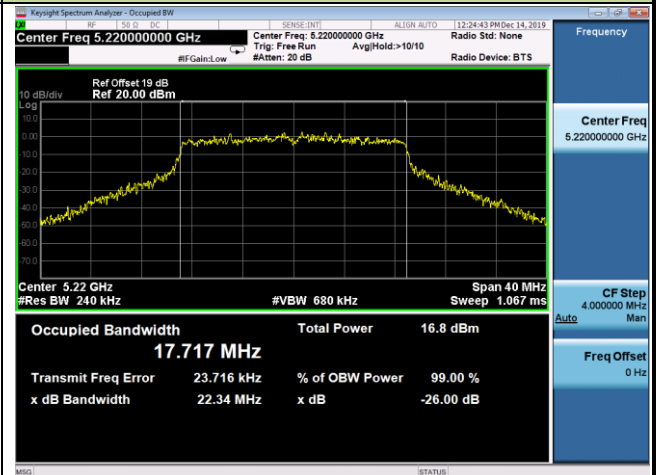


Channel 48 (5240MHz)

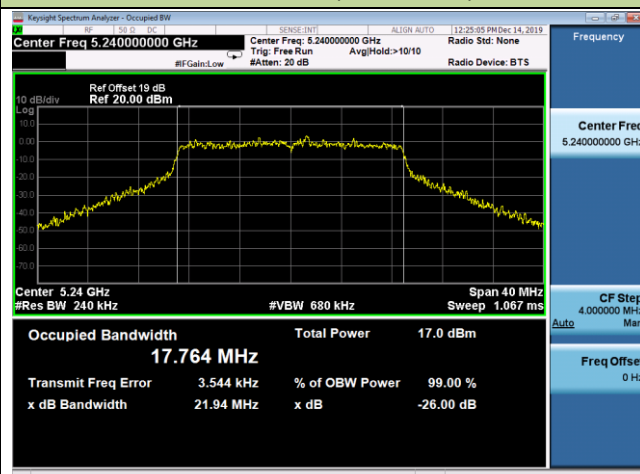


Channel 52 (5260MHz)

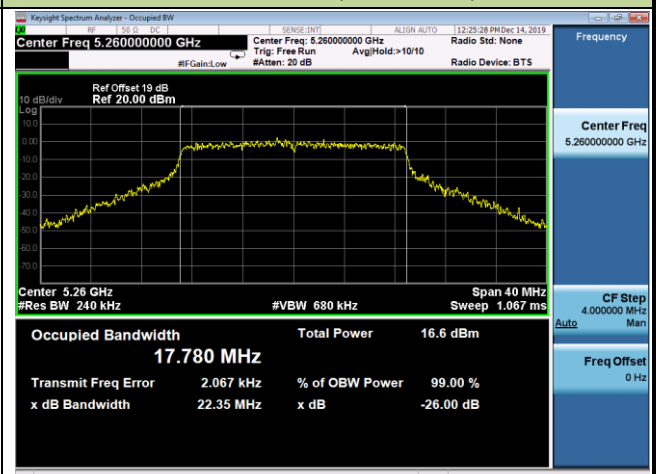

Channel 60 (5300MHz)

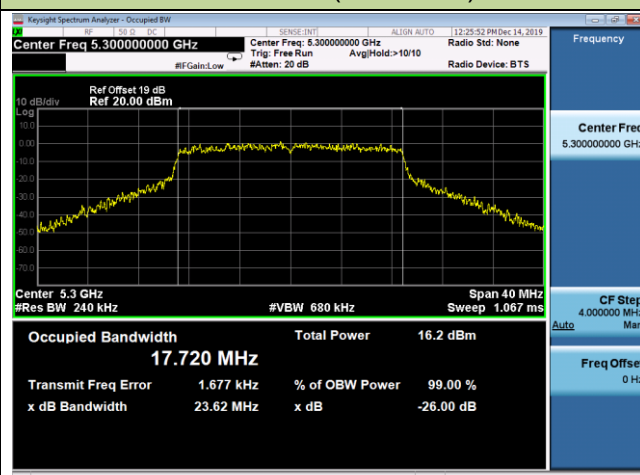

Channel 64 (5320MHz)

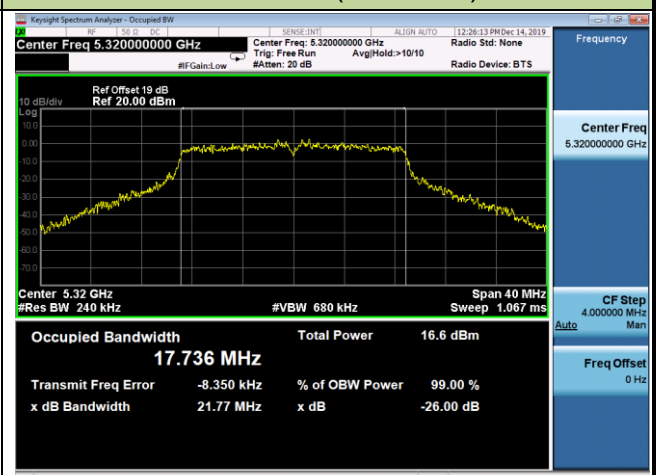


802.11n-HT20 26dB & 99% Bandwidth - Ant 2 / Ant 1 + 2

Channel 100 (5500MHz)




Channel 116 (5580MHz)

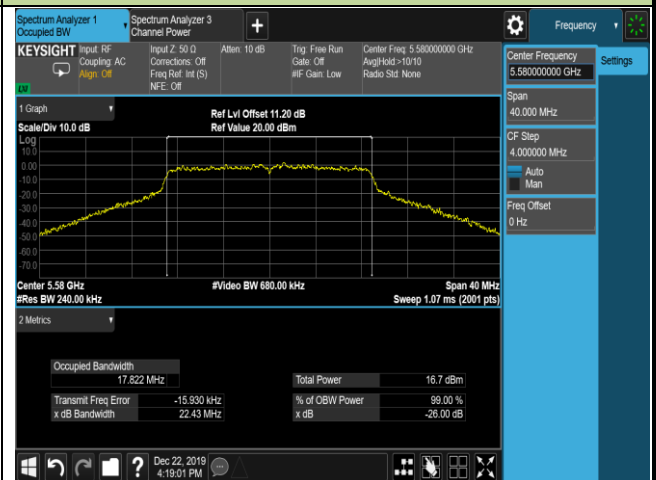


Channel 120 (5600MHz)




Channel 140 (5700MHz)

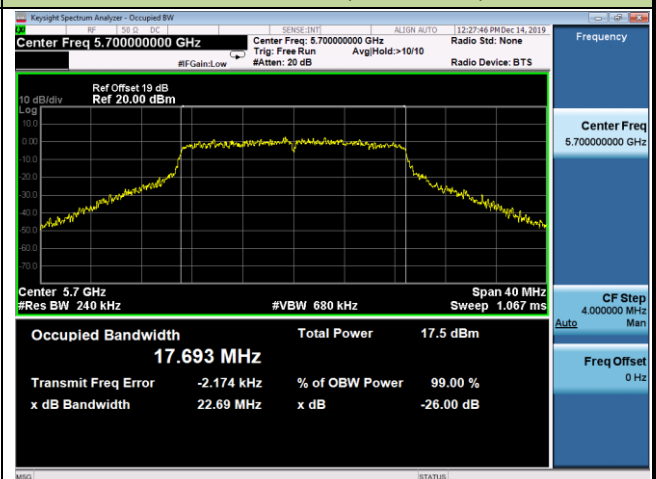


Channel 144 (5720MHz)

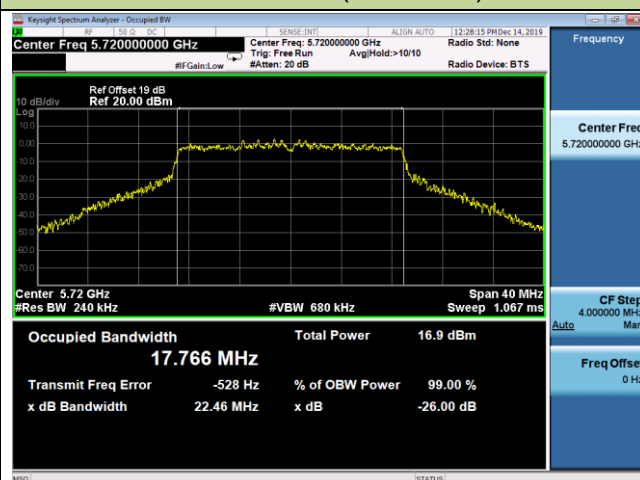


Channel 149 (5745MHz)

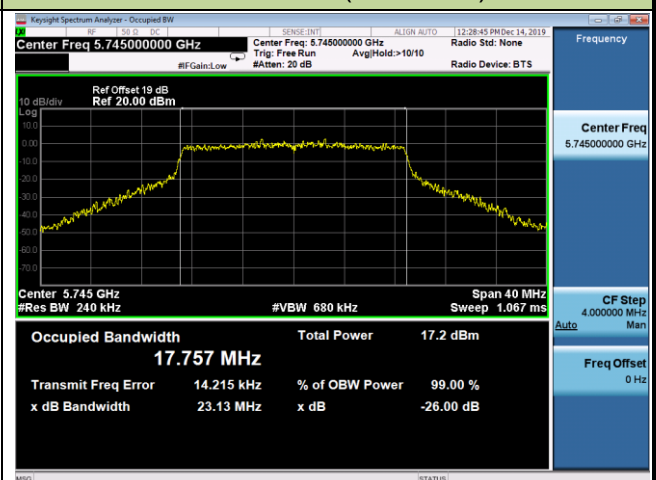

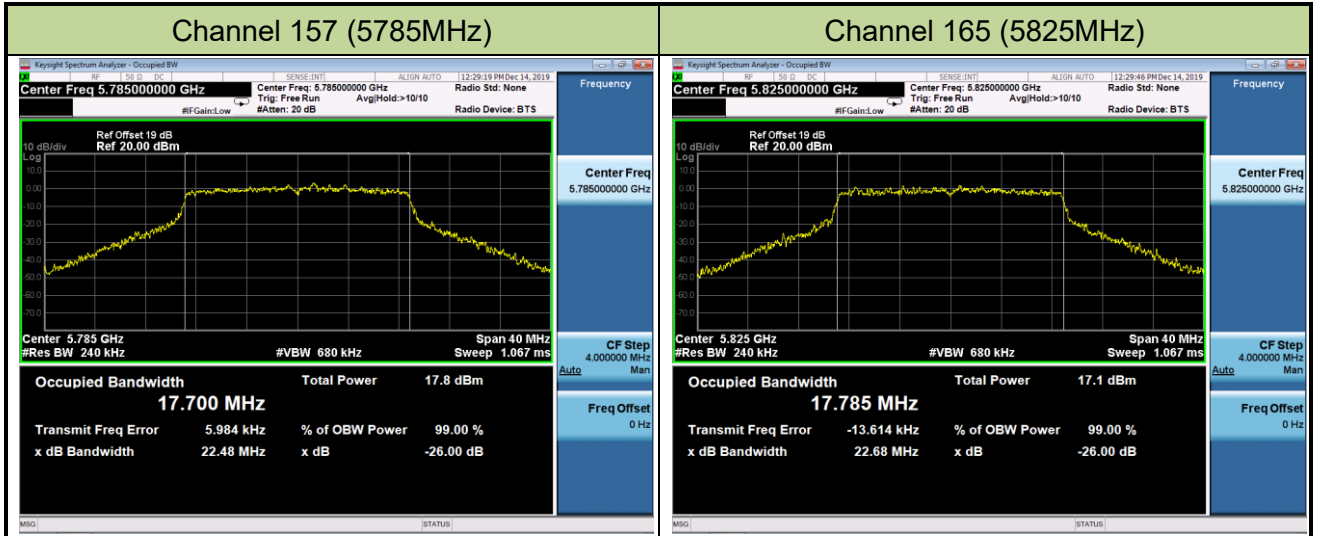


802.11n-HT40 26dB & 99% Bandwidth - Ant 2 / Ant 1 + 2


Channel 38 (5190MHz)

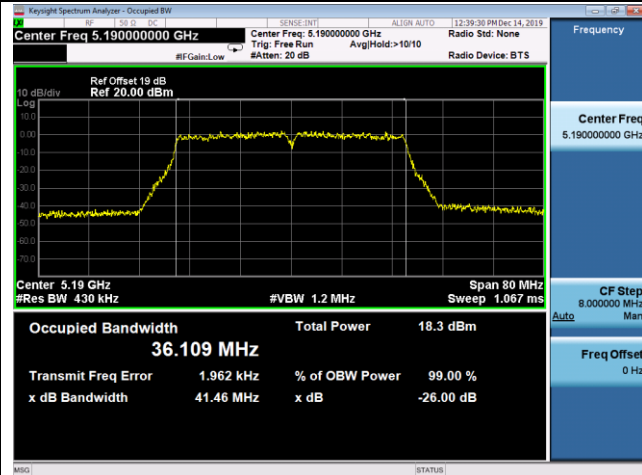


Channel 46 (5230MHz)

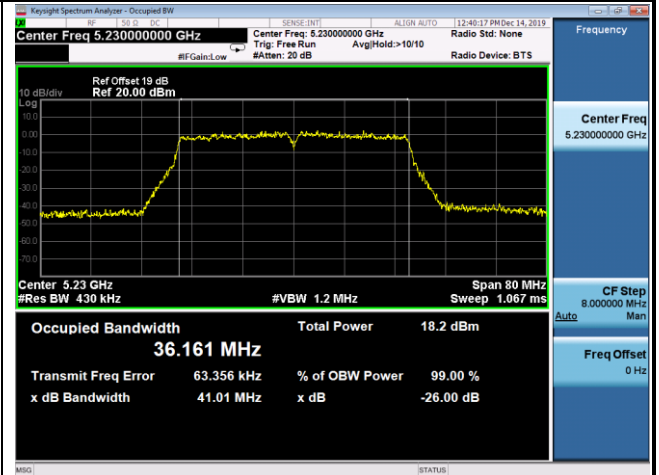


Channel 54 (5270MHz)

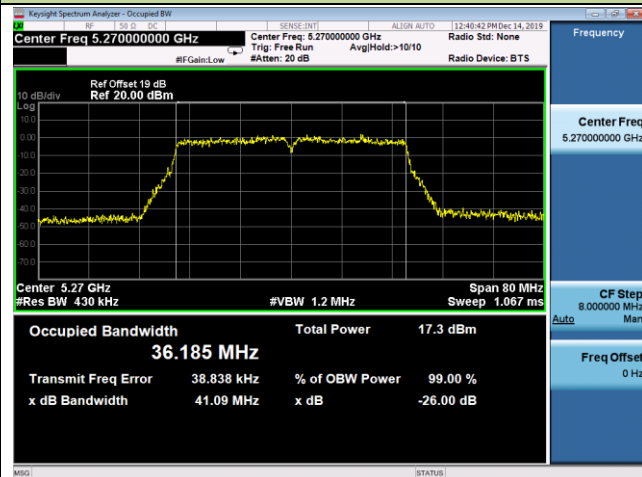


Channel 62 (5310MHz)

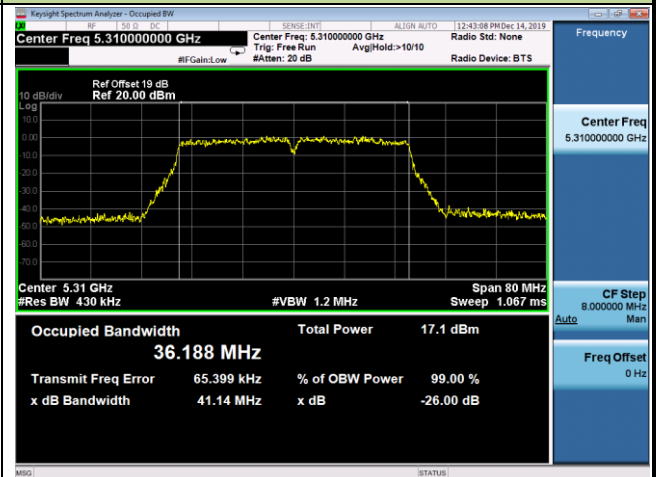

Channel 102 (5510MHz)

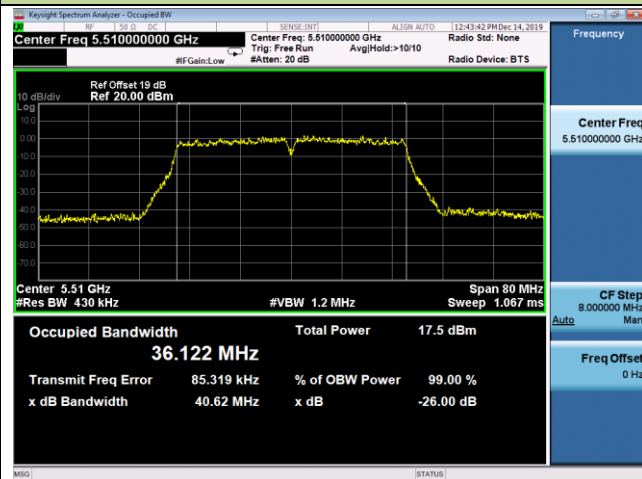


Channel 110 (5550MHz)

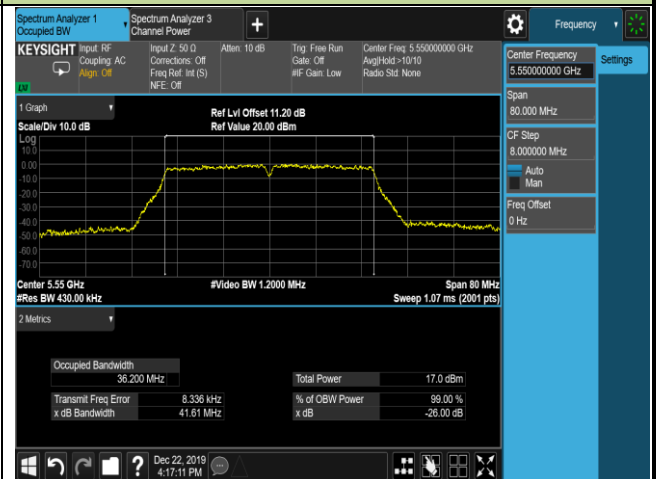


802.11n-HT40 26dB & 99% Bandwidth - Ant 2 / Ant 1 + 2


Channel 118 (5590MHz)

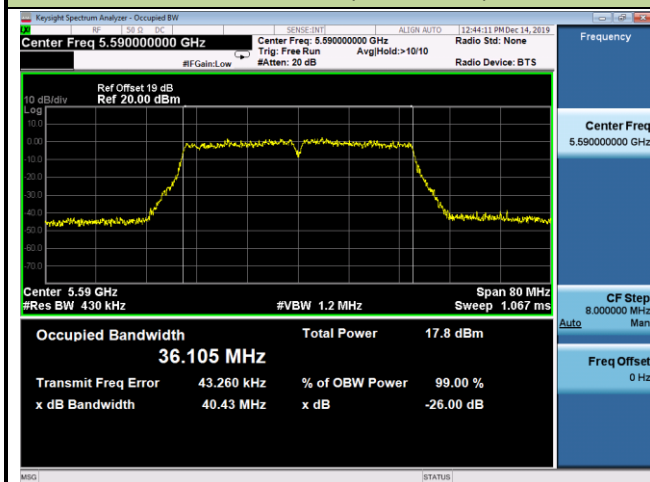


Channel 134 (5670MHz)

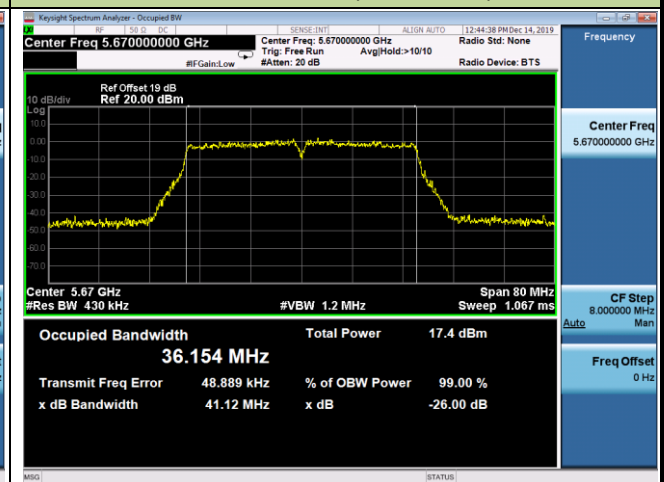


Channel 142 (5710MHz)

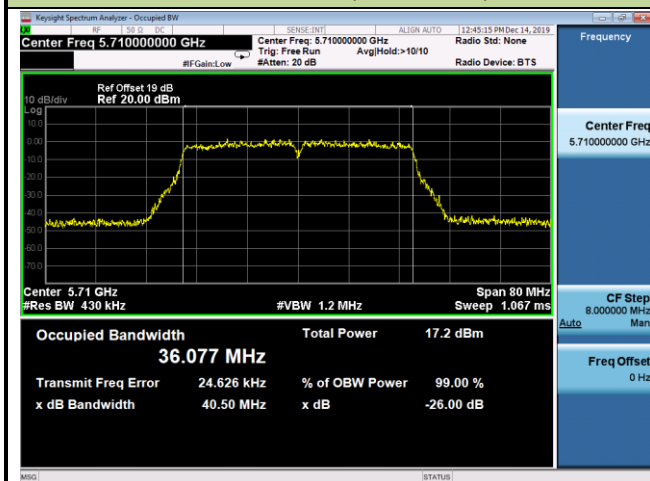

Channel 151 (5755MHz)

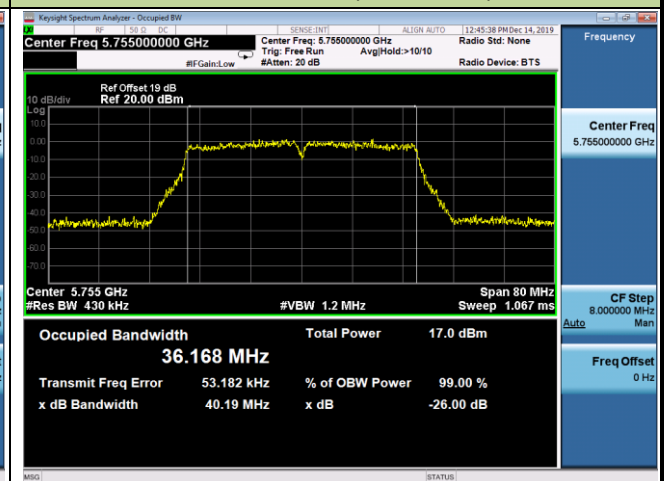


Channel 159 (5795MHz)

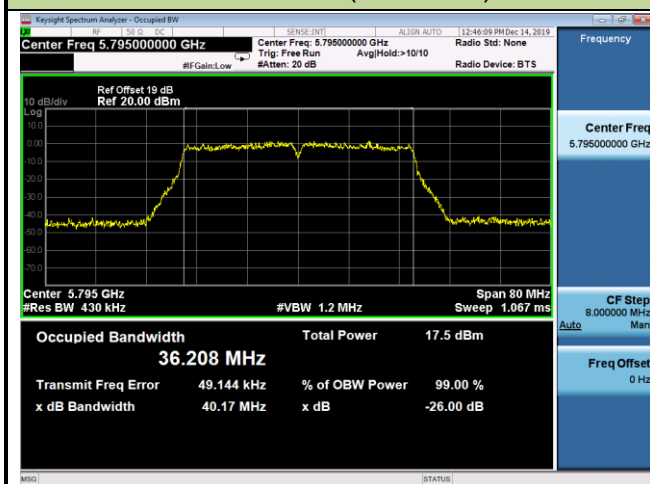


802.11ac-VHT20 26dB & 99% Bandwidth - Ant 2 / Ant 1 + 2


Channel 36 (5180MHz)

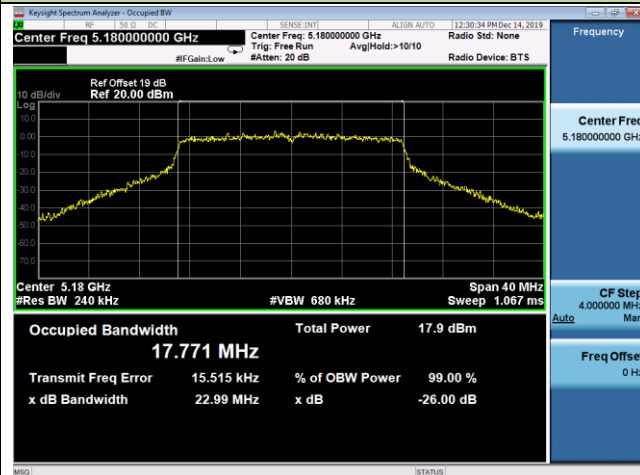


Channel 44 (5220MHz)

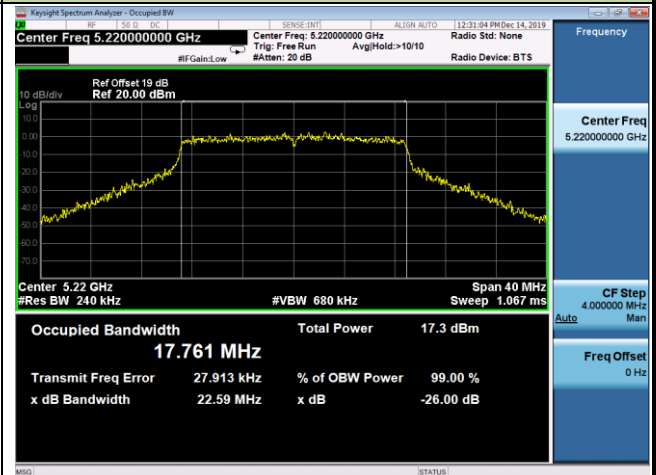


Channel 48 (5240MHz)

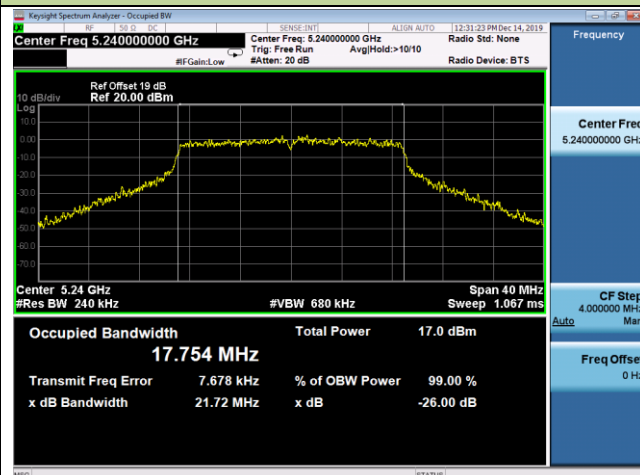

Channel 52 (5260MHz)

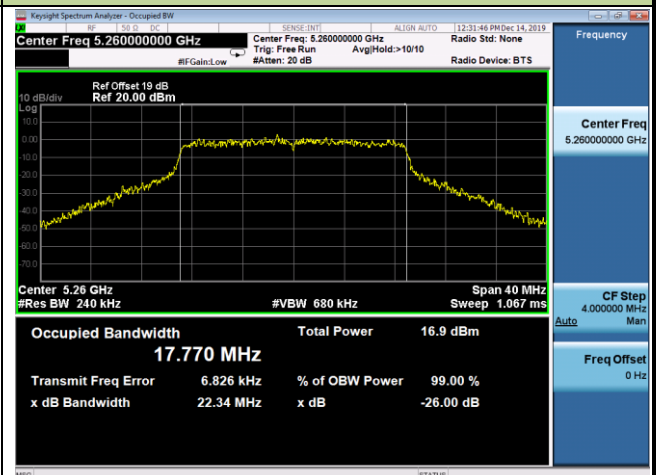

Channel 60 (5300MHz)

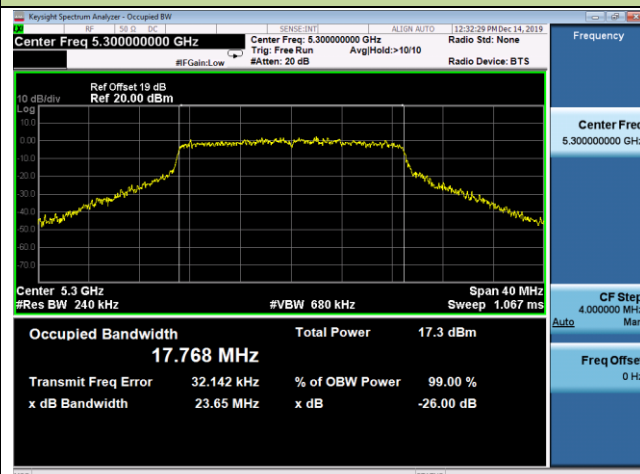

Channel 64 (5320MHz)

