



FCC RF Test Report

APPLICANT : Lenovo(Shanghai) Electronics Technology Co., Ltd.
EQUIPMENT : Notebook Computer
BRAND NAME : Lenovo
MODEL NAME : Lenovo YB-J912L
FCC ID : O57YBJ912L
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DSS) Spread Spectrum Transmitter

The product were integrated the WWAN module (Brand Name: Fibocom, Model Name: L850-GL, FCC ID: ZMOL850GL) and the BT/WLAN module (Brand Name: Intel®, Model Name: 8265D2W, FCC ID: PD98265D2) during the test.

The product was received on Jan. 03, 2018 and testing was completed on Mar. 28, 2018. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.



Approved by: James Huang / Manager

Sporton International (Kunshan) Inc.
No.3-2 Ping-Xiang Rd, Kunshan Development Zone Kunshan City Jiangsu Province 215335
China



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION..... 5

 1.1 Applicant 5

 1.2 Manufacturer 5

 1.3 Product Feature of Equipment Under Test..... 5

 1.4 Product Specification of Equipment Under Test..... 6

 1.5 Modification of EUT 6

 1.6 Testing Location 7

 1.7 Applicable Standards 7

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST..... 8

 2.1 Descriptions of Test Mode 8

 2.2 Carrier Frequency Channel 9

 2.3 Test Mode 10

 2.4 Connection Diagram of Test System 11

 2.5 Support Unit used in test configuration and system 11

 2.6 EUT Operation Test Setup 11

3 TEST RESULT 12

 3.1 Peak Output Power Measurement 12

 3.2 Radiated Band Edges and Spurious Emission Measurement 14

 3.3 AC Conducted Emission Measurement..... 20

 3.4 Antenna Requirements 24

4 LIST OF MEASURING EQUIPMENT 25

5 UNCERTAINTY OF EVALUATION..... 26

APPENDIX A. RADIATED SPURIOUS EMISSION

APPENDIX B. SETUP PHOTOGRAPHS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR810315A	Rev. 01	Initial issue of report	Mar. 30, 2018



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
-	15.247(a)(1)	Number of Channels	≥ 15Chs	Pass	1
-	15.247(a)(1)	Hopping Channel Separation	≥ 2/3 of 20dB BW	Pass	1
-	15.247(a)(1)	Dwell Time of Each Channel	≤ 0.4sec in 31.6sec period	Pass	1
-	15.247(a)(1)	20dB Bandwidth	NA	Pass	1
-	-	99% Bandwidth	-	Pass	1
3.1	15.247(b)(1)	Peak Output Power	≤ 125 mW	Pass	-
-	15.247(d)	Conducted Band Edges	≤ 20dBc	Pass	1
-	15.247(d)	Conducted Spurious Emission	≤ 20dBc	Pass	1
3.2	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.68 dB at 45.52 MHz
3.3	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 10.21 dB at 0.212 MHz
3.4	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-
<p>Remark 1: All conducted test items were leverage from module RF report which can refer to Report No. "160321-02.TR05".</p>					



1 General Description

1.1 Applicant

Lenovo(Shanghai) Electronics Technology Co., Ltd.
NO.68 BUILDING, 199 FENJU RD, Pilot Free Trade Zone, 200131, China

1.2 Manufacturer

Lenovo PC HK Limited
23/F, Lincoln House, Taikoo Place 979 King's Road, Quarry Bay, Hong Kong

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Notebook Computer
Brand Name	Lenovo
Model Name	Lenovo YB-J912L
FCC ID	O57YBJ912L
EUT supports Radios application	WCDMA/HSPA/HSPA+ (16QAM uplink is not supported)/ DC-HSDPA/LTE WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth v3.0+EDR/ Bluetooth v4.0 LE/ Bluetooth v4.1 LE/ Bluetooth v4.2 LE
HW Version	Lenovo YB-J912L
SW Version	Windows 10
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	79
Carrier Frequency of Each Channel	2402+n*1 MHz; n=0~78
Maximum Output Power to Antenna	Bluetooth BR(1Mbps) : 10.28 dBm (0.0107 W) Bluetooth EDR (2Mbps) : 8.92 dBm (0.0078 W) Bluetooth EDR (3Mbps) : 8.32 dBm (0.0068 W)
Antenna Type / Gain	For PC Mode: PIFA Antenna with gain 3.60 dBi For Pad Mode: PIFA Antenna with gain -0.40 dBi
Type of Modulation	Bluetooth BR (1Mbps) : GFSK Bluetooth EDR (2Mbps) : $\pi/4$ -DQPSK Bluetooth EDR (3Mbps) : 8-DPSK

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Testing Location

Sporton International (Kunshan) Inc. is accredited to ISO 17025 by National Voluntary Laboratory Accreditation Program (NVLAP code: 600155-0) and the FCC designation No is CN5013.

Test Site	Sporton International (Kunshan) Inc.			
Test Site Location	No.3-2 Ping-Xiang Rd, Kunshan Development Zone Kunshan City Jiangsu Province 215335 China TEL : +86-512-57900158 FAX : +86-512-57900958			
Test Site No.	Sporton Site No.			FCC Test Firm Registration No.
	TH01-KS	CO01-KS	03CH03-KS	630927

Note: The test site complies with ANSI C63.4 2014 requirement.

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Descriptions of Test Mode

Preliminary tests were performed in different data rates and recorded the RF output power in the following table:

Channel	Frequency	Bluetooth RF Output Power		
		Data Rate / Modulation		
		GFSK	$\pi/4$ -DQPSK	8-DPSK
		1Mbps	2Mbps	3Mbps
Ch00	2402MHz	9.56 dBm	8.37 dBm	7.65 dBm
Ch39	2441MHz	10.28 dBm	8.92 dBm	8.32 dBm
Ch78	2480MHz	8.96 dBm	7.56 dBm	7.13 dBm

Remark:

1. All the test data for each data rate were verified, but only the worst case was reported.
2. The data rate was set in 1Mbps for all the test items due to the highest RF output power.



2.2 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	27	2429	54	2456
	1	2403	28	2430	55	2457
	2	2404	29	2431	56	2458
	3	2405	30	2432	57	2459
	4	2406	31	2433	58	2460
	5	2407	32	2434	59	2461
	6	2408	33	2435	60	2462
	7	2409	34	2436	61	2463
	8	2410	35	2437	62	2464
	9	2411	36	2438	63	2465
	10	2412	37	2439	64	2466
	11	2413	38	2440	65	2467
	12	2414	39	2441	66	2468
	13	2415	40	2442	67	2469
	14	2416	41	2443	68	2470
	15	2417	42	2444	69	2471
	16	2418	43	2445	70	2472
	17	2419	44	2446	71	2473
	18	2420	45	2447	72	2474
	19	2421	46	2448	73	2475
	20	2422	47	2449	74	2476
	21	2423	48	2450	75	2477
	22	2424	49	2451	76	2478
	23	2425	50	2452	77	2479
	24	2426	51	2453	78	2480
	25	2427	52	2454	-	-
	26	2428	53	2455	-	-




2.3 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases were recorded in this report, and the worst mode of radiated spurious emissions is Bluetooth 1Mbps mode, and recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
Radiated Test Cases	Bluetooth BR 1Mbps GFSK
	Mode 1: CH00_2402 MHz
	Mode 2: CH39_2441 MHz
	Mode 3: CH78_2480 MHz
Summary table of Test Cases	
AC Conducted Emission	Mode 1 :Bluetooth Link + WLAN Link(2.4G) + Adaptor 1 with Type C cable 1 + Type C port 2 + USB Link with U-Disk from Type C port 2 + Play H Plane

2.4 Connection Diagram of Test System

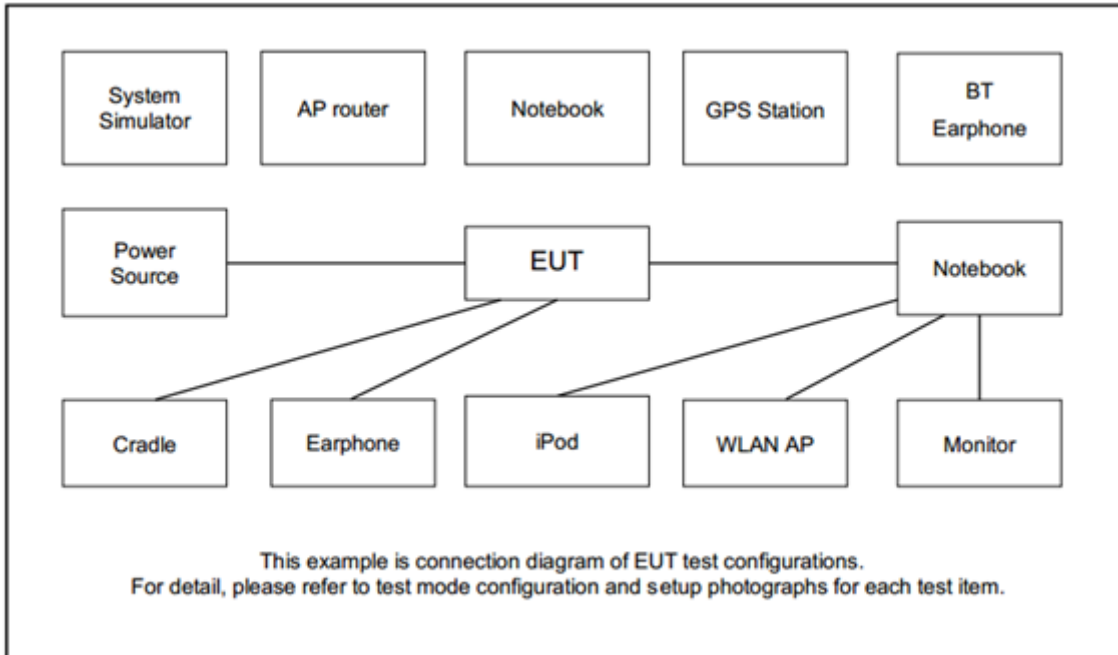

2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	BT Base Station	R&S	CBT	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	D-link	DIR-855	KA2DIR855A2	N/A	Unshielded, 1.8 m
3.	Bluetooth Earphone	Lenovo	LBH308	N/A	N/A	N/A
4.	SD Card	Kingston	SDC4/4GB	N/A	N/A	N/A
5.	U Disk	SanDisk	SDCZ51-004G	N/A	N/A	N/A

2.6 EUT Operation Test Setup

For Bluetooth function, the engineering test program was provided and enabled to make EUT connect with Bluetooth base station to continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

3 Test Result

3.1 Peak Output Power Measurement

3.1.1 Limit of Peak Output Power

The maximum peak conducted output power of the intentional radiator shall not exceed the following:

(1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.5.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power with cable loss and record the results in the test report.
5. Measure and record the results in the test report.

3.1.4 Test Setup

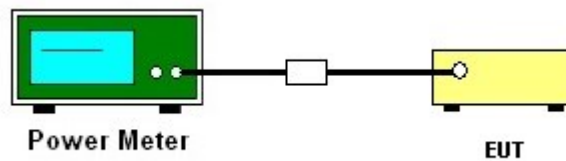



3.1.5 Test Result of Peak Output Power

Test Mode :	1Mbps	Temperature :	21~25°C
Test Engineer :	Silent Hai	Relative Humidity :	51~55%

Channel	Frequency (MHz)	RF Power (dBm)		
		GFSK	Max. Limits (dBm)	Pass/Fail
		1 Mbps		
00	2402	9.56	20.97	Pass
39	2441	10.28	20.97	Pass
78	2480	8.96	20.97	Pass

Test Mode :	2Mbps	Temperature :	21~25°C
Test Engineer :	Silent Hai	Relative Humidity :	51~55%

Channel	Frequency (MHz)	RF Power (dBm)		
		$\pi/4$ -DQPSK	Max. Limits (dBm)	Pass/Fail
		2 Mbps		
00	2402	8.37	20.97	Pass
39	2441	8.92	20.97	Pass
78	2480	7.56	20.97	Pass

Test Mode :	3Mbps	Temperature :	21~25°C
Test Engineer :	Silent Hai	Relative Humidity :	51~55%

Channel	Frequency (MHz)	RF Power (dBm)		
		8-DPSK	Max. Limits (dBm)	Pass/Fail
		3 Mbps		
00	2402	7.65	20.97	Pass
39	2441	8.32	20.97	Pass
78	2480	7.13	20.97	Pass



3.2 Radiated Band Edges and Spurious Emission Measurement

3.2.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.2.3 Test Procedures

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz, RBW=1MHz for $f > 1$ GHz ; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c).
Duty cycle = On time/100 milliseconds
On time = $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$
Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.
Average Emission Level = Peak Emission Level + $20 * \log(\text{Duty cycle})$
6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
7. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.


Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (-24.79dB) derived from $20 \log(\text{dwell time}/100\text{ms})$. This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

3.2.4 Test Setup


For radiated emissions below 30MHz

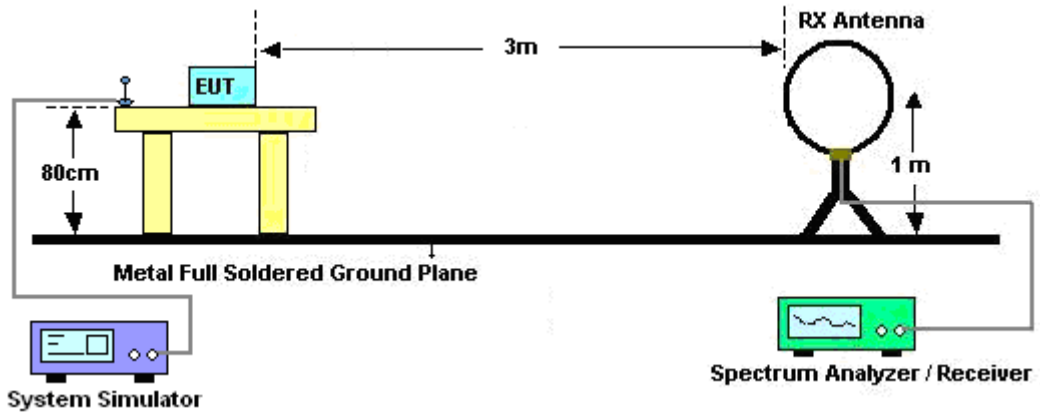

For radiated emissions from 30MHz to 1GHz

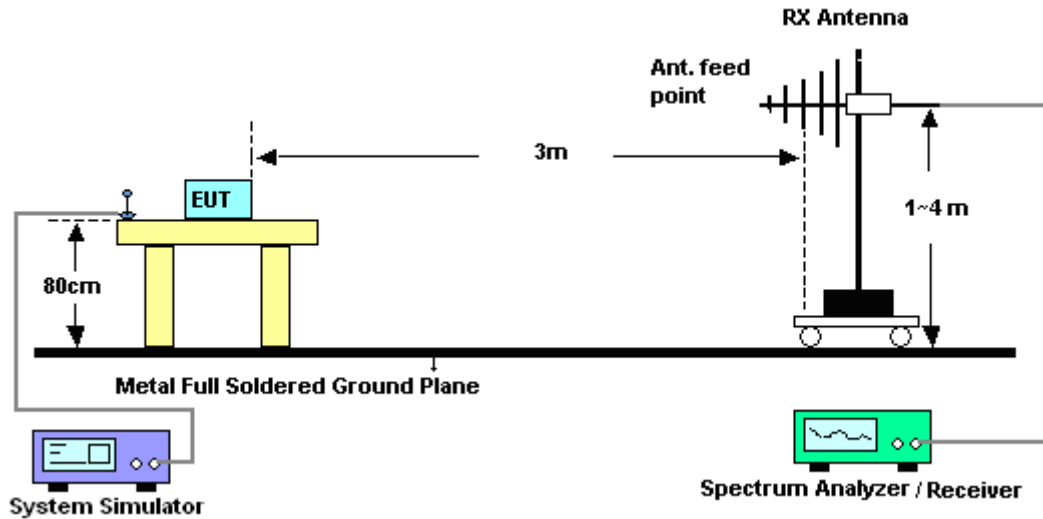

For radiated emissions above 1GHz

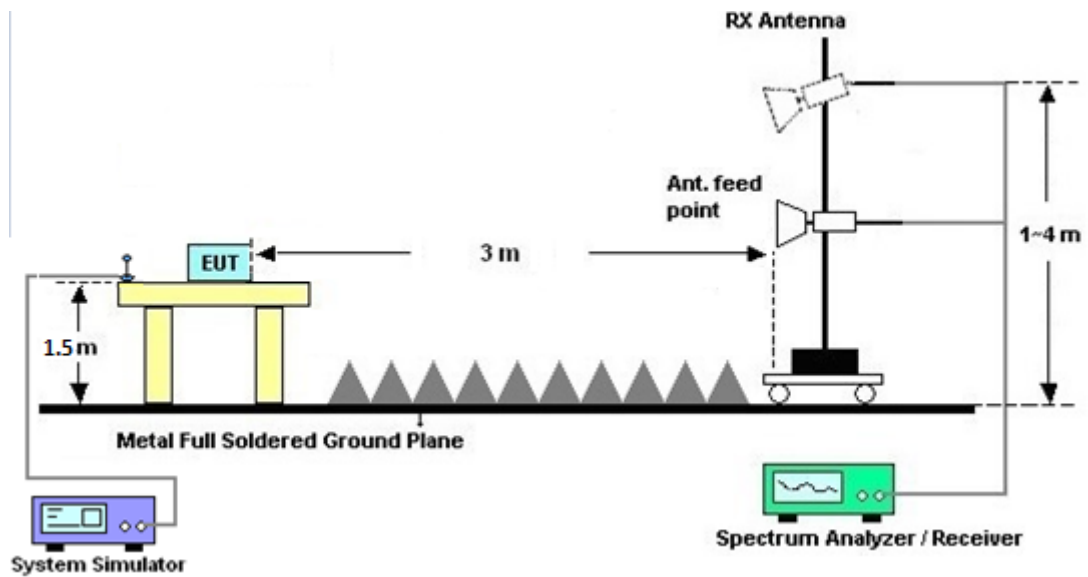

3.2.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)


The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.




3.2.6 Duty cycle correction factor for average measurement

DH5 on time (One Pulse) Plot on Channel 39

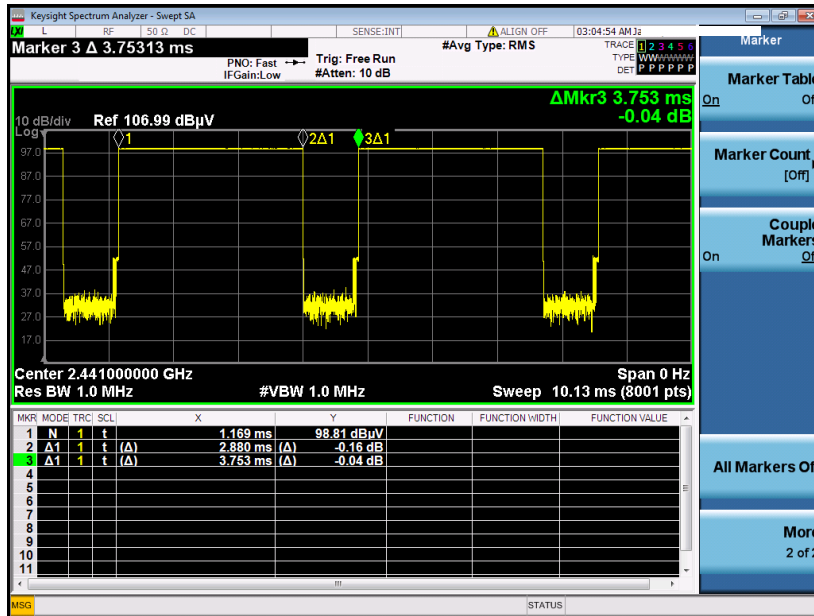

DH5 on time (Count Pulses) Plot on Channel 39

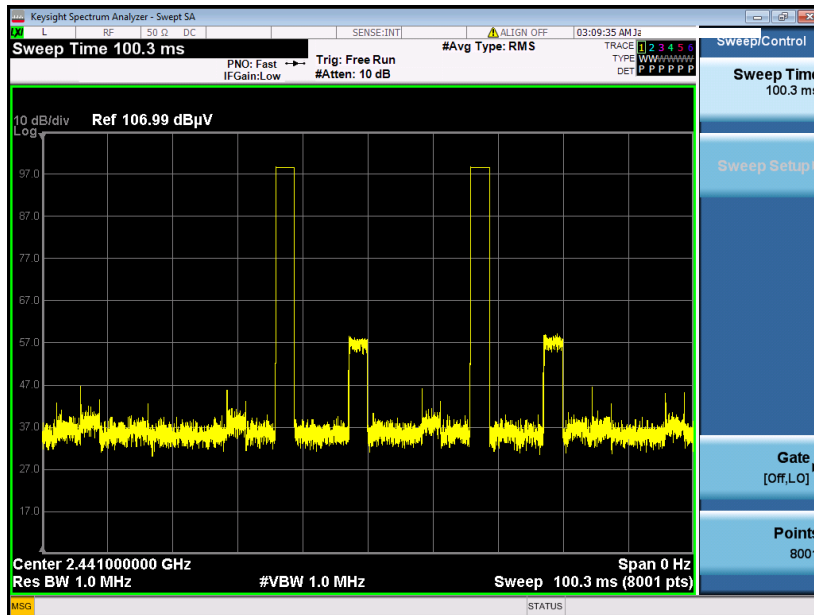

Note:

1. Worst case Duty cycle = on time/100 milliseconds = 2 * 2.88 / 100 = 5.76 %
2. Worst case Duty cycle correction factor = 20*log(Duty cycle) = -24.79 dB
3. DH5 has the highest duty cycle worst case and is reported.



Duty Cycle Correction Factor Consideration for AFH mode:

Bluetooth normal hopping rate is 1600Hz and reduced to 800Hz in AFH mode; due to the reduced number of hopping frequencies, with the same packet configuration the dwell time in each channel frequency within 100msec period is longer in AFH mode than normal mode.

In AFH mode, the minimum hopping frequencies are 20, to get the longest dwell time DH5 packet is observed; the period to have DH5 packet completing one hopping sequence is

$$2.88 \text{ ms} \times 20 \text{ channels} = 57.6 \text{ ms}$$

There cannot be 2 complete hopping sequences within 100ms period, considering the random hopping behavior, maximum 2 hops can be possibly observed within the period. $[100\text{ms} / 57.6\text{ms}] = 2 \text{ hops}$

Thus, the maximum possible ON time:

$$2.88 \text{ ms} \times 2 = 5.76 \text{ ms}$$

Worst case Duty Cycle Correction factor, which is derived from the maximum possible ON time,

$$20 \times \log(5.76 \text{ ms}/100\text{ms}) = -24.79 \text{ dB}$$

3.2.7 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix A.

3.2.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix A.



3.3 AC Conducted Emission Measurement

3.3.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


3.3.4 Test Setup

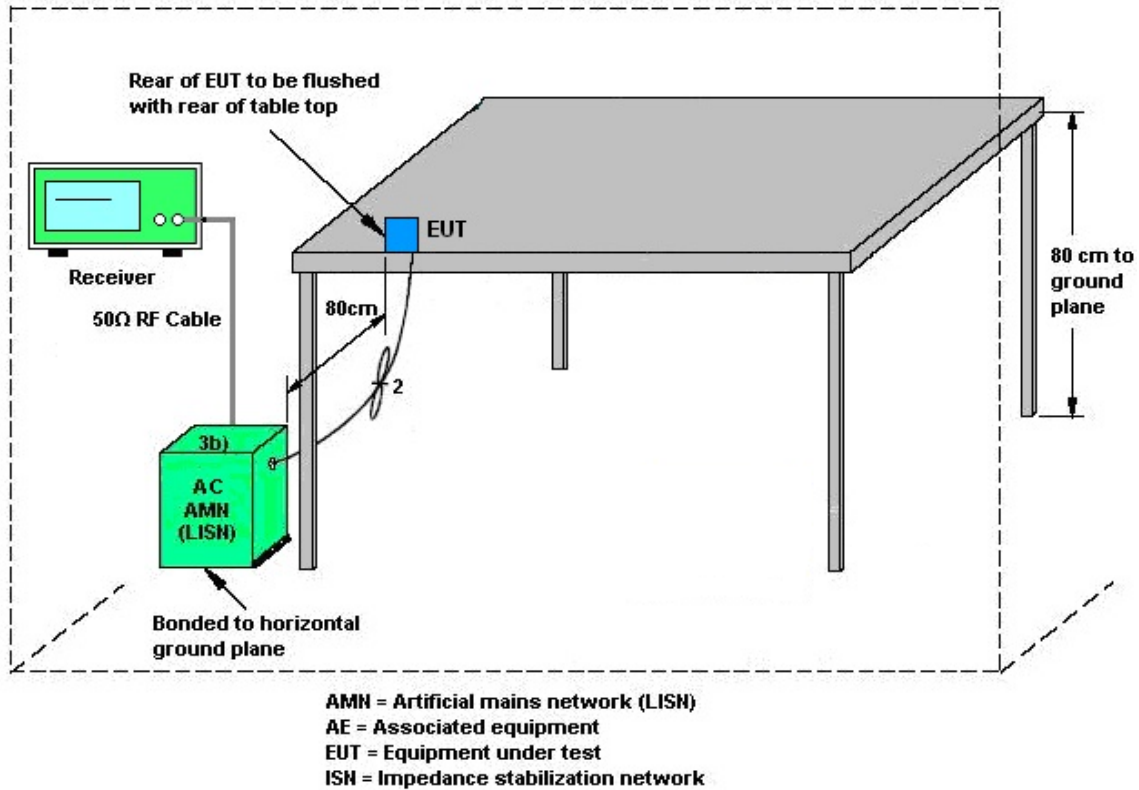



3.3.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	24.4~24.7°C
Test Engineer :	Amos Zhang	Relative Humidity :	33~37%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	Bluetooth Link + WLAN Link(2.4G) + Adaptor 1 with Type C cable 1 + Type C port 2 + USB Link with U-Disk from Type C port 2 + Play H Plane		

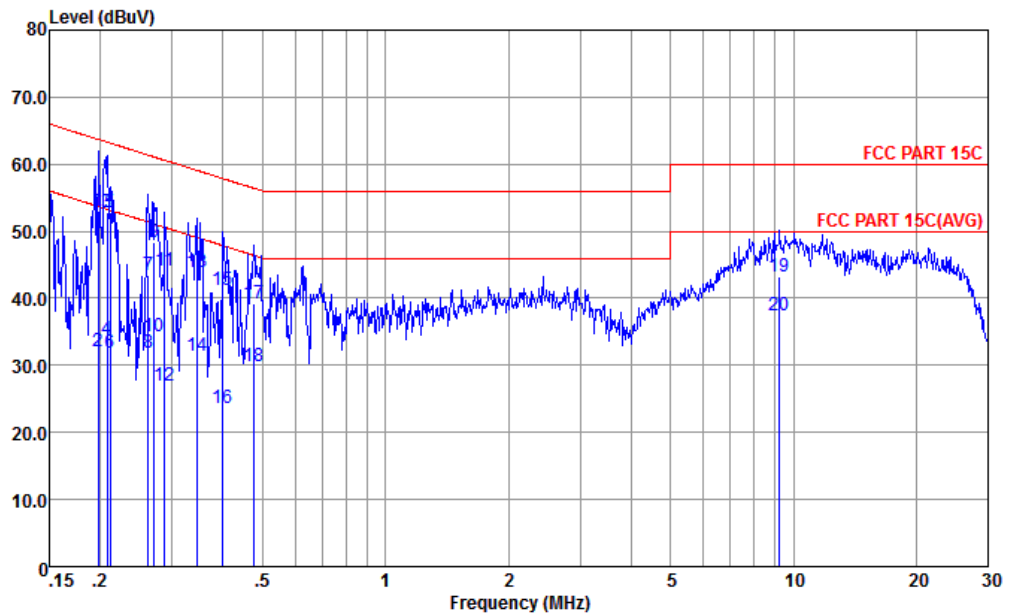


Site : CO01-KS
 Condition : FCC PART 15C LISN-L-171013-060103 LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.198	52.96	-10.75	63.71	42.30	0.20	10.46	QP
2	0.198	32.16	-21.55	53.71	21.50	0.20	10.46	Average
3	0.208	52.85	-10.42	63.27	42.20	0.20	10.45	QP
4	0.208	33.95	-19.32	53.27	23.30	0.20	10.45	Average
5 *	0.212	52.86	-10.28	63.14	42.21	0.20	10.45	QP
6	0.212	31.96	-21.18	53.14	21.31	0.20	10.45	Average
7	0.262	43.55	-17.83	61.38	32.89	0.22	10.44	QP
8	0.262	31.85	-19.53	51.38	21.19	0.22	10.44	Average
9	0.272	48.45	-12.62	61.07	37.80	0.22	10.43	QP
10	0.272	34.25	-16.82	51.07	23.60	0.22	10.43	Average
11	0.288	44.15	-16.44	60.59	33.50	0.22	10.43	QP
12	0.288	26.85	-23.74	50.59	16.20	0.22	10.43	Average
13	0.345	43.85	-15.24	59.09	33.19	0.24	10.42	QP
14	0.345	31.45	-17.64	49.09	20.79	0.24	10.42	Average
15	0.400	41.15	-16.71	57.86	30.49	0.25	10.41	QP
16	0.400	23.55	-24.31	47.86	12.89	0.25	10.41	Average
17	0.476	39.18	-17.23	56.41	28.59	0.26	10.33	QP
18	0.476	29.78	-16.63	46.41	19.19	0.26	10.33	Average
19	9.253	43.28	-16.72	60.00	32.60	0.35	10.33	QP
20	9.253	37.48	-12.52	50.00	26.80	0.35	10.33	Average



Test Mode :	Mode 1	Temperature :	24.4~24.7°C
Test Engineer :	Amos Zhang	Relative Humidity :	33~37%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	Bluetooth Link + WLAN Link(2.4G) + Adaptor 1 with Type C cable 1 + Type C port 2 + USB Link with U-Disk from Type C port 2 + Play H Plane		

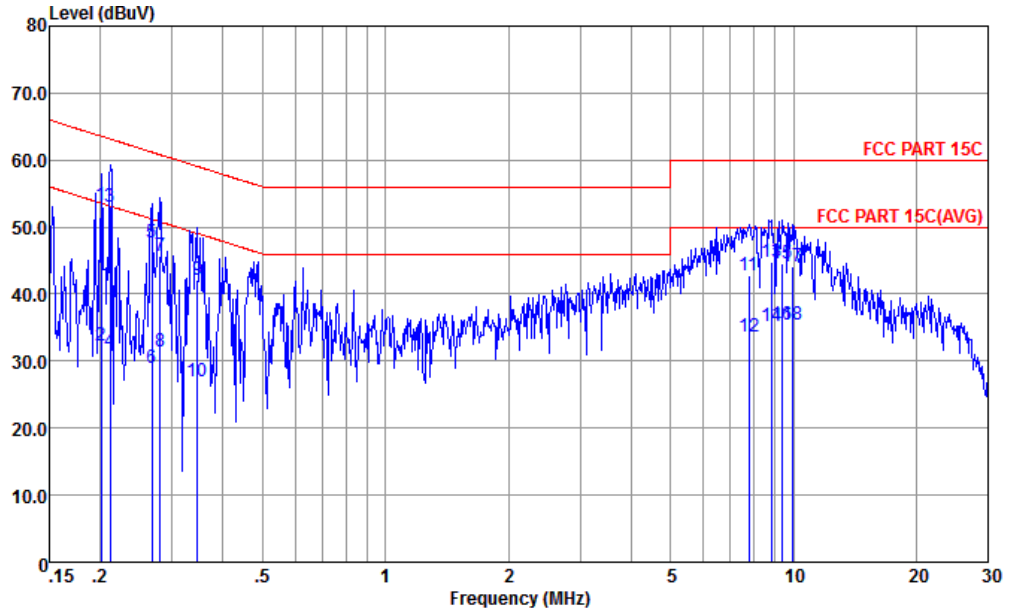

Site : CO01-KS
 Condition : FCC PART 15C LISN-N-171013-060103 NEUTRAL

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.201	53.24	-10.34	63.58	42.51	0.28	10.45	QP
2	0.201	32.34	-21.24	53.58	21.61	0.28	10.45	Average
3 *	0.212	52.93	-10.21	63.14	42.20	0.28	10.45	QP
4	0.212	31.33	-21.81	53.14	20.60	0.28	10.45	Average
5	0.267	47.62	-13.58	61.20	36.90	0.28	10.44	QP
6	0.267	28.92	-22.28	51.20	18.20	0.28	10.44	Average
7	0.280	45.62	-15.19	60.81	34.91	0.28	10.43	QP
8	0.280	31.32	-19.49	50.81	20.61	0.28	10.43	Average
9	0.346	42.20	-16.85	59.05	31.49	0.29	10.42	QP
10	0.346	27.00	-22.05	49.05	16.29	0.29	10.42	Average
11	7.769	42.85	-17.15	60.00	32.21	0.31	10.33	QP
12	7.769	33.55	-16.45	50.00	22.91	0.31	10.33	Average
13	8.822	44.84	-15.16	60.00	34.20	0.31	10.33	QP
14	8.822	35.24	-14.76	50.00	24.60	0.31	10.33	Average
15	9.401	44.54	-15.46	60.00	33.91	0.30	10.33	QP
16	9.401	35.54	-14.46	50.00	24.91	0.30	10.33	Average
17	9.966	44.23	-15.77	60.00	33.60	0.30	10.33	QP
18	9.966	35.43	-14.57	50.00	24.80	0.30	10.33	Average



3.4 Antenna Requirements

3.4.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.4.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.4.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 18, 2018	Mar. 28, 2018	Jan. 17, 2019	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 18, 2018	Mar. 28, 2018	Jan. 17, 2019	Conducted (TH01-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 20, 2017	Mar. 23, 2018	Apr. 19, 2018	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 13, 2017	Mar. 23, 2018	Oct. 12, 2018	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Oct. 13, 2017	Mar. 23, 2018	Oct. 12, 2018	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000 0811	AC 0V~300V, 45Hz~1000Hz	Oct. 12, 2017	Mar. 23, 2018	Oct. 11, 2018	Conduction (CO01-KS)
EMI Test Receiver	Keysight	N9038A	MY564000 04	3Hz~8.5GHz;Max 30dBm	Oct. 19, 2017	Jan. 20, 2018~ Jan. 23, 2018	Oct. 18, 2018	Radiation (03CH03-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY551502 44	10Hz~44GHz	Apr. 18, 2017	Jan. 20, 2018~ Jan. 23, 2018	Apr. 17, 2018	Radiation (03CH03-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 22, 2017	Jan. 20, 2018~ Jan. 23, 2018	Oct. 21, 2018	Radiation (03CH03-KS)
Bilog Antenna	TeseQ	CBL6112D	35406	25MHz~2GHz	Apr. 22, 2017	Jan. 20, 2018~ Jan. 23, 2018	Apr. 21, 2018	Radiation (03CH03-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-135 6	1GHz~18GHz	Apr. 22, 2017	Jan. 20, 2018~ Jan. 23, 2018	Apr. 21, 2018	Radiation (03CH03-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA1702 49	15GHz~40GHz	Feb. 07, 2017	Jan. 20, 2018~ Jan. 23, 2018	Feb. 06, 2018	Radiation (03CH03-KS)
Amplifier	com-power	PA-103A	161069	1MHz ~1000MHz / 32 dB	Apr. 18, 2017	Jan. 20, 2018~ Jan. 23, 2018	Apr. 17, 2018	Radiation (03CH03-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	2025788	1GHz-18GHz	Apr. 18, 2017	Jan. 20, 2018~ Jan. 23, 2018	Apr. 17, 2018	Radiation (03CH03-KS)
Amplifier	Agilent	8449B	3008A023 70	1GHz~26.5GHz	Oct. 12, 2017	Jan. 20, 2018~ Jan. 23, 2018	Oct. 11, 2018	Radiation (03CH03-KS)
Amplifier	MITEQ	TTA1840-35- HG	1887435	18~40GHz	Oct. 12, 2017	Jan. 20, 2018~ Jan. 23, 2018	Oct. 11, 2018	Radiation (03CH03-KS)
AC Power Source	Chroma	61601	F1040900 04	N/A	NCR	Jan. 20, 2018~ Jan. 23, 2018	NCR	Radiation (03CH03-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jan. 20, 2018~ Jan. 23, 2018	NCR	Radiation (03CH03-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jan. 20, 2018~ Jan. 23, 2018	NCR	Radiation (03CH03-KS)

NCR: No Calibration Required



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.3 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.6 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.5 dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.5 dB
---	--------



Appendix A. Radiated Spurious Emission

2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m)

BT	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BT CH00 2402MHz		2311.95	46.31	-27.69	74	41.81	31.16	5.55	32.21	299	53	P	H
		2311.95	21.52	-32.48	54	-	-	-	-	-	-	A	H
	*	2402	102.97	-	-	98.32	31.3	5.65	32.3	299	53	P	H
	*	2402	78.18	-	-	-	-	-	-	-	-	A	H
		2354.33	46.2	-27.8	74	41.6	31.25	5.61	32.26	110	110	P	V
		2354.33	21.41	-32.59	54	-	-	-	-	-	-	A	V
	*	2402	101.08	-	-	96.43	31.3	5.65	32.3	110	110	P	V
	*	2402	76.29	-	-	-	-	-	-	-	-	A	V
BT CH 39 2441MHz		2385.66	45.8	-28.2	74	41.15	31.3	5.65	32.3	286	54	P	H
		2385.66	21.01	-32.99	54	-	-	-	-	-	-	A	H
	*	2442	103.75	-	-	98.99	31.39	5.71	32.34	286	54	P	H
	*	2442	78.96	-	-	-	-	-	-	-	-	A	H
		2486.14	45.8	-28.2	74	40.98	31.44	5.75	32.37	286	54	P	H
		2486.14	21.01	-32.99	54	-	-	-	-	-	-	A	H
		2334.83	45.85	-28.15	74	41.29	31.22	5.59	32.25	105	107	P	V
		2334.83	21.06	-32.94	54	-	-	-	-	-	-	A	V
	*	2442	101.24	-	-	96.48	31.39	5.71	32.34	105	107	P	V
	*	2442	76.45	-	-	-	-	-	-	-	-	A	V
		2484.6	46.16	-27.84	74	41.34	31.44	5.75	32.37	105	107	P	V
		2484.6	21.37	-32.63	54	-	-	-	-	-	-	A	V



BT CH 78 2480MHz	*	2480	100.76	-	-	95.94	31.44	5.75	32.37	312	55	P	H	
	*	2480	75.97	-	-	-	-	-	-	-	-	A	H	
		2483.9	49.22	-24.78	74	44.4	31.44	5.75	32.37	312	55	P	H	
		2483.9	24.43	-29.57	54	-	-	-	-	-	-	A	H	
	*	2480	96.85	-	-	92.03	31.44	5.75	32.37	100	73	P	V	
	*	2480	72.06	-	-	-	-	-	-	-	-	-	A	V
		2483.83	47.57	-26.43	74	42.75	31.44	5.75	32.37	100	73	P	V	
		2483.83	22.78	-31.22	54	-	-	-	-	-	-	-	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



2.4GHz 2400~2483.5MHz

BT (Harmonic @ 3m)

BT	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BT CH 00 2402MHz		4806	43.02	-30.98	74	60.87	35.66	7.84	61.35	100	0	P	H
		4806	43.87	-30.13	74	61.72	35.66	7.84	61.35	100	0	P	V
BT CH 39 2441MHz		4884	42.28	-31.72	74	59.97	35.61	7.9	61.2	100	0	P	H
		7320	40.04	-33.96	74	57.74	35.9	9.51	63.11	100	0	P	H
		4884	40.9	-33.1	74	58.59	35.61	7.9	61.2	100	360	P	V
		7320	40.86	-33.14	74	58.56	35.9	9.51	63.11	100	360	P	V
BT CH 78 2480MHz		4962	42.59	-31.41	74	60.09	35.54	7.97	61.01	100	360	P	H
		7440	40.92	-33.08	74	58.6	35.97	9.57	63.22	100	360	P	H
		4962	43.41	-30.59	74	60.91	35.54	7.97	61.01	100	360	P	V
		7440	40.52	-33.48	74	58.2	35.97	9.57	63.22	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz BT (LF)

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BT LF		45.52	20.94	-19.06	40	34.3	17.33	0.73	31.42	-	-	P	H
		89.17	26.55	-16.95	43.5	39.51	16.76	1.04	30.76	-	-	P	H
		149.31	29.23	-14.27	43.5	41.5	17.31	1.32	30.9	100	269	P	H
		209.45	22.07	-21.43	43.5	35.52	16.12	1.55	31.12	-	-	P	H
		329.73	30.43	-15.57	46	39.4	20.55	1.98	31.5	-	-	P	H
		419.94	28.7	-17.3	46	35.11	22.88	2.25	31.54	-	-	P	H
		45.52	36.32	-3.68	40	49.68	17.33	0.73	31.42	100	261	P	V
		89.17	34.41	-9.09	43.5	47.37	16.76	1.04	30.76	-	-	P	V
		149.31	31.72	-11.78	43.5	43.99	17.31	1.32	30.9	-	-	P	V
		269.59	25.23	-20.77	46	36.19	18.57	1.79	31.32	-	-	P	V
		329.73	27.46	-18.54	46	36.43	20.55	1.98	31.5	-	-	P	V
		660.5	30.9	-15.1	46	32.25	26.41	2.9	30.66	-	-	P	V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against limit line. 												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

- Level(dBμV/m) =
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.