

# FCC RF Test Report


**APPLICANT** : Lenovo (Shanghai) Electronics Technology Co., Ltd.  
**EQUIPMENT** : Portable Tablet Computer  
**BRAND NAME** : lenovo  
**MODEL NAME** : YOGA Tablet 2-1371F  
**FCC ID** : O57YT21371F  
**STANDARD** : FCC Part 15 Subpart E §15.407  
**CLASSIFICATION** : (NII) Unlicensed National Information Infrastructure

The product testing was completed on Oct. 11, 2014. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.



Reviewed by: Joseph Lin / Supervisor



Approved by: Jones Tsai / Manager



**SPORTON INTERNATIONAL (KUNSHAN) INC.**  
**No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. C.**



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION ..... 5**

    1.1 Applicant ..... 5

    1.2 Manufacturer ..... 5

    1.3 Factory ..... 5

    1.4 Feature of Equipment Under Test ..... 5

    1.5 Product Specification of Equipment Under Test ..... 6

    1.6 Modification of EUT ..... 6

    1.7 Testing Location ..... 7

    1.8 Applicable Standards ..... 7

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 8**

    2.1 Carrier Frequency and Channel ..... 8

    2.2 Pre-Scanned RF Power ..... 9

    2.3 Test Mode ..... 11

    2.4 Connection Diagram of Test System ..... 13

    2.5 Support Unit used in test configuration and system ..... 14

    2.6 EUT Operation Test Setup ..... 14

    2.7 Measurement Results Explanation Example ..... 14

**3 TEST RESULT ..... 15**

    3.1 99% Occupied Bandwidth Measurement ..... 15

    3.2 Maximum Conducted Output Power Measurement ..... 21

    3.3 Power Spectral Density Measurement ..... 24

    3.4 Unwanted Emissions Measurement ..... 29

    3.5 AC Conducted Emission Measurement ..... 52

    3.6 Frequency Stability Measurement ..... 56

    3.7 Automatically Discontinue Transmission ..... 58

    3.8 Antenna Requirements ..... 59

**4 LIST OF MEASURING EQUIPMENT ..... 60**

**5 UNCERTAINTY OF EVALUATION ..... 61**

**APPENDIX A. SETUP PHOTOGRAPHS**





### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	2.1049 15.403(i)	99% Bandwidth	-	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤24 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤11 dBm	Pass	-
3.4	15.407(b)	Unwanted Emissions	≤ -17, -27 dBm (depend on band)&15.209(a)	Pass	Under limit 8.04 dB at 389.870 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 8.55 dB at 0.190 MHz
3.6	15.407(g)	Frequency Stability	Within Operation Band	Pass	-
3.7	15.407(c)	Automatically Discontinue Transmission	Discontinue Transmission	Pass	-
3.8	15.203 & 15.407(a)	Antenna Requirement	N/A	Pass	-

# 1 General Description

## 1.1 Applicant

**Lenovo (Shanghai) Electronics Technology Co., Ltd.**

No. 68 Building, 199 Fenju Road, Wai Gao Qiao FTZ, Shanghai, China

## 1.2 Manufacturer

**Lenovo PC HK Limited**

23/F, Lincoln House, Taikoo Place 979 King's Road, Quarry Bay, Hong Kong

## 1.3 Factory

**LENOVO MOBILE COMMUNICATION TECHNOLOGY CO LTD.**

NO.999 QISHAN NORTH 2ND ROAD, INFORMATION & OPTOELECTRONICS PARK, TORCH HIGH TECH, XIAMEN FUJIAN 361009, CHINA

**LENOVO MOBILE COMMUNICATION (WUHAN) CO LTD.**

19 GAOXIN 4TH RD EAST LAKE HIGH-TECH, ZONE WUHAN HUBEI 430205, CHINA

## 1.4 Feature of Equipment Under Test

Product Feature	
Equipment	Portable Tablet Computer
Brand Name	lenovo
Model Name	YOGA Tablet 2-1371F
FCC ID	O57YT21371F
EUT supports Radios application	WLAN2.4GHz 802.11b/g/n HT20/HT40 WLAN5G 802.11a/n HT20/HT40 Bluetooth v3.0+EDR Bluetooth v4.0 LE
HW Version	H001
SW Version	S100
EUT Stage	Production Unit

**Remark:**

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are two types of EUT sample 1 and sample 2, the differences between two samples are only different supplier for Battery/EMMC/Panel/Touch panel/front and back camera.

### 1.5 Product Specification of Equipment Under Test

Product Specification subjective to this standard			
<b>Tx/Rx Channel Frequency Range</b>	5180 MHz ~ 5240 MHz		
<b>Maximum Output Power</b>	802.11a : 14.39 dBm / 0.0275 W 802.11n HT20 : 12.06 dBm / 0.0161 W 802.11n HT40 : 10.27 dBm / 0.0106 W		
<b>99% Occupied Bandwidth</b>	802.11a : 17.10 MHz 802.11n HT20 : 18.00 MHz 802.11n HT40 : 36.80 MHz		
<b>Antenna Type</b>	Chain Port 0 : IFA Antenna with gain 1.10 dBi Chain Port 1 : IFA Antenna with gain 1.10 dBi		
<b>Type of Modulation</b>	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)		
<b>Antenna Function Description</b>		Chain Port 0	Chain Port 1
	802.11 a	V	V
	802.11 n SISO	V	V
	802.11 n MIMO	V	V

### 1.6 Modification of EUT

No modifications are made to the EUT during all test items.

### 1.7 Testing Location

<b>Test Site</b>	SPORTON INTERNATIONAL (KUNSHAN) INC.			
<b>Test Site Location</b>	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. C. TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958			
<b>Test Site No.</b>	<b>Sporton Site No.</b>			<b>FCC Registration No.</b>
	TH01-KS	03CH01-KS	CO01-KS	149928

### 1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v01
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.4-2003

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases were recorded in this report. (X Plane for 11a, 11n20 Ant0+1, 11n40 Ant1; Y Plane for 11n40 Ant0+1)

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.

### 2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5150-5250 MHz Band 1 (U-NII-1)	36	5180	44	5220
	<b>38</b>	<b>5190</b>	<b>46</b>	<b>5230</b>
	40	5200	48	5240

**Note:** The above Frequency and Channel in boldface were 802.11n HT40.





## 2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and data rate associated with the highest power were chosen for full test in the following tables. Final Output Power equals to Measured Output Power adds the duty factor.

5GHz 802.11a Average Power (dBm)										
Data Rate (MHz)	CH	6Mbps	CH	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
Chain Port 0	36	9.34	36	9.21	9.14	9.05	9.08	9.09	9.11	9.06
	44	9.10								
	48	9.00								
Chain Port 1	36	14.39	36	14.25	13.93	13.90	14.04	14.01	13.95	13.95
	44	13.42								
	48	13.45								

5GHz 802.11n HT20 Average Power (dBm)										
Data Rate (MHz)	CH	MCS0	CH	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
Chain Port 0	36	9.20	36	9.16	9.10	9.05	9.05	8.98	8.88	8.85
	44	9.08								
	48	8.99								
Chain Port 1	36	11.96	36	11.95	11.91	11.86	11.90	11.74	11.88	11.81
	44	11.43								
	48	11.54								
Chain Port 0+1(0)	36	8.94	36	8.46	8.42	8.32	8.34	8.45	8.41	8.41
	44	7.80								
	48	8.10								
Chain Port 0+1(1)	36	9.16	36	8.52	8.48	8.50	8.60	8.60	8.42	8.63
	44	8.15								
	48	8.33								
Chain Port 0+1	36	12.06	36	11.50	11.46	11.42	11.48	11.54	11.43	11.53
	44	10.99								
	48	11.23								



5GHz 802.11n HT40 Average Power (dBm)										
Data Rate (MHz)	CH	MCS0	CH	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
Chain Port 0	38	9.30	38	9.21	9.12	8.91	8.84	8.78	8.90	8.75
	46	9.26								
Chain Port 1	38	10.27	38	10.01	9.52	9.44	9.45	9.39	9.23	9.21
	46	9.89								
Chain Port 0+1(0)	38	3.85	38	3.73	3.68	3.74	3.62	3.66	3.71	3.70
	46	3.64								
Chain Port 0+1(1)	38	3.59	38	3.37	3.06	3.18	3.18	3.20	3.25	3.24
	46	3.49								
Chain Port 0+1	38	6.73	38	6.56	6.39	6.48	6.42	6.45	6.50	6.48
	46	6.57								

**Note:** Chain Port 0+1 is a calculated result from sum of the power Chain Port 0+1(0) and Chain Port 0+1(1).

### 2.3 Test Mode

Final results of test modes, data rates and test channels are shown as following table.


Test Cases				
	Test Items	Mode	Data rate	Test Channel
Conducted TCs	99% BW Power Spectral Density	802.11a	6 Mbps	L/M/H
		802.11n HT20	MCS0	L/M/H
		802.11n HT40	MCS0	L/M/H
	20dB Occupied Bandwidth	802.11a	6 Mbps	H
		802.11n HT20	MCS0	H
		802.11n HT40	MCS0	H
	Output Power	802.11a	6 Mbps	L/M/H
		802.11n HT20	MCS0	L/M/H
		802.11n HT40	MCS0	L/M/H
	Frequency Stability	802.11a	6 Mbps	L
Radiated TCs	Radiated Band Edge	802.11a	6 Mbps	L/H
		802.11n HT20	MCS0	L/H
		802.11n HT40	MCS0	L/H
	Radiated Spurious Emission	802.11a	6 Mbps	L/M/H
		802.11n HT20	MCS0	L/M/H
		802.11n HT40	MCS0	L/M/H
AC Conducted Emission	Mode 1 : Bluetooth Link + WLAN (5G) Link + USB Cable 1 (Charging from Adapter) + Battery 1 + Earphone + HDMI Cable for Sample 1  Mode 2 : Bluetooth Link + WLAN (5G) Link + USB Cable 2 (Charging from Adapter) + Battery 2 + Earphone + HDMI Cable for Sample 2			
<b>Remark:</b>  1. The worst case of conducted emission is mode 2; only the test data of it was reported.  2. For Radiated Test Cases, all the test modes were performed with Adapter, Battery 1, Earphone and USB Cable 1 for Sample 1.				




Ch. #		Band I : 5150-5250 MHz		
		802.11a	802.11n HT20	802.11n HT40
L	Low	36	36	38
M	Middle	44	44	-
H	High	48	48	46

## 2.4 Connection Diagram of Test System

### <WLAN Tx Mode>

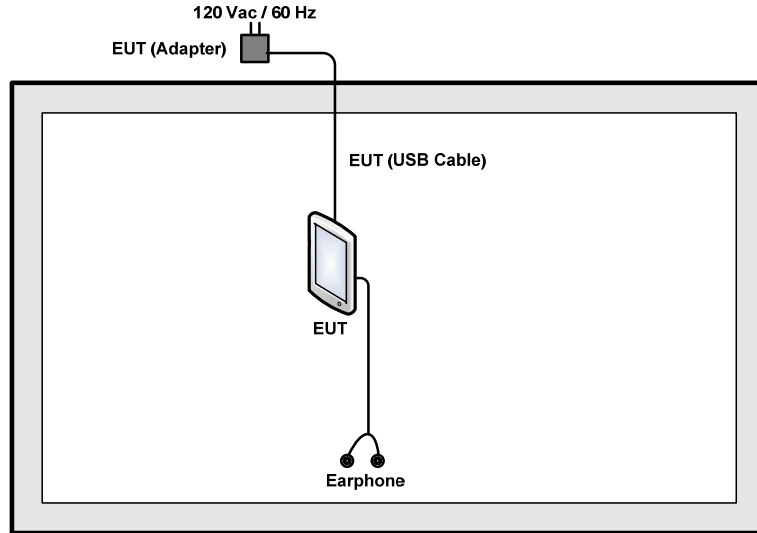

### <AC Conducted Emission Mode>

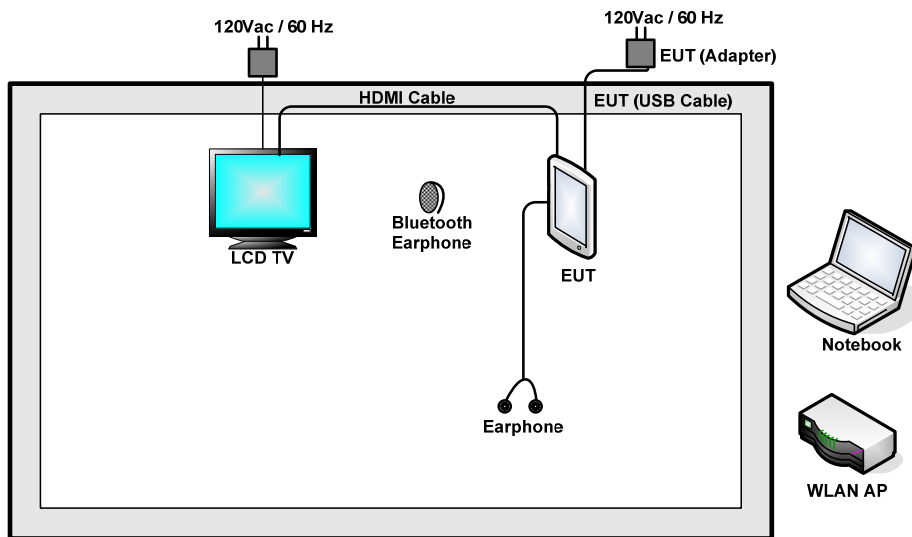

## 2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	D-Link	DIR-855	KA2DIR855A2	N/A	Unshielded, 1.8 m
2.	DC Power Supply	GWINSTEK	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
3.	Notebook	Lenovo	G480	PRC4	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
4.	LCD TV	Lenovo	32A21	N/A	N/A	N/A
5.	Bluetooth Earphone	Lenovo	LBH505	N/A	N/A	N/A
6.	Earphone	Lenovo	SH100	FCC DoC	Unshielded, 1.2m	N/A
7.	HDMI Cable	N/A	N/A	N/A	N/A	N/A

## 2.6 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

## 2.7 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss.

*Offset = RF cable loss.*

Following shows an offset computation example with cable loss 7.1 dB.

*Offset(dB) = RF cable loss(dB) = 7.1 (dB)*

### 3 Test Result

#### 3.1 99% Occupied Bandwidth Measurement

##### 3.1.1 Description of 99% Occupied Bandwidth

This section is for reporting purpose only.

There is no restriction limits for bandwidth.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01.  
Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1MHz and set the Video bandwidth (VBW)  $\geq 3 * RBW$ .
7. Measure and record the results in the test report.

##### 3.1.4 Test Setup

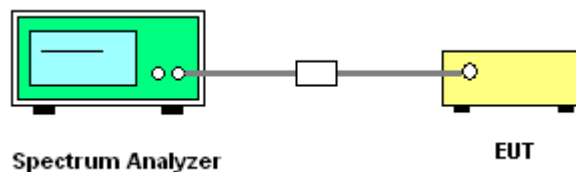




3.1.5 Test Result of 99% Occupied Bandwidth

Test Band :	5GHz band 1	Temperature :	24~25°C
Test Engineer :	Issac Song	Relative Humidity :	49~51%

Mod.	Data Rate	N <sub>TX</sub>	Channel	Freq. (MHz)	99% Bandwidth (MHz)		99% Bandwidth EIRP Limit (dBm)	
					Chain Port 0	Chain Port 1	Chain Port 0	Chain Port 1
11a	6Mbps	1	36	5180	-	17.00	-	22.30
11a	6Mbps	1	44	5220	-	17.05	-	22.32
11a	6Mbps	1	48	5240	-	17.10	-	22.33
HT20	MCS0	1	36	5180	-	17.95	-	22.54
HT20	MCS0	1	44	5220	-	17.90	-	22.53
HT20	MCS0	1	48	5240	-	18.00	-	22.55
HT40	MCS0	1	38	5190	-	36.80	-	23.01
HT40	MCS0	1	46	5230	-	36.70	-	23.01
HT20	MCS0	2	36	5180	17.90	17.90	22.53	
HT20	MCS0	2	44	5220	17.95	17.90	22.53	
HT20	MCS0	2	48	5240	18.00	17.95	22.54	
HT40	MCS0	2	38	5190	36.70	36.80	23.01	
HT40	MCS0	2	46	5230	36.80	36.60	23.01	



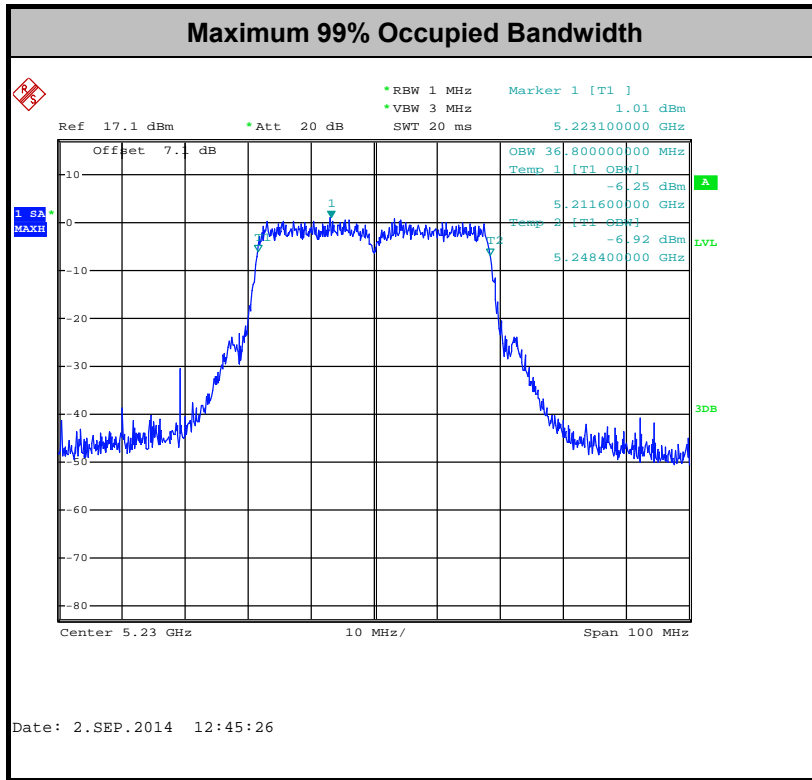



3.1.6 Test Result of 20dB Occupied Bandwidth


Mod.	Data Rate	N <sub>TX</sub>	Channel	Freq. (MHz)	20dB Bandwidth (MHz)		20dB Bandwidth Upper Frequency (FH) (MHz)		Upper Limit Line (MHz)	Pass/Fail
					Chain Port 0	Chain Port 1	Chain Port 0	Chain Port 1		
11a	6Mbps	1	48	5240	-	18.30	-	5249.10	5250	Pass
HT20	MCS0	1	48	5240	-	19.00	-	5249.50		Pass
HT40	MCS0	1	46	5230	-	39.51	-	5249.80		Pass
HT20	MCS0	2	48	5240	19.20	-	5249.55	-		Pass
HT40	MCS0	2	46	5230	40.05	-	5249.98	-		Pass



Number of TX = 1


20dB Occupied Bandwidth

802.11a CH48 5240MHz for Chain 1

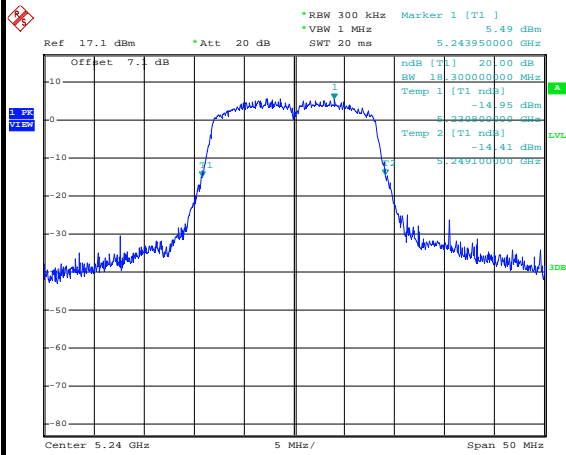


Date: 3.SEP.2014 18:43:05

802.11n HT20 CH48 5240MHz for Chain 1

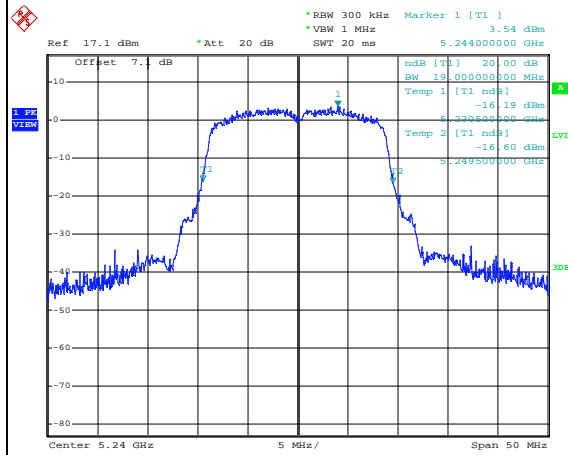

Date: 3.SEP.2014 19:02:15


802.11n HT40 CH46 5230MHz for Chain 1

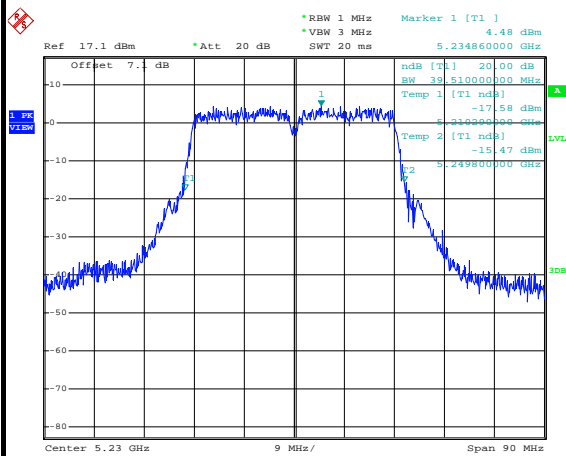

Date: 3.SEP.2014 19:18:50



Number of TX = 2

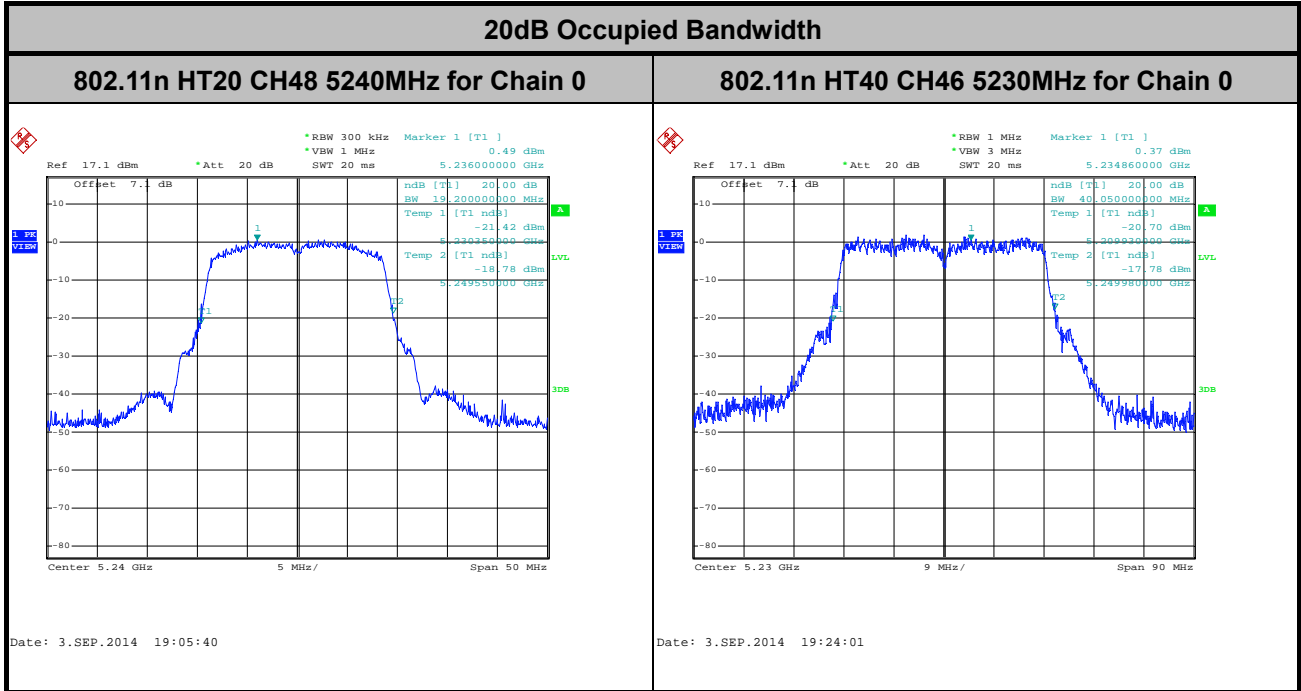



## **3.2 Maximum Conducted Output Power Measurement**

### **3.2.1 Limit of Maximum Conducted Output Power**

**<FCC 14-30 CFR 15.407>**

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

### **3.2.2 Measuring Instruments**

The measuring equipment is listed in the section 4 of this test report.


### 3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor,  $10 \log(1/x)$ , where  $x$  is the duty cycle.

### 3.2.4 Test Setup

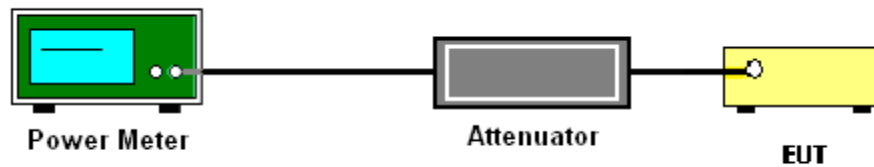



3.2.5 Test Result of Maximum Conducted Output Power

Test Band :	5GHz band 1	Temperature :	24~25°C
Test Engineer :	Issac Song	Relative Humidity :	49~51%

Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Power Limit (dBm)		DG (dBi)		Pass /Fail
					Chain Port 0	Chain Port 1	Chain Port 0	Chain Port 1	Sum Power	Chain Port 0	Chain Port 1	Chain Port 0	Chain Port 1	
11a	6Mbps	1	36	5180	0.20	0.20	9.34	14.39	-	24.00	24.00	1.10	1.10	Pass
11a	6Mbps	1	44	5220	0.20	0.20	9.10	13.42	-	24.00	24.00	1.10	1.10	Pass
11a	6Mbps	1	48	5240	0.20	0.20	9.00	13.45	-	24.00	24.00	1.10	1.10	Pass
HT20	MCS0	1	36	5180	0.22	0.21	9.20	11.96	-	24.00	24.00	1.10	1.10	Pass
HT20	MCS0	1	44	5220	0.22	0.21	9.08	11.43	-	24.00	24.00	1.10	1.10	Pass
HT20	MCS0	1	48	5240	0.22	0.21	8.99	11.54	-	24.00	24.00	1.10	1.10	Pass
HT40	MCS0	1	38	5190	0.22	0.21	9.30	10.27	-	24.00	24.00	1.10	1.10	Pass
HT40	MCS0	1	46	5230	0.22	0.21	9.26	9.89	-	24.00	24.00	1.10	1.10	Pass
HT20	MCS0	2	36	5180	0.38	0.45	8.94	9.16	12.06	24.00	24.00	1.10	1.10	Pass
HT20	MCS0	2	44	5220	0.38	0.45	7.80	8.15	10.99	24.00	24.00	1.10	1.10	Pass
HT20	MCS0	2	48	5240	0.38	0.45	8.10	8.33	11.23	24.00	24.00	1.10	1.10	Pass
HT40	MCS0	2	38	5190	0.42	0.41	3.85	3.59	6.73	24.00	24.00	1.10	1.10	Pass
HT40	MCS0	2	46	5230	0.42	0.41	3.64	3.49	6.57	24.00	24.00	1.10	1.10	Pass

Note:

- Final Output Power equals to Measured Output Power adds the duty factor.
- Sum Power is a calculated result from sum of the Chain Port 0 and Chain Port 1.



### **3.3 Power Spectral Density Measurement**

#### **3.3.1 Limit of Power Spectral Density**

**<FCC 14-30 CFR 15.407>**

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **3.3.2 Measuring Instruments**

The measuring equipment is listed in the section 4 of this test report.





### 3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01.  
Section F) Maximum power spectral density.

#### # Method SA-2 #


(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

1. The testing follows Method SA-2 of FCC KDB 789033 D02 General UNII Test Procedures New Rules v01.
  - Measure the duty cycle.
  - Set span to encompass the entire emission bandwidth (EBW) of the signal.
  - Set RBW = 1 MHz.
  - Set VBW  $\geq$  3 MHz.
  - Number of points in sweep  $\geq$  2 Span / RBW.
  - Sweep time = auto.
  - Detector = RMS
  - Trace average at least 100 traces in power averaging mode.
  - Add  $10 \log(1/x)$ , where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add  $10 \log(1/0.25) = 6$  dB if the duty cycle is 25 percent.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
4. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (1): Measure and sum the spectra across the outputs.

The total final Power Spectral Density is from a device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points, the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.

### 3.3.4 Test Setup

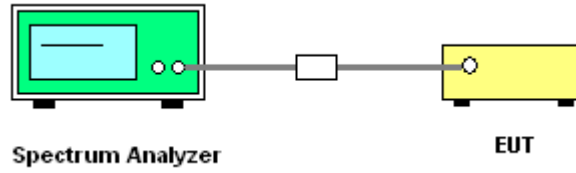




3.3.5 Test Result of Power Spectral Density

Test Band :	5GHz band 1	Temperature :	24~25°C
Test Engineer :	Issac Song	Relative Humidity :	49~51%

Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density (dBm/MHz)			Average PSD Limit (dBm)		DG (dBi)		Pass /Fail
					Chain Port 0	Chain Port 1	Chain Port 0	Chain Port 1	Sum Power	Chain Port 0	Chain Port 1	Chain Port 0	Chain Port 1	
11a	6Mbps	1	36	5180	0.20	0.20	-	2.35	-	11.00	11.00	1.10	1.10	Pass
11a	6Mbps	1	44	5220	0.20	0.20	-	2.49	-	11.00	11.00	1.10	1.10	Pass
11a	6Mbps	1	48	5240	0.20	0.20	-	2.20	-	11.00	11.00	1.10	1.10	Pass
HT20	MCS0	1	36	5180	0.22	0.21	-	0.18	-	11.00	11.00	1.10	1.10	Pass
HT20	MCS0	1	44	5220	0.22	0.21	-	0.35	-	11.00	11.00	1.10	1.10	Pass
HT20	MCS0	1	48	5240	0.22	0.21	-	0.20	-	11.00	11.00	1.10	1.10	Pass
HT40	MCS0	1	38	5190	0.22	0.21	-	-5.19	-	11.00	11.00	1.10	1.10	Pass
HT40	MCS0	1	46	5230	0.22	0.21	-	-5.00	-	11.00	11.00	1.10	1.10	Pass
HT20	MCS0	2	36	5180	0.38	0.45	-	-	-0.37	11.00	11.00	4.11	4.11	Pass
HT20	MCS0	2	44	5220	0.38	0.45	-	-	-0.46	11.00	11.00	4.11	4.11	Pass
HT20	MCS0	2	48	5240	0.38	0.45	-	-	-0.96	11.00	11.00	4.11	4.11	Pass
HT40	MCS0	2	38	5190	0.42	0.41	-	-	-4.64	11.00	11.00	4.11	4.11	Pass
HT40	MCS0	2	46	5230	0.42	0.41	-	-	-5.09	11.00	11.00	4.11	4.11	Pass

Note: Sum PSD is a bin-by-bin combined result of Chain Port 0 and Chain Port 1.

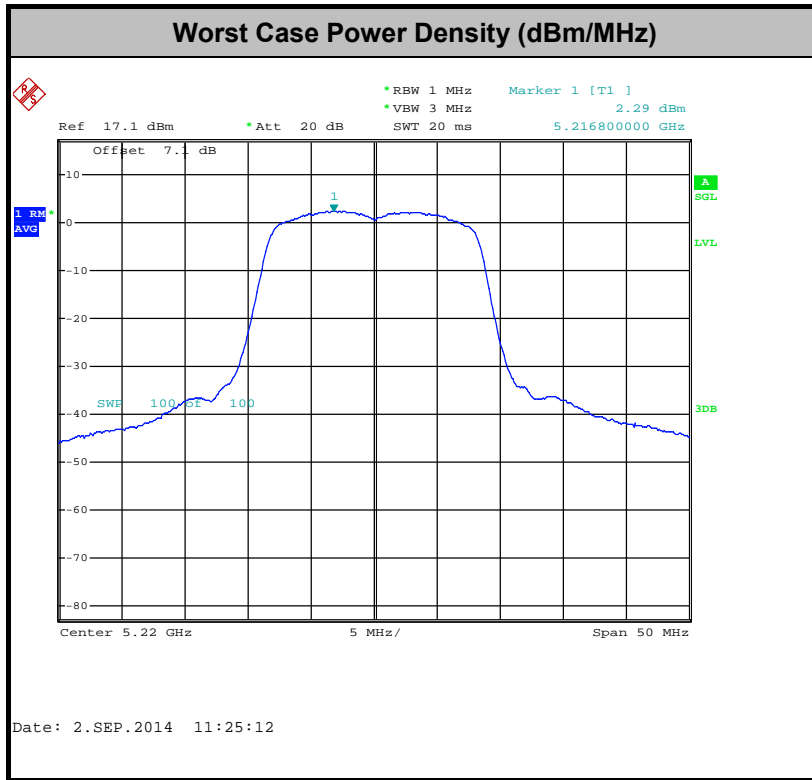

### 3.4 Unwanted Emissions Measurement

This section as specified in FCC Part 15.407(b) is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement. The unwanted emissions shall comply with 15.407(b)(1) to (6), and restricted bands per FCC Part15.205.

#### 3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz.
- (2) Unwanted spurious emissions fallen in restricted bands per FCC Part15.205 shall comply with the general field strength limits set forth in § 15.209 as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

**Note:** The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

EIRP (dBm)	Field Strength at 3m (dBμV/m)
-17	78.3
- 27	68.3

- (3) KDB789033 v01 G)2)c) As specified in 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in 15.407(b)(4)). However, an out-of-band emission that complies with both the average and peak limits of 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz peak emission limit.

#### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

**3.4.3 Test Procedures**

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01. Section G) Unwanted emissions measurement.

(1) Procedure for Unwanted Emissions Measurements Below 1000MHz

- RBW = 120 kHz
- VBW = 300 kHz
- Detector = Peak
- Trace mode = max hold

(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW ≥ 3 MHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold

(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz

- RBW = 1 MHz
- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- $VBW \geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


Antenna	Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
0	802.11a	95.39	2.070	0.483	1kHz
1	802.11a	95.48	2.070	0.483	1kHz
0+1	802.11n HT20	91.67	0.990	1.010	3kHz
1	802.11n HT40	95.17	1.930	0.518	1kHz
0+1	802.11n HT40	91.04	0.996	1.004	3kHz

2. The EUT was placed on a rotatable table top 0.8 meter above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.


6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

### 3.4.4 Test Setup


For radiated emissions below 30MHz

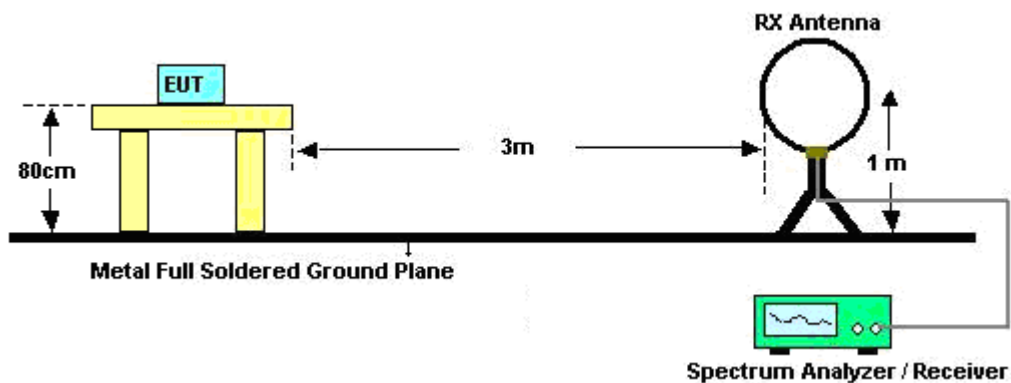

For radiated emissions from 30MHz to 1GHz

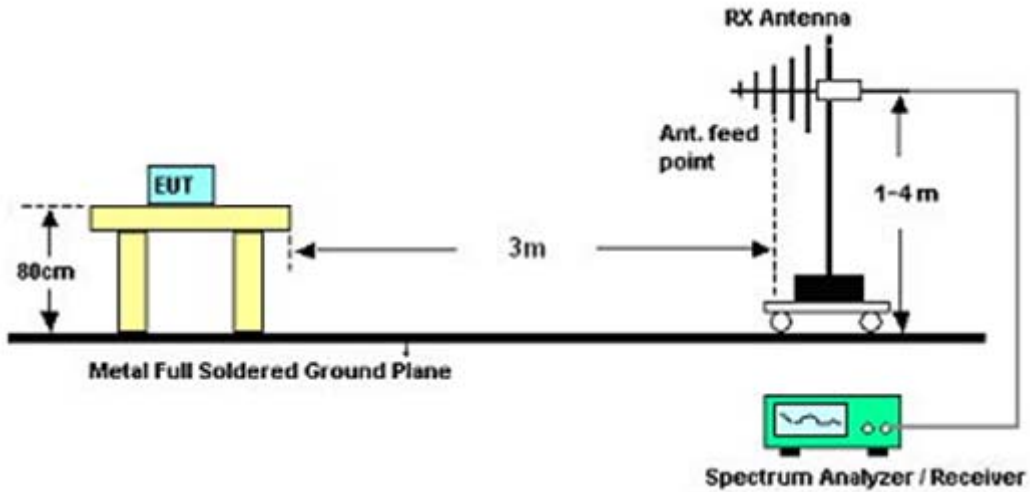

For radiated emissions above 1GHz

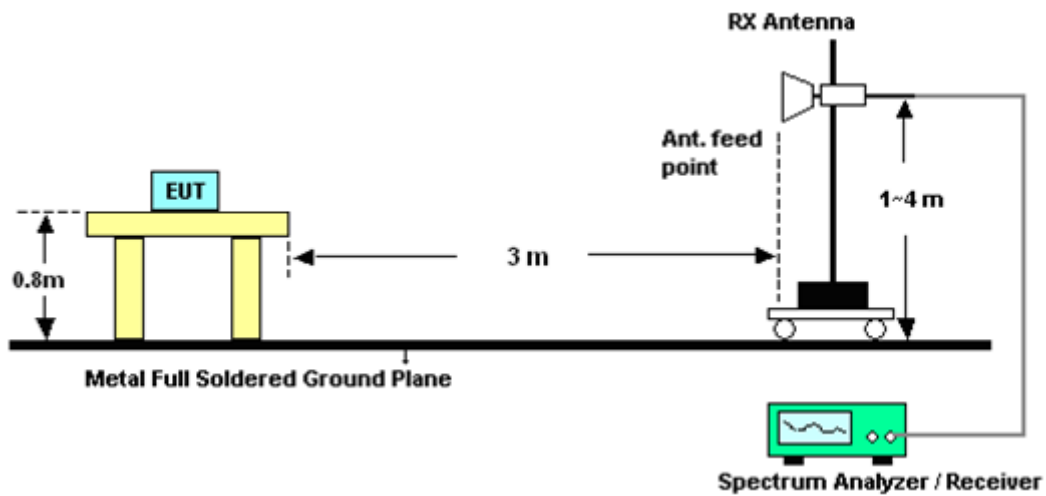

### 3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.





3.4.6 Test Result of Radiated Band Edges

Test Mode :	802.11a – Chain Port 0	Temperature :	22~23°C
Test Channel :	36	Relative Humidity :	42~43%
Test Engineer :	Simon Lu		

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBµV/m )	Over Limit ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5147.85	57.17	-16.83	74	56.81	34.32	3.9	37.86	100	350	Peak
5149.75	40.85	-13.15	54	40.49	34.32	3.9	37.86	100	350	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBµV/m )	Over Limit ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5147.3	53.15	-20.85	74	52.79	34.32	3.9	37.86	187	107	Peak
5124.6	39.05	-14.95	54	38.66	34.31	3.88	37.8	187	107	Average

Test Mode :	802.11a – Chain Port 0	Temperature :	22~23°C
Test Channel :	48	Relative Humidity :	42~43%
Test Engineer :	Simon Lu		

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBµV/m )	Over Limit ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5362.75	52.83	-21.17	74	53.62	34.4	4.01	39.2	100	344	Peak
5378.55	38.45	-15.55	54	39.34	34.4	4.02	39.31	100	344	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBµV/m )	Over Limit ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5354.8	52.57	-21.43	74	53.25	34.4	4	39.08	100	103	Peak
5383.65	38.3	-15.7	54	39.19	34.4	4.02	39.31	100	103	Average



Test Mode :	802.11a – Chain Port 1	Temperature :	22~23°C
Test Channel :	36	Relative Humidity :	42~43%
Test Engineer :	Simon Lu		

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5149.8	53.71	-20.29	74	53.35	34.32	3.9	37.86	100	337	Peak
5100	38.61	-15.39	54	38.14	34.28	3.86	37.67	100	337	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5149.15	51.34	-22.66	74	50.98	34.32	3.9	37.86	115	23	Peak
5104.55	35.75	-18.25	54	35.28	34.28	3.86	37.67	115	23	Average

Test Mode :	802.11a – Chain Port 1	Temperature :	22~23°C
Test Channel :	48	Relative Humidity :	42~43%
Test Engineer :	Simon Lu		

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5359.65	49.96	-24.04	74	50.63	34.4	4.01	39.08	102	190	Peak
5361	36.11	-17.89	54	36.9	34.4	4.01	39.2	102	190	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5379.8	49.08	-24.92	74	49.97	34.4	4.02	39.31	100	18	Peak
5363.1	34.18	-19.82	54	34.97	34.4	4.01	39.2	100	18	Average



Test Mode :	802.11n HT20 – Chain Port 0+1	Temperature :	22~23°C
Test Channel :	36	Relative Humidity :	42~43%
Test Engineer :	Simon Lu		

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5103.4	50.27	-23.73	74	49.8	34.28	3.86	37.67	100	344	Peak
5149.45	37.86	-16.14	54	37.5	34.32	3.9	37.86	100	344	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5134.2	47.82	-26.18	74	47.43	34.31	3.88	37.8	186	103	Peak
5148.7	35.23	-18.77	54	34.87	34.32	3.9	37.86	186	103	Average

Test Mode :	802.11n HT20 – Chain Port 0+1	Temperature :	22~23°C
Test Channel :	48	Relative Humidity :	42~43%
Test Engineer :	Simon Lu		

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5379.15	47.72	-26.28	74	48.61	34.4	4.02	39.31	100	342	Peak
5387.05	34.43	-19.57	54	35.32	34.4	4.02	39.31	100	342	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5364.4	48.5	-25.5	74	49.29	34.4	4.01	39.2	194	195	Peak
5353.9	34.76	-19.24	54	35.44	34.4	4	39.08	194	195	Average



Test Mode :	802.11n HT40 – Chain Port 0+1	Temperature :	22~23°C
Test Channel :	38	Relative Humidity :	42~43%
Test Engineer :	Simon Lu		

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5148	48.2	-25.8	74	47.84	34.32	3.9	37.86	200	339	Peak
5150	34.31	-19.69	54	33.95	34.32	3.9	37.86	200	339	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5150	57.77	-16.23	74	57.41	34.32	3.9	37.86	100	56	Peak
5149.15	36.81	-17.19	54	36.45	34.32	3.9	37.86	100	56	Average

Test Mode :	802.11n HT40 – Chain Port 0+1	Temperature :	22~23°C
Test Channel :	46	Relative Humidity :	42~43%
Test Engineer :	Simon Lu		

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5361	48.29	-25.71	74	49.08	34.4	4.01	39.2	200	242	Peak
5390.65	34.34	-19.66	54	35.23	34.4	4.02	39.31	200	242	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5354.2	47.72	-26.28	74	48.4	34.4	4	39.08	100	64	Peak
5385.9	34.39	-19.61	54	35.28	34.4	4.02	39.31	100	64	Average



Test Mode :	802.11n HT40 – Chain Port 1	Temperature :	22~23°C
Test Channel :	38	Relative Humidity :	42~43%
Test Engineer :	Simon Lu		

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5149.8	56.98	-17.02	74	56.62	34.32	3.9	37.86	100	342	Peak
5150	38.77	-15.23	54	38.41	34.32	3.9	37.86	100	342	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5148.4	52.9	-21.1	74	52.54	34.32	3.9	37.86	117	16	Peak
5149.95	37.59	-16.41	54	37.23	34.32	3.9	37.86	117	16	Average

Test Mode :	802.11n HT40 – Chain Port 1	Temperature :	22~23°C
Test Channel :	46	Relative Humidity :	42~43%
Test Engineer :	Simon Lu		

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5352.95	48.25	-25.75	74	48.93	34.4	4	39.08	109	333	Peak
5350.7	34.53	-19.47	54	35.21	34.4	4	39.08	109	333	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5376.85	47.78	-26.22	74	48.56	34.4	4.02	39.2	200	179	Peak
5350.85	34.63	-19.37	54	35.31	34.4	4	39.08	200	179	Average

3.4.7 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic)

<b>Test Mode :</b>	802.11a – Chain Port 0	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	36	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 5180 MHz is fundamental signal which can be ignored. 2. 10360 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5180	102.13	-	-	101.86	34.35	3.92	38	100	350	Peak
5180	90.03	-	-	89.76	34.35	3.92	38	100	350	Average
10360	32.6	-41.4	74	62.06	1.46	5.85	36.77	124	302	Peak

<b>Test Mode :</b>	802.11a – Chain Port 0	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	36	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 5180 MHz is fundamental signal which can be ignored. 2. 10360 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5180	93.57	-	-	93.3	34.35	3.92	38	187	107	Peak
5180	82.01	-	-	81.74	34.35	3.92	38	187	107	Average
10360	32.49	-41.51	74	61.95	1.46	5.85	36.77	148	98	Peak



<b>Test Mode :</b>	802.11a – Chain Port 0	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	44	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 5220 MHz is fundamental signal which can be ignored. 2. 10440 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5220	103.15	-	-	103.01	34.37	3.95	38.18	100	350	Peak
5220	91.88	-	-	91.74	34.37	3.95	38.18	100	350	Average
10440	29.82	-44.18	74	59.22	1.53	5.89	36.82	102	314	Peak

<b>Test Mode :</b>	802.11a – Chain Port 0	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	44	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 5220 MHz is fundamental signal which can be ignored. 2. 10440 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5220	94.78	-	-	94.64	34.37	3.95	38.18	200	67	Peak
5220	81.59	-	-	81.45	34.37	3.95	38.18	200	67	Average
10440	29.22	-44.78	74	58.62	1.53	5.89	36.82	148	325	Peak



<b>Test Mode :</b>	802.11a – Chain Port 0	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	48	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 5240 MHz is fundamental signal which can be ignored. 2. 10479 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5240	103.14	-	-	103.09	34.39	3.95	38.29	100	344	Peak
5240	91.75	-	-	91.7	34.39	3.95	38.29	100	344	Average
10479	28.83	-45.17	74	58.26	1.56	5.92	36.91	148	248	Peak

<b>Test Mode :</b>	802.11a – Chain Port 0	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	48	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 5240 MHz is fundamental signal which can be ignored. 2. 10479 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5240	93.13	-	-	93.08	34.39	3.95	38.29	100	103	Peak
5240	78.68	-	-	78.63	34.39	3.95	38.29	100	103	Average
10479	27.58	-46.42	74	57.01	1.56	5.92	36.91	125	106	Peak





<b>Test Mode :</b>	802.11a – Chain Port 1	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	36	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Star Wei	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 5180 MHz is fundamental signal which can be ignored. 2. 10359 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5180	95.33	-	-	95.06	34.35	3.92	38	100	337	Peak
5180	83.55	-	-	83.28	34.35	3.92	38	100	337	Average
10359	27.85	-46.15	74	57.31	1.46	5.85	36.77	102	305	Peak

<b>Test Mode :</b>	802.11a – Chain Port 1	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	36	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 5180 MHz is fundamental signal which can be ignored. 2. 10359 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5180	93.45	-	-	93.18	34.35	3.92	38	115	23	Peak
5180	81.62	-	-	81.35	34.35	3.92	38	115	23	Average
10359	26.16	-47.84	74	55.62	1.46	5.85	36.77	115	249	Peak



<b>Test Mode :</b>	802.11a – Chain Port 1	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	44	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 5220 MHz is fundamental signal which can be ignored. 2. 10440 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5220	93.51	-	-	93.37	34.37	3.95	38.18	100	335	Peak
5220	81.76	-	-	81.62	34.37	3.95	38.18	100	335	Average
10440	24.17	-49.83	74	53.57	1.53	5.89	36.82	118	105	Peak

<b>Test Mode :</b>	802.11a – Chain Port 1	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	44	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 5220 MHz is fundamental signal which can be ignored. 2. 10440 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5220	92.06	-	-	91.92	34.37	3.95	38.18	130	23	Peak
5220	80.08	-	-	79.94	34.37	3.95	38.18	130	23	Average
10440	24.23	-49.77	74	53.63	1.53	5.89	36.82	200	149	Peak



<b>Test Mode :</b>	802.11a – Chain Port 1	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	48	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 5240 MHz is fundamental signal which can be ignored. 2. 10480 MHz is not within a restricted band and satisfies both the average and peak limits of 15.209.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5240	94.39	-	-	94.34	34.39	3.95	38.29	102	190	Peak
5240	82.73	-	-	82.68	34.39	3.95	38.29	102	190	Average
10480	24.58	-49.42	74	54.01	1.56	5.92	36.91	125	235	Peak

<b>Test Mode :</b>	802.11a – Chain Port 1	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	48	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 5240 MHz is fundamental signal which can be ignored. 2. 10480 MHz is not within a restricted band and satisfies both the average and peak limits of 15.209.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5240	92.07	-	-	92.02	34.39	3.95	38.29	100	18	Peak
5240	80.05	-	-	80	34.39	3.95	38.29	100	18	Average
10480	23.62	-50.38	74	53.05	1.56	5.92	36.91	195	203	Peak



<b>Test Mode :</b>	802.11n HT20 – Chain Port 0+1	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	36	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 5180 MHz is fundamental signal which can be ignored. 2. 10360 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5180	100.95	-	-	100.68	34.35	3.92	38	100	344	Peak
5180	88.96	-	-	88.69	34.35	3.92	38	100	344	Average
10360	26.2	-47.8	74	55.66	1.46	5.85	36.77	108	326	Peak

<b>Test Mode :</b>	802.11n HT20 – Chain Port 0+1	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	36	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 5180 MHz is fundamental signal which can be ignored. 2. 10360 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5180	91.46	-	-	91.19	34.35	3.92	38	186	103	Peak
5180	79.7	-	-	79.43	34.35	3.92	38	186	103	Average
10360	25.37	-48.63	74	54.83	1.46	5.85	36.77	200	140	Peak



<b>Test Mode :</b>	802.11n HT20 – Chain Port 0+1	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	44	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 5220 MHz is fundamental signal which can be ignored. 2. 10440 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
84.32	22.04	-17.96	40	46.33	7.75	0.6	32.64	-	-	Peak
164.83	30.39	-13.11	43.5	52.7	9.39	0.83	32.53	-	-	Peak
216.24	30.38	-15.62	46	53.78	8.34	0.75	32.49	-	-	Peak
252.13	33.45	-12.55	46	52.86	12.2	0.84	32.45	-	-	Peak
389.87	37.96	-8.04	46	53.95	15.35	0.96	32.3	187	305	Peak
660.5	28.16	-17.84	46	39.85	19.03	1.27	31.99	-	-	Peak
5004	58.12	-15.88	74	57.46	34.21	3.79	37.34	100	316	Peak
5004	42.46	-11.54	54	41.8	34.21	3.79	37.34	100	316	Average
5220	100.93	-	-	100.79	34.37	3.95	38.18	100	342	Peak
5220	89.57	-	-	89.43	34.37	3.95	38.18	100	342	Average
10440	24.15	-49.85	74	53.55	1.53	5.89	36.82	104	163	Peak



<b>Test Mode :</b>	802.11n HT20 – Chain Port 0+1	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	44	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 5220 MHz is fundamental signal which can be ignored. 2. 10440 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
41.64	22.02	-17.98	40	43.13	11.2	0.31	32.62	-	-	Peak
48.43	23.22	-16.78	40	47.19	8.35	0.31	32.63	-	-	Peak
54.25	26.85	-13.15	40	52.74	6.4	0.31	32.6	200	104	Peak
204.6	24.18	-19.32	43.5	46.91	9	0.75	32.48	-	-	Peak
400.54	22.06	-23.94	46	37.3	16.04	0.99	32.27	-	-	Peak
660.5	29.3	-16.7	46	40.99	19.03	1.27	31.99	-	-	Peak
5220	88.84	-	-	88.7	34.37	3.95	38.18	100	15	Peak
5220	69.65	-	-	69.51	34.37	3.95	38.18	100	15	Average
10440	24.2	-49.8	74	53.6	1.53	5.89	36.82	186	329	Peak



<b>Test Mode :</b>	802.11n HT20 – Chain Port 0+1	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	48	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 5240 MHz is fundamental signal which can be ignored. 2. 10480 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5018	55.53	-18.47	74	54.86	34.21	3.8	37.34	100	317	Peak
5018	41.42	-12.58	54	40.75	34.21	3.8	37.34	100	317	Average
5240	101.41	-	-	101.36	34.39	3.95	38.29	100	342	Peak
5240	89.71	-	-	89.66	34.39	3.95	38.29	100	342	Average
5452	55.2	-18.8	74	55.94	34.4	4.01	39.15	100	304	Peak
5452	40.18	-13.82	54	40.92	34.4	4.01	39.15	100	304	Average
10480	22.94	-51.06	74	52.37	1.56	5.92	36.91	124	301	Peak

<b>Test Mode :</b>	802.11n HT20 – Chain Port 0+1	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	48	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 5240 MHz is fundamental signal which can be ignored. 2. 10480 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5240	94.55	-	-	94.5	34.39	3.95	38.29	194	195	Peak
5240	83.14	-	-	83.09	34.39	3.95	38.29	194	195	Average
10480	23	-51	74	52.43	1.56	5.92	36.91	146	329	Peak



<b>Test Mode :</b>	802.11n HT40 – Chain Port 0+1	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	38	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 5190 MHz is fundamental signal which can be ignored. 2. 10380 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5190	85.28	-	-	85.01	34.35	3.92	38	200	339	Peak
5190	73.87	-	-	73.6	34.35	3.92	38	200	339	Average
10380	25.87	-48.13	74	55.3	1.48	5.86	36.77	115	325	Peak

<b>Test Mode :</b>	802.11n HT40 – Chain Port 0+1	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	38	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 5190 MHz is fundamental signal which can be ignored. 2. 10380 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5190	95.09	-	-	94.82	34.35	3.92	38	100	56	Peak
5190	83.4	-	-	83.13	34.35	3.92	38	100	56	Average
10380	25.97	-48.03	74	55.4	1.48	5.86	36.77	148	259	Peak





<b>Test Mode :</b>	802.11n HT40 – Chain Port 0+1	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	46	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 5230 MHz is fundamental signal which can be ignored. 2. 10461 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5230	87.43	-	-	87.38	34.39	3.95	38.29	200	242	Peak
5230	75.92	-	-	75.87	34.39	3.95	38.29	200	242	Average
10461	23.24	-50.76	74	52.65	1.54	5.9	36.85	125	198	Peak

<b>Test Mode :</b>	802.11n HT40 – Chain Port 0+1	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	46	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 5230 MHz is fundamental signal which can be ignored. 2. 10461 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5230	94.8	-	-	94.75	34.39	3.95	38.29	100	64	Peak
5230	83.08	-	-	83.03	34.39	3.95	38.29	100	64	Average
10461	25.11	-48.89	74	54.52	1.54	5.9	36.85	100	0	Peak



<b>Test Mode :</b>	802.11n HT40 – Chain Port 1	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	38	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 5190 MHz is fundamental signal which can be ignored. 2. 10461 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5190	92.45	-	-	92.18	34.35	3.92	38	100	337	Peak
5190	79.87	-	-	79.6	34.35	3.92	38	100	337	Average
10461	25.91	-48.09	74	55.34	1.48	5.86	36.77	108	214	Peak

<b>Test Mode :</b>	802.11n HT40 – Chain Port 1	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	38	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 5190 MHz is fundamental signal which can be ignored. 2. 10380 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5190	88.34	-	-	88.07	34.35	3.92	38	116	18	Peak
5190	75.54	-	-	75.27	34.35	3.92	38	116	18	Average
10380	26.04	-47.96	74	55.47	1.48	5.86	36.77	162	59	Peak



<b>Test Mode :</b>	802.11n HT40 – Chain Port 1	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	46	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 5230 MHz is fundamental signal which can be ignored. 2. 10461 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5230	90.59	-	-	90.54	34.39	3.95	38.29	109	333	Peak
5230	78.64	-	-	78.59	34.39	3.95	38.29	109	333	Average
10461	23.3	-50.7	74	52.71	1.54	5.9	36.85	109	324	Peak

<b>Test Mode :</b>	802.11n HT40 – Chain Port 1	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	46	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 5230 MHz is fundamental signal which can be ignored. 2. 10461 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5230	88.79	-	-	88.74	34.39	3.95	38.29	200	179	Peak
5230	76.79	-	-	76.74	34.39	3.95	38.29	200	179	Average
10461	25.18	-48.82	74	54.59	1.54	5.9	36.85	105	39	Peak

### 3.5 AC Conducted Emission Measurement

#### 3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.


### 3.5.4 Test Setup

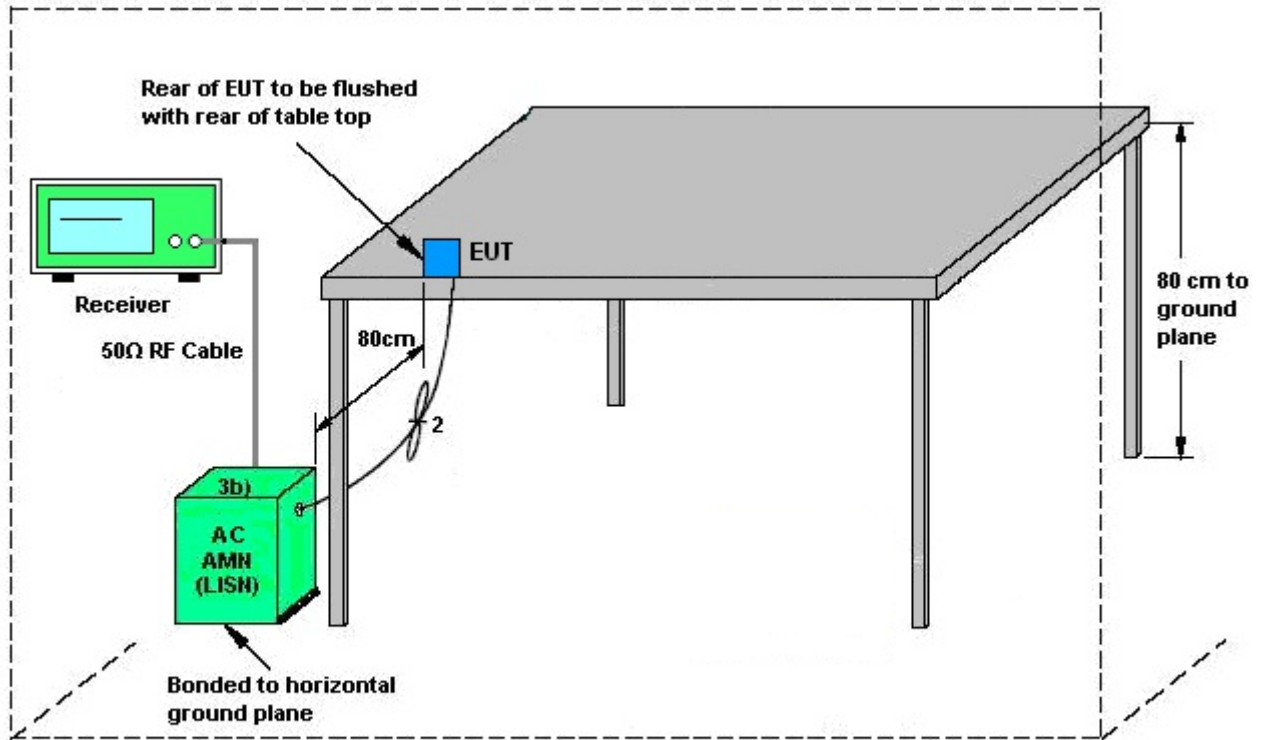

AMN = Artificial mains network (LISH)  
 AE = Associated equipment  
 EUT = Equipment under test  
 ISN = Impedance stabilization network

3.5.5 Test Result of AC Conducted Emission

Test Mode :	Mode 2	Temperature :	23~25°C
Test Engineer :	Eligah Wang	Relative Humidity :	42~44%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	Bluetooth Link + WLAN (5G) Link + USB Cable 2 (Charging from Adapter) + Battery 2 + Earphone + HDMI Cable for Sample 2		

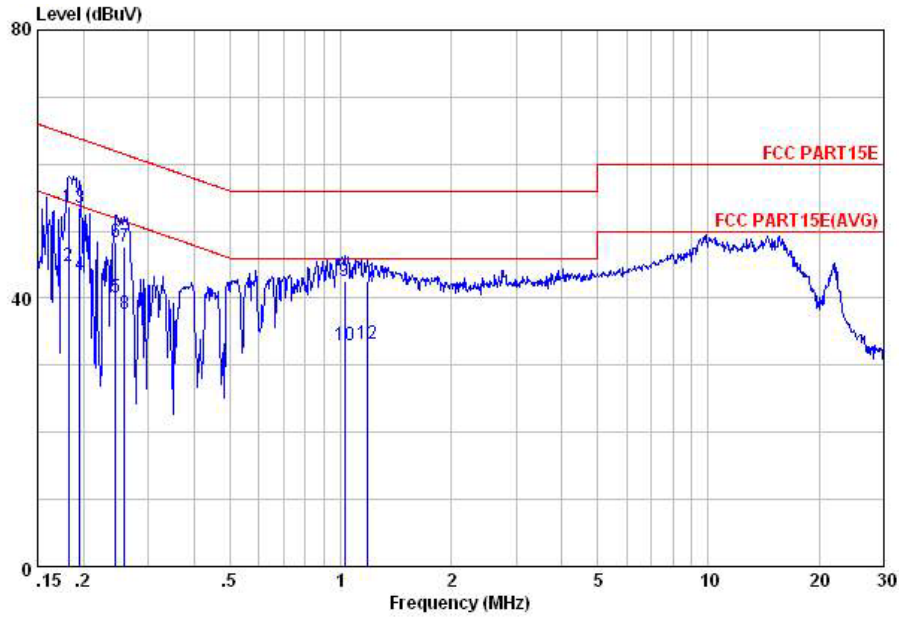


Site : C001-KS  
 Condition: FCC PART15E LISN-L20130306 LINE

mode : Mode 2

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.18	53.66	-10.71	64.37	41.80	1.25	10.61	QP
2	0.18	44.76	-9.61	54.37	32.90	1.25	10.61	Average
3	0.20	53.54	-10.26	63.80	41.90	1.05	10.59	QP
4	0.20	43.44	-10.36	53.80	31.80	1.05	10.59	Average
5	0.24	40.01	-11.94	51.95	28.61	0.89	10.51	Average
6	0.24	48.31	-13.64	61.95	36.91	0.89	10.51	QP
7	0.26	47.64	-13.83	61.47	36.30	0.85	10.49	QP
8	0.26	37.64	-13.83	51.47	26.30	0.85	10.49	Average
9	1.03	42.58	-13.42	56.00	32.30	0.10	10.18	QP
10	1.03	32.88	-13.12	46.00	22.60	0.10	10.18	Average
11	1.18	42.58	-13.42	56.00	32.30	0.10	10.18	QP
12	1.18	33.18	-12.82	46.00	22.90	0.10	10.18	Average



Test Mode :	Mode 2	Temperature :	23~25°C
Test Engineer :	Eligah Wang	Relative Humidity :	42~44%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	Bluetooth Link + WLAN (5G) Link + USB Cable 2 (Charging from Adapter) + Battery 2 + Earphone + HDMI Cable for Sample 2		

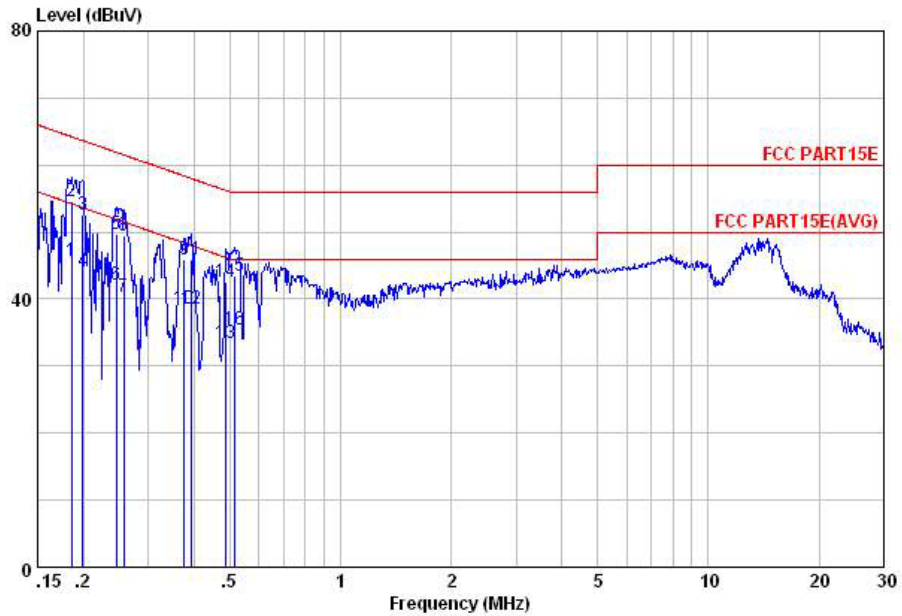

Site : C001-KS  
 Condition: FCC PART15E LISN-N20130306 NEUTRAL

mode : Mode 2

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.19	45.69	-8.55	54.24	33.89	1.19	10.61	Average
2	0.19	54.69	-9.55	64.24	42.89	1.19	10.61	QP
3	0.20	52.49	-11.18	63.67	40.90	1.01	10.58	QP
4	0.20	44.19	-9.48	53.67	32.60	1.01	10.58	Average
5	0.25	49.71	-12.20	61.91	38.30	0.90	10.51	QP
6	0.25	42.21	-9.70	51.91	30.80	0.90	10.51	Average
7	0.26	40.26	-11.25	51.51	28.90	0.87	10.49	Average
8	0.26	49.46	-12.05	61.51	38.10	0.87	10.49	QP
9	0.38	45.84	-12.55	58.39	35.09	0.45	10.30	QP
10	0.38	38.64	-9.75	48.39	27.89	0.45	10.30	Average
11	0.39	45.80	-12.19	57.99	35.11	0.41	10.28	QP
12	0.39	38.60	-9.39	47.99	27.91	0.41	10.28	Average
13	0.49	33.47	-12.72	46.19	22.89	0.31	10.27	Average
14	0.49	42.47	-13.72	56.19	31.89	0.31	10.27	QP
15	0.51	43.46	-12.54	56.00	32.91	0.29	10.26	QP
16	0.51	35.46	-10.54	46.00	24.91	0.29	10.26	Average

## 3.6 Frequency Stability Measurement

### 3.6.1 Limit of Frequency Stability

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.


### 3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.6.3 Test Procedures

1. To ensure emission at the band edge is maintained within the authorized band, those values shall be measured by radiation emissions at upper and lower frequency points, and finally compensated by frequency deviation as procedures below.
2. The EUT was operated at the maximum output power, and connected to the spectrum analyzer, which is set to maximum hold function and peak detector. The peak value of the power envelope was measured and noted. The upper and lower frequency points were respectively measured relatively 10dB lower than the measured peak value.
3. The frequency deviation was calculated by adding the upper frequency point and the lower frequency point divided by two. Those detailed values of frequency deviation are provided in table below.

### 3.6.4 Test Setup

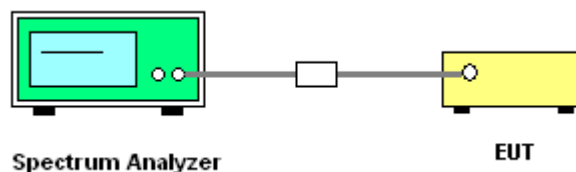





3.6.5 Test Result of Frequency Stability

Test Band :	5GHz band 1	Test Engineer :	Issac Song
-------------	-------------	-----------------	------------

Mod.	Data Rate	NTX	Channel	Freq. (MHz)	Center Frequency (MHz)	Frequency Deviation (MHz)	Frequency Stability (ppm)	Temperature (°C)	Voltage (V)
11a	6Mbps	1	36	5180	5180.050	0.050	9.65	20	3.6
11a	6Mbps	1	36	5180	5180.000	0.000	0.00	20	4.35
11a	6Mbps	1	36	5180	5180.000	0.000	0.00	20	3.75
11a	6Mbps	1	36	5180	5180.000	0.000	0.00	-30	3.75
11a	6Mbps	1	36	5180	5180.050	0.050	9.65	50	3.75

Note:

1. Center Frequency = (Low Frequency + High Frequency) / 2.
2. The frequency band 5180-5240MHz which was verified by testing against other standard is less than 20 ppm which is sufficient to maintain the signal within the 5150-5250MHz band.



## **3.7 Automatically Discontinue Transmission**

### **3.7.1 Limit of Automatically Discontinue Transmission**

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

### **3.7.2 Measuring Instruments**

The measuring equipment is listed in the section 4 of this test report.

### **3.7.3 Test Result of Automatically Discontinue Transmission**

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

### 3.8 Antenna Requirements

#### 3.8.1 Standard Applicable

According to FCC 47 CFR Section 15.407(a)(1)(2) ,if transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 3.8.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

#### 3.8.3 Antenna Gain

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

Directional gain =  $G_{ANT} + \text{Array Gain}$ , where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain =  $10 \log(N_{ANT}/N_{SS}=1)$  dB.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for  $N_{ANT} \leq 4$ .

The EUT supports CDD mode.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain “DG” is calculated as following table.

	Chain Port 0 (dBi)	Chain Port 1 (dBi)	DG for Power (dBi)	DG for PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
<b>Band I</b>	1.10	1.10	1.10	4.11	0.00	0.00

*Power limit reduction = Composite gain – 6dBi, ( min = 0 )*

*PSD limit reduction = Composite gain + PSD Array gain – 6dBi, ( min = 0 )*



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Dec. 28, 2013	Sep. 02, 2014~ Sep. 03, 2014	Dec. 27, 2014	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	30MHz~40GHz	Feb. 27, 2014	Sep. 02, 2014~ Sep. 03, 2014	Feb. 26, 2015	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Feb. 27, 2014	Sep. 02, 2014~ Sep. 03, 2014	Feb. 26, 2015	Conducted (TH01-KS)
Thermal Chamber	Ten Billion	TTC-B3S	TBN-9605 02	-40~+150°C	Dec. 10, 2013	Sep. 02, 2014~ Sep. 03, 2014	Dec. 09, 2014	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESCI	100534	9kHz~3GHz	Nov. 05, 2013	Oct. 11, 2014	Nov. 04, 2014	Radiation (03CH01-KS)
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Dec. 28, 2013	Oct. 11, 2014	Dec. 27, 2014	Radiation (03CH01-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 08, 2014	Oct. 11, 2014	Oct. 07, 2015	Radiation (03CH01-KS)
Bilog Antenna	SCHAFFNER	CBL6112D	23182	25MHz~2GHz	Jan. 08, 2014	Oct. 11, 2014	Jan. 07, 2015	Radiation (03CH01-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75959	1GHz~18GHz	Jan. 08, 2014	Oct. 11, 2014	Jan. 07, 2015	Radiation (03CH01-KS)
Active Horn Antenna	com-power	AHA-118	701030	1GHz~18GHz	Nov. 18, 2013	Oct. 11, 2014	Nov. 17, 2014	Radiation (03CH01-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA1702 49	15GHz~40GHz	Mar. 10, 2014	Oct. 11, 2014	Mar. 09, 2015	Radiation (03CH01-KS)
Amplifier	com-power	PA-103A	161073	1MHz~1GHz	May 04, 2014	Oct. 11, 2014	May 03, 2015	Radiation (03CH01-KS)
Amplifier	Agilent	8449B	3008A023 71	1GHz~26.5GHz	Dec. 10, 2013	Oct. 11, 2014	Dec. 09, 2014	Radiation (03CH01-KS)
AC Power Source	Chroma	61601	F1040900 04	N/A	NCR	Oct. 11, 2014	NCR	Radiation (03CH01-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Oct. 11, 2014	NCR	Radiation (03CH01-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Oct. 11, 2014	NCR	Radiation (03CH01-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	May 04, 2014	Aug. 18, 2014	May 03, 2015	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Dec. 10, 2013	Aug. 18, 2014	Dec. 09, 2014	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Dec. 10, 2013	Aug. 18, 2014	Dec. 09, 2014	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000 0811	AC 0V~300V, 45Hz~1000Hz	Nov. 12, 2013	Aug. 18, 2014	Nov. 11, 2014	Conduction (CO01-KS)



## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.3
---	-----

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.5
---	-----