

FCC RF Test Report


APPLICANT : Lenovo (Shanghai) Electronics Technology Co., Ltd.
EQUIPMENT : Portable Tablet Computer
BRAND NAME : lenovo
MODEL NAME : YOGA Tablet 2-830L
FCC ID : O57YT2830L
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure

The product was received on Jun. 20, 2014 and testing was completed on Jul. 30, 2014. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.



Reviewed by: Joseph Lin / Supervisor



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL (KUNSHAN) INC.
No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. C.



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant 5

 1.2 Manufacturer 5

 1.3 Factory 5

 1.4 Feature of Equipment Under Test 5

 1.5 Product Specification of Equipment Under Test 6

 1.6 Modification of EUT 6

 1.7 Testing Location 7

 1.8 Applicable Standards 7

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 8

 2.1 Carrier Frequency and Channel 9

 2.2 Pre-Scanned RF Power 10

 2.3 Test Mode 12

 2.4 Connection Diagram of Test System 14

 2.5 Support Unit used in test configuration and system 15

 2.6 EUT Operation Test Setup 15

 2.7 Measurement Results Explanation Example 15

3 TEST RESULT 16

 3.1 99% Occupied Bandwidth Measurement 16

 3.2 Maximum Conducted Output Power Measurement 22

 3.3 Power Spectral Density Measurement 25

 3.4 Unwanted Emissions Measurement 30

 3.5 AC Conducted Emission Measurement 52

 3.6 Frequency Stability Measurement 56

 3.7 Automatically Discontinue Transmission 58

 3.8 Antenna Requirements 59

4 LIST OF MEASURING EQUIPMENT 61

5 UNCERTAINTY OF EVALUATION 62

APPENDIX A. SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	2.1049 15.403(i)	99% Bandwidth	-	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 17, 24, 30 dBm (depend on band)	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 4, 11, 17 dBm (depend on band)	Pass	-
3.4	15.407(b)	Unwanted Emissions	≤ -17, -27 dBm (depend on band)&15.209(a)	Pass	Under limit 7.15 dB at 5138.000 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 9.66 dB at 0.610 MHz
3.6	15.407(g)	Frequency Stability	Within Operation Band	Pass	-
3.7	15.407(c)	Automatically Discontinue Transmission	Discontinue Transmission	Pass	-
3.8	15.203 & 15.407(a)	Antenna Requirement	N/A	Pass	-

1 General Description

1.1 Applicant

Lenovo (Shanghai) Electronics Technology Co., Ltd.
 No. 68 Building, 199 Fenju Road, Wai Gao Qiao FTZ, Shanghai, China

1.2 Manufacturer

Lenovo PC HK Limited
 23/F, Lincoln House, Taikoo Place 979 King's Road, Quarry Bay, Hong Kong

1.3 Factory

LENOVO MOBILE COMMUNICATION TECHNOLOGY CO LTD.
 NO.999 QISHAN NORTH 2ND ROAD, INFORMATION & OPTOELECTRONICS PARK, TORCH HIGH
 TECH, XIAMEN FUJIAN 361009, CHINA

LENOVO MOBILE COMMUNICATION (WUHAN) CO LTD.
 19 GAOXIN 4TH RD EAST LAKE HIGH-TECH, ZONE WUHAN HUBEI 430205, CHINA

1.4 Feature of Equipment Under Test

Product Feature	
Equipment	Portable Tablet Computer
Brand Name	lenovo
Model Name	YOGA Tablet 2-830L
FCC ID	O57YT2830L
EUT supports Radios application	GPRS/EGPRS/WCDMA/HSPA/DC-HSDPA/HSPA+(Downlink only)/LTE WLAN2.4GHz 802.11b/g/n HT20/HT40 WLAN5G 802.11a/n HT20/HT40 Bluetooth v3.0+EDR Bluetooth v4.0 LE
HW Version	Lenovopad YOGA Tablet 2-830L
SW Version	YOGA Tablet 2-830L-140623
EUT Stage	Production Unit

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are two types of EUT sample 1 and sample 2, the differences between two samples is only different supplier for Battery/EMMC/Panel/Touch panel/front and back camera.



1.5 Product Specification of Equipment Under Test

Product Specification subjective to this standard			
Tx/Rx Channel Frequency Range	5180 MHz ~ 5240 MHz		
Maximum Output Power	802.11a : 10.26 dBm / 0.0106 W 802.11n HT20 : 9.34 dBm / 0.0086 W 802.11n HT40 : 8.99 dBm / 0.0079 W		
99% Occupied Bandwidth	802.11a : 17.15 MHz 802.11n HT20 : 18.00 MHz 802.11n HT40 : 36.80 MHz		
Antenna Type	Chain Port 0 : IFA Antenna with gain 0.50 dBi Chain Port 1 : IFA Antenna with gain 0.00 dBi		
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)		
Antenna Function Description		Chain Port 0	Chain Port 1
	802.11 a	V	V
	802.11 n SISO	V	V
	802.11 n MIMO	V	V

1.6 Modification of EUT

No modifications are made to the EUT during all test items.

1.7 Testing Location

Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.			
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. C. TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958			
Test Site No.	Sporton Site No.			FCC Registration No.
	TH01-KS	03CH01-KS	CO01-KS	149928

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v01
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.4-2003

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.



2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5150-5250 MHz Band 1 (U-NII-1)	36	5180	44	5220
	38	5190	46	5230
	40	5200	48	5240

Note: The above Frequency and Channel in boldface were 802.11n HT40.



2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and data rate associated with the highest power were chosen for full test in the following tables. Final Output Power equals to Measured Output Power adds the duty factor.

5GHz 802.11a Average Power (dBm)										
Data Rate (MHz)	CH	6Mbps	CH	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
Chain Port 0	36	9.43	48	9.76	9.69	9.71	9.79	9.74	9.65	9.70
	44	9.63								
	48	10.26								
Chain Port 1	36	10.00	36	9.97	9.89	9.96	9.92	9.92	9.93	9.97
	44	9.91								
	48	9.99								

5GHz 802.11n HT20 Average Power (dBm)										
Data Rate (MHz)	CH	MCS0	CH	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
Chain Port 0	36	8.94	48	9.05	9.15	9.11	9.13	9.00	9.07	9.14
	44	9.14								
	48	9.16								
Chain Port 1	36	9.27	48	9.30	9.31	9.29	9.28	9.27	9.29	9.31
	44	9.29								
	48	9.32								
Data Rate (MHz)	CH	MCS8	CH	MCS 9	MCS 10	MCS 11	MCS 12	MCS 13	MCS 14	MCS 15
Chain Port 0+1(0)	36	6.30	36	6.09	5.78	4.61	4.92	4.69	4.81	4.84
	44	5.85								
	48	5.25								
Chain Port 0+1(1)	36	6.35	36	5.88	6.16	5.04	5.13	5.21	5.02	5.28
	44	5.83								
	48	5.51								
Chain Port 0+1	36	9.34	36	9.00	8.98	7.84	8.04	7.97	7.93	8.07
	44	8.85								
	48	8.39								



5GHz 802.11n HT40 Average Power (dBm)										
Data Rate (MHz)	CH	MCS0	CH	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
Chain Port 0	38	8.77	46	8.55	8.49	8.45	8.18	8.01	8.07	8.06
	46	8.81								
Chain Port 1	38	8.95	38	8.83	8.80	8.62	8.53	8.33	8.59	8.17
	46	8.92								
Data Rate (MHz)	CH	MCS8	CH	MCS 9	MCS 10	MCS 11	MCS 12	MCS 13	MCS 14	MCS 15
Chain Port 0+1(0)	38	5.95	38	5.45	5.34	5.18	5.37	5.26	5.27	5.36
	46	5.68								
Chain Port 0+1(1)	38	6.01	38	5.64	5.49	5.34	5.53	5.43	5.47	5.18
	46	5.61								
Chain Port 0+1	38	8.99	38	8.56	8.43	8.27	8.46	8.36	8.38	8.28
	46	8.66								

Note: Chain Port 0+1 is a calculated result from sum of the power Chain Port 0+1(0) and Chain Port 0+1(1).

2.3 Test Mode

Final results of test modes, data rates and test channels are shown as following table.


Test Cases				
	Test Items	Mode	Data rate	Test Channel
Conducted TCs	99% BW Power Spectral Density	802.11a	6 Mbps	L/M/H
		802.11n HT20	MCS0/ MCS8	L/M/H
		802.11n HT40	MCS0/ MCS8	L/M/H
	20dB Occupied Bandwidth	802.11a	6 Mbps	H
		802.11n HT20	MCS0/ MCS8	H
		802.11n HT40	MCS0/ MCS8	H
	Output Power	802.11a	6 Mbps	L/M/H
		802.11n HT20	MCS0/ MCS8	L/M/H
		802.11n HT40	MCS0/ MCS8	L/M/H
	Frequency Stability	802.11a	6 Mbps	L
Radiated TCs	Radiated Band Edge	802.11a	6 Mbps	L/H
		802.11n HT20	MCS8	L/H
		802.11n HT40	MCS8	L/H
	Radiated Spurious Emission	802.11a	6 Mbps	L/M/H
		802.11n HT20	MCS8	L/M/H
		802.11n HT40	MCS8	L/M/H
AC Conducted Emission	Mode 1 : GSM850 Idle + Bluetooth Link + WLAN (5G) Link + USB Cable 1 (Charging from Adapter 1) + Earphone + Battery 1 for Sample 1 Mode 2 : GSM850 Idle + Bluetooth Link + WLAN (5G) Link + USB Cable 2 (Charging from Adapter 2) + Earphone + Battery 2 for Sample 2			
Remark: 1. The worst case of conducted emission is mode 2; only the test data of it was reported. 2. For Radiated Test Cases, all the test modes were performed with Adapter 1, Battery 1, Earphone and USB Cable 1 for Sample 1.				




Ch. #		Band I : 5150-5250 MHz		
		802.11a	802.11n HT20	802.11n HT40
L	Low	36	36	38
M	Middle	44	44	-
H	High	48	48	46

2.4 Connection Diagram of Test System

<WLAN Tx Mode>

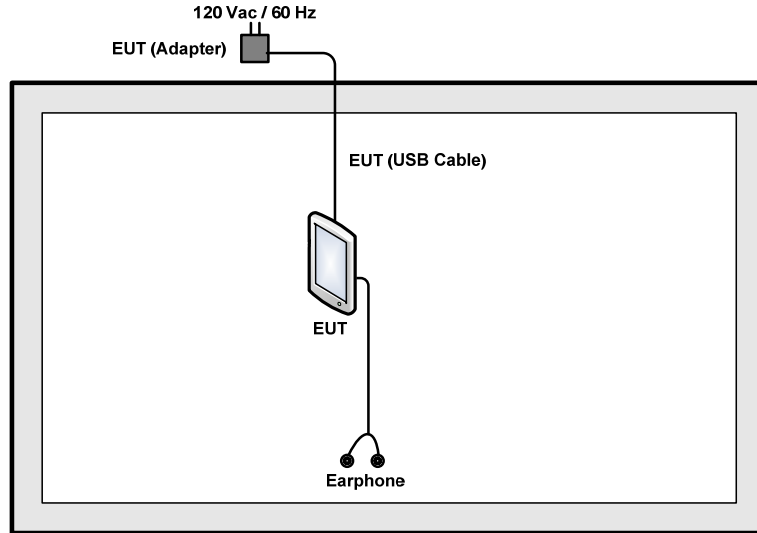

<AC Conducted Emission Mode>

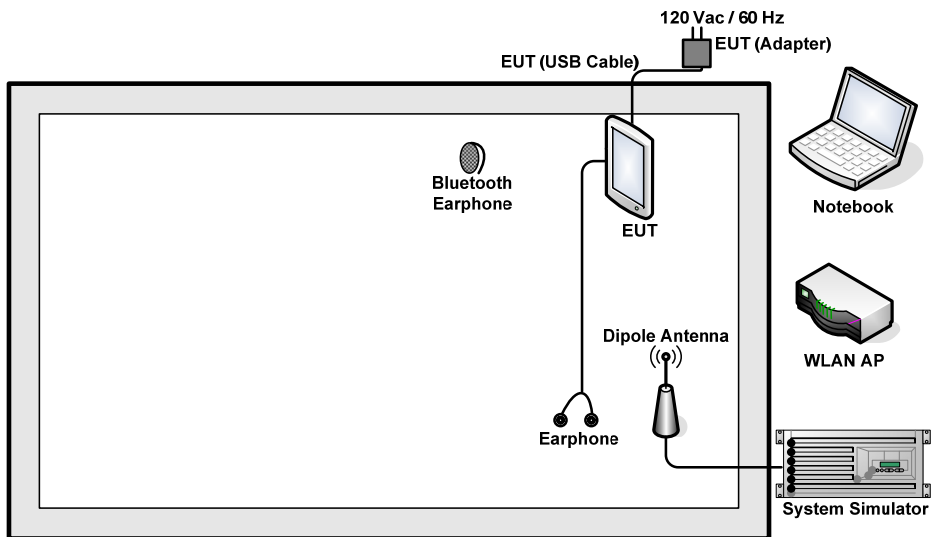

2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	D-Link	DIR-855	KA2DIR855A2	N/A	Unshielded, 1.8 m
2.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
3.	DC Power Supply	GWINSTEK	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
4.	Notebook	Lenovo	G480	N/A	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
5.	Bluetooth Earphone	Lenovo	LBH505	N/A	N/A	N/A
6.	Earphone	Lenovo	SH100	N/A	N/A	N/A

2.6 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.7 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 7.3 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 7.3 + 10 = 17.3 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 99% Occupied Bandwidth Measurement

3.1.1 Description of 99% Occupied Bandwidth

This section is for reporting purpose only.

There is no restriction limits for bandwidth.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01.
Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1MHz and set the Video bandwidth (VBW) $\geq 3 * RBW$.
7. Measure and record the results in the test report.

3.1.4 Test Setup

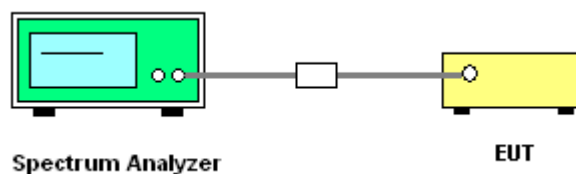




3.1.5 Test Result of 99% Occupied Bandwidth

Test Band :	5GHz band 1	Temperature :	24~25°C
Test Engineer :	Issac Song	Relative Humidity :	49~51%

Mod.	Data Rate	N _{TX}	Channel	Freq. (MHz)	99% Bandwidth (MHz)		99% Bandwidth EIRP Limit (dBm)	
					Chain Port 0	Chain Port 1	Chain Port 0	Chain Port 1
11a	6Mbps	1	36	5180	17.10	-	22.33	-
11a	6Mbps	1	44	5220	17.15	-	22.34	-
11a	6Mbps	1	48	5240	17.10	-	22.33	-
HT20	MCS0	1	36	5180	-	17.90	-	22.53
HT20	MCS0	1	44	5220	-	18.00	-	22.55
HT20	MCS0	1	48	5240	-	18.00	-	22.55
HT40	MCS0	1	38	5190	-	36.80	-	23.01
HT40	MCS0	1	46	5230	-	36.50	-	23.01
HT20	MCS8	2	36	5180	17.90	18.00	22.53	
HT20	MCS8	2	44	5220	17.90	17.95	22.53	
HT20	MCS8	2	48	5240	17.90	17.90	22.53	
HT40	MCS8	2	38	5190	36.70	36.70	23.01	
HT40	MCS8	2	46	5230	36.70	36.60	23.01	

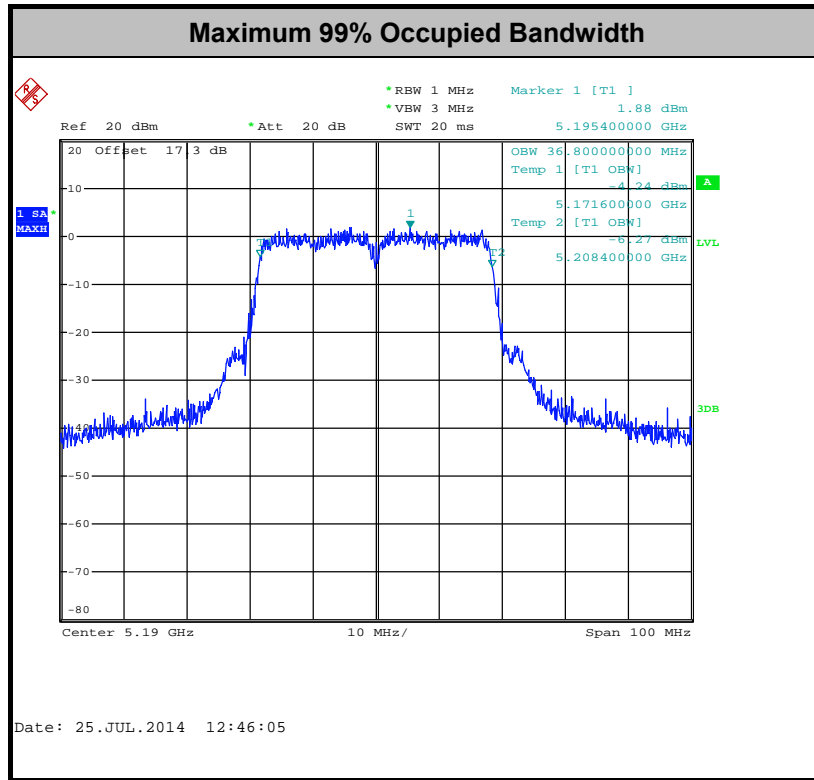



3.1.6 Test Result of 20dB Occupied Bandwidth


Mod.	Data Rate	N _{TX}	Channel	Freq. (MHz)	20dB Bandwidth (MHz)		20dB Bandwidth Upper Frequency (FH) (MHz)		Upper Limit Line (MHz)	Pass/Fail
					Chain Port 0	Chain Port 1	Chain Port 0	Chain Port 1		
11a	6Mbps	1	48	5240	18.25	-	5249.05	-	5250	Pass
HT20	MCS0	1	48	5240	-	19.10	-	5249.55		Pass
HT40	MCS0	1	46	5230	-	39.80	-	5249.80		Pass
HT20	MCS8	2	48	5240	-	18.95	-	5249.45		Pass
HT40	MCS8	2	46	5230	-	39.60	-	5249.80		Pass



Number of TX = 1


20dB Occupied Bandwidth

802.11a CH48 5240MHz for Chain 0

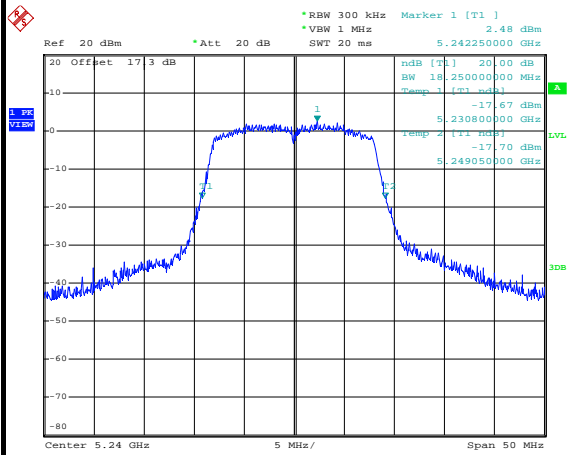


Date: 25.JUL.2014 12:34:19

802.11n HT20 CH48 5240MHz for Chain 1

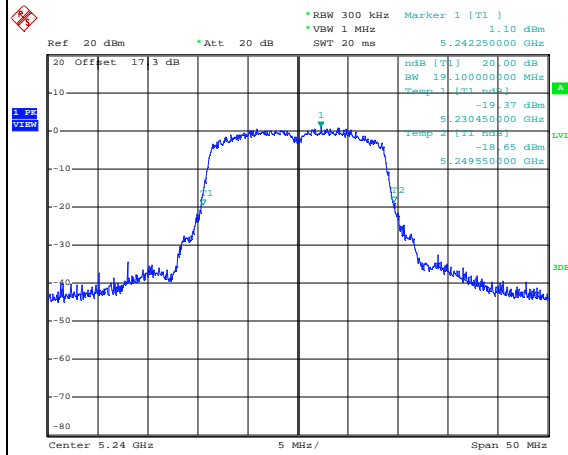

Date: 25.JUL.2014 12:42:03


802.11n HT40 CH46 5230MHz for Chain 1

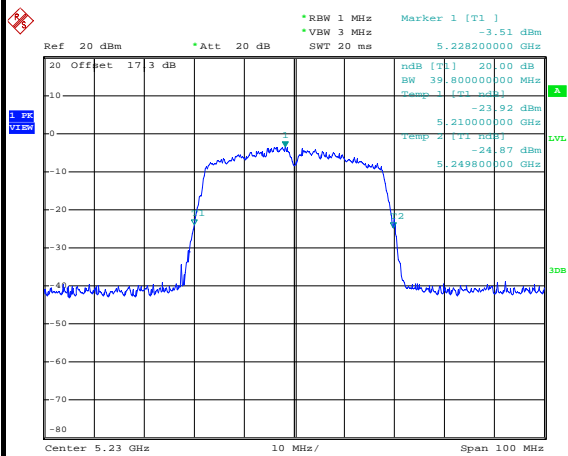

Date: 30.JUL.2014 12:57:17



Number of TX = 2

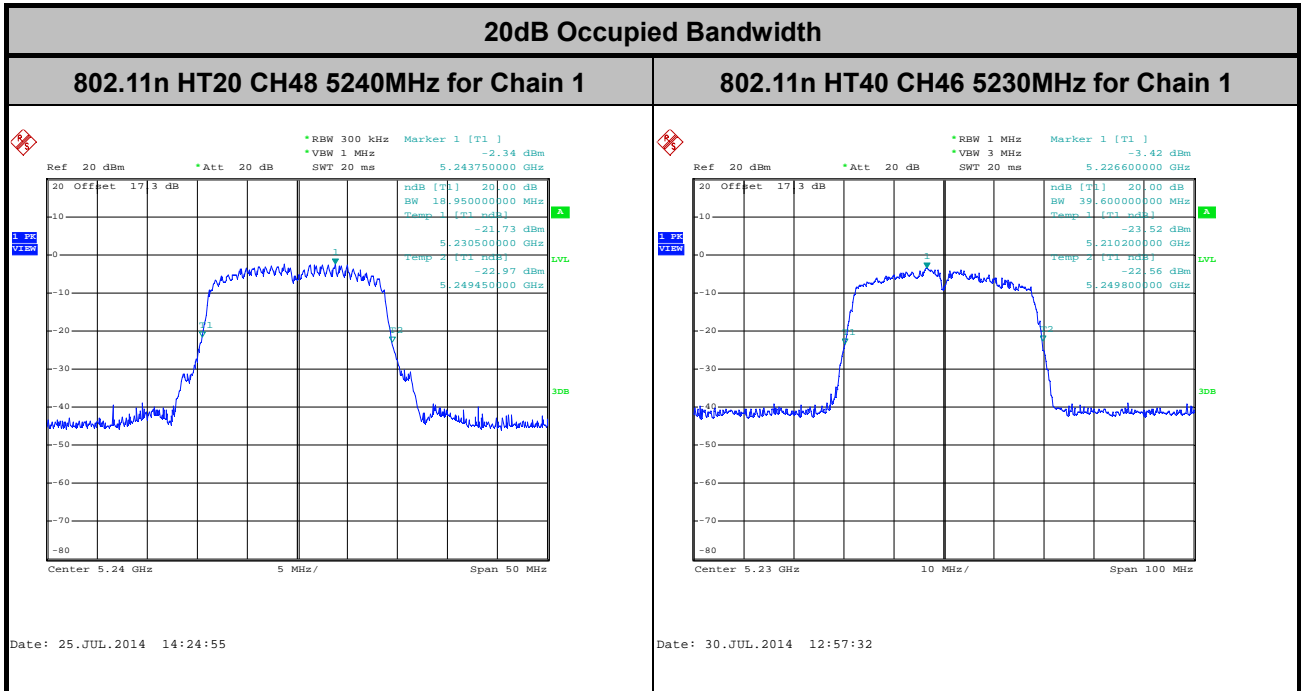



3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

3.2.4 Test Setup

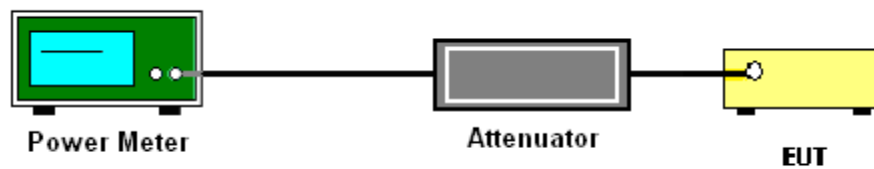



3.2.5 Test Result of Maximum Conducted Output Power

Test Band :	5GHz band 1	Temperature :	24~25°C
Test Engineer :	Issac Song	Relative Humidity :	49~51%

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Power Limit (dBm)		DG (dBi)		Pass /Fail
					Chain Port 0	Chain Port 1	Chain Port 0	Chain Port 1	Sum Power	Chain Port 0	Chain Port 1	Chain Port 0	Chain Port 1	
11a	6Mbps	1	36	5180	0.18	0.20	9.43	10.00	-	24.00	24.00	0.50	0.00	Pass
11a	6Mbps	1	44	5220	0.18	0.20	9.63	9.91	-	24.00	24.00	0.50	0.00	Pass
11a	6Mbps	1	48	5240	0.18	0.20	10.26	9.99	-	24.00	24.00	0.50	0.00	Pass
HT20	MCS0	1	36	5180	0.22	0.20	8.94	9.27	-	24.00	24.00	0.50	0.00	Pass
HT20	MCS0	1	44	5220	0.22	0.20	9.14	9.29	-	24.00	24.00	0.50	0.00	Pass
HT20	MCS0	1	48	5240	0.22	0.20	9.16	9.32	-	24.00	24.00	0.50	0.00	Pass
HT40	MCS0	1	38	5190	0.22	0.24	8.77	8.95	-	24.00	24.00	0.50	0.00	Pass
HT40	MCS0	1	46	5230	0.22	0.24	8.81	8.92	-	24.00	24.00	0.50	0.00	Pass
HT20	MCS8	2	36	5180	0.41	0.41	6.30	6.35	9.34	24.00	24.00	3.26	3.26	Pass
HT20	MCS8	2	44	5220	0.41	0.41	5.85	5.83	8.85	24.00	24.00	3.26	3.26	Pass
HT20	MCS8	2	48	5240	0.41	0.41	5.25	5.51	8.39	24.00	24.00	3.26	3.26	Pass
HT40	MCS8	2	38	5190	0.45	0.41	5.95	6.01	8.99	24.00	24.00	3.26	3.26	Pass
HT40	MCS8	2	46	5230	0.45	0.41	5.68	5.61	8.66	24.00	24.00	3.26	3.26	Pass

Note:

- Final Output Power equals to Measured Output Power adds the duty factor.
- Sum Power is a calculated result from sum of the Chain Port 0 and Chain Port 1.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.



3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01.
Section F) Maximum power spectral density.

Method SA-2


(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

1. The testing follows Method SA-2 of FCC KDB 789033 D02 General UNII Test Procedures New Rules v01.
 - Measure the duty cycle.
 - Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 1 MHz.
 - Set VBW \geq 3 MHz.
 - Number of points in sweep \geq 2 Span / RBW.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
4. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (1): Measure and sum the spectra across the outputs.

The total final Power Spectral Density is from a device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points, the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.

3.3.4 Test Setup

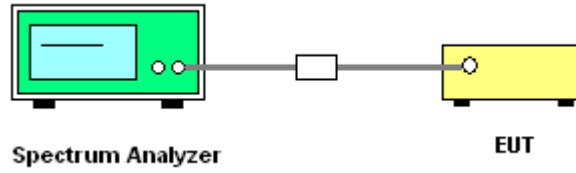




3.3.5 Test Result of Power Spectral Density

Test Band :	5GHz band 1	Temperature :	24~25°C
Test Engineer :	Issac Song	Relative Humidity :	49~51%

Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density (dBm/MHz)			Average PSD Limit (dBm)		DG (dBi)		Pass /Fail
					Chain Port 0	Chain Port 1	Chain Port 0	Chain Port 1	Sum Power	Chain Port 0	Chain Port 1	Chain Port 0	Chain Port 1	
11a	6Mbps	1	36	5180	0.18	0.20	-1.74	-	-	11.00	11.00	0.50	0.00	Pass
11a	6Mbps	1	44	5220	0.18	0.20	-1.03	-	-	11.00	11.00	0.50	0.00	Pass
11a	6Mbps	1	48	5240	0.18	0.20	-1.21	-	-	11.00	11.00	0.50	0.00	Pass
HT20	MCS0	1	36	5180	0.22	0.20	-	-2.52	-	11.00	11.00	0.50	0.00	Pass
HT20	MCS0	1	44	5220	0.22	0.20	-	-2.54	-	11.00	11.00	0.50	0.00	Pass
HT20	MCS0	1	48	5240	0.22	0.20	-	-2.57	-	11.00	11.00	0.50	0.00	Pass
HT40	MCS0	1	38	5190	0.22	0.24	-	-6.18	-	11.00	11.00	0.50	0.00	Pass
HT40	MCS0	1	46	5230	0.22	0.24	-	-6.53	-	11.00	11.00	0.50	0.00	Pass
HT20	MCS8	2	36	5180	0.41	0.41	-	-	-1.36	11.00	11.00	3.26	3.26	Pass
HT20	MCS8	2	44	5220	0.41	0.41	-	-	-1.10	11.00	11.00	3.26	3.26	Pass
HT20	MCS8	2	48	5240	0.41	0.41	-	-	-1.37	11.00	11.00	3.26	3.26	Pass
HT40	MCS8	2	38	5190	0.45	0.41	-	-	-9.01	11.00	11.00	3.26	3.26	Pass
HT40	MCS8	2	46	5230	0.45	0.41	-	-	-8.65	11.00	11.00	3.26	3.26	Pass

Note: Sum PSD is a bin-by-bin combined result of Chain Port 0 and Chain Port 1.

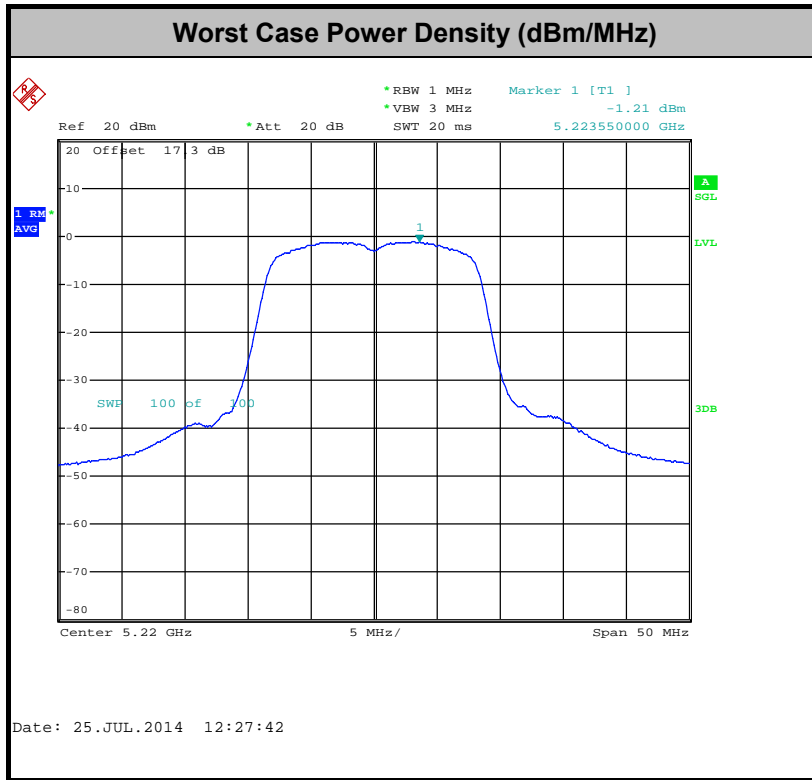

3.4 Unwanted Emissions Measurement

This section as specified in FCC Part 15.407(b) is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement. The unwanted emissions shall comply with 15.407(b)(1) to (6), and restricted bands per FCC Part15.205.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz.
- (2) Unwanted spurious emissions fallen in restricted bands per FCC Part15.205 shall comply with the general field strength limits set forth in § 15.209 as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

EIRP (dBm)	Field Strength at 3m (dBμV/m)
-17	78.3
- 27	68.3

- (3) KDB789033 v01 G)2)c) As specified in 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in 15.407(b)(4)). However, an out-of-band emission that complies with both the average and peak limits of 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz peak emission limit.

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01. Section G) Unwanted emissions measurement.

(1) Procedure for Unwanted Emissions Measurements Below 1000MHz

- RBW = 120 kHz
- VBW = 300 kHz
- Detector = Peak
- Trace mode = max hold

(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW ≥ 3 MHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold

(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz

- RBW = 1 MHz
- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Antenna	Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
0	802.11a	95.83	2.070	0.483	1kHz
1	802.11a	95.48	2.070	0.483	1kHz
0+1	802.11n HT20	90.98	0.988	1.012	3kHz
0+1	802.11n HT40	90.91	0.980	1.020	3kHz


2. The EUT was placed on a rotatable table top 0.8 meter above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the

limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.


7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

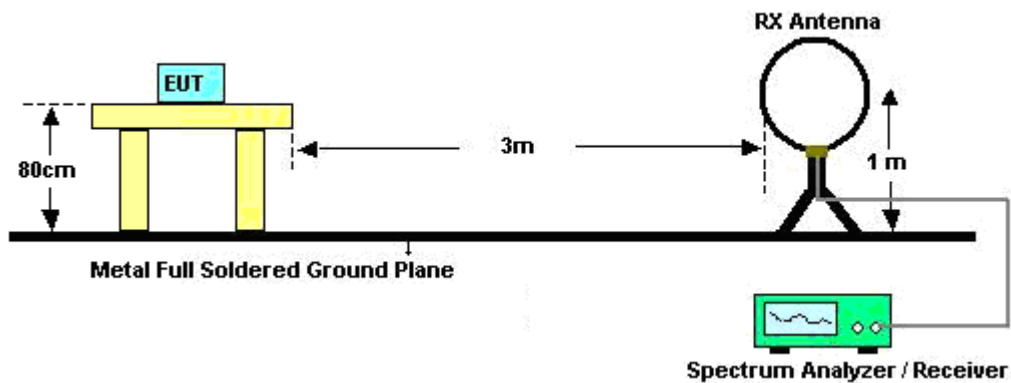

For radiated emissions from 30MHz to 1GHz

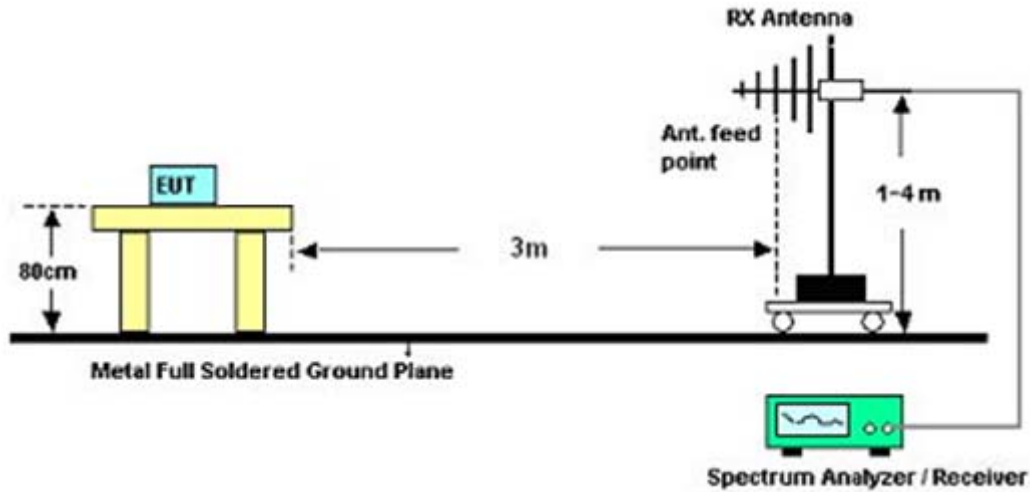

For radiated emissions above 1GHz

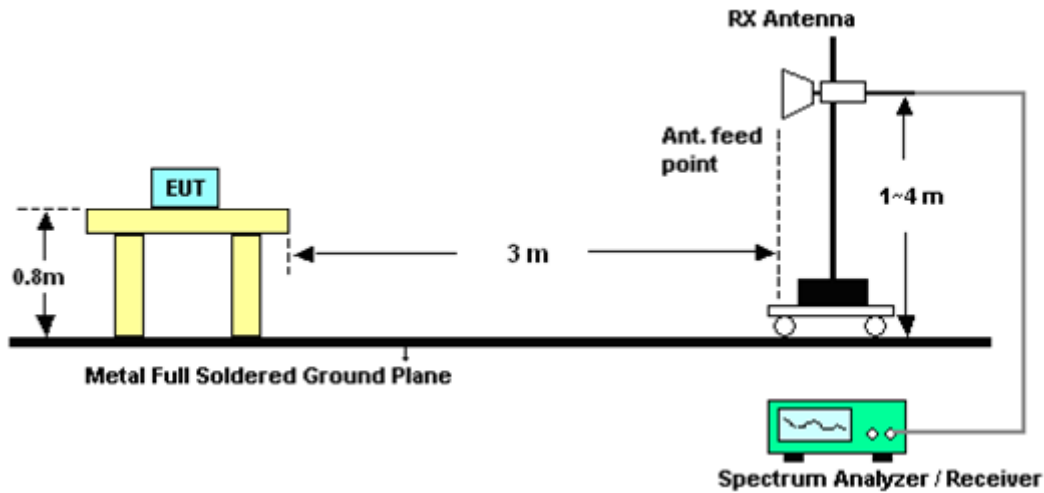

3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.



3.4.6 Test Result of Radiated Band Edges

Test Mode :	802.11a – Chain Port 0	Temperature :	23~24°C
Test Channel :	36	Relative Humidity :	43~44%
Test Engineer :	Stone Gu		

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
5149.6	58	-16	74	57.85	34.11	3.9	37.86	100	339	Peak
5103.15	44.26	-9.74	54	44.03	34.04	3.86	37.67	100	339	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
5149.3	57.3	-16.7	74	57.15	34.11	3.9	37.86	102	4	Peak
5103.8	44.15	-9.85	54	43.92	34.04	3.86	37.67	102	4	Average

Test Mode :	802.11a – Chain Port 0	Temperature :	23~24°C
Test Channel :	48	Relative Humidity :	43~44%
Test Engineer :	Stone Gu		

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
5352	53.66	-20.34	74	54.35	34.39	4	39.08	107	328	Peak
5353.45	40.34	-13.66	54	41.03	34.39	4	39.08	107	328	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
5352.8	54.13	-19.87	74	54.82	34.39	4	39.08	100	13	Peak
5352.8	40.02	-13.98	54	40.71	34.39	4	39.08	100	13	Average



Test Mode :	802.11a – Chain Port 1	Temperature :	23~24°C
Test Channel :	36	Relative Humidity :	43~44%
Test Engineer :	Stone Gu		

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
5104.9	48.9	-25.1	74	48.67	34.04	3.86	37.67	100	144	Peak
5104.75	34.59	-19.41	54	34.36	34.04	3.86	37.67	100	144	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
5104.25	51.14	-22.86	74	50.91	34.04	3.86	37.67	116	263	Peak
5102.95	37.69	-16.31	54	37.46	34.04	3.86	37.67	116	263	Average

Test Mode :	802.11a – Chain Port 1	Temperature :	23~24°C
Test Channel :	48	Relative Humidity :	43~44%
Test Engineer :	Stone Gu		

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
5358	53.09	-20.91	74	53.78	34.39	4	39.08	100	64	Peak
5361.95	39.06	-14.94	54	39.84	34.41	4.01	39.2	100	64	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
5353.6	52.73	-21.27	74	53.42	34.39	4	39.08	104	254	Peak
5361.7	38.97	-15.03	54	39.75	34.41	4.01	39.2	104	254	Average



Test Mode :	802.11n HT20 – Chain Port 0+1	Temperature :	23~24°C
Test Channel :	36	Relative Humidity :	43~44%
Test Engineer :	Stone Gu		

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
5147.35	54.18	-19.82	74	54.03	34.11	3.9	37.86	100	324	Peak
5103.15	41.62	-12.38	54	41.39	34.04	3.86	37.67	100	324	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
5149.6	54.33	-19.67	74	54.18	34.11	3.9	37.86	195	8	Peak
5103.15	39.96	-14.04	54	39.73	34.04	3.86	37.67	195	8	Average

Test Mode :	802.11n HT20 – Chain Port 0+1	Temperature :	23~24°C
Test Channel :	48	Relative Humidity :	43~44%
Test Engineer :	Stone Gu		

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
5353.3	51.69	-22.31	74	52.38	34.39	4	39.08	100	329	Peak
5353	37.01	-16.99	54	37.7	34.39	4	39.08	100	329	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
5356	47.77	-26.23	74	48.46	34.39	4	39.08	200	18	Peak
5354.65	34.81	-19.19	54	35.5	34.39	4	39.08	200	18	Average



Test Mode :	802.11n HT40 – Chain Port 0+1	Temperature :	23~24°C
Test Channel :	38	Relative Humidity :	43~44%
Test Engineer :	Stone Gu		

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
5149.25	61.7	-12.3	74	61.55	34.11	3.9	37.86	100	332	Peak
5150	41.58	-12.42	54	41.43	34.11	3.9	37.86	100	332	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
5148.15	57.06	-16.94	74	56.91	34.11	3.9	37.86	142	0	Peak
5149.6	37.75	-16.25	54	37.6	34.11	3.9	37.86	142	0	Average

Test Mode :	802.11n HT40 – Chain Port 0+1	Temperature :	23~24°C
Test Channel :	46	Relative Humidity :	43~44%
Test Engineer :	Stone Gu		

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
5378.85	50.32	-23.68	74	51.17	34.44	4.02	39.31	100	334	Peak
5379.3	36.66	-17.34	54	37.51	34.44	4.02	39.31	100	334	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
5383.8	48.29	-25.71	74	49.14	34.44	4.02	39.31	143	0	Peak
5386.1	34.88	-19.12	54	35.73	34.44	4.02	39.31	143	0	Average



3.4.7 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic)

Test Mode :	802.11a – Chain Port 0	Temperature :	23~24°C
Test Channel :	36	Relative Humidity :	43~44%
Test Engineer :	Stone Gu	Polarization :	Horizontal
Remark :	1. 5180 MHz is fundamental signal which can be ignored. 2. 10359 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
4960	58.23	-15.77	74	57.67	33.93	3.78	37.15	133	275	Peak
4960	43.01	-10.99	54	42.45	33.93	3.78	37.15	133	275	Average
5104	58.92	-15.08	74	58.69	34.04	3.86	37.67	100	339	Peak
5104	45.12	-8.88	54	44.89	34.04	3.86	37.67	100	339	Average
5180	104.63	-	-	104.55	34.16	3.92	38	100	339	Peak
5180	92	-	-	91.92	34.16	3.92	38	100	339	Average
10359	31.39	-42.61	74	60.85	1.46	5.85	36.77	100	233	Peak



Test Mode :	802.11a – Chain Port 0	Temperature :	23~24°C
Test Channel :	36	Relative Humidity :	43~44%
Test Engineer :	Stone Gu	Polarization :	Vertical
Remark :	1. 5180 MHz is fundamental signal which can be ignored. 2. 10359 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
4962	56.42	-17.58	74	55.86	33.93	3.78	37.15	135	13	Peak
4962	41.94	-12.06	54	41.38	33.93	3.78	37.15	135	13	Average
5180	103.03	-	-	102.95	34.16	3.92	38	102	4	Peak
5180	90.91	-	-	90.83	34.16	3.92	38	102	4	Average
5400	58.91	-15.09	74	59.84	34.46	4.03	39.42	184	20	Peak
5400	44.58	-9.42	54	45.51	34.46	4.03	39.42	184	20	Average
10359	30.78	-43.22	74	60.24	1.46	5.85	36.77	110	150	Peak



Test Mode :	802.11a – Chain Port 0	Temperature :	23~24°C
Test Channel :	44	Relative Humidity :	43~44%
Test Engineer :	Stone Gu	Polarization :	Horizontal
Remark :	1. 5220 MHz is fundamental signal which can be ignored. 2. 10440 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
4998	58.43	-15.57	74	58.01	33.9	3.79	37.27	118	276	Peak
4998	42.4	-11.6	54	41.98	33.9	3.79	37.27	118	276	Average
5138	61.04	-12.96	74	60.87	34.09	3.88	37.8	100	329	Peak
5138	46.85	-7.15	54	46.68	34.09	3.88	37.8	100	329	Average
5220	106.26	-	-	106.29	34.2	3.95	38.18	100	329	Peak
5220	94.02	-	-	94.05	34.2	3.95	38.18	100	329	Average
5440	58.06	-15.94	74	58.78	34.51	4.01	39.24	100	329	Peak
5440	42.85	-11.15	54	43.57	34.51	4.01	39.24	100	329	Average
10440	31.83	-42.17	74	61.23	1.53	5.89	36.82	150	119	Peak



Test Mode :	802.11a – Chain Port 0	Temperature :	23~24°C
Test Channel :	44	Relative Humidity :	43~44%
Test Engineer :	Stone Gu	Polarization :	Vertical
Remark :	1. 5220 MHz is fundamental signal which can be ignored. 2. 10440 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
5000	51.87	-22.13	74	51.45	33.9	3.79	37.27	101	316	Peak
5000	36.51	-17.49	54	36.09	33.9	3.79	37.27	101	316	Average
5220	103.54	-	-	103.57	34.2	3.95	38.18	100	254	Peak
5220	91.65	-	-	91.68	34.2	3.95	38.18	100	254	Average
10440	30.64	-43.36	74	60.04	1.53	5.89	36.82	103	45	Peak



Test Mode :	802.11a – Chain Port 0	Temperature :	23~24°C
Test Channel :	48	Relative Humidity :	43~44%
Test Engineer :	Stone Gu	Polarization :	Horizontal
Remark :	1. 5240 MHz is fundamental signal which can be ignored. 2. 10479 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
5022	59.97	-14.03	74	59.63	33.95	3.8	37.41	131	328	Peak
5022	44.16	-9.84	54	43.82	33.95	3.8	37.41	131	328	Average
5240	104.09	-	-	104.2	34.23	3.95	38.29	100	328	Peak
5240	94.14	-	-	94.25	34.23	3.95	38.29	100	328	Average
5460	60.43	-13.57	74	61.04	34.53	4.01	39.15	107	325	Peak
5460	45.55	-8.45	54	46.16	34.53	4.01	39.15	107	325	Average
10479	30.88	-43.12	74	60.32	1.56	5.91	36.91	120	0	Peak



Test Mode :	802.11a – Chain Port 0	Temperature :	23~24°C
Test Channel :	48	Relative Humidity :	43~44%
Test Engineer :	Stone Gu	Polarization :	Vertical
Remark :	1. 5240 MHz is fundamental signal which can be ignored. 2. 10479 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
5024	57.87	-16.13	74	57.53	33.95	3.8	37.41	200	11	Peak
5024	43.8	-10.2	54	43.46	33.95	3.8	37.41	200	11	Average
5240	102.79	-	-	102.9	34.23	3.95	38.29	100	13	Peak
5240	91.03	-	-	91.14	34.23	3.95	38.29	100	13	Average
5460	60.17	-13.83	74	60.78	34.53	4.01	39.15	181	12	Peak
5460	45.38	-8.62	54	45.99	34.53	4.01	39.15	181	12	Average
10479	30.01	-43.99	74	59.45	1.56	5.91	36.91	152	223	Peak



Test Mode :	802.11a – Chain Port 1	Temperature :	22~23°C
Test Channel :	36	Relative Humidity :	42~43%
Test Engineer :	Star Wei	Polarization :	Horizontal
Remark :	1. 5180 MHz is fundamental signal which can be ignored. 2. 10359 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
5180	93.13	-	-	93.05	34.16	3.92	38	100	144	Peak
5180	80.5	-	-	80.42	34.16	3.92	38	100	144	Average
10359	29.1	-44.9	74	58.56	1.46	5.85	36.77	124	125	Peak

Test Mode :	802.11a – Chain Port 1	Temperature :	23~24°C
Test Channel :	36	Relative Humidity :	43~44%
Test Engineer :	Stone Gu	Polarization :	Vertical
Remark :	1. 5180 MHz is fundamental signal which can be ignored. 2. 10359 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
5180	99.1	-	-	99.02	34.16	3.92	38	116	263	Peak
5180	87.38	-	-	87.3	34.16	3.92	38	116	263	Average
5394	56.06	-17.94	74	56.91	34.44	4.02	39.31	100	281	Peak
5394	41.03	-12.97	54	41.88	34.44	4.02	39.31	100	281	Average
10359	29	-45	74	58.46	1.46	5.85	36.77	101	302	Peak



Test Mode :	802.11a – Chain Port 1	Temperature :	23~24°C
Test Channel :	44	Relative Humidity :	43~44%
Test Engineer :	Stone Gu	Polarization :	Horizontal
Remark :	1. 5220 MHz is fundamental signal which can be ignored. 2. 10440 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
5220	93.6	-	-	93.63	34.2	3.95	38.18	100	147	Peak
5220	83.43	-	-	83.46	34.2	3.95	38.18	100	147	Average
10440	28.64	-45.36	74	58.04	1.53	5.89	36.82	100	13	Peak

Test Mode :	802.11a – Chain Port 1	Temperature :	23~24°C
Test Channel :	44	Relative Humidity :	43~44%
Test Engineer :	Stone Gu	Polarization :	Vertical
Remark :	1. 5220 MHz is fundamental signal which can be ignored. 2. 10440 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
5220	99.31	-	-	99.34	34.2	3.95	38.18	129	292	Peak
5220	87.09	-	-	87.12	34.2	3.95	38.18	129	292	Average
10440	27.88	-46.12	74	57.28	1.53	5.89	36.82	102	356	Peak



Test Mode :	802.11a – Chain Port 1	Temperature :	23~24°C
Test Channel :	48	Relative Humidity :	43~44%
Test Engineer :	Stone Gu	Polarization :	Horizontal
Remark :	1. 5240 MHz is fundamental signal which can be ignored. 2. 10479 MHz is not within a restricted band and satisfies both the average and peak limits of 15.209.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
5240	95.79	-	-	95.9	34.23	3.95	38.29	100	64	Peak
5240	84.72	-	-	84.83	34.23	3.95	38.29	100	64	Average
10479	27.41	-46.59	74	56.85	1.56	5.91	36.91	100	106	Peak

Test Mode :	802.11a – Chain Port 1	Temperature :	23~24°C
Test Channel :	48	Relative Humidity :	43~44%
Test Engineer :	Stone Gu	Polarization :	Vertical
Remark :	1. 5240 MHz is fundamental signal which can be ignored. 2. 5322 MHz is not within a restricted band and satisfies 68.3 dBμV /m peak emission limit. 3. 10479 MHz is not within a restricted band and satisfies both the average and peak limits of 15.209.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
5240	100.78	-	-	100.89	34.23	3.95	38.29	104	254	Peak
5240	89.42	-	-	89.53	34.23	3.95	38.29	104	254	Average
5322	56.79	-11.51	68.3	57.32	34.34	3.99	38.86	100	120	Peak
10479	28.2	-45.8	74	57.64	1.56	5.91	36.91	105	109	Peak



Test Mode :	802.11n HT20 – Chain Port 0+1	Temperature :	23~24°C
Test Channel :	36	Relative Humidity :	43~44%
Test Engineer :	Stone Gu	Polarization :	Horizontal
Remark :	1. 5180 MHz is fundamental signal which can be ignored. 2. 10359 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
5180	100.41	-	-	100.33	34.16	3.92	38	100	324	Peak
5180	88.68	-	-	88.6	34.16	3.92	38	100	324	Average
5392	56.49	-17.51	74	57.34	34.44	4.02	39.31	100	325	Peak
5392	42.64	-11.36	54	43.49	34.44	4.02	39.31	100	325	Average
10359	27.83	-46.17	74	57.29	1.46	5.85	36.77	100	320	Peak

Test Mode :	802.11n HT20 – Chain Port 0+1	Temperature :	23~24°C
Test Channel :	36	Relative Humidity :	43~44%
Test Engineer :	Stone Gu	Polarization :	Vertical
Remark :	1. 5180 MHz is fundamental signal which can be ignored. 2. 10359 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
5180	97.4	-	-	97.32	34.16	3.92	38	195	8	Peak
5180	86.5	-	-	86.42	34.16	3.92	38	195	8	Average
10359	29.67	-44.33	74	59.13	1.46	5.85	36.77	103	220	Peak



Test Mode :	802.11n HT20 – Chain Port 0+1	Temperature :	23~24°C
Test Channel :	44	Relative Humidity :	43~44%
Test Engineer :	Stone Gu	Polarization :	Horizontal
Remark :	1. 5220 MHz is fundamental signal which can be ignored. 2. 10440 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
5220	100.06	-	-	100.09	34.2	3.95	38.18	100	332	Peak
5220	89.82	-	-	89.85	34.2	3.95	38.18	100	332	Average
10440	27.93	-46.07	74	57.33	1.53	5.89	36.82	106	332	Peak

Test Mode :	802.11n HT20 – Chain Port 0+1	Temperature :	23~24°C
Test Channel :	44	Relative Humidity :	43~44%
Test Engineer :	Stone Gu	Polarization :	Vertical
Remark :	1. 5220 MHz is fundamental signal which can be ignored. 2. 10440 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
5220	96.43	-	-	96.46	34.2	3.95	38.18	194	13	Peak
5220	87.21	-	-	87.24	34.2	3.95	38.18	194	13	Average
5440	56.18	-17.82	74	56.9	34.51	4.01	39.24	124	13	Peak
5440	41.88	-12.12	54	42.6	34.51	4.01	39.24	124	13	Average
10440	29.08	-44.92	74	58.48	1.53	5.89	36.82	100	0	Peak



Test Mode :	802.11n HT20 – Chain Port 0+1	Temperature :	23~24°C
Test Channel :	48	Relative Humidity :	43~44%
Test Engineer :	Stone Gu	Polarization :	Horizontal
Remark :	1. 5240 MHz is fundamental signal which can be ignored. 3. 10479 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
5240	99.8	-	-	99.91	34.23	3.95	38.29	100	329	Peak
5240	89.53	-	-	89.64	34.23	3.95	38.29	100	329	Average
10479	26.95	-47.05	74	56.39	1.56	5.91	36.91	100	117	Peak

Test Mode :	802.11n HT20 – Chain Port 0+1	Temperature :	23~24°C
Test Channel :	48	Relative Humidity :	43~44%
Test Engineer :	Stone Gu	Polarization :	Vertical
Remark :	1. 5240 MHz is fundamental signal which can be ignored. 2. 10479 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
5240	96.74	-	-	96.85	34.23	3.95	38.29	100	14	Peak
5240	86.27	-	-	86.38	34.23	3.95	38.29	100	14	Average
5456	53.56	-20.44	74	54.17	34.53	4.01	39.15	200	18	Peak
5456	41.76	-12.24	54	42.37	34.53	4.01	39.15	200	18	Average
10479	28.45	-45.55	74	57.89	1.56	5.91	36.91	107	110	Peak



Test Mode :	802.11n HT40 – Chain Port 0+1	Temperature :	23~24°C
Test Channel :	38	Relative Humidity :	43~44%
Test Engineer :	Stone Gu	Polarization :	Horizontal
Remark :	1. 5190 MHz is fundamental signal which can be ignored. 2. 10461 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
5190	98.3	-	-	98.22	34.16	3.92	38	100	332	Peak
5190	86.71	-	-	86.63	34.16	3.92	38	100	332	Average
10461	26.35	-47.65	74	55.78	1.55	5.9	36.88	100	36	Peak

Test Mode :	802.11n HT40 – Chain Port 0+1	Temperature :	23~24°C
Test Channel :	38	Relative Humidity :	43~44%
Test Engineer :	Stone Gu	Polarization :	Vertical
Remark :	1. 5190 MHz is fundamental signal which can be ignored. 2. 10380 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
5190	94.92	-	-	94.84	34.16	3.92	38	142	0	Peak
5190	83.6	-	-	83.52	34.16	3.92	38	142	0	Average
10380	28.39	-45.61	74	57.82	1.48	5.86	36.77	110	34	Peak



Test Mode :	802.11n HT40 – Chain Port 0+1	Temperature :	23~24°C
Test Channel :	46	Relative Humidity :	43~44%
Test Engineer :	Stone Gu	Polarization :	Horizontal
Remark :	1. 5230 MHz is fundamental signal which can be ignored. 2. 10461 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
5230	96.58	-	-	96.69	34.23	3.95	38.29	100	334	Peak
5230	86.67	-	-	86.78	34.23	3.95	38.29	100	334	Average
10461	26.25	-47.75	74	55.68	1.55	5.9	36.88	100	36	Peak

Test Mode :	802.11n HT40 – Chain Port 0+1	Temperature :	23~24°C
Test Channel :	46	Relative Humidity :	43~44%
Test Engineer :	Stone Gu	Polarization :	Vertical
Remark :	1. 5230 MHz is fundamental signal which can be ignored. 2. 10461 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
5230	94.03	-	-	94.14	34.23	3.95	38.29	143	0	Peak
5230	83.49	-	-	83.6	34.23	3.95	38.29	143	0	Average
10461	28.09	-45.91	74	57.52	1.55	5.9	36.88	124	0	Peak

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.


3.5.4 Test Setup

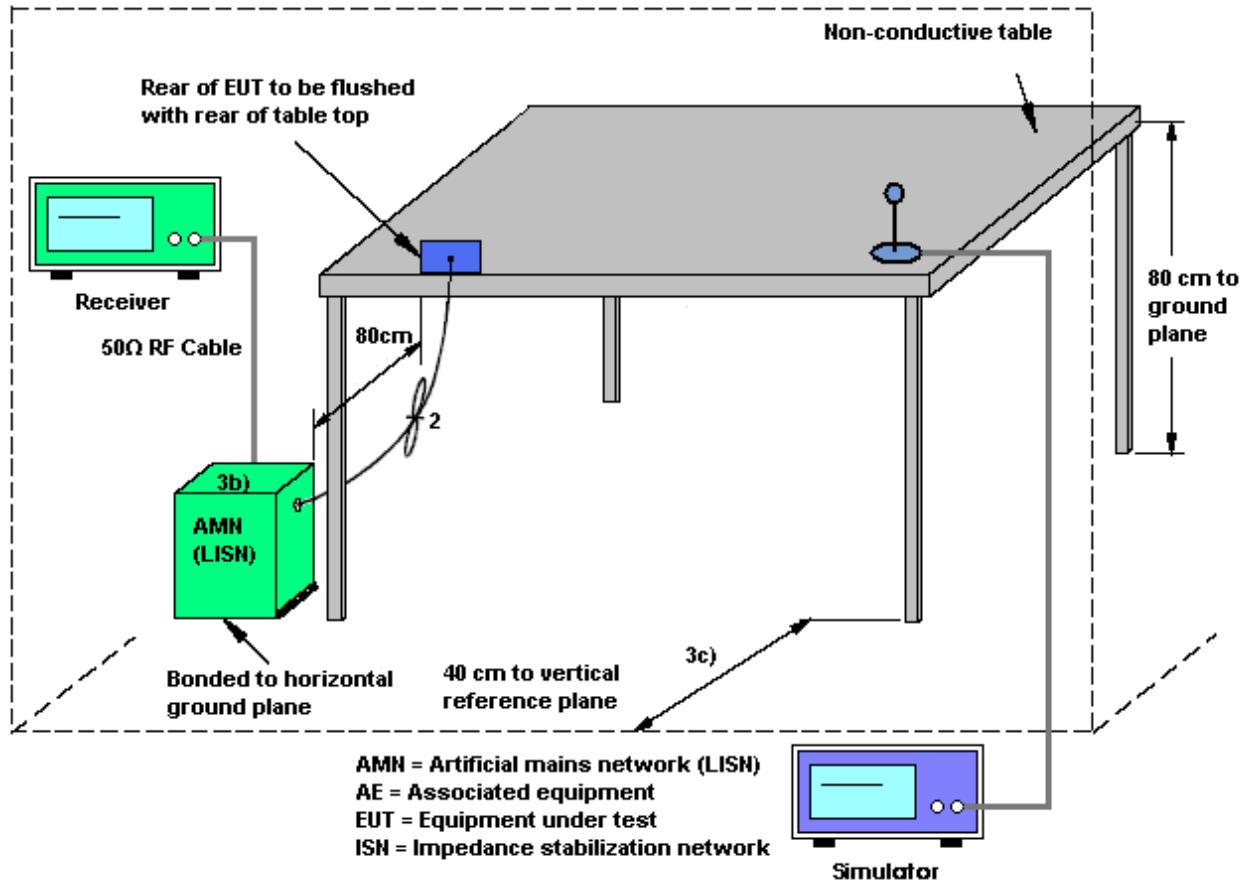



3.5.5 Test Result of AC Conducted Emission

Test Mode :	Mode 2	Temperature :	22~24°C
Test Engineer :	Eligah Wang	Relative Humidity :	37~39%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Link + WLAN (5G) Link + USB Cable 2 (Charging from Adapter 2) + Earphone + Battery 2 for Sample 2		

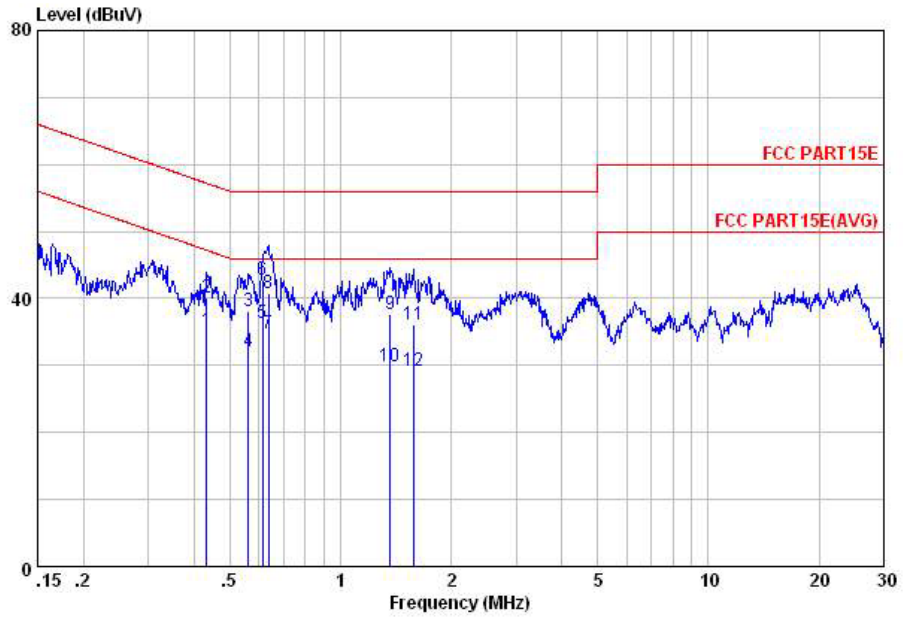


Site : C001-KS
 Condition: FCC PART15E LISN-L20130306 LINE

mode : Mode 2

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.43	35.14	-12.06	47.20	24.59	0.27	10.28	Average
2	0.43	40.14	-17.06	57.20	29.59	0.27	10.28	QP
3	0.56	38.05	-17.95	56.00	27.60	0.20	10.25	QP
4	0.56	32.05	-13.95	46.00	21.60	0.20	10.25	Average
5	0.61	36.34	-9.66	46.00	25.90	0.20	10.24	Average
6	0.61	42.74	-13.26	56.00	32.30	0.20	10.24	QP
7	0.64	34.73	-11.27	46.00	24.30	0.20	10.23	Average
8	0.64	40.73	-15.27	56.00	30.30	0.20	10.23	QP
9	1.37	37.58	-18.42	56.00	27.30	0.10	10.18	QP
10	1.37	29.88	-16.12	46.00	19.60	0.10	10.18	Average
11	1.59	36.19	-19.81	56.00	25.90	0.10	10.19	QP
12	1.59	29.19	-16.81	46.00	18.90	0.10	10.19	Average



Test Mode :	Mode 2	Temperature :	22~24°C
Test Engineer :	Eligah Wang	Relative Humidity :	37~39%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Link + WLAN (5G) Link + USB Cable 2 (Charging from Adapter 2) + Earphone + Battery 2 for Sample 2		

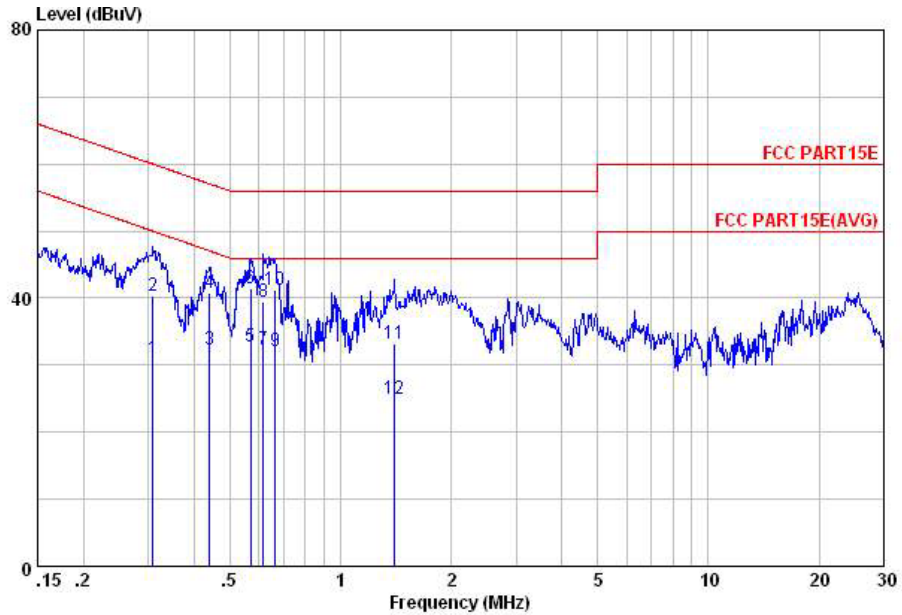

Site : C001-KS
 Condition: FCC PART15E LISN-N20130306 NEUTRAL

mode : Mode 2

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.31	30.96	-19.06	50.02	19.90	0.69	10.37	Average
2	0.31	40.36	-19.66	60.02	29.30	0.69	10.37	QP
3	0.44	32.23	-14.84	47.07	21.61	0.35	10.27	Average
4	0.44	40.73	-16.34	57.07	30.11	0.35	10.27	QP
5	0.57	32.81	-13.19	46.00	22.29	0.27	10.25	Average
6	0.57	41.41	-14.59	56.00	30.89	0.27	10.25	QP
7	0.62	32.37	-13.63	46.00	21.90	0.23	10.24	Average
8	0.62	39.37	-16.63	56.00	28.90	0.23	10.24	QP
9	0.66	32.03	-13.97	46.00	21.60	0.21	10.22	Average
10	0.66	41.23	-14.77	56.00	30.80	0.21	10.22	QP
11	1.40	33.18	-22.82	56.00	22.90	0.10	10.18	QP
12	1.40	24.88	-21.12	46.00	14.60	0.10	10.18	Average

3.6 Frequency Stability Measurement

3.6.1 Limit of Frequency Stability

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. To ensure emission at the band edge is maintained within the authorized band, those values shall be measured by radiation emissions at upper and lower frequency points, and finally compensated by frequency deviation as procedures below.
2. The EUT was operated at the maximum output power, and connected to the spectrum analyzer, which is set to maximum hold function and peak detector. The peak value of the power envelope was measured and noted. The upper and lower frequency points were respectively measured relatively 10dB lower than the measured peak value.
3. The frequency deviation was calculated by adding the upper frequency point and the lower frequency point divided by two. Those detailed values of frequency deviation are provided in table below.

3.6.4 Test Setup

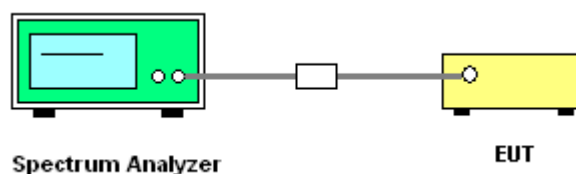



3.6.5 Test Result of Frequency Stability

Test Band :	5GHz band 1	Test Engineer :	Issac Song
-------------	-------------	-----------------	------------

Mod.	Data Rate	NTX	Channel	Freq. (MHz)	Center Frequency (MHz)	Frequency Deviation (MHz)	Frequency Stability (ppm)	Temperature (°C)	Voltage (V)
11a	6Mbps	1	36	5180	5180.000	0.000	0.00	20	3.6
11a	6Mbps	1	36	5180	5179.950	-0.050	-9.65	20	4.35
11a	6Mbps	1	36	5180	5179.950	-0.050	-9.65	20	3.75
11a	6Mbps	1	36	5180	5180.000	0.000	0.00	-10	3.75
11a	6Mbps	1	36	5180	5179.975	-0.025	-4.83	50	3.75

Note:Center Frequency = (Low Frequency + High Frequency) / 2.



3.7 Automatically Discontinue Transmission

3.7.1 Limit of Automatically Discontinue Transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

3.7.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.7.3 Test Result of Automatically Discontinue Transmission

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

3.8 Antenna Requirements

3.8.1 Standard Applicable

According to FCC 47 CFR Section 15.407(a)(1)(2) ,if transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.8.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.8.3 Antenna Gain

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

where

Each antenna is driven by no more than one spatial stream;

N_{SS} = the number of independent spatial streams of data;

N_{ANT} = the total number of antennas

$g_{j,k} = 10^{G_k / 20}$ if the k th antenna is being fed by spatial stream j , or zero if it is not;
 G_k is the gain in dBi of the k th antenna.

The EUT supports CDD mode.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain “DG” is calculated as following table.



	Chain Port 0 (dBi)	Chain Port 1 (dBi)	DG for Power (dBi)	DG for PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
Band I	0.50	0.00	3.26	3.26	0.00	0.00

Power Limit Reduction = DG(Power) – 6dBi, (min = 0)

PSD Limit Reduction = DG(PSD) – 6dBi, (min = 0)



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Dec. 28, 2013	Jul. 25, 2014~ Jul. 30, 2014	Dec. 27, 2014	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	30MHz~40GHz	Feb. 27, 2014	Jul. 25, 2014~ Jul. 30, 2014	Feb. 26, 2015	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Feb. 27, 2014	Jul. 25, 2014~ Jul. 30, 2014	Feb. 26, 2015	Conducted (TH01-KS)
Thermal Chamber	Ten Billion	TTC-B3S	TBN-9605 02	-40~+150°C	Dec. 10, 2013	Jul. 25, 2014~ Jul. 30, 2014	Dec. 09, 2014	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESCI	100534	9kHz~3GHz	Nov. 05, 2013	Jul. 29, 2014	Nov. 04, 2014	Radiation (03CH01-KS)
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Dec. 28, 2013	Jul. 29, 2014	Dec. 27, 2014	Radiation (03CH01-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 09, 2013	Jul. 29, 2014	Oct. 08, 2014	Radiation (03CH01-KS)
Bilog Antenna	SCHAFFNER	CBL6112D	23182	25MHz~2GHz	Jan. 08, 2014	Jul. 29, 2014	Jan. 07, 2015	Radiation (03CH01-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75959	1GHz~18GHz	Jan. 08, 2014	Jul. 29, 2014	Jan. 07, 2015	Radiation (03CH01-KS)
Active Horn Antenna	com-power	AHA-118	701030	1GHz~18GHz	Nov. 18, 2013	Jul. 29, 2014	Nov. 17, 2014	Radiation (03CH01-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA1702 49	15GHz~40GHz	Mar. 10, 2014	Jul. 29, 2014	Mar. 09, 2015	Radiation (03CH01-KS)
Amplifier	com-power	PA-103A	161073	1MHz~1GHz	May 04, 2014	Jul. 29, 2014	May 03, 2015	Radiation (03CH01-KS)
Amplifier	Agilent	8449B	3008A023 71	1GHz~26.5GHz	Dec. 10, 2013	Jul. 29, 2014	Dec. 09, 2014	Radiation (03CH01-KS)
AC Power Source	Chroma	61601	F1040900 04	N/A	NCR	Jul. 29, 2014	NCR	Radiation (03CH01-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Jul. 29, 2014	NCR	Radiation (03CH01-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Jul. 29, 2014	NCR	Radiation (03CH01-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	May 04, 2014	Jul. 30, 2014	May 03, 2015	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Dec. 10, 2013	Jul. 30, 2014	Dec. 09, 2014	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Dec. 10, 2013	Jul. 30, 2014	Dec. 09, 2014	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000 0811	AC 0V~300V, 45Hz~1000Hz	Nov. 12, 2013	Jul. 30, 2014	Nov. 11, 2014	Conduction (CO01-KS)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.3
---	-----

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.5
---	-----