



# FCC RF Test Report

**APPLICANT** : Lenovo (Shanghai) Electronics Technology Co., Ltd.  
**EQUIPMENT** : Portable Tablet Computer  
**BRAND NAME** : lenovo  
**MODEL NAME** : YOGA Tablet 2 Pro-1380F  
**FCC ID** : O57YT2PRO1380F  
**STANDARD** : FCC Part 15 Subpart E §15.407  
**CLASSIFICATION** : (NII) Unlicensed National Information Infrastructure

The product was received on Jul. 10, 2014 and testing was completed on Aug. 21, 2014. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



**SPORTON INTERNATIONAL L (KUNSHAN) INC.**  
No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C.



TABLE OF CONTENTS

REVISION HISTORY..... 3
SUMMARY OF TEST RESULT ..... 4
1 GENERAL DESCRIPTION ..... 5
1.1 Applicant ..... 5
1.2 Manufacturer ..... 5
1.3 Factory ..... 5
1.4 Feature of Equipment Under Test ..... 5
1.5 Product Specification of Equipment Under Test ..... 6
1.6 Modification of EUT ..... 7
1.7 Testing Location ..... 7
1.8 Applicable Standards ..... 7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 8
2.1 Carrier Frequency and Channel ..... 8
2.2 Pre-Scanned RF Power ..... 9
2.3 Test Mode ..... 11
2.4 Connection Diagram of Test System ..... 13
2.5 Support Unit used in test configuration and system ..... 14
2.6 EUT Operation Test Setup ..... 14
2.7 Measurement Results Explanation Example ..... 14
3 TEST RESULT ..... 15
3.1 26dB & 99% Bandwidth Measurement ..... 15
3.2 Maximum Conducted Output Power Measurement ..... 21
3.3 Power Spectral Density Measurement ..... 25
3.4 Unwanted Emissions Measurement ..... 30
3.5 AC Conducted Emission Measurement ..... 52
3.6 Frequency Stability Measurement ..... 56
3.7 Automatically Discontinue Transmission ..... 58
3.8 Antenna Requirements ..... 59
4 LIST OF MEASURING EQUIPMENT ..... 60
5 UNCERTAINTY OF EVALUATION ..... 61
APPENDIX A. SETUP PHOTOGRAPHS





## SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	2.1049 15.403(i)	RSS-210 A9.2	26dB & 99% Bandwidth	-	Pass	-
3.2	15.407(a)	RSS-210 A9.2	Maximum Conducted Output Power	≤ 17, 24, 30 dBm (depend on band)	Pass	-
3.3	15.407(a)	RSS-210 A9.2	Power Spectral Density	≤ 4, 11, 17 dBm (depend on band)	Pass	-
3.4	15.407(b)	RSS-210 A9.3	Unwanted Emissions	≤ -17, -27 dBm (depend on band)&15.209(a)	Pass	Under limit 2.7 dB at 32.910 MHz
3.5	15.207	RSS-Gen 7.2.4	AC Conducted Emission	15.207(a)	Pass	Under limit 8.55 dB at 0.190 MHz
3.6	15.407(g)	-	Frequency Stability	Within Operation Band	Pass	-
3.7	15.407(c)	RSS-210 A9.4	Automatically Discontinue Transmission	Discontinue Transmission	Pass	-
3.8	15.203 & 15.407(a)	RSS-210 A9.2	Antenna Requirement	N/A	Pass	-

# 1 General Description

## 1.1 Applicant

**Lenovo (Shanghai) Electronics Technology Co., Ltd.**

No. 68 Building, 199 Fenju Road, Wai Gao Qiao FTZ, Shanghai, China

## 1.2 Manufacturer

**Lenovo PC HK Limited**

23/F, Lincoln House, Taikoo Place 979 King's Road, Quarry Bay, Hong Kong

## 1.3 Factory

**LENOVO MOBILE COMMUNICATION TECHNOLOGY CO., LTD.**

NO.999 QISHAN NORTH 2ND ROAD, INFORMATION & OPTOELECTRONICS PARK, TORCH HIGH TECH, XIAMEN FUJIAN 361009, CHINA

**LENOVO MOBILE COMMUNICATION (WUHAN) CO., LTD.**

19 GAOXIN 4TH RD EAST LAKE HIGH-TECH, ZONE WUHAN HUBEI 430205, CHINA

## 1.4 Feature of Equipment Under Test

Product Feature	
Equipment	Portable Tablet Computer
Brand Name	lenovo
Model Name	YOGA Tablet 2 Pro-1380F
FCC ID	O57YT2PRO1380F
EUT supports Radios application	WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 5GHz 802.11a/n HT20/HT40 Bluetooth v3.0 + EDR/Bluetooth v4.0 LE
HW Version	H001
SW Version	S100
EUT Stage	Production Unit

### Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are two types of EUT sample 1 and sample 2, the differences between two samples are only different supplier for Battery/EMMC/Panel/Touch panel/front and back camera.

## 1.5 Product Specification of Equipment Under Test

Product Specification subjective to this standard													
<b>Tx/Rx Channel Frequency Range</b>	5180 MHz ~ 5240 MHz												
<b>Maximum Output Power</b>	802.11a : 10.31 dBm / 0.0107 W 802.11n HT20 : 11.47 dBm / 0.0140 W 802.11n HT40 : 10.46 dBm / 0.0111 W												
<b>99% Occupied Bandwidth</b>	802.11a : 17.10 MHz 802.11n HT20 : 18.00 MHz 802.11n HT40 : 36.80 MHz												
<b>Antenna Type</b>	Chain Port 0: IFA Antenna Chain Port 1: IFA Antenna												
<b>Antenna Gain</b>	Chain Port 0 : 1.10 dBi Chain Port 1 : 1.10 dBi Chain Port 0 + 1 : 1.10 dBi												
<b>Type of Modulation</b>	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)												
<b>Antenna Function Description</b>	<table border="1"> <thead> <tr> <th></th> <th>Chain Port 0</th> <th>Chain Port 1</th> </tr> </thead> <tbody> <tr> <td>802.11 a</td> <td>V</td> <td>V</td> </tr> <tr> <td>802.11 n SISO</td> <td>V</td> <td>V</td> </tr> <tr> <td>802.11 n MIMO</td> <td>V</td> <td>V</td> </tr> </tbody> </table>		Chain Port 0	Chain Port 1	802.11 a	V	V	802.11 n SISO	V	V	802.11 n MIMO	V	V
	Chain Port 0	Chain Port 1											
802.11 a	V	V											
802.11 n SISO	V	V											
802.11 n MIMO	V	V											



### 1.6 Modification of EUT

No modifications are made to the EUT during all test items.

### 1.7 Testing Location

<b>Test Site</b>	SPORTON INTERNATIONAL (KUNSHAN) INC.			
<b>Test Site Location</b>	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C. TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958			
<b>Test Site No.</b>	<b>Sporton Site No.</b>			<b>FCC Registration No.</b>
	TH01-KS	03CH01-KS	CO01-KS	149928

### 1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart E
- FCC KDB 789033 D02 General UNII Test Procedures New Rules v01
- FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ANSI C63.4-2003

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in four orthogonal panels, X, Y, Z, Laptop. The worst cases were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.

### 2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5150-5250 MHz Band 1 (U-NII-1)	36	5180	44	5220
	<b>38</b>	<b>5190</b>	<b>46</b>	<b>5230</b>
	40	5200	48	5240

**Note:** The above Frequency and Channel in boldface were 802.11n HT40.





## 2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and data rate associated with the highest power were chosen for full test in the following tables. Final Output Power equals to Measured Output Power adds the duty factor.

Channel	Frequency (MHz)	Chain Port	5GHz 802.11a Average Power (dBm)								
			Data Rate	Power vs. Data Rate							
			6M bps	Channel	9M bps	12M bps	18M bps	24M bps	36M bps	48M bps	54M bps
CH 036	5180	0	7.79	CH 036	7.78	7.74	7.59	7.60	7.62	7.72	7.67
CH 044	5220	0	6.25								
CH 048	5240	0	7.09								
CH 036	5180	1	10.21	CH 048	10.15	10.15	10.03	10.03	10.08	10.16	10.06
CH 044	5220	1	9.88								
CH 048	5240	1	10.31								

Channel	Frequency (MHz)	Chain Port	5GHz 802.11n HT-20 Average Power (dBm)								
			MCS Index	Power vs. MCS Index							
			MCS0	Channel	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
CH 036	5180	0	5.28	CH 036	5.04	5.19	5.17	5.18	5.22	5.25	5.23
CH 044	5220	0	4.88								
CH 048	5240	0	4.44								
CH 036	5180	1	11.46	CH 036	11.38	11.35	11.35	11.46	11.36	11.39	11.44
CH 044	5220	1	11.34								
CH 048	5240	1	11.43								
Channel	Frequency (MHz)	Chain Port	MCS Index MCS8	Channel	MCS9	MCS10	MCS11	MCS12	MCS13	MCS14	MCS15
CH 036	5180	0+1(0)	8.34	CH 036	8.32	8.31	8.32	8.24	8.25	8.41	8.41
CH 044	5220	0+1(0)	7.80								
CH 048	5240	0+1(0)	8.10								
CH 036	5180	0+1(1)	8.57	CH 036	8.42	8.48	8.50	8.50	8.40	8.42	8.39
CH 044	5220	0+1(1)	8.15								
CH 048	5240	0+1(1)	8.33								
CH 036	5180	0+1	11.47	CH 036	11.38	11.40	11.42	11.38	11.34	11.43	11.41
CH 044	5220	0+1	10.99								
CH 048	5240	0+1	11.23								



Channel	Frequency (MHz)	Chain Port	5GHz 802.11n HT-40 Average Power (dBm)								
			MCS Index	Power vs. MCS Index							
			MCS0	Channel	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
CH 038	5190	0	5.43	CH 038	5.38	5.22	5.34	5.09	5.40	5.27	5.21
CH 046	5230	0	5.37								
CH 038	5190	1	10.27	CH 038	10.01	9.52	9.44	9.45	9.39	9.23	9.21
CH 046	5230	1	9.89								
Channel	Frequency (MHz)	Chain Port	MCS Index	Channel	MCS9	MCS10	MCS11	MCS12	MCS13	MCS14	MCS15
			MCS8								
CH 038	5190	0+1(0)	7.41	CH 038	7.38	7.07	7.03	7.06	7.00	7.09	7.18
CH 046	5230	0+1(0)	6.91								
CH 038	5190	0+1(1)	7.50	CH 038	7.25	7.26	7.00	7.02	7.02	7.13	7.12
CH 046	5230	0+1(1)	7.13								
CH 038	5190	0+1	10.46	CH 038	10.32	10.18	10.03	10.05	10.02	10.12	10.16
CH 046	5230	0+1	10.03								

Note: Chain Port 0+1 is a calculated result from sum of the power Chain Port 0+1(0) and Chain Port 0+1(1).

## 2.3 Test Mode

Final results of test modes, data rates and test channels are shown as following table.


Test Cases				
	Test Items	Mode	Data rate	Test Channel
Conducted TCs	26dB and 99% BW Power Spectral Density	802.11a	6 Mbps	L/M/H
		802.11n HT20	MCS0/8	L/M/H
		802.11n HT40	MCS0/8	L/M/H
	20dB Occupied Bandwidth	802.11a	6 Mbps	H
		802.11n HT20	MCS0/ MCS8	H
		802.11n HT40	MCS0/ MCS8	H
	Output Power	802.11a	6 Mbps	L/M/H
		802.11n HT20	MCS0/8	L/M/H
		802.11n HT40	MCS0/8	L/M/H
	Frequency Stability	802.11a	6 Mbps	L
Radiated TCs	Radiated Band Edge	802.11a	6 Mbps	L/H
		802.11n HT20	MCS8	L/H
		802.11n HT40	MCS8	L/H
	Radiated Spurious Emission	802.11a	6 Mbps	L/M/H
		802.11n HT20	MCS8	L/M/H
		802.11n HT40	MCS8	L/M/H
AC Conducted Emission	Mode 1 : Bluetooth Link + WLAN 5GHz Link + Earphone + Battery 1 + USB Cable 1 (Charging from Adapter) for Sample 1 Mode 2 : Bluetooth Link + WLAN 5GHz Link + Earphone + Battery 2 + USB Cable 2 (Charging from Adapter) for Sample 2			
<b>Remark:</b> 1. The worst case of conducted emission is mode 2; only the test data of it was reported. 2. For Radiated Test Cases, all the test modes were performed with Adapter, Battery 1, Earphone and USB Cable 1 for Sample 1, only the worst mode (802.11an HT20 CH36) based on Sample 1 need to verify Battery 2 and USB Cable 2 for Sample 2.				




Ch. #		5GHz Band I : 5150-5250 MHz		
		802.11a	802.11n HT20	802.11n HT40
L	Low	36	36	38
M	Middle	44	44	-
H	High	48	48	46

## 2.4 Connection Diagram of Test System

### <WLAN Tx Mode>

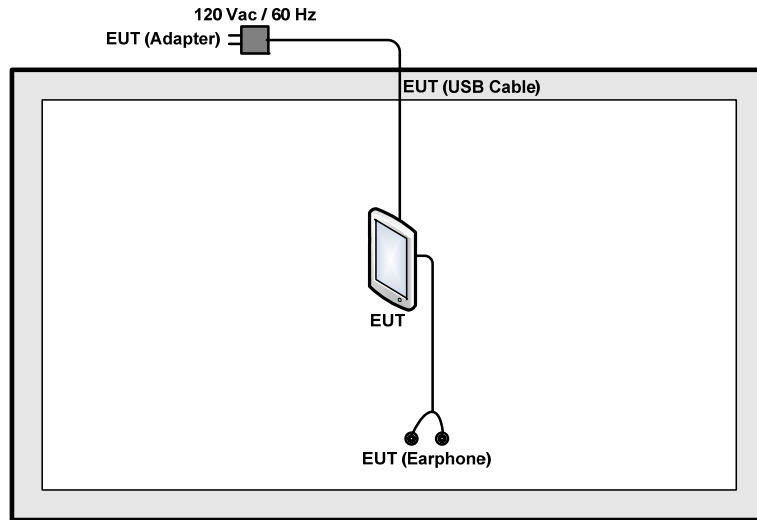

### <AC Conducted Emission Mode>

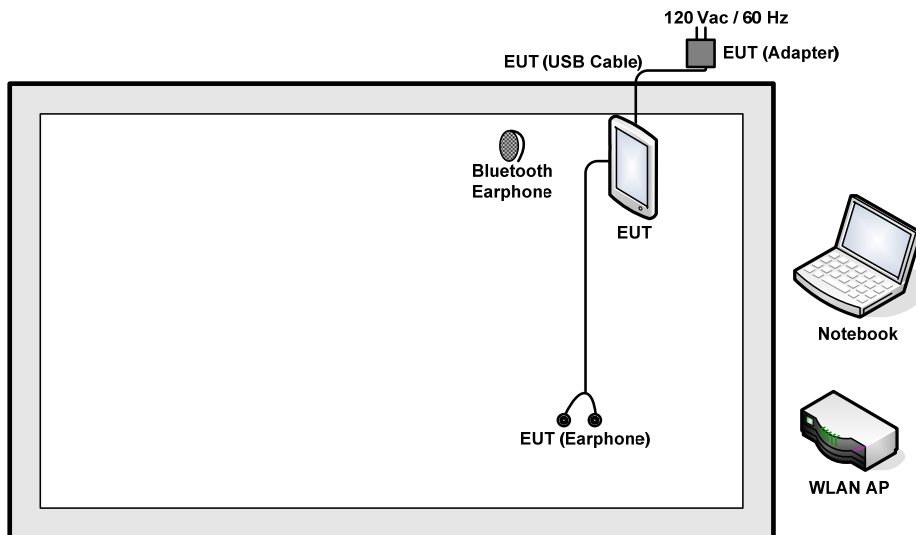

## 2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	D-Link	DIR-855	KA2DIR855A2	N/A	Unshielded, 1.8 m
2.	DC Power Supply	GWINSTEK	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
3.	Notebook	Lenovo	G480	N/A	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	Bluetooth Earphone	Lenovo	LBH505	N/A	N/A	N/A

## 2.6 EUT Operation Test Setup

For WLAN function, the engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

## 2.7 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss.

*Offset = RF cable loss.*

Following shows an offset computation example with cable loss 7.1 dB.

*Offset(dB) = RF cable loss(dB) = 7.1 (dB)*

### 3 Test Result

#### 3.1 26dB & 99% Bandwidth Measurement

##### 3.1.1 Description of 26dB & 99% Occupied Bandwidth

This section is for reporting purpose only.

There is no restriction limits for bandwidth.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01.  
Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission.  
Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1MHz and set the Video bandwidth (VBW)  $\geq 3 * RBW$ .
8. Measure and record the results in the test report.

##### 3.1.4 Test Setup

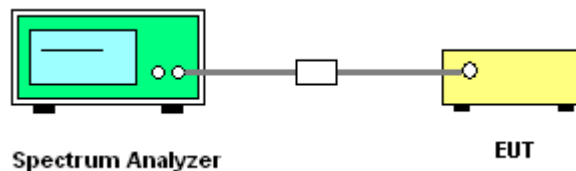


**3.1.5 Test Result of 99% Occupied Bandwidth**

<b>Test Band :</b>	5GHz band 1	<b>Temperature :</b>	23~24°C
<b>Test Engineer :</b>	Adonis Li	<b>Relative Humidity :</b>	47~48%

Mod.	Data Rate	N <sub>TX</sub>	Channel	Freq. (MHz)	99% Bandwidth (MHz)		IC 99% Bandwidth EIRP Limit (dBm)	
					Chain Port 0	Chain Port 1	Chain Port 0	Chain Port 1
11a	6Mbps	1	36	5180	-	16.95	-	22.29
11a	6Mbps	1	44	5220	-	17.10	-	22.33
11a	6Mbps	1	48	5240	-	17.10	-	22.33
HT20	MCS0	1	36	5180	-	17.85	-	22.52
HT20	MCS0	1	44	5220	-	17.85	-	22.52
HT20	MCS0	1	48	5240	-	17.95	-	22.54
HT40	MCS0	1	38	5190	-	36.80	-	23.01
HT40	MCS0	1	46	5230	-	36.60	-	23.01
HT20	MCS8	2	36	5180	17.95	17.95	22.54	
HT20	MCS8	2	44	5220	17.85	18.00	22.52	
HT20	MCS8	2	48	5240	17.95	18.00	22.54	
HT40	MCS8	2	38	5190	36.80	36.60	23.01	
HT40	MCS8	2	46	5230	36.60	36.60	23.01	



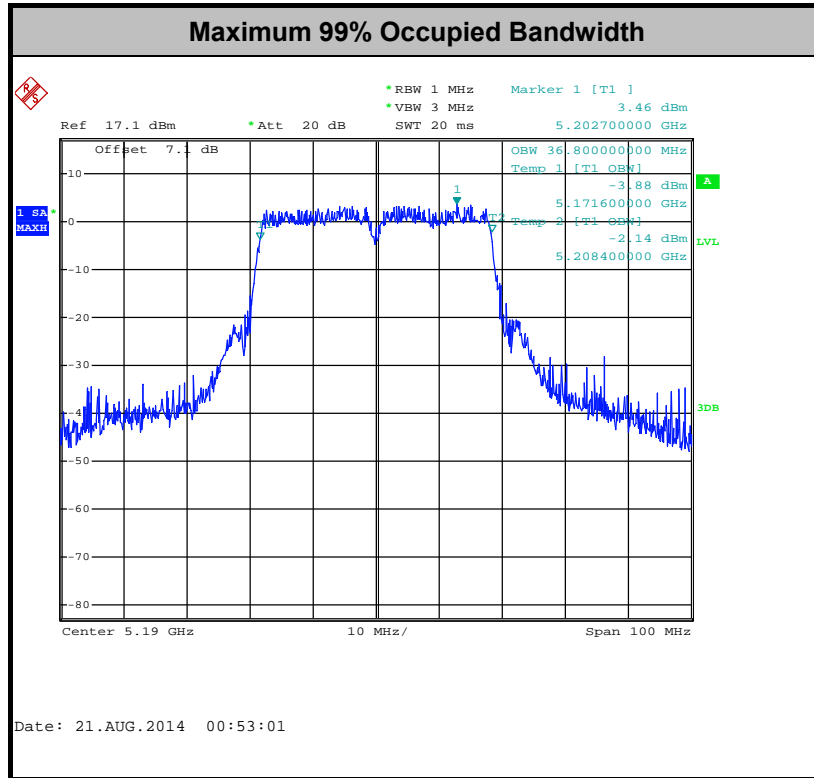



3.1.6 Test Result of 20dB Occupied Bandwidth


Mod.	Data Rate	NTX	Channel	Freq. (MHz)	20dB Bandwidth (MHz)		20dB Bandwidth Upper Frequency (FH) (MHz)		Upper Limit Line (MHz)	Pass/Fail
					Chain Port 0	Chain Port 1	Chain Port 0	Chain Port 1		
11a	6Mbps	1	48	5240	-	19.80	-	5249.85	5250	Pass
HT20	MCS0	1	48	5240	-	19.85	-	5249.85		Pass
HT40	MCS0	1	46	5230	-	40.05	-	5249.98		Pass
HT20	MCS8	2	48	5240	19.95	-	5249.95	-		Pass
HT40	MCS8	2	46	5230	39.96	-	5249.89	-		Pass



Number of TX = 1


20dB Occupied Bandwidth

802.11a CH48 5240MHz for Chain 1

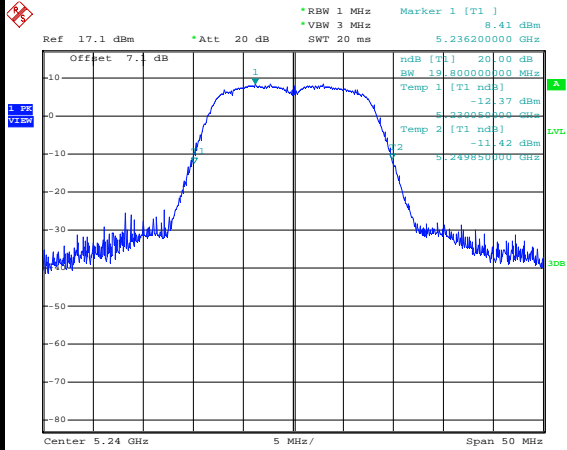


Date: 21.AUG.2014 04:35:37

802.11n HT20 CH48 5240MHz for Chain 1

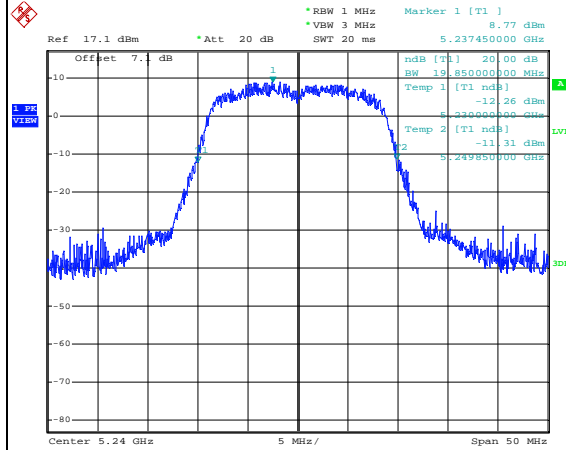

Date: 21.AUG.2014 04:42:54


802.11n HT40 CH46 5230MHz for Chain 1

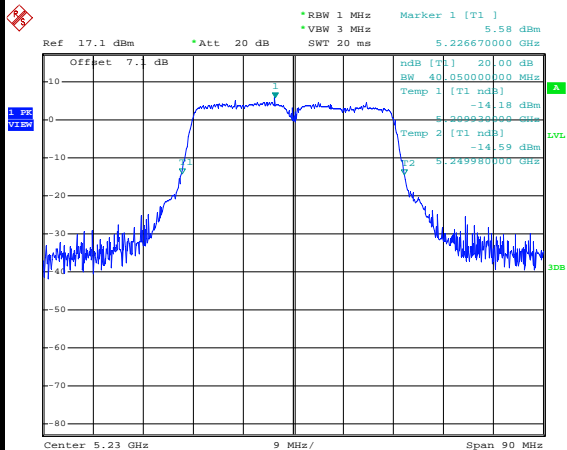

Date: 21.AUG.2014 00:54:53



Number of TX = 2

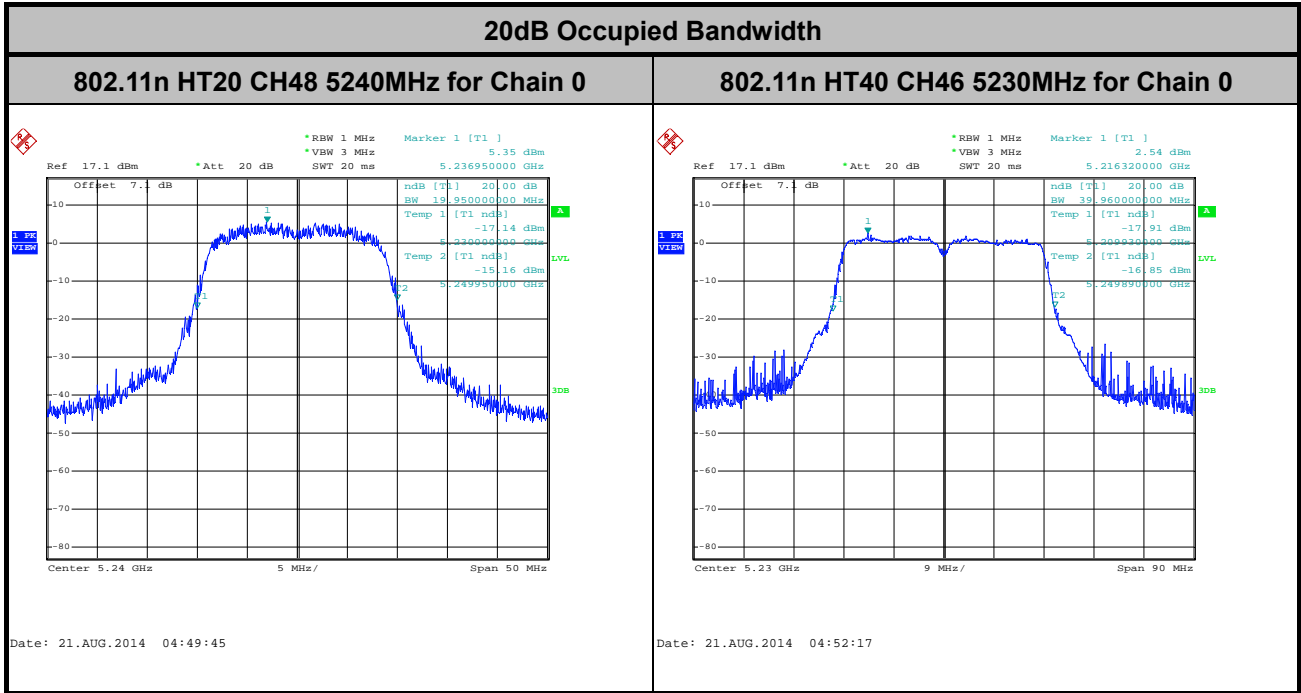



## **3.2 Maximum Conducted Output Power Measurement**

### **3.2.1 Limit of Maximum Conducted Output Power**

#### **<FCC 14-30 CFR 15.407>**

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW.

#### **<IC RSS-210 Annex 9>**

For the 5.15–5.25 GHz band, the maximum e.i.r.p. shall not exceed 200 mW or  $10 + 10 \log_{10} B$ , dBm, whichever power is less. B is the 99% emission bandwidth in MHz.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

### **3.2.2 Measuring Instruments**

The measuring equipment is listed in the section 4 of this test report.


### 3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor,  $10 \log(1/x)$ , where x is the duty cycle.

### 3.2.4 Test Setup

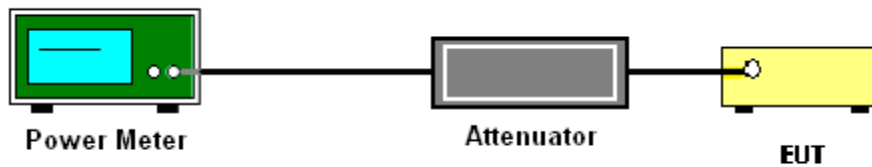



3.2.5 Test Result of Maximum Conducted Output Power

Test Band :	5GHz band 1	Temperature :	23~24°C
Test Engineer :	Adonis Li	Relative Humidity :	47~48%

Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Power Limit (dBm)		DG (dBi)		Pass /Fail
					Chain Port 0	Chain Port 1	Chain Port 0	Chain Port 1	Sum Power	Chain Port 0	Chain Port 1	Chain Port 0	Chain Port 1	
11a	6Mbps	1	36	5180	0.20	0.20	7.79	10.21	-	24.00	24.00	1.10	1.10	Pass
11a	6Mbps	1	44	5220	0.20	0.20	6.25	9.88	-	24.00	24.00	1.10	1.10	Pass
11a	6Mbps	1	48	5240	0.20	0.20	7.09	10.31	-	24.00	24.00	1.10	1.10	Pass
HT20	MCS0	1	36	5180	0.22	0.21	5.28	11.46	-	24.00	24.00	1.10	1.10	Pass
HT20	MCS0	1	44	5220	0.22	0.21	4.88	11.43	-	24.00	24.00	1.10	1.10	Pass
HT20	MCS0	1	48	5240	0.22	0.21	4.44	11.34	-	24.00	24.00	1.10	1.10	Pass
HT40	MCS0	1	38	5190	0.22	0.21	5.43	10.27	-	24.00	24.00	1.10	1.10	Pass
HT40	MCS0	1	46	5230	0.22	0.21	5.37	9.89	-	24.00	24.00	1.10	1.10	Pass
HT20	MCS8	2	36	5180	0.38	0.45	8.34	8.57	11.47	24.00	24.00	1.10	1.10	Pass
HT20	MCS8	2	44	5220	0.38	0.45	7.80	8.15	10.99	24.00	24.00	1.10	1.10	Pass
HT20	MCS8	2	48	5240	0.38	0.45	8.10	8.33	11.23	24.00	24.00	1.10	1.10	Pass
HT40	MCS8	2	38	5190	0.42	0.41	7.41	7.50	10.46	24.00	24.00	1.10	1.10	Pass
HT40	MCS8	2	46	5230	0.42	0.41	6.91	7.13	10.03	24.00	24.00	1.10	1.10	Pass

Note:

- Final Output Power equals to Measured Output Power adds the duty factor.
- Sum Power is a calculated result from sum of the Chain Port 0 and Chain Port 1.



Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			IC Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)		Pass /Fail
					Chain Port 0	Chain Port 1	Chain Port 0	Chain Port 1	Sum Power	Chain Port 0	Chain Port 1	Chain Port 0	Chain Port 1	Chain Port 0	Chain Port 1	
11a	6Mbps	1	36	5180	0.20	0.20	7.79	10.21	-	21.19	1.10	1.10	-	22.29	Pass	
11a	6Mbps	1	44	5220	0.20	0.20	6.25	9.88	-	21.23	1.10	1.10	-	22.33	Pass	
11a	6Mbps	1	48	5240	0.20	0.20	7.09	10.31	-	21.23	1.10	1.10	-	22.33	Pass	
HT20	MCS0	1	36	5180	0.22	0.21	5.28	11.46	-	21.42	1.10	1.10	-	22.52	Pass	
HT20	MCS0	1	44	5220	0.22	0.21	4.88	11.43	-	21.42	1.10	1.10	-	22.52	Pass	
HT20	MCS0	1	48	5240	0.22	0.21	4.44	11.34	-	21.44	1.10	1.10	-	22.54	Pass	
HT40	MCS0	1	38	5190	0.22	0.21	5.43	10.27	-	21.91	1.10	1.10	-	23.01	Pass	
HT40	MCS0	1	46	5230	0.22	0.21	5.37	9.89	-	21.91	1.10	1.10	-	23.01	Pass	
HT20	MCS8	2	36	5180	0.38	0.45	8.34	8.57	11.47	21.44	1.10	1.10	22.54	Pass		
HT20	MCS8	2	44	5220	0.38	0.45	7.80	8.15	10.99	21.42	1.10	1.10	22.52	Pass		
HT20	MCS8	2	48	5240	0.38	0.45	8.10	8.33	11.23	21.44	1.10	1.10	22.54	Pass		
HT40	MCS8	2	38	5190	0.42	0.41	7.41	7.50	10.46	21.91	1.10	1.10	23.01	Pass		
HT40	MCS8	2	46	5230	0.42	0.41	6.91	7.13	10.03	21.91	1.10	1.10	23.01	Pass		

**Note:**

- Final Output Power equals to Measured Output Power adds the duty factor.
- Sum Power is a calculated result from sum of the power Chain Port 0 and Chain Port 1.
- For the band 5150-5250 MHz, the maximum average EIRP output power shall not exceed lesser of 200 mW (23dBm) or 10 dBm + 10log (B), where B is 99%OBW for IC.



### **3.3 Power Spectral Density Measurement**

#### **3.3.1 Limit of Power Spectral Density**

**<FCC 14-30 CFR 15.407>**

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

**<IC RSS-210 Annex 9>**

For the 5.15–5.25 GHz band, the e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **3.3.2 Measuring Instruments**

The measuring equipment is listed in the section 4 of this test report.



### 3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01.  
Section F) Maximum power spectral density.

#### # Method SA-2 #


(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

1. The testing follows Method SA-2 of FCC KDB 789033 D02 General UNII Test Procedures New Rules v01.
  - Measure the duty cycle.
  - Set span to encompass the entire emission bandwidth (EBW) of the signal.
  - Set RBW = 1 MHz.
  - Set VBW  $\geq$  3 MHz.
  - Number of points in sweep  $\geq$  2 Span / RBW.
  - Sweep time = auto.
  - Detector = RMS
  - Trace average at least 100 traces in power averaging mode.
  - Add  $10 \log(1/x)$ , where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add  $10 \log(1/0.25) = 6$  dB if the duty cycle is 25 percent.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
4. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (1): Measure and sum the spectra across the outputs.

The total final Power Spectral Density is from a device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points, the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.

### 3.3.4 Test Setup

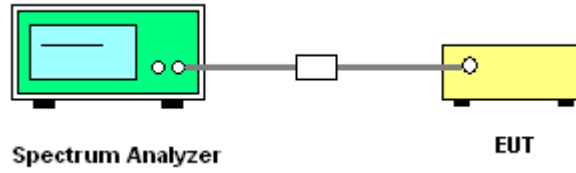




3.3.5 Test Result of Power Spectral Density

Test Band :	5GHz band 1	Temperature :	23~24°C
Test Engineer :	Adonis Li	Relative Humidity :	47~48%

Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density (dBm/MHz)			Average PSD Limit (dBm)		DG (dBi)		Pass /Fail
					Chain Port 0	Chain Port 1	Chain Port 0	Chain Port 1	Sum Power	Chain Port 0	Chain Port 1	Chain Port 0	Chain Port 1	
11a	6Mbps	1	36	5180	0.20	0.20	-	-0.86	-	11.00	11.00	1.10	1.10	Pass
11a	6Mbps	1	44	5220	0.20	0.20	-	-0.82	-	11.00	11.00	1.10	1.10	Pass
11a	6Mbps	1	48	5240	0.20	0.20	-	-0.38	-	11.00	11.00	1.10	1.10	Pass
HT20	MCS0	1	36	5180	0.22	0.21	-	0.20	-	11.00	11.00	1.10	1.10	Pass
HT20	MCS0	1	44	5220	0.22	0.21	-	0.15	-	11.00	11.00	1.10	1.10	Pass
HT20	MCS0	1	48	5240	0.22	0.21	-	0.64	-	11.00	11.00	1.10	1.10	Pass
HT40	MCS0	1	38	5190	0.22	0.21	-	-4.65	-	11.00	11.00	1.10	1.10	Pass
HT40	MCS0	1	46	5230	0.22	0.21	-	-4.04	-	11.00	11.00	1.10	1.10	Pass
HT20	MCS8	2	36	5180	0.38	0.45	-	-	-0.33	11.00	11.00	4.11	4.11	Pass
HT20	MCS8	2	44	5220	0.38	0.45	-	-	-0.34	11.00	11.00	4.11	4.11	Pass
HT20	MCS8	2	48	5240	0.38	0.45	-	-	-0.22	11.00	11.00	4.11	4.11	Pass
HT40	MCS8	2	38	5190	0.42	0.41	-	-	-4.85	11.00	11.00	4.11	4.11	Pass
HT40	MCS8	2	46	5230	0.42	0.41	-	-	-4.14	11.00	11.00	4.11	4.11	Pass

Note: Sum PSD is a bin-by-bin combined result of Chain Port 0 and Chain Port 1.

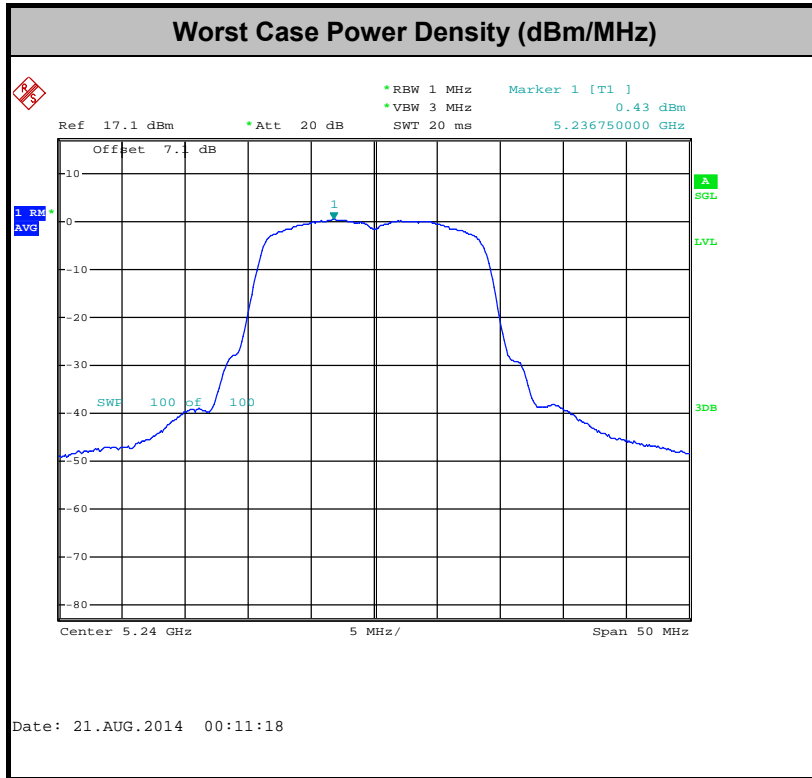

Note: Average Power Density (dB) = Measured value+ Duty Factor

### 3.4 Unwanted Emissions Measurement

This section as specified in FCC Part 15.407(b) is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement. The unwanted emissions shall comply with 15.407(b)(1) to (6), and restricted bands per FCC Part15.205.

#### 3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz.
- (2) Unwanted spurious emissions fallen in restricted bands per FCC Part15.205 shall comply with the general field strength limits set forth in § 15.209 as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

**Note:** The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

EIRP (dBm)	Field Strength at 3m (dBμV/m)
-17	78.3
- 27	68.3

- (3) KDB789033 v01 G)2)c) As specified in 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in 15.407(b)(4)). However, an out-of-band emission that complies with both the average and peak limits of 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz peak emission limit.

#### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.



### 3.4.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01. Section G) Unwanted emissions measurement.

(1) Procedure for Unwanted Emissions Measurements Below 1000MHz

- RBW = 120 kHz
- VBW = 300 kHz
- Detector = Peak
- Trace mode = max hold

(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW ≥ 3 MHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold

(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz


- RBW = 1 MHz
- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- $VBW \geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Antenna	Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
0	802.11a	95.392	2.070	0.483	1kHz
1	802.11a	95.480	2.070	0.483	1kHz
0+1	802.11n HT20	91.667	0.990	1.010	3kHz
0+1	802.11n HT40	91.042	0.996	1.004	3kHz

2. The EUT was placed on a rotatable table top 0.8 meter above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.


### 3.4.4 Test Setup

For radiated emissions below 30MHz

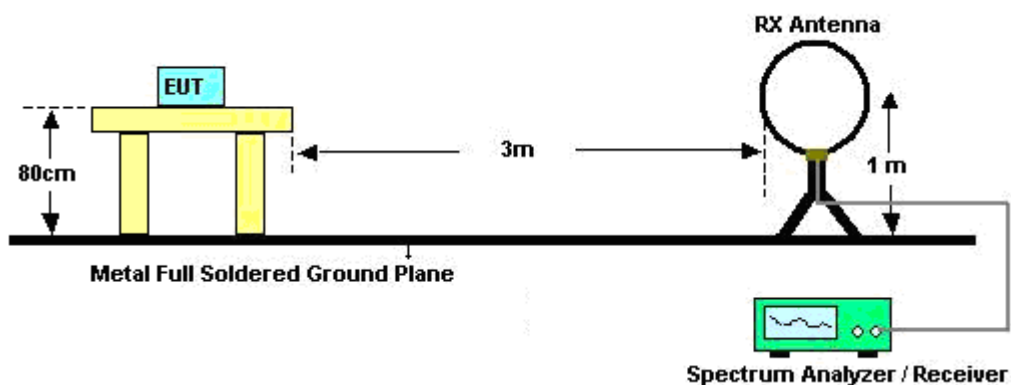




For radiated emissions from 30MHz to 1GHz

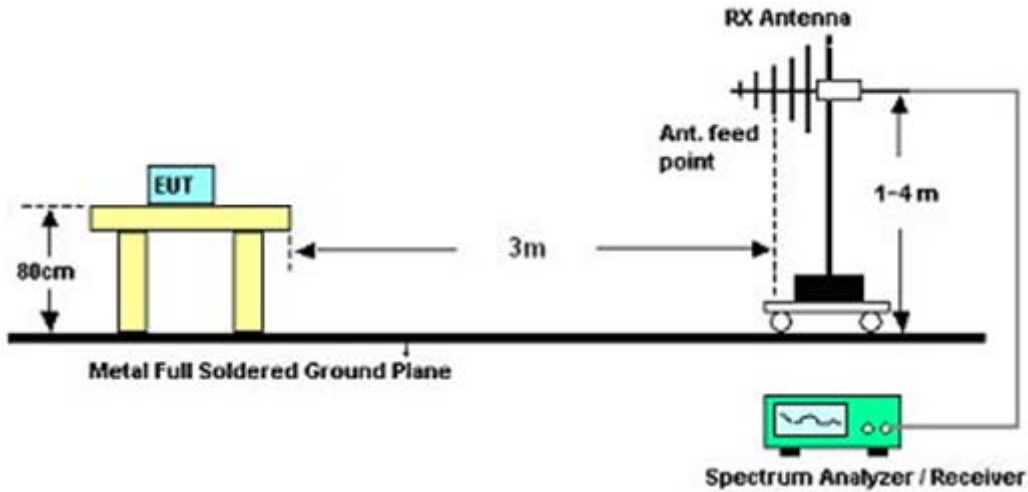

For radiated emissions above 1GHz

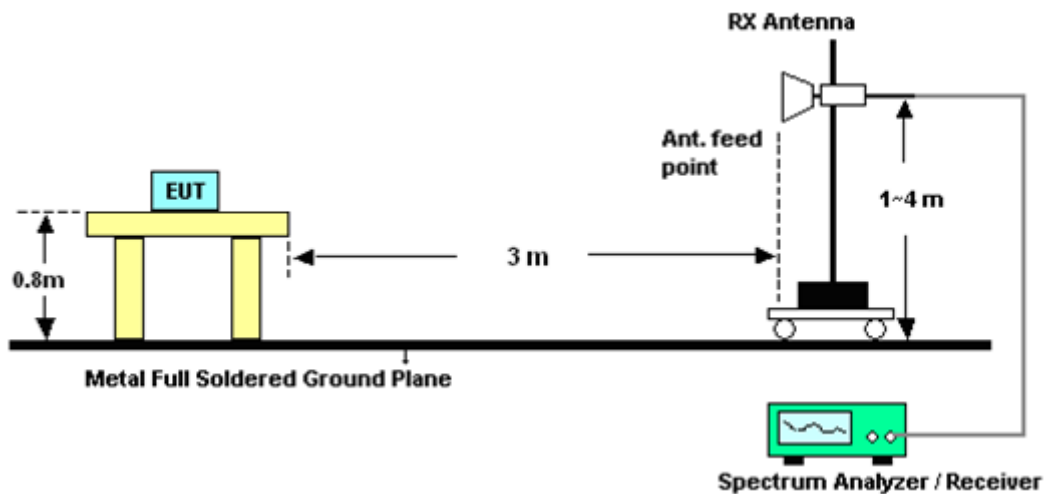

### 3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.



### 3.4.6 Test Result of Radiated Band Edges

<Sample 1>

Test Mode :	802.11a - Chain Port 0	Temperature :	22~23°C
Test Channel :	36	Relative Humidity :	42~43%
Test Engineer :	Simon Lu		

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5110.60	52.97	-21.03	74	52.54	34.29	3.87	37.73	102	318	Peak
5111.30	38.87	-15.13	54	38.44	34.29	3.87	37.73	102	318	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5101.30	54.09	-19.91	74	53.62	34.28	3.86	37.67	102	235	Peak
5104.80	40.32	-13.68	54	39.85	34.28	3.86	37.67	102	235	Average

Test Mode :	802.11a - Chain Port 0	Temperature :	22~23°C
Test Channel :	48	Relative Humidity :	42~43%
Test Engineer :	Simon Lu		

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5351.65	51.87	-22.13	74	52.55	34.4	4	39.08	200	65	Peak
5383.75	38.41	-15.59	54	39.3	34.4	4.02	39.31	200	65	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5360.60	52.62	-21.38	74	53.41	34.4	4.01	39.2	100	237	Peak
5373.65	38.61	-15.39	54	39.4	34.4	4.01	39.2	100	237	Average



Test Mode :	802.11a - Chain Port 1	Temperature :	22~23°C
Test Channel :	36	Relative Humidity :	42~43%
Test Engineer :	Simon Lu		

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5103.60	53.64	-20.36	74	53.17	34.28	3.86	37.67	155	292	Peak
5102.50	39.98	-14.02	54	39.51	34.28	3.86	37.67	155	292	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5103.40	56.26	-17.74	74	55.79	34.28	3.86	37.67	137	334	Peak
5104.25	42.73	-11.27	54	42.26	34.28	3.86	37.67	137	334	Average

Test Mode :	802.11a - Chain Port 1	Temperature :	22~23°C
Test Channel :	48	Relative Humidity :	42~43%
Test Engineer :	Simon Lu		

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5362.50	52.51	-21.49	74	53.3	34.4	4.01	39.2	141	325	Peak
5398.70	38.66	-15.34	54	39.65	34.4	4.03	39.42	141	325	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5350.35	54.07	-19.93	74	54.75	34.4	4	39.08	121	325	Peak
5350.50	39.73	-14.27	54	40.41	34.4	4	39.08	121	325	Average



Test Mode :	802.11n HT20 - Chain Port 0+1	Temperature :	22~23°C
Test Channel :	36	Relative Humidity :	42~43%
Test Engineer :	Simon Lu		

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5101.85	57.02	-16.98	74	56.55	34.28	3.86	37.67	150	300	Peak
5104.45	43.73	-10.27	54	43.26	34.28	3.86	37.67	150	300	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5144.40	53.61	-20.39	74	53.25	34.32	3.9	37.86	100	250	Peak
5102.80	40.09	-13.91	54	39.62	34.28	3.86	37.67	100	250	Average

Test Mode :	802.11n HT20 - Chain Port 0+1	Temperature :	22~23°C
Test Channel :	48	Relative Humidity :	42~43%
Test Engineer :	Simon Lu		

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5355.10	48.82	-25.18	74	49.5	34.4	4	39.08	170	19	Peak
5351.80	35.48	-18.52	54	36.16	34.4	4	39.08	170	19	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5358.30	46.93	-27.07	74	47.6	34.4	4.01	39.08	194	76	Peak
5365.85	34.36	-19.64	54	35.15	34.4	4.01	39.2	194	76	Average



Test Mode :	802.11n HT40 - Chain Port 0+1	Temperature :	22~23°C
Test Channel :	38	Relative Humidity :	42~43%
Test Engineer :	Simon Lu		

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5149.20	63.08	-10.92	74	62.72	34.32	3.9	37.86	100	328	Peak
5148.30	41.13	-12.87	54	40.77	34.32	3.9	37.86	100	328	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5149.35	59.53	-14.47	74	59.17	34.32	3.9	37.86	178	266	Peak
5149.95	40.9	-13.10	54	40.54	34.32	3.9	37.86	178	266	Average

Test Mode :	802.11n HT40 - Chain Port 0+1	Temperature :	22~23°C
Test Channel :	46	Relative Humidity :	42~43%
Test Engineer :	Simon Lu		

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5143.75	53.63	-20.37	74	53.27	34.32	3.9	37.86	100	335	Peak
5146.75	40.39	-13.61	54	40.03	34.32	3.9	37.86	100	335	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5144.30	52.93	-21.07	74	52.57	34.32	3.9	37.86	189	262	Peak
5124.35	39.76	-14.24	54	39.38	34.31	3.87	37.8	189	262	Average



<Sample 2>

Test Mode :	802.11 n HT20 - Chain Port 0+1	Temperature :	22~23°C
Test Channel :	36	Relative Humidity :	42~43%
Test Engineer :	Simon Lu		

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5104.15	56.47	-17.53	74	56	34.28	3.86	37.67	100	265	Peak
5103.05	42.46	-11.54	54	41.99	34.28	3.86	37.67	100	265	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5146.15	50.84	-23.16	74	50.48	34.32	3.9	37.86	178	4	Peak
5103.2	36.85	-17.15	54	36.38	34.28	3.86	37.67	178	4	Average



3.4.7 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic)

<Sample 1>

<b>Test Mode :</b>	802.11a - Chain Port 0	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	36	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 5180 MHz is fundamental signal which can be ignored. 2. 10359 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5180	90.61	-	-	90.34	34.35	3.92	38	102	318	Peak
5180	79.18	-	-	78.91	34.35	3.92	38	102	318	Average
10359	31.56	-42.44	74	61.02	1.46	5.85	36.77	100	31	Peak

<b>Test Mode :</b>	802.11a - Chain Port 0	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	36	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 5180 MHz is fundamental signal which can be ignored. 2. 10359 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5180	100.67	-	-	100.4	34.35	3.92	38	102	235	Peak
5180	88.5	-	-	88.23	34.35	3.92	38	102	235	Average
10359	33.69	-40.31	74	63.15	1.46	5.85	36.77	125	40	Peak



<b>Test Mode :</b>	802.11a - Chain Port 0	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	44	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 5220 MHz is fundamental signal which can be ignored. 2. 10440 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5220	91.79	-	-	91.65	34.37	3.95	38.18	200	69	Peak
5220	80.33	-	-	80.19	34.37	3.95	38.18	200	69	Average
10440	32.33	-41.67	74	61.73	1.53	5.89	36.82	112	63	Peak

<b>Test Mode :</b>	802.11a - Chain Port 0	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	44	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 5220 MHz is fundamental signal which can be ignored. 2. 10440 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5220	100.96	-	-	100.82	34.37	3.95	38.18	100	259	Peak
5220	88.83	-	-	88.69	34.37	3.95	38.18	100	259	Average
10440	31.9	-42.1	74	61.3	1.53	5.89	36.82	100	49	Peak





<b>Test Mode :</b>	802.11a - Chain Port 0	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	48	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 5240 MHz is fundamental signal which can be ignored. 2. 10479 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5240	92.33	-	-	92.28	34.39	3.95	38.29	200	65	Peak
5240	80.04	-	-	79.99	34.39	3.95	38.29	200	65	Average
10479	31.07	-42.93	74	60.51	1.56	5.91	36.91	120	54	Peak

<b>Test Mode :</b>	802.11a - Chain Port 0	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	48	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 5240 MHz is fundamental signal which can be ignored. 2. 10479 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5240	101.76	-	-	101.71	34.39	3.95	38.29	100	237	Peak
5240	89.69	-	-	89.64	34.39	3.95	38.29	100	237	Average
10479	31.56	-42.44	74	61	1.56	5.91	36.91	100	98	Peak

<b>Test Mode :</b>	802.11a - Chain Port 1	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	36	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 5180 MHz is fundamental signal which can be ignored. 2. 10359 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5180	96.47	-	-	96.2	34.35	3.92	38	155	292	Peak
5180	84.04	-	-	83.77	34.35	3.92	38	155	292	Average
10359	30.07	-43.93	74	59.53	1.46	5.85	36.77	100	35	Peak

<b>Test Mode :</b>	802.11a - Chain Port 1	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	36	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 5180 MHz is fundamental signal which can be ignored. 2. 10359 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5106	56.1	-17.9	74	55.68	34.29	3.86	37.73	137	334	Peak
5106	42.83	-11.17	54	42.41	34.29	3.86	37.73	137	334	Average
5180	102.01	-	-	101.74	34.35	3.92	38	137	334	Peak
5180	89.89	-	-	89.62	34.35	3.92	38	137	334	Average
10359	31.08	-42.92	74	60.54	1.46	5.85	36.77	120	345	Peak



<b>Test Mode :</b>	802.11a - Chain Port 1	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	44	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 5220 MHz is fundamental signal which can be ignored. 2. 10440 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5220	94.7	-	-	94.56	34.37	3.95	38.18	138	254	Peak
5220	83.4	-	-	83.26	34.37	3.95	38.18	138	254	Average
10440	30.44	-43.56	74	59.84	1.53	5.89	36.82	100	351	Peak

<b>Test Mode :</b>	802.11a - Chain Port 1	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	44	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 5220 MHz is fundamental signal which can be ignored. 2. 10440/5296 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5142	55.8	-18.2	74	55.46	34.32	3.88	37.86	123	329	Peak
5142	42	-12	54	41.66	34.32	3.88	37.86	123	329	Average
5220	99.72	-	-	99.58	34.37	3.95	38.18	123	329	Peak
5220	89.81	-	-	89.67	34.37	3.95	38.18	123	329	Average
5296	56.32	-17.68	74	56.68	34.4	3.98	38.74	123	329	Peak
5296	42.52	-11.48	54	42.88	34.4	3.98	38.74	123	329	Average
10440	30.16	-43.84	74	59.56	1.53	5.89	36.82	101	247	Peak



<b>Test Mode :</b>	802.11a - Chain Port 1	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	48	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 5240 MHz is fundamental signal which can be ignored. 2. 10479 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5240	93.77	-	-	93.72	34.39	3.95	38.29	141	325	Peak
5240	81.43	-	-	81.38	34.39	3.95	38.29	141	325	Average
10479	29.16	-44.84	74	58.6	1.56	5.91	36.91	101	75	Peak

<b>Test Mode :</b>	802.11a - Chain Port 1	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	48	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 5240 MHz is fundamental signal which can be ignored. 2. 10479/5316 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5240	100.38	-	-	100.33	34.39	3.95	38.29	121	325	Peak
5240	88.69	-	-	88.64	34.39	3.95	38.29	121	325	Average
5316	56.67	-17.33	74	57.14	34.4	3.99	38.86	121	325	Peak
5316	43.06	-10.94	54	43.53	34.4	3.99	38.86	121	325	Average
10479	28.64	-45.36	74	58.08	1.56	5.91	36.91	101	94	Peak



<b>Test Mode :</b>	802.11n HT20 - Chain Port 0+1	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	36	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 5180 MHz is fundamental signal which can be ignored. 2. 10359 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
83.35	27.18	-12.82	40	51.72	7.5	0.6	32.64	-	-	Peak
119.24	37.44	-6.06	43.5	57.62	11.88	0.58	32.64	100	0	Peak
152.22	29.64	-13.86	43.5	51.44	9.94	0.82	32.56	-	-	Peak
242.43	30.08	-15.92	46	50.47	11.24	0.84	32.47	-	-	Peak
359.8	29.96	-16.04	46	46.71	14.7	0.9	32.35	-	-	Peak
960.23	29.3	-24.7	54	38.53	20.76	1.72	31.71	-	-	Peak
4962	59.68	-14.32	74	58.85	34.2	3.78	37.15	100	268	Peak
4962	44.77	-9.23	54	43.94	34.2	3.78	37.15	100	268	Average
5180	102.66	-	-	102.39	34.35	3.92	38	150	300	Peak
5180	91.01	-	-	90.74	34.35	3.92	38	150	300	Average
5394	61.7	-12.3	74	62.59	34.4	4.02	39.31	167	269	Peak
5394	46.63	-7.37	54	47.52	34.4	4.02	39.31	167	269	Average
10359	31.29	-42.71	74	60.75	1.46	5.85	36.77	100	27	Peak



<b>Test Mode :</b>	802.11n HT20 - Chain Port 0+1	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	36	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 5180 MHz is fundamental signal which can be ignored. 2. 10359 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
32.91	37.3	-2.7	40	53.48	16.27	0.19	32.64	124	302	QP
44.55	36.48	-3.52	40	58.64	10.2	0.31	32.67	164	345	QP
53.28	34.11	-5.89	40	59.76	6.65	0.31	32.61	-	-	Peak
101.78	34.03	-9.47	43.5	55.33	10.9	0.43	32.63	-	-	Peak
304.51	28.64	-17.36	46	47.06	13.16	0.81	32.39	-	-	Peak
456.8	29.63	-16.37	46	44	16.58	1.21	32.16	-	-	Peak
5180	97.58	-	-	97.31	34.35	3.92	38	100	250	Peak
5180	84.84	-	-	84.57	34.35	3.92	38	100	250	Average
10359	31	-43	74	60.46	1.46	5.85	36.77	100	58	Peak

<b>Test Mode :</b>	802.11n HT20 - Chain Port 0+1	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	44	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 5220 MHz is fundamental signal which can be ignored. 2. 10440 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5000	57.36	-16.64	74	56.64	34.2	3.79	37.27	165	121	Peak
5000	42.94	-11.06	54	42.22	34.2	3.79	37.27	165	121	Average
5220	102.3	-	-	102.16	34.37	3.95	38.18	165	121	Peak
5220	89.73	-	-	89.59	34.37	3.95	38.18	165	121	Average
5438	60.07	-13.93	74	60.9	34.4	4.01	39.24	165	115	Peak
5438	45.14	-8.86	54	45.97	34.4	4.01	39.24	165	115	Average
10440	31.36	-42.64	74	60.76	1.53	5.89	36.82	101	6	Peak

<b>Test Mode :</b>	802.11n HT20 - Chain Port 0+1	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	44	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 5220 MHz is fundamental signal which can be ignored. 2. 10440 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5220	98.57	-	-	98.43	34.37	3.95	38.18	191	82	Peak
5220	87.32	-	-	87.18	34.37	3.95	38.18	191	82	Average
10440	31.11	-42.89	74	60.51	1.53	5.89	36.82	101	5	Peak



<b>Test Mode :</b>	802.11n HT20 - Chain Port 0+1	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	48	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 5240 MHz is fundamental signal which can be ignored. 2. 10479 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5240	101.78	-	-	101.73	34.39	3.95	38.29	111	158	Peak
5240	90.13	-	-	90.08	34.39	3.95	38.29	111	158	Average
10479	30.01	-43.99	74	59.45	1.56	5.91	36.91	101	5	Peak

<b>Test Mode :</b>	802.11n HT20 - Chain Port 0+1	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	48	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 5240 MHz is fundamental signal which can be ignored. 2. 10479 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5240	99.17	-	-	99.12	34.39	3.95	38.29	194	76	Peak
5240	87.83	-	-	87.78	34.39	3.95	38.29	194	76	Average
10479	29.81	-44.19	74	59.25	1.56	5.91	36.91	100	87	Peak





<b>Test Mode :</b>	802.11n HT40 - Chain Port 0+1	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	38	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 5190 MHz is fundamental signal which can be ignored. 2. 10380 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5190	98.75	-	-	98.48	34.35	3.92	38	100	331	Peak
5190	86.72	-	-	86.45	34.35	3.92	38	100	331	Average
10380	31.21	-42.79	74	60.64	1.48	5.86	36.77	100	245	Peak

<b>Test Mode :</b>	802.11n HT40 - Chain Port 0+1	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	38	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 5190 MHz is fundamental signal which can be ignored. 2. 10380 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5190	94.93	-	-	94.66	34.35	3.92	38	178	266	Peak
5190	83.57	-	-	83.3	34.35	3.92	38	178	266	Average
10380	31.54	-42.46	74	60.97	1.48	5.86	36.77	110	247	Peak



<b>Test Mode :</b>	802.11n HT40 - Chain Port 0+1	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	46	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 5230 MHz is fundamental signal which can be ignored. 2. 10461 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5230	98.26	-	-	98.21	34.39	3.95	38.29	100	335	Peak
5230	87.13	-	-	87.08	34.39	3.95	38.29	100	335	Average
10461	30.35	-43.65	74	59.78	1.55	5.9	36.88	121	100	Peak

<b>Test Mode :</b>	802.11n HT40 - Chain Port 0+1	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	46	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 5230 MHz is fundamental signal which can be ignored. 2. 10461 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5230	94.9	-	-	94.85	34.39	3.95	38.29	189	262	Peak
5230	83.77	-	-	83.72	34.39	3.95	38.29	189	262	Average
10461	30	-44	74	59.43	1.55	5.9	36.88	1032	145	Peak



<Sample 2>

<b>Test Mode :</b>	802.11 n HT20 - Chain Port 0+1	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	36	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	1. 5180 MHz is fundamental signal which can be ignored. 2. 10359 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5092	56.62	-17.38	74	56.15	34.28	3.86	37.67	100	306	Peak
5092	43.22	-10.78	54	42.75	34.28	3.86	37.67	100	306	Average
5180	104.17	-	-	103.9	34.35	3.92	38	100	306	Peak
5180	91.62	-	-	91.35	34.35	3.92	38	100	306	Average
10359	30.18	-43.82	74	59.64	1.46	5.85	36.77	115	247	Peak

<b>Test Mode :</b>	802.11 n HT20 - Chain Port 0+1	<b>Temperature :</b>	22~23°C
<b>Test Channel :</b>	36	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Simon Lu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	1. 5180 MHz is fundamental signal which can be ignored. 2. 10359 MHz is not within a restricted band, and satisfies both the average and peak limits of 15.209.		

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
5180	99.67	-	-	99.4	34.35	3.92	38	197	261	Peak
5180	88.16	-	-	87.89	34.35	3.92	38	197	261	Average
10359	31.3	-42.7	74	60.76	1.46	5.85	36.77	164	47	Peak

### 3.5 AC Conducted Emission Measurement

#### 3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.


### 3.5.4 Test Setup

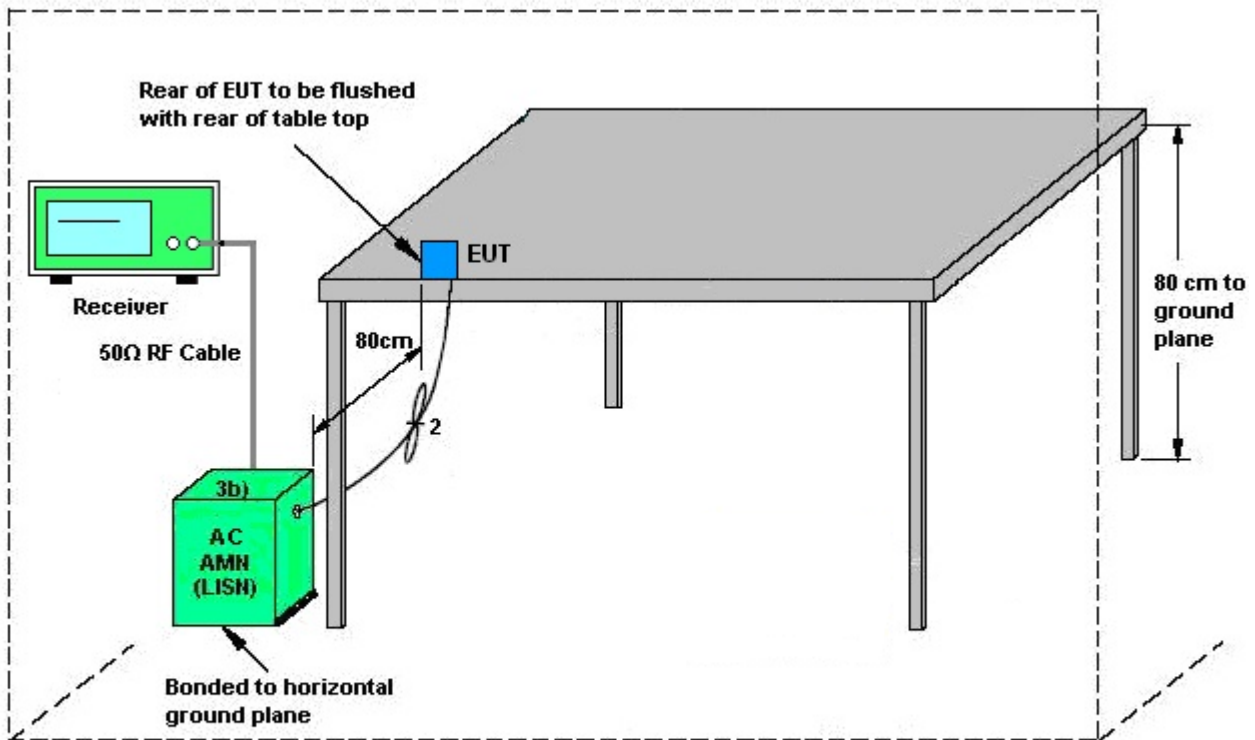

AMN = Artificial mains network (LISH)  
 AE = Associated equipment  
 EUT = Equipment under test  
 ISN = Impedance stabilization network

### 3.5.5 Test Result of AC Conducted Emission

Test Mode :	Mode 2	Temperature :	22~24°C
Test Engineer :	Eligah Wang	Relative Humidity :	37~39%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	Bluetooth Link + WLAN 5GHz Link + Earphone + Battery 2 + USB Cable 2 (Charging from Adapter) for Sample 2		

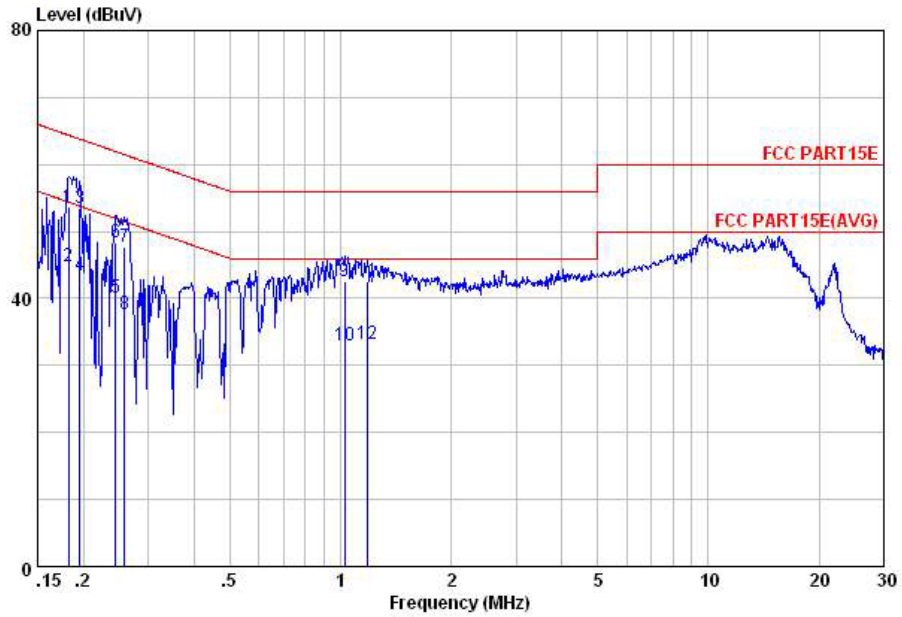


Site : C001-KS  
Condition: FCC PART15E LISN-L20130306 LINE

mode : Mode 2

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.18	53.66	-10.71	64.37	41.80	1.25	10.61	QP
2	0.18	44.76	-9.61	54.37	32.90	1.25	10.61	Average
3	0.20	53.54	-10.26	63.80	41.90	1.05	10.59	QP
4	0.20	43.44	-10.36	53.80	31.80	1.05	10.59	Average
5	0.24	40.01	-11.94	51.95	28.61	0.89	10.51	Average
6	0.24	48.31	-13.64	61.95	36.91	0.89	10.51	QP
7	0.26	47.64	-13.83	61.47	36.30	0.85	10.49	QP
8	0.26	37.64	-13.83	51.47	26.30	0.85	10.49	Average
9	1.03	42.58	-13.42	56.00	32.30	0.10	10.18	QP
10	1.03	32.88	-13.12	46.00	22.60	0.10	10.18	Average
11	1.18	42.58	-13.42	56.00	32.30	0.10	10.18	QP
12	1.18	33.18	-12.82	46.00	22.90	0.10	10.18	Average



Test Mode :	Mode 2	Temperature :	22~24°C
Test Engineer :	Eligah Wang	Relative Humidity :	37~39%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	Bluetooth Link + WLAN 5GHz Link + Earphone + Battery 2 + USB Cable 2 (Charging from Adapter) for Sample 2		

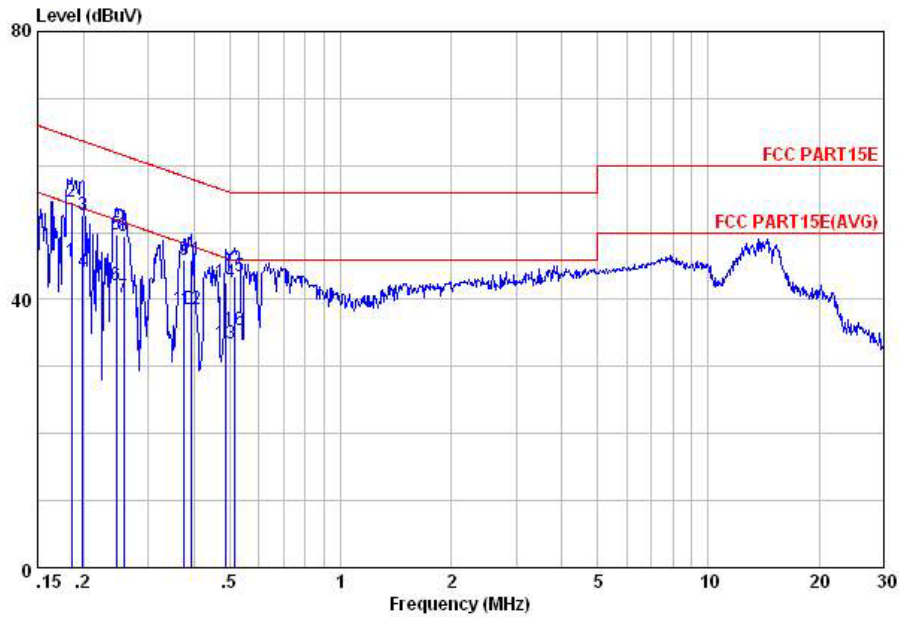

Site : C001-KS  
 Condition: FCC PART15E LISN-M20130306 NEUTRAL

mode : Mode 2

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
		dBuV	dB	dBuV	dBuV	dB	dB	
1	0.19	45.69	-8.55	54.24	33.89	1.19	10.61	Average
2	0.19	54.69	-9.55	64.24	42.89	1.19	10.61	QP
3	0.20	52.49	-11.18	63.67	40.90	1.01	10.58	QP
4	0.20	44.19	-9.48	53.67	32.60	1.01	10.58	Average
5	0.25	49.71	-12.20	61.91	38.30	0.90	10.51	QP
6	0.25	42.21	-9.70	51.91	30.80	0.90	10.51	Average
7	0.26	40.26	-11.25	51.51	28.90	0.87	10.49	Average
8	0.26	49.46	-12.05	61.51	38.10	0.87	10.49	QP
9	0.38	45.84	-12.55	58.39	35.09	0.45	10.30	QP
10	0.38	38.64	-9.75	48.39	27.89	0.45	10.30	Average
11	0.39	45.80	-12.19	57.99	35.11	0.41	10.28	QP
12	0.39	38.60	-9.39	47.99	27.91	0.41	10.28	Average
13	0.49	33.47	-12.72	46.19	22.89	0.31	10.27	Average
14	0.49	42.47	-13.72	56.19	31.89	0.31	10.27	QP
15	0.51	43.46	-12.54	56.00	32.91	0.29	10.26	QP
16	0.51	35.46	-10.54	46.00	24.91	0.29	10.26	Average

## 3.6 Frequency Stability Measurement

### 3.6.1 Limit of Frequency Stability

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.


### 3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.6.3 Test Procedures

1. To ensure emission at the band edge is maintained within the authorized band, those values shall be measured by radiation emissions at upper and lower frequency points, and finally compensated by frequency deviation as procedures below.
2. The EUT was operated at the maximum output power, and connected to the spectrum analyzer, which is set to maximum hold function and peak detector. The peak value of the power envelope was measured and noted. The upper and lower frequency points were respectively measured relatively 10dB lower than the measured peak value.
3. The frequency deviation was calculated by adding the upper frequency point and the lower frequency point divided by two. Those detailed values of frequency deviation are provided in table below.

### 3.6.4 Test Setup

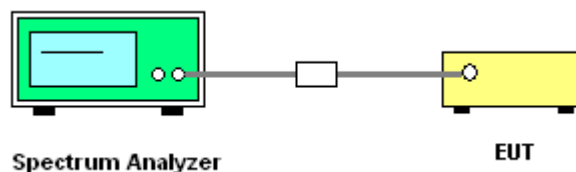





### 3.6.5 Test Result of Frequency Stability

Test Band :	5GHz band 1	Test Engineer :	Adonis Li
-------------	-------------	-----------------	-----------

Mod.	Data Rate	NTX	Channel	Freq. (MHz)	Center Frequency (MHz)	Frequency Deviation (MHz)	Frequency Stability (ppm)	Temperature (°C)	Voltage (V)
11a	6Mbps	1	36	5180	5180.050	0.050	9.65	20	3.75
11a	6Mbps	1	36	5180	5180.050	0.050	9.65	-10	3.6
11a	6Mbps	1	36	5180	5180.000	0.000	0.00	-10	4.35
11a	6Mbps	1	36	5180	5180.050	0.050	9.65	50	3.6
11a	6Mbps	1	36	5180	5180.000	0.000	0.00	50	4.35

**Note:** Center Frequency = (Low Frequency + High Frequency) / 2.



## **3.7 Automatically Discontinue Transmission**

### **3.7.1 Limit of Automatically Discontinue Transmission**

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

### **3.7.2 Measuring Instruments**

The measuring equipment is listed in the section 4 of this test report.

### **3.7.3 Test Result of Automatically Discontinue Transmission**

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

### 3.8 Antenna Requirements

#### 3.8.1 Standard Applicable

According to FCC 47 CFR Section 15.407(a)(1)(2) ,if transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 3.8.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

#### 3.8.3 Antenna Gain

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

Directional gain =  $G_{ANT}$  + Array Gain, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain =  $10 \log(N_{ANT}/N_{SS}=1)$  dB.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for  $N_{ANT} \leq 4$ .

The EUT supports CDD mode.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain “DG” is calculated as following table.

	Chain	Chain	DG	DG	Power	PSD
	Port 0	Port 1	for	for	Limit	Limit
			Power	PSD	Reduction	Reduction
	(dBi)	(dBi)	(dBi)	(dBi)	(dB)	(dB)
Band I	1.10	1.10	1.10	4.11	0.00	0.00

*Power limit reduction = Composite gain – 6dBi, ( min = 0 )*

*PSD limit reduction = Composite gain + PSD Array gain – 6dBi, ( min = 0 )*



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Dec. 28, 2013	Aug. 21, 2014	Dec. 27, 2014	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	30MHz~40GHz	Feb. 27, 2014	Aug. 21, 2014	Feb. 26, 2015	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Feb. 27, 2014	Aug. 21, 2014	Feb. 26, 2015	Conducted (TH01-KS)
Thermal Chamber	Ten Billion	TTC-B3S	TBN-960502	-40~+150°C	Dec. 10, 2013	Aug. 21, 2014	Dec. 09, 2014	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESCI	100534	9kHz~3GHz	Nov. 05, 2013	Aug. 12, 2014	Nov. 04, 2014	Radiation (03CH01-KS)
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Dec. 28, 2013	Aug. 12, 2014	Dec. 27, 2014	Radiation (03CH01-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 09, 2013	Aug. 12, 2014	Oct. 08, 2014	Radiation (03CH01-KS)
Bilog Antenna	SCHAFFNER	CBL6112D	23182	25MHz~2GHz	Jan. 08, 2014	Aug. 12, 2014	Jan. 07, 2015	Radiation (03CH01-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75959	1GHz~18GHz	Jan. 08, 2014	Aug. 12, 2014	Jan. 07, 2015	Radiation (03CH01-KS)
Active Horn Antenna	com-power	AHA-118	701030	1GHz~18GHz	Nov. 18, 2013	Aug. 12, 2014	Nov. 17, 2014	Radiation (03CH01-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA170249	15GHz~40GHz	Mar. 10, 2014	Aug. 12, 2014	Mar. 09, 2015	Radiation (03CH01-KS)
Amplifier	com-power	PA-103A	161073	1MHz~1GHz	May 04, 2014	Aug. 12, 2014	May 03, 2015	Radiation (03CH01-KS)
Amplifier	Agilent	8449B	3008A02371	1GHz~26.5GHz	Dec. 10, 2013	Aug. 12, 2014	Dec. 09, 2014	Radiation (03CH01-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Aug. 12, 2014	NCR	Radiation (03CH01-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Aug. 12, 2014	NCR	Radiation (03CH01-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Aug. 12, 2014	NCR	Radiation (03CH01-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	May 04, 2014	Jul. 25, 2014	May 03, 2015	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Dec. 10, 2013	Jul. 25, 2014	Dec. 09, 2014	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Dec. 10, 2013	Jul. 25, 2014	Dec. 09, 2014	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Nov. 12, 2013	Jul. 25, 2014	Nov. 11, 2014	Conduction (CO01-KS)



## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.3
---	-----

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.5
---	-----