



FCC RF Test Report

APPLICANT : Lenovo (Shanghai) Electronics Technology Co., Ltd.
EQUIPMENT : Portable Tablet Computer
BRAND NAME : Lenovo
MODEL NAME : Lenovo YT3-X50M
FCC ID : O57YT3X50M
STANDARD : 47 CFR Part 2, 22(H), 27(L), 27(M)
CLASSIFICATION : PCS Licensed Transmitter (PCB)

The product was received on Jul. 03, 2015 and completely tested on Sep. 08, 2015. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA / EIA-603-C-2004 and the testing has shown the tested sample to be in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL (KUNSHAN) INC.
No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China



TABLE OF CONTENTS

REVISION HISTORY.....3
SUMMARY OF TEST RESULT4
1 GENERAL DESCRIPTION5
1.1 Applicant.....5
1.2 Manufacturer.....5
1.3 Product Feature of Equipment Under Test.....5
1.4 Product Specification subjective to this standard6
1.5 Modification of EUT7
1.6 Emission Designator.....7
1.7 Testing Location9
1.8 Applicable Standards.....9
1.9 Component List.....10
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST11
2.1 Test Mode.....11
2.2 Connection Diagram of Test System.....13
2.3 Support Unit used in test configuration and system14
2.4 Measurement Results Explanation Example.....14
3 CONDUCTED TEST ITEMS15
3.1 Measuring Instruments15
3.2 Test Setup15
3.3 Test Result of Conducted Test15
3.4 Conducted Output Power16
3.5 Peak-to-Average Ratio17
3.6 Occupied Bandwidth.....18
3.7 Conducted Band Edge19
3.8 Conducted Spurious Emission21
3.9 Frequency Stability22
4 RADIATED TEST ITEMS23
4.1 Measuring Instruments23
4.2 Test Setup23
4.3 Test Result of Radiated Test23
4.4 Effective Radiated Power and Effective Isotropic Radiated Power24
4.5 Radiated Spurious Emission26
5 LIST OF MEASURING EQUIPMENT27
6 UNCERTAINTY OF EVALUATION28
APPENDIX A. TEST RESULTS OF CONDUCTED TEST
APPENDIX B. TEST RESULTS OF RADIATED TEST
APPENDIX C. TEST SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
3.5	N/A	Peak-to-Average Ratio	<13 dB	PASS	-
3.6	§2.1049	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§2.1051 §22.917(a) §27.53(h)	Conducted Band Edge Measurement (Band 4) (Band 5)	< 43+10log ₁₀ (P[Watts])	PASS	-
	§27.53(m)(4)	Conducted Band Edge Measurement (Band 7) (Band 38)	Offset 0 ~ 5MHz: < 40+10log ₁₀ (P[Watts]) Offset 5 ~ 6MHz or EBW: < 43+10log ₁₀ (P[Watts])		
3.8	§2.1051 §22.917(a) §27.53(h)	Conducted Spurious Emission (Band 4) (Band 5)	< 43+10log ₁₀ (P[Watts])	PASS	-
	§2.1051 §27.53(m)(4)	Conducted Spurious Emission (Band 7)(Band 38)	< 55+10log ₁₀ (P[Watts])		
3.9	§2.1055 §22.355 §27.54	Frequency Stability Temperature & Voltage	< 2.5 ppm for Part 22 Within Authorized Band	PASS	-
4.4	§22.913(a)(2)	Effective Radiated Power (Band 5)	ERP < 7 Watt	PASS	-
	§24.232(c) §27.50(h)(2)	Equivalent Isotropic Radiated Power (Band 7)(Band 38)	EIRP < 2Watt		
	§27.50(d)(4)	Equivalent Isotropic Radiated Power (Band 4)	EIRP < 1Watt		
4.5	§2.1053 §22.917(a) §27.53(h)	Radiated Spurious Emission (Band 4) (Band 5)	< 43+10log ₁₀ (P[Watts])	PASS	Under limit 3.29 dB at 10356.000 MHz
	§2.1053 §27.53(m)(4)	Radiated Spurious Emission (Band 7)(Band 38)	< 55+10log ₁₀ (P[Watts])		



1 General Description

1.1 Applicant

Lenovo (Shanghai) Electronics Technology Co., Ltd.
No. 68 Building, 199 Fenju Road, Wai Gao Qiao FTZ, Shanghai, China

1.2 Manufacturer

Lenovo PC HK Limited
23/F, Lincoln House, Taikoo Place 979 King's Road, Quarry Bay, Hong Kong

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Portable Tablet Computer
Brand Name	Lenovo
Model Name	Lenovo YT3-X50M
FCC ID	O57YT3X50M
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/HSPA+(Downlink Only)/DC-HSDPA/LTE WLAN2.4GHz 802.11b/g/n HT20 Bluetooth v3.0+EDR Bluetooth v4.0 LE
IMEI Code	Conducted: 867152020026572 Radiation: 867152020025335 for LTE Band 4 / 5 / 7 867989020027658 for LTE Band 38 ERP/EIRP: 867989020027146
HW Version	LLAM510
SW Version	LLA3I16 B01
EUT Stage	Identical Prototype



1.4 Product Specification subjective to this standard

Product Specification subjective to this standard	
Tx Frequency	LTE Band 4 : 1710.7 MHz ~ 1754.3 MHz LTE Band 5 : 824.7 MHz ~ 848.3 MHz LTE Band 7 : 2502.5 MHz ~ 2567.5 MHz LTE Band 38 : 2572.5 MHz ~ 2617.5 MHz
Rx Frequency	LTE Band 4 : 2110.7 MHz ~ 2154.3 MHz LTE Band 5 : 869.7 MHz ~ 893.3 MHz LTE Band 7 : 2622.5MHz ~ 2687.5 MHz LTE Band 38 : 2572.5 MHz ~ 2617.5 MHz
Bandwidth	LTE Band 4 : 1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz LTE Band 5 : 1.4MHz / 3MHz / 5MHz / 10MHz LTE Band 7 : 5MHz / 10MHz / 15MHz / 20MHz LTE Band 38 : 5MHz / 10MHz / 15MHz / 20MHz
Maximum Output Power to Antenna	LTE Band 4 : 22.76 dBm LTE Band 5 : 22.93 dBm LTE Band 7 : 23.68 dBm LTE Band 38 : 23.42 dBm
Type of Modulation	QPSK / 16QAM



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Emission Designator

LTE Band 4		QPSK			16QAM		
BW(MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	
1.4	1M10G7D	-	0.1690	1M10W7D	-	0.1390	
3	2M73G7D	-	0.1866	2M73W7D	-	0.1459	
5	4M51G7D	-	0.1770	4M50W7D	-	0.1435	
10	9M07G7D	0.0006	0.1690	9M01W7D	-	0.1384	
15	13M5G7D	-	0.1782	13M5W7D	-	0.1500	
20	18M4G7D	-	0.1841	18M5W7D	-	0.1462	
LTE Band 5		QPSK			16QAM		
BW(MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)	
1.4	1M10G7D	-	0.0767	1M10W7D	-	0.0625	
3	2M73G7D	-	0.0834	2M73W7D	-	0.0679	
5	4M51G7D	-	0.0813	4M50W7D	-	0.0647	
10	9M05G7D	0.0012	0.1164	9M01W7D	-	0.0991	



LTE Band 7		QPSK			16QAM		
BW(MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	
5	4M51G7D	-	0.1268	4M50W7D	-	0.1086	
10	9M07G7D	0.0012	0.1276	9M05W7D	-	0.1140	
15	13M5G7D	-	0.1312	13M5W7D	-	0.1197	
20	18M3G7D	-	0.1413	18M5W7D	-	0.1079	
LTE Band 38		QPSK			16QAM		
BW(MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	
5	4M53G7D	-	0.3273	4M51W7D	-	0.2366	
10	9M07G7D	0.0012	0.2612	9M07W7D	-	0.2296	
15	13M5G7D	-	0.2924	13M5W7D	-	0.2317	
20	18M5G7D	-	0.2799	18M3W7D	-	0.2234	



1.7 Testing Location

Test Site	SPORTON INTERNATIONAL (SHENZHEN) INC.	
Test Site Location	1F & 2F, Building A, Morning Business Center, No. 4003 ShiGu Rd., Xili Town, Nanshan District, Shenzhen, Guangdong, P. R. China TEL: +86-755-8637-9589 FAX: +86-755-8637-9595	
Test Site No.	Sporton Site No.	
	TH01-SZ	

Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.	
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958	
Test Site No.	Sporton Site No.	FCC Registration No.
	03CH02-KS	418269

Note: The test site complies with ANSI C63.4 2009 requirement.

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 2, 22(H), 27(L), 27(M)
- ANSI / TIA / EIA-603-C-2004
- FCC KDB 971168 D01 Power Meas. License Digital Systems v02r02

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



1.9 Component List

Note: There are two types of EUT, the details refer the following table. According to the difference, we evaluate is not affect RF performance, so only choose sample 1 to perform RF test.

Component	Sample 1	Sample 2
CPU	Qualcomm (MSM8909 2AA)	Qualcomm (MSM8909 2AA)
Flash	Samsung (KMQ4Z0013M)	Hynix (H9TQ17ABJTMC)
LCD	AUO (B101EAN02.4)	BOE (TV101WXM-NL0)
Camera	O-FILM (L8865A80 8MP)	O-FILM (L8865A80 8MP)
Motor	HOCHAR (F102730-20Y)	DMEGC (DM-B1003-3H)
Battery	lenovo (Sunwoda) (L15D3K32)	lenovo(Scud) (L15D3K32)



2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r02 with maximum output power.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission.


Test Items	Band	Bandwidth (MHz)						Modulation		RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	M	H
Max. Output Power	4	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
	5	Y	Y	Y	Y	-	-	Y	Y	Y	Y	Y	Y	Y	Y
	7	-	-	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
	38	-	-	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y	Y
Peak-to-Average Ratio	4						Y	Y	Y	Y		Y	Y	Y	Y
	5				Y	-	-	Y	Y	Y		Y	Y	Y	Y
	7	-	-				Y	Y	Y	Y		Y	Y	Y	Y
	38	-	-				Y	Y	Y	Y		Y	Y	Y	Y
26dB and 99% Bandwidth	4	Y	Y	Y	Y	Y	Y	Y	Y			Y	Y	Y	Y
	5	Y	Y	Y	Y	-	-	Y	Y			Y	Y	Y	Y
	7	-	-	Y	Y	Y	Y	Y	Y			Y	Y	Y	Y
	38	-	-	Y	Y	Y	Y	Y	Y			Y	Y	Y	Y
Conducted Band Edge	4	Y	Y	Y	Y	Y	Y	Y	Y	Y		Y	Y		Y
	5	Y	Y	Y	Y	-	-	Y	Y	Y		Y	Y		Y
	7	-	-	Y	Y	Y	Y	Y	Y	Y		Y	Y		Y
	38	-	-	Y	Y	Y	Y	Y	Y	Y		Y	Y		Y




Test Items	Band	Bandwidth (MHz)						Modulation		RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	M	H
Conducted Spurious Emission	4	√	√	√	√	√	√	√	√	√	√		√	√	√
	5	√	√	√	√	-	-	√	√	√	√		√	√	√
	7	-	-	√	√	√	√	√	√	√			√	√	√
	38	-	-	√	√	√	√	√	√	√			√	√	√
Frequency Stability	4				√			√				√		√	
	5				√	-	-	√				√		√	
	7	-	-		√			√				√		√	
	38	-	-		√			√				√		√	
E.R.P./ E.I.R.P.	4	√	√	√	√	√	√	√	√	√	√		√	√	√
	5	√	√	√	√	-	-	√	√	√	√		√	√	√
	7	-	-	√	√	√	√	√	√	√			√	√	√
	38	-	-	√	√	√	√	√	√	√			√	√	√
Radiated Spurious Emission	4	√	√	√	√	√	√	√		√				√	
	5	√	√	√	√	-	-	√		√				√	
	7	-	-	√	√	√	√	√		√				√	
	38	-	-	√	√	√	√	√		√				√	
Note	<p>1. The mark “√ “ means that this configuration is chosen for testing</p> <p>2. The mark “-“ means that this bandwidth is not supported.</p> <p>3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.</p>														

2.2 Connection Diagram of Test System

For LTE Band 4 / 5 / 7

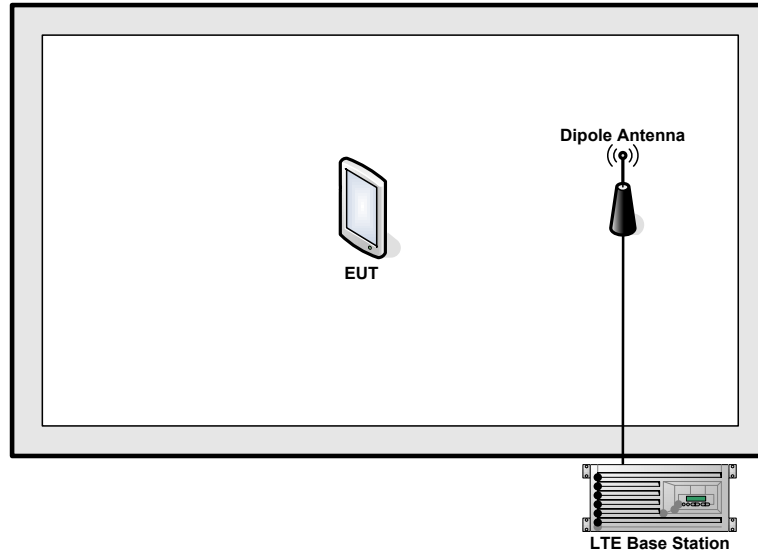

For LTE Band 38

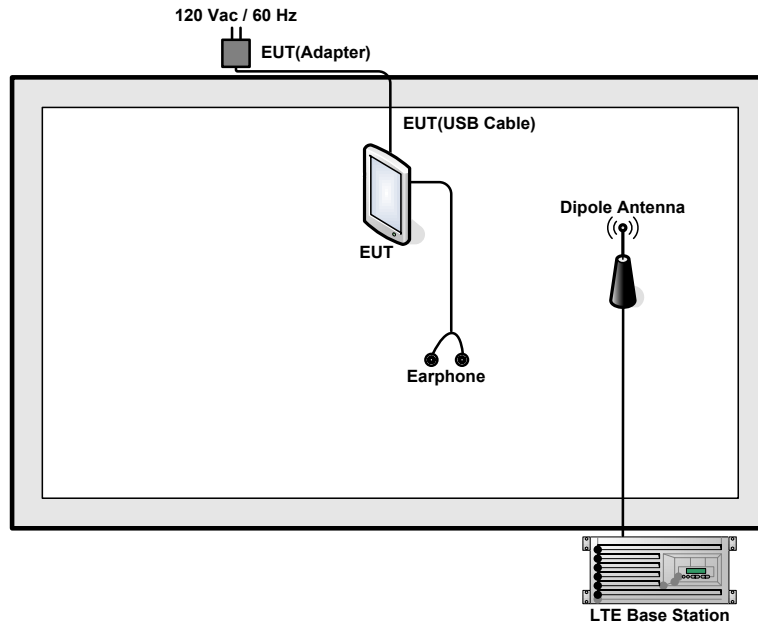



2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	Power Supply	GW INSTRON	GPD-2303S	N/A	N/A	Unshielded, 1.8 m
3.	Earphone	Lenovo	SH100	N/A	N/A	N/A

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

$$\text{Offset} = \text{RF cable loss} + \text{attenuator factor}.$$

Following shows an offset computation example with cable loss 5.0 dB and 10dB attenuator.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 5.0 + 10 = 15.0 \text{ (dB)} \end{aligned}$$

3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power



3.2.2 Peak-to-Average Ratio, Occupied Bandwidth ,Conducted Band-Edge and Conducted Spurious Emission

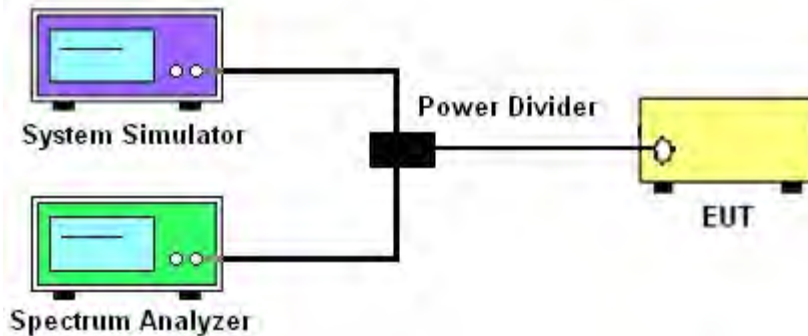

3.2.3 Frequency Stability

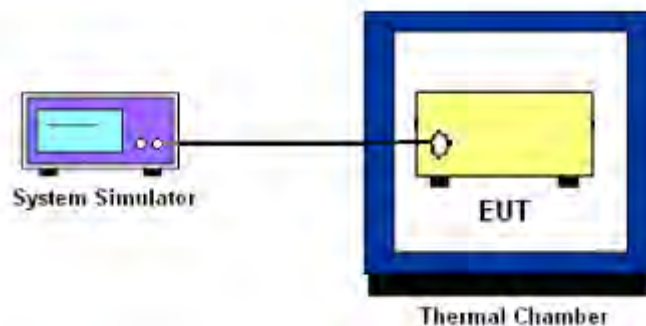

3.3 Test Result of Conducted Test

Please refer to Appendix A.



3.4 Conducted Output Power

3.4.1 Description of the Conducted Output Power Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

3.4.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.



3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 5.7.1.
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.



3.6 Occupied Bandwidth

3.6.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 4.2.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.



3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

22.917(a) for Band 5

For operations in the 824 – 849 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power P(Watts) in a 100kHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53 (h) for Band 4

For operations in the 1710 – 1755 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power P(Watts) in a 1 MHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53(m)(4) for FCC Band 7, 38:

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.



3.7.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 6.0.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured. Set RBW \geq 1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
4. Set spectrum analyzer with RMS detector.
5. Offset has included the duty factor . Duty factor = $10 \log (1/x)$, where x is the measured duty cycle for band 38.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

For LTE Band 7, 38:

7. The limit line is derived from $40 + 10\log(P)$ dB below the transmitter power P(Watts)
= $P(W) - [40 + 10\log(P)]$ (dB)
= $[30 + 10\log(P)]$ (dBm) - $[40 + 10\log(P)]$ (dB)
= -10dBm
8. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
= $P(W) - [43 + 10\log(P)]$ (dB)
= $[30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
= -13dBm.
9. The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)
= $P(W) - [55 + 10\log(P)]$ (dB)
= $[55 + 10\log(P)]$ (dBm) - $[55 + 10\log(P)]$ (dB)
= -25dBm



3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For Band 7,38:

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 6.0.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Offset has included the duty factor . Duty factor = $10 \log (1/x)$, where x is the measured duty cycle for band 38.
9. Taking the record of maximum spurious emission.
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
11. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
= $P(W) - [43 + 10\log(P)]$ (dB)
= $[30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
= -13dBm.
12. For Band 7, 38
The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)



3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

1. The testing follows FCC KDB 971168 v02r02 Section 9.0.
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

1. The testing follows FCC KDB 971168 v02r02 Section 9.0.
2. The EUT was placed in a temperature chamber at $25\pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
4. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup

4.2.1 For radiated test from 30MHz to 1GHz

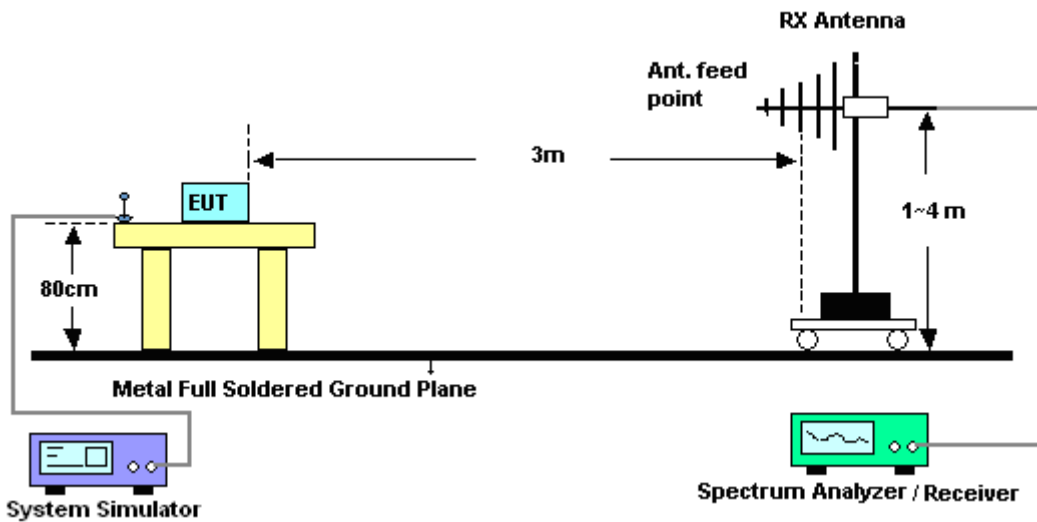

4.2.2 For radiated test above 1GHz

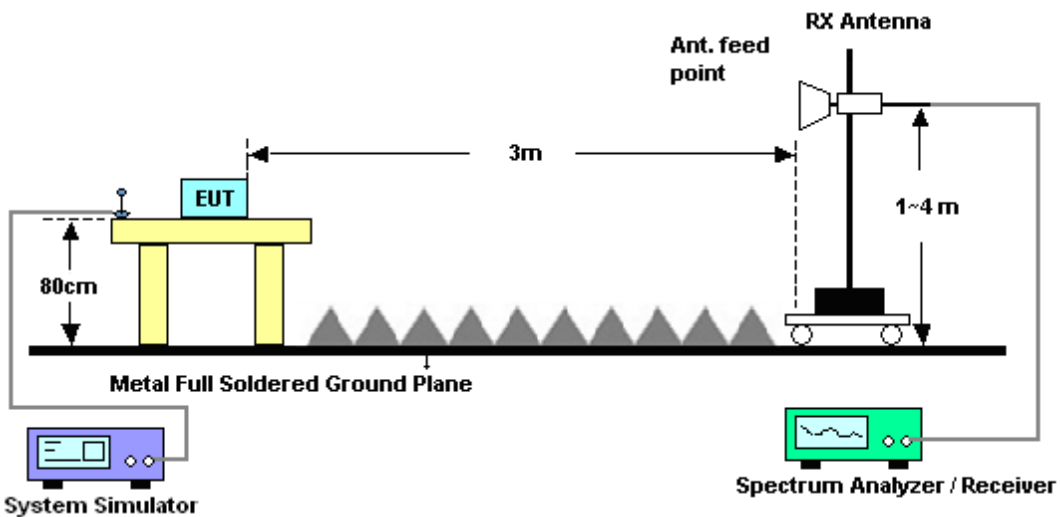

4.3 Test Result of Radiated Test

Please refer to Appendix B.



4.4 Effective Radiated Power and Effective Isotropic Radiated Power

4.4.1 Description of the ERP/EIRP Measurement

Effective radiated power output measurements by substitution method according to ANSI / TIA / EIA-603-C-2004, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v02r02. Mobile and portable (hand-held) stations operating are limited to average ERP of 7 watts with LTE band 5.

Equivalent isotropic radiated power output measurements by substitution method according to ANSI / TIA / EIA-603-C-2004, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v02r02. Mobile and portable (hand-held) stations operating are limited to average EIRP of 2 watts with LTE band 7 / 38 and 1 watt with LTE band 4.

4.4.2 Test Procedures

1. The EUT was placed on a non-conductive rotating platform 0.8 meters high in a semi-anechoic chamber. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and a spectrum analyzer with RMS detector per section 5. of KDB 971168 D01.
2. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power. The maximum emission was recorded from analyzer power level (LVL) from the 360 degrees rotation of the turntable and the test antenna raised and lowered over a range from 1 to 4 meters in both horizontally and vertically polarized orientations.
3. Effective Isotropic Radiated Power (EIRP) was measured by substitution method according to TIA/EIA-603-C. The EUT was replaced by the substitution antenna at same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna. The correction factor (in dB) = S.G. - Tx Cable loss + Substitution antenna gain - Analyzer reading. Then the EUT's EIRP was calculated with the correction factor, $EIRP = LVL + \text{Correction factor}$ and $ERP = EIRP - 2.15$. Take the record of the output power at substitution antenna.



	LTE Average					
LTE BW	1.4M	3M	5M	10M	15M	20M
Span	3MHz	6MHz	10MHz	20MHz	30MHz	40MHz
RBW	30kHz	100kHz	100kHz	300kHz	300kHz	300kHz
VBW	100kHz	300kHz	300kHz	1MHz	1MHz	1MHz
Detector	RMS	RMS	RMS	RMS	RMS	RMS
Trace	Average	Average	Average	Average	Average	Average
Average Type	Power	Power	Power	Power	Power	Power
Sweep Count	100	100	100	100	100	100



4.5 Radiated Spurious Emission

4.5.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI / TIA / EIA-603-C-2004. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For Band 7, 38

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.5.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 5.8 and ANSI / TIA-603-C-2004 Section 2.2.12.
2. The EUT was placed on a rotatable wooden table with 0.8 meter above ground.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
9. Taking the record of output power at antenna port.
10. Repeat step 7 to step 8 for another polarization.
11. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
= $P(W) - [43 + 10\log(P)]$ (dB)
= $[30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
= -13dBm.

For Band 7, 38:

The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)

12. EIRP (dBm) = S.G. Power – Tx Cable Loss + Tx Antenna Gain
13. ERP (dBm) = EIRP - 2.15



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	9kHz~40GHz	May 05, 2015	Jul. 27, 2015~ Sep. 08, 2015	May 04, 2016	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhangroup	LP-150U	H2014081803	-40~+150°C	Sep. 16, 2014	Jul. 27, 2015~ Sep. 08, 2015	Sep. 15, 2015	Conducted (TH01-SZ)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz; Max 30dBm	Sep. 29, 2014	Aug. 14, 2015~ Aug. 19, 2015	Sep. 28, 2015	Radiation (03CH02-KS)
Spectrum Analyzer	R&S	FSV40	101040	10kHz~40GHz;Ma x 30dBm	Sep. 25, 2014	Aug. 14, 2015~ Aug. 19, 2015	Sep. 24, 2015	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6112D	37879	30MHz~2GHz	Sep. 13, 2014	Aug. 14, 2015~ Aug. 19, 2015	Sep. 12, 2015	Radiation (03CH02-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Nov. 08, 2014	Aug. 14, 2015~ Aug. 19, 2015	Nov. 07, 2015	Radiation (03CH02-KS)
Active Horn Antenna	com-power	AHA-118	701030	1GHz~18GHz	Nov. 08, 2014	Aug. 14, 2015~ Aug. 19, 2015	Nov. 07, 2015	Radiation (03CH02-KS)
SHF-EHF Horn	com-power	AH-840	101070	18GHz~40GHz	Sep. 04, 2014	Aug. 14, 2015~ Aug. 19, 2015	Sep. 03, 2015	Radiation (03CH02-KS)
Amplifier	com-power	PA-103A	161069	1kHz~1000MHz / 32 dB	May 04, 2015	Aug. 14, 2015~ Aug. 19, 2015	May 03, 2016	Radiation (03CH02-KS)
Amplifier	Agilent	8449B	3008A02384	1GHz~26.5GHz Gain 30dB	Oct. 28, 2014	Aug. 14, 2015~ Aug. 19, 2015	Oct. 27, 2015	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	Aug. 14, 2015~ Aug. 19, 2015	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Aug. 14, 2015~ Aug. 19, 2015	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Aug. 14, 2015~ Aug. 19, 2015	NCR	Radiation (03CH02-KS)



6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1 dB
---	--------



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)

LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	22.48	22.49	22.32
1.4	1	2		22.69	22.63	22.39
1.4	1	5		22.33	22.43	22.29
1.4	3	0		22.42	22.47	22.33
1.4	3	1		22.64	22.60	22.45
1.4	3	2		22.57	22.53	22.43
1.4	6	0		21.49	21.48	21.47
1.4	1	0	16-QAM	21.81	21.66	21.62
1.4	1	2		21.69	21.64	21.60
1.4	1	5		21.48	21.88	21.45
1.4	3	0		21.62	21.59	21.40
1.4	3	1		21.61	21.68	21.50
1.4	3	2		21.70	21.85	21.23
1.4	6	0		20.28	20.20	20.34
3	1	0	QPSK	22.52	22.57	22.32
3	1	7		22.57	22.75	22.45
3	1	14		22.44	22.59	22.39
3	8	0		21.56	21.54	21.37
3	8	4		21.50	21.59	21.48
3	8	7		21.42	21.52	21.42
3	15	0		21.37	21.48	21.38
3	1	0	16-QAM	21.73	21.90	21.69
3	1	7		21.69	21.88	21.57
3	1	14		21.76	21.78	21.61
3	8	0		20.40	20.61	20.36
3	8	4		20.53	20.62	20.37
3	8	7		20.66	20.72	20.42
3	15	0		20.40	20.68	20.26



LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	22.62	22.63	22.58
5	1	12		22.53	22.50	22.57
5	1	24		22.37	22.55	22.29
5	12	0		21.41	21.45	21.46
5	12	6		21.36	21.35	21.36
5	12	11		21.31	21.34	21.30
5	25	0		21.32	21.41	21.42
5	1	0	16-QAM	21.82	21.73	21.69
5	1	12		21.66	21.70	21.59
5	1	24		21.66	21.71	21.57
5	12	0		20.37	20.39	20.38
5	12	6		20.33	20.40	20.43
5	12	11		20.26	20.30	20.28
5	25	0		20.37	20.56	20.46
10	1	0	QPSK	22.52	22.58	22.45
10	1	24		22.60	22.68	22.51
10	1	49		22.31	22.34	22.30
10	25	0		21.47	21.47	21.33
10	25	12		21.40	21.50	21.27
10	25	24		21.36	21.34	21.37
10	50	0		21.46	21.49	21.33
10	1	0	16-QAM	21.62	21.80	21.37
10	1	24		21.55	21.79	21.46
10	1	49		21.43	21.57	21.08
10	25	0		20.33	20.69	20.38
10	25	12		20.42	20.74	20.45
10	25	24		20.40	20.57	20.51
10	50	0		20.31	20.47	20.38



LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0	QPSK	22.65	22.75	22.65
15	1	37		22.39	22.74	22.44
15	1	74		22.35	22.44	22.38
15	36	0		21.53	21.61	21.58
15	36	18		21.42	21.57	21.34
15	36	37		21.36	21.32	21.34
15	75	0		21.50	21.46	21.42
15	1	0	16-QAM	21.89	21.75	21.95
15	1	37		21.39	21.63	21.36
15	1	74		21.83	21.67	21.31
15	36	0		20.56	20.66	20.53
15	36	18		20.44	20.51	20.41
15	36	37		20.26	20.39	20.22
15	75	0		20.54	20.49	20.48
20	1	0	QPSK	22.72	22.76	22.60
20	1	49		22.41	22.60	22.43
20	1	99		22.27	22.26	22.09
20	50	0		21.56	21.61	21.57
20	50	24		21.44	21.54	21.45
20	50	49		21.41	21.44	21.23
20	100	0		21.49	21.53	21.44
20	1	0	16-QAM	21.99	21.95	21.87
20	1	49		21.81	21.90	21.29
20	1	99		21.75	21.67	21.12
20	50	0		20.60	20.63	20.57
20	50	24		20.48	20.56	20.32
20	50	49		20.32	20.46	20.17
20	100	0		20.52	20.54	20.29



LTE Band 5 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	22.50	22.64	22.40
1.4	1	2		22.65	22.56	22.49
1.4	1	5		22.53	22.49	22.39
1.4	3	0		22.54	22.66	22.48
1.4	3	1		22.50	22.55	22.50
1.4	3	2		22.52	22.52	22.49
1.4	6	0		21.81	21.73	21.69
1.4	1	0	16-QAM	22.32	22.12	21.87
1.4	1	2		22.40	22.14	21.61
1.4	1	5		22.10	22.05	22.09
1.4	3	0		22.06	22.00	22.15
1.4	3	1		22.00	22.09	22.16
1.4	3	2		22.04	22.02	22.05
1.4	6	0		20.55	20.63	20.72
3	1	0	QPSK	22.60	22.80	22.52
3	1	7		22.71	22.78	22.91
3	1	14		22.60	22.69	22.34
3	8	0		21.85	21.80	21.88
3	8	4		21.86	21.87	21.80
3	8	7		21.81	21.81	21.80
3	15	0		21.79	21.82	21.79
3	1	0	16-QAM	22.06	22.25	22.18
3	1	7		22.05	22.04	22.19
3	1	14		22.10	22.16	22.12
3	8	0		20.94	20.87	20.83
3	8	4		21.05	20.94	20.78
3	8	7		20.99	20.73	20.77
3	15	0		20.92	20.95	20.65



LTE Band 5 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	22.76	22.68	22.75
5	1	12		22.74	22.78	22.88
5	1	24		22.55	22.41	22.35
5	12	0		21.82	21.85	21.73
5	12	6		21.79	21.85	21.82
5	12	11		21.82	21.77	21.86
5	25	0		21.84	21.81	21.78
5	1	0	16-QAM	22.11	22.07	22.11
5	1	12		22.03	21.97	22.04
5	1	24		22.01	21.94	21.92
5	12	0		20.62	20.70	20.75
5	12	6		20.81	20.90	20.75
5	12	11		20.86	20.68	20.77
5	25	0		20.98	20.86	20.65
10	1	0	QPSK	22.49	22.80	22.65
10	1	24		22.70	22.81	22.93
10	1	49		22.35	22.48	22.52
10	25	0		21.71	21.88	21.86
10	25	12		21.79	21.89	21.92
10	25	24		21.85	21.75	21.79
10	50	0		21.90	21.77	21.99
10	1	0	16-QAM	21.98	22.45	21.85
10	1	24		22.10	22.46	22.14
10	1	49		21.55	21.42	22.00
10	25	0		20.98	21.14	20.89
10	25	12		20.82	20.92	21.24
10	25	24		20.88	20.99	20.95
10	50	0		20.80	20.73	20.99



LTE Band 7 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	23.62	23.49	23.09
5	1	12		23.66	23.51	23.15
5	1	24		23.49	23.48	22.93
5	12	0		22.49	22.54	22.17
5	12	6		22.57	22.49	21.98
5	12	11		22.61	22.49	21.98
5	25	0		22.57	22.49	21.92
5	1	0	16-QAM	22.72	22.67	22.58
5	1	12		22.82	22.25	21.85
5	1	24		22.84	22.60	22.10
5	12	0		21.55	21.51	21.17
5	12	6		21.58	21.47	21.02
5	12	11		21.54	21.45	20.89
5	25	0		21.48	21.61	21.02
10	1	0	QPSK	23.52	23.64	23.24
10	1	24		23.65	23.57	23.32
10	1	49		23.55	23.34	23.02
10	25	0		22.66	22.55	22.18
10	25	12		22.60	22.47	22.07
10	25	24		22.61	22.52	21.97
10	50	0		22.58	22.57	22.04
10	1	0	16-QAM	22.86	22.90	22.46
10	1	24		22.86	22.77	22.54
10	1	49		22.91	22.78	22.18
10	25	0		21.76	21.59	21.43
10	25	12		21.71	21.51	21.39
10	25	24		21.64	21.50	21.22
10	50	0		21.69	21.43	21.11



LTE Band 7 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0	QPSK	23.61	23.63	23.29
15	1	37		23.55	23.44	23.11
15	1	74		23.36	23.45	23.02
15	36	0		22.60	22.63	22.34
15	36	18		22.54	22.46	22.16
15	36	37		22.55	22.52	22.08
15	75	0		22.54	22.58	22.19
15	1	0	16-QAM	22.92	22.95	22.76
15	1	37		22.75	22.74	22.33
15	1	74		22.67	22.65	21.88
15	36	0		21.76	21.49	21.29
15	36	18		21.65	21.48	21.22
15	36	37		21.66	21.52	21.16
15	75	0		21.46	21.51	21.16
20	1	0	QPSK	23.68	23.41	23.23
20	1	49		23.58	23.36	23.18
20	1	99		23.24	23.08	22.89
20	50	0		22.70	22.61	22.28
20	50	24		22.50	22.50	22.23
20	50	49		22.45	22.37	22.00
20	100	0		22.53	22.54	22.18
20	1	0	16-QAM	22.94	22.79	22.64
20	1	49		22.82	22.68	22.44
20	1	99		22.12	22.20	21.91
20	50	0		21.68	21.70	21.31
20	50	24		21.70	21.61	21.25
20	50	49		21.23	21.38	20.97
20	100	0		21.49	21.54	21.21



LTE Band 38 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	23.14	22.62	22.53
5	1	12		23.40	22.69	22.78
5	1	24		23.01	22.67	22.30
5	12	0		22.08	21.67	21.47
5	12	6		22.11	21.66	21.45
5	12	11		22.00	21.67	21.39
5	25	0		22.04	21.64	21.40
5	1	0	16-QAM	22.31	22.17	21.69
5	1	12		22.10	21.74	21.75
5	1	24		22.07	21.67	21.49
5	12	0		21.26	20.67	20.30
5	12	6		21.16	20.64	20.56
5	12	11		21.00	20.65	20.50
5	25	0		21.27	20.76	20.66
10	1	0	QPSK	23.22	22.61	22.80
10	1	24		22.91	22.75	22.68
10	1	49		23.32	22.53	22.36
10	25	0		22.11	21.65	21.57
10	25	12		22.08	21.71	21.73
10	25	24		21.99	21.67	21.69
10	50	0		22.31	21.63	21.77
10	1	0	16-QAM	21.97	21.63	21.77
10	1	24		22.03	21.65	21.70
10	1	49		22.08	21.59	21.54
10	25	0		21.35	20.51	20.68
10	25	12		21.28	20.57	20.87
10	25	24		21.39	20.54	20.82
10	50	0		21.19	20.57	20.48



LTE Band 38 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0	QPSK	22.97	22.66	22.61
15	1	37		22.73	22.33	22.49
15	1	74		22.94	22.59	22.57
15	36	0		22.17	21.78	21.56
15	36	18		22.21	21.66	21.85
15	36	37		22.05	21.59	21.45
15	75	0		22.03	21.63	21.78
15	1	0	16-QAM	21.96	22.10	21.80
15	1	37		22.10	21.73	21.62
15	1	74		21.86	21.79	21.49
15	36	0		21.34	20.63	20.55
15	36	18		21.05	20.59	20.52
15	36	37		21.06	20.60	20.58
15	75	0		21.07	20.59	20.55
20	1	0	QPSK	23.42	22.84	22.68
20	1	49		23.09	22.54	22.63
20	1	99		22.80	22.45	22.34
20	50	0		22.43	21.66	21.79
20	50	24		22.23	21.64	21.78
20	50	49		22.01	21.54	21.72
20	100	0		22.23	21.62	21.53
20	1	0	16-QAM	22.36	22.05	21.85
20	1	49		22.02	21.74	21.51
20	1	99		21.72	21.55	21.28
20	50	0		21.21	20.69	20.68
20	50	24		21.20	20.77	20.50
20	50	49		20.81	20.55	20.44
20	100	0		20.94	20.59	20.68



Peak-to-Average Ratio

Mode	LTE Band 4 / 20MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	4.46	5.01	5.39	5.94	PASS
Middle CH	4.55	4.96	5.04	5.97	
Highest CH	4.38	4.90	5.36	5.88	

Mode	LTE Band 5 / 10MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	4.67	5.13	5.45	6.03	PASS
Middle CH	4.64	5.19	5.19	6.06	
Highest CH	4.67	5.30	5.10	6.20	

Mode	LTE Band 7 / 20MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	4.52	4.93	5.36	5.80	PASS
Middle CH	4.61	4.96	5.19	5.86	
Highest CH	4.61	4.84	5.42	5.83	

Mode	LTE Band 38 / 20MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	4.96	4.87	5.33	5.88	PASS
Middle CH	5.80	5.97	5.13	5.88	
Highest CH	4.99	5.01	5.91	5.77	




LTE Band 4 / 20MHz / QPSK

Lowest Channel / 1RB




Date: 27 JUL 2015 14:49:52

Lowest Channel / Full RB

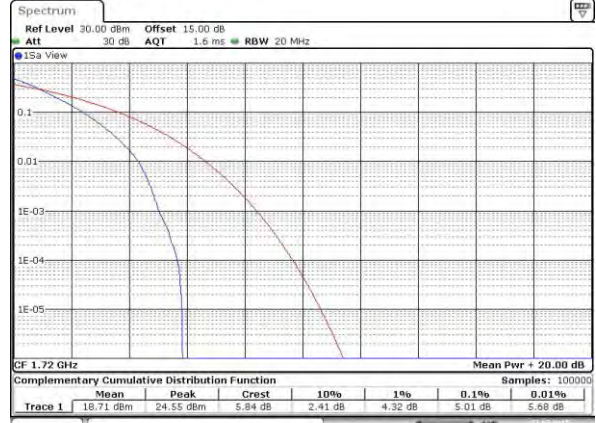


Date: 27 JUL 2015 14:51:32

Middle Channel / 1RB

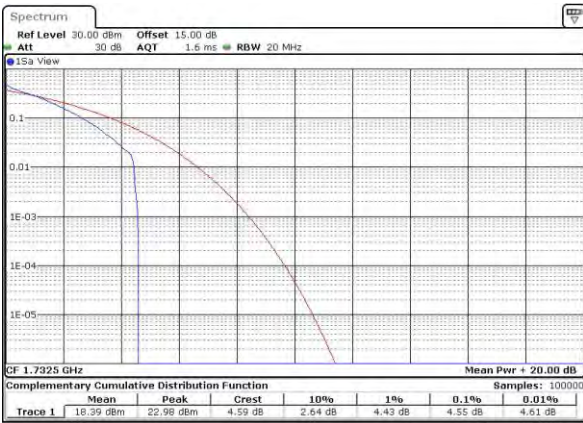


Date: 27 JUL 2015 14:52:01

Middle Channel / Full RB

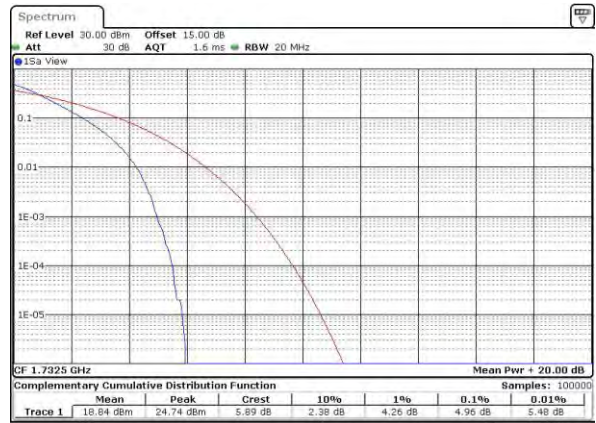

Date: 27 JUL 2015 14:52:35

Highest Channel / 1RB

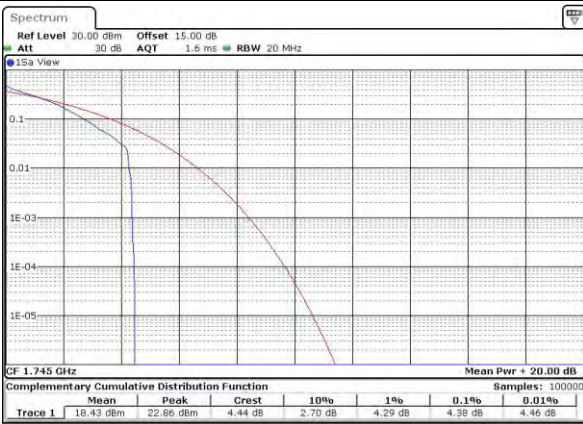

Date: 27 JUL 2015 14:53:09

Highest Channel / Full RB




Date: 27 JUL 2015 14:53:48




LTE Band 4 / 20MHz / 16QAM

Lowest Channel / 1RB

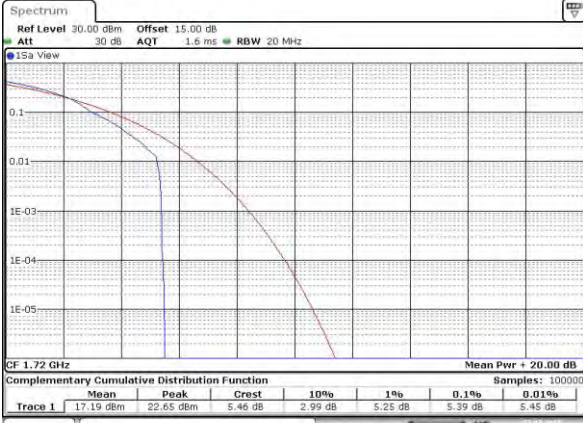


Date: 27 JUL 2015 14:46:00

Lowest Channel / Full RB

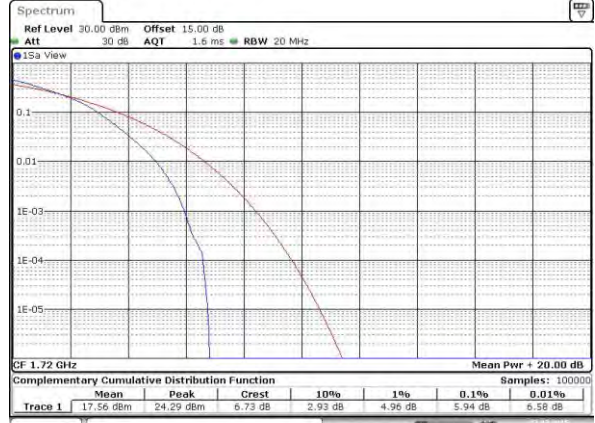

Date: 27 JUL 2015 14:46:31

Middle Channel / 1RB

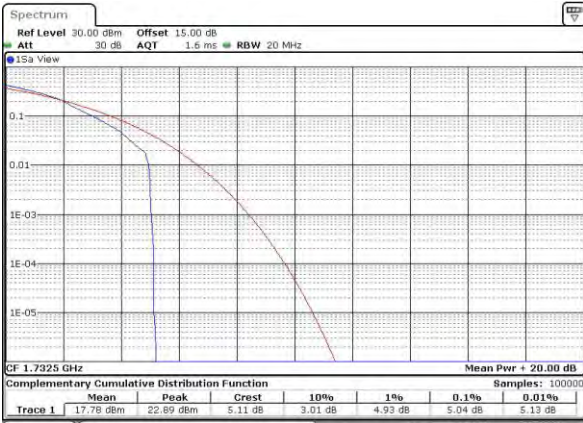


Date: 27 JUL 2015 14:46:47

Middle Channel / Full RB



Date: 27 JUL 2015 14:48:05

Highest Channel / 1RB

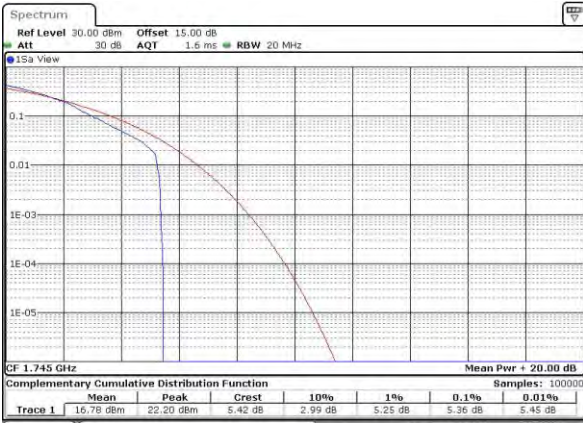

Date: 27 JUL 2015 14:48:35

Highest Channel / Full RB



Date: 27 JUL 2015 14:49:12



LTE Band 5 / 10MHz / QPSK

Lowest Channel / 1RB



Date: 27 JUL 2015 22:01:19

Lowest Channel / Full RB



Date: 27 JUL 2015 22:01:49

Middle Channel / 1RB



Date: 27 JUL 2015 22:02:01

Middle Channel / Full RB



Date: 27 JUL 2015 22:02:13

Highest Channel / 1RB



Date: 27 JUL 2015 22:02:26

Highest Channel / Full RB



Date: 27 JUL 2015 22:02:38



LTE Band 5 / 10MHz / 16QAM

Lowest Channel / 1RB




Date: 27 JUL 2015 22:00:03

Lowest Channel / Full RB



Date: 27 JUL 2015 22:00:15

Middle Channel / 1RB

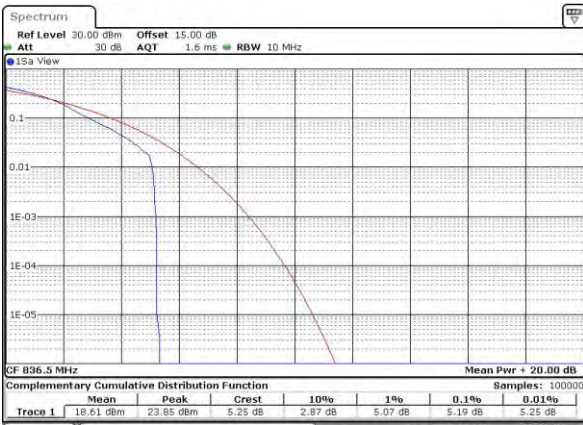


Date: 27 JUL 2015 22:00:27

Middle Channel / Full RB



Date: 27 JUL 2015 22:00:37

Highest Channel / 1RB

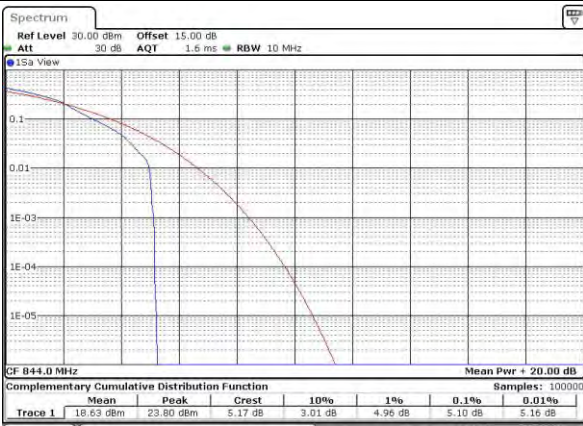

Date: 27 JUL 2015 22:00:55

Highest Channel / Full RB



Date: 27 JUL 2015 22:01:07



LTE Band 7 / 20MHz / QPSK

Lowest Channel / 1RB




Date: 27 JUL 2015 19:08:57

Lowest Channel / Full RB




Date: 27 JUL 2015 19:09:13

Middle Channel / 1RB

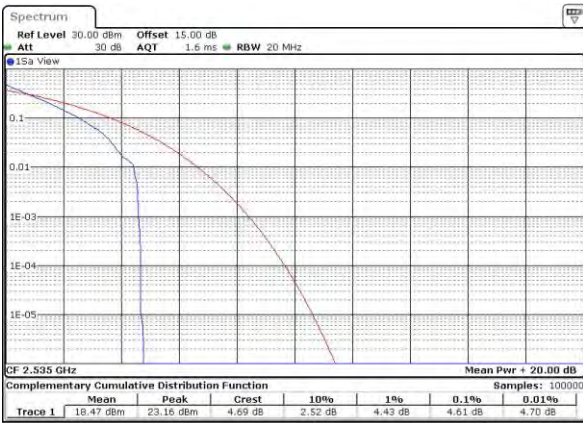

Date: 27 JUL 2015 19:24:53

Middle Channel / Full RB

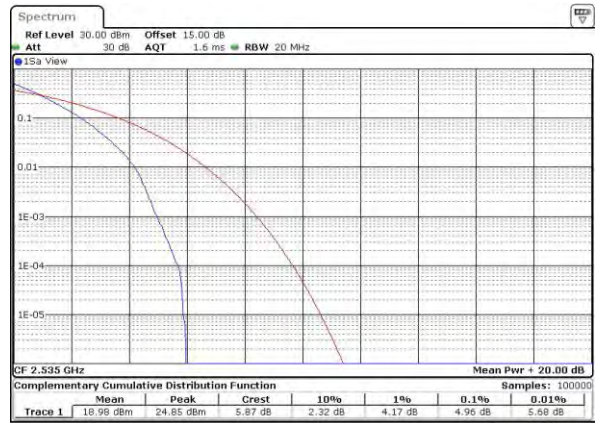


Date: 27 JUL 2015 19:25:54

Highest Channel / 1RB



Date: 27 JUL 2015 19:26:13

Highest Channel / Full RB

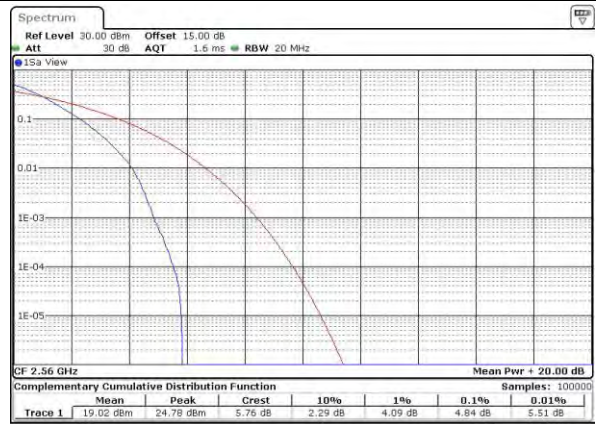

Date: 27 JUL 2015 19:26:32




LTE Band 7 / 20MHz / 16QAM

Lowest Channel / 1RB




Date: 27 JUL 2015 19:04:21

Lowest Channel / Full RB

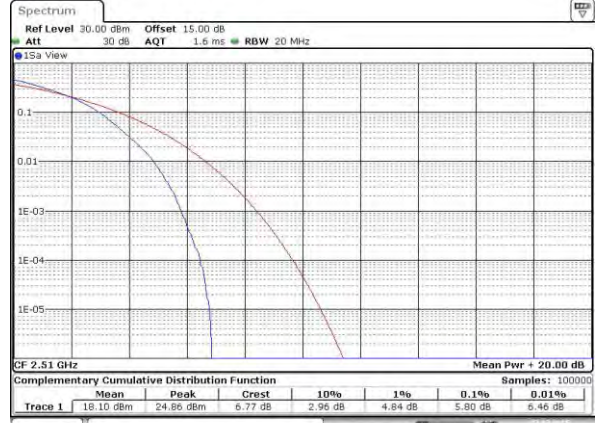


Date: 27 JUL 2015 19:04:51

Middle Channel / 1RB

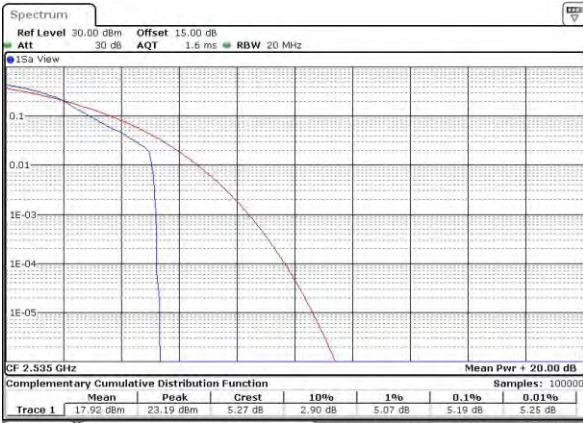

Date: 27 JUL 2015 19:05:08

Middle Channel / Full RB

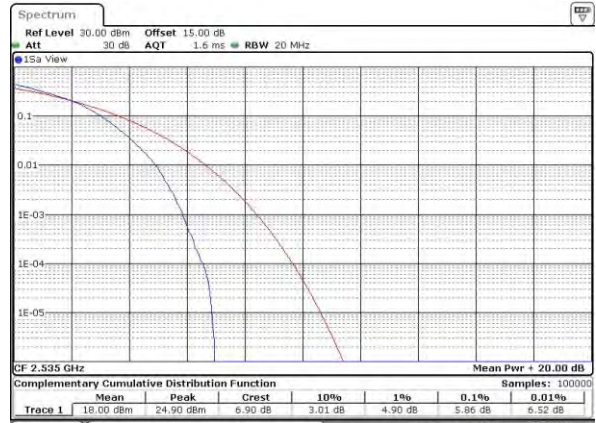

Date: 27 JUL 2015 19:06:32

Highest Channel / 1RB



Date: 27 JUL 2015 19:06:46

Highest Channel / Full RB



Date: 27 JUL 2015 19:07:03




LTE Band 38 / 20MHz / QPSK

Lowest Channel / 1RB



Date 31 JUL 2015 00 02 07

Lowest Channel / Full RB

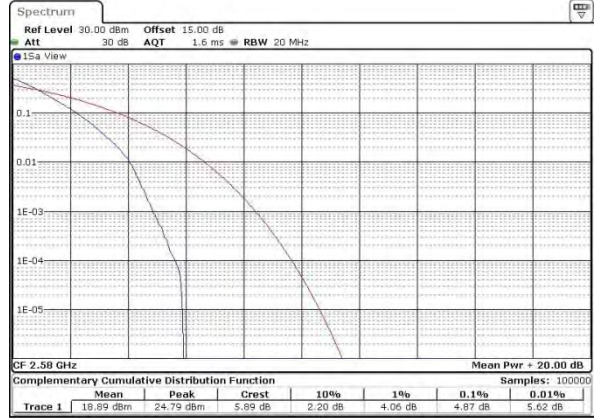


Date 31 JUL 2015 00 02 31

Middle Channel / 1RB



Date 31 JUL 2015 00 02 57

Middle Channel / Full RB

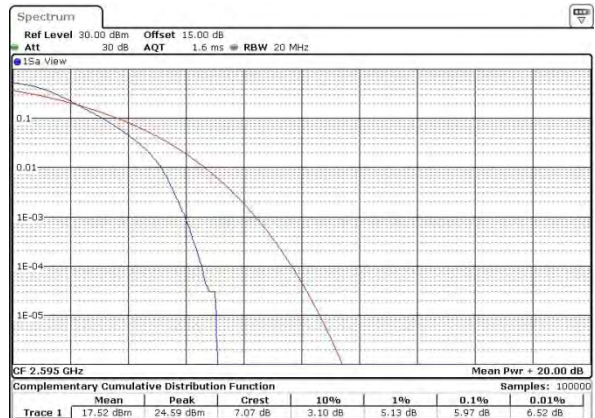

Date 31 JUL 2015 00 03 16

Highest Channel / 1RB



Date 31 JUL 2015 00 03 37

Highest Channel / Full RB




Date 31 JUL 2015 00 04 00




LTE Band 38 / 20MHz / 16QAM

Lowest Channel / 1RB

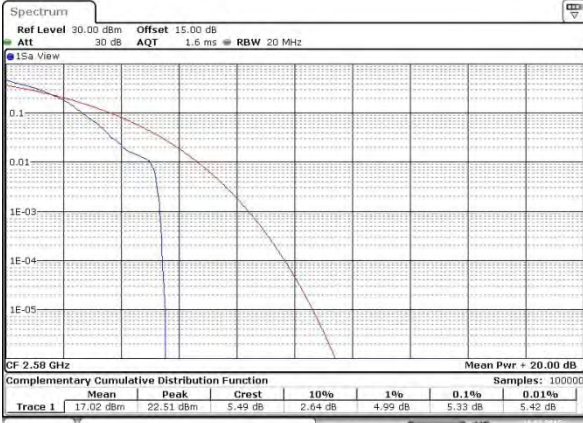


Date: 31 JUL 2015 00:05:28

Lowest Channel / Full RB

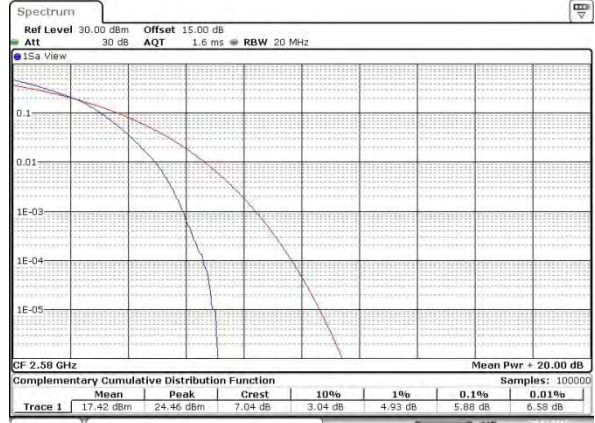


Date: 30 JUL 2015 23:59:54

Middle Channel / 1RB

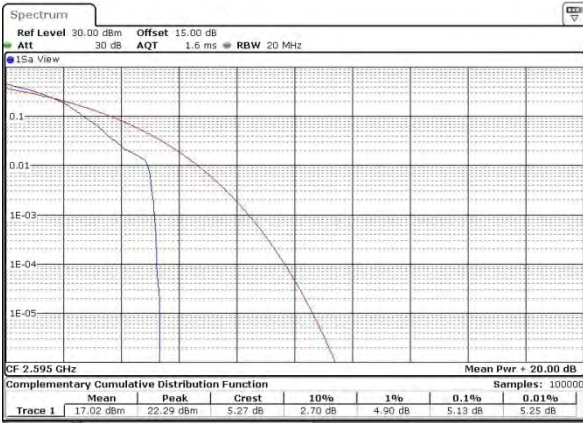


Date: 31 JUL 2015 00:00:28

Middle Channel / Full RB

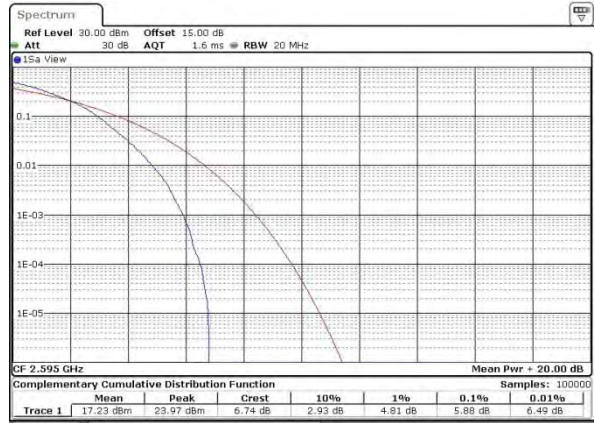


Date: 31 JUL 2015 00:00:48

Highest Channel / 1RB

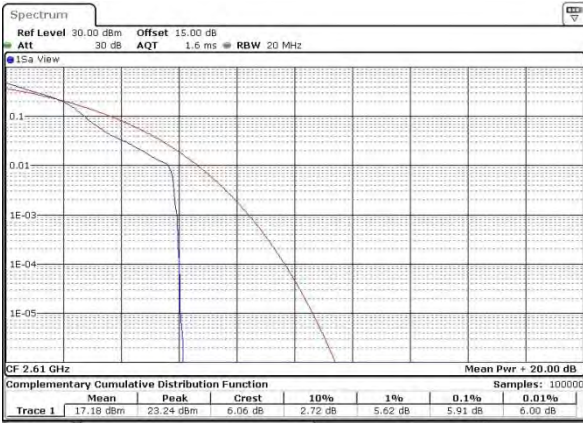

Date: 31 JUL 2015 00:01:02

Highest Channel / Full RB

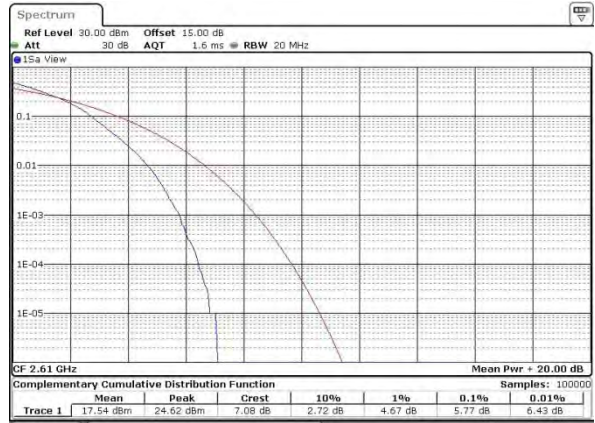

Date: 31 JUL 2015 00:01:36



26dB Bandwidth

Mode	LTE Band 4 : 26dB BW(MHz)											
	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.29	1.30	3.05	3.05	5.05	5.05	10.01	9.91	14.60	14.69	20.26	20.38
Middle CH	1.28	1.30	3.05	3.05	5.04	5.04	9.97	10.01	14.60	14.72	20.58	20.38
Highest CH	1.29	1.30	3.05	3.05	5.05	5.05	9.99	10.03	14.63	14.75	20.38	20.38

Mode	LTE Band 5 : 26dB BW(MHz)											
	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.30	1.29	3.05	3.05	5.04	5.05	9.99	9.95	-	-	-	-
Middle CH	1.29	1.29	3.05	3.05	5.05	5.04	9.97	9.95	-	-	-	-
Highest CH	1.28	1.29	3.05	3.05	5.04	5.04	10.03	9.91	-	-	-	-


Mode	LTE Band 7 : 26dB BW(MHz)											
	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	-	-	-	-	5.05	5.05	9.91	9.97	14.66	14.78	20.26	20.34
Middle CH	-	-	-	-	5.04	5.05	9.99	9.97	14.66	14.84	20.46	20.34
Highest CH	-	-	-	-	5.06	5.03	10.05	9.91	14.60	14.75	20.30	20.38

Mode	LTE Band 38 : 26dB BW(MHz)											
	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH					5.09	5.04	9.95	10.01	15.29	14.78	20.18	20.26
Middle CH					5.29	5.06	9.83	9.97	14.60	14.57	21.98	20.42
Highest CH					5.29	5.05	9.91	9.89	14.90	14.60	23.02	20.26




LTE Band 4

Lowest Channel / 1.4MHz / QPSK

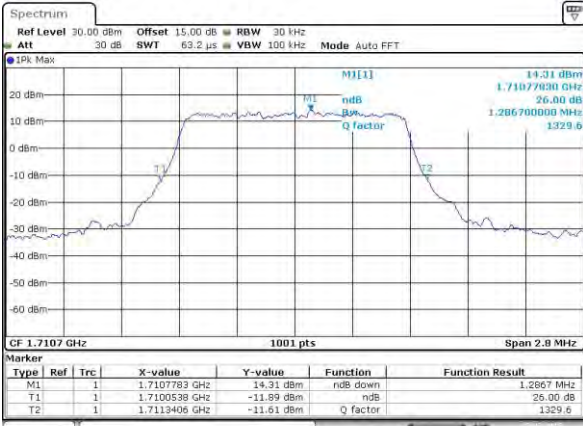


Date: 27 JUL 2015 12:52:34

Lowest Channel / 1.4MHz / 16QAM

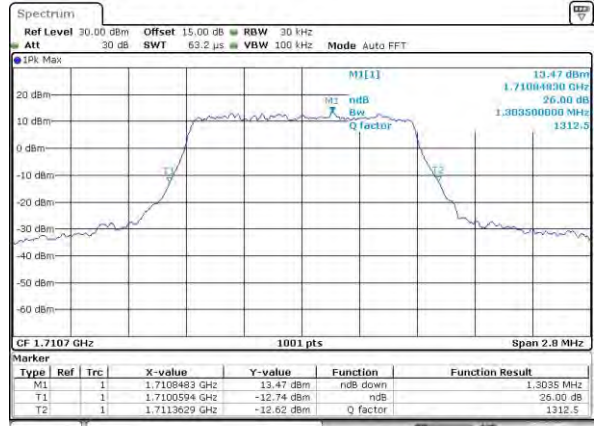


Date: 27 JUL 2015 12:52:47

Middle Channel / 1.4MHz / QPSK

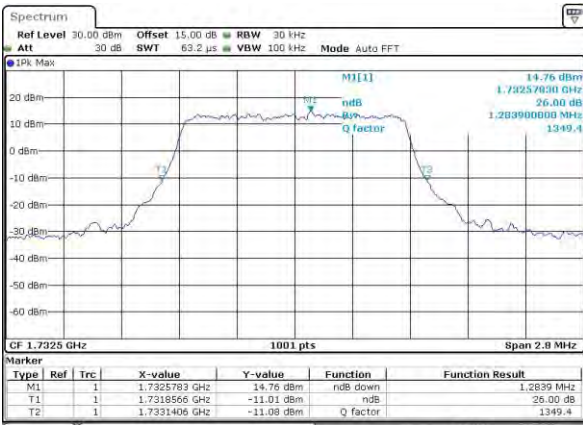


Date: 27 JUL 2015 13:00:20

Middle Channel / 1.4MHz / 16QAM

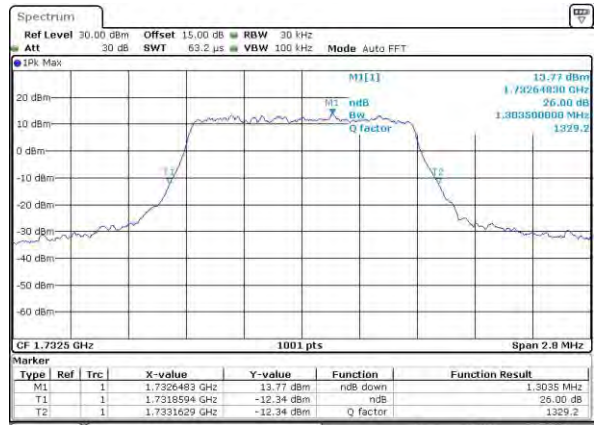


Date: 27 JUL 2015 13:00:33

Highest Channel / 1.4MHz / QPSK

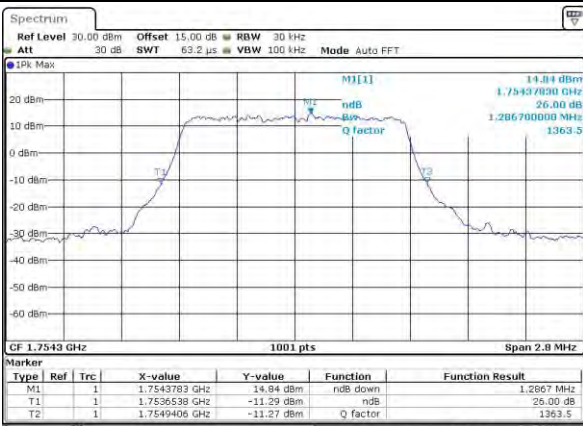

Date: 27 JUL 2015 13:03:30

Highest Channel / 1.4MHz / 16QAM

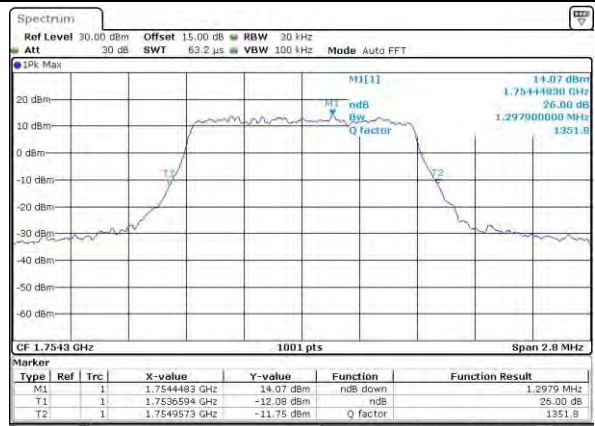


Date: 27 JUL 2015 13:03:43




LTE Band 4

Lowest Channel / 3MHz / QPSK

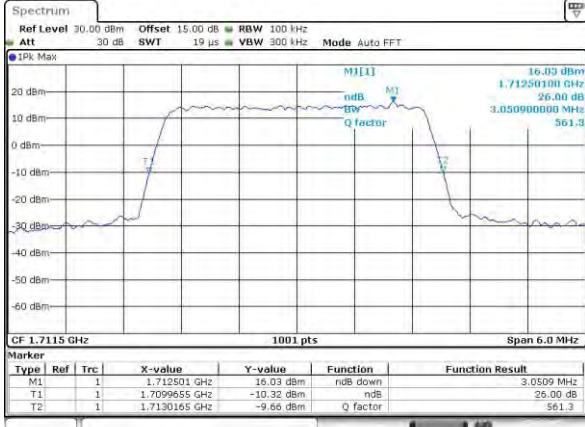


Date: 27 JUL 2015 13:11:16

Lowest Channel / 3MHz / 16QAM

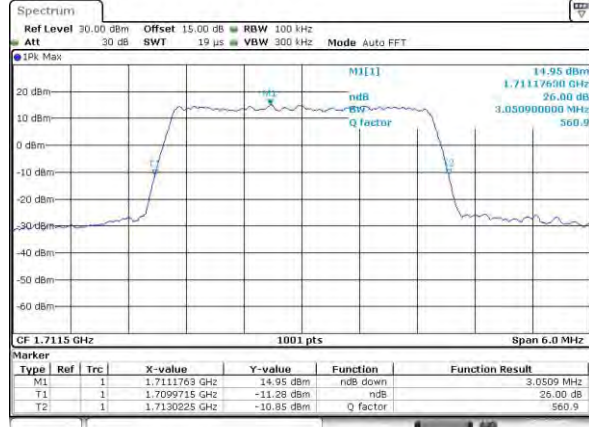


Date: 27 JUL 2015 13:11:28

Middle Channel / 3MHz / QPSK

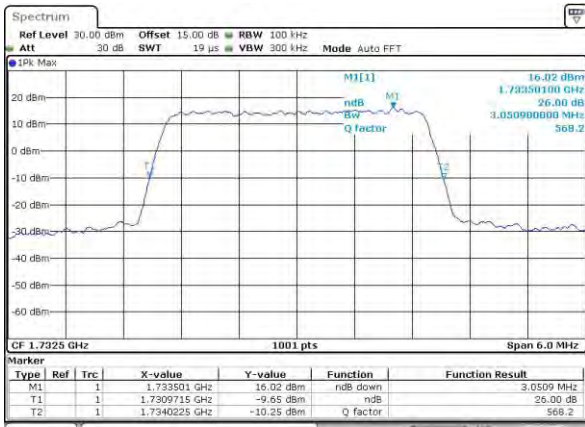


Date: 27 JUL 2015 13:19:01

Middle Channel / 3MHz / 16QAM

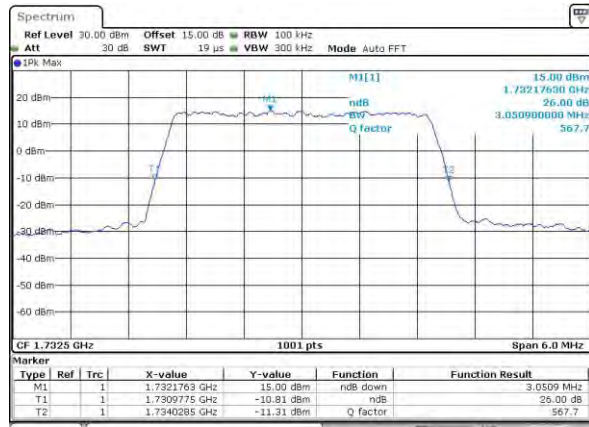


Date: 27 JUL 2015 13:19:13

Highest Channel / 3MHz / QPSK

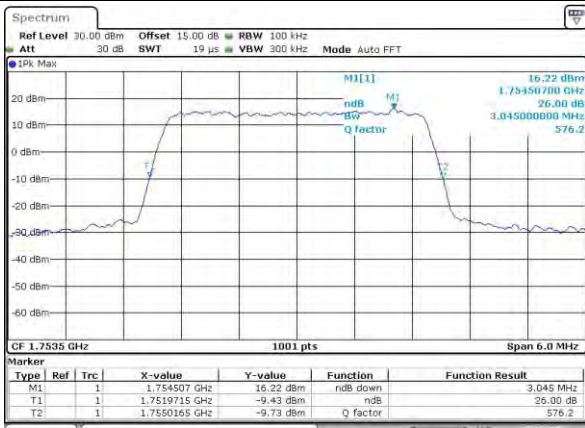

Date: 27 JUL 2015 13:22:11

Highest Channel / 3MHz / 16QAM

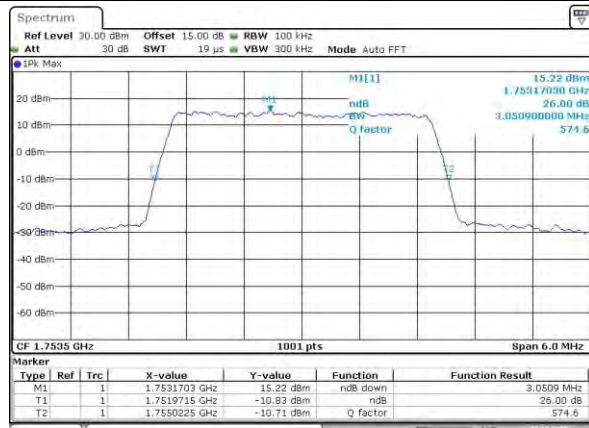


Date: 27 JUL 2015 13:22:24




LTE Band 4

Lowest Channel / 5MHz / QPSK

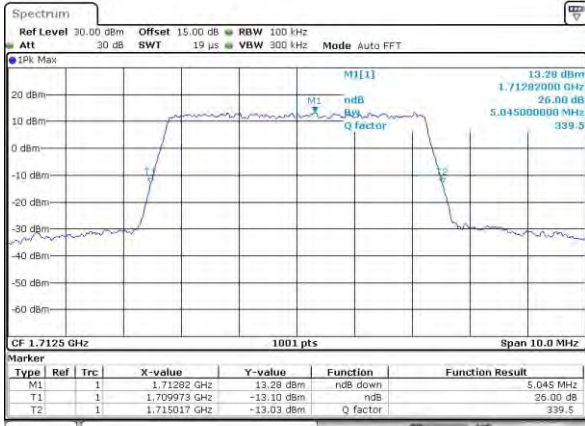


Date: 27 JUL 2015 13:29:56

Lowest Channel / 5MHz / 16QAM

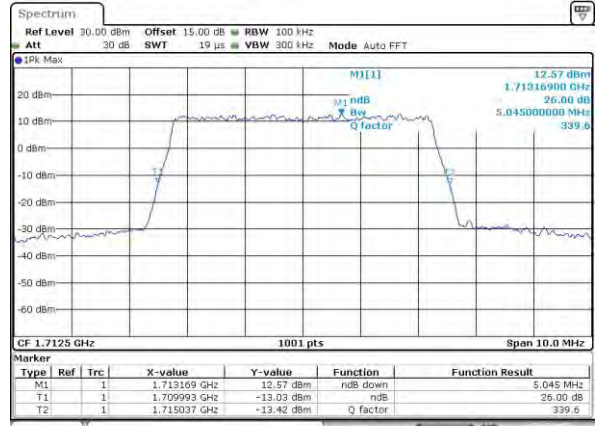


Date: 27 JUL 2015 13:30:09

Middle Channel / 5MHz / QPSK

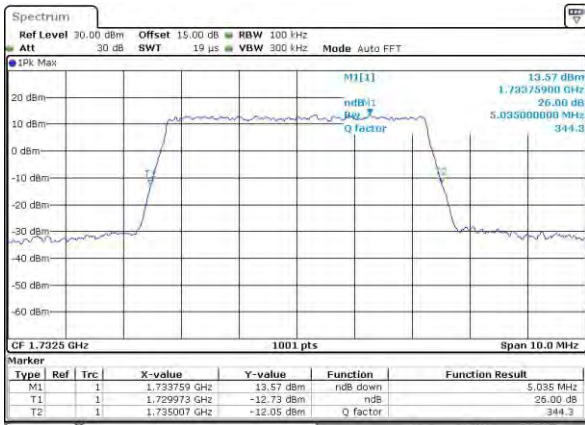


Date: 27 JUL 2015 13:37:41

Middle Channel / 5MHz / 16QAM

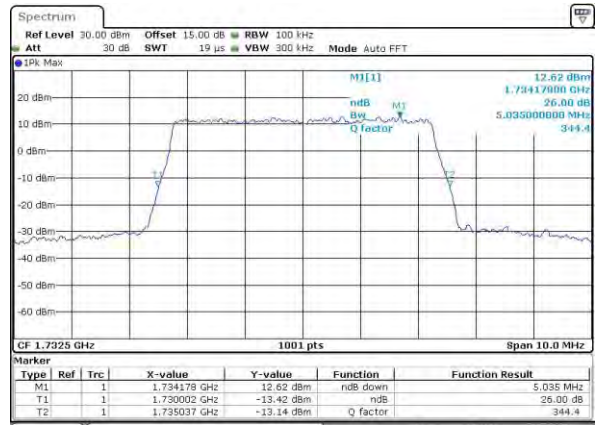


Date: 27 JUL 2015 13:37:54

Highest Channel / 5MHz / QPSK

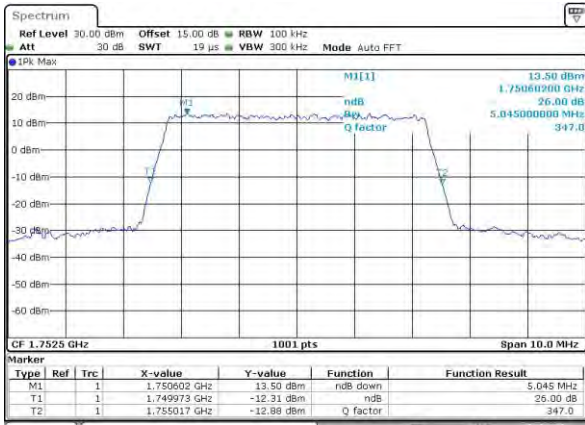

Date: 27 JUL 2015 13:40:52

Highest Channel / 5MHz / 16QAM

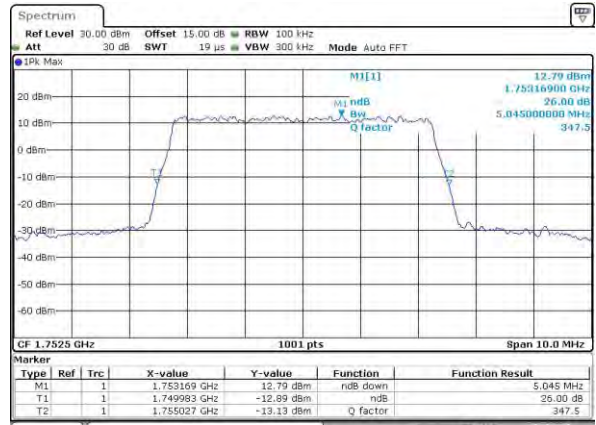

Date: 27 JUL 2015 13:41:05