

## TEST REPORT

Test report no.: 1-4406/17-02-02-A



### Testing laboratory

**CTC advanced GmbH**

Untertuerkheimer Strasse 6 – 10  
66117 Saarbruecken / Germany  
Phone: + 49 681 5 98 - 0  
Fax: + 49 681 5 98 - 9075  
Internet: <http://www.ctcadvanced.com>  
e-mail: [mail@ctcadvanced.com](mailto:mail@ctcadvanced.com)

**Accredited Testing Laboratory:**

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2005) by the Deutsche Akkreditierungsstelle GmbH (DAkkS). The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number: D-PL-12076-01-01

### Applicant

**Scheidt & Bachmann GmbH**

Breite Str. 132  
41238 Mönchengladbach / GERMANY  
Phone: +49 2166 266 1293  
Fax: +49 2166 266 701  
Contact: Nils Hündgen  
e-mail: [huedngen.nils@scheidt-bachmann.de](mailto:huedngen.nils@scheidt-bachmann.de)

### Manufacturer

**Scheidt & Bachmann GmbH**

Breite Str. 132  
41238 Mönchengladbach / GERMANY

### Test standard/s

47 CFR Part 15 Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices  
RSS - 210 Issue 9 Spectrum Management and Telecommunications Radio Standards Specification - Licence-Exempt Radio Apparatus: Category I Equipment

For further applied test standards please refer to section 3 of this test report.

### Test Item

**Kind of test item:** RFID Reader  
**Model name:** FareGo SCR  
**FCC ID:** 05K-SCR2  
**IC:** 8312A-SCR2  
**Frequency:** 13.56 MHz  
**Technology tested:** RFID  
**Antenna:** 2 external antennas  
**Power supply:** 12.0 V DC by external power supply  
**Temperature range:** -20°C to +55°C



This test report is electronically signed and valid without handwriting signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

### Test report authorized:

Christoph Schneider  
Lab Manager  
Radio Communications & EMC

### Test performed:

David Lang  
Lab Manager  
Radio Communications & EMC

## 1 Table of contents

1	Table of contents .....	2
2	General information .....	3
2.1	Notes and disclaimer .....	3
2.2	Application details.....	3
2.3	Test laboratories sub-contracted .....	3
3	Test standard/s and references .....	4
4	Test environment.....	5
5	Test item.....	5
5.1	General description.....	5
5.2	Additional information .....	5
6	Description of the test setup.....	6
6.1	Shielded semi anechoic chamber.....	7
6.2	Shielded fully anechoic chamber .....	8
6.3	Radiated measurements RF laboratory .....	9
7	Sequence of testing .....	10
7.1	Sequence of testing radiated spurious 9 kHz to 30 MHz.....	10
7.2	Sequence of testing radiated spurious 30 MHz to 1 GHz.....	11
8	Measurement uncertainty .....	12
9	Summary of measurement results .....	13
10	Additional comments .....	14
11	Measurement results.....	15
11.1	Occupied bandwidth.....	15
11.2	Field strength of the fundamental .....	17
11.3	Field strength of the harmonics and spurious .....	18
11.4	Conducted limits .....	23
11.5	Frequency error .....	28
12	Observations .....	29
Annex A	Glossary.....	30
Annex B	Document history .....	31
Annex C	Accreditation Certificate .....	31

## 2 General information

### 2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CTC advanced GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CTC advanced GmbH.

The testing service provided by CTC advanced GmbH has been rendered under the current "General Terms and Conditions for CTC advanced GmbH".

CTC advanced GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CTC advanced GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CTC advanced GmbH test report include or imply any product or service warranties from CTC advanced GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CTC advanced GmbH.

All rights and remedies regarding vendor's products and services for which CTC advanced GmbH has prepared this test report shall be provided by the party offering such products or services and not by CTC advanced GmbH. In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

**This test report replaces the test report with the number 1-4406/17-02-02 and dated 2017-08-30**

### 2.2 Application details

Date of receipt of order:	2017-08-17
Date of receipt of test item:	2017-08-18
Start of test:	2017-08-21
End of test:	2017-08-21
Person(s) present during the test:	-/-

### 2.3 Test laboratories sub-contracted

None

### 3 Test standard/s and references

Test standard	Date	Description
47 CFR Part 15		Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices
RSS - 210 Issue 9	August 2016	Spectrum Management and Telecommunications Radio Standards Specification - Licence-Exempt Radio Apparatus: Category I Equipment
RSS - Gen Issue 4	November 2014	Spectrum Management and Telecommunications Radio Standards Specifications - General Requirements and Information for the Certification of Radio Apparatus

Guidance	Version	Description
ANSI C63.4-2014	-/-	American national standard for methods of measurement of radio-noise emissions from low-voltage electrical and electronic equipment in the range of 9 kHz to 40 GHz
ANSI C63.10-2013	-/-	American national standard of procedures for compliance testing of unlicensed wireless devices



## 6 Description of the test setup

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, RF generating and signaling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).


In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Lab/Item).

### **Agenda:** Kind of Calibration

k	calibration / calibrated	EK	limited calibration
ne	not required (k, ev, izw, zw not required)	zw	cyclical maintenance (external cyclical maintenance)
ev	periodic self verification	izw	internal cyclical maintenance
Ve	long-term stability recognized	g	blocked for accredited testing
v/k!	Attention: extended calibration interval		
NK!	Attention: not calibrated	*)	next calibration ordered / currently in progress

## 6.1 Shielded semi anechoic chamber

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 30 MHz to 1 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are conform to specifications ANSI C63. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analyzers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.

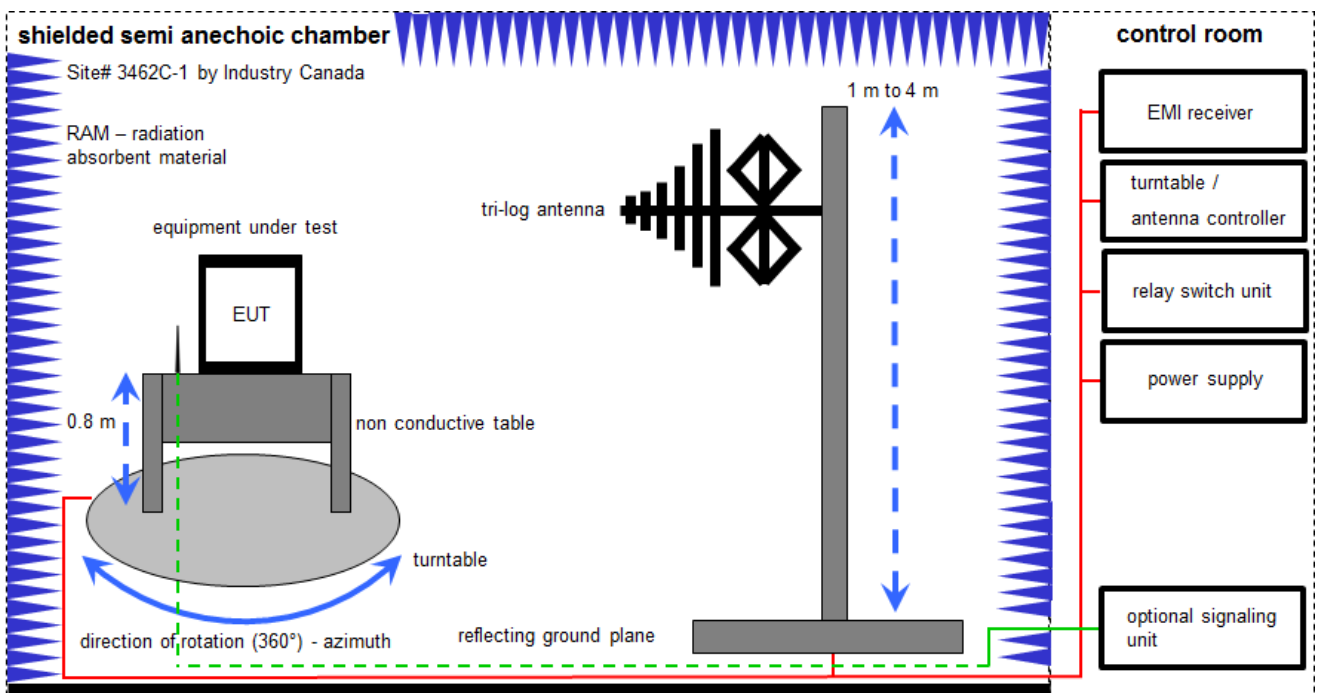

Measurement distance: tri-log antenna 10 meter

$$FS = UR + CL + AF$$

(FS-field strength; UR-voltage at the receiver; CL-loss of the cable; AF-antenna factor)


Example calculation:

$$FS [dB\mu V/m] = 12.35 [dB\mu V/m] + 1.90 [dB] + 16.80 [dB/m] = 31.05 [dB\mu V/m] (35.69 \mu V/m)$$

### Equipment table:

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Switch-Unit	3488A	HP	2719A14505	300000368	ev	-/-	-/-
2	A	EMI Test Receiver	ESCI 3	R&S	100083	300003312	k	01.02.2017	31.01.2018
3	A	Analyzer-Reference-System (Harmonics and Flicker)	ARS 16/1	SPS	A3509 07/0 0205	300003314	Ve	02.02.2016	02.02.2018
4	A	Antenna Tower	Model 2175	ETS-Lindgren	64762	300003745	izw	-/-	-/-
5	A	Positioning Controller	Model 2090	ETS-Lindgren	64672	300003746	izw	-/-	-/-
6	A	Turntable Interface-Box	Model 105637	ETS-Lindgren	44583	300003747	izw	-/-	-/-
7	A	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	295	300003787	k	25.04.2016	25.04.2018

## 6.2 Shielded fully anechoic chamber

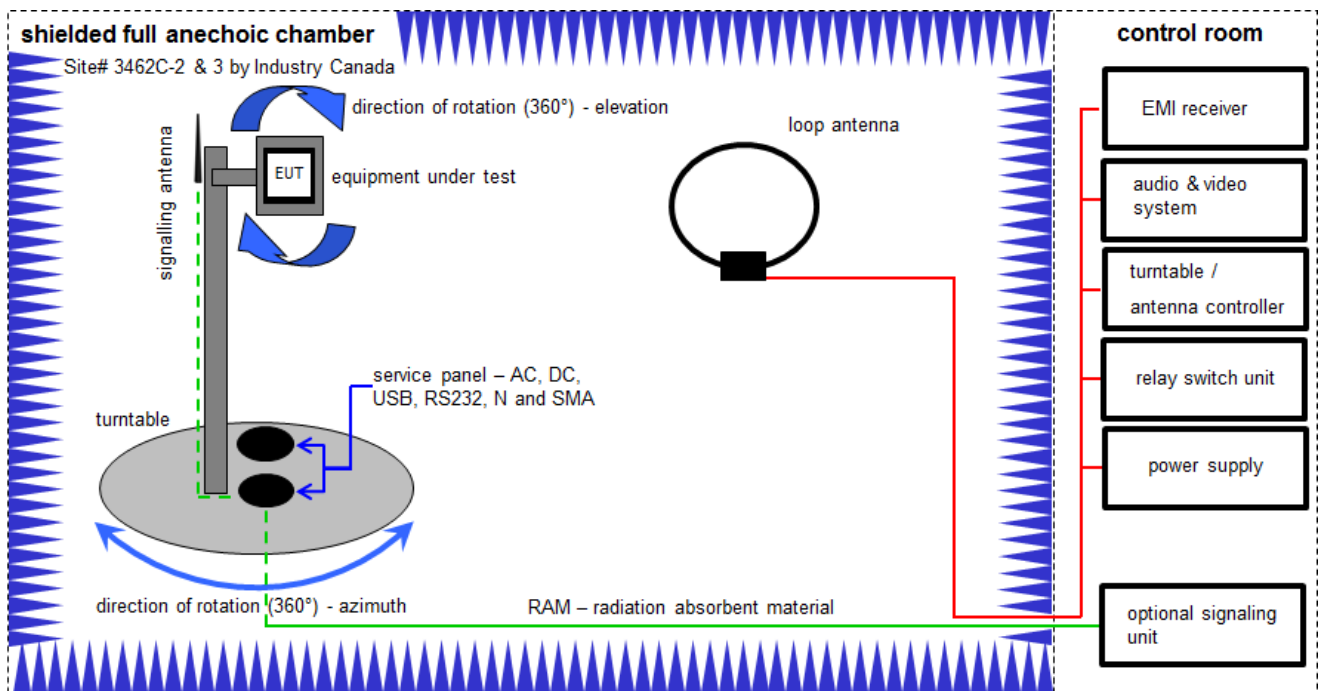

Measurement distance: loop antenna 3 meter

$$FS = UR + CA + AF$$

(FS-field strength; UR-voltage at the receiver; CA-loss of the signal path; AF-antenna factor)

Example calculation:


$$FS [dB\mu V/m] = 40.0 [dB\mu V/m] + (-35.8) [dB] + 32.9 [dB/m] = 37.1 [dB\mu V/m] (71.61 \mu V/m)$$

### Equipment table:

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Anechoic chamber	FAC 3/5m	MWB / TDK	87400/02	300000996	ev	-/-	-/-
2	A	Switch / Control Unit	3488A	HP	*	300000199	ne	-/-	-/-
3	A	EMI Test Receiver 20Hz- 26,5GHz	ESU26	R&S	100037	300003555	k	31.01.2017	30.01.2018
4	A	4U RF Switch Platform	L4491A	Agilent Technologies	MY50000037	300004509	ne	-/-	-/-
5	A	NEXIO EMV-Software	BAT EMC V3.16.0.49	EMCO		300004682	ne	-/-	-/-
6	A	PC	ExOne	F+W		300004703	ne	-/-	-/-
7	A	Active Loop Antenna 9 kHz to 30 MHz	6502	EMCO	2210	300001015	k	07.07.2017	06.07.2019



### 6.3 Radiated measurements RF laboratory

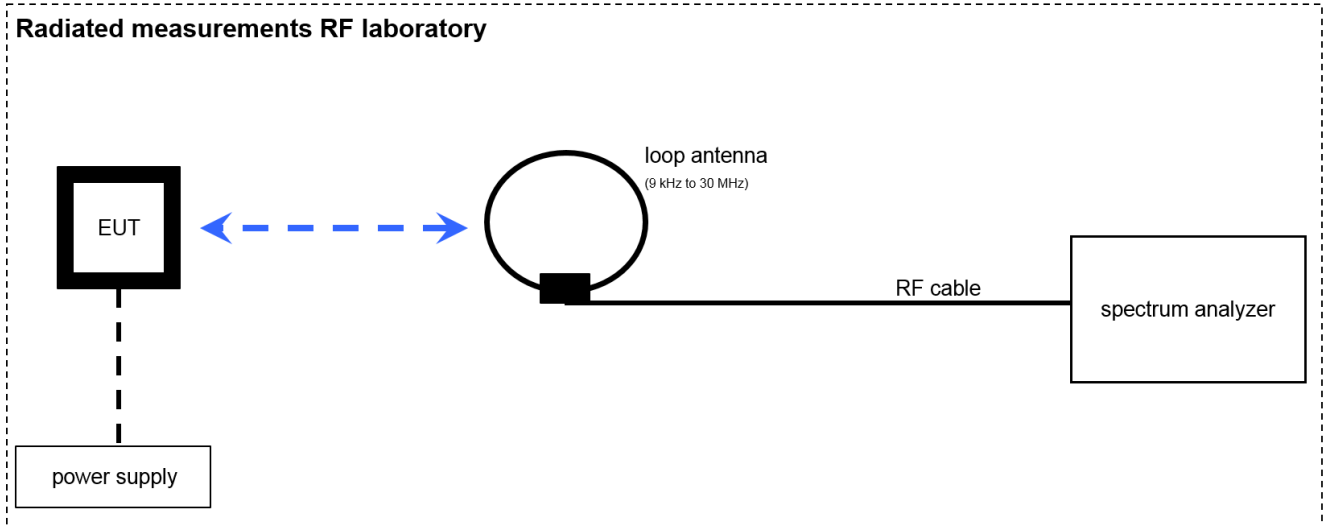

#### Equipment table:

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Spectrum Analyzer 9kHz to 30GHz - 140..+30dBm	FSP30	R&S	100886	300003575	k	24.01.2017	23.01.2019
2	A	RF-Cable DFS- Tester No. 1	Enviroflex 316 D	Huber & Suhner	Batch no. 1560522	400001257	ev	-/-	-/-
3	A	Active Loop Antenna 9 kHz to 30 MHz	6502	EMCO	2210	300001015	k	07.07.2017	06.07.2019

## 7 Sequence of testing

### 7.1 Sequence of testing radiated spurious 9 kHz to 30 MHz

#### Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a 2-axis positioner with 1.5 m height is used.\*
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

Note: According to ANSI C63.4 a test site with no reference ground plane shall take precedence to show the compliance with the standard. In contrast to a semi-anechoic chamber with conductive ground, the EUT distance to the ground in a fully anechoic chamber is irrelevant because it is a reflection-reduced environment at any distance to the ground structure, so in this case a height of 1.5 m was used.

#### Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1.5 m.
- At each turntable position the analyzer sweeps with positive-peak detector to find the maximum of all emissions.

#### Final measurement

- Identified emissions during the premeasurement are maximized by the software by rotating the turntable from 0° to 360°. In case of the 2-axis positioner is used the elevation axis is also rotated from 0° to 360°.
- The final measurement is done in the position (turntable and elevation) causing the highest emissions with quasi-peak (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. A plot with the graph of the premeasurement and the limit is stored.

## 7.2 Sequence of testing radiated spurious 30 MHz to 1 GHz

### Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 10 m or 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

### Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 m to 3 m.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

### Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximize the peaks by changing turntable position  $\pm 45^\circ$  and antenna height between 1 and 4 m.
- The final measurement is done with quasi-peak detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

**8 Measurement uncertainty**

<b>Measurement uncertainty</b>	
<b>Test case</b>	<b>Uncertainty</b>
Occupied bandwidth	± used RBW
Field strength of the fundamental	± 3 dB
Field strength of the harmonics and spurious	± 3 dB
Receiver spurious emissions and cabinet radiations	± 3 dB
Conducted limits	± 2.6 dB

## 9 Summary of measurement results

<input checked="" type="checkbox"/>	No deviations from the technical specifications were ascertained
<input type="checkbox"/>	There were deviations from the technical specifications ascertained
<input type="checkbox"/>	This test report is only a partial test report. The content and verdict of the performed test cases are listed below.

TC Identifier	Description	Verdict	Date	Remark
RF-Testing	CFR Part 15 RSS 210 Issue 9 RSS Gen Issue 4	See table!	2017-08-30	-/-

Test specification clause	Test case	Temperature conditions	Power source conditions	C	NC	NA	NP	Remark
RSS Gen Issue 4	Occupied bandwidth	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§ 15.225 (a) RSS 210 Issue 9	Field strength of the fundamental	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§ 15.209 & § 15.225 (b-d)	Field strength of the harmonics and spurious	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§ 15.109	Receiver spurious emissions and cabinet radiations	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	No stand-alone receiver mode.
§15.107 §15.207	Conducted limits	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§ 15.225 (a) RSS 210 Issue 9	Frequency tolerance	Normal & extreme conditions	Normal & extreme conditions	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-

**Note:**

- C Compliant
- NC Not compliant
- NA Not applicable
- NP Not performed

## 10 Additional comments

- Reference documents: Customer Questionnaire "O5K-SCR2\_Customer Questionnaire";  
Setup instructions: O5K-SCR2\_Inbetriebnahmeanleitung Rev 1.0;  
issued 2017-07-02.
- Special test descriptions: None
- Configuration descriptions: All test performed with two different antennas selected via the sbsctoolsuite  
software provided by the manufacturer.

## 11 Measurement results

### 11.1 Occupied bandwidth

**Measurement:**

The emission bandwidth (x dB) is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated x dB below the maximum in-band spectral density of the modulated signal.

Measurement parameters	
Detector:	Peak
Resolution bandwidth:	1 % – 5 % of the occupied bandwidth
Video bandwidth:	≥ 3x RBW
Trace mode:	Max hold
Analyser function:	99 % power function
Used equipment:	See chapter 6.3
Measurement uncertainty:	See chapter 8

**Limit:**

<b>IC</b>
for RSP-100 test report coversheet only

**Result:**

**Antenna 1**

<b>99% emission bandwidth</b>
<b>576 kHz</b>


**Antenna 2**

<b>99% emission bandwidth</b>
<b>576 kHz</b>

**Plot:**

**Antenna 1**


**Plot 1: 99 % emission bandwidth**

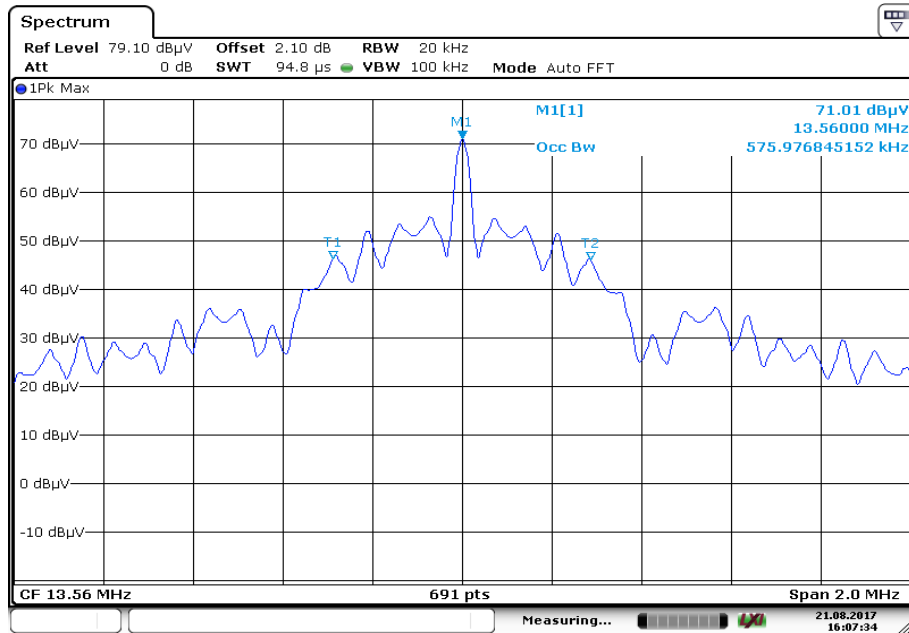

Date: 21.AUG.2017 16:07:34

**Antenna 2**

**Plot 2: 99 % emission bandwidth**

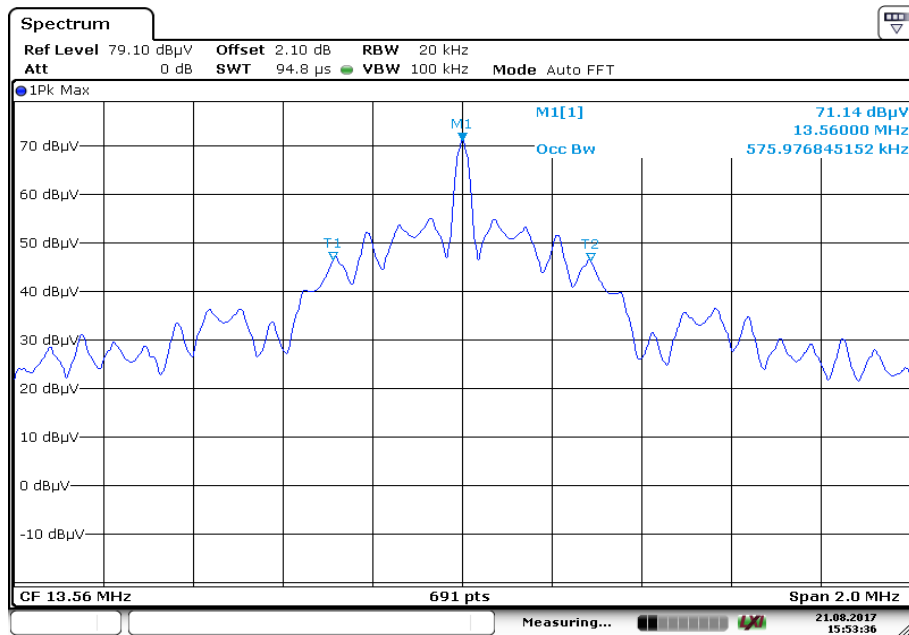

Date: 21.AUG.2017 15:53:36



## 11.2 Field strength of the fundamental

### Measurement:

The maximum detected field strength for the carrier signal.

Measurement parameters	
Detector:	Quasi peak / peak (worst case)
Resolution bandwidth:	120 kHz
Video bandwidth:	≥ 3x RBW
Trace mode:	Max hold
Used equipment:	See chapter 6.2
Measurement uncertainty:	See chapter 8

### Limit:

FCC & IC		
Frequency (MHz)	Field strength (µV/m)	Measurement distance (m)
13.553 to 13.567	15,848 (84 dBµV/m)	30

### Recalculation:

According to ANSI C63.10		
Frequency	Formula	Correction value
13.56 MHz	$FS_{\text{limit}} = FS_{\text{max}} - 40 \log\left(\frac{d_{\text{nearfield}}}{d_{\text{measure}}}\right) - 20 \log\left(\frac{d_{\text{limit}}}{d_{\text{nearfield}}}\right)$ <p> <math>FS_{\text{limit}}</math> is the calculation of field strength at the limit distance, expressed in dBµV/m  <math>FS_{\text{max}}</math> is the measured field strength, expressed in dBµV/m  <math>d_{\text{nearfield}}</math> is the λ/2π distance  <math>d_{\text{measure}}</math> is the distance of the measurement point from EUT  <math>d_{\text{limit}}</math> is the reference limit distance                 </p>	-21.4 from 3m to 30m

### Result:

#### Antenna 1

Field strength of the fundamental		
Frequency	13.56 MHz	
Distance	@ 3 m	@ 30 m
Measured / calculated value	71.1 dBµV/m	49.7 dBµV/m

#### Antenna 2

Field strength of the fundamental		
Frequency	13.56 MHz	
Distance	@ 3 m	@ 30 m
Measured / calculated value	71.1 dBµV/m	49.7 dBµV/m

### 11.3 Field strength of the harmonics and spurious

**Measurement:**

The maximum detected field strength for the harmonics and spurious.

Measurement parameters	
Detector:	Quasi peak / average or peak (worst case – pre-scan)
Resolution bandwidth:	F < 150 kHz: 200 Hz 150 kHz < F < 30 MHz: 9 kHz 30 MHz < F < 1 GHz: 120 kHz
Video bandwidth:	F < 150 kHz: 1 kHz 150 kHz < F < 30 MHz: 100 kHz 30 MHz < F < 1 GHz: 300 kHz
Trace mode:	Max hold
Used equipment:	See chapter 6.1 (RSE above 30 MHz), 6.2 (RSE below 30 MHz)
Measurement uncertainty:	See chapter 8

**Limit:**

FCC & IC		
Frequency (MHz)	Field strength (dBµV/m)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30 (29.5 dBµV/m)	30
30 – 88	100 (40 dBµV/m)	3
88 – 216	150 (43.5 dBµV/m)	3
216 – 960	200 (46 dBµV/m)	3

**Note:** For a reduced measurement distance, please take a look at the limit line and the ANSI C63.10-2013 sub clause 6.4 radiated emissions from unlicensed wireless devices below 30 MHz.

**Result:**

**Antenna 1**


Detected emissions			
Frequency (MHz)	Detector	Resolution bandwidth (kHz)	Detected value (dBµV/m @ 3m)
All emissions below 30 MHz > 20dB below limit (except carrier)			
For emissions above 30 MHz see table below plot.			

**Antenna 2**


Detected emissions			
Frequency (MHz)	Detector	Resolution bandwidth (kHz)	Detected value (dBµV/m @ 3m)
All emissions below 30 MHz > 20dB below limit (except carrier)			
For emissions above 30 MHz see table below plot.			

**Plots: Antenna 1**

**Plot 1: 9 kHz – 30 MHz, magnetic emissions**

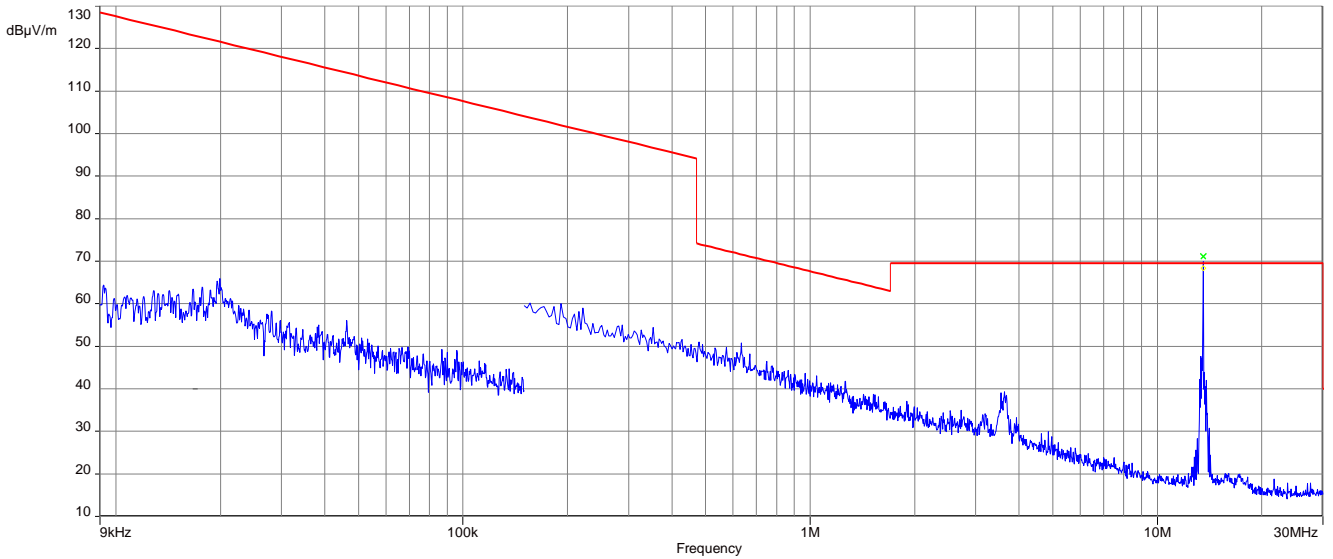


**Plot 2: Spectrum mask (the limits are recalculated according to the ANSI C63.10-2013 sub clause 6.4)**

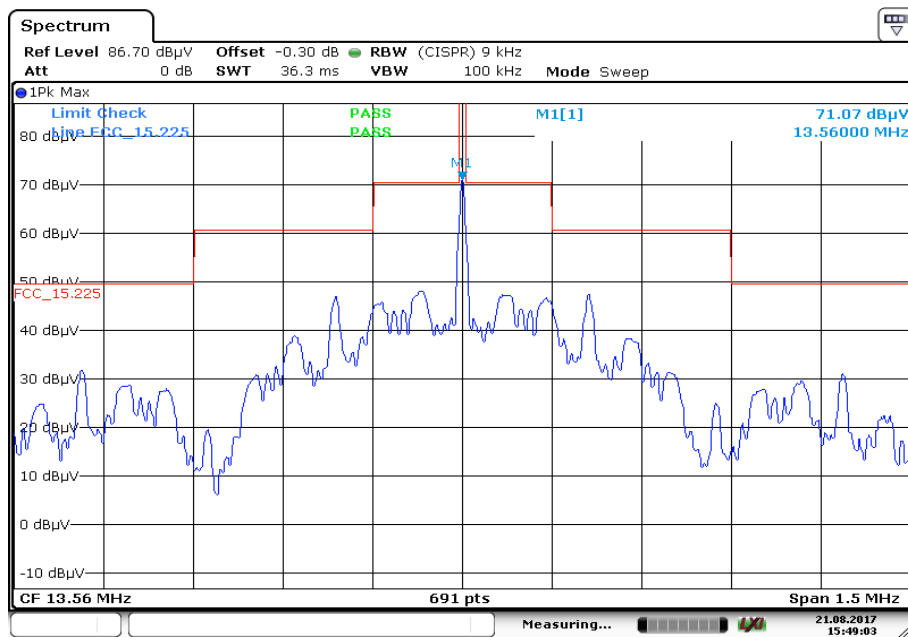

Date: 21.AUG.2017 15:49:03


**Plot 3:** 30 MHz – 1 GHz, vertical and horizontal polarisation

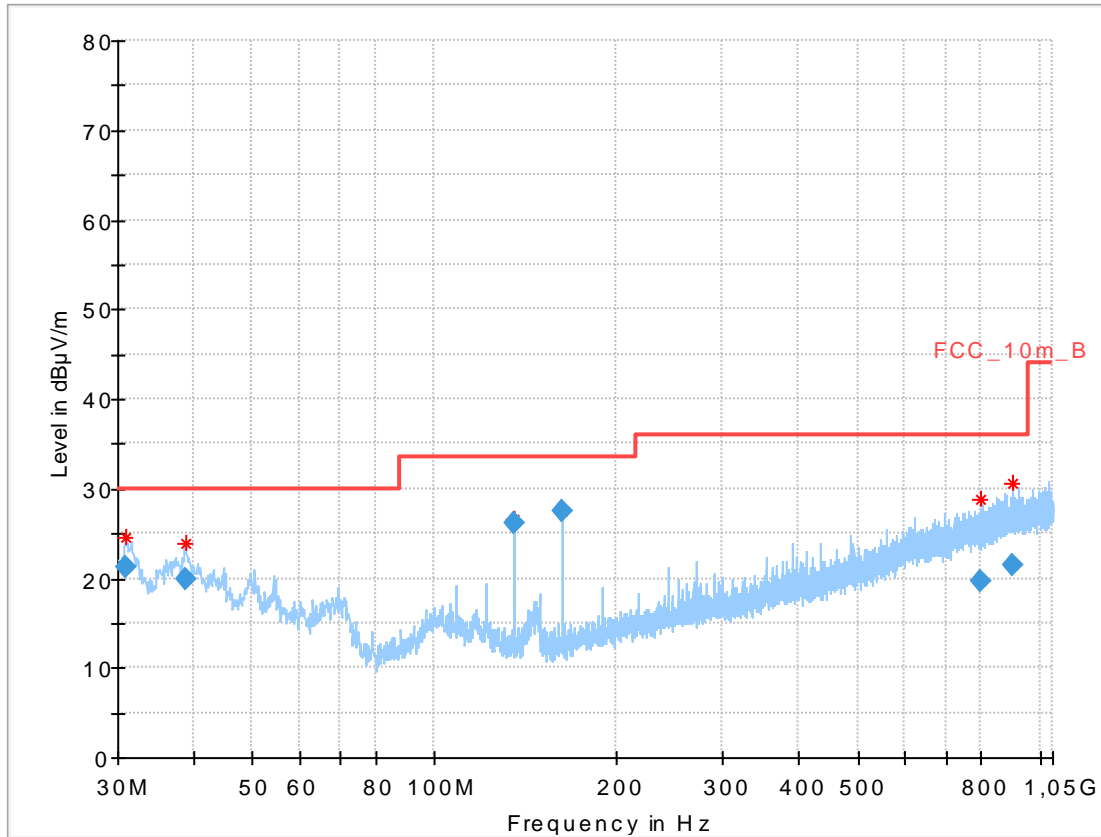


Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
31.004	21.26	30.0	8.74	1000	120	101.0	V	280.0	12.0
38.716	19.94	30.0	10.06	1000	120	98.0	V	-8.0	13.1
135.591	26.20	33.5	7.30	1000	120	98.0	V	280.0	9.2
162.715	27.45	33.5	6.05	1000	120	98.0	V	80.0	9.8
801.255	19.62	36.0	16.38	1000	120	98.0	V	260.0	22.8
903.576	21.45	36.0	14.55	1000	120	170.0	V	190.0	24.2

**Antenna 2**


**Plot 1: 9 kHz – 30 MHz, magnetic emissions**

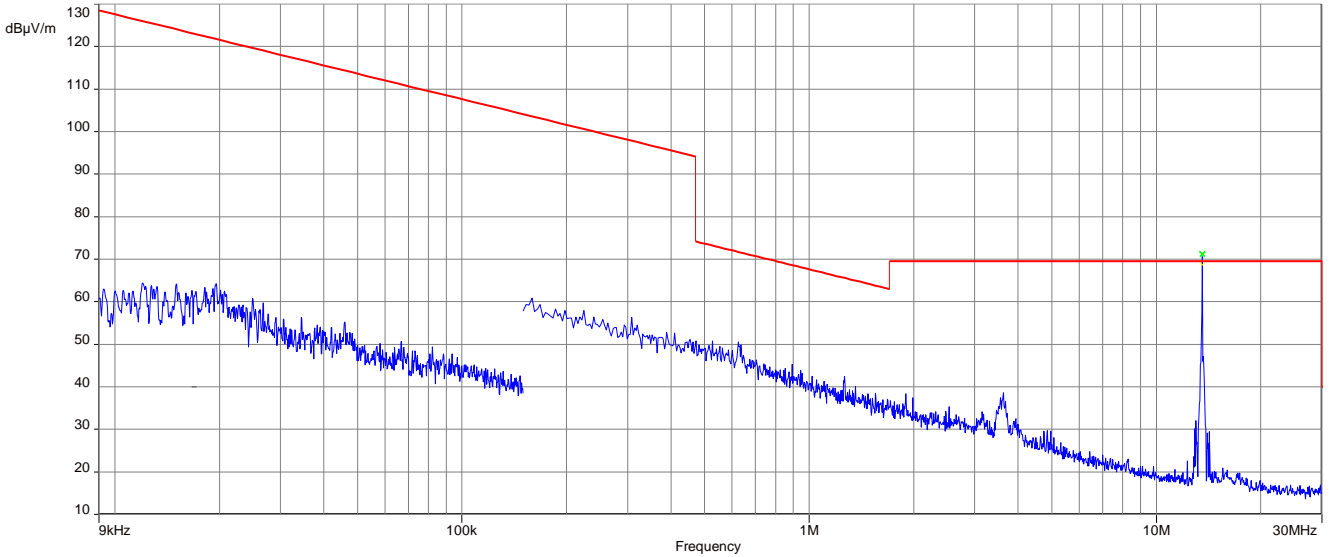

**Plot 2: Spectrum mask (the limits are recalculated according to the ANSI C63.10-2013 sub clause 6.4)**

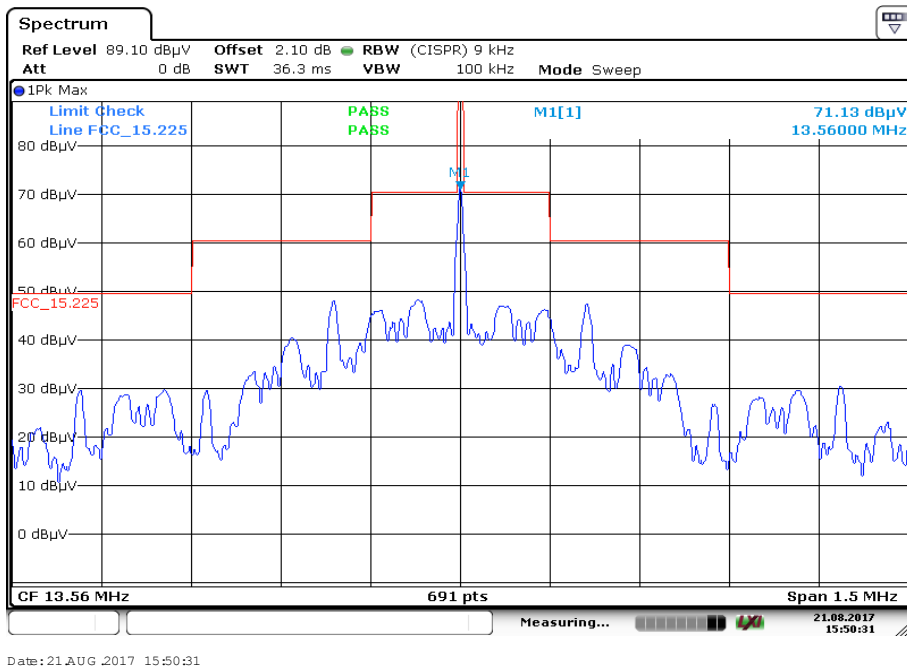

**Plot 3:** 30 MHz – 1 GHz, vertical and horizontal polarisation

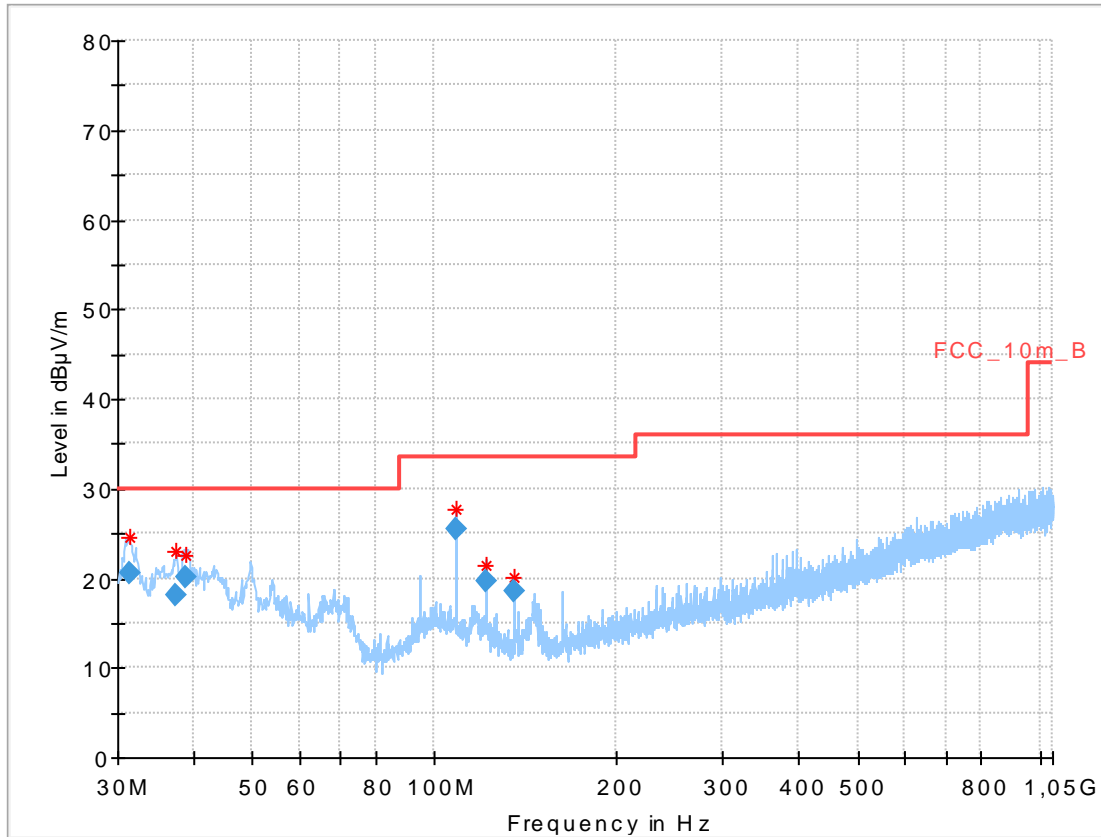

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
31.321	20.66	30.0	9.34	1000	120	101.0	V	-10.0	12.1
37.550	18.00	30.0	12.00	1000	120	98.0	V	261.0	12.9
38.717	20.14	30.0	9.86	1000	120	98.0	V	10.0	13.1
108.467	25.52	33.5	7.98	1000	120	170.0	V	171.0	11.3
122.048	19.71	33.5	13.79	1000	120	170.0	V	190.0	10.1
135.603	18.52	33.5	14.98	1000	120	101.0	V	280.0	9.2

## 11.4 Conducted limits

### Measurement:

Measurement of the conducted spurious emissions for an intentional radiator that is designed to be connected to the public utility (AC) power line.

Measurement parameters	
Detector:	Quasi peak / average or peak (worst case – pre-scan)
Resolution bandwidth:	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Video bandwidth:	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Trace mode:	Max hold
Used equipment:	See chapter 6.4
Measurement uncertainty:	See chapter 8

### Limit:

FCC & IC		
Frequency (MHz)	Quasi-peak (dBµV/m)	Average (dBµV/m)
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30.0	60	50


### Result:

Detected emissions			
Frequency (MHz)	Detector	Resolution bandwidth (kHz)	Detected value

**Plots:**

**Antenna 1**


**Plot 1: 150 kHz to 30 MHz, phase line**

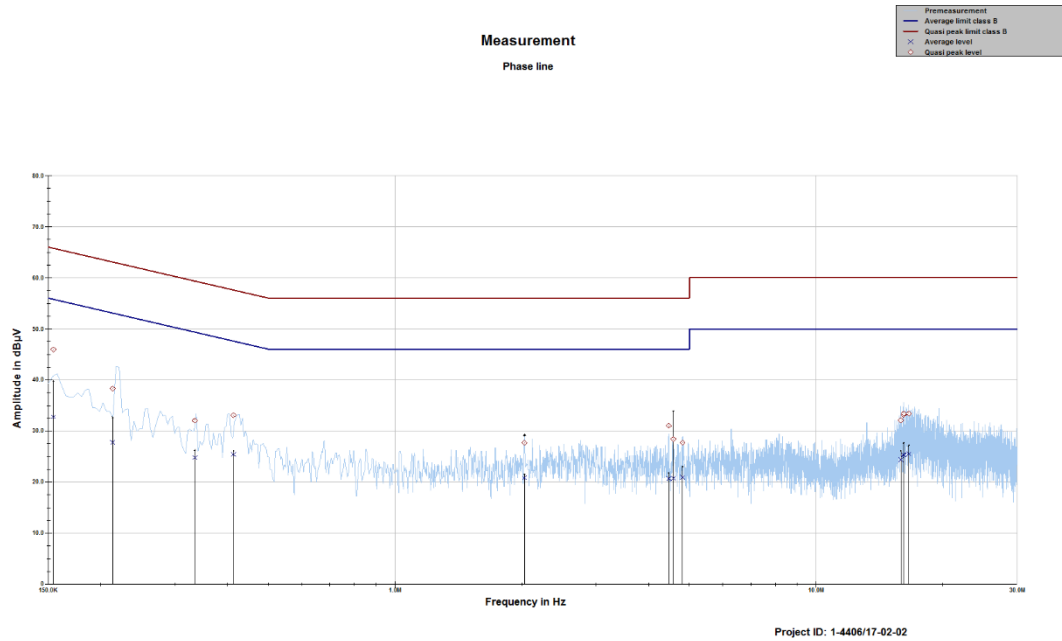

Frequency	Quasi peak level	Margin quasi peak	Limit QP	Average level	Margin average	Limit AV
MHz	dBµV	dB	dBµV	dBµV	dB	dBµV
0.154247	45.98	19.79	65.768	32.77	23.11	55.879
0.213185	38.30	24.78	63.080	27.76	26.43	54.195
0.334156	32.05	27.30	59.347	24.78	25.95	50.738
0.412607	33.10	24.50	57.596	25.43	23.07	48.497
2.026861	27.69	28.31	56.000	20.82	25.18	46.000
4.463983	31.04	24.96	56.000	20.69	25.31	46.000
4.576390	28.44	27.56	56.000	20.74	25.26	46.000
4.813602	27.73	28.27	56.000	20.92	25.08	46.000
15.877489	32.09	27.91	60.000	24.38	25.62	50.000
16.107515	33.16	26.84	60.000	25.36	24.64	50.000
16.149742	33.41	26.59	60.000	25.29	24.71	50.000
16.593107	33.41	26.59	60.000	25.51	24.49	50.000




**Plot 2:** 150 kHz to 30 MHz, neutral line

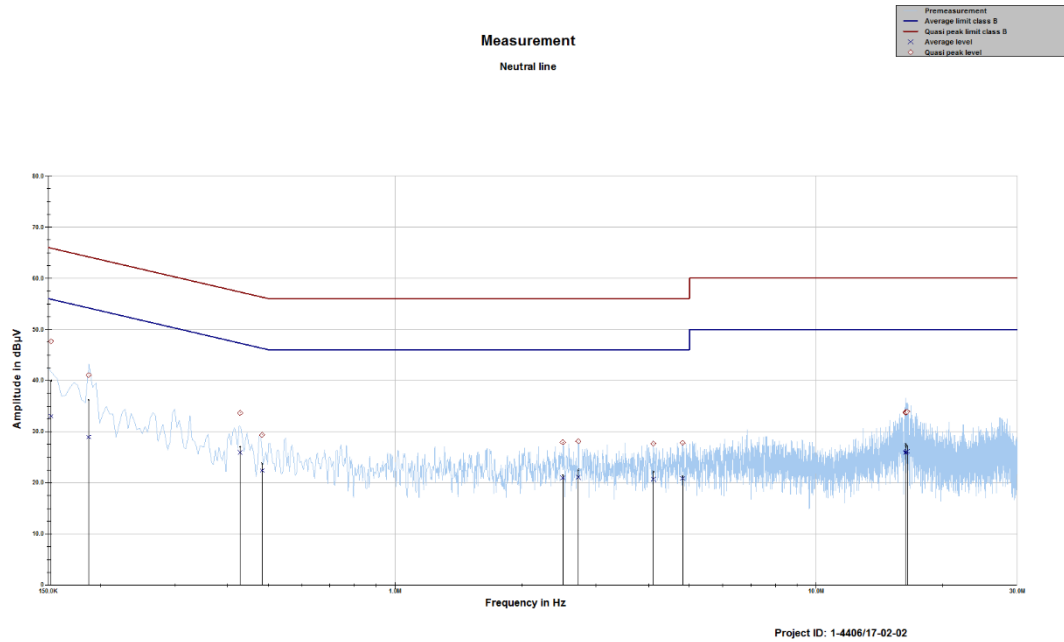

Frequency	Quasi peak level	Margin quasi peak	Limit QP	Average level	Margin average	Limit AV
MHz	dBµV	dB	dBµV	dBµV	dB	dBµV
0.152190	47.68	18.20	65.880	33.04	22.90	55.937
0.186977	41.07	23.10	64.170	28.96	25.99	54.944
0.428073	33.65	23.64	57.290	25.93	22.13	48.055
0.482782	29.35	26.94	56.291	22.41	24.09	46.492
2.499616	27.92	28.08	56.000	20.96	25.04	46.000
2.721433	28.12	27.88	56.000	21.10	24.90	46.000
4.102965	27.67	28.33	56.000	20.73	25.27	46.000
4.815983	27.83	28.17	56.000	20.87	25.13	46.000
16.289301	33.77	26.23	60.000	25.88	24.12	50.000
16.308689	33.69	26.31	60.000	25.95	24.05	50.000
16.322309	33.77	26.23	60.000	25.96	24.04	50.000
16.444955	33.92	26.08	60.000	26.13	23.87	50.000

**Antenna 2**


**Plot 1: 150 kHz to 30 MHz, phase line**

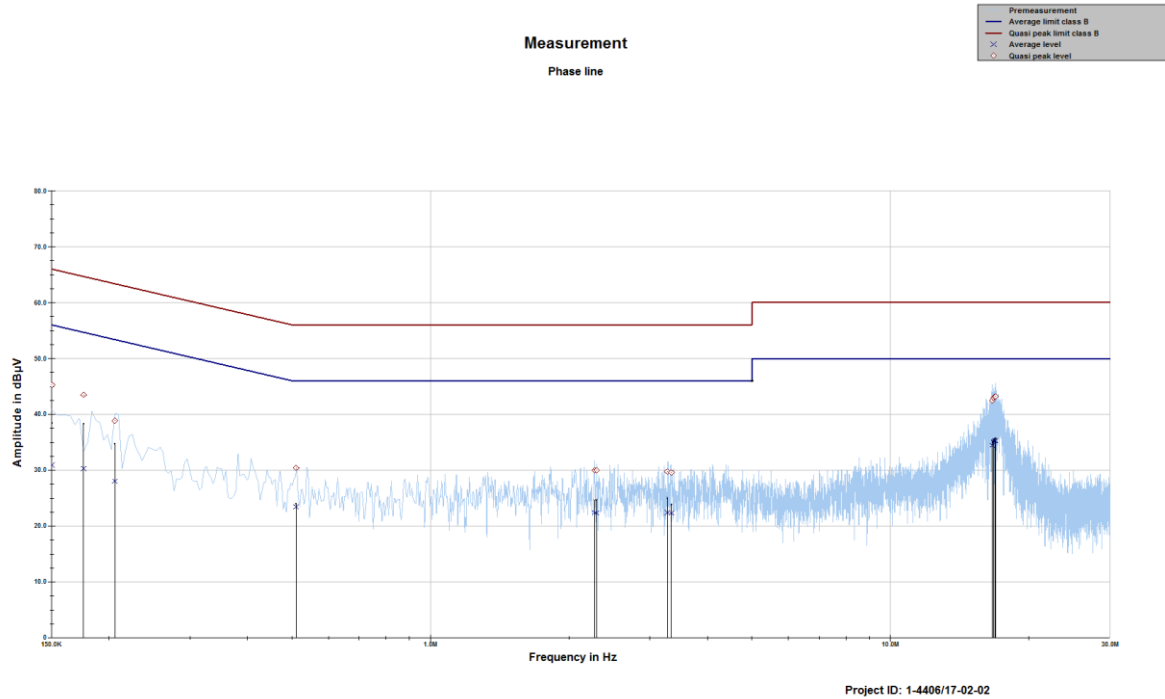

Project ID: 1-4406/17-02-02

Frequency MHz	Quasi peak level dBµV	Margin quasi peak dB	Limit QP dBµV	Average level dBµV	Margin average dB	Limit AV dBµV
0.150259	45.28	20.71	65.986	30.94	25.05	55.993
0.176126	43.49	21.17	64.666	30.29	24.96	55.254
0.205844	38.87	24.51	63.371	28.05	26.36	54.404
0.510046	30.42	25.58	56.000	23.45	22.55	46.000
2.274652	30.01	25.99	56.000	22.42	23.58	46.000
2.296150	30.01	25.99	56.000	22.31	23.69	46.000
3.274098	29.75	26.25	56.000	22.45	23.55	46.000
3.338962	29.61	26.39	56.000	22.33	23.67	46.000
16.635047	42.48	17.52	60.000	34.48	15.52	50.000
16.756267	42.95	17.05	60.000	34.96	15.04	50.000
16.853734	43.17	16.83	60.000	35.25	14.75	50.000
16.913204	43.22	16.78	60.000	35.30	14.70	50.000

**Plot 2:** 150 kHz to 30 MHz, neutral line

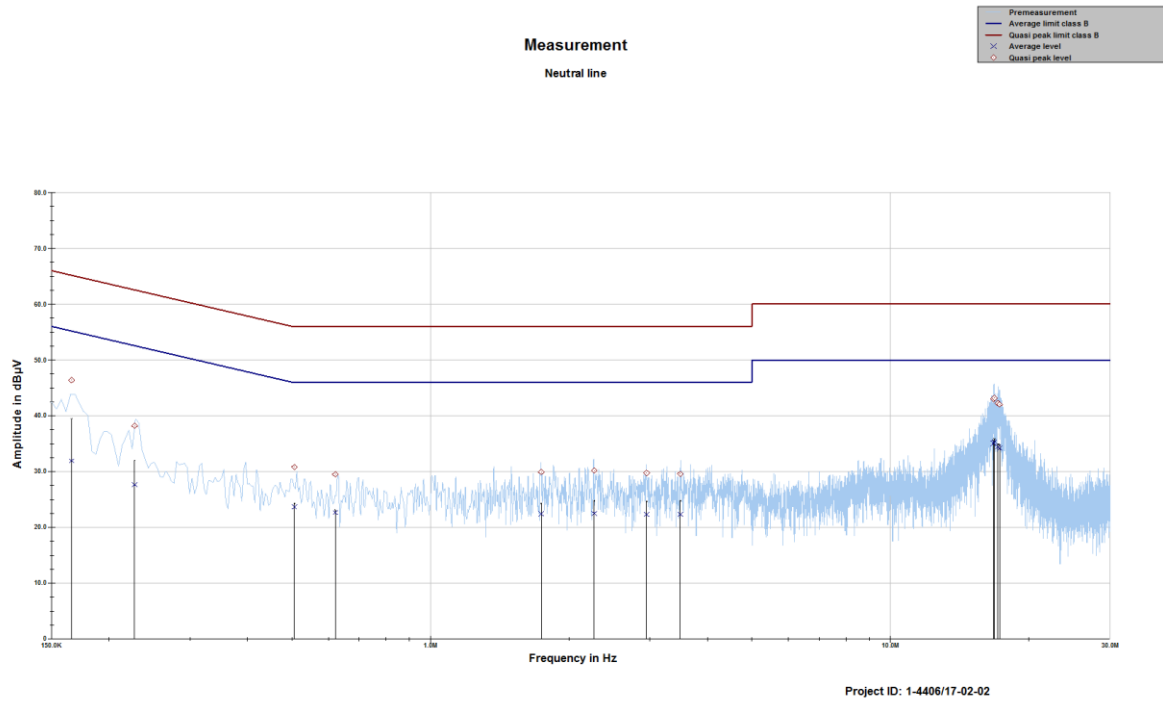

Frequency	Quasi peak level	Margin quasi peak	Limit QP	Average level	Margin average	Limit AV
MHz	dBµV	dB	dBµV	dBµV	dB	dBµV
0.165809	46.36	18.81	65.168	31.92	23.63	55.548
0.227323	38.17	24.38	62.547	27.65	26.14	53.791
0.505961	30.81	25.19	56.000	23.65	22.35	46.000
0.621092	29.50	26.50	56.000	22.65	23.35	46.000
1.740842	29.90	26.10	56.000	22.43	23.57	46.000
2.269808	30.19	25.81	56.000	22.49	23.51	46.000
2.948196	29.75	26.25	56.000	22.33	23.67	46.000
3.492077	29.58	26.42	56.000	22.32	23.68	46.000
16.747030	43.00	17.00	60.000	35.06	14.94	50.000
16.818880	43.18	16.82	60.000	35.33	14.67	50.000
17.125951	42.25	17.75	60.000	34.42	15.58	50.000
17.252562	42.01	17.99	60.000	34.16	15.84	50.000

## 11.5 Frequency error

### Measurement:

The maximum detected field strength for the spurious.

Measurement parameters	
Detector:	Peak detector
Resolution bandwidth:	10 Hz / 100 Hz
Video bandwidth:	> RBW
Trace mode:	Max hold
Used equipment:	See chapter 6.4
Measurement uncertainty:	See chapter 8

### Limit:

FCC & IC
<p>The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. (<math>\pm 1.356</math> kHz)</p> <p>Carrier frequency stability shall be maintained to <math>\pm 0.01\%</math> (<math>\pm 100</math> ppm)</p>

**Result:** Temperature variation (measured with antenna 1)

Frequency tolerance			
Measured frequency (MHz)	Frequency error (kHz)	Conditions	Result
13.5598	-0.2	-20 °C & 100% voltage	compliant
13.5598	-0.2	-10 °C & 100% voltage	compliant
13.5598	-0.2	0 °C & 100% voltage	compliant
13.5598	-0.2	+10 °C & 100% voltage	compliant
13.5598	-0.2	+20 °C & 100% voltage	compliant
13.5597	-0.3	+30 °C & 100% voltage	compliant
13.5597	-0.3	+40 °C & 100% voltage	compliant
13.5597	-0.3	+50 °C & 100% voltage	compliant

**Result:** Voltage variation (measured with antenna 1)

Frequency tolerance			
Measured frequency (MHz)	Frequency error (kHz)	Conditions	Result
13.5598	-0.2	+20 °C & 85% voltage	compliant
13.5598	-0.2	+20 °C & 100% voltage	compliant
13.5598	-0.2	+20 °C & 115% voltage	compliant

## 12 Observations

No observations except those reported with the single test cases have been made.

## Annex A Glossary

<b>EUT</b>	Equipment under test
<b>DUT</b>	Device under test
<b>UUT</b>	Unit under test
<b>GUE</b>	GNSS User Equipment
<b>ETSI</b>	European Telecommunications Standards Institute
<b>EN</b>	European Standard
<b>FCC</b>	Federal Communications Commission
<b>FCC ID</b>	Company Identifier at FCC
<b>IC</b>	Industry Canada
<b>PMN</b>	Product marketing name
<b>HMN</b>	Host marketing name
<b>HVIN</b>	Hardware version identification number
<b>FVIN</b>	Firmware version identification number
<b>EMC</b>	Electromagnetic Compatibility
<b>HW</b>	Hardware
<b>SW</b>	Software
<b>Inv. No.</b>	Inventory number
<b>S/N or SN</b>	Serial number
<b>C</b>	Compliant
<b>NC</b>	Not compliant
<b>NA</b>	Not applicable
<b>NP</b>	Not performed
<b>PP</b>	Positive peak
<b>QP</b>	Quasi peak
<b>AVG</b>	Average
<b>OC</b>	Operating channel
<b>OCW</b>	Operating channel bandwidth
<b>OBW</b>	Occupied bandwidth
<b>OOB</b>	Out of band
<b>DFS</b>	Dynamic frequency selection
<b>CAC</b>	Channel availability check
<b>OP</b>	Occupancy period
<b>NOP</b>	Non occupancy period
<b>DC</b>	Duty cycle
<b>PER</b>	Packet error rate
<b>CW</b>	Clean wave
<b>MC</b>	Modulated carrier
<b>WLAN</b>	Wireless local area network
<b>RLAN</b>	Radio local area network
<b>DSSS</b>	Dynamic sequence spread spectrum
<b>OFDM</b>	Orthogonal frequency division multiplexing
<b>FHSS</b>	Frequency hopping spread spectrum
<b>GNSS</b>	Global Navigation Satellite System
<b>C/N<sub>0</sub></b>	Carrier to noise-density ratio, expressed in dB-Hz

**Annex B Document history**

Version	Applied changes	Date of release
-/-	Initial release	2017-08-30
A	Applicant and Manufacturer information revised; PMN added	2017-08-30

**Annex C Accreditation Certificate**

first page	last page
 <p>Deutsche Akkreditierungsstelle GmbH</p> <p>Beliehene gemäß § 8 Absatz 1 AkkStelleG i.V.m. § 1 Absatz 1 AkkStelleGBV Unterzeichnerin der Multilateralen Abkommen von EA, ILAC und IAF zur gegenseitigen Anerkennung</p>  <p><b>Akkreditierung</b></p> <p>Die Deutsche Akkreditierungsstelle GmbH bestätigt hiermit, dass das Prüflaboratorium</p> <p><b>CTC advanced GmbH</b> Untertürkheimer Straße 6-10, 66117 Saarbrücken</p> <p>die Kompetenz nach DIN EN ISO/IEC 17025:2005 besitzt, Prüfungen in folgenden Bereichen durchzuführen:</p> <ul style="list-style-type: none"> <li>Funk</li> <li>Mobilfunk (GSM / DCS) + OTA</li> <li>Elektromagnetische Verträglichkeit (EMV)</li> <li>Produktsicherheit</li> <li>SAR / EMF</li> <li>Umwelt</li> <li>Smart Card Technology</li> <li>Bluetooth®</li> <li>Automotive</li> <li>Wi-Fi-Services</li> <li>Kanadische Anforderungen</li> <li>US-Anforderungen</li> <li>Akustik</li> <li>Near Field Communication (NFC)</li> </ul> <p>Die Akkreditierungsurkunde gilt nur in Verbindung mit dem Bescheid vom 25.11.2016 mit der Akkreditierungsnummer D-PL-12076-01 und ist gültig bis 17.01.2018. Sie besteht aus diesem Deckblatt, der Rückseite des Deckblatts und der folgenden Anlage mit insgesamt 63 Seiten.</p> <p>Registrierungsnummer der Urkunde: D-PL-12076-01-01</p> <p>Frankfurt, 25.11.2016</p>  <p>Im Auftrag Dipl.-Ing. Ralf Egner Abteilungsleiter</p> <p><small>Siehe Hinweise auf der Rückseite</small></p>	<p>Deutsche Akkreditierungsstelle GmbH</p> <p>Standort Berlin Spittelmarkt 10 10117 Berlin</p> <p>Standort Frankfurt am Main Europa-Allee 52 60327 Frankfurt am Main</p> <p>Standort Braunschweig Bundesallee 100 38116 Braunschweig</p> <p>Die auszugsweise Veröffentlichung der Akkreditierungsurkunde bedarf der vorherigen schriftlichen Zustimmung der Deutsche Akkreditierungsstelle GmbH (DAkKS). Ausgenommen davon ist die separate Weiterverbreitung des Deckblattes durch die umseitig genannte Konformitätsbewertungsstelle in unveränderter Form.</p> <p>Es darf nicht der Anschein erweckt werden, dass sich die Akkreditierung auch auf Bereiche erstreckt, die über den durch die DAkKS bestätigten Akkreditierungsbereich hinausgehen.</p> <p>Die Akkreditierung erfolgte gemäß des Gesetzes über die Akkreditierungsstelle (AkkStelleG) vom 31. Juli 2009 (BGBl. I S. 2625) sowie der Verordnung (EG) Nr. 765/2008 des Europäischen Parlaments und des Rates vom 9. Juli 2008 über die Vorschriften für die Akkreditierung und Marktüberwachung im Zusammenhang mit der Vermarktung von Produkten (Abi. L 218 vom 9. Juli 2008, S. 30). Die DAkKS ist Unterzeichnerin der Multilateralen Abkommen zur gegenseitigen Anerkennung der European co-operation for Accreditation (EA), des International Accreditation Forum (IAF) und der International Laboratory Accreditation Cooperation (ILAC). Die Unterzeichner dieser Abkommen erkennen ihre Akkreditierungen gegenseitig an.</p> <p>Der aktuelle Stand der Mitgliedschaft kann folgenden Webseiten entnommen werden: EA: <a href="http://www.european-accreditation.org">www.european-accreditation.org</a> ILAC: <a href="http://www.ilac.org">www.ilac.org</a> IAF: <a href="http://www.iaf.nu">www.iaf.nu</a></p>

**Note: The current certificate including annex is published on the website (link see below) of the Accreditation Body DAkKS or may be received by CTC advanced GmbH on request**

<http://www.dakks.de/as/ast/d/D-PL-12076-01-01.pdf>

<http://www.dakks.de/as/ast/d/D-PL-12076-01-02.pdf>

