



FCC TEST REPORT

REPORT NO.: RF970102A06
MODEL NO.: N748, HSTNN-DM21
RECEIVED: Jan. 2, 2008
TESTED: Jan. 7, 2008
ISSUED: Jan. 21, 2008

APPLICANT: DARFON ELECTRONICS CORP.

ADDRESS: 31, Lane 17, Zihciang N. Road, Gueishan,
Taoyuan 333, Taiwan

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou
Hsiang 244, Taipei Hsien, Taiwan, R.O.C.

This test report consists of 36 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF, A2LA or any government agencies. The test results in the report only apply to the tested sample.



Table of Contents

1.	CERTIFICATION.....	4
2.	SUMMARY OF TEST RESULTS.....	5
2.1	MEASUREMENT UNCERTAINTY.....	5
3.	GENERAL INFORMATION	6
3.1	GENERAL DESCRIPTION OF EUT.....	6
3.2	DESCRIPTION OF TEST MODES	7
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST	7
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:	8
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	9
3.4	DESCRIPTION OF SUPPORT UNITS	9
4.	TEST TYPES AND RESULTS.....	10
4.1	CONDUCTED EMISSION MEASUREMENT	10
4.2	RADIATED EMISSION MEASUREMENT	10
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	10
4.2.2	TEST INSTRUMENTS	11
4.2.3	TEST PROCEDURES	12
4.2.4	DEVIATION FROM TEST STANDARD	12
4.2.5	TEST SETUP	13
4.2.6	EUT OPERATING CONDITIONS	13
4.2.7	TEST RESULTS.....	14
4.3	6dB BANDWIDTH MEASUREMENT.....	18
4.3.1	LIMITS OF 6DB BANDWIDTH MEASUREMENT.....	18
4.3.2	TEST INSTRUMENTS	18
4.3.3	TEST PROCEDURE	18
4.3.4	DEVIATION FROM TEST STANDARD	18
4.3.5	TEST SETUP	18
4.3.6	EUT OPERATING CONDITIONS	18
4.3.7	TEST RESULTS.....	19
4.4	MAXIMUM PEAK OUTPUT POWER	21
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	21
4.4.2	INSTRUMENTS.....	21
4.4.3	TEST PROCEDURES	21
4.4.4	DEVIATION FROM TEST STANDARD	21
4.4.5	TEST SETUP	22
4.4.6	EUT OPERATING CONDITIONS	22
4.4.7	TEST RESULTS.....	22
4.5	POWER SPECTRAL DENSITY MEASUREMENT	25
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT.....	25
4.5.2	TEST INSTRUMENTS	25
4.5.3	TEST PROCEDURE	25



4.5.4	DEVIATION FROM TEST STANDARD	25
4.5.5	TEST SETUP	25
4.5.6	EUT OPERATING CONDITION	25
4.5.7	TEST RESULTS	26
4.6	BAND EDGES MEASUREMENT	28
4.6.1	LIMITS OF BAND EDGES MEASUREMENT	28
4.6.2	TEST INSTRUMENTS	28
4.6.3	TEST PROCEDURE	28
4.6.4	DEVIATION FROM TEST STANDARD	28
4.6.5	EUT OPERATING CONDITION	28
4.6.6	TEST RESULTS	29
4.7	ANTENNA REQUIREMENT	33
4.7.1	STANDARD APPLICABLE	33
4.7.2	ANTENNA CONNECTED CONSTRUCTION	33
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	34
6.	INFORMATION ON THE TESTING LABORATORIES	35
7.	APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	36



1. CERTIFICATION

PRODUCT: HP Thrive Wireless Optical Mouse
BRAND NAME: hp
MODEL NO.: N748, HSTNN-DM21
APPLICANT: DARFON ELECTRONICS CORP.
TESTED: Jan. 7, 2008
TEST SAMPLE: ENGINEERING SAMPLE
STANDARDS: FCC Part 15, Subpart C (Section 15.247),
ANSI C63.4-2003

The above equipment (Model: N748) has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Annie Chang , **DATE:** Jan. 21, 2008
(Annie Chang / Senior Specialist)

TECHNICAL ACCEPTANCE : Jamison Chan , **DATE:** Jan. 21, 2008
Responsible for RF (Jamison Chan / Senior Engineer)

APPROVED BY : Ken Liu , **DATE:** Jan. 21, 2008
(Ken Liu / Deputy Manager)

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C (Section 15.247)			
Standard Section	Test Type and Limit	Result	Remark
15.207	AC Power Conducted Emission	N/A	Power supply is 1.5Vdc from battery
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(d)	Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -3.27dB at 7440.000MHz
15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit.
15.247(d)	Band Edge Measurement Limit: 20dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Frequency	Uncertainty
Radiated emissions	30MHz ~ 1GHz	3.75 dB
	1GHz ~ 40GHz	2.89 dB

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

EUT	HP Thrive Wireless Optical Mouse
MODEL NO.	N748, HSTNN-DM21
FCC ID	O62-HSTNN-DM21
POWER SUPPLY	1.5Vdc from battery
MODULATION TYPE	GFSK
OUTPUT POWER	1.730mW
FREQUENCY RANGE	2404MHz ~ 2480MHz
NUMBER OF CHANNEL	77
ANTENNA TYPE	Printed antenna with -5.96dBi gain
DATA CABLE	N/A
I/O PORTS	N/A
ASSOCIATED DEVICES	N/A

NOTE:

1. The EUT is a wireless mouse, which is a transmitter.
2. The EUT has two model names, which are identical to each other except for their model name only for marketing differentiation as follows:

Brand Name	Model No.	Description
hp	N748	marketing differentiation
	HSTNN-DM21	

For the test, model: **N748** was selected as the representative model and its data was recorded in this report.


3. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

77 channels are provided to this EUT:

CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)
0	2404	20	2424	40	2444	60	2464
1	2405	21	2425	41	2445	61	2465
2	2406	22	2426	42	2446	62	2466
3	2407	23	2427	43	2447	63	2467
4	2408	24	2428	44	2448	64	2468
5	2409	25	2429	45	2449	65	2469
6	2410	26	2430	46	2450	66	2470
7	2411	27	2431	47	2451	67	2471
8	2412	28	2432	48	2452	68	2472
9	2413	29	2433	49	2453	69	2473
10	2414	30	2434	50	2454	70	2474
11	2415	31	2435	51	2455	71	2475
12	2416	32	2436	52	2456	72	2476
13	2417	33	2437	53	2457	73	2477
14	2418	34	2438	54	2458	74	2478
15	2419	35	2439	55	2459	75	2479
16	2420	36	2440	56	2460	76	2480
17	2421	37	2441	57	2461		
18	2422	38	2442	58	2462		
19	2423	39	2443	59	2463		

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

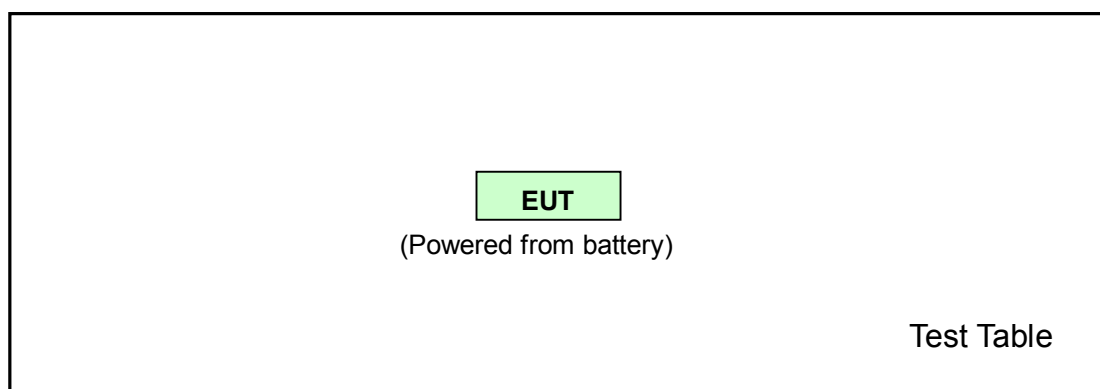

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:

EUT configure mode	Applicable to				Description
	PLC	RE<1G	RE≥1G	APCM	
-	Note	√	√	√	-

Where PLC: Power Line Conducted Emission RE<1G RE: Radiated Emission below 1GHz
RE≥1G: Radiated Emission above 1GHz APCM: Antenna Port Conducted Measurement

Note: No need to concern of Conducted Emission due to the EUT is powered by battery.

RADIATED EMISSION TEST (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Type
0 to 76	76	GFSK

RADIATED EMISSION TEST (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Type
0 to 76	0, 38, 76	GFSK

BANDEDGE MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Type
0 to 76	0, 76	GFSK

ANTENNA PORT CONDUCTED MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Type
0 to 76	0, 38, 76	GFSK



3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)

ANSI C63.4-2003

All test items have been performed and recorded as per the above standards.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit.

4. TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

N/A

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
HP Preamplifier	8447D	2432A03504	May 09, 2008
HP Preamplifier	8449B	3008A01201	Oct. 01, 2008
HP Preamplifier	8449B	3008A01292	Aug. 05, 2008
ROHDE & SCHWARZ TEST RECEIVER	ESI7	836697/012	Dec. 05, 2008
Schwarzbeck Antenna	VULB 9168	137	Sep. 13, 2008
Schwarzbeck Antenna	VHBA 9123	480	Apr. 18, 2008
EMCO Horn Antenna	3115	6714	Oct. 18, 2008
EMCO Horn Antenna	3115	9312-4192	Apr. 19, 2008
ADT. Turn Table	TT100	0306	NA
ADT. Tower	AT100	0306	NA
Software	ADT_Radiated_V7.6.15	NA	NA
SUHNER RF cable	SF104-26.5	CABLE-CH6-17m-01	Nov. 04, 2008
ROHDE & SCHWARZ Spectrum Analyzer	FSP 40	100036	Mar. 13, 2008

- NOTE:**
1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.
 2. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 3. The test was performed in ADT Chamber No. 6.
 4. The Industry Canada Reference No. IC 3789-6.

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi- anechoic. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak method or average method as specified and then reported in data sheet.


NOTE:

1. The resolution bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth is 1MHz and video bandwidth of test receiver/spectrum analyzer is 3MHz for Peak detection at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz for Average detection (AV) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

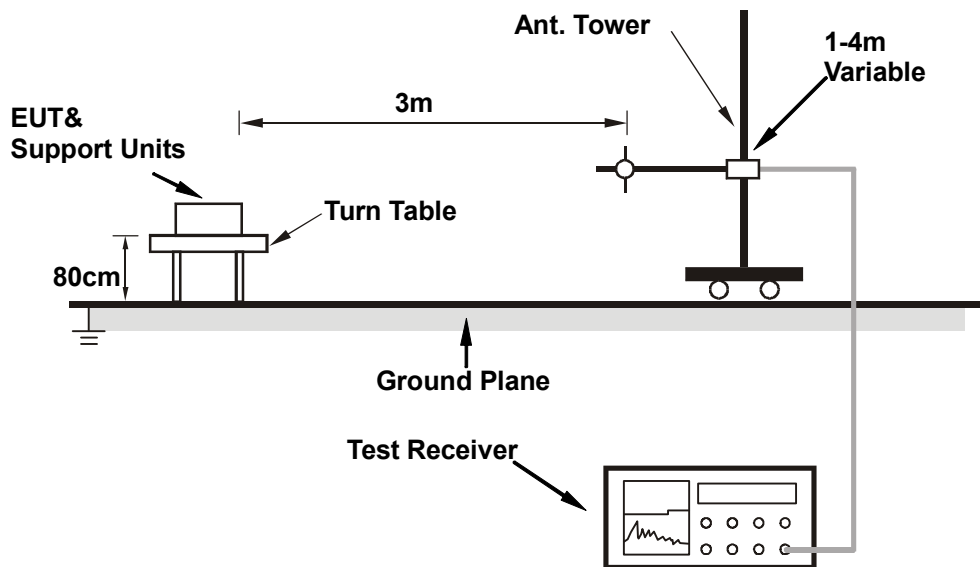

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Set the EUT under transmission condition continuously at specific channel frequency.

4.2.7 TEST RESULTS

RADIATED WORST CASE DATA: BELOW 1GHz

MODULATION TYPE	GFSK	CHANNEL	76
INPUT POWER	1.5Vdc	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	18deg. C, 86%RH, 1004 hPa	DETECTOR FUNCTION	Quasi-Peak
TESTED BY	Jun Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	780.341	26.42 QP	46.00	-19.58	1.19 H	10	-1.40	27.82
2	801.723	31.17 QP	46.00	-14.83	1.15 H	151	2.92	28.25
3	819.218	26.85 QP	46.00	-19.15	1.18 H	235	-1.60	28.45
4	873.647	27.34 QP	46.00	-18.66	1.10 H	61	-1.66	29.00
5	883.367	27.38 QP	46.00	-18.62	1.09 H	286	-1.70	29.08
6	937.796	28.24 QP	46.00	-17.76	1.05 H	61	-1.24	29.48
7	955.291	28.23 QP	46.00	-17.77	1.00 H	97	-1.44	29.67

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	43.607	20.26 QP	40.00	-19.74	1.00 V	187	6.47	13.79
2	768.677	26.44 QP	46.00	-19.56	1.05 V	10	-1.13	27.57
3	801.723	27.28 QP	46.00	-18.72	1.11 V	301	-0.97	28.25
4	844.489	26.87 QP	46.00	-19.13	1.16 V	253	-1.87	28.74
5	856.152	27.24 QP	46.00	-18.76	1.20 V	268	-1.61	28.85
6	904.749	27.41 QP	46.00	-18.59	1.28 V	55	-1.83	29.24
7	937.796	27.92 QP	46.00	-18.08	1.30 V	115	-1.56	29.48
8	957.234	28.02 QP	46.00	-17.98	1.35 V	304	-1.69	29.71

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 - 3The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



RADIATED WORST CASE DATA: ABOVE 1GHz

MODULATION TYPE	GFSK	CHANNEL	0
INPUT POWER	1.5Vdc	FREQUENCY RANGE	1 ~ 25GHz
ENVIRONMENTAL CONDITIONS	18deg. C, 86%RH, 1004 hPa	DETECTOR FUNCTION	Peak(PK) Average (AV)
TESTED BY	Jun Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1602.000	60.11 PK	74.00	-13.89	1.70 H	299	27.81	32.30
2	1602.000	46.06 AV	54.00	-7.94	1.70 H	299	13.76	32.30
3	2390.000	59.57 PK	74.00	-14.43	1.01 H	157	24.91	34.66
4	2390.000	45.48 AV	54.00	-8.52	1.01 H	157	10.82	34.66
5	*2404.000	93.43 PK			1.01 H	157	58.74	34.69
6	*2404.000	80.19 AV			1.01 H	157	45.50	34.69
7	4808.000	54.80 PK	74.00	-19.20	1.42 H	115	12.94	41.86
8	4808.000	43.64 AV	54.00	-10.36	1.42 H	115	1.78	41.86
9	7212.000	61.53 PK	74.00	-12.47	1.27 H	360	14.20	47.33
10	7212.000	48.87 AV	54.00	-5.13	1.27 H	360	1.54	47.33

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1602.000	55.50 PK	74.00	-18.50	1.19 V	67	23.20	32.30
2	1602.000	42.52 AV	54.00	-11.48	1.19 V	67	10.22	32.30
3	2390.000	57.38 PK	74.00	-16.62	1.00 V	214	22.72	34.66
4	2390.000	45.44 AV	54.00	-8.56	1.00 V	214	10.78	34.66
5	*2404.000	86.73 PK			1.00 V	214	52.04	34.69
6	*2404.000	75.25 AV			1.00 V	214	40.56	34.69
7	4808.000	54.16 PK	74.00	-19.84	1.21 V	212	12.30	41.86
8	4808.000	42.51 AV	54.00	-11.49	1.21 V	212	0.65	41.86
9	7212.000	60.92 PK	74.00	-13.08	1.03 V	184	13.59	47.33
10	7212.000	48.03 AV	54.00	-5.97	1.03 V	184	0.70	47.33

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. " * " : Fundamental frequency

MODULATION TYPE	GFSK	CHANNEL	38
INPUT POWER	1.5Vdc	FREQUENCY RANGE	1 ~ 25GHz
ENVIRONMENTAL CONDITIONS	18deg. C, 86%RH, 1004 hPa	DETECTOR FUNCTION	Peak(PK) Average (AV)
TESTED BY	Jun Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1628.000	58.92 PK	74.00	-15.08	1.16 H	148	26.52	32.40
2	1628.000	45.49 AV	54.00	-8.51	1.16 H	148	13.09	32.40
3	*2442.000	93.87 PK			1.27 H	174	59.10	34.77
4	*2442.000	80.77 AV			1.27 H	174	46.00	34.77
5	4884.000	55.34 PK	74.00	-18.66	1.00 H	334	13.29	42.06
6	4884.000	44.16 AV	54.00	-9.84	1.00 H	334	2.11	42.06
7	7326.000	63.27 PK	74.00	-10.73	1.04 H	12	15.56	47.71
8	7326.000	50.25 AV	54.00	-3.75	1.04 H	12	2.54	47.71

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1628.000	52.81 PK	74.00	-21.19	1.07 V	219	20.41	32.40
2	1628.000	44.27 AV	54.00	-9.73	1.07 V	219	11.87	32.40
3	*2442.000	86.39 PK			1.21 V	226	51.62	34.77
4	*2442.000	74.69 AV			1.21 V	226	39.92	34.77
5	4884.000	54.15 PK	74.00	-19.85	1.05 V	261	12.10	42.06
6	4884.000	42.58 AV	54.00	-11.42	1.05 V	261	0.53	42.06
7	7326.000	61.19 PK	74.00	-12.81	1.10 V	192	13.48	47.71
8	7326.000	48.49 AV	54.00	-5.51	1.10 V	192	0.78	47.71

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. " * " : Fundamental frequency



MODULATION TYPE	GFSK	CHANNEL	76
INPUT POWER	1.5Vdc	FREQUENCY RANGE	1 ~ 25GHz
ENVIRONMENTAL CONDITIONS	18deg. C, 86%RH, 1004 hPa	DETECTOR FUNCTION	Peak(PK) Average (AV)
TESTED BY	Jun Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1653.000	57.21 PK	74.00	-16.79	1.17 H	157	24.71	32.50
2	1653.000	43.96 AV	54.00	-10.04	1.17 H	157	11.46	32.50
3	*2480.000	91.51 PK			1.23 H	163	56.66	34.85
4	*2480.000	78.82 AV			1.23 H	163	43.97	34.85
5	2483.500	67.58 PK	74.00	-6.42	1.23 H	163	32.72	34.86
6	2483.500	49.15 AV	54.00	-4.85	1.23 H	163	14.29	34.86
7	4960.000	54.53 PK	74.00	-19.47	1.06 H	157	12.28	42.26
8	4960.000	43.48 AV	54.00	-10.52	1.06 H	157	1.23	42.26
9	7440.000	62.94 PK	74.00	-11.06	1.18 H	358	14.85	48.09
10	7440.000	50.41 AV	54.00	-3.59	1.18 H	358	2.32	48.09

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1653.000	54.25 PK	74.00	-19.75	1.14 V	71	21.75	32.50
2	1653.000	41.08 AV	54.00	-12.92	1.14 V	71	8.58	32.50
3	*2480.000	85.67 PK			1.17 V	223	50.82	34.85
4	*2480.000	74.41 AV			1.17 V	223	39.56	34.85
5	2483.500	62.56 PK	74.00	-11.44	1.17 V	223	27.70	34.86
6	2483.500	46.96 AV	54.00	-7.04	1.17 V	223	12.10	34.86
7	4960.000	53.78 PK	74.00	-20.22	1.00 V	225	11.53	42.26
8	4960.000	41.92 AV	54.00	-12.08	1.00 V	225	-0.33	42.26
9	7440.000	63.28 PK	74.00	-10.72	1.32 V	193	15.19	48.09
10	7440.000	50.73 AV	54.00	-3.27	1.32 V	193	2.64	48.09

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “ : Fundamental frequency

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSP 40	100036	Mar. 13, 2008

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 300kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP

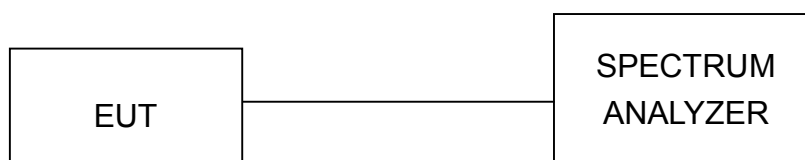

4.3.6 EUT OPERATING CONDITIONS

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.




4.3.7 TEST RESULTS


MODULATION TYPE	GFSK	CHANNEL	0, 38, 76
INPUT POWER	1.5Vdc	ENVIRONMENTAL CONDITIONS	20deg. C, 75%RH, 1004hPa
TESTED BY	Jamison Chan		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
0	2404	0.96	0.5	PASS
38	2442	0.96	0.5	PASS
76	2480	0.97	0.5	PASS


CH 0

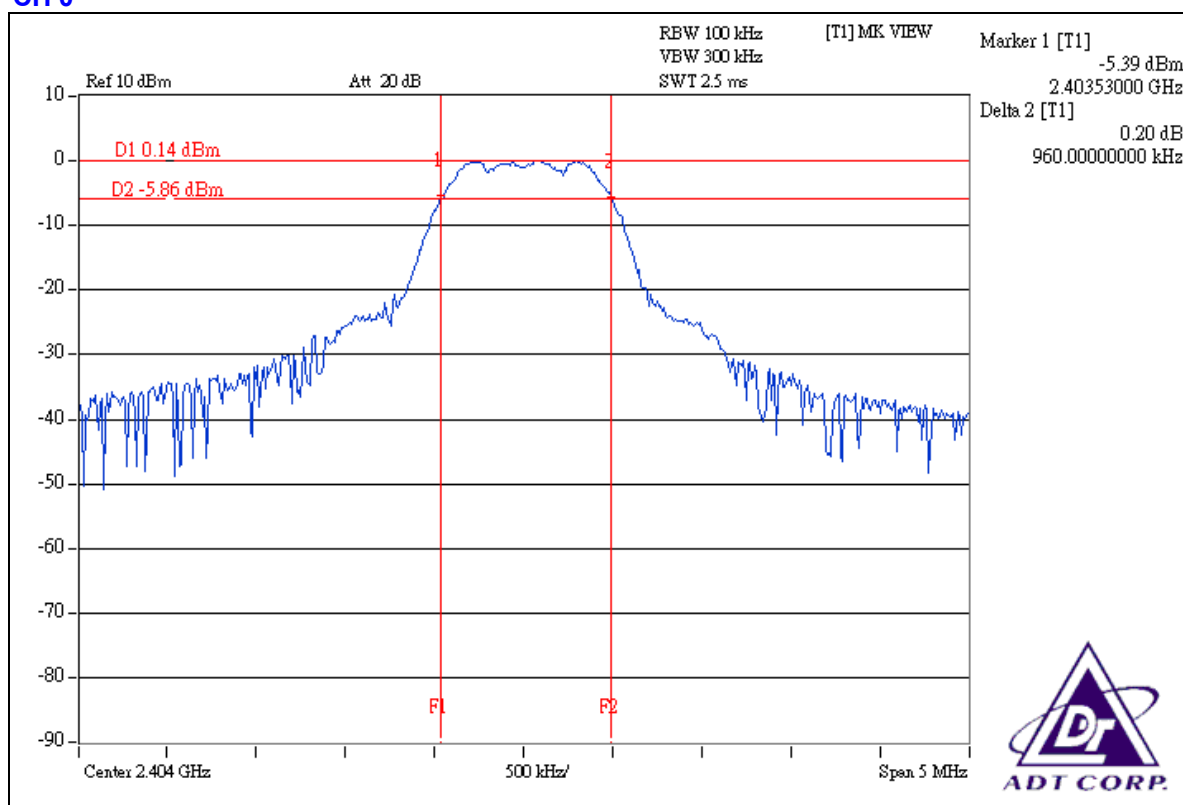

CH 38

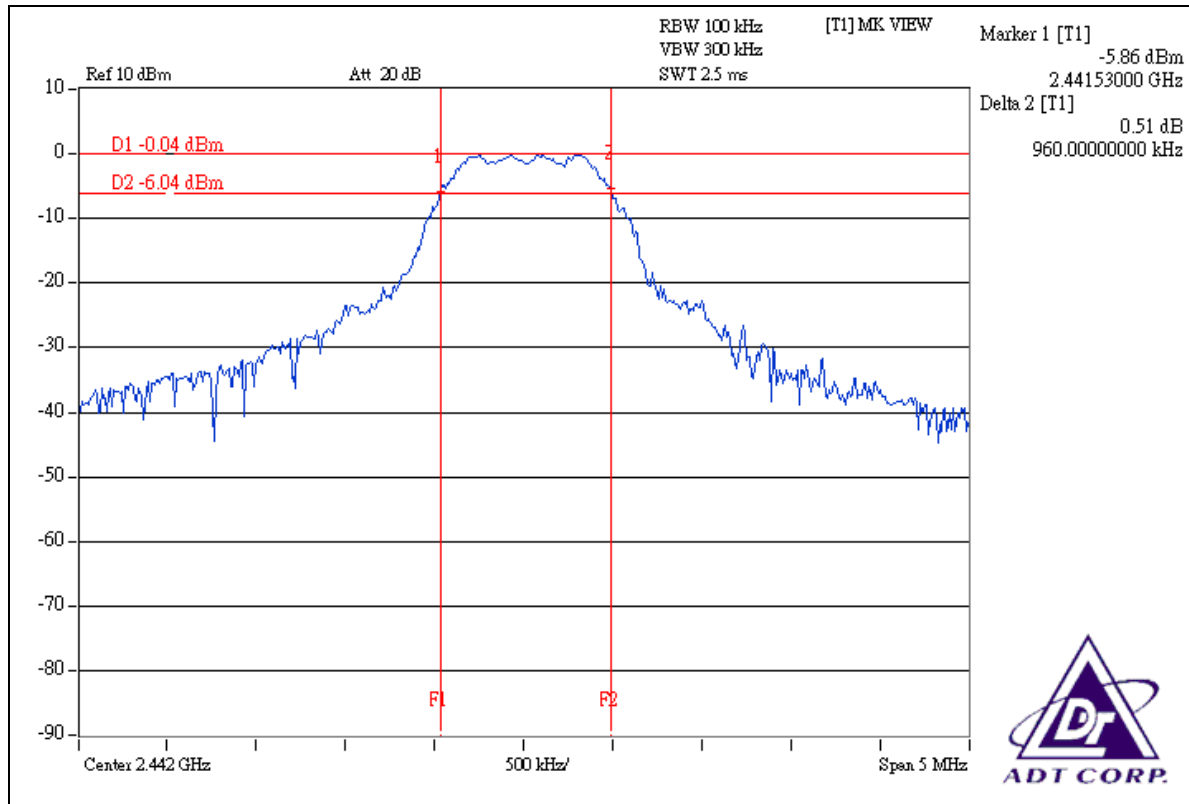

CH 76

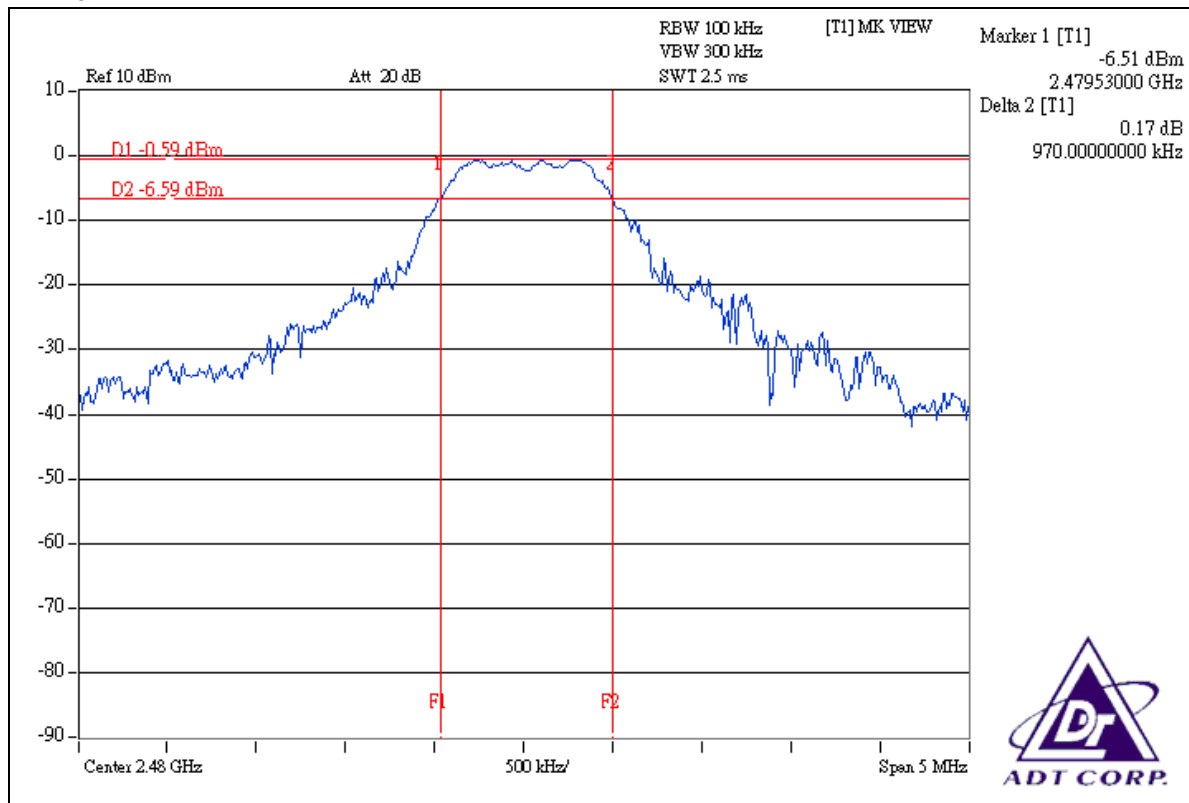



4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSP 40	100036	Mar. 13, 2008

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST PROCEDURES


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. The center frequency of the spectrum analyzer is set to the fundamental frequency and using 1 MHz RBW and 3 MHz VBW, the peak value was measured and recorded.
4. Repeat above procedures until all frequencies measured were complete.

Note: The spectrum plots are attached on following pages.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP

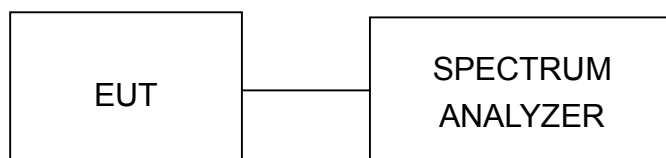

4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6


4.4.7 TEST RESULTS

MODULATION TYPE	GFSK	CHANNEL	0, 38, 76
INPUT POWER	1.5Vdc	ENVIRONMENTAL CONDITIONS	20deg. C, 75%RH, 1004hPa
TESTED BY	Jamison Chan		


CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER OUTPUT (mW)	PEAK POWER LIMIT (dBm)	PASS/FAIL
0	2404	2.38	1.730	30	PASS
38	2442	2.13	1.633	30	PASS
76	2480	1.66	1.466	30	PASS




CH 0

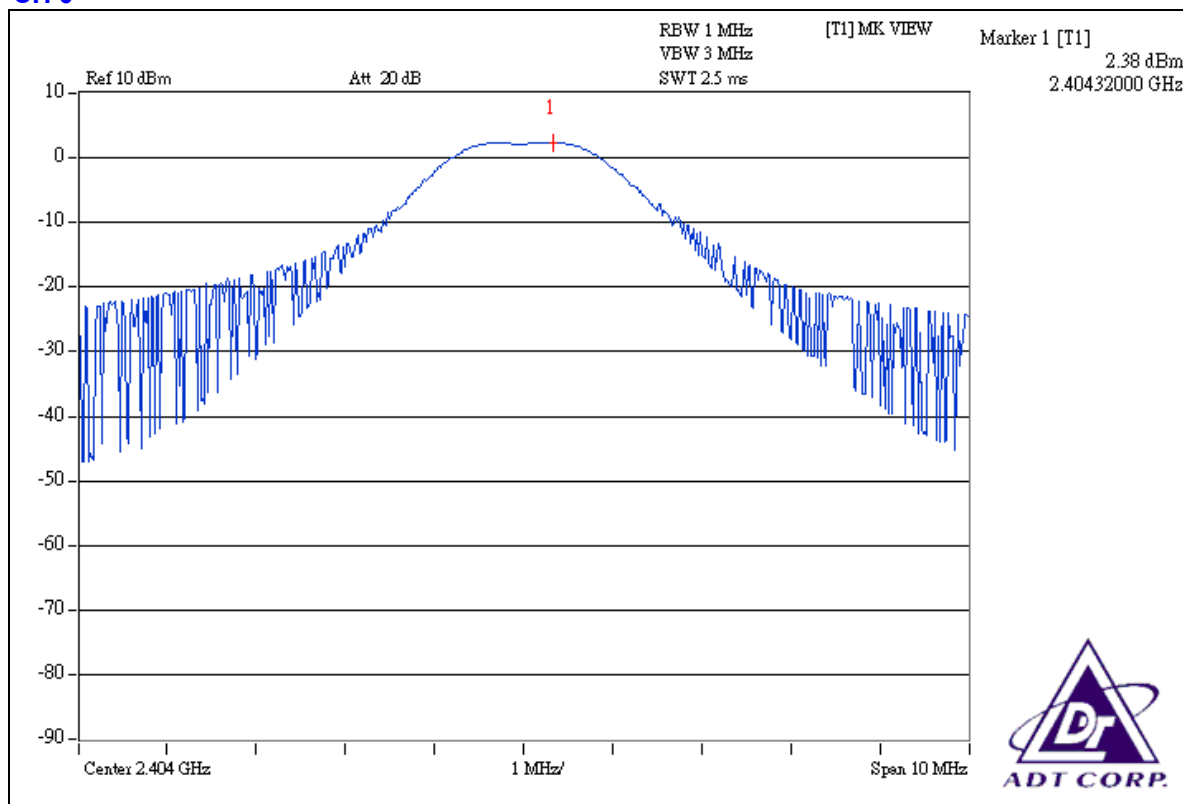

CH 38

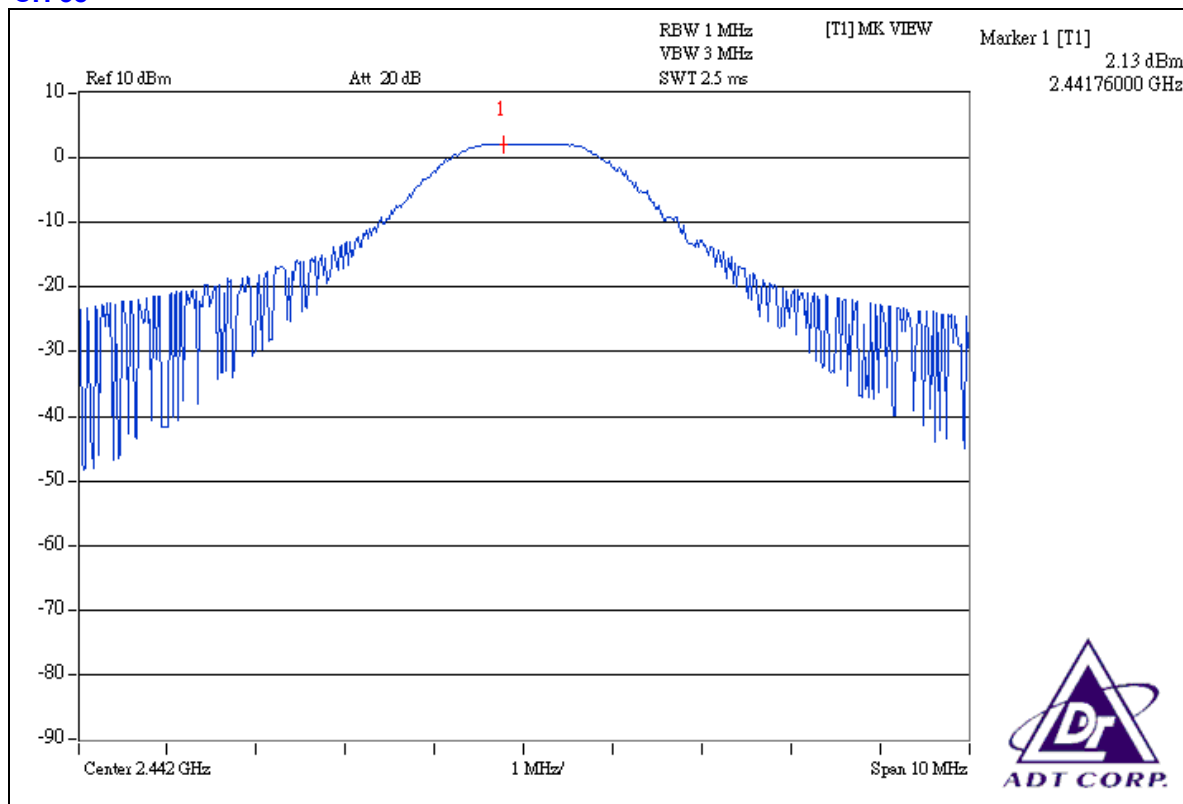

CH 76

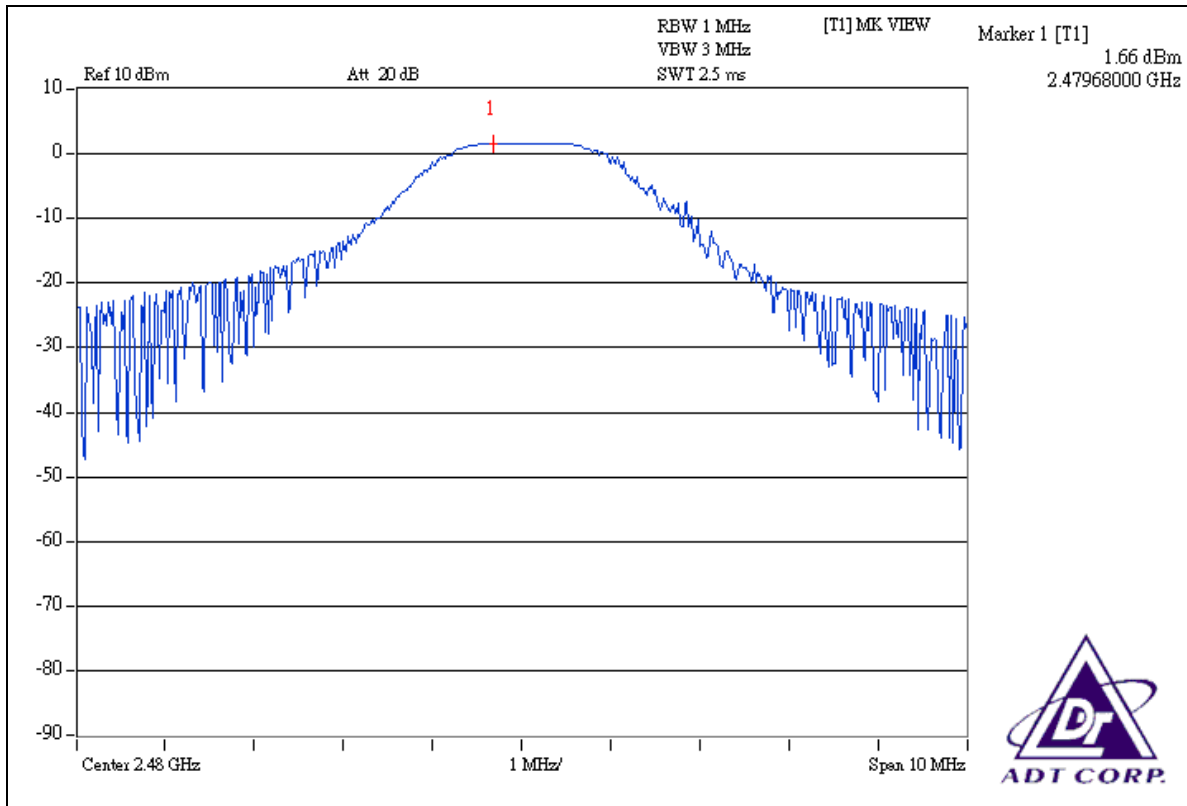

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSP 40	100036	Mar. 13, 2008

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE


The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time = span/3kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITION


Same as Item 4.3.6

4.5.7 TEST RESULTS

MODULATION TYPE	GFSK	CHANNEL	0, 38, 76
INPUT POWER	1.5Vdc	ENVIRONMENTAL CONDITIONS	20deg. C, 75%RH, 1004hPa
TESTED BY	Jamison Chan		


CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
0	2404	-10.66	8	PASS
38	2442	-10.33	8	PASS
76	2480	-11.02	8	PASS

CH 0

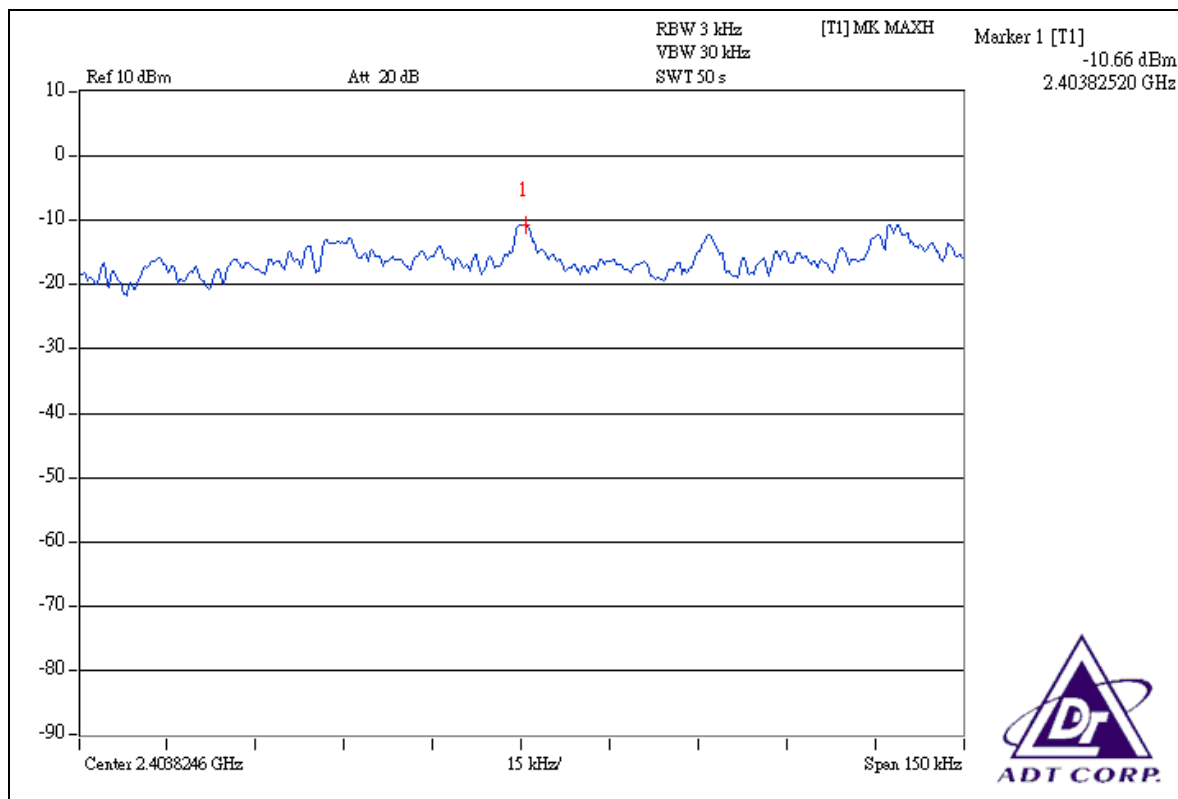




CH 38

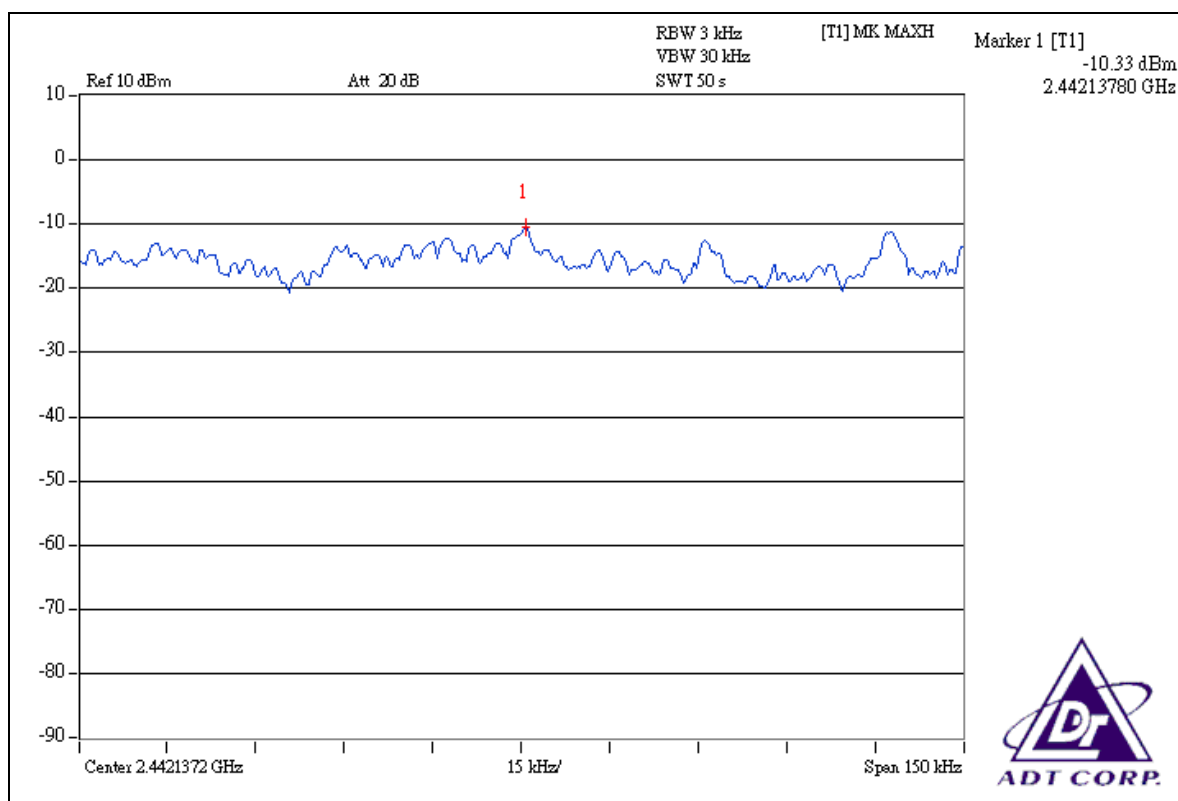

CH 76

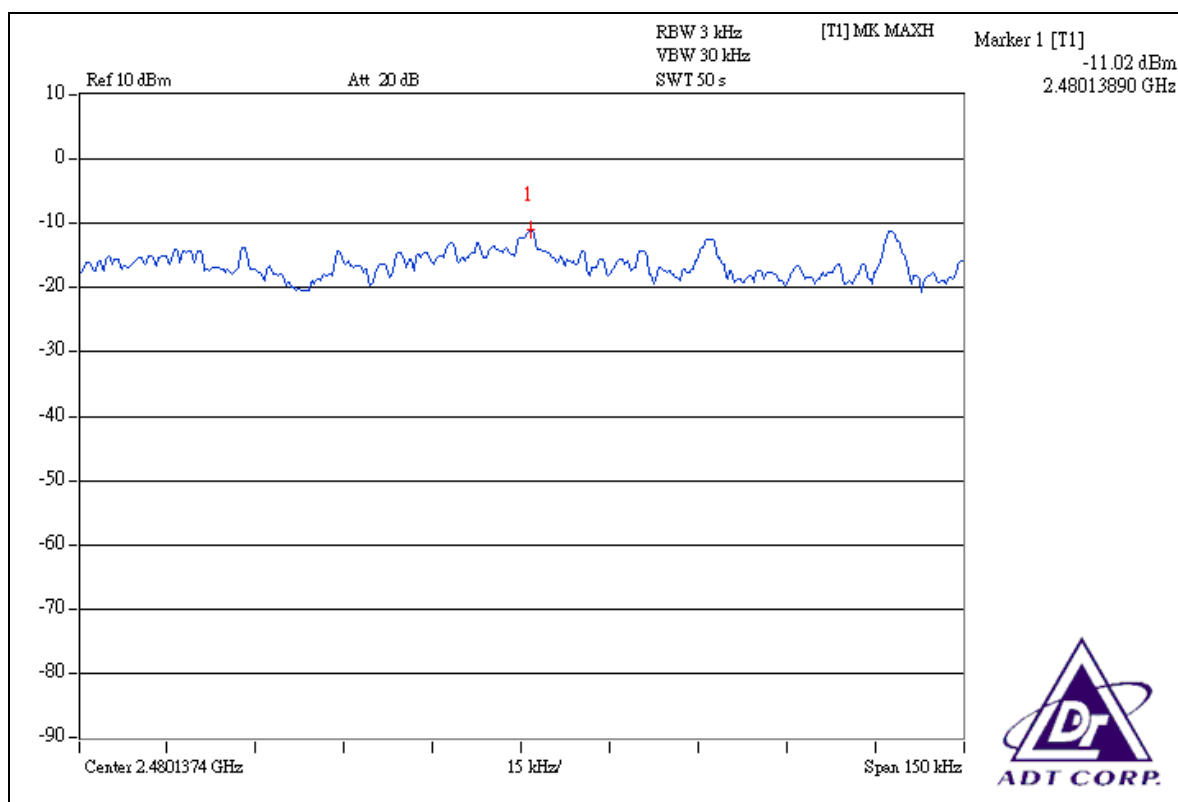

4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSP 40	100036	Mar. 13, 2008

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set RBW and VBW of spectrum analyzer to 100 kHz and 300 kHz suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots are attached on the following pages.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6

4.6.6 TEST RESULTS

The spectrum plots are attached on the following 6 images. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).

Note 1:



The band edge emission plot on the next page shows 52.95dBc between carrier maximum power and local maximum emission in restrict band (2.3886GHz). The emission of carrier strength list in the test result of channel 0 at the item 4.2.7 is 93.43dBuV/m (Peak), so the maximum field strength in restrict band is $93.43 - 52.95 = 40.48$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot the next page shows 41.39dBc between carrier maximum power and local maximum emission in restrict band (2.3540GHz). The emission of carrier strength list in the test result of channel 0 at the item 4.2.7 is 80.19dBuV/m (Average), so the maximum field strength in restrict band is $80.19 - 41.39 = 38.80$ dBuV/m which is under 54dBuV/m limit.



Note 2:

The band edge emission plot on the next second page shows 42.05dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 76 at the item 4.2.7 is 91.51dBuV/m (Peak), so the maximum field strength in restrict band is $91.51 - 42.05 = 49.46$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on the next third page shows 30.71dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 76 at the item 4.2.7 is 78.82dBuV/m (Average), so the maximum field strength in restrict band is $78.82 - 30.71 = 48.11$ dBuV/m which is under 54dBuV/m limit.

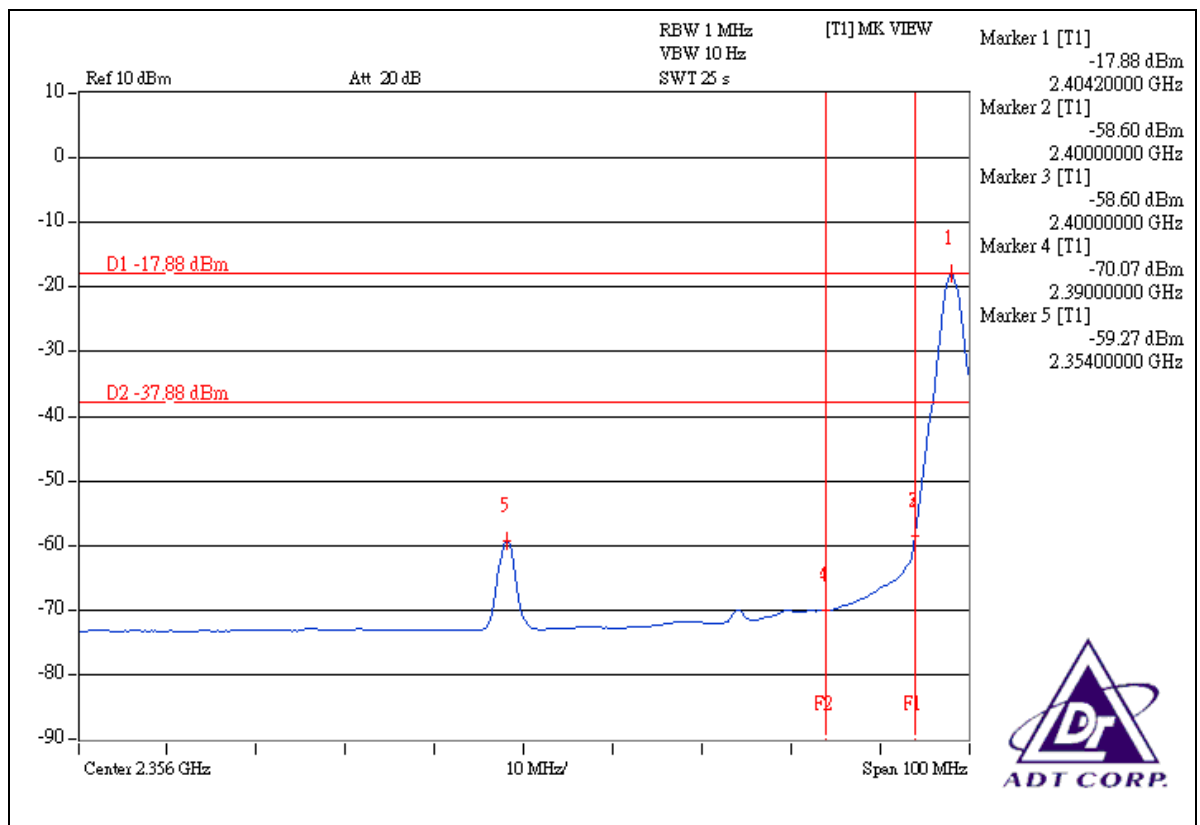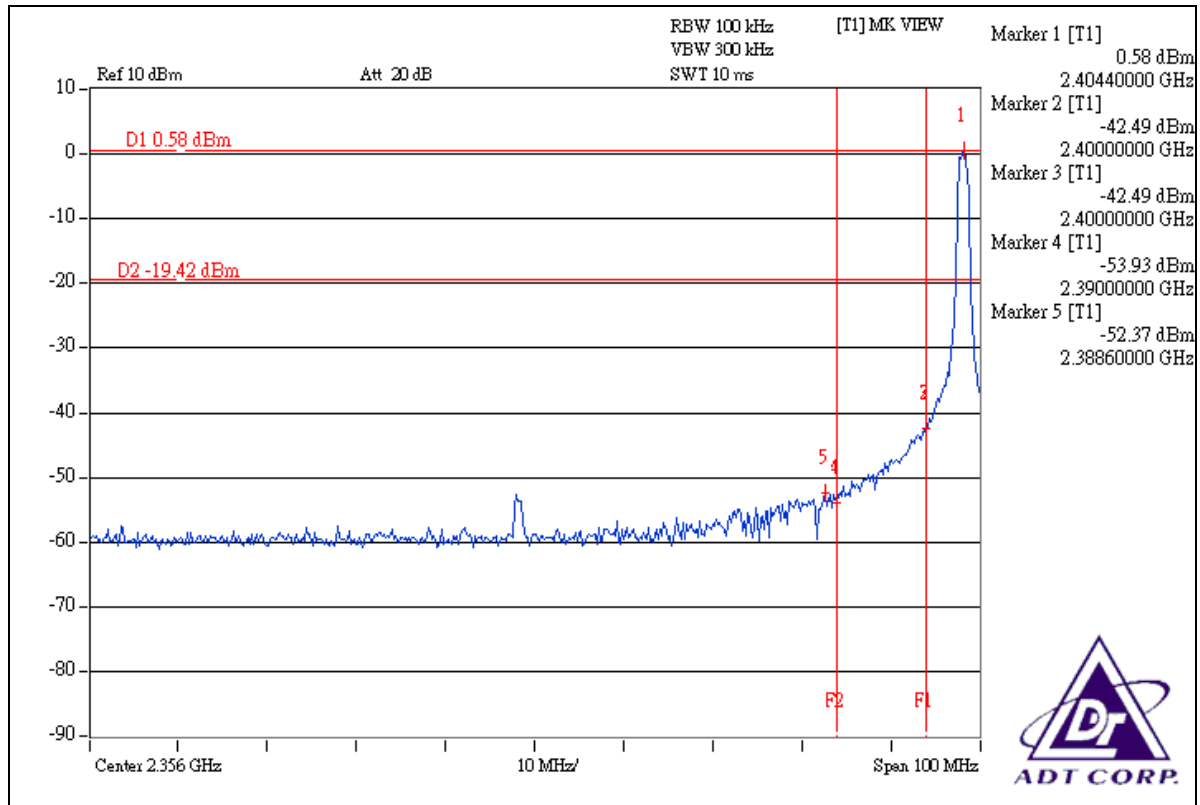

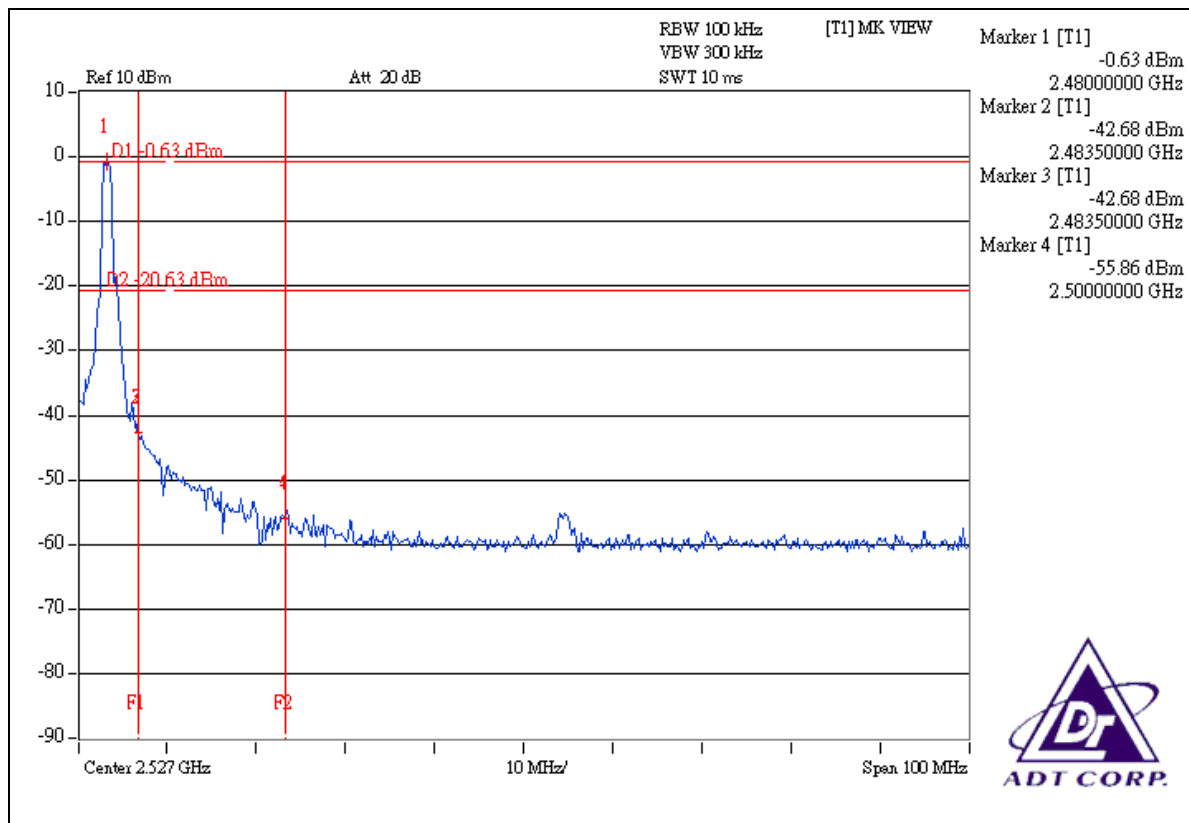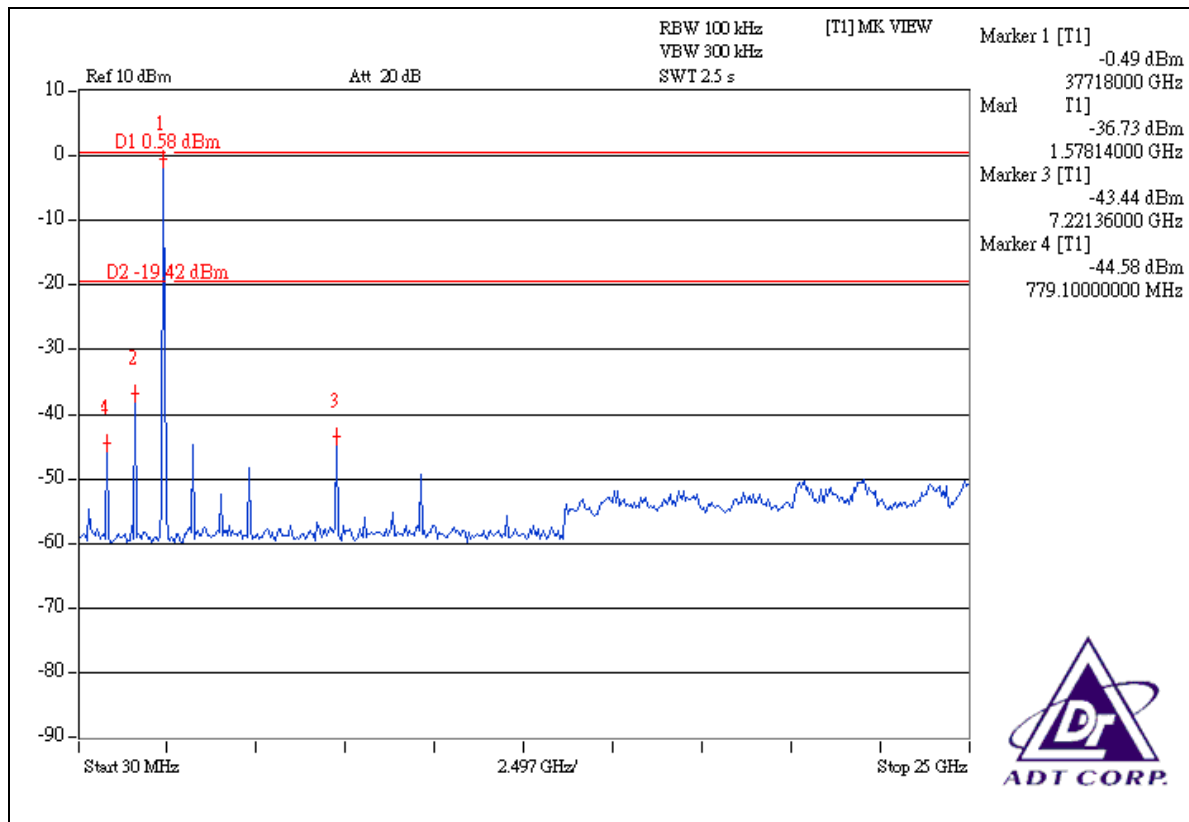

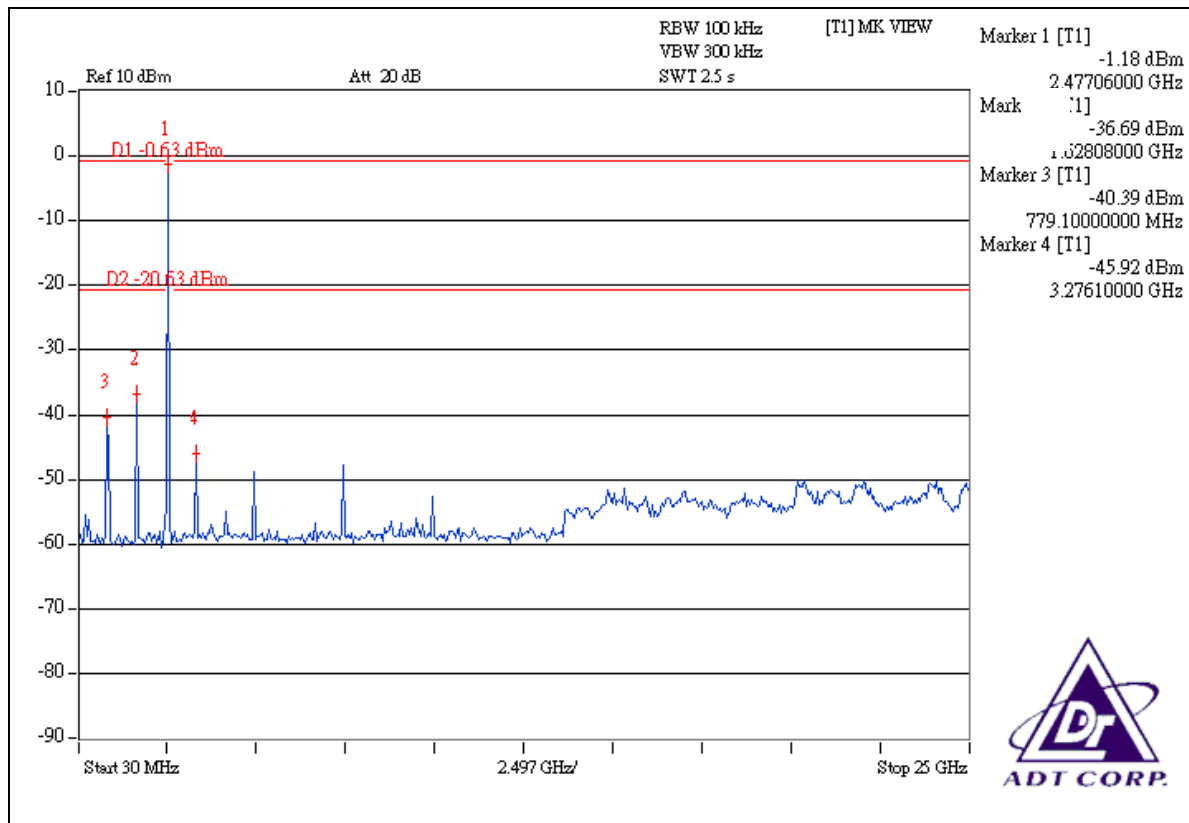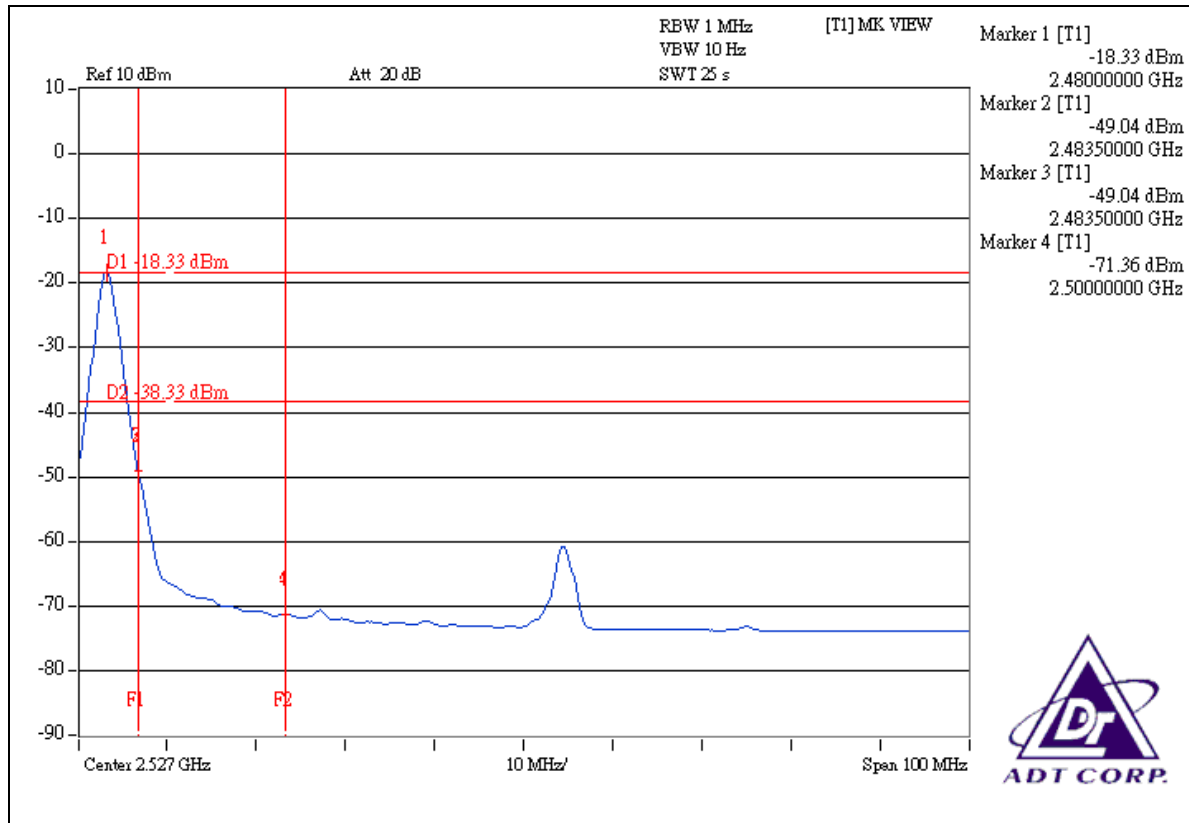



4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is Printed antenna without connector. The maximum gain of the antenna is -5.96dBi.



5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



6. INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

USA	FCC, UL, A2LA
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA, CSA
R.O.C.	TAF, BSMI, NCC
Netherlands	Telefication
Singapore	GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml.
If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:
Tel: 886-2-26052180
Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:
Tel: 886-3-5935343
Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:
Tel: 886-3-3183232
Fax: 886-3-3185050

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also



7. APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.