

**FCC 47 CFR PART 15 SUBPART C AND ANSI C63.10:2013  
TEST REPORT**

**For**

**RF\_PIR Sensor ; PIR Sensor\_RF**

**Model: RF\_PIR、 RF\_PIR-xxx**

("xxx"=001-999 or blank for indicate different customer serial number)

**Data Applies To: PIR-RF、 PIR-RF-xxx**

("xxx"=001-999 or blank for indicate different customer serial number)

**Trade Name: Tranwo ; Smart Bridge**

**Issued for**

**Tranwo Technology Corp**

**No.236, Sec. 3, Huanbei Rd., Jubei City, Hsinchu County, 30265 Taiwan**

**Issued by**

**Compliance Certification Services Inc.  
Hsinchu Lab.**

**NO. 989-1 Wen Shan Rd., Shang Shan Village,  
Qionglin Township, Hsinchu County 30741, Taiwan (R.O.C.)**

**TEL: +886-3-5921698**

**FAX: +886-3-5921108**

**<http://www.ccsrf.com>**

**E-Mail: [service@ccsrf.com](mailto:service@ccsrf.com)**

**Issued Date: November 06, 2015**



**Note:** This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF or any government agencies. The test results of this report relate only to the tested sample identified in this report.

## Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	11/06/2015	Initial Issue	All Page 30	Gloria Chang

---

## TABLE OF CONTENTS

TITLE	PAGE NO.
<b>1. TEST REPORT CERTIFICATION</b> .....	<b>4</b>
<b>2. EUT DESCRIPTION</b> .....	<b>5</b>
<b>3. DESCRIPTION OF TEST MODES</b> .....	<b>6</b>
<b>4. TEST METHODOLOGY</b> .....	<b>7</b>
<b>5. FACILITIES AND ACCREDITATION</b> .....	<b>7</b>
5.1 FACILITIES .....	7
5.2 ACCREDITATIONS.....	7
5.3 MEASUREMENT UNCERTAINTY .....	8
<b>6. SETUP OF EQUIPMENT UNDER TEST</b> .....	<b>9</b>
<b>7. FCC PART 15.249 REQUIREMENTS</b> .....	<b>10</b>
7.1 DUTY CYCLE CORRECTION FACTOR .....	10
7.2 RADIATED EMISSION .....	12
7.3 CONDUCTED EMISSION .....	26
<b>8. APPENDIX SETUP PHOTOS</b> .....	<b>29</b>

# 1. TEST REPORT CERTIFICATION

**Applicant** : Tranwo Technology Corp  
**Address** : No.236, Sec. 3, Huanbei Rd., Jubei City, Hsinchu County,  
 30265 Taiwan  
**Equipment Under Test** : RF\_PIR Sensor ; PIR Sensor\_RF  
**Model** : RF\_PIR、 RF\_PIR-xxx  
 ("xxx"=001-999 or blank for indicate different customer serial number)  
**Data Applies To** : PIR-RF、 PIR-RF-xxx  
 ("xxx"=001-999 or blank for indicate different customer serial number)  
**Trade Name** : Tranwo ; Smart Bridge  
**Tested Date** : September 14 ~ October 29, 2015

APPLICABLE STANDARD	
Standard	Test Result
FCC Part 15 Subpart C AND ANSI C63.10:2013	PASS

WE HEREBY CERTIFY THAT: The above equipment has been tested by Compliance Certification Services Inc., and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

**Approved by:**



Sb. Lu  
Sr. Engineer

**Reviewed by:**



Gundam Lin  
Sr. Engineer

## 2. EUT DESCRIPTION

<b>Product Name</b>	RF_PIR Sensor ; PIR Sensor_RF
<b>Model Number</b>	RF_PIR、 RF_PIR-xxx ("xxx"=001-999 or blank for indicate different customer serial number)
<b>Data Applies To</b>	PIR-RF、 PIR-RF-xxx ("xxx"=001-999 or blank for indicate different customer serial number)
<b>Identify Number</b>	T150914S03
<b>Received Date</b>	September 14, 2015
<b>Frequency Range</b>	2407MHz to 2477MHz
<b>Transmit Power</b>	84.40 dBuV/m
<b>Channel Number</b>	8 Channels
<b>Type of Modulation</b>	GFSK
<b>Antenna Type</b>	FPC Antenna, Antenna Gain: 2 dBi
<b>Power Rating</b>	4.5Vdc (For Battery)
<b>Test Voltage</b>	4.5Vdc

### The difference of the series model

Product Name	Trade Name	Model Name	Difference
RF_PIR Sensor	Tranwo	RF_PIR	All these models are similar except for model identification and market segmentation.
		RF_PIR-xxx ("xxx"=001-999 or blank for indicate different customer serial number)	
PIR Sensor_RF	Smart Bridge	PIR-RF	
		PIR-RF-xxx ("xxx"=001-999 or blank for indicate different customer serial number)	

**Remark:**

1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
2. For more details, please refer to the User's manual of the EUT.
3. This submittal(s) (test report) is intended for FCC ID: O6LIPCAM-RFPIR filing to comply with Section 15.207, 15.209 and 15.249 of the FCC Part 15, Subpart C Rules.
4. The model RF\_PIR was considered the main model for testing.

### 3. DESCRIPTION OF TEST MODES

The EUT had been tested under operating condition.

#### Conducted Emission / Radiated Emission Test (Below 1 GHz)

1. The following test modes were scanned during the preliminary test:

No.	Pre-Test mode
1	TX mode

2. After the preliminary scan, the following test mode was found to produce the highest emission level.

Final Test mode		
Emission	Radiated Emission	Mode 1
	Conducted Emission	N/A

**Remark:** Then, the above highest emission mode of the configuration of the EUT and cable was chosen for all final test items.

#### Radiated Emission Test (Above 1 GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

Channel	Frequency (MHz)
Low	2407
Middle	2435
High	2477

#### Bandedge Measurement:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Channel	Frequency (MHz)
Low	2407
High	2477

**Remark:** The field strength of spurious emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X, Y axis). The worst emission was found in lie-down position(Y axis) and the worst case was recorded.

## 4. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10:2013, FCC CFR 47, 15.207, 15.209 and 15.249.

## 5. FACILITIES AND ACCREDITATION

### 5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at No.989-1, Wenshan Rd., Shangshan Village, Qionglin Township, Hsinchu County 30741, Taiwan (R.O.C.)

The sites are constructed in conformance with the requirements of ANSI C63.10:2013 and CISPR 22. All receiving equipment conforms to CISPR 16-1-1, CISPR 16-1-2, CISPR 16-1-3, CISPR 16-1-4 and CISPR 16-1-5.

### 5.2 ACCREDITATIONS

Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

<b>Taiwan</b>	TAF
---------------	-----

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

<b>Canada</b>	INDUSTRY CANADA
<b>Japan</b>	VCCI
<b>Taiwan</b>	BSMI
<b>USA</b>	FCC MRA

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccsrf.com>

**Remark:** FCC Designation Number TW1027.

### 5.3 MEASUREMENT UNCERTAINTY

The following table is for the measurement uncertainty, which is calculated as per the document CISPR 16-4-2.

PARAMETER	UNCERTAINTY
Semi Anechoic Chamber (966 Chamber_C) / Radiated Emission, 30 to 1000 MHz	+/- 3.97
Semi Anechoic Chamber (966 Chamber_C) / Radiated Emission, 1 to 18GHz	+/- 3.58
Semi Anechoic Chamber (966 Chamber_C) / Radiated Emission, 18 to 26 GHz	+/- 3.59
Semi Anechoic Chamber (966 Chamber_C) / Radiated Emission, 26 to 40 GHz	+/- 3.81
Conducted Emission (Mains Terminals), 9kHz to 30MHz	+/- 2.48

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

Consistent with industry standard (e.g. CISPR 22, clause 11, Measurement Uncertainty) determining compliance with the limits shall be base on the results of the compliance measurement. Consequently the measure emissions being less than the maximum allowed emission result in this be a compliant test or passing test.

The acceptable measurement uncertainty value without requiring revision of the compliance statement is base on conducted and radiated emissions being less than  $U_{CISPR}$  which is 3.6dB and 5.2dB respectively. CCS values (called  $U_{Lab}$  in CISPR 16-4-2) is less than  $U_{CISPR}$  as shown in the table above. Therefore, MU need not be considered for compliance.



## 6. SETUP OF EQUIPMENT UNDER TEST

### SUPPORT EQUIPMENT

No.	Product	Manufacturer	Model No.	Serial No.
1	DC Power Supply	Agilent	E3631A	MY40007576

No.	Signal Cable Description
1	Non-shielded DC cable, 2m x 1

### SETUP DIAGRAM FOR TESTS

EUT & peripherals setup diagram is shown in appendix setup photos.

### EUT OPERATING CONDITION

1. EUT & peripherals setup diagram is shown in appendix setup photos.
2. Power on all equipments.
3. TX Mode:
  - ⇒ **Channel select:**  
Frequency: 2407, 2435, 2477
4. All of the functions are under run.
5. Start test.

## 7. FCC PART 15.249 REQUIREMENTS

### 7.1 DUTY CYCLE CORRECTION FACTOR

#### LIMITS


Limit: N/A

#### TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EXA Signal Analyzer	Agilent	N9010A	MY52220817	03/19/2016

*Remark: Each piece of equipment is scheduled for calibration once a year.*

#### TEST SETUP

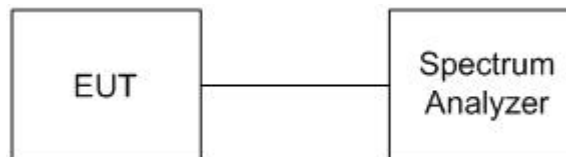

#### TEST PROCEDURE

1. Set center frequency of spectrum analyzer = operating frequency.
2. Set the spectrum analyzer as RBW, VBW= 1MHz, Span = 0Hz.
3. Repeat above procedures until all frequency measured were complete.

**TEST RESULTS**

Tp = 8.02 (ms)

Ton = 0.66 (ms)

Duty Cycle Correction Factor = 20 × log (Ton / Tp)

$$= 20 \times \log (0.66 / 8.02) = -21.69 < -20$$

Because -21.69 less than -20, so the Duty Cycle Correction Factor = -20



## 7.2 RADIATED EMISSION

### LIMITS

(1) According to § 15.205 (a) except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 -1710	10.6 -12.7
6.26775 - 6.26825	108 -121.94	1718.8 - 1722.2	13.25 -13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 -16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3338	36.43 - 36.5
12.57675 - 12.57725	322 -335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41			

**Remark:**

1. <sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.
2. <sup>2</sup> Above 38.6

(2) According to § 15.205 (b) except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

(3) According to § 15.209 (a) except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(KHz)	300
0.490 - 1.705	24000/F(KHz)	30
1.705 - 30.0	30	30
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

**Remark:** \*\*Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

(4) According to § 15.209 (b) in the emission table above, the tighter limit applies at the band edges.

(5) According to § 15.249 (a) Except as provided in paragraph (b) of this section, the field strength of emission from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (millivolts/meter)	Measurement Distance of Harmonics (microvolts/meter)
902 - 928	50	500
2400 - 2483.5	50	500
5725 - 5875	50	500
24000 - 24250	250	2500

**TEST EQUIPMENT**

**Radiated Emission / 966Chamber\_C**


<b>Name of Equipment</b>	<b>Manufacture</b>	<b>Model</b>	<b>Serial Number</b>	<b>Calibration Due</b>
Spectrum Analyzer	Agilent	E4446A	MY45280064	03/26/2016
EMI Test Receiver	Rohde & Schwarz	ESCI	101387	10/06/2016
Bi-log Antenna	TESEQ	CBL6112D	35404	08/04/2016
Double-Ridged Waveguide Horn	ETS-LINDGREN	3117	00078732	07/14/2016
Horn Antenna	COM-POWER	AH-840	03077	12/17/2015
Pre-Amplifier	EMCI	EMC001625	980243	04/12/2016
Pre-Amplifier	COM-POWER	PAM-118A	551043	04/12/2016
LOOP Antenna	COM-POWER	AL-130	121060	05/24/2016

**Remark:** Each piece of equipment is scheduled for calibration once a year.


**TEST SETUP**

The diagram below shows the test setup that is utilized to make the measurements for emission from below 1GHz.


**9kHz ~ 30MHz**

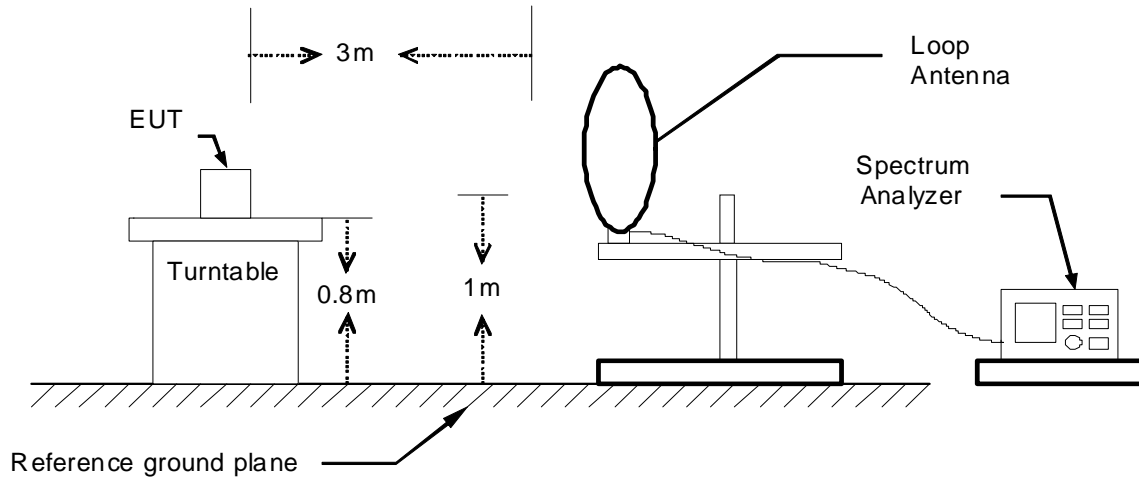

**30MHz ~ 1GHz**

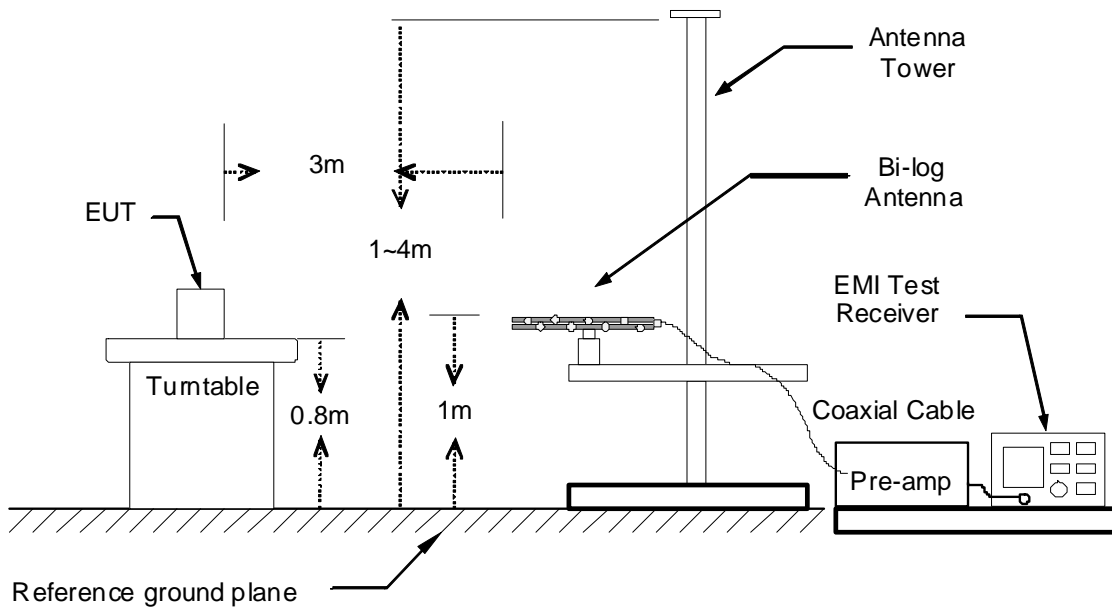

The diagram below shows the test setup that is utilized to make the measurements for emission above 1GHz.

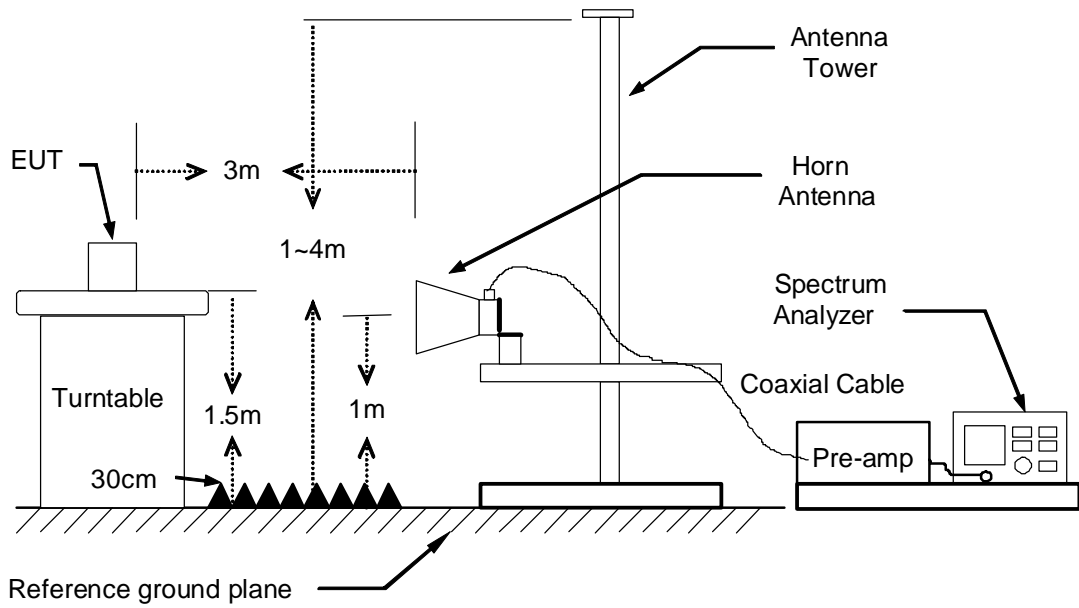



## **TEST PROCEDURE**

1. The EUT was placed on the top of a rotating table 0.8 and 1.5 meters above the ground. The table was rotated 360 degrees to determine the position of the highest radiation.
2. While measuring the radiated emission below 1GHz, the EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. While measuring the radiated emission above 1GHz, the EUT was set 3 meters away from the interference-receiving antenna.
3. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarization of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

### **Remark :**

1. *The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 KHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.*
2. *The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1GHz.*
3. *The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.*

**TEST RESULTS**

**Below 1 GHz (9kHz ~ 30MHz)**

No emission found between lowest internal used/generated frequency to 30MHz.

**Below 1 GHz (30MHz ~ 1GHz)**

<b>Product Name</b>	RF_PIR Sensor	<b>Test By</b>	Waternil Guan
<b>Test Model</b>	RF_PIR	<b>Test Date</b>	2015/10/08
<b>Test Mode</b>	Mode 1	<b>Temp. &amp; Humidity</b>	24°C, 58%

**966Chamber\_C at 3Meter / Horizontal**

Freq. MHz	Reading dBuV	C.F. dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
95.960	50.76	-20.91	29.85	43.50	-13.65	89	200	Peak
108.570	50.53	-19.32	31.21	43.50	-12.29	247	300	Peak
149.310	55.69	-19.55	36.14	43.50	-7.36	269	200	Peak
161.920	58.66	-20.27	38.39	43.50	-5.11	254	200	Peak
170.650	54.61	-20.66	33.95	43.50	-9.55	260	200	Peak
191.990	54.79	-20.69	34.10	43.50	-9.40	275	200	Peak
342.340	49.81	-15.04	34.77	46.00	-11.23	44	100	Peak
366.590	50.77	-14.36	36.41	46.00	-9.59	204	100	Peak

**966Chamber\_C at 3Meter / Vertical**

Freq. MHz	Reading dBuV	C.F. dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
35.820	46.59	-14.55	32.04	40.00	-7.96	241	100	Peak
48.430	53.63	-21.77	31.86	40.00	-8.14	61	100	Peak
87.230	55.99	-22.52	33.47	40.00	-6.53	109	100	Peak
108.570	54.44	-19.32	35.12	43.50	-8.38	147	100	Peak
120.210	53.17	-18.31	34.86	43.50	-8.64	177	100	Peak
137.670	52.55	-18.93	33.62	43.50	-9.88	128	100	Peak
149.310	53.14	-19.55	33.59	43.50	-9.91	156	100	Peak
366.590	49.19	-14.36	34.83	46.00	-11.17	321	100	Peak

**Remark:**

1. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit.
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) – PreAmp.Gain (dB)
3. Result (dBuV/m) = Reading (dBuV) + Correction Factor (dB/m)
4. Margin (dB) = Remark result (dBuV/m) - Quasi-peak limit (dBuV/m).

**Above 1 GHz**

<b>Product Name</b>	RF_PIR Sensor	<b>Test By</b>	Waternil Guan
<b>Test Model</b>	RF_PIR	<b>Test Date</b>	2015/10/08
<b>Test Mode</b>	TX Mode / CH Low	<b>Temp. &amp; Humidity</b>	24°C, 58%

**966Chamber\_C at 3Meter / Horizontal**

Freq. MHz	Reading dBuV	C.F. dB/m	duty cycle dB	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
2407.00	60.08	4.32	20	64.40	94.00	-29.60	199	200	Average
2407.00	80.08	4.32		84.40	114.00	-29.60	199	200	Peak
2610.00	39.79	4.73		44.52	74.00	-29.48	305	100	Peak
2802.00	39.35	5.11		44.46	74.00	-29.54	124	100	Peak
2956.00	39.18	5.40		44.58	74.00	-29.42	258	200	Peak
4815.00	37.95	-0.27	20	37.68	54.00	-16.32	312	100	Average
4815.00	57.95	-0.27		57.68	74.00	-16.32	312	100	Peak
7215.00	34.23	2.69	20	36.92	54.00	-17.08	52	100	Average
7215.00	54.23	2.69		56.92	74.00	-17.08	52	100	Peak
9345.00	44.32	4.17		48.49	74.00	-25.51	288	200	Peak

**966Chamber\_C at 3Meter / Vertical**

Freq. MHz	Reading dBuV	C.F. dB/m	duty cycle dB	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
2262.00	41.01	4.01		45.02	74.00	-28.98	358	200	Peak
2407.00	59.16	4.32	20	63.48	94.00	-30.52	134	100	Average
2407.00	79.16	4.32		83.48	114.00	-30.52	134	100	Peak
2728.00	39.51	4.96		44.47	74.00	-29.53	162	200	Peak
2940.00	39.52	5.37		44.89	74.00	-29.11	127	200	Peak
4815.00	32.67	-0.27	20	32.40	54.00	-21.60	178	200	Average
4815.00	52.67	-0.27		52.40	74.00	-21.60	178	200	Peak
7215.00	38.35	2.69	20	41.04	54.00	-12.96	30	100	Average
7215.00	58.35	2.69		61.04	74.00	-12.96	30	100	Peak
10110.00	44.19	5.13		49.32	74.00	-24.68	261	100	Peak

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor  
 Margin = Result - Limit  
 Remark Peak = Result(PK) - Limit(PK)  
 Remark AVG = Result(AV) - Limit(AV)

<b>Product Name</b>	RF_PIR Sensor	<b>Test By</b>	Waternil Guan
<b>Test Model</b>	RF_PIR	<b>Test Date</b>	2015/10/08
<b>Test Mode</b>	TX Mode / CH Middle	<b>Temp. &amp; Humidity</b>	24°C, 58%

**966Chamber\_C at 3Meter / Horizontal**

Freq. MHz	Reading dBuV	C.F. dB/m	duty cycle dB	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
1994.00	39.59	3.39		42.98	74.00	-31.02	219	200	Peak
2152.00	40.76	3.78		44.54	74.00	-29.46	302	200	Peak
2435.00	58.66	4.38	20	63.04	94.00	-30.96	199	200	Average
2435.00	78.66	4.38		83.04	114.00	-30.96	199	200	Peak
2764.00	39.30	5.03		44.33	74.00	-29.67	259	200	Peak
4875.00	37.48	-0.06	20	37.42	54.00	-16.58	36	100	Average
4875.00	57.48	-0.06		57.42	74.00	-16.58	36	100	Peak
7305.00	34.31	2.73	20	37.04	54.00	-16.96	34	100	Average
7305.00	54.31	2.73		57.04	74.00	-16.96	34	100	Peak
9345.00	43.00	4.17		47.17	74.00	-26.83	34	100	Peak

**966Chamber\_C at 3Meter / Vertical**

Freq. MHz	Reading dBuV	C.F. dB/m	duty cycle dB	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
2435.00	56.76	4.38	20	61.14	94.00	-32.86	173	200	Average
2435.00	76.76	4.38		81.14	114.00	-32.86	173	200	Peak
2598.00	39.77	4.71		44.48	74.00	-29.52	288	100	Peak
2784.00	39.73	5.07		44.80	74.00	-29.20	341	100	Peak
2950.00	40.07	5.39		45.46	74.00	-28.54	181	200	Peak
4875.00	34.19	-0.06	20	34.13	54.00	-19.87	347	100	Average
4875.00	54.19	-0.06		54.13	74.00	-19.87	347	100	Peak
7305.00	39.53	2.73	20	42.26	54.00	-11.74	28	100	Average
7305.00	59.53	2.73		62.26	74.00	-11.74	28	100	Peak
10065.00	43.15	5.04		48.19	74.00	-25.81	87	200	Peak

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor  
 Margin = Result – Limit  
 Remark Peak = Result(PK) – Limit(PK)  
 Remark AVG = Result(AV) – Limit(AV)

<b>Product Name</b>	RF_PIR Sensor	<b>Test By</b>	Waternil Guan
<b>Test Model</b>	RF_PIR	<b>Test Date</b>	2015/10/08
<b>Test Mode</b>	TX Mode / CH High	<b>Temp. &amp; Humidity</b>	24°C, 58%

**966Chamber\_C at 3Meter / Horizontal**

Freq. MHz	Reading dBuV	C.F. dB/m	duty cycle dB	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
2477.00	56.99	4.47	20	61.46	94.00	-32.54	200	100	Average
2477.00	76.99	4.47		81.46	114.00	-32.54	200	100	Peak
2698.00	39.31	4.90		44.21	74.00	-29.79	0	100	Peak
2846.00	38.95	5.19		44.14	74.00	-29.86	191	200	Peak
2902.00	39.35	5.30		44.65	74.00	-29.35	7	100	Peak
3990.00	45.57	-2.29		43.28	74.00	-30.72	277	100	Peak
4950.00	40.15	0.20	20	40.35	54.00	-13.65	39	100	Average
4950.00	60.15	0.20		60.35	74.00	-13.65	39	100	Peak
7425.00	37.68	2.79	20	40.47	54.00	-13.53	37	100	Average
7425.00	57.68	2.79		60.47	74.00	-13.53	37	100	Peak

**966Chamber\_C at 3Meter / Vertical**


Freq. MHz	Reading dBuV	C.F. dB/m	duty cycle dB	Result dBuV/m	Limit dBuV/m	Margin dB	Azimuth deg	Height cm	Remark
2156.00	40.53	3.78		44.31	74.00	-29.69	352	200	Peak
2248.00	41.15	3.98		45.13	74.00	-28.87	283	100	Peak
2477.00	55.00	4.47	20	59.47	94.00	-34.53	174	200	Average
2477.00	75.00	4.47		79.47	114.00	-34.53	174	200	Peak
2944.00	39.81	5.38		45.19	74.00	-28.81	15	200	Peak
4950.00	38.56	0.20	20	38.76	54.00	-15.24	346	100	Average
4950.00	58.56	0.20		58.76	74.00	-15.24	346	100	Peak
7425.00	39.97	2.79	20	42.76	54.00	-11.24	13	200	Average
7425.00	59.97	2.79		62.76	74.00	-11.24	13	200	Peak
9345.00	43.88	4.17		48.05	74.00	-25.95	68	100	Peak

**Remark:**


1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Result = Reading + Correction Factor  
 Margin = Result - Limit  
 Remark Peak = Result(PK) - Limit(PK)  
 Remark AVG = Result(AV) - Limit(AV)

**Restricted Band Edges**


**Detector Mode: Peak      Polarity: Horizontal**

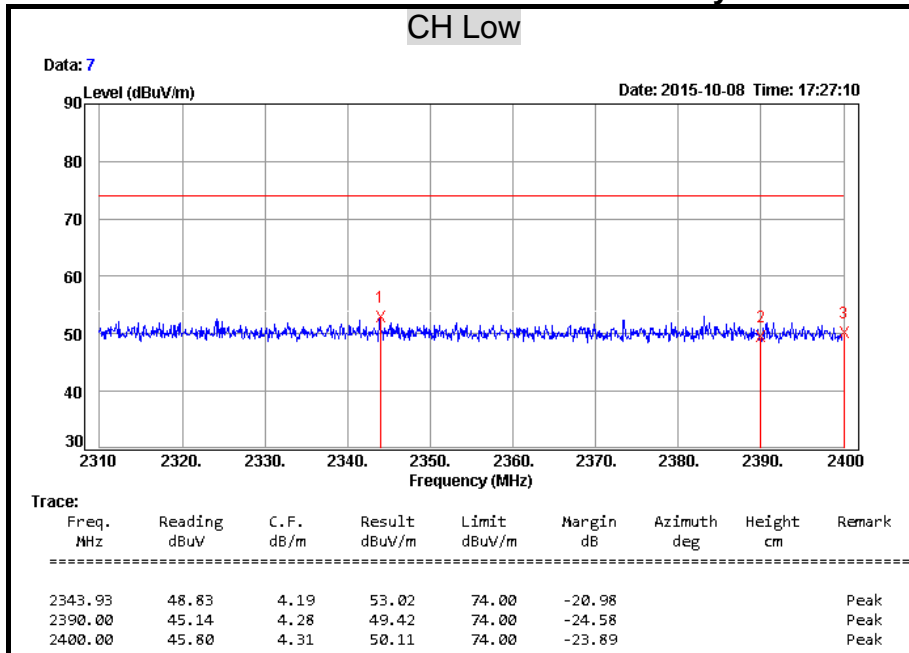


**Detector Mode: Average      Polarity: Horizontal**

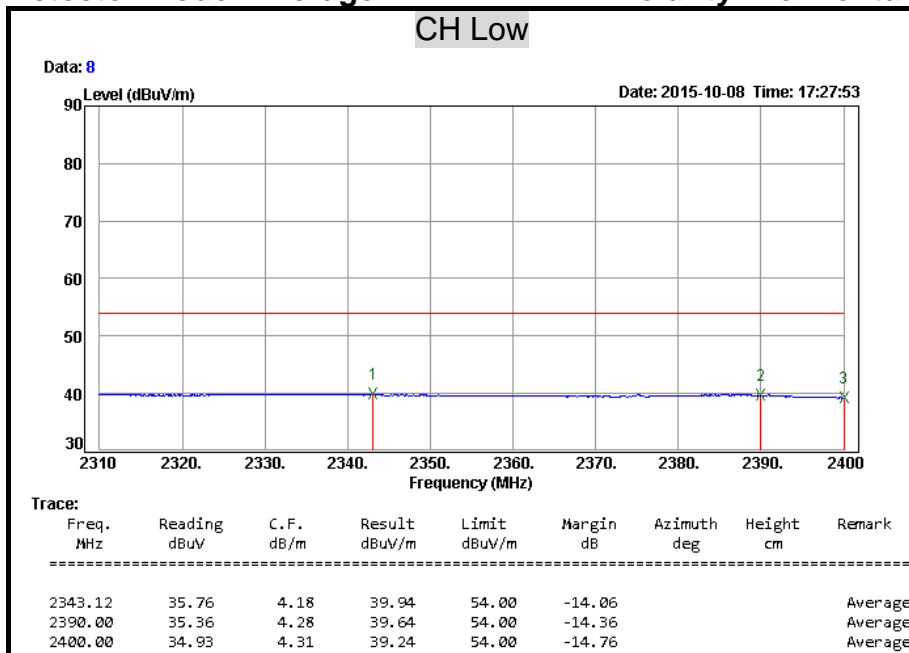


**Detector Mode: Peak Polarity: Vertical**

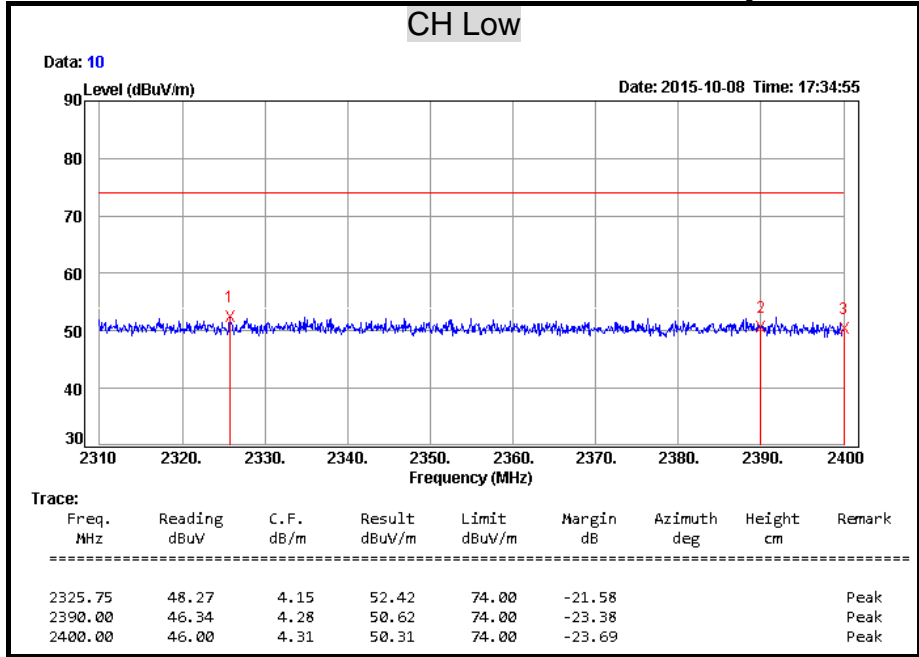


**Detector Mode: Average Polarity: Vertical**

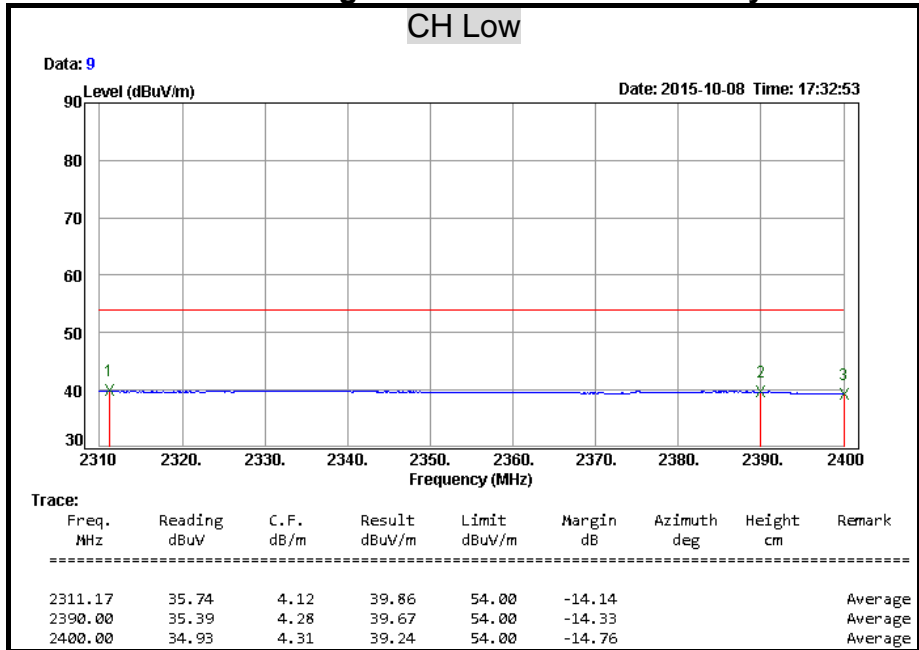

**Detector Mode: Peak Polarity: Horizontal**

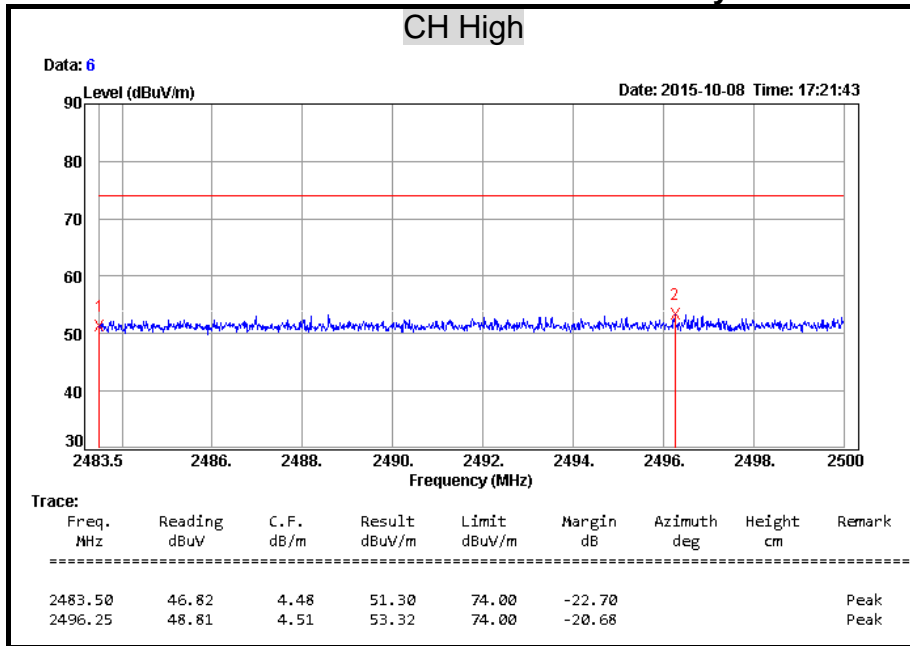


**Detector Mode: Average Polarity: Horizontal**

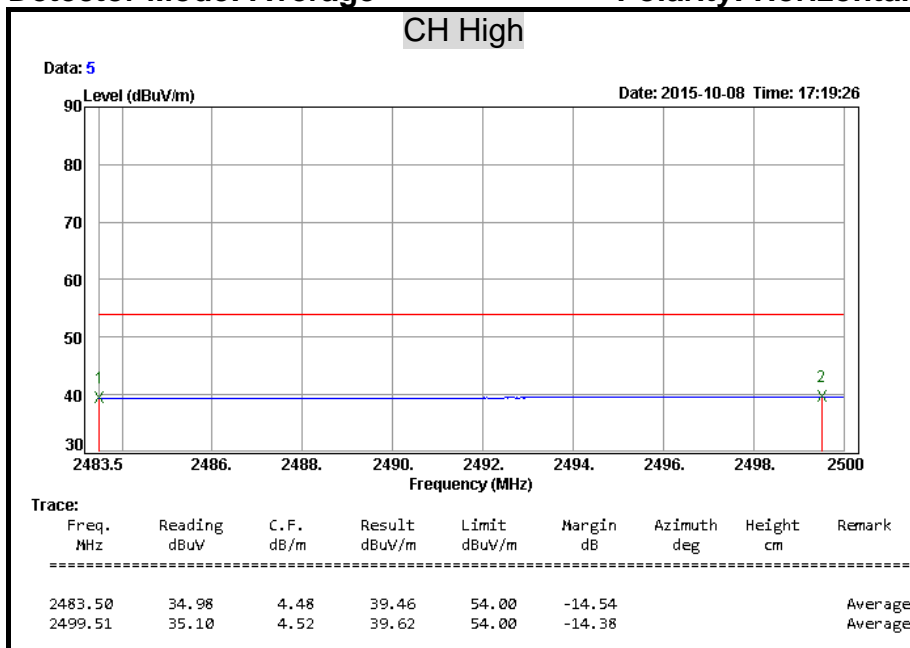




**Detector Mode: Peak Polarity: Vertical**

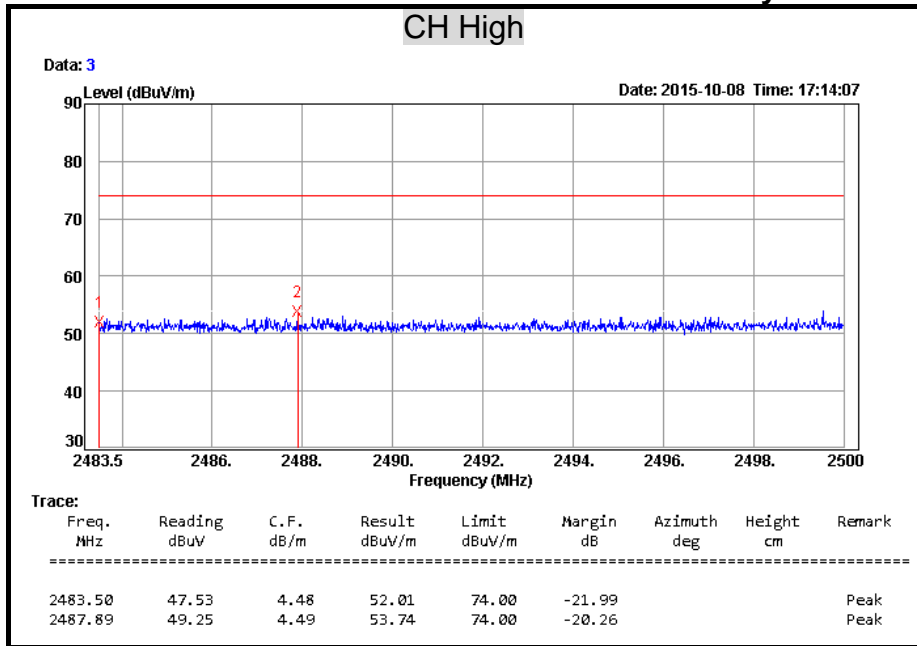

**Detector Mode: Average Polarity: Vertical**

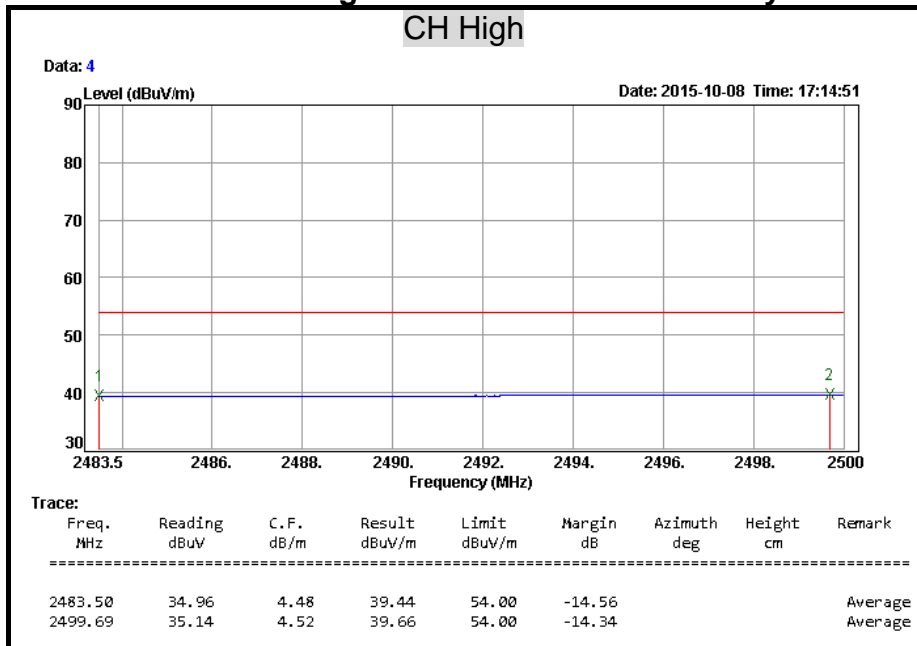

### 7.3 CONDUCTED EMISSION

#### LIMITS

§ 15.207 (a) Except as shown in paragraph (b) and (c) this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 µH/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.


Frequency Range (MHz)	Conducted Limit (dBµv)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5.00	56	46
5.00 - 30.0	60	50

#### TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
L.I.S.N	Schwarzbeck	NSLK 8127	8127465	08/05/2016
L.I.S.N	Schwarzbeck	NSLK 8127	8127473	03/09/2016
EMI Test Receiver	Rohde & Schwarz	ESHS 30	838550/003	11/02/2015
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100111	06/28/2016

**Remark:** Each piece of equipment is scheduled for calibration once a year.

**TEST SETUP**

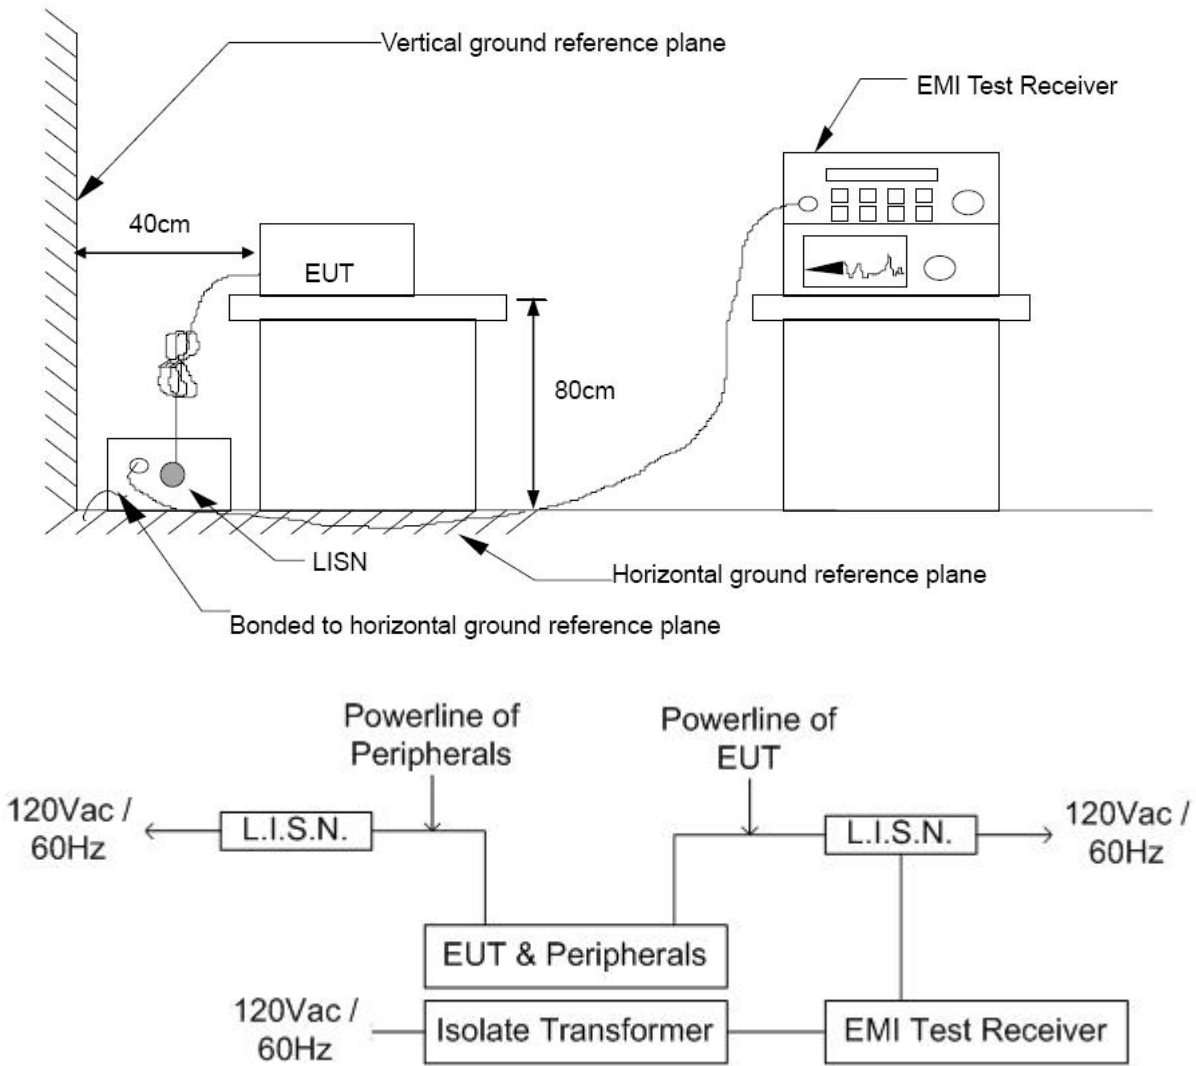

## **TEST PROCEDURE**

The basic test procedure was in accordance with ANSI C63.10:2013.

The test procedure is performed in a 4m x 3m x 2.4m (LxWxH) shielded room.

The EUT along with its peripherals were placed on a 1.0m (W) x 1.5m (L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane.

The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room. All peripherals were connected to the second LISN and the chassis ground also bounded to the horizontal ground plane of shielded room.

The EUT was located so that the distance between the boundary of the EUT and the closest surface of the LISN is 0.8 m. Where a mains flexible cord was provided by the manufacturer shall be 1 m long, or if in excess of 1 m, the excess cable was folded back and forth as far as possible so as to form a bundle not exceeding 0.4 m in length.

## **TEST RESULTS**

Since the EUT is powered by Battery Powered, this test item is not applicable.