



ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR FCC CERTIFICATION

Test Report No. : E059R-036

Applicant : Humax Co., Ltd.

Address : Humax Building, 212-1, Yubang-Dong, Yongin-City, Gyunggi-Do, 449-080, Korea

Manufacturer : Humax Co., Ltd.

Address : Humax Building, 212-1, Yubang-Dong, Yongin-City, Gyunggi-Do, 449-080, Korea

Type of Equipment : Satellite Radio Receiver (Dock Unit) (FM Transmitter)

FCC ID. : O6ZS50-C1

Model Name : S50-C1

Serial number : N/A

Total page of Report : 13 pages (including this page)


Date of Incoming : August 23, 2005

Date of Issuing : September 15, 2005

SUMMARY

The equipment complies with the regulation of *FCC CRF 47 PART 15, SUBPART C, SECTION 15.239*.

This test report contains only the results of a single test of the sample supplied for the examination. It is not a general valid assessment of the features of the respective products of the mass-production.

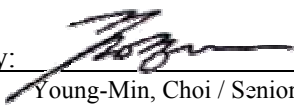Prepared by: 
Young-Min, Choi / Senior Engineer
EMC Div.
ONETECH Corp.

Reviewed by: 
Y. K. Kwon / Director
EMC Div.
ONETECH Corp.



CONTENTS

	Page
1. VERIFICATION OF COMPLIANCE	3
2. GENERAL INFORMATION	4
2.1 PRODUCT DESCRIPTION	4
2.2 MODEL DIFFERENCES	4
2.3 RELATED SUBMITTAL(S) / GRANT(S)	4
2.4 TEST SYSTEM DETAILS	4
2.5 TEST METHODOLOGY	4
2.6 TEST FACILITY	4
3. SYSTEM TEST CONFIGURATION	5
3.1 JUSTIFICATION	5
3.2 EUT EXERCISE SOFTWARE	5
3.3 CABLE DESCRIPTION	5
3.4 NOISE SUPPRESSION PARTS ON CABLE	5
3.5 EQUIPMENT MODIFICATIONS	5
3.6 CONFIGURATION OF TEST SYSTEM	6
3.7 ANTENNA REQUIREMENT	6
4. PRELIMINARY TEST	6
4.1 AC POWER LINE CONDUCTED EMISSION TEST	6
4.2 RADIATED EMISSION TEST	6
5. FINAL RESULT OF MEASUREMENT	7
5.1 RADIATED EMISSION TEST (WITHIN THE PERMITTED 200KHZ BAND)	7
5.2 RADIATED EMISSION TEST (OUTSIDE OF THE SPECIFIED 200KHZ BAND)	8
5.3 BANDWIDTH OF THE OPERATING FREQUENCY	9
6. FIELD STRENGTH CALCULATION	12
7. LIST OF TEST EQUIPMENT	13



1. VERIFICATION OF COMPLIANCE

- APPLICANT : Humax Co., Ltd.
- ADDRESS : Humax Building, 212-1, Yubang-Dong, Yongin-City, Gyunggi-Do, 449-080, Korea
- CONTACT PERSON : Mr. Nam-Hoon, Baek / Engineer
- TELEPHONE NO : +82-31-600-6322
- BRAND NAME : SIRIUS SATELLITE RADIO
- FCC ID : O6ZS50-C1
- MODEL NO/NAME : S50-C1
- SERIAL NUMBER : N/A
- DATE : September 15, 2005

EQUIPMENT CLASS	DXX - Low Power Communication Device Transmitter
E.U.T. DESCRIPTION	Satellite Radio Receiver (Dock Unit) (FM Transmitter)
THIS REPORT CONCERNS	ORIGINAL GRANT
MEASUREMENT PROCEDURES	Chapter 7 and 13 of ANSI C63.4: 2003
TYPE OF EQUIPMENT TESTED	PRE-PRODUCTION
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	CERTIFICATION
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SECTION 15.239
MODIFICATIONS ON THE EQUIPMENT TO ACHIEVE COMPLIANCE	No
FINAL TEST WAS CONDUCTED ON	3 METER OPEN AREA TEST SITE

- The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.



2. GENERAL INFORMATION

2.1 Product Description

The Humax Co., Ltd., Model S50-C1 (referred to as the EUT in this report) is Satellite Radio Receiver (Dock Unit) that has the FM transmitter from 88.1 MHz to 107.9 MHz for audio signal of FM radio receiver. Product specification described herein was obtained from product data sheet or user's manual.

CHASSIS TYPE	Plastic
LIST OF EACH OSC. OR CRY. FREQ.(FREQ.>=1MHz)	7.6 MHz and 17 MHz
POWER REQUIREMENT	DC 12V from a car battery
TX FREQUENCY RANGE	88.1 MHz ~ 107.9 MHz (Step freq. : 0.2 MHz)
NUMBER OF LAYERS	6 Layers: Front Board, 8 Layers: Rear Board
EXTERNAL CONNECTOR	DC In, Antenna In, Audio Out, FM Out

2.2 Model Differences

- The difference(s) compared to the EUT is as follows: None

2.3 Related Submittal(s) / Grant(s)

- Original submittal only

2.4 Test System Details

The model numbers for all the equipments which were used in the tested system is:

Model	Manufacturer	FCC ID	Description	Connected to
S50-C1	Humax Co., Ltd.	O6ZS50-C1	Satellite Radio Receiver (Dock Unit)(EUT)	-
-	-	N/A	Car Battery	EUT
-	-	N/A	External Antenna	EUT

2.5 Test Methodology

The radiated testing was performed according to the procedures in chapter 7, 13 of ANSI C63.4: 2003 and performed at a distance of 3 meters from EUT to the antenna.

2.6 Test Facility

The open area test site and conducted measurement facilities are located on at 426-1 Daessangryung-Ri, Chowol-Eup, Kwangju-City, Kyunggi-Do, 464-080, Korea. Description details of test facilities were submitted to the Commission on April 04, 2003. (Registration Number: 340658)



3. SYSTEM TEST CONFIGURATION

3.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Front Board	Humax Co., Ltd.	XENA FRONT Board	N/A
Rear Board	Humax Co., Ltd.	XENA REAR Board	N/A

3.2 EUT exercise Software

The Model, S50-C1 is included a FM transmitter designed to operate on function in the 88.1 ~ 107.9 MHz. The EUT does not have an audio input port, so the internal 1 kHz modulation signal was transmitted with maximum audio level. 107.9 MHz was measured as the highest output power. Data from this channel was determined to be worst case.

3.3 Cable Description

Product Name	Power Cord Shielded (Y/N)	I/O cable Shielded (Y/N)	Length (M)
Satellite Radio Receiver (Dock Unit)(EUT)	N	-	1.8(P)
External Antenna	N/A	N	1.8(D)

* The marked "(D)" means the Data Cable and "(P)" means the Power Cable.

3.4 Noise Suppression Parts on Cable

Product Name	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
Satellite Radio Receiver (Dock Unit)(EUT)	N	N/A	Y	EUT END
External Antenna	N	N/A	N	N/A

3.5 Equipment Modifications

-. None



3.6 Configuration of Test System

Line Conducted Test: It needs not to test this requirement, because the power of the EUT supplies from a car battery.

Radiated Emission Test: Preliminary radiated emissions test were conducted using the procedure in ANSI C63.4: 2003 8.3.1.1 and 13.1.4.1 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 meter open area test site.

Occupied Bandwidth Measurement:

This measurement is performed with the antenna located close enough to give a full-scale deflection of the modulated carrier on the spectrum analyzer.

3.7 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

FM transmitter antenna of the EUT is fixed inside the EUT, no consideration of replacement by the user.

4. PRELIMINARY TEST

4.1 AC Power line Conducted Emission Test

During Preliminary Test, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
It is not need to test this requirement, because the power of the EUT is supplied from a car battery.	

4.2 Radiated Emission Test

During Preliminary Test, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
Transmit RF Signal continuously	X



5. FINAL RESULT OF MEASUREMENT

Preliminary test was done in normal operation mode. And the final measurement was selected for the maximized emission level

5.1 Radiated Emission Test (Within the permitted 200kHz band)

The following table shows the highest levels of radiated emission on both polarizations of horizontal and vertical.

Humidity Level : 45 % Temperature : 24 °C
 Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.239(b)
 Type of Test : Low Power Communication Device Transmitter
 Result : PASSED BY - 3.85 dB at 99.00 MHz

EUT : Satellite Radio Receiver (Dock Unit) Date: August 29, 2005
 Operating Condition : Transmit the RF signal.
 Distance : 3 Meter

Radiated Emission			Ant	Correction Factors		Total	Limit (dBuV/m)	Margin (dB)
Freq. (MHz)	Amp. (dBuV)	Detect Mode	Pol.	Ant. (dB/m)	Cable (dB)	Amp. (dBuV/m)		
88.10	33.92	Peak	H	7.92	1.74	43.58	48.00	-4.42
88.10	22.40	Peak	V	7.92	1.74	32.06	48.00	-15.94
99.00	32.29	Peak	H	9.96	1.90	44.15	48.00	-3.85
99.00	25.70	Peak	V	9.96	1.90	37.56	48.00	-10.44
107.90	30.28	Peak	H	11.27	1.90	43.45	48.00	-4.55
107.90	20.50	Peak	V	11.27	1.90	33.67	48.00	-14.33

Radiated Emission Tabulated Data

Remark: Because the frequency range of the EUT is more than 10 MHz, so three channels (near top, near middle and near bottom) were tested.

Average detector mode was not measured, because peak emission values were under average limit.

Tested by: Sue-Young, Lee/ Test Engineer



5.2 Radiated Emission Test (Outside of the specified 200kHz band)

The following table shows the highest levels of radiated emission on both polarizations of horizontal and vertical.

Humidity Level : 45 % Temperature : 24 °C
 Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.209(a)
 Type of Test : Low Power Communication Device Transmitter
 Result : PASSED BY -7.88 dB at 371.09 MHz

EUT : Satellite Radio Receiver (Dock Unit) Date: August 29, 2005
 Operating Condition : Transmit the RF signal.
 Frequency range : 30MHz – 1000MHz
 Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)
 Distance : 3 Meter
 Remark : Other emissions

Radiated Emission		Ant	Correction Factors		Total	FCC	
Freq. (MHz)	Amp. (dBuV)	Pol.	Ant. (dB/m)	Cable (dB)	Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
157.91	12.44	V	15.25	2.38	30.07	43.52	-13.45
258.69	16.83	V	17.27	3.43	37.53	46.02	-8.49
318.77	19.10	H	13.97	3.95	37.02	46.02	-9.00
371.09	19.05	H	14.81	4.28	38.14	46.02	-7.88
467.03	13.66	H	16.92	4.84	35.42	46.02	-10.60

Tested by: Sue-Young, Lee/ Test Engineer




5.3 Bandwidth of the operating frequency

Humidity Level : 45 % Temperature : 24 °C
Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.239 (a)
Result : PASSED

EUT : Satellite Radio Receiver (Dock Unit) Date: August 29, 2005
Operating Condition : Transmit the RF signal.
Minimum Resolution
Bandwidth : 10 kHz
Remark : Refer to test data in next page.

Tested by: Sue-Young, Lee/ Test Engineer

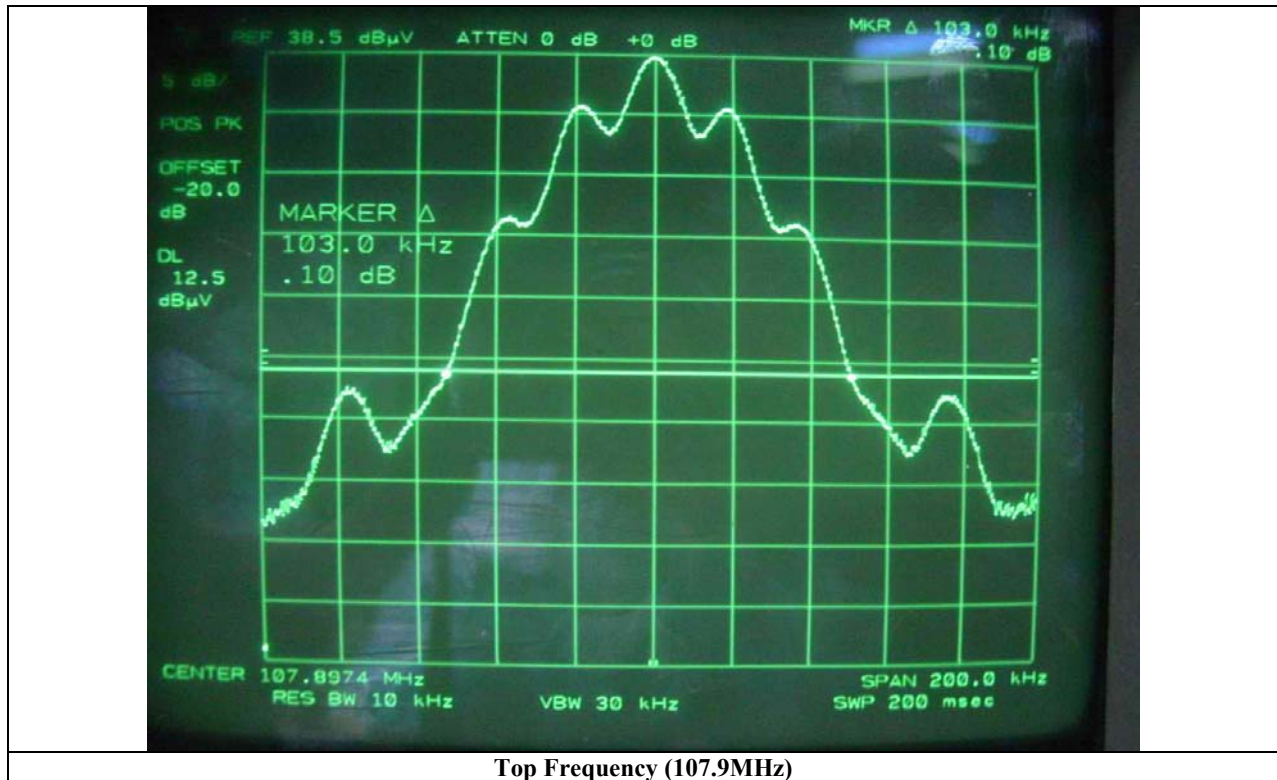

Top Frequency (107.9MHz)



6. FIELD STRENGTH CALCULATION

Meter readings are compared to the specification limit correcting for antenna and cable losses

+ Meter reading (dBuV)

+ Cable Loss (dB)

+ Antenna Factor (Loss) (dB/meter)

= Corrected Reading (dBuV/meter)

- Specification Limit (dBuV/meter)

= dB Relative to Spec (+/- dB)



7. LIST OF TEST EQUIPMENT

No.	EQUIPMENTS	MFR.	MODEL	SER. NO.	LAST CAL	DUE CAL	USE
1.	Test receiver	R/S	ESVS10	827864/005	DEC/04	12MONTH	■
2.	Test receiver	R/S	ESHS 10	834467/007	MAY/05	12MONTH	■
3.	Spectrum analyzer	HP	8566B	3407A08547	JUL/05	12MONTH	
4.	Spectrum analyzer	HP	8568B	3109A05456	APR/05	12MONTH	■
5.	RF preselector	HP	85685A	3107A01264	APR/05	12MONTH	■
6.	Quasi-Peak Adapter	HP	8574B	2811A01432	APR/05	12MONTH	■
7.	TRILOG Broadband Antenna	Schwarzbeck	VULB9163	VULB9163 166	APR/05	12MONTH	
8.	Biconical antenna	EMCO	3110	9003-1121	FEB/05	12MONTH	
		Schwarzbeck	VHA9103	91031852	JAN/05		■
9.	Log Periodic antenna	EMCO	3146	9001-2614	FEB/05	12MONTH	
		Schwarzbeck	9108-A(494)	62281001	FEB/05		■
10.	LISN	EMCO	3825/2	9109-1867	JUL/05	12MONTH	
				9109-1869	JUL/05		■
		Schwarzbeck	NSLK 8128	8128-216	JUN/05		■
11.	Position Controller	HD GmbH	HD100	N/A	N/A	N/A	■
12.	Turn Table	HD GmbH	DS420S	N/A	N/A	N/A	■
13.	Antenna Master	HD GmbH	MA240	N/A	N/A	N/A	■