



CTK Co., Ltd.  
The Prime Leader of Global Regulatory Compliance

## CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea  
Tel: +82-31-339-9970 Fax: +82-31-339-9855  
www.e-ctk.com

# TEST REPORT For FCC

## FCC Standards : FCC 47CFR part 15 subpart C

Test Report No. : CTK-2013-01208  
Date of Issue : July 26, 2013  
FCC ID : O8H-ELLIX40B  
Basic Model/Type No. : ELLIX4abc  
Variant Model/Type No. : SR85, TP-40, SI-300L, TAB-10  
Kind of Product : POS PRINTER  
Applicant : Shin Heung Precision Co., Ltd.  
Applicant Address : 222-2, Sinneung-Ri, Seowun-Myeon, Anseong-City, Gyeonggi-Do, 456-853, Korea  
Manufacturer : Shin Heung Precision Co., Ltd.  
Manufacturer Address : 222-2, Sinneung-Ri, Seowun-Myeon, Anseong-City, Gyeonggi-Do, 456-853,  
Contact Person : Byoungjo-Ha / Chief Engineer  
Telephone : +82-2-2101-9672  
Received Date : April 25, 2013  
Test period : Start : June 25, 2013 End : July 25, 2013

The test results presented in this report relate only to the object tested.

Tested by

*Y. T. Lee*

Young-taek Lee  
Test Engineer  
Date: July 26, 2013

Reviewed by

*Y. J. Park*

Young-Joon, Park  
Technical Manager  
Date: July 26, 2013



CTK Co., Ltd.  
The Prime Leader of Global Regulatory Compliance

# CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea  
Tel: +82-31-339-9970 Fax: +82-31-339-9855  
www.e-ctk.com

## REPORT REVISION HISTORY

Date	Revision	Page No
July 26, 2013	Issued (CTK-2013-01208)	All

***This report shall not be reproduced except in full, without the written approval of CTK Co., Ltd. This document may be altered or revised by CTK Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by CTK Co., Ltd. will constitute fraud and shall nullify the document.***



CTK Co., Ltd.  
The Prime Leader of Global Regulatory Compliance

# CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea  
Tel: +82-31-339-9970 Fax: +82-31-339-9855  
www.e-ctk.com

## TABLE OF CONTENTS

REPORT REVISION HISTORY .....	2
1.0 General Product Description .....	4
1.1 Tested Frequency.....	4
1.2 Tested Mode.....	4
1.3 Model Differences .....	5
1.4 Device Modifications.....	5
1.5 Peripheral Devices .....	5
1.6 Calibration Details of Equipment Used for Measurement .....	5
1.7 Test Facility.....	5
1.8 Laboratory Accreditations and Listings.....	6
2.0 Summary of tests .....	7
2.1 Transmitter Requirements.....	8
2.1.1 Carrier Frequency Separation .....	8
2.1.2 Number of Hopping Frequencies .....	10
2.1.4 Time of Occupancy (Dwell Time).....	15
2.1.5 Maximum peak Conducted Output Power .....	19
2.1.6 Band-edge .....	22
2.1.7 Field Strength of Emissions .....	28
2.1.8 AC Conducted Emissions.....	35
APPENDIX A – Test Equipment Used For Tests .....	38



## 1.0 General Product Description

Equipment model name	ELLIX4abc
Serial number	Prototype
EUT condition	Pre-production, not damaged
Antenna type	Internal antenna      Gain 3.384 dBi
Frequency Range	2402 MHz - 2480 MHz
RF power	13.229 dBm Peak Conducted
Type of Modulation	Frequency Hopping Spread Spectrum
Number of channels	79
Channel Spacing	1 MHz
Channel Access Protocol	Frequency Hopping
Type of Modulation	GFSK
Power Source	AC/DC ADAPTER INPUT : 100-240 Vac, 2.0 A OUTPUT : 24 Vdc, 2.5 A

### 1.1 Tested Frequency

	LOW	MID	HIGH
Frequency (MHz)	2402	2441	2480

### 1.2 Tested Mode

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Tested Ch	Modulation Technology	Modulation Type	Packet Type
Low, Mid, High	FHSS	GFSK	DH 5



### 1.3 Model Differences

- ELLIX4abc

a : means S/W Timer speed (0 : high speed, 2 : low speed, 5-9 : middle speed)

b : means communication interface (B : USB + Bluetooth)

c : means display ((L) : LCD)

- ELLIX4abc, SR85, TP-40, SI-300B, TAB-10 are identical to each other only except for model designations at requests of a buyer.

### 1.4 Device Modifications

The following modifications were necessary for compliance:

Not applicable

### 1.5 Peripheral Devices

Device	Manufacturer	Model No.	Serial No.
Notebook Computer	TOSHIBA CORPORATION	PSL48K-00L00K	Z7037782R
AC/DC ADAPTER	TOSHIBA CORPORATION	ADP-75SB	708W15Y01MK

### 1.6 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less. All test equipment calibrations are traceable to the Korea Research Institute of Standards and Science (KRISS), therefore, all test data recorded in this report is traceable to KRISS.

### 1.7 Test Facility

The measurement facility is located at 386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea.







CTK Co., Ltd.  
The Prime Leader of Global Regulatory Compliance

# CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea  
Tel: +82-31-339-9970 Fax: +82-31-339-9855  
www.e-ctk.com

## 1.8 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3 m & 10 m SAC and Conducted Test Site to perform FCC Part 15/18 measurements	 805871
JAPAN	VCCI	3 m & 10 m SAC and Conducted Test Site	 R-948, C-986 T-1843
KOREA	KCC	EMI (3 m & 10 m SAC and Conducted Test Site) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and Interruptions)	 No. 51, KR0025
International	KOLAS	EMC	



CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

# CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea  
Tel: +82-31-339-9970 Fax: +82-31-339-9855  
www.e-ctk.com

## 2.0 Summary of tests

FCC Part Section(s)	Parameter	Limit	Test Condition	Status (note 1)
15.247(a)	Carrier Frequency Separation	> 25 kHz	Conducted	C
15.247(a)	Number of Hopping Frequencies	> 15 hops		C
15.247(a)	20 dB Bandwidth	NA		C
15.247	Dwell Time	< 0.4 seconds		C
15.247(b)	Transmitter Output Power	< 0.125 Watts		C
15.247(d)	Conducted Spurious emission	> 20 dBc		C
15.247(d)	Band Edge	> 20 dBc		C
15.209	Field Strength of Harmonics	15.209(a)	Radiated	C
15.207	AC Conducted Emissions	15.207(a)	Line Conducted	C

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

Note 2: The data in this test report are traceable to the national or international standards.

The sample was tested according to the following specification:  
- FCC Part 15.247, ANSI C63.4-2003

The tests were performed according to the method of measurements prescribed in DA 00-705.

## 2.1 Transmitter Requirements

### 2.1.1 Carrier Frequency Separation

#### Test Location

RF Test Room

#### Test Procedures

The carrier frequency separation was measured with a spectrum analyzer connected to the antenna terminal, while EUT has its hopping function enabled. After the trace being stable, the reading value between the peaks of the adjacent channels using the marker-delta function was recorded as the measurement results.

The spectrum analyzer is set to:

Span = 3 MHz (wide enough to capture the peaks of two adjacent channels)

RBW = 30 kHz ( $\geq 1\%$  of the span) Sweep = auto

VBW = 30 kHz ( $\geq$  RBW) Detector function = peak

Trace = max hold




Figure 1 : Measurement setup for the carrier frequency separation

#### Limit

§15.247(a)(1) Frequency hopping system operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-third of 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

#### Test Results

**Test mode : GFSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)**

Channel	Adjacent Hopping Channel Separation (kHz)	Two-third of 20dB bandwidth (kHz)	Minimum Bandwidth (kHz)	Result
2441MHz	1000	575.27	25	Complies

See next pages for actual measured spectrum plots.






CTK Co., Ltd.  
The First Leader of Global Regulatory Compliance

# CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea  
Tel: +82-31-339-9970 Fax: +82-31-339-9855  
www.e-ctk.com

## Carrier Frequency Separation

Data Rate : GFSK

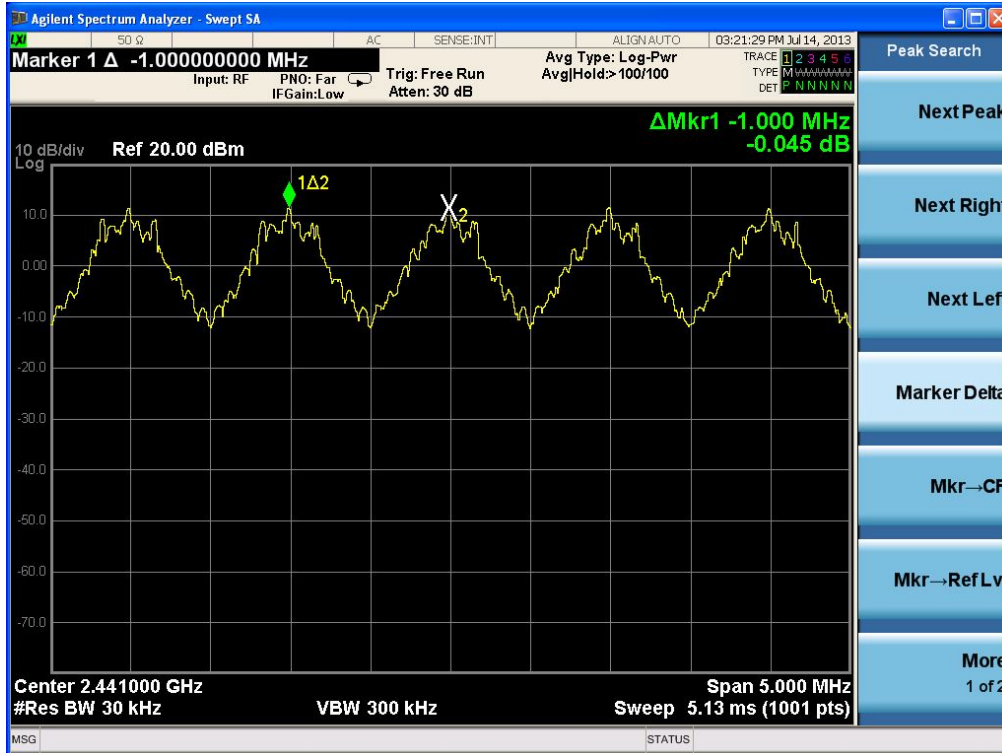

## 2.1.2 Number of Hopping Frequencies

### Test Location

RF Test Room


### Test Procedures

The number of hopping frequencies was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

The spectrum analyzer is set to:

Frequency range      1: Start = 2389.5 MHz, Stop = 2439.5 MHz  
                                 2: Start = 2439.5 MHz, Stop = 2489.5 MHz

Span = 50 MHz  
RBW = 300 kHz ( $\geq$  1% of the span)      Sweep = auto  
VBW = 300 kHz ( $\geq$  RBW)                      Detector function = peak  
Trace = max hold



### Limit

§15.247(a)(1)(iii) For frequency hopping system operating in the 2400-2483.5 MHz band shall use at least 15 hopping frequencies.

### Test Results

**Test mode : GFSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)**

Total number of Hopping Channels	Result
79	Complies

See next pages for actual measured spectrum plots.



CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

# CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

## Number of Hopping Frequencies(GFSK)



### 2.1.3 20 dB bandwidth

#### Test Location

RF Test Room

#### Test Procedures

The bandwidth at 20 dB below the highest inband spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels. After the trace being stable, Use the marker-to peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

Span = 2 MHz (approximately 2 or 3 times of the 20 dB bandwidth)


RBW = 30 kHz ( $\geq 1\%$  of the span)

Sweep = auto

VBW = 30 kHz ( $\geq$  RBW)

Detector function = peak

Trace = max hold



#### Limit

Limit : N/A

#### Test Results

**Test mode : GFSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)**

Frequency (MHz)	Channel Number.	Measured Bandwidth (MHz)	Result
2402	0	0.8600	Complies
2441	39	0.8629	Complies
2480	78	0.9201	Complies

See next pages for actual measured spectrum plots.





CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

# CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea  
Tel: +82-31-339-9970 Fax: +82-31-339-9855  
www.e-ctk.com

## 20 dB Bandwidth - GFSK

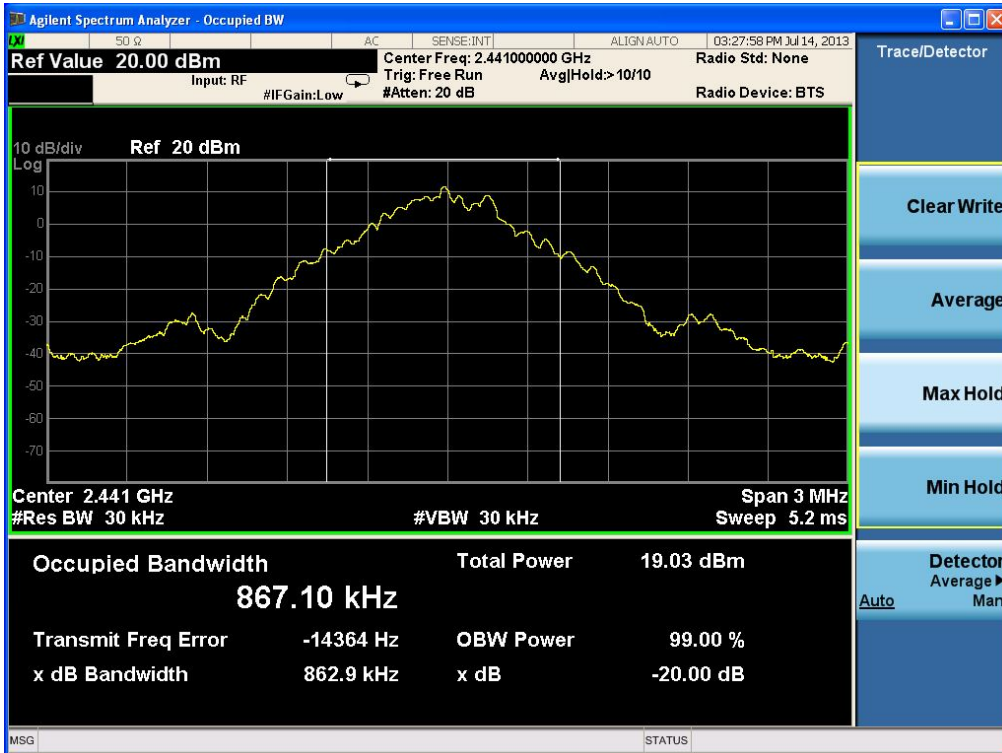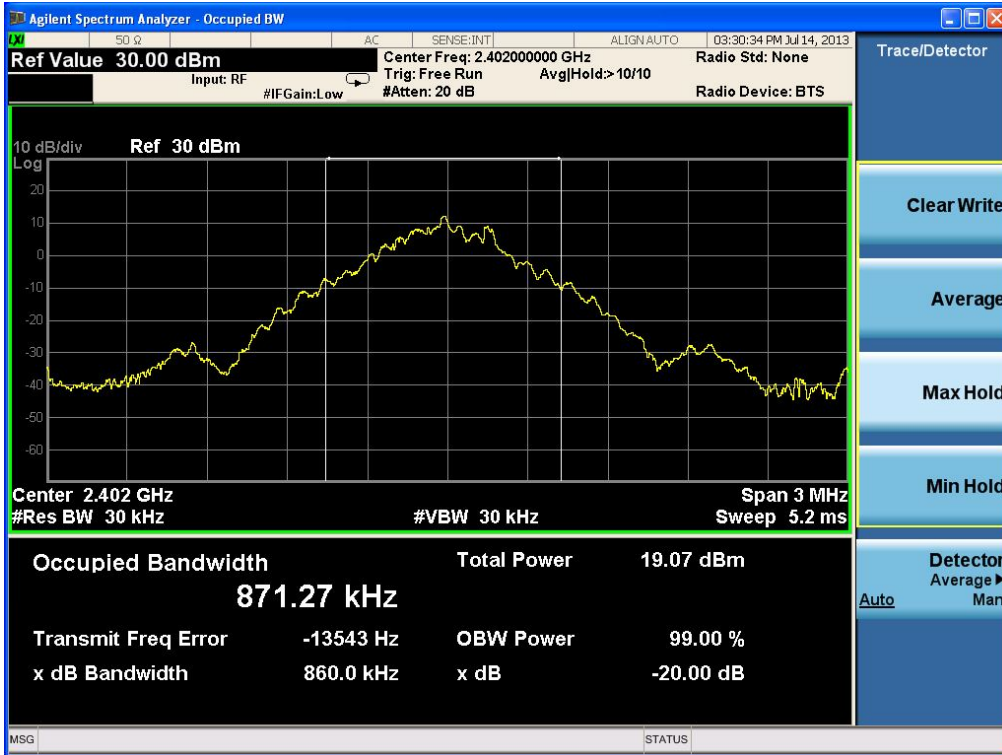




CTK Co., Ltd.  
The Prime Leader of Global Regulatory Compliance

# CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea  
Tel: +82-31-339-9970 Fax: +82-31-339-9855  
www.e-ctk.com

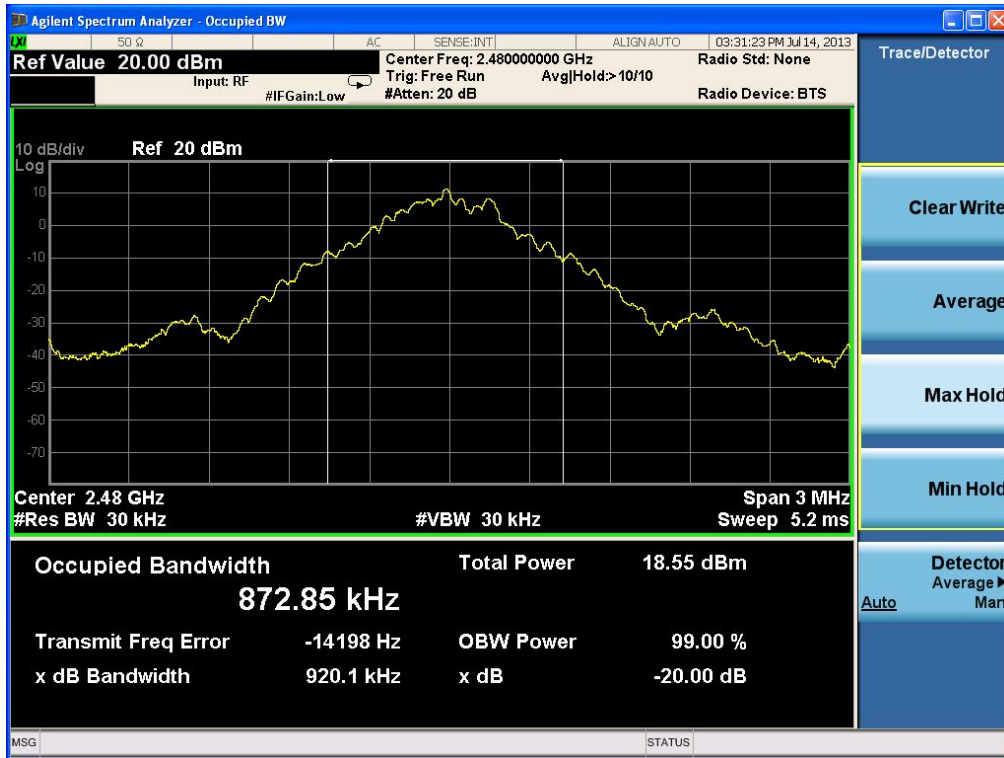

## 2.1.4 Time of Occupancy (Dwell Time)

### Test Location

RF Test Room

### Test Procedures

The dwell time was measured with a spectrum analyzer connected to the antenna terminal, while EUT has its hopping function enabled.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in test setup without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Adjust the center frequency of spectrum analyzer on any frequency be measured and set spectrum analyzer to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
4. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
5. Repeat above procedures until all frequencies measured were complete.
6. The ELLIX4abc has 3 type of payload, DH1, DH3, DH5. The hopping rate is 1600 per second.

The spectrum analyzer is set to:

Center frequency = the highest, middle, and the lowest channels

Span = zero


RBW = 1 MHz

Trace = max hold

VBW = 1 MHz ( $\geq$  RBW)

Detector function = peak

Sweep = as necessary to capture the entire dwell time per hopping channel



### Limit

§15.247(a)(1)(iii) For frequency hopping system operating in 2400-2483.5 MHz band, the average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.



## Test Results

Time of occupancy on the TX channel in 31.6 sec = time domain slot length × hop rate ÷ number of hop per channel × 31.6

### Test mode : GFSK

Channel Frequency (MHz)	Packet Type	Dwell Time (ms)	Test Results	
			Time of occupancy on the TX channel in 31.6sec (ms)	Result
2441	DH 1	0.465	148.80	Complies
	DH 3	1.723	275.68	Complies
	DH 5	2.973	317.12	Complies

DH1 Dwell time =  $0.465 \text{ ms} \times (1600 \div 2) \div 79 \times 31.6 = 148.80 \text{ ms}$

DH3 Dwell time =  $1.723 \text{ ms} \times (1600 \div 4) \div 79 \times 31.6 = 275.68 \text{ ms}$

DH5 Dwell time =  $2.973 \text{ ms} \times (1600 \div 6) \div 79 \times 31.6 = 317.12 \text{ ms}$

See next pages for actual measured spectrum plots.





CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance


# CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea


Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

## Time of Occupancy for PACKET Type DH1(GFSK)

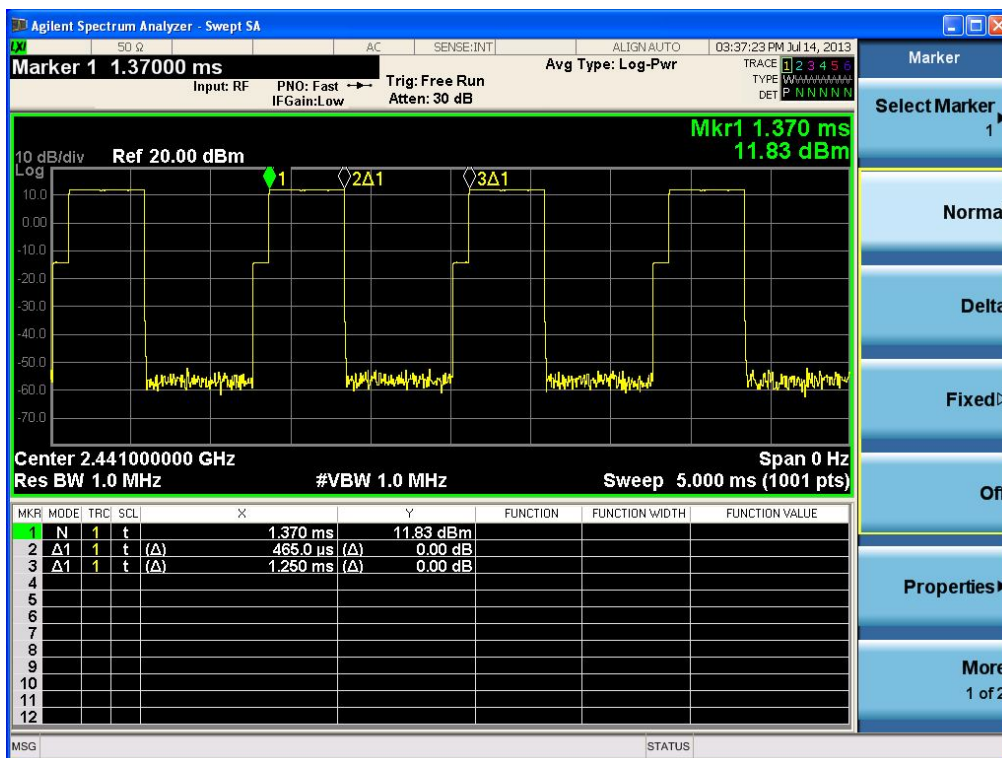

## Time of Occupancy for PACKET Type DH3(GFSK)

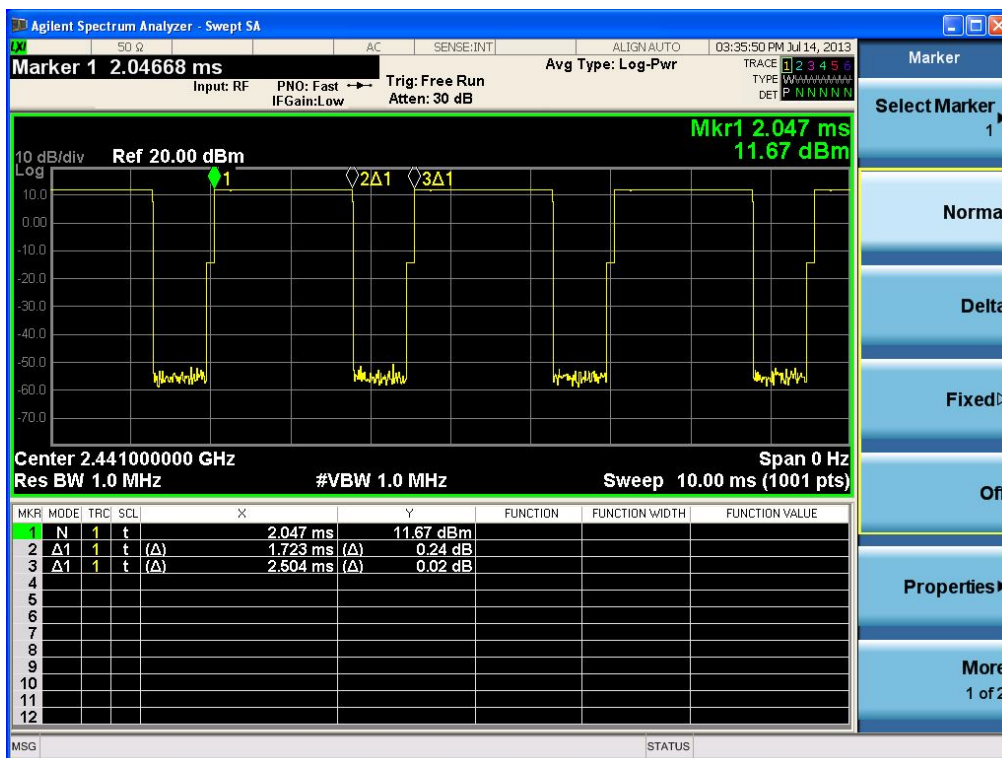




CTK Co., Ltd.  
The First Leader of Global Regulatory Compliance

# CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea  
Tel: +82-31-339-9970 Fax: +82-31-339-9855  
www.e-ctk.com

## Time of Occupancy for PACKET Type DH5(GFSK)

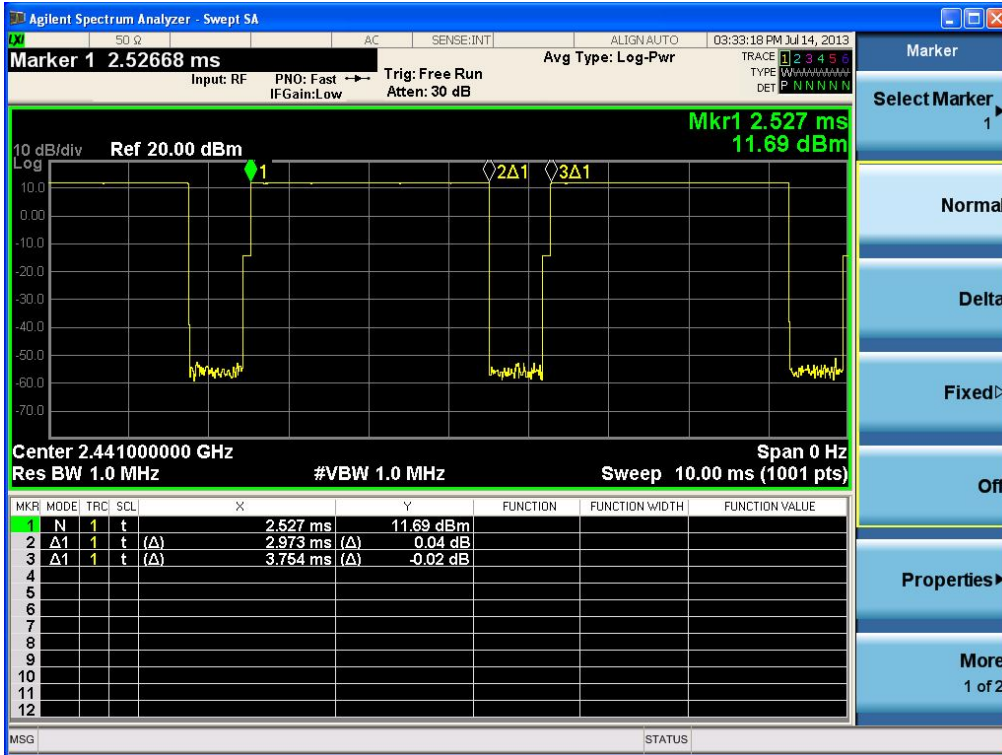

## 2.1.5 Maximum peak Conducted Output Power

### Test Location

RF Test Room

### Test Procedures

The maximum peak conducted output power was measured with a spectrum analyzer connected to the antenna terminal, while EUT has its hopping function disabled at the highest, middle and the lowest available channels.

The spectrum analyzer is set to:

Center frequency = the highest, middle, and the lowest channels

Span = 5 MHz (approximately 5 times of the 20 dB bandwidth)


RBW = 1 MHz (greater than the 20 dB bandwidth of the emission being measured)

VBW = 1 MHz ( $\geq$  RBW)

Detector function = peak

Trace = max hold

Sweep = auto



### Note:

The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.

The RF output of EUT was connected to the spectrum analyzer by low loss cable.

### Limit

§5.247(b)(1) The Maximum Peak Output Power Measurement is 0.125 Watts for frequency hopping system operating in 2400-2483.5 MHz employing at least 15 Hopping channels.

### Test Results

**Test mode : GPSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)**

Frequency (MHz)	Channel No.	Peak output power(dBm)	Peak output power(mW)	Result
2402	0	13.229	21.033	Complies
2441	39	12.823	19.156	Complies
2480	78	12.448	17.571	Complies

See next pages for actual measured spectrum plots.




CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

# CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea  
Tel: +82-31-339-9970 Fax: +82-31-339-9855  
www.e-ctk.com

## Maximum peak Conducted Output Power - GFSK

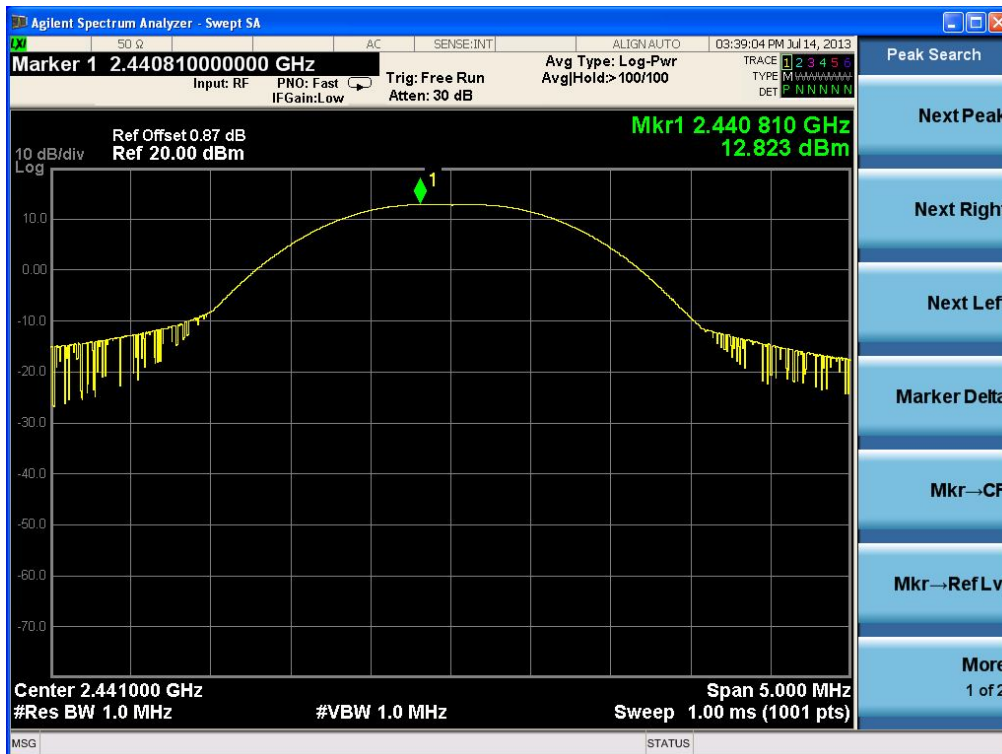




CTK Co., Ltd.  
The Prime Leader of Global Regulatory Compliance

# CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

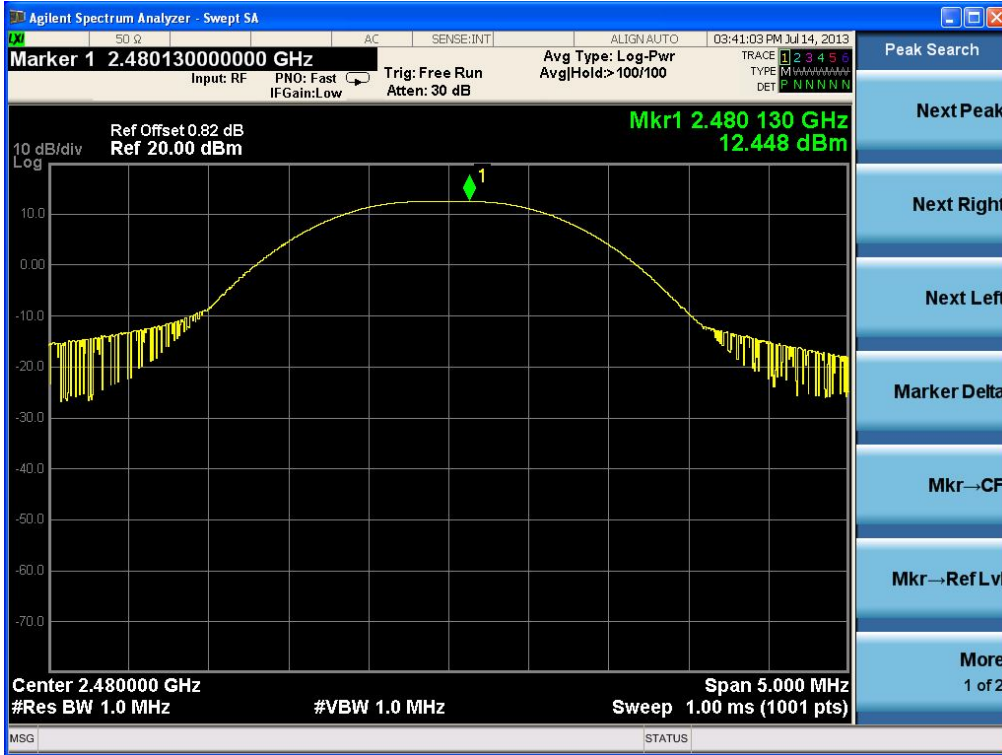

## 2.1.6 Band-edge

### Test Location

RF Test Room

### Test Procedures

The bandwidth at 20 dB down from the highest inband spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT has its hopping function disabled at the highest, middle and the lowest available channels.

The spectrum analyzer is set to:

Center frequency = the highest, middle, and the lowest channels

RBW = 100 kHz


VBW = 100 kHz ( $\geq$  RBW)

Span = 10 MHz

Trace = max hold

Detector function = peak

Sweep = auto



### Limit

> 20 dBc

### Test Results

All conducted emission in any 100 kHz bandwidth outside of the spectrum band was at least 20 dB lower than the highest level of the inband spectral density. Therefore the applying equipment meets the requirement.

See next pages for actual measured spectrum plots.





CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

# CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea  
Tel: +82-31-339-9970 Fax: +82-31-339-9855  
www.e-ctk.com

## Band - edge (with Hopping) - GFSK

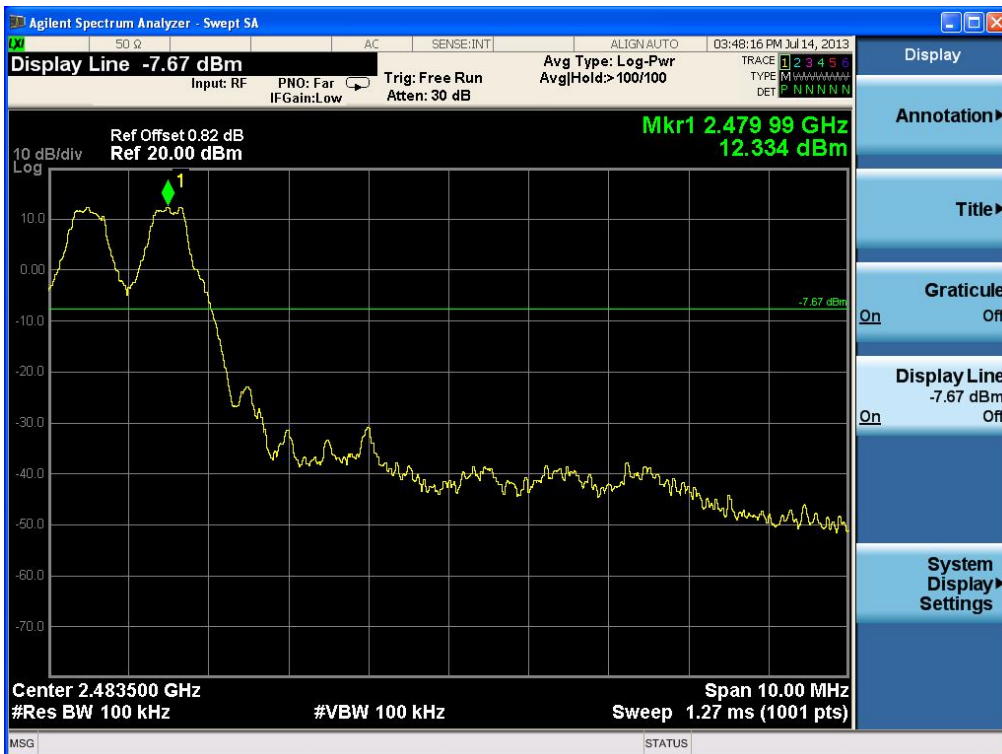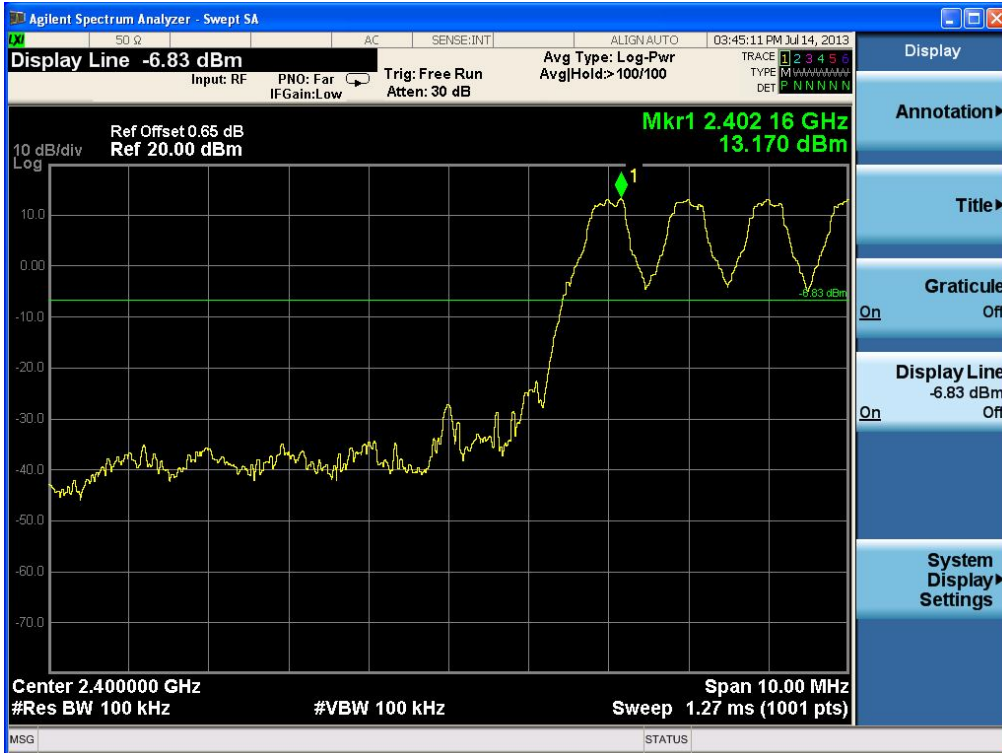



CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance


# CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

## Band - edge (without Hopping) - GFSK

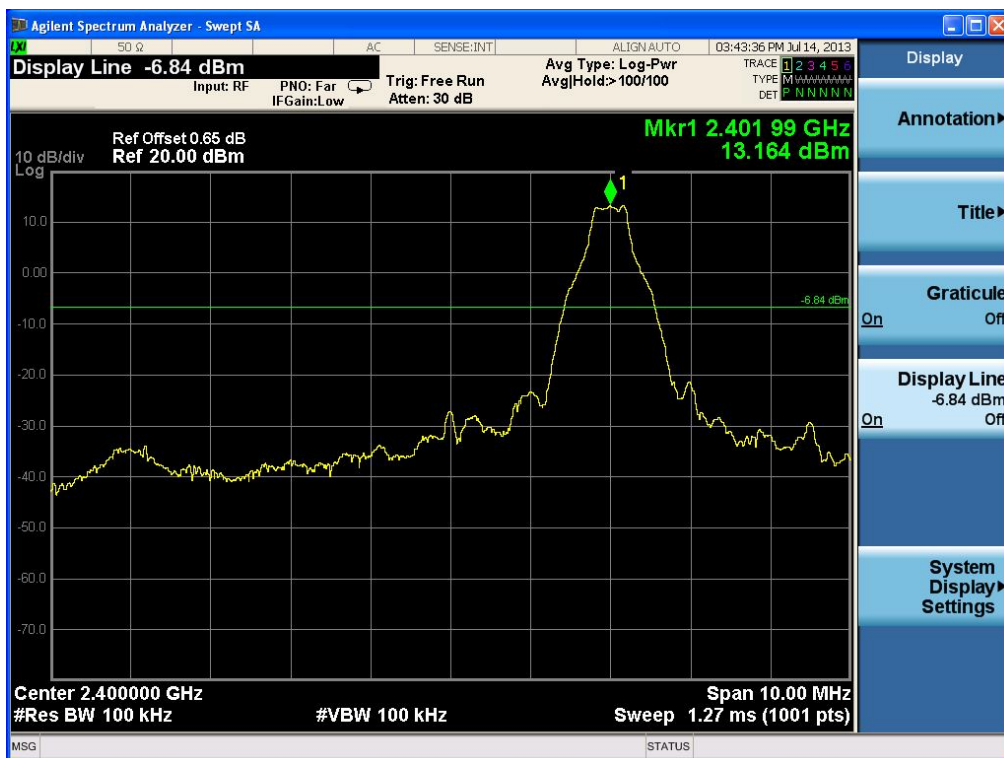






CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

# CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea  
Tel: +82-31-339-9970 Fax: +82-31-339-9855  
www.e-ctk.com

## Band – edge (at 20 dB blow) – Low channel Frequency Range = 30 MHz ~ 10<sup>th</sup> harmonic (Test mode : GFSK)

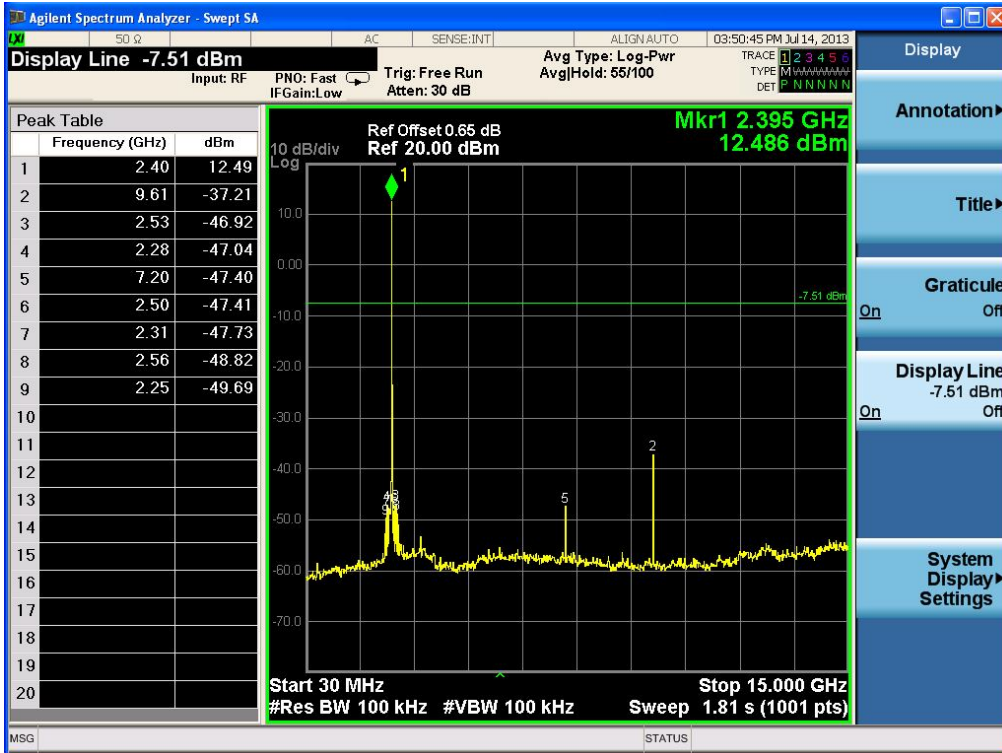







CTK Co., Ltd.  
The Prime Leader of Global Regulatory Compliance

# CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

## 2.1.7 Field Strength of Emissions

### Test Location

- 10 m SAC (test distance :  10 m,  3 m)  
 3 m SAC (test distance : 3 m)

### Test Procedures

- 1) In the frequency range of 9 kHz to 30 MHz, magnetic field is measured with Loop Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- 2) In the frequency range above 30 MHz, Bi-Log Test Antenna(30 MHz to 1 GHz) and Horn Test Antenna(above 1 GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is carried from 1m to 4m above the ground to determine the maximum value of the field strength. The emissions levels at both horizontal and vertical polarizations should be tested.

The spectrum analyzer is set to:

Frequency Range = 9 kHz ~ 25 GHz (2.4 GHz 10<sup>th</sup> harmonic)

RBW = 1 MHz for  $f \geq 1$  GHz, 100 kHz for  $f < 1$  GHz, 9 kHz for  $f < 30$  MHz

VBW  $\geq$  RBW

Sweep = auto

### Limit

#### - 15.209(a)

Frequency(MHz)	Field Strength uV/m@3m	Field Strength dBuV/m@3m	Deasurement Distance (meters)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	30
1.705-30	30	-	30
30-88	100**	40	3
88-216	150**	43.5	3
216-960	200**	46	3
Above 960	500	54	3


\*\* Except as provided in 15.209(g).fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72MHz, 76-88MHz, 174-216MHz, 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g.15.231 and 15.241.

Note :


- 1) For above 1 GHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.
- 2) For above 1 GHz, limit field strength of harmonics : 54 dBuV/m@3m (AV) and 74 dBuV/m@3m (PK)

**Test Setup:**


1) For field strength of emissions from 9 kHz to 30 MHz

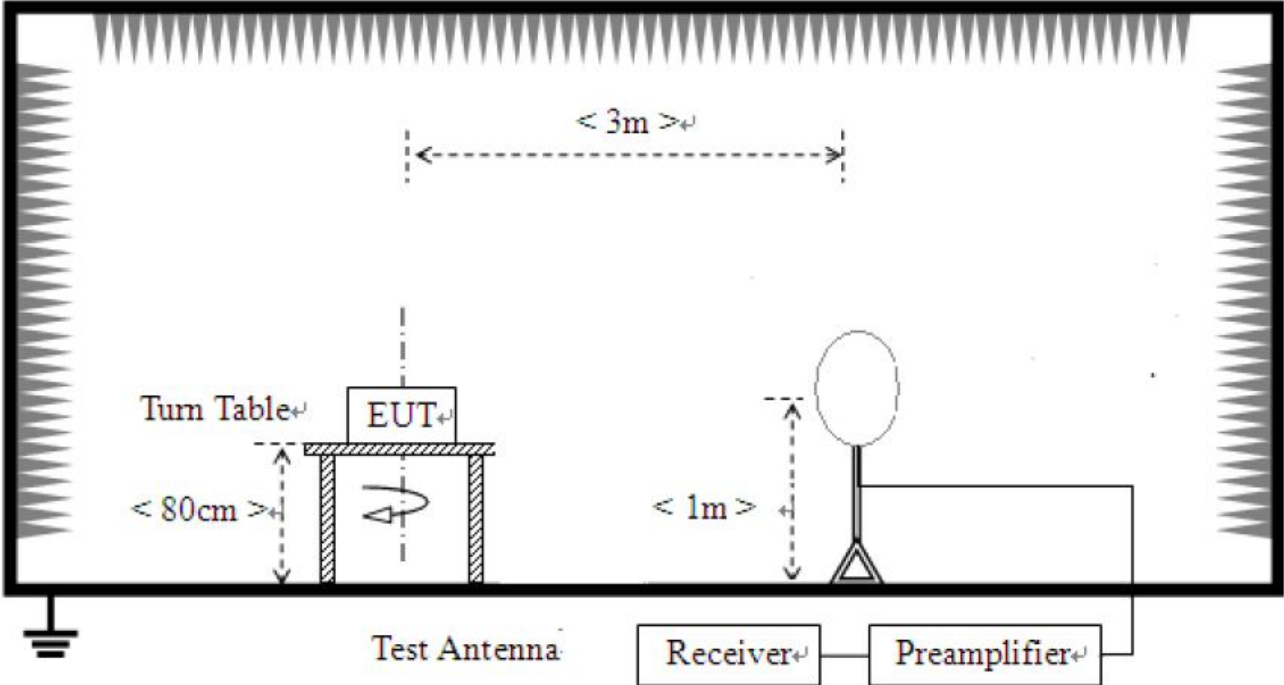

2) For field strength of emissions from 30 MHz to 1 GHz

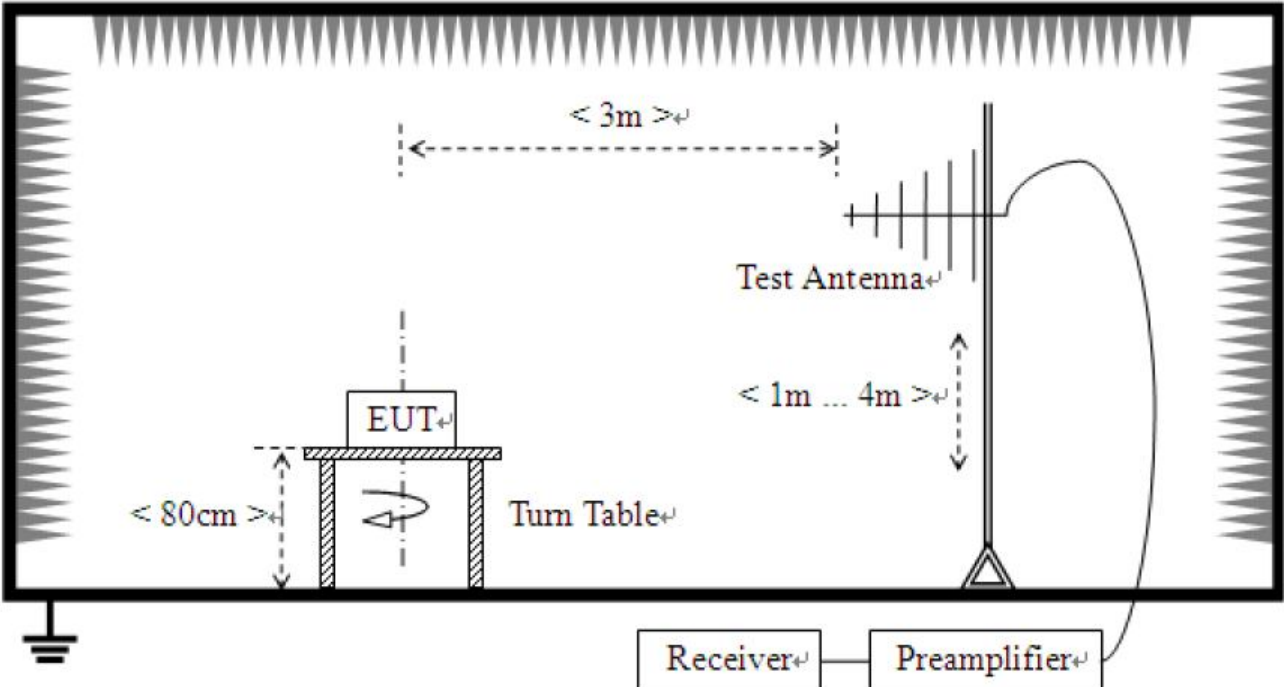

3) For field strength of emissions above 1 GHz

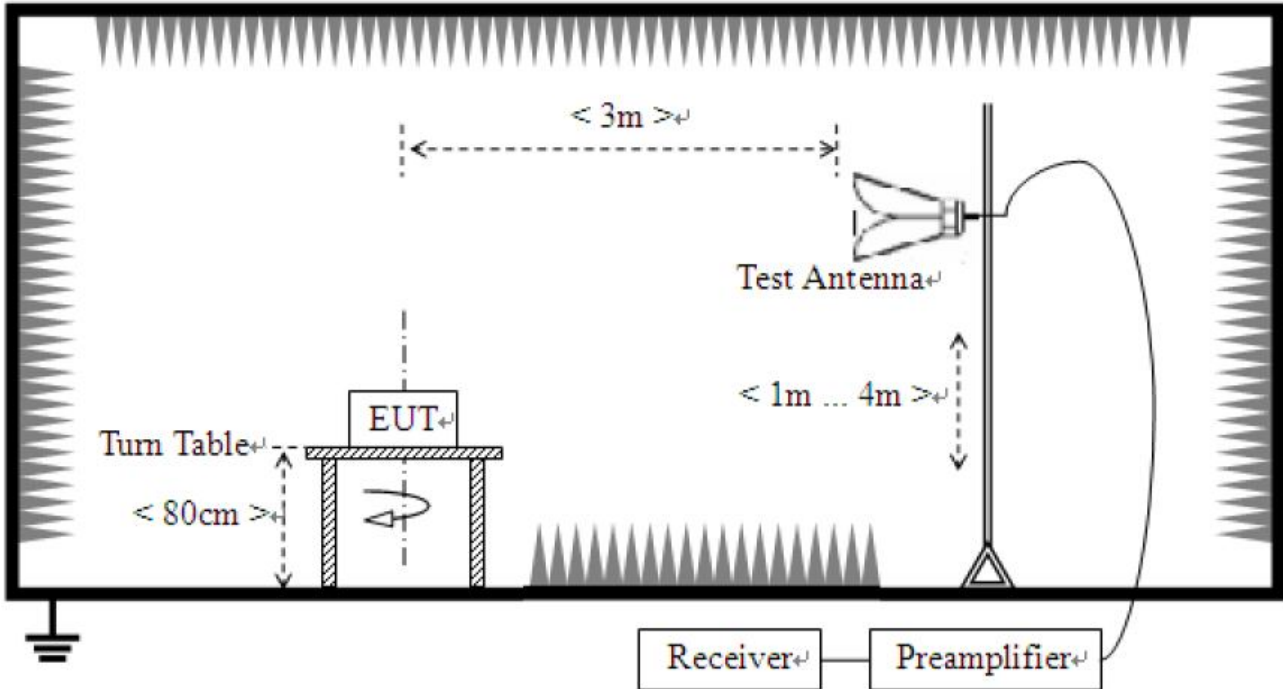

**Test Results**

**1) 9 kHz to 30 MHz**

EUT	POS PRINTER	Measurement Detail	
Model	ELLIX4abc	Frequency Range	9 kHz – 30 MHz
Test mode	GFSK	Detector function	Quasi-Peak

The requirements are:

Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
-	-	-	See note

**Note :**

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB)





CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

# CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

### 3) above 1 GHz

**Test mode : GFSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)**

EUT	POS PRINTER	Measurement Detail	
Model	ELLIX4abc	Frequency Range	1-25GHz
Channel	Channel 0	Detector function	Peak
Test Mode	GFSK		

#### Remarks

We have tested three mode (X, Y, Z). The worst mode (X axis) for final test.

The requirements are:

Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
4804	47.2 / 54.3	6.8 / 19.7	Average / Peak

#### Test Data

Frequency [MHz]	Reading [dBuV/m] AV / Peak	Pol.	Height [m]	Correction Factor	Limits [dBuV/m] AV / Peak	Result [dBuV/m] AV / Peak	Margin [dB] AV / Peak
				Antenna + Amp. Gain + Cable			
4804.00	34.5 : 41.6	V	1.0	12.7	54.0 : 74.0	47.2 : 54.3	6.8 : 19.7

#### Restricted band edge test data

Measured frequency range : 2310-2390 MHz, 2483.5-2500 MHz

Frequency [MHz]	Reading [dBuV/m] AV / Peak	Pol.	Height [m]	Correction Factor	Limits [dBuV/m] AV / Peak	Result [dBuV/m] AV / Peak	Margin [dB] AV / Peak
				Antenna + Amp. Gain + Cable			
2390.00	30.3 : 53.6	V	1.0	5.4	54.0 : 74.0	35.7 : 59.0	18.3 : 15.0





CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

# CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

## Test mode : GFSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

EUT	POS PRINTER	Measurement Detail	
Model	ELLIX4abc	Frequency Range	1-25GHz
Channel	Channel 39	Detector function	Peak
Test Mode	GFSK		

### Remarks

We have tested three mode (X, Y, Z). The worst mode (X axis) for final test.

The requirements are:

Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
4882	48.0 / 54.6	6.0 / 19.4	Average / Peak

### Test Data

Frequency [MHz]	Reading [dBuV/m] AV / Peak	Pol.	Height [m]	Correction Factor			Limits [dBuV/m] AV / Peak		Result [dBuV/m] AV / Peak		Margin [dB] AV / Peak	
				Antenna	Amp. Gain	Cable						
4882.00	35.1 : 41.7	V	1.0		12.9		54.0 : 74.0	48.0 : 54.6	6.0 : 19.4			

### Restricted band edge test data

Measured frequency range : 2310-2390 MHz, 2483.5-2500 MHz

Frequency [MHz]	Reading [dBuV/m]	Pol.	Height [m]	Correction Factor			Limits [dBuV/m]	Result [dBuV/m]	Margin [dB]
				Antenna	Amp. Gain	Cable			
No emissions were detected at a level greater than 20dB below limit.									



CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

# CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

## Test mode : GFSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

EUT	POS PRINTER	Measurement Detail	
Model	ELLIX4abc	Frequency Range	1-25GHz
Channel	Channel 78	Detector function	Peak
Test Mode	GFSK		

### Remarks

We have tested three mode (X, Y, Z). The worst mode (X axis) for final test.

The requirements are:

Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
4960	50.5 / 56.5	3.5 / 17.5	Average / Peak

### Test Data

Frequency [MHz]	Reading [dBuV/m] AV / Peak	Pol.	Height [m]	Correction Factor	Limits [dBuV/m] AV / Peak	Result [dBuV/m] AV / Peak	Margin [dB] AV / Peak
				Antenna + Amp. Gain + Cable			
4960.00	37.4 : 43.4	V	1.0	13.1	54.0 : 74.0	50.5 : 56.5	3.5 : 17.5

### Restricted band edge test data

Measured frequency range : 2310-2390 MHz, 2483.5-2500 MHz

Frequency [MHz]	Reading [dBuV/m] AV / Peak	Pol.	Height [m]	Correction Factor	Limits [dBuV/m] AV / Peak	Result [dBuV/m] AV / Peak	Margin [dB] AV / Peak
				Antenna + Amp. Gain + Cable			
2483.50	31.8 : 46.7	V	1.0	5.4	54.0 : 74.0	37.2 : 52.1	16.8 : 21.9



## 2.1.8 AC Conducted Emissions

### Test Location

Shielded Room

### Frequency Range of Measurement

150 kHz to 30 MHz

### Instrument Settings

IF Band Width: 9 kHz

### Test Procedures

The EUT was placed on a non-metallic table 0.8m above the metallic, grounded floor and 0.4m from the reference ground plane wall. The distance to other metallic surfaces was at least 0.8m.

Amplitude measurements were performed with a quasi-peak detector and an average detector.

### Limit

#### - 15.207(a)

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56*	56 to 46*
0.5 ~ 5	56	46
5 ~ 30	60	50

\* Decreases with the logarithm of the frequency.

### Test Results

The requirements are:

Complies

**Test mode : Hopping(GFSK), CFG PKT Packet Type : 15,  
Packet Size : 339(DH5), Hopping mode**

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
0.721 500	34.8	11.2	Average



CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

# CTK Co., Ltd.


386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

## Test Data

[HOT]

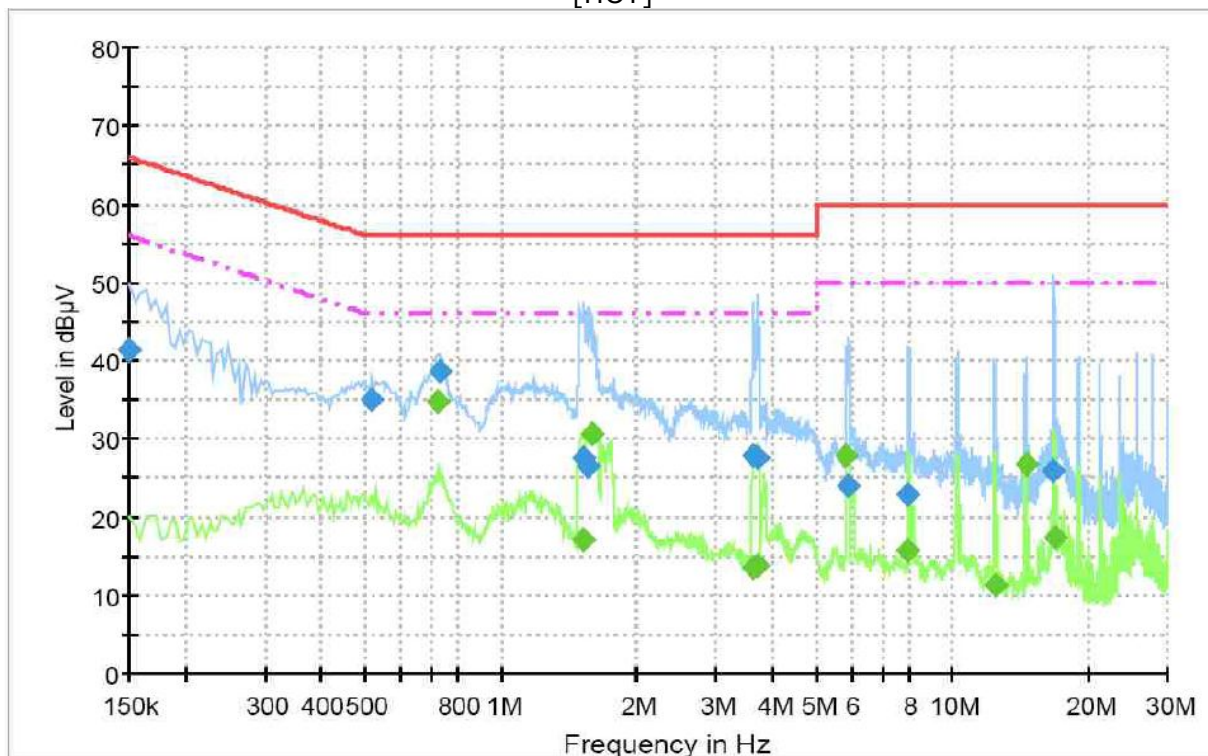

### Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	41.4	1000.0	9.000	On	L1	9.8	24.6	66.0
0.519000	35.0	1000.0	9.000	On	L1	10.1	21.0	56.0
0.730500	38.6	1000.0	9.000	On	L1	10.0	17.4	56.0
1.522500	27.7	1000.0	9.000	On	L1	9.8	28.3	56.0
1.554000	26.4	1000.0	9.000	On	L1	9.8	29.6	56.0
3.601500	28.0	1000.0	9.000	On	L1	9.7	28.0	56.0
3.705000	27.5	1000.0	9.000	On	L1	9.7	28.5	56.0
5.901000	24.1	1000.0	9.000	On	L1	9.7	35.9	60.0
7.998000	23.0	1000.0	9.000	On	L1	9.8	37.0	60.0
16.804500	25.9	1000.0	9.000	On	L1	9.8	34.1	60.0

### Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.721500	34.8	1000.0	9.000	On	L1	10.0	11.2	46.0
1.518000	17.2	1000.0	9.000	On	L1	9.8	28.8	46.0
1.599000	30.5	1000.0	9.000	On	L1	9.8	15.5	46.0
3.601500	13.4	1000.0	9.000	On	L1	9.7	32.6	46.0
3.691500	13.8	1000.0	9.000	On	L1	9.7	32.2	46.0
5.824500	27.8	1000.0	9.000	On	L1	9.7	22.2	50.0
7.998000	15.7	1000.0	9.000	On	L1	9.8	34.3	50.0
12.462000	11.2	1000.0	9.000	On	L1	9.8	38.8	50.0
14.622000	26.6	1000.0	9.000	On	L1	9.8	23.4	50.0
16.876500	17.5	1000.0	9.000	On	L1	9.8	32.5	50.0



CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance


# CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

## [NEUTRAL]

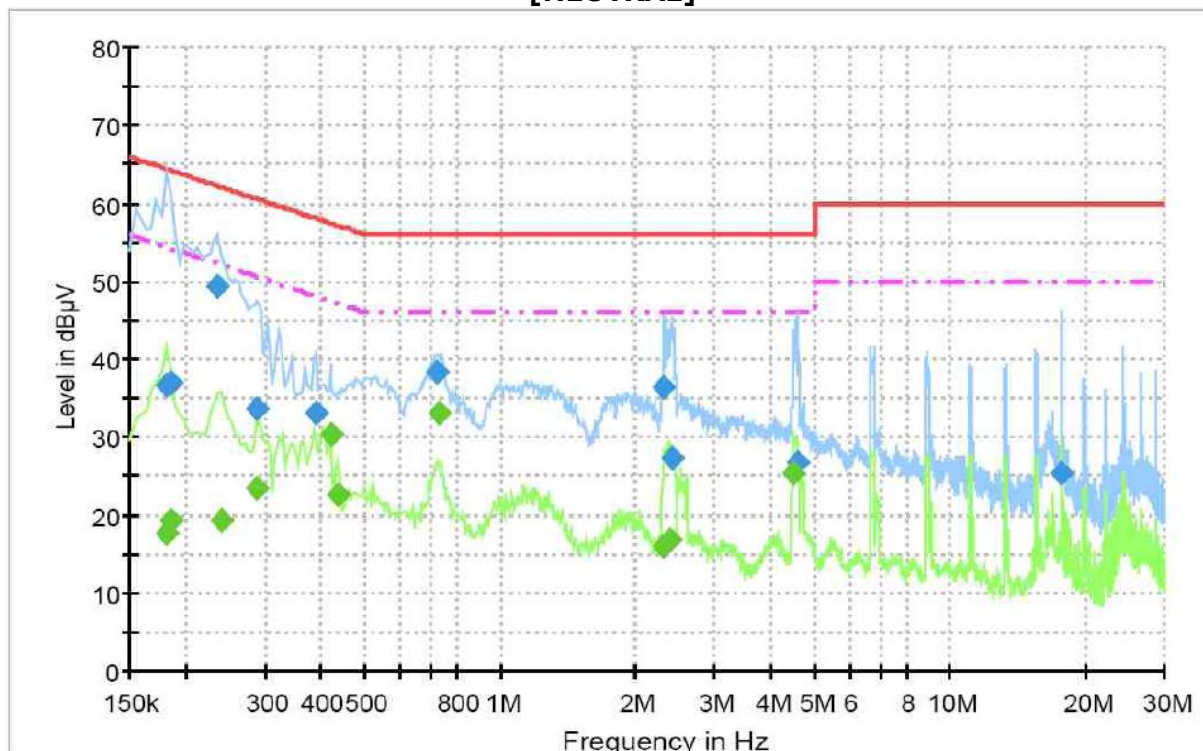

### Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.181500	36.8	1000.0	9.000	On	N	10.1	27.7	64.4
0.186000	37.0	1000.0	9.000	On	N	10.0	27.2	64.2
0.235500	49.3	1000.0	9.000	On	N	10.0	13.0	62.3
0.289500	33.7	1000.0	9.000	On	N	10.0	26.8	60.5
0.388500	33.1	1000.0	9.000	On	N	10.1	25.0	58.1
0.726000	38.4	1000.0	9.000	On	N	10.0	17.6	56.0
2.319000	36.4	1000.0	9.000	On	N	9.8	19.6	56.0
2.413500	27.2	1000.0	9.000	On	N	9.8	28.8	56.0
4.560000	26.7	1000.0	9.000	On	N	9.7	29.3	56.0
17.614500	25.3	1000.0	9.000	On	N	10.0	34.7	60.0

### Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.181500	17.7	1000.0	9.000	On	N	10.1	36.7	54.4
0.186000	19.2	1000.0	9.000	On	N	10.0	35.0	54.2
0.240000	19.3	1000.0	9.000	On	N	10.0	32.8	52.1
0.289500	23.5	1000.0	9.000	On	N	10.0	27.1	50.5
0.420000	30.3	1000.0	9.000	On	N	10.1	17.2	47.4
0.438000	22.6	1000.0	9.000	On	N	10.1	24.5	47.1
0.730500	33.1	1000.0	9.000	On	N	10.0	12.9	46.0
2.319000	16.1	1000.0	9.000	On	N	9.8	29.9	46.0
2.395500	16.7	1000.0	9.000	On	N	9.8	29.3	46.0
4.506000	25.3	1000.0	9.000	On	N	9.7	20.7	46.0



CTK Co., Ltd.  
The Prime Leader of Global Regulatory Compliance

# CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

## APPENDIX A – Test Equipment Used For Tests

	Name of Equipment	Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date
1	Signal Analyzer	Agilent	N9020A	MY48011598	2012-11-08	2013-11-08
2	EMI Test Receiver	Rohde & Schwarz	ESCI7	100814	2012-12-14	2013-12-14
3	EMI Test Receiver	Rohde & Schwarz	ESCI7	100816	2012-12-14	2013-12-14
4	EMI Test Receiver	Rohde & Schwarz	ESU40	100336	2013-06-27	2014-06-27
5	Trilog Broadband Antenna	SCHWARZBECK	VULB 9161 SE	9161-4133	2012-06-11	2014-06-11
6	Horn Antenna	ETS-Lindgren	3115	00078895	2013-02-28	2015-02-28
7	DOUBLE RIDGE HORN ANTENNA	ETS-Lindgren	3116	00062916	2013-03-20	2015-03-20
8	Active Loop Antenna	SCHWARZBECK	FMZB 1513	1513-125	2012-06-06	2014-06-06
9	Attenuator	Rohde & Schwarz	DNF	272.4110.50	2012-11-09	2013-11-09
10	PREAMPLIFIER	Agilent	8449B	3008A02307	2012-11-09	2013-11-09
11	AMPLIFIER	Sonoma Instrument Co.	310	291721	2013-03-21	2014-03-21
12	LISN	Rohde & Schwarz	ENV216	101235	2012-08-06	2013-08-06
13	LISN	Rohde & Schwarz	ENV216	101236	2012-08-06	2013-08-06
14	Band Reject Filter	Wainwright Instruments GmbH	WRCGV 2400/2483- 2375/2505- 50/10EE	2	2012-09-11	2013-09-11
15	Signal Generator	Rohde & Schwarz	SMB100A	175528	2012-10-08	2013-10-08