

FCC RADIO TEST REPORT

according to

47 CFR FCC Part 15 Subpart C § 15.247

Equipment : 3Com® AirConnect 9550 11n 2.4+5GHz PoE Access Point
Model No. : WL-605, SS-300-AT
Brand Name : 3Com, Airtight
Filing Type : New Application
Applicant : 3Com Corporation
350 Campus Drive, Marlborough, MA 01752-3064, USA
FCC ID : O9C-WL605
Manufacturer : DONG GUAN G-COM COMPUTER CO., LTD
1st Row Yin Shan Rd., Yin Hwu Industrial Area, Qingxi
Town, DongGuan City, Guang Dong, China
Received Date : May 01, 2008
Final Test Date : May 31, 2008

Statement

Test result included is only for the 802.11n 2.4G and 5G (5725 ~ 5850MHz) and Panel Antenna (3CWE596) of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



SPORTON International Inc.

6F, No. 106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

Table of Contents

1 SUMMARY OF THE TEST RESULT 2

2 GENERAL INFORMATION..... 3

2.1 Product Details 3

2.2 Accessories 3

2.3 Table for Filed Antenna 4

2.4 Table for Carrier Frequencies 7

2.5 Table for Test Modes 8

2.6 Table for Testing Locations 9

2.7 Table for Supporting Units..... 9

2.8 Table for Parameters of Test Software Setting 10

2.9 EUT Operation during Test 11

2.10 Test Configuration 11

3 TEST RESULT 13

3.1 AC Power Line Conducted Emissions Measurement..... 13

3.2 Maximum Conducted Output Power Measurement 21

3.3 Power Spectral Density Measurement 27

3.4 6dB Spectrum Bandwidth Measurement..... 44

3.5 Radiated Emissions Measurement..... 61

3.6 Band Edge Emissions Measurement 115

3.7 Antenna Requirements..... 128

4 LIST OF MEASURING EQUIPMENTS 129

5 TEST LOCATION..... 131

6 TAF CERTIFICATE OF ACCREDITATION 132

APPENDIX A. MAXIMUM PERMISSIBLE EXPOSURE..... A1 ~ A3

APPENDIX B. TEST PHOTOS B1 ~ B6

APPENDIX C. PHOTOGRAPHS OF EUT C1 ~ C39

CERTIFICATE OF COMPLIANCE

according to

47 CFR FCC Part 15 Subpart C § 15.247

Equipment : **3Com® AirConnect 9550 11n 2.4+5GHz PoE Access Point**
Model No. : WL-605, SS-300-AT
Brand Name : 3Com, Airtight
Applicant : **3Com Corporation**
350 Campus Drive, Marlborough, MA 01752-3064, USA

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on May 01, 2008 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.



Wayne Hsu

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

1 SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
3.1	15.207	AC Power Line Conducted Emissions	Complies	8.22 dB
3.2	15.247(b)(3)	Maximum Conducted Output Power	Complies	17.44 dB
3.3	15.247(e)	Power Spectral Density	Complies	14.09 dB
3.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
3.5	15.247(d)	Radiated Emissions	Complies	1.20 dB
3.6	15.247(d)	Band Edge Emissions	Complies	1.15 dB
3.7	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Maximum Peak Conducted Output Power	±0.8dB	Confidence levels of 95%
Power Spectral Density	±0.5dB	Confidence levels of 95%
6dB Spectrum Bandwidth	±8.5×10 ⁻⁸	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

2 GENERAL INFORMATION

2.1 Product Details

Only the radio detail of IEEE 802.11n of Panel Antenna (3CWE596) is shown in the table below. For more detailed features description, please refer to the manufacturer’s specifications or user’s manual.

Items	Description
Modulation&	see the below table for draft 802.11n
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	see the below table for draft 802.11n
Frequency Range	2400 ~ 2483.5MHz / 5725 ~ 5850MHz
Channel Number	2.4G- 11 for 20MHz bandwidth ; 7 for 40MHz bandwidth 5G- 5 for 20MHz bandwidth ; 2 for 40MHz bandwidth
Channel Band Width (99%)	2.4G- 1TX-MCS 0 (20MHz) : 17.64 MHz ; MCS 0 (40MHz) : 36.32 MHz 5G- 1TX-MCS 0 (20MHz) : 17.64 MHz ; MCS 0 (40MHz) : 36.32 MHz 2.4G- 2TX- MCS 8 (20MHz) : 17.56 MHz ; MCS 8 (40MHz) : 36.32 MHz 5G- 2TX- MCS 8 (20MHz) : 17.56 MHz ; MCS 8 (40MHz) : 36.24 MHz
Conducted Output Power	2.4G- 1TX-MCS 0 (20MHz) : 11.57 dBm ; MCS 0 (40MHz) : 5.30 dBm 5G- 1TX-MCS 0 (20MHz) : 10.14 dBm ; MCS 0 (40MHz) : 12.56 dBm 2.4G- 2TX- MCS 8 (20MHz) : 10.33 dBm ; MCS 8 (40MHz) : 5.72 dBm 5G- 2TX- MCS 8 (20MHz) : 12.13 dBm ; MCS 8 (40MHz) : 14.42 dBm

2.2 Accessories

Power	Brand	Model	Rating
Switching Adapter	DVE	DSA-15P-12 US 120150	INPUT: 100-240V~ 50/60Hz 0.7A OUTPUT: 12V 1.25A
Switching Adapter	DVE	DSA-20D-12 3 120150	INPUT: 100-240V~ 50/60Hz 0.7A OUTPUT: 12V 1.25A

2.3 Table for Filed Antenna

Antenna & Bandwidth

Antenna Mode	Single Chain		Two Chain	
Bandwidth Mode	20 MHz	40 MHz	20 MHz	40 MHz
802.11b	V	X	X	X
802.11g	V	X	X	X
802.11n(2.4GHz)	V	V	V	V
802.11a (5150~5250MHz)	V	X	X	X
802.11a (5725~5850/5825MHz)	V	X	X	X
802.11n (5150~5250MHz)	V	V	V	V
802.11n (5725~5850/5825MHz)	V	V	V	V

Ant.	Antenna Type	Model Name	Product description	2.4/5 GHz Gain (dBi)	Tx/Rx mode	REMARK
1	Omni Ant	3CWE591	3Com® 6/8dBi Dual-Band Omni Antenna	6/8	1T1R	Main Ant. for test
2	Omni Ant	S24513BPX	CUSHCRAFT 2.4~2.5& 4.9~5.9 GHz DUAL BAND OMNI ANTENNA	6/6.5	1T1R	-
3	Omni Ant	SS-200-AT-AN-30	Airtight 2.4~2.5& 4.9~5.9 GHz Dual-band Omnidirectional Indoor/outdoor antenna	6/6.5	1T1R	-
4	Omni Ant	TGX-102XNXXX	Joymax Base Station Antenna	6/6	1T1R	-
5	Panel Ant	3CWE596	3Com® 18/20dBi Dual-Band Panel Antenna	18/20	2T2R	Main Ant. for test
6	Panel Ant	3CWE598	3Com® 8/10dBi Dual-Band Panel Antenna	8/10	2T2R	-
7	Panel Ant	SL24513P12SMF	CUSHCRAFT Tri-mode, dual band 802.11b/a/g ceiling mounted Omnidirectional panel antenna	3/3	2T2R	-

Ant.	Antenna Type	Model Name	Product description	2.4/5 GHz Gain (dBi)	Tx/Rx mode	REMARK
8	Panel Ant	SS-200-AT-AN-10	Airtight dual band 802.11b/a/g Omnidirectional Indoor panel antenna	3/3	2T2R	-
9	Monopole Ant	3CWE590	3Com 2dBi Dual-Band Omni Antenna Kit	2/2	2T3R	Main Ant. for test
10	PCB Antenna	TFF-A015MPAX-361	Integrated PCB Antenna	3/3	2T3R	Main Ant. for test

* There are four types of antenna in this project. Antenna 1,5,9,10 are the main antenna for test, according to the standard, the same type antenna with the highest gain could choose to test.

Antenna Cable Model Name	Product description	2.4/5 GHz Cable Loss (dB)
3CWE580	3Com® Ultra Low Loss 6-Foot Antenna Cable	-0.6/-1.2
3CWE581	3Com® Ultra Low Loss 20-Foot Antenna Cable	-2/-4
3CWE582	3Com® Ultra Low Loss 50-Foot Antenna Cable	-5/-10

Panel Antenna (3CWE596)

Ant.	Antenna Type	Connector	Gain (dBi)		Remark
			2.4G	5G	
A	Panel Antenna	N Type	18	20	TX / RX
B	Panel Antenna	N Type	18	20	TX / RX

Antenna: 2T2R Spatial Multiplexing MIMO configuration. 2 antennas are for signal transmitting and receiving.

IEEE 802,11n Modulation Scheme

MCS Index	Nss	Modulation	R	NBPSC	NCBPS		NDBPS		Data rate(Mbps)			
					800nsGI		20MHz	40MHz	20MHz	40MHz	20MHz	40MHz
					20MHz	40MHz						
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5		
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0		
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5		
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0		
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0		
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0		
6	1	64-QAM	3/4	6	312	648	234	486	58.5	121.5		
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0		
8	2	BPSK	1/2	1	104	216	52	108	13.0	27.0		
9	2	QPSK	1/2	2	208	432	104	216	26.0	54.0		
10	2	QPSK	3/4	2	208	432	156	324	39.0	81.0		
11	2	16-QAM	1/2	4	416	864	208	432	52.0	108.0		
12	2	16-QAM	3/4	4	416	864	312	648	78.0	162.0		
13	2	64-QAM	2/3	6	624	1296	416	864	104.0	216.0		
14	2	64-QAM	3/4	6	624	1296	468	972	117.0	243.0		
15	2	64-QAM	5/6	6	624	1296	520	1080	130.0	270.0		

Symbol	Explanation
NSS	Number of spatial streams
R	Code rate
NBPSC	Number of coded bits per single carrier
NCBPS	Number of coded bits per symbol
NDBPS	Number of data bits per symbol
GI	guard interval

2.4 Table for Carrier Frequencies

Frequency Allocation

For 802.11a: use Channel 149, 153, 157, 161, and 165.

For 802.11n:

There are two bandwidth systems for IEEE 802.11n.

For 20MHz bandwidth systems, use Channel 149, 153, 157, 161, and 165.

For 40MHz bandwidth systems, use Channel 151, 159.

Frequency Band	Channel No.	Frequency
5725~5850 MHz	149	5745 MHz
	151	5755 MHz
	153	5765 MHz
	157	5785 MHz
	159	5795 MHz
	161	5805 MHz
	165	5825 MHz

Frequency Allocation

For 802.11b/g: use Channel 1~Channel 11.

For 802.11n:

There are two bandwidth systems for IEEE 802.11n.

For 20MHz bandwidth systems, use Channel 1~Channel 11.

For 40MHz bandwidth systems, use Channel 3~Channel 9.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz		

2.5 Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible Configuration for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Antenna
AC Power Line Conducted Emissions	See the note	Auto	-	-
Maximum Conducted Output Power	MCS 0 (20MHz)	6.5 Mbps	149/157/165	A
Power Spectral Density	MCS 0 (40MHz)	13.5 Mbps	151/159	A
6dB Spectrum Bandwidth	MCS 0 (20MHz)	13 Mbps	149/157/165	A/B/A+B
Radiated Emissions 1GHz~10 th Harmonic	MCS 0 (40MHz)	27 Mbps	151/159	A/B/A+B
Band Edge Emissions	MCS 0 (20MHz)	6.5 Mbps	1/6/11	A
	MCS 0 (40MHz)	13.5 Mbps	3/6/9	A
	MCS 8 (20MHz)	13 Mbps	1/6/11	A/B/A+B
	MCS 8 (40MHz)	27 Mbps	3/6/9	A/B/A+B
Radiated Emissions 9kHz~1GHz	See the note	Auto	-	-

Note: For EMI test, the following modes were MCS 8 (20MHz/40MHz) tested:

Conducted and Radiated Emissions Below 1GHz

LAN 100Mbps (Adapter: DSA-20D-12 3 120150)

LAN 1Gbps (Adapter: DSA-20D-12 3 120150)

LAN 1Gbps (Adapter: DSA-15P-12 US 120150)

Radiated Emissions Below 1GHz

Adapter: DSA-20D-12 3 120150

Adapter: DSA-15P-12 US 120150

Power Supply: POE20U-560(G) -R

There are performed the worst test result; it was reported as final data.

2.6 Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH03-HY	SAC	Hwa Ya	101377	IC 4086B-1	-
CO01-LK	Conduction	Lin Kou	93596	IC 4086C-1	-
TH01-HY	OVEN Room	Hwa Ya	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

2.7 Table for Supporting Units

Support Unit	Brand	Model	FCC ID
P.C. (Remote Workstation)	COMPAQ	Evo D380mx	DoC
Notebook (Remote Workstation)	DELL	PP01L	DoC
Monitor (Remote Workstation)	COMPAQ	S510	DoC
Keyboard (PS2) (Remote Workstation)	COMPAQ	6511-VA	DoC
Mouse (PS2) (Remote Workstation)	COMPAQ	M-S69	JNZ211443
Notebook (Remote Workstation)	DELL	D400	DoC
Switching Power Supply	PHIHONG	POE20U-560(G) -R	-

2.8 Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

For Single Chain:

Power Parameters of IEEE 802.11n-5G

Test Software Version	ART 0.5 BUILD#25		
Frequency	5745 MHz	5785 MHz	5825 MHz
IEEE 802.11n(20MHz)	13	13	15
Frequency	5755 MHz	5795 MHz	-
IEEE 802.11n(40MHz)	15	14	-

Power Parameters of IEEE 802.11n-2.4G

Test Software Version	ART 0.5 BUILD#25		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11n(20MHz)	9	14	8.5
Frequency	2422 MHz	2437 MHz	2452 MHz
IEEE 802.11n(40MHz)	2.5	7.5	2.5

For Two Chain:

Power Parameters of IEEE 802.11n-5G Ant. A & B

Test Software Version	ART 0.5 BUILD#25		
Frequency	5745 MHz	5785 MHz	5825 MHz
IEEE 802.11n(20MHz)	12	12	11
Frequency	5755 MHz	5795 MHz	-
IEEE 802.11n(40MHz)	14	12.5	-

Power Parameters of IEEE 802.11n-2.4G Ant. A & B

Test Software Version	ART 0.5 BUILD#25		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11n(20MHz)	7.5	10	5
Frequency	2422 MHz	2437 MHz	2452 MHz
IEEE 802.11n(40MHz)	2	5.5	0.5

2.9 EUT Operation during Test

An executive program, EMCTEST.EXE under WIN XP, which generates a complete line of continuously repeating “ H “ pattern was used as the test software.

The P.C. & NB sends “ H “ messages to the panel, and the panel displays “ H “ patterns on the screen.


Executed “ART 0.5 BUILD#25” to keep transmitting signals at fixed frequency.

Executed "ping.exe" to link with the remote workstation to receive and transmit data by LAN and WLAN.


2.10 Test Configuration

2.10.1 Radiation Emissions Test Configuration

For radiated emissions 9kHz~1GHz

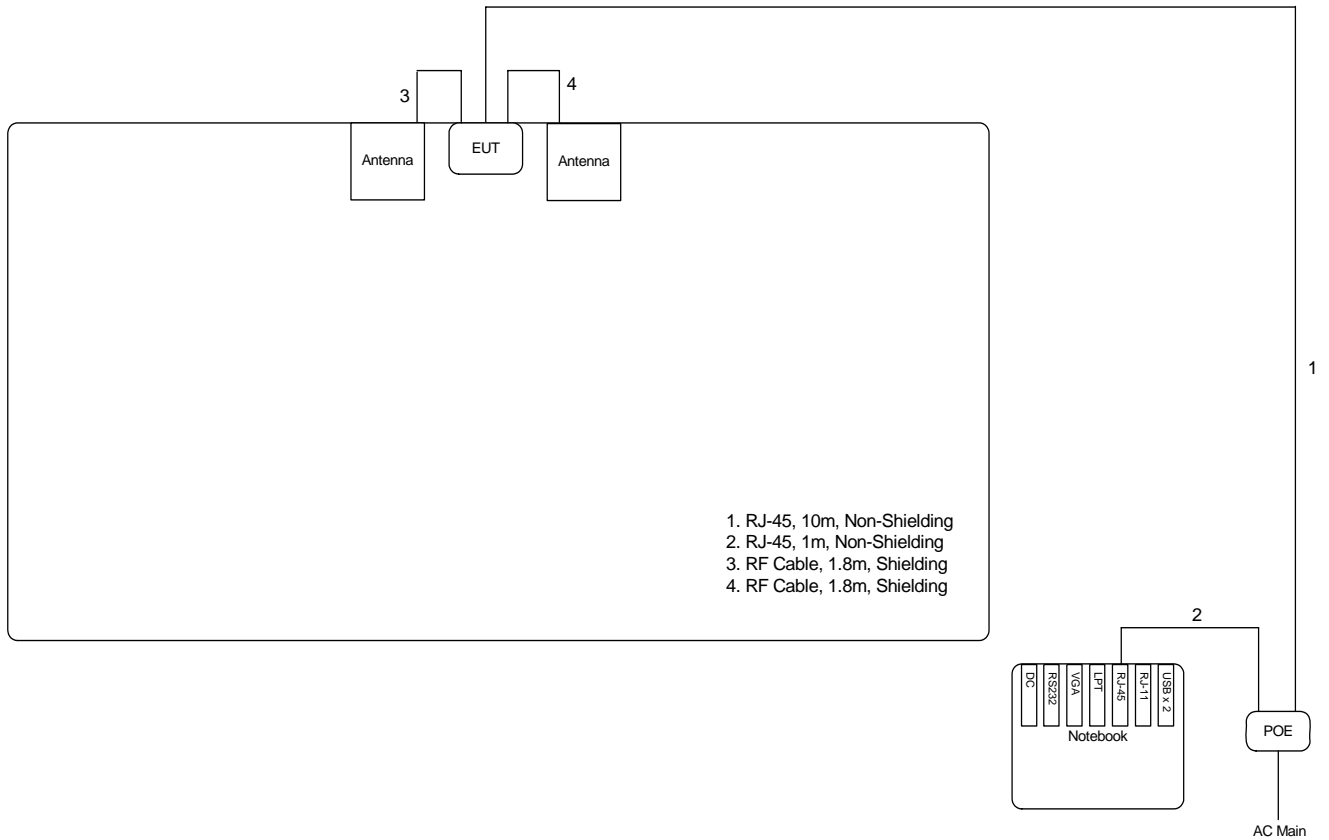

For radiated emissions above 1GHz

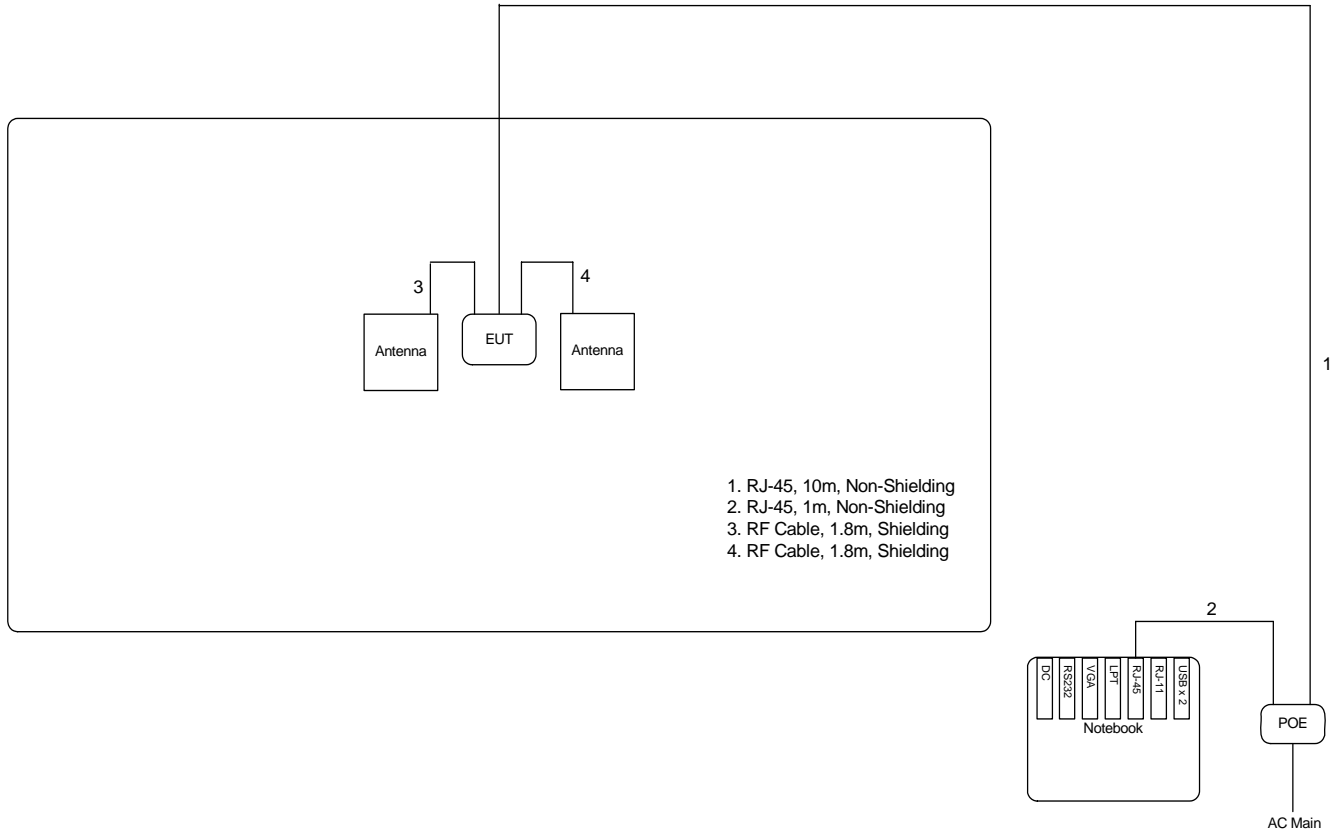

3 TEST RESULT

3.1 AC Power Line Conducted Emissions Measurement

3.1.1 Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

3.1.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

3.1.3 Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

3.1.4 Test Setup Layout

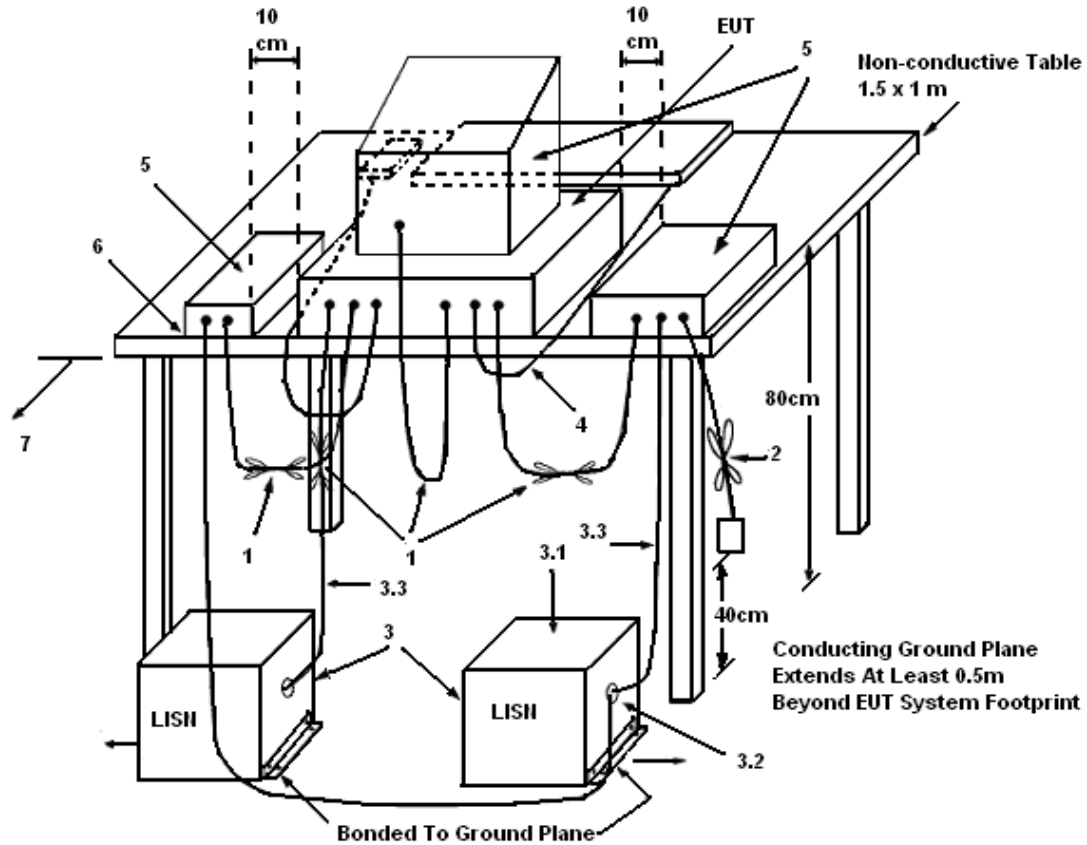

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω. LISN can be placed on top of, or immediately beneath, reference ground plane.
- (3.1) All other equipment powered from additional LISN(s).
- (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
- (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

3.1.5 Test Deviation


There is no deviation with the original standard.

3.1.6 EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


3.1.7 Results of AC Power Line Conducted Emissions Measurement

Test date	May 19, 2008	Test Site No.	CO01-LK
Temperature	25	Humidity	49%
Test Engineer	Peter	Phase	Line
Configuration	LAN 100Mbps (Adapter: DSA-20D-12 3 120150)		

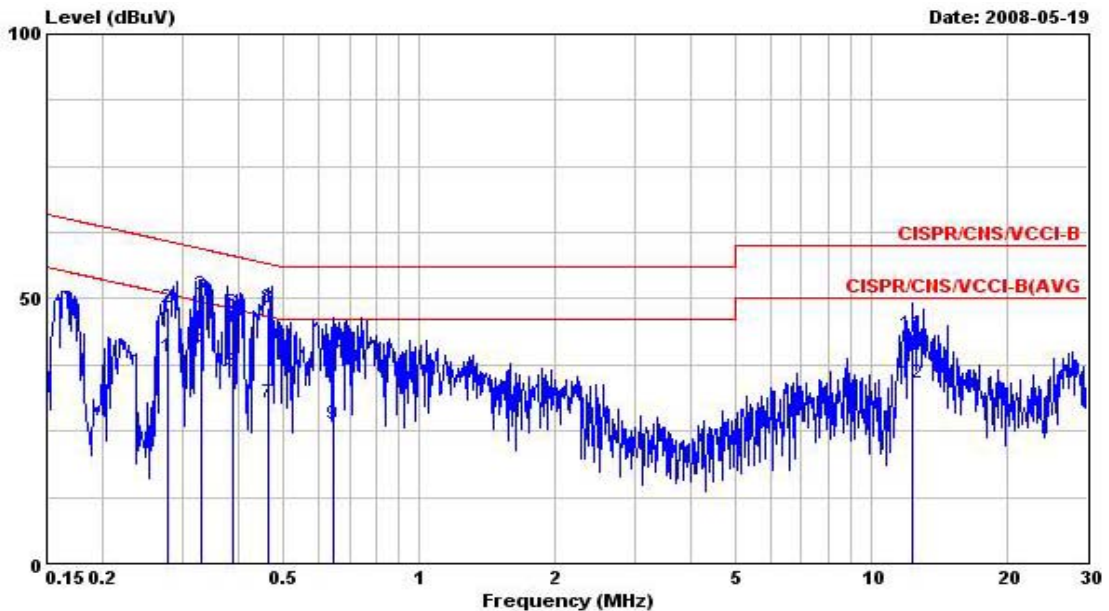

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.278	39.14	-11.75	50.89	38.99	0.10	0.05	Average
2	0.278	48.37	-12.52	60.89	48.22	0.10	0.05	QP
3	0.330	50.86	-8.59	59.45	50.72	0.10	0.04	QP
4	0.330	40.24	-9.21	49.45	40.10	0.10	0.04	Average
5	0.389	36.17	-11.92	48.09	36.03	0.10	0.04	Average
6	0.389	47.32	-10.77	58.09	47.18	0.10	0.04	QP
7	0.466	30.37	-16.22	46.59	30.22	0.10	0.05	Average
8	0.466	48.16	-8.43	56.59	48.01	0.10	0.05	QP
9	0.647	26.36	-19.64	46.00	26.18	0.10	0.08	Average
10	0.647	40.05	-15.95	56.00	39.87	0.10	0.08	QP
11	12.320	43.31	-16.69	60.00	42.40	0.55	0.36	QP
12	12.320	34.02	-15.98	50.00	33.11	0.55	0.36	Average

Test date	May 19, 2008	Test Site No.	CO01-LK
Temperature	21	Humidity	62%
Test Engineer	Steven	Phase	Neutral
Configuration	LAN 100Mbps (Adapter: DSA-20D-12 3 120150)		

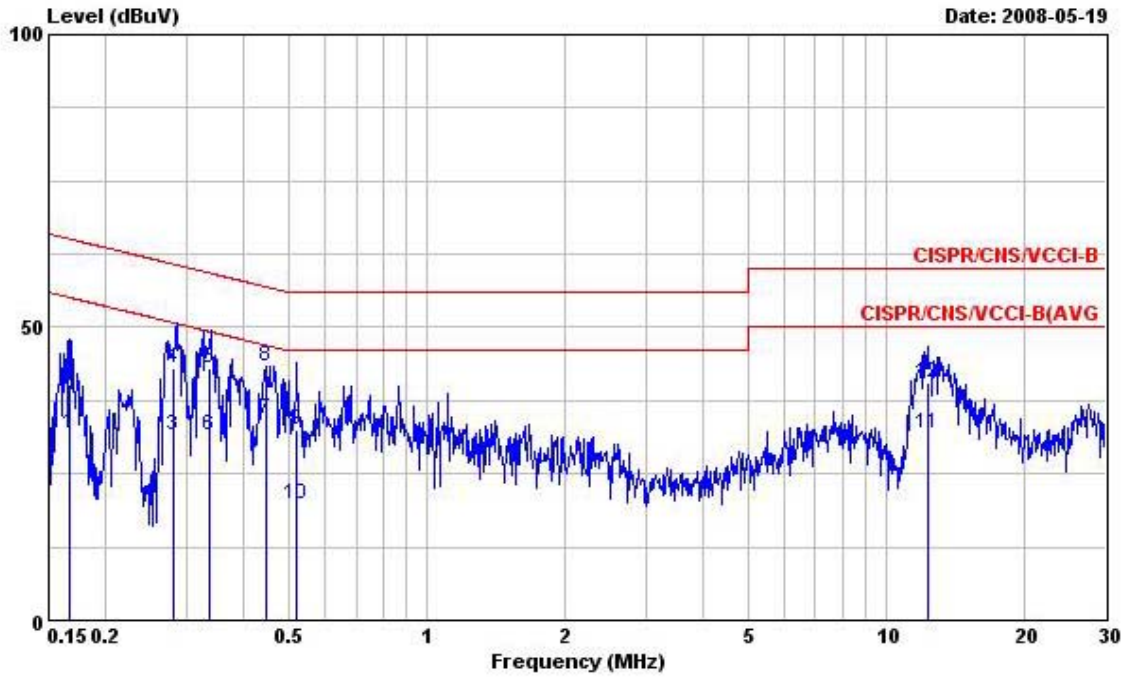


	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.166	31.73	-23.43	55.16	31.59	0.10	0.04	Average
2	0.166	40.22	-24.94	65.16	40.08	0.10	0.04	QP
3	0.281	31.65	-19.15	50.80	31.50	0.10	0.05	Average
4	0.281	43.08	-17.72	60.80	42.93	0.10	0.05	QP
5	0.336	42.93	-16.38	59.31	42.79	0.10	0.04	QP
6	0.336	31.60	-17.71	49.31	31.46	0.10	0.04	Average
7	0.447	34.25	-12.68	46.93	34.10	0.10	0.05	Average
8	0.447	43.42	-13.51	56.93	43.27	0.10	0.05	QP
9	0.521	32.54	-23.46	56.00	32.38	0.10	0.06	QP
10	0.521	19.91	-26.09	46.00	19.75	0.10	0.06	Average
11	12.250	32.02	-17.98	50.00	31.17	0.50	0.35	Average
12	12.250	40.49	-19.51	60.00	39.64	0.50	0.35	QP

Note:


Level = Read Level + LISN Factor + Cable Loss.

Test date	May 19, 2008	Test Site No.	CO01-LK
Temperature	25	Humidity	49%
Test Engineer	Peter	Phase	Line
Configuration	LAN 1Gbps (Adapter: DSA-20D-12 3 120150)		

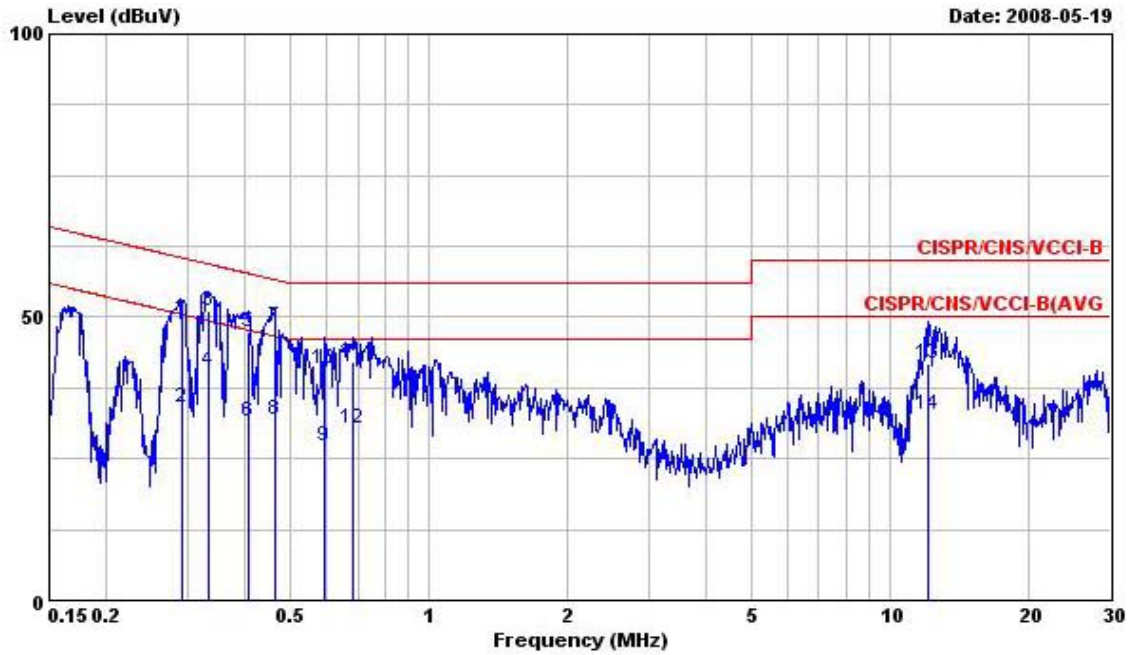

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.292	49.69	-10.78	60.47	49.55	0.10	0.04	QP
2	0.292	33.92	-16.55	50.47	33.78	0.10	0.04	Average
3	0.333	51.04	-8.35	59.39	50.90	0.10	0.04	QP
4	0.333	40.54	-8.85	49.39	40.40	0.10	0.04	Average
5	0.406	47.49	-10.24	57.73	47.35	0.10	0.04	QP
6	0.406	31.60	-16.13	47.73	31.46	0.10	0.04	Average
7	0.464	48.40	-8.22	56.62	48.25	0.10	0.05	QP
8	0.464	31.92	-14.70	46.62	31.77	0.10	0.05	Average
9	0.592	27.26	-18.74	46.00	27.09	0.10	0.07	Average
10	0.592	41.01	-14.99	56.00	40.84	0.10	0.07	QP
11	0.686	42.10	-13.90	56.00	41.92	0.10	0.08	QP
12	0.686	30.32	-15.68	46.00	30.14	0.10	0.08	Average
13	12.120	41.88	-18.12	60.00	40.98	0.55	0.35	QP
14	12.120	32.93	-17.07	50.00	32.03	0.55	0.35	Average

Test date	May 19, 2008	Test Site No.	CO01-LK
Temperature	21	Humidity	62%
Test Engineer	Steven	Phase	Neutral
Configuration	LAN 1Gbps (Adapter: DSA-20D-12 3 120150)		

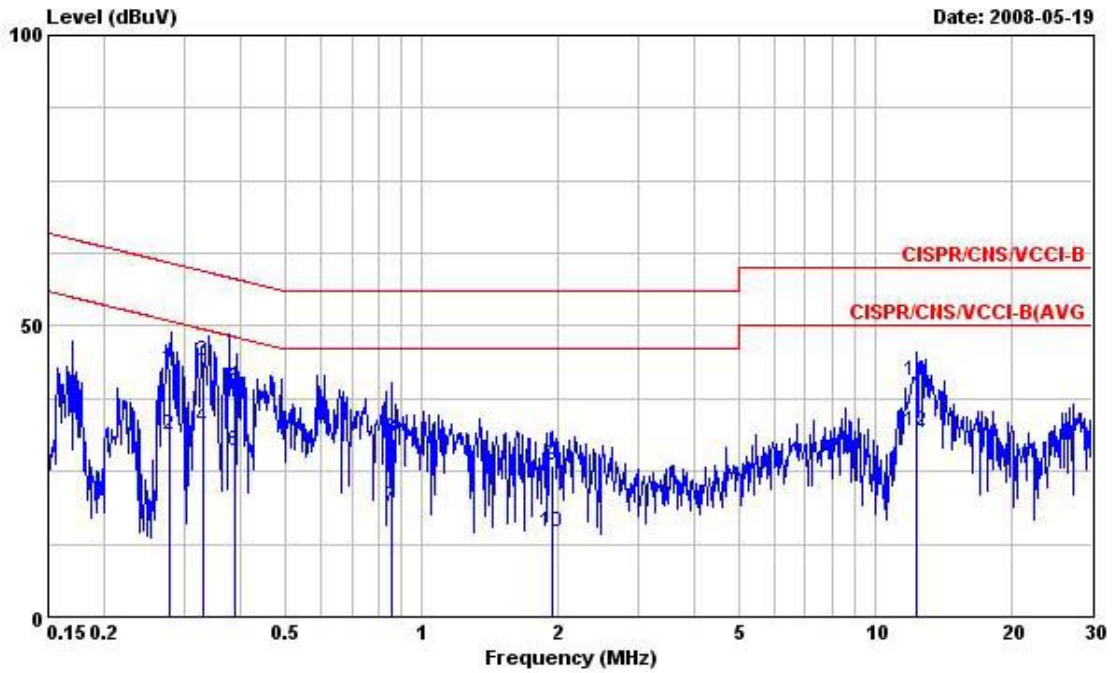


	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.279	42.61	-18.24	60.85	42.46	0.10	0.05	QP
2	0.279	31.28	-19.57	50.85	31.13	0.10	0.05	Average
3	0.330	43.90	-15.55	59.45	43.76	0.10	0.04	QP
4	0.330	32.40	-17.05	49.45	32.26	0.10	0.04	Average
5	0.386	39.37	-18.78	58.15	39.23	0.10	0.04	QP
6	0.386	28.33	-19.82	48.15	28.19	0.10	0.04	Average
7	0.862	18.91	-27.09	46.00	18.71	0.10	0.10	Average
8	0.862	30.63	-25.37	56.00	30.43	0.10	0.10	QP
9	1.940	25.86	-30.14	56.00	25.63	0.10	0.13	QP
10	1.940	14.62	-31.38	46.00	14.39	0.10	0.13	Average
11	12.320	40.46	-19.54	60.00	39.60	0.50	0.36	QP
12	12.320	31.97	-18.03	50.00	31.11	0.50	0.36	Average

Note:

Level = Read Level + LISN Factor + Cable Loss.

Test date	May 30, 2008	Test Site No.	CO01-LK
Temperature	25	Humidity	49%
Test Engineer	Peter	Phase	Line
Configuration	LAN 1Gbps (Adapter: DSA-15P-12 US 120150)		

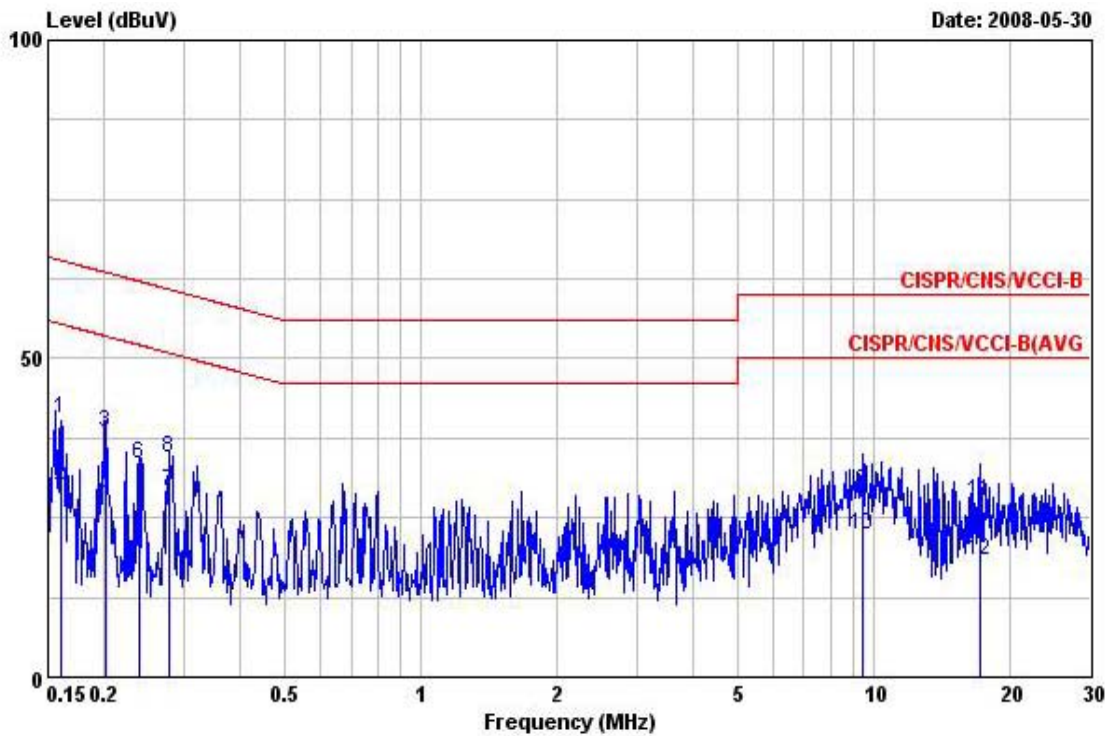

http://www.cemcon.com

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.160	40.52	-24.95	65.47	40.38	0.10	0.04	QP
2	0.160	29.94	-25.53	55.47	29.80	0.10	0.04	Average
3	0.201	38.37	-25.21	63.58	38.22	0.10	0.05	QP
4	0.201	28.26	-25.32	53.58	28.11	0.10	0.05	Average
5	0.239	21.97	-30.16	52.13	21.82	0.10	0.05	Average
6	0.239	33.31	-28.82	62.13	33.16	0.10	0.05	QP
7	0.279	29.02	-21.83	50.85	28.87	0.10	0.05	Average
8	0.279	34.22	-26.63	60.85	34.07	0.10	0.05	QP
9	9.404	29.22	-30.78	60.00	28.43	0.48	0.31	QP
10	9.404	22.43	-27.57	50.00	21.64	0.48	0.31	Average
11	17.139	27.41	-32.59	60.00	26.35	0.69	0.37	QP
12	17.139	18.41	-31.59	50.00	17.35	0.69	0.37	Average

Test date	May 30, 2008	Test Site No.	CO01-LK
Temperature	21	Humidity	62%
Test Engineer	Steven	Phase	Neutral
Configuration	LAN 1Gbps (Adapter: DSA-15P-12 US 120150)		

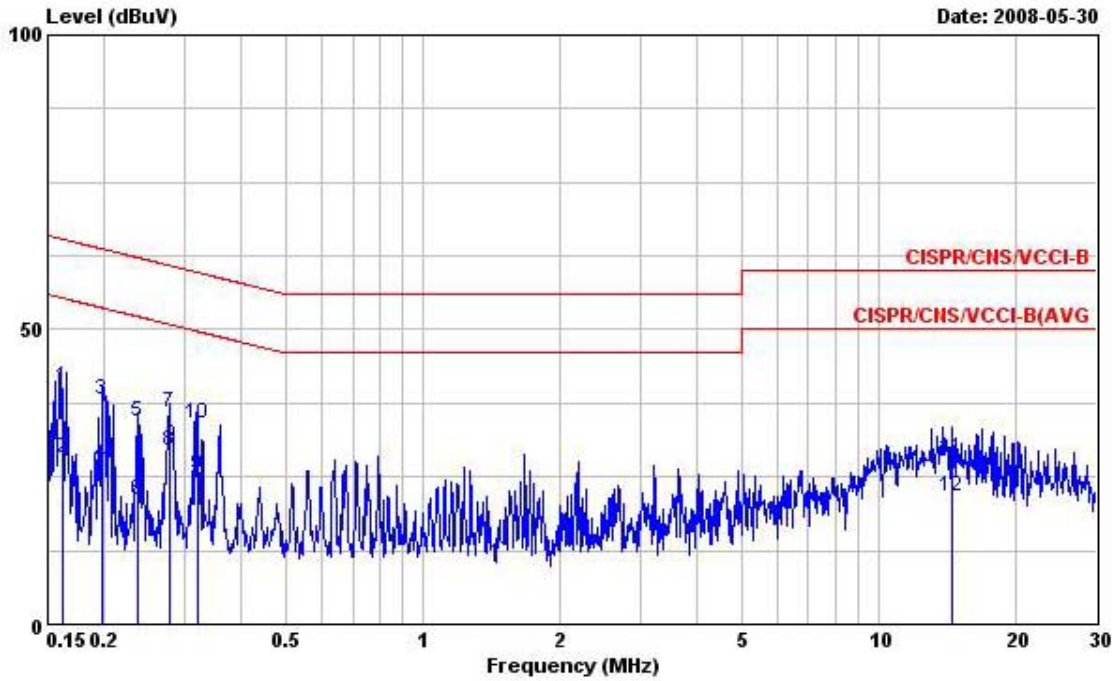


Table: Measurement

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.161	40.28	-25.11	65.39	40.14	0.10	0.04	QP
2	0.161	28.05	-27.34	55.39	27.91	0.10	0.04	Average
3	0.197	38.21	-25.54	63.75	38.06	0.10	0.05	QP
4	0.197	27.36	-26.39	53.75	27.21	0.10	0.05	Average
5	0.237	34.35	-27.85	62.20	34.20	0.10	0.05	QP
6	0.237	21.01	-31.19	52.20	20.86	0.10	0.05	Average
7	0.277	35.93	-24.98	60.91	35.78	0.10	0.05	QP
8	0.277	29.38	-21.53	50.91	29.23	0.10	0.05	Average
9	0.319	25.28	-24.45	49.73	25.14	0.10	0.04	Average
10	0.319	34.12	-25.61	59.73	33.98	0.10	0.04	QP
11	14.505	28.03	-31.97	60.00	27.07	0.58	0.38	QP
12	14.505	21.52	-28.48	50.00	20.56	0.58	0.38	Average

Note:

Level = Read Level + LISN Factor + Cable Loss.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. The limited has to be reduced by the amount in dB that the gain of the antenna exceed 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

3.2.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Analyzer	Setting
Attenuation	Auto
Span Frequency	0.135 s ~ 26 s
RB	1000 kHz
VB	3000 kHz
Detector	rms
Trace	Max Hold
Sweep Time	Auto

3.2.3 Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Test was performed in accordance with Measurement of Digital Transmission Systems Operating under Section 15.247 March 23, 2005.
3. When measuring maximum conducted output power within multiple antenna systems, add every result of the values by mathematic formula.

3.2.4 Test Setup Layout

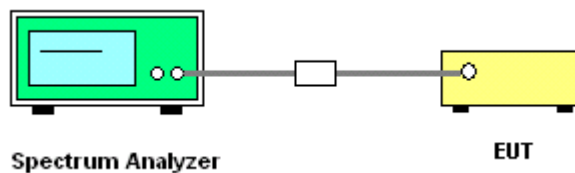

3.2.5 Test Deviation

There is no deviation with the original standard.

3.2.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

3.2.7 Test Result of Maximum Conducted Output Power

Test date	May 09, 2008	Test Site No.	TH01-HY
Temperature	27	Humidity	55%
Test Engineer	Sam	Configuration	802.11n

For Single Chain:

Configuration of IEEE 802.11n-5G (20MHz)

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	10.14	30.00	Complies
157	5785 MHz	9.66	30.00	Complies
165	5825 MHz	9.52	30.00	Complies

Configuration of IEEE 802.11n-5G (40MHz)

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
151	5755 MHz	12.56	30.00	Complies
159	5795 MHz	11.06	30.00	Complies

Configuration of IEEE 802.11n-2.4G (20MHz)

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	6.52	18.00	Complies
6	2437 MHz	11.57	18.00	Complies
11	2462 MHz	6.17	18.00	Complies

Configuration of IEEE 802.11n-2.4G (40MHz)

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	-0.32	18.00	Complies
6	2437 MHz	5.30	18.00	Complies
9	2452 MHz	0.46	18.00	Complies

For Two Chain:

Configuration of IEEE 802.11n-5G Ant. A (20MHz)

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	8.37	30.00	Complies
157	5785 MHz	7.73	30.00	Complies
165	5825 MHz	7.20	30.00	Complies

Configuration of IEEE 802.11n-5G Ant. B (20MHz)

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	9.76	30.00	Complies
157	5785 MHz	9.61	30.00	Complies
165	5825 MHz	9.02	30.00	Complies

Configuration of IEEE 802.11n-5G Ant. A & B (20MHz)

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	12.13	30.00	Complies
157	5785 MHz	11.78	30.00	Complies
165	5825 MHz	11.21	30.00	Complies

Configuration of IEEE 802.11n-5G Ant. A (40MHz)

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
151	5755 MHz	10.38	30.00	Complies
159	5795 MHz	8.88	30.00	Complies

Configuration of IEEE 802.11n-5G Ant. B (40MHz)

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
151	5755 MHz	12.24	30.00	Complies
159	5795 MHz	11.07	30.00	Complies

Configuration of IEEE 802.11n-5G Ant. A & B (40MHz)

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
151	5755 MHz	14.42	30.00	Complies
159	5795 MHz	13.12	30.00	Complies

Configuration of IEEE 802.11n-2.4G Ant. A (20MHz)

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	3.71	18.00	Complies
6	2437 MHz	6.76	18.00	Complies
11	2462 MHz	2.24	18.00	Complies

Configuration of IEEE 802.11n-2.4G Ant. B (20MHz)

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	4.78	18.00	Complies
6	2437 MHz	7.82	18.00	Complies
11	2462 MHz	2.72	18.00	Complies

Configuration of IEEE 802.11n-2.4G Ant. A & B (20MHz)

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	7.29	18.00	Complies
6	2437 MHz	10.33	18.00	Complies
11	2462 MHz	5.50	18.00	Complies

Configuration of IEEE 802.11n-2.4G Ant. A (40MHz)

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	-2.01	18.00	Complies
6	2437 MHz	1.84	18.00	Complies
9	2452 MHz	-2.53	18.00	Complies

Configuration of IEEE 802.11n-2.4G Ant. B (40MHz)

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	-0.82	18.00	Complies
6	2437 MHz	3.43	18.00	Complies
9	2452 MHz	-1.76	18.00	Complies

Configuration of IEEE 802.11n-2.4G Ant. A & B (40MHz)

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	1.64	18.00	Complies
6	2437 MHz	5.72	18.00	Complies
9	2452 MHz	0.88	18.00	Complies

3.3 Power Spectral Density Measurement

3.3.1 Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

3.3.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	1.5MHz
RB	3 kHz
VB	30 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	500s

3.3.3 Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser.
2. Set RBW of spectrum analyzer to 3kHz and VBW to 30kHz. Set Detector to Peak, Trace to Max Hold.
3. Mark the frequency with maximum peak power as the center of the display of the spectrum.
4. Set the span to 1.5MHz and the sweep time to 500s and record the maximum peak value.
5. Measuring multiple antennas, the connectors are required to link with Spectrum Analyzer through a combiner.

3.3.4 Test Setup Layout

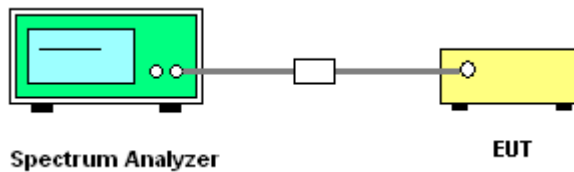

3.3.5 Test Deviation

There is no deviation with the original standard.

3.3.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

3.3.7 Test Result of Power Spectral Density

Test date	May 31, 2008	Test Site No.	TH01-HY
Temperature	27	Humidity	55%
Test Engineer	Sam	Configuration	802.11n

For Single Chain:

Configuration of IEEE 802.11n-5G (20MHz)

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	-9.16	8.00	Complies
157	5785 MHz	-10.28	8.00	Complies
165	5825 MHz	-8.93	8.00	Complies

Configuration of IEEE 802.11n-5G (40MHz)

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
151	5755 MHz	-8.50	8.00	Complies
159	5795 MHz	-9.20	8.00	Complies

Configuration of IEEE 802.11n-2.4G (20MHz)

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	-13.26	-4.00	Complies
6	2437 MHz	-9.77	-4.00	Complies
11	2462 MHz	-13.50	-4.00	Complies

Configuration of IEEE 802.11n-2.4G (40MHz)

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	-18.29	-4.00	Complies
6	2437 MHz	-12.03	-4.00	Complies
9	2452 MHz	-18.70	-4.00	Complies

For Two Chain:

Configuration of IEEE 802.11n-5G Ant. A & B (20MHz)

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	-11.39	8.00	Complies
157	5785 MHz	-6.81	8.00	Complies
165	5825 MHz	-6.99	8.00	Complies

Configuration of IEEE 802.11n-5G Ant. A & B (40MHz)

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
151	5755 MHz	-6.09	8.00	Complies
159	5795 MHz	-6.10	8.00	Complies

Configuration of IEEE 802.11n-2.4G Ant. A & B (20MHz)


Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	-17.11	-4.00	Complies
6	2437 MHz	-10.69	-4.00	Complies
11	2462 MHz	-17.32	-4.00	Complies

Configuration of IEEE 802.11n-2.4G Ant. A & B (40MHz)

Channel	Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	-17.19	-4.00	Complies
6	2437 MHz	-13.06	-4.00	Complies
9	2452 MHz	-16.73	-4.00	Complies


For Single Chain:

Power Density Plot on Configuration of IEEE 802.11n-5G (20MHz) / 5745 MHz

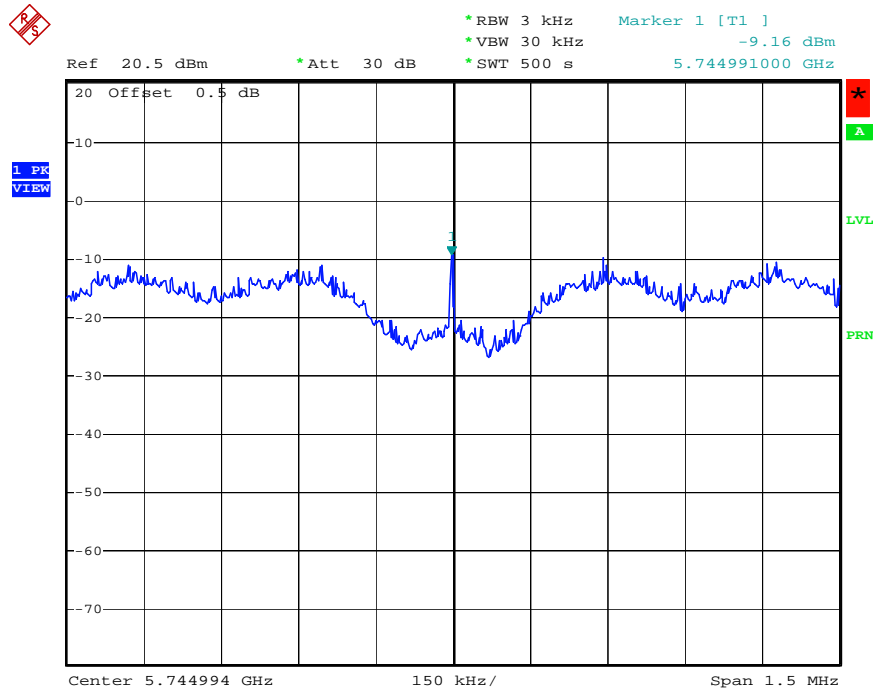


Date: 31.MAY.2008 18:20:15

Power Density Plot on Configuration of IEEE 802.11n-5G (20MHz) / 5785 MHz

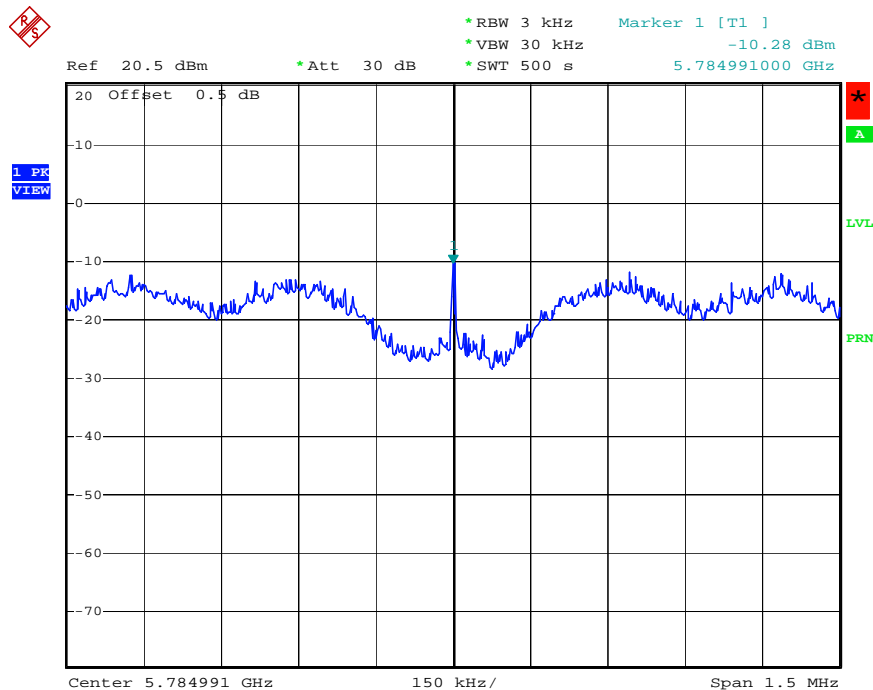


Date: 31.MAY.2008 18:21:26

Power Density Plot on Configuration of IEEE 802.11n-5G (20MHz) / 5825 MHz

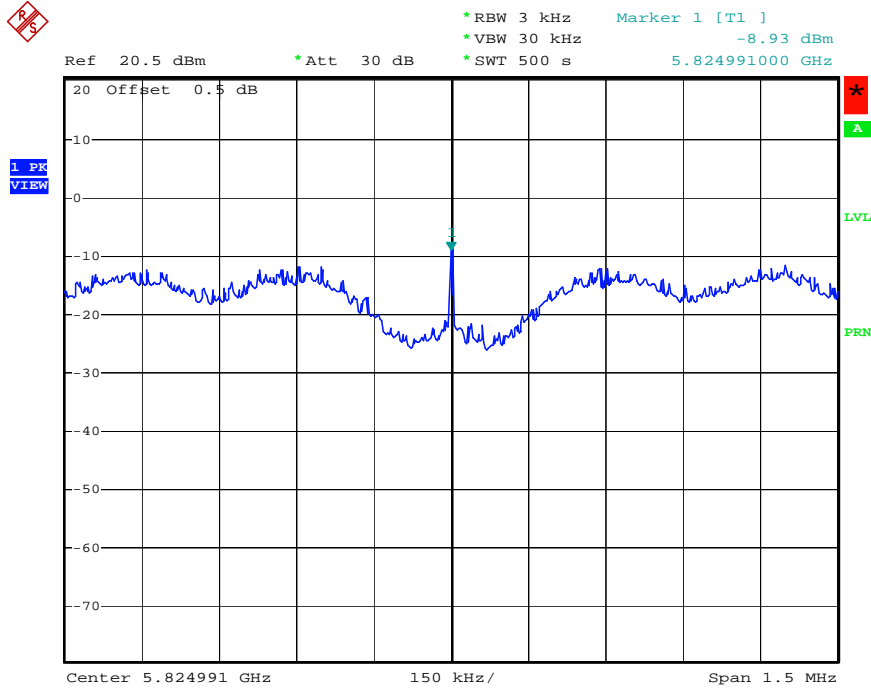


Date: 31.MAY.2008 19:15:28

Power Density Plot on Configuration of IEEE 802.11n-5G (40MHz) / 5755 MHz

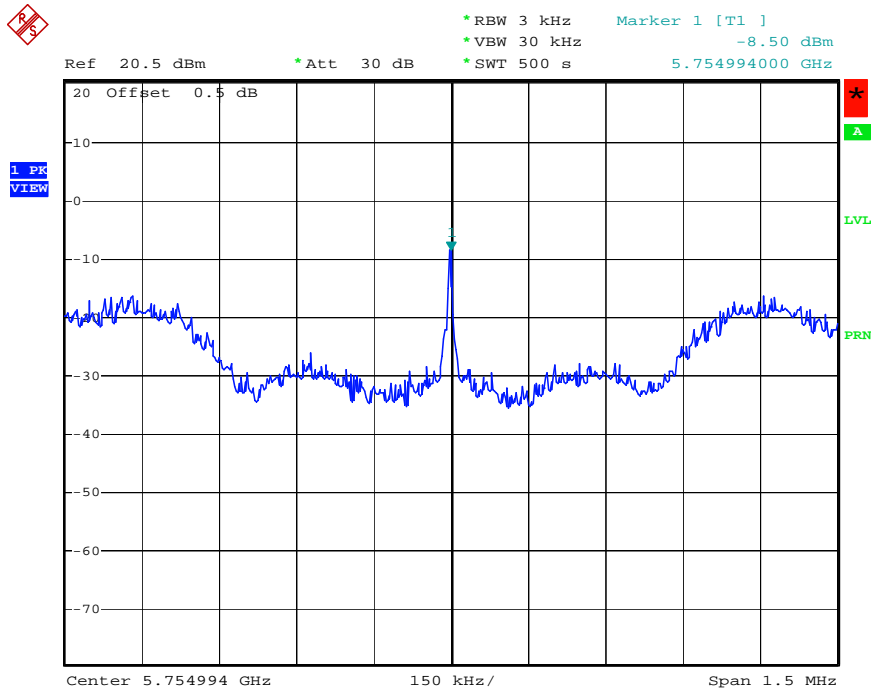


Date: 31.MAY.2008 19:36:57

Power Density Plot on Configuration of IEEE 802.11n-5G (40MHz) / 5795 MHz

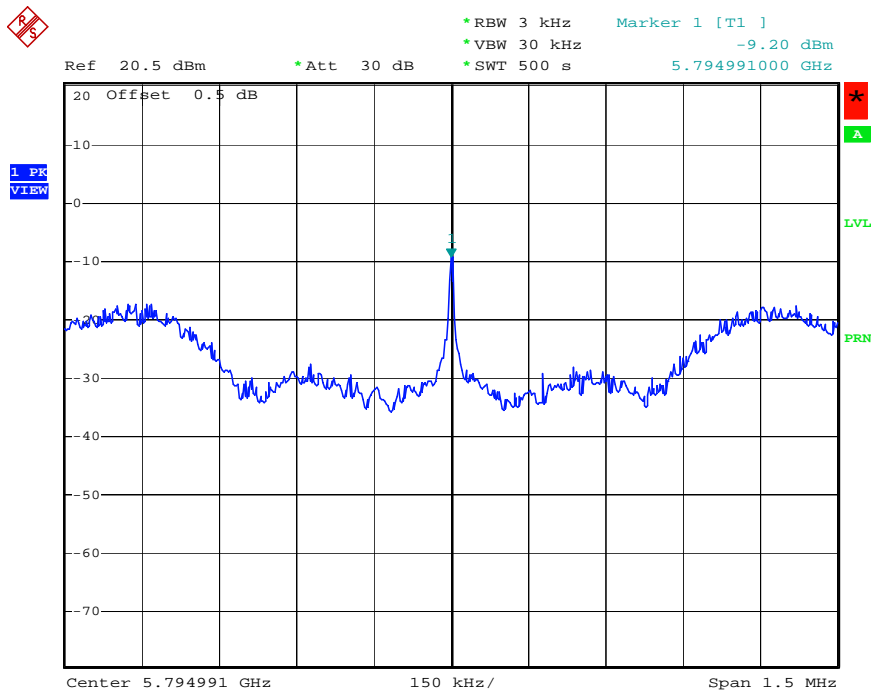


Date: 31.MAY.2008 19:38:02

Power Density Plot on Configuration of IEEE 802.11n-2.4G (20MHz) / 2412 MHz

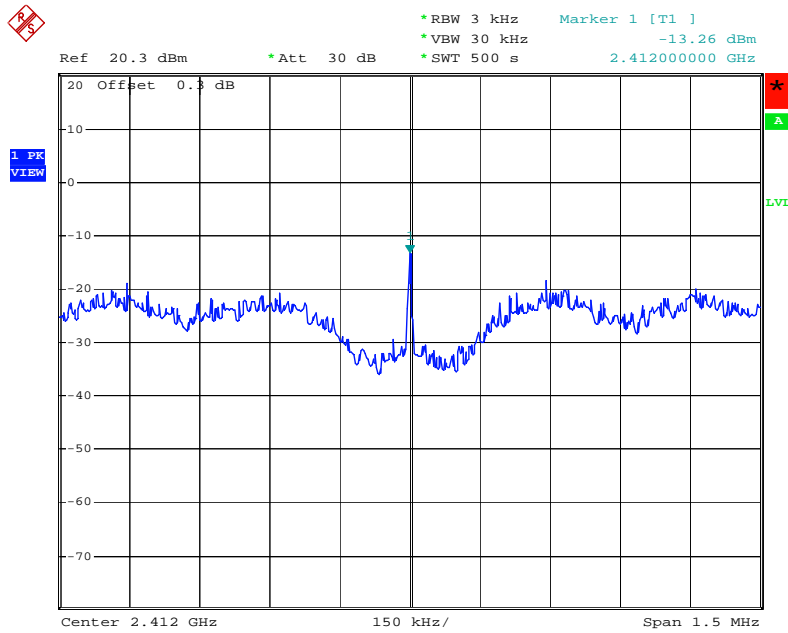


Date: 26.MAY.2008 15:52:48

Power Density Plot on Configuration of IEEE 802.11n-2.4G (20MHz) / 2437 MHz

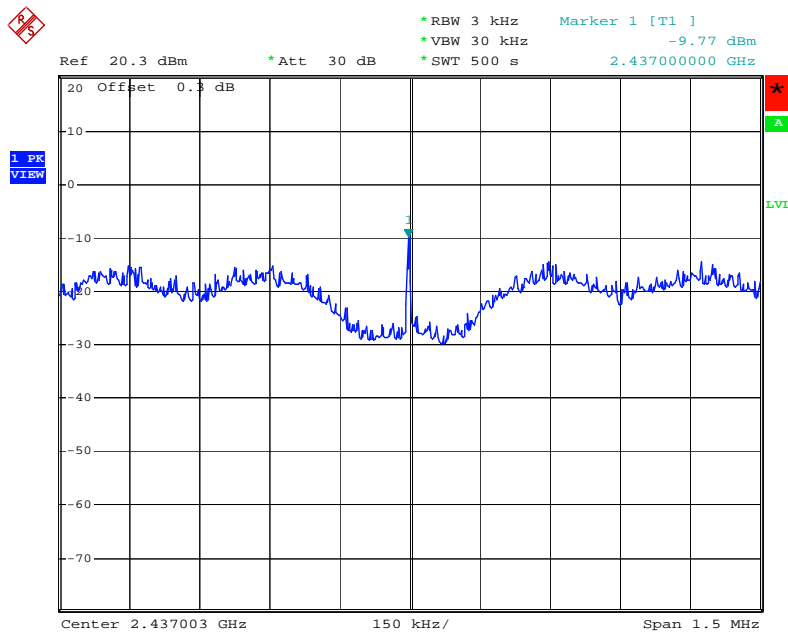


Date: 26.MAY.2008 15:53:56

Power Density Plot on Configuration of IEEE 802.11n-2.4G (20MHz) / 2462 MHz

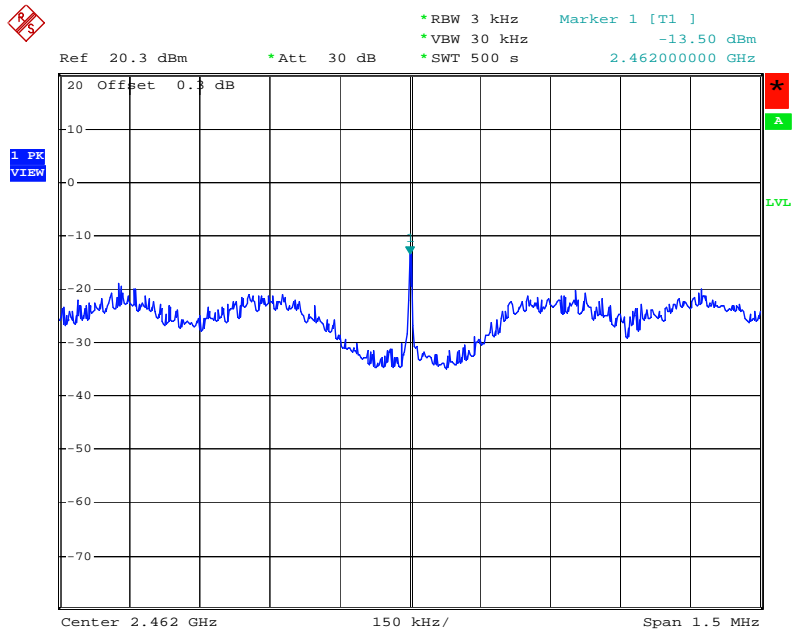


Date: 26.MAY.2008 15:54:48

Power Density Plot on Configuration of IEEE 802.11n-2.4G (40MHz) / 2422 MHz

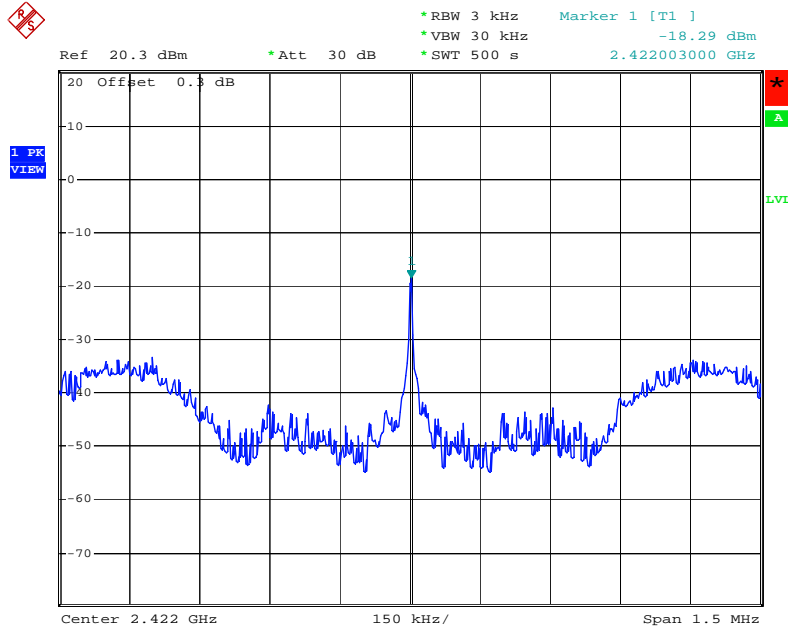


Date: 26.MAY.2008 17:09:59

Power Density Plot on Configuration of IEEE 802.11n-2.4G (40MHz) / 2437 MHz

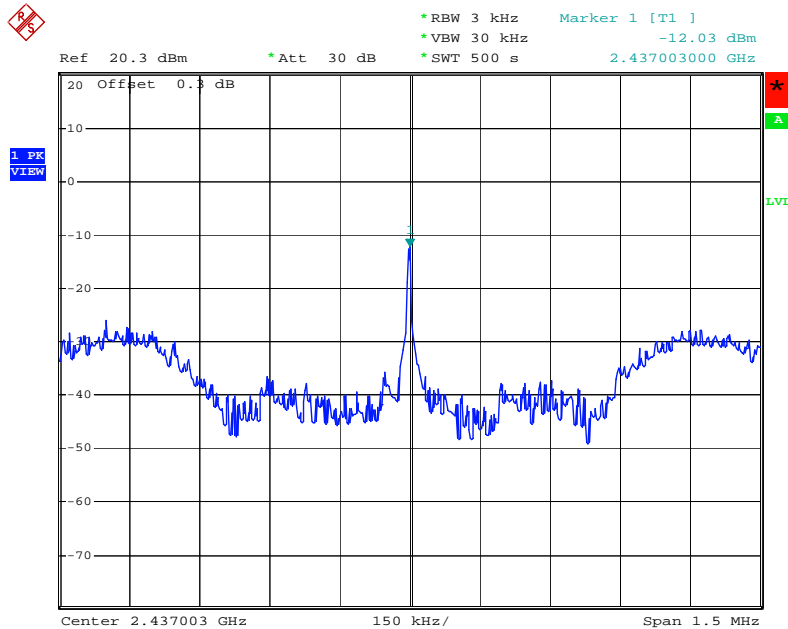

Date: 26.MAY.2008 17:08:33


Power Density Plot on Configuration of IEEE 802.11n-2.4G (40MHz) / 2452 MHz

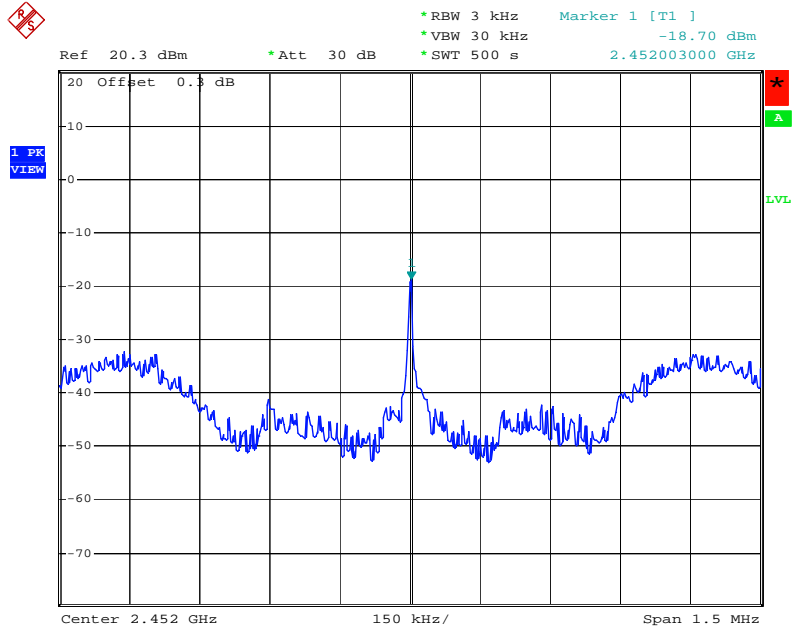

Date: 26.MAY.2008 17:04:53


For Two Chain:

Power Density Plot on Configuration of IEEE 802.11n-5G Ant. A & B (20MHz) / 5745 MHz

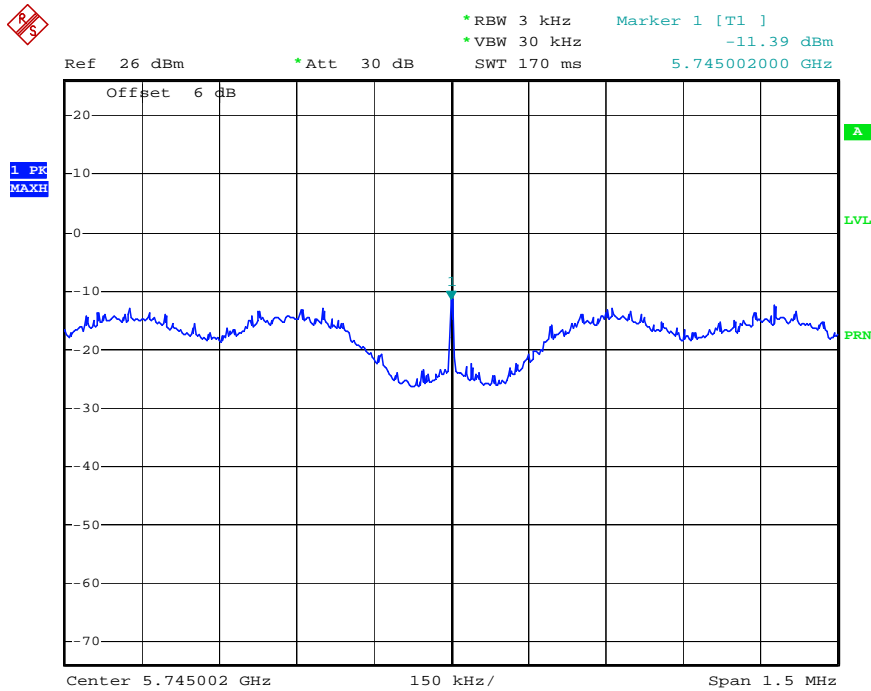


Date: 31.MAY.2008 21:10:46

Power Density Plot on Configuration of IEEE 802.11n-5G Ant. A & B (20MHz) / 5785 MHz

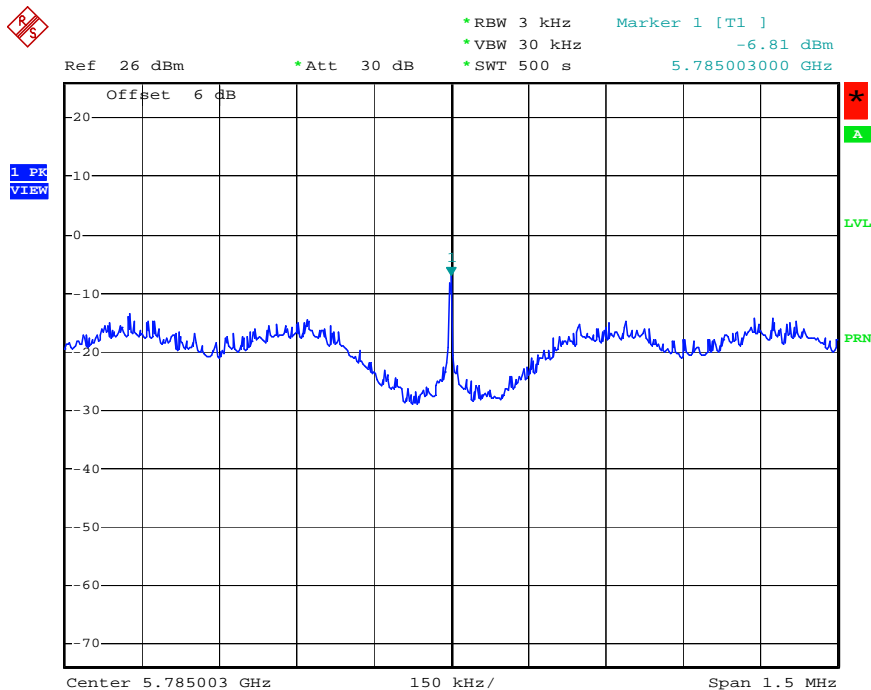


Date: 31.MAY.2008 20:45:30

Power Density Plot on Configuration of IEEE 802.11n-5G Ant. A & B (20MHz) / 5825 MHz

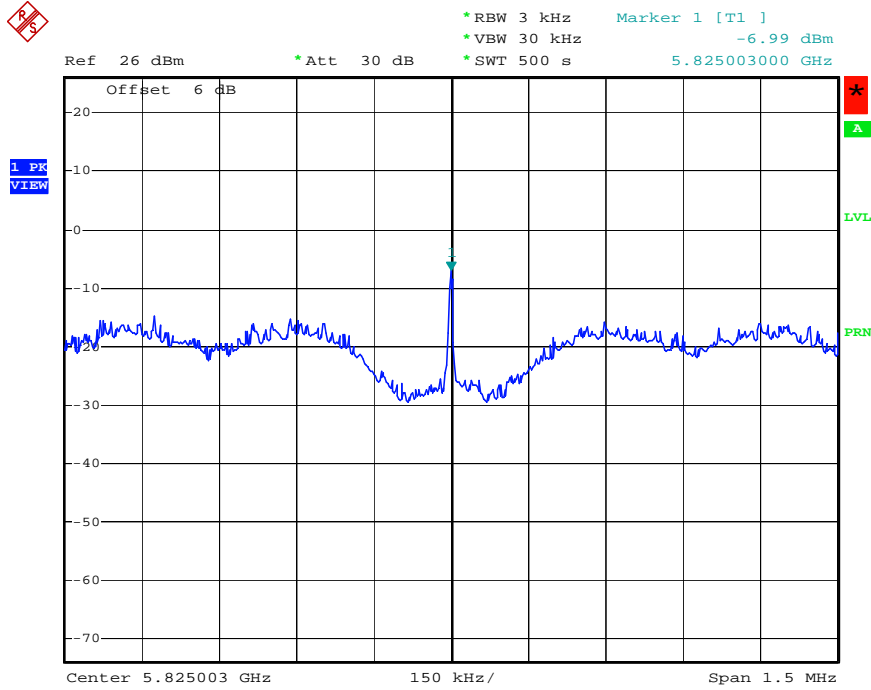


Date: 31.MAY.2008 20:44:18

Power Density Plot on Configuration of IEEE 802.11n-5G Ant. A & B (40MHz) / 5755 MHz

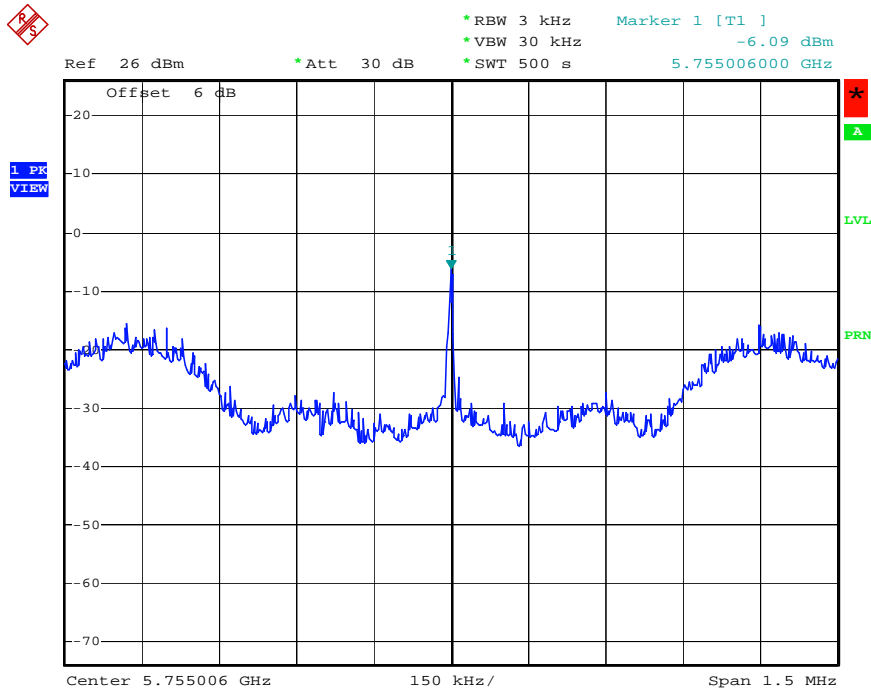


Date: 31.MAY.2008 22:01:58

Power Density Plot on Configuration of IEEE 802.11n-5G Ant. A & B (40MHz) / 5795 MHz

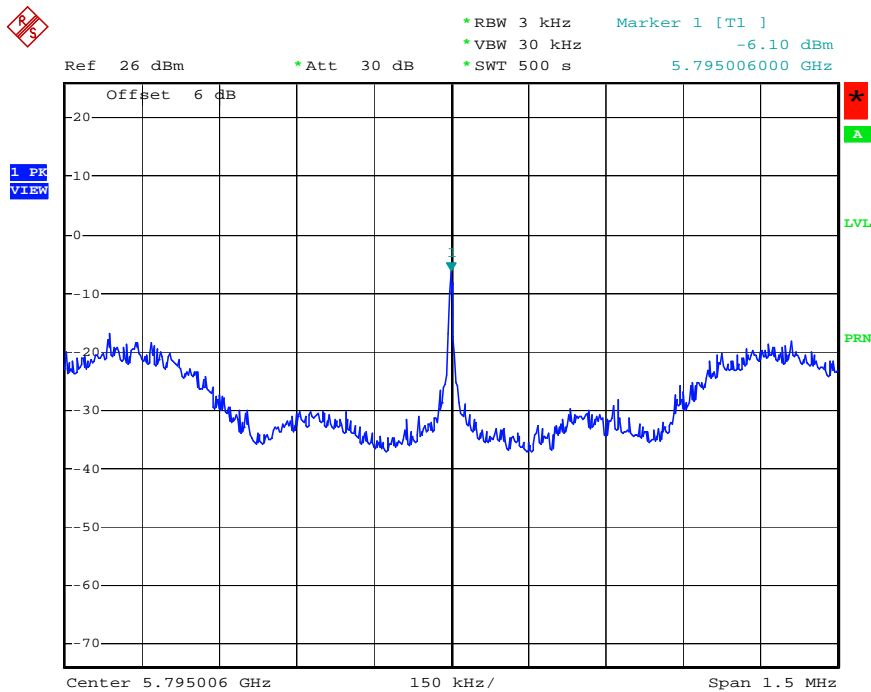


Date: 31.MAY.2008 22:03:42

Power Density Plot on Configuration of IEEE 802.11n-2.4G Ant. A & B (20MHz) / 2412 MHz

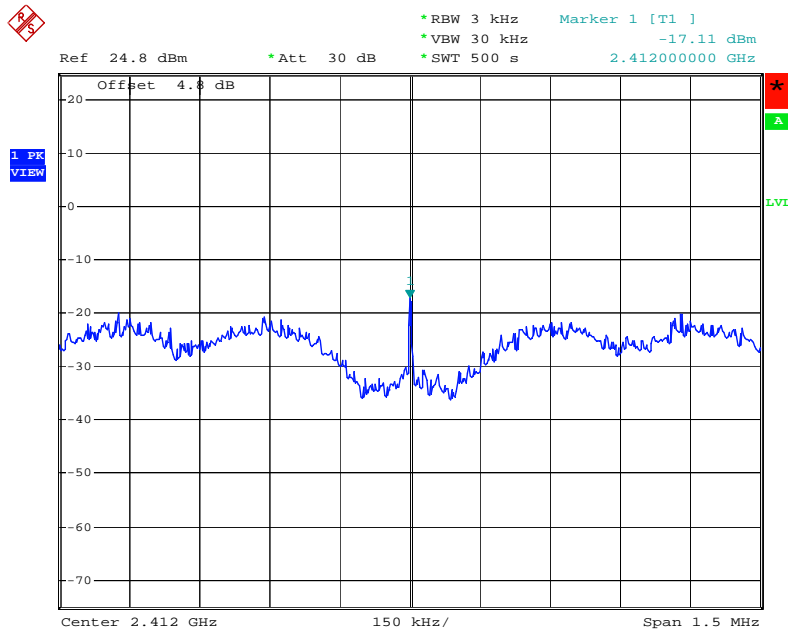


Date: 26.MAY.2008 18:31:04

Power Density Plot on Configuration of IEEE 802.11n-2.4G Ant. A & B (20MHz) / 2437 MHz

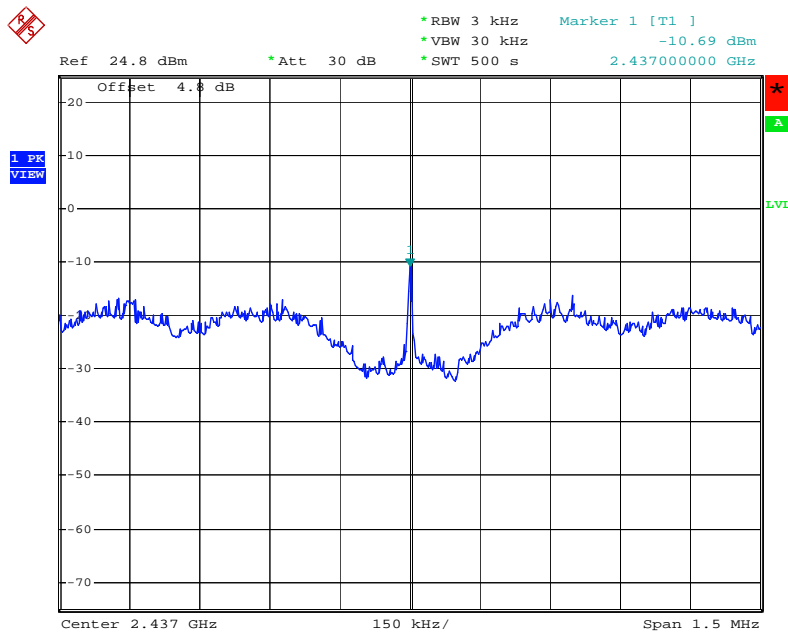


Date: 26.MAY.2008 18:30:19

Power Density Plot on Configuration of IEEE 802.11n-2.4G Ant. A & B (20MHz) / 2462 MHz

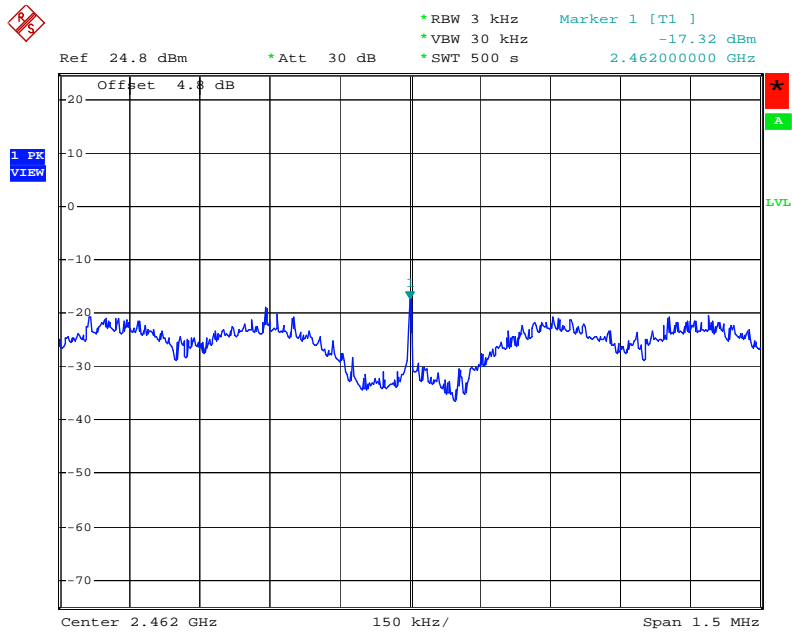


Date: 26.MAY.2008 18:32:16

Power Density Plot on Configuration of IEEE 802.11n-2.4G Ant. A & B (40MHz) / 2422 MHz

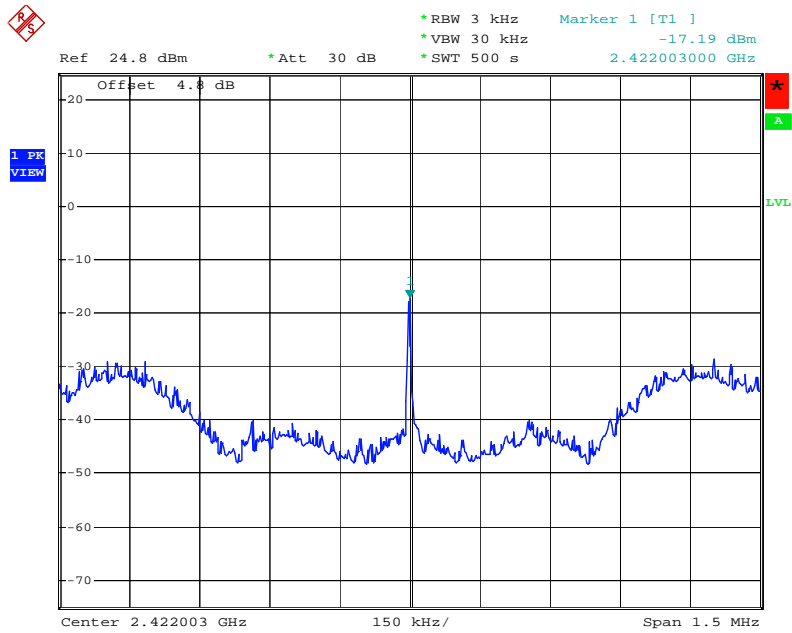


Date: 27.MAY.2008 17:39:33

Power Density Plot on Configuration of IEEE 802.11n-2.4G Ant. A & B (40MHz) / 2437 MHz

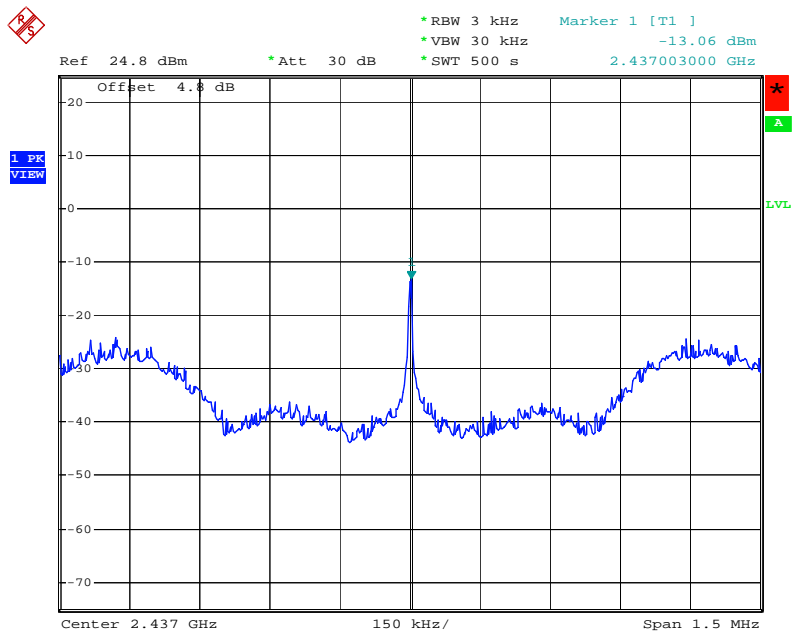

Date: 27.MAY.2008 17:40:34

Power Density Plot on Configuration of IEEE 802.11n-2.4G Ant. A & B (40MHz) / 2452 MHz

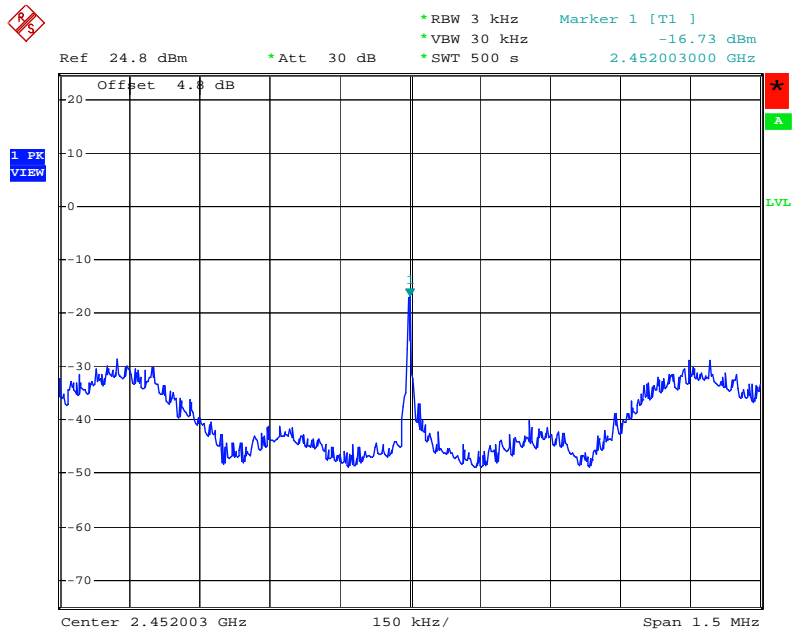

Date: 27.MAY.2008 17:47:31

3.4 6dB Spectrum Bandwidth Measurement

3.4.1 Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

3.4.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RB	100 kHz
VB	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

3.4.3 Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
2. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were used.
3. Measured the spectrum width with power higher than 6dB below carrier.
4. Measuring multiple antennas, the connectors are required to link with Spectrum Analyzer through a combiner.

3.4.4 Test Setup Layout

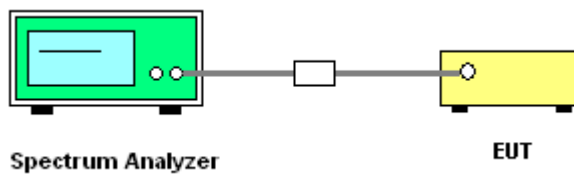

3.4.5 Test Deviation

There is no deviation with the original standard.

3.4.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

3.4.7 Test Result of 6dB Spectrum Bandwidth

Test date	May 31, 2008	Test Site No.	TH01-HY
Temperature	27	Humidity	55%
Test Engineer	Sam	Configuration	802.11n

For Single Chain:

Configuration of IEEE 802.11n-5G (20MHz)

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
149	5745 MHz	17.60	17.64	500	Complies
157	5785 MHz	17.60	17.64	500	Complies
165	5825 MHz	17.60	17.64	500	Complies

Configuration of IEEE 802.11n-5G (40MHz)

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
151	5755 MHz	36.56	36.32	500	Complies
159	5795 MHz	36.56	36.32	500	Complies

Configuration of IEEE 802.11n-2.4G (20MHz)

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	17.60	17.64	500	Complies
6	2437 MHz	17.60	17.64	500	Complies
11	2462 MHz	17.60	17.60	500	Complies

Configuration of IEEE 802.11n-2.4G (40MHz)

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
3	2422 MHz	36.40	36.24	500	Complies
6	2437 MHz	36.48	36.32	500	Complies
9	2452 MHz	36.40	36.32	500	Complies

For Two Chain:

Configuration of IEEE 802.11n-5G Ant. A & B (20MHz)

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
149	5745 MHz	16.36	17.56	500	Complies
157	5785 MHz	16.36	17.56	500	Complies
165	5825 MHz	16.36	17.56	500	Complies

Configuration of IEEE 802.11n-5G Ant. A & B (40MHz)

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
151	5755 MHz	36.32	36.32	500	Complies
159	5795 MHz	36.40	36.32	500	Complies

Configuration of IEEE 802.11n-2.4G Ant. A & B (20MHz)


Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	15.76	17.56	500	Complies
6	2437 MHz	15.76	17.56	500	Complies
11	2462 MHz	15.76	17.60	500	Complies

Configuration of IEEE 802.11n-2.4G Ant. A & B (40MHz)

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
3	2422 MHz	35.76	36.16	500	Complies
6	2437 MHz	35.84	36.16	500	Complies
9	2452 MHz	35.84	36.24	500	Complies


For Single Chain:

6 dB Bandwidth Plot on Configuration of IEEE 802.11n-5G (20MHz) / 5745 MHz

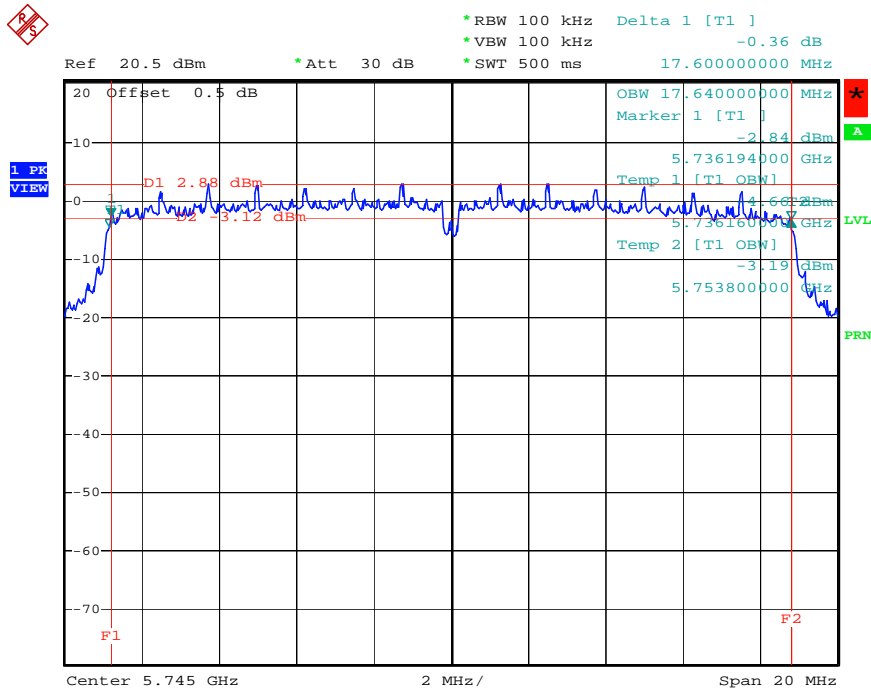


Date: 31.MAY.2008 18:16:59

6 dB Bandwidth Plot on Configuration of IEEE 802.11n-5G (20MHz) / 5785 MHz

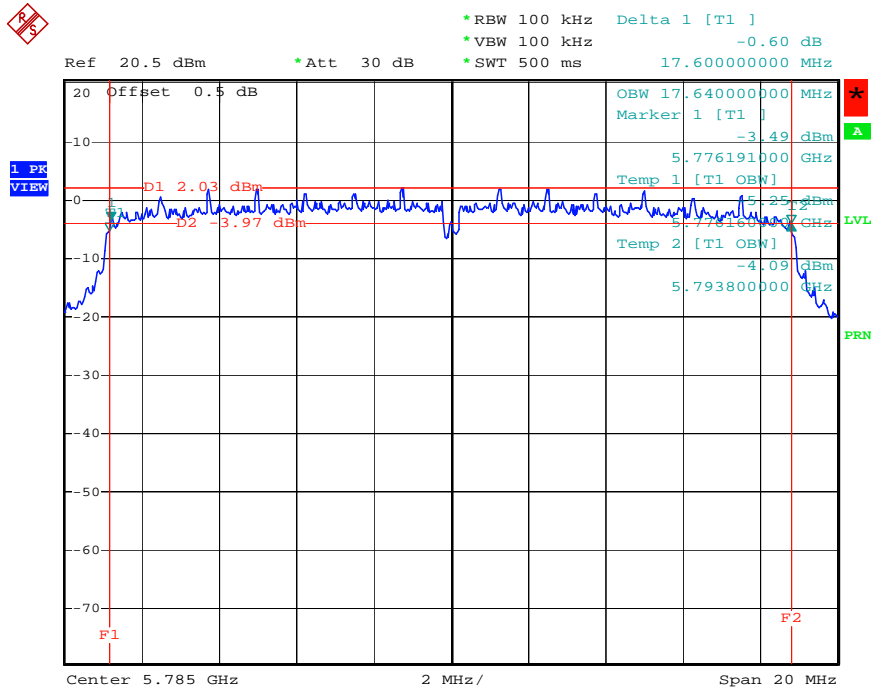


Date: 31.MAY.2008 19:09:10

6 dB Bandwidth Plot on Configuration of IEEE 802.11n-5G (20MHz) / 5825 MHz

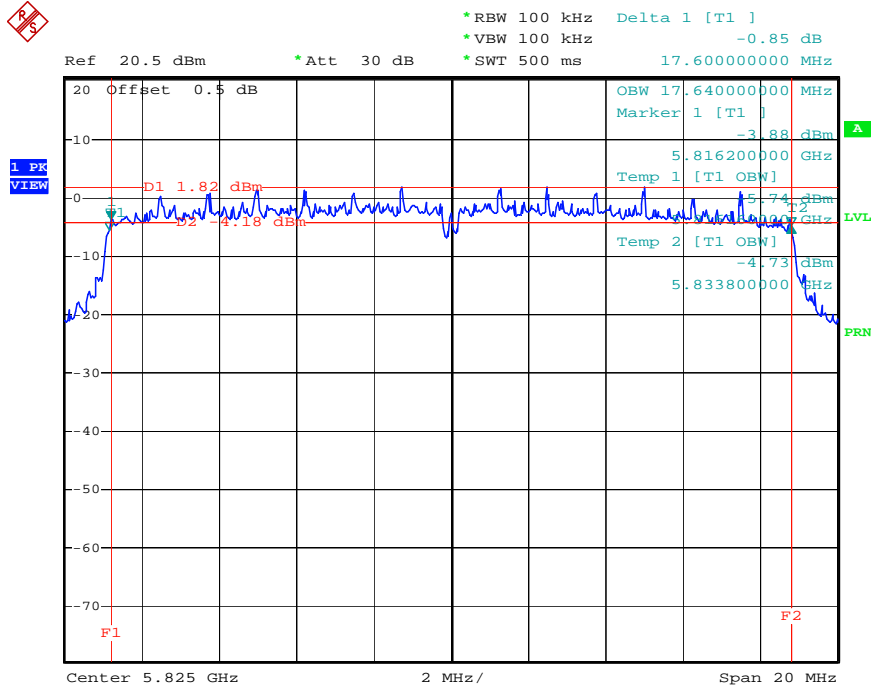


Date: 31.MAY.2008 19:11:10

6 dB Bandwidth Plot on Configuration of IEEE 802.11n-5G (40MHz) / 5755 MHz

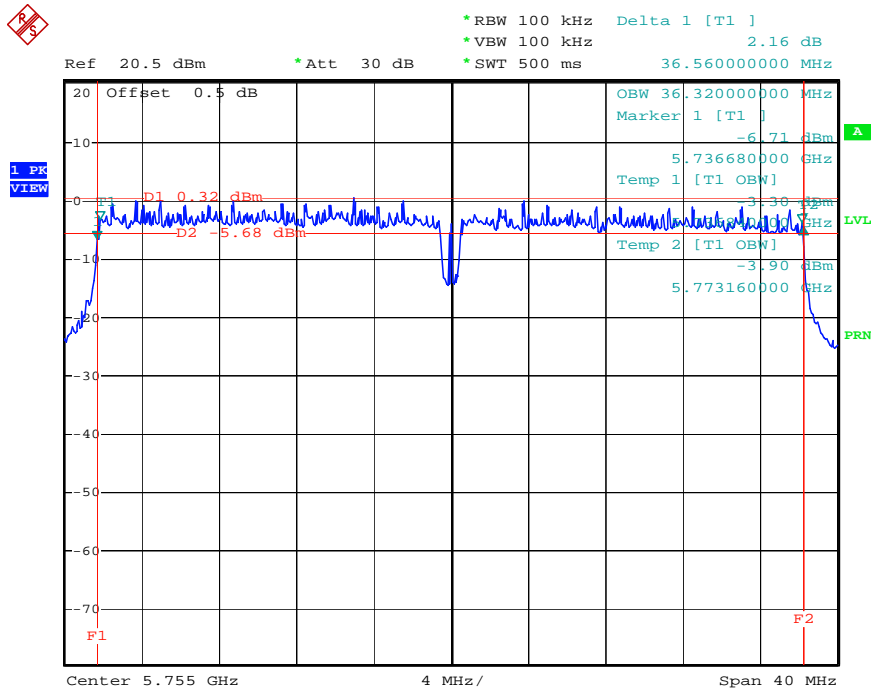


Date: 31.MAY.2008 19:44:19

6 dB Bandwidth Plot on Configuration of IEEE 802.11n-5G (40MHz) / 5795 MHz

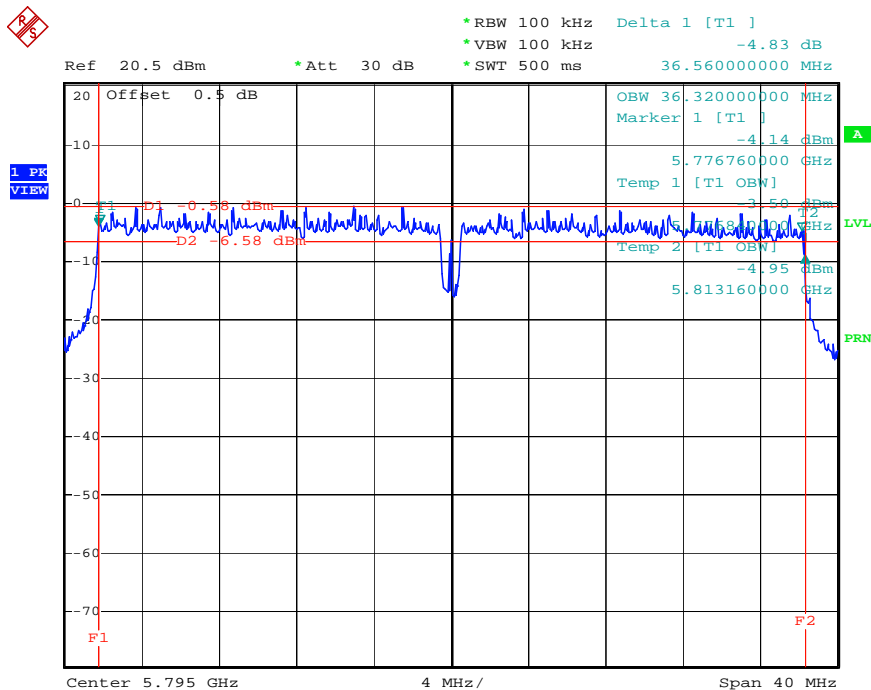


Date: 31.MAY.2008 19:39:26

6 dB Bandwidth Plot on Configuration of IEEE 802.11n-2.4G (20MHz) / 2412 MHz

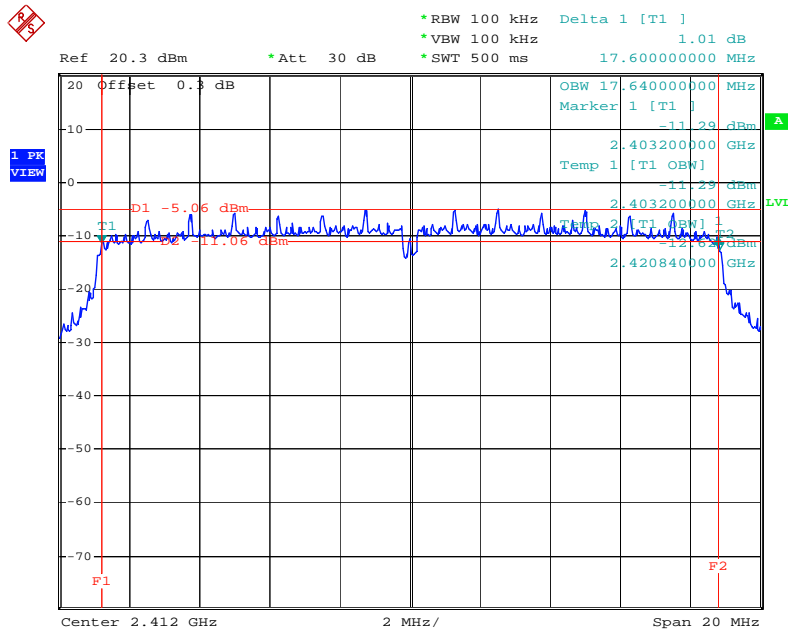


Date: 26.MAY.2008 16:42:08

6 dB Bandwidth Plot on Configuration of IEEE 802.11n-2.4G (20MHz) / 2437 MHz

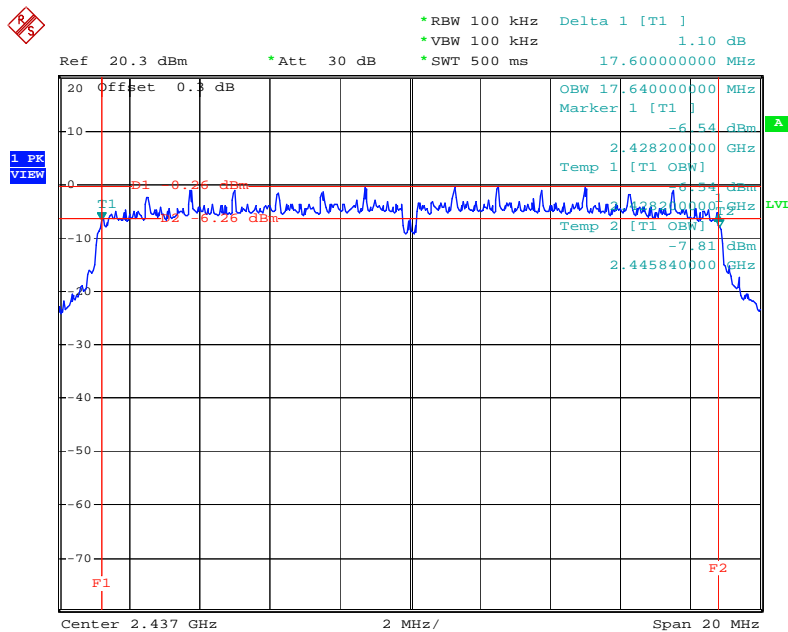


Date: 26.MAY.2008 16:43:12

6 dB Bandwidth Plot on Configuration of IEEE 802.11n-2.4G (40MHz) / 2422 MHz

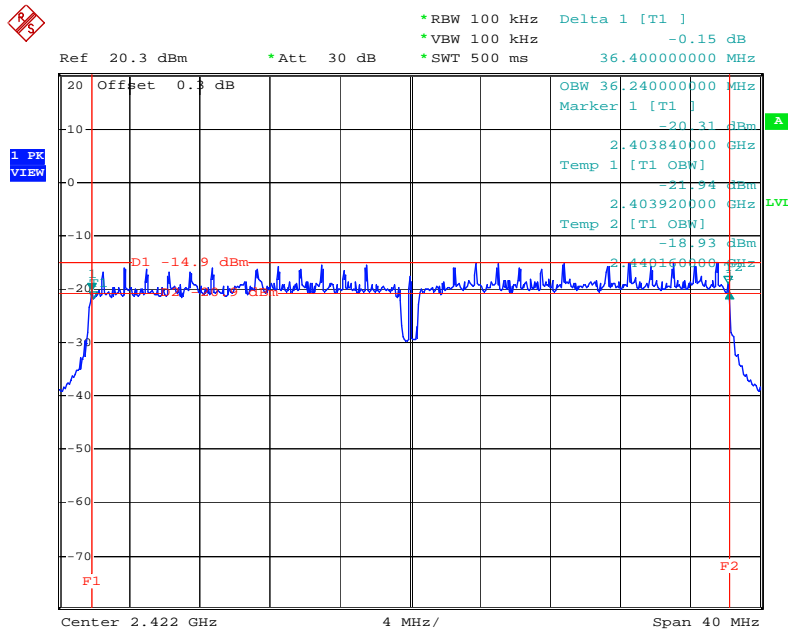


Date: 26.MAY.2008 16:57:09

6 dB Bandwidth Plot on Configuration of IEEE 802.11n-2.4G (40MHz) / 2437 MHz

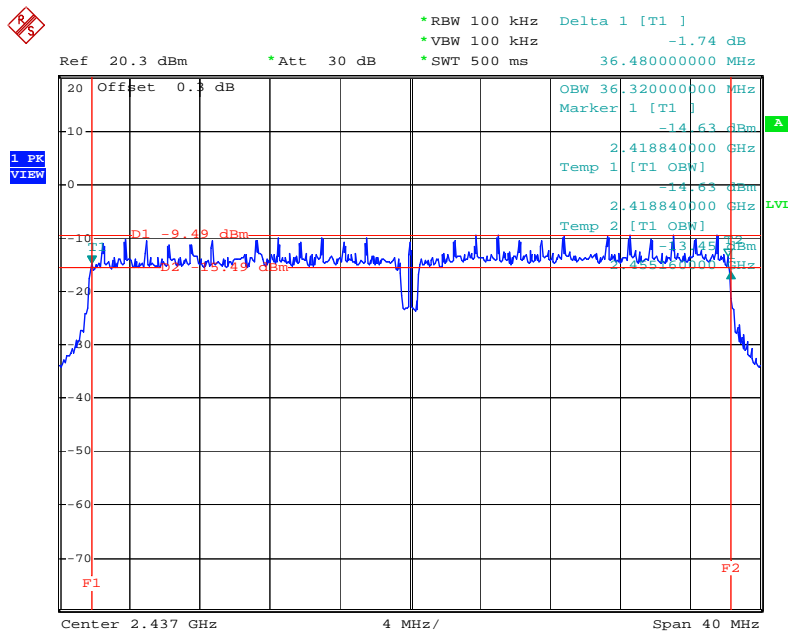

Date: 26.MAY.2008 16:59:27


6 dB Bandwidth Plot on Configuration of IEEE 802.11n-2.4G (40MHz) / 2452 MHz

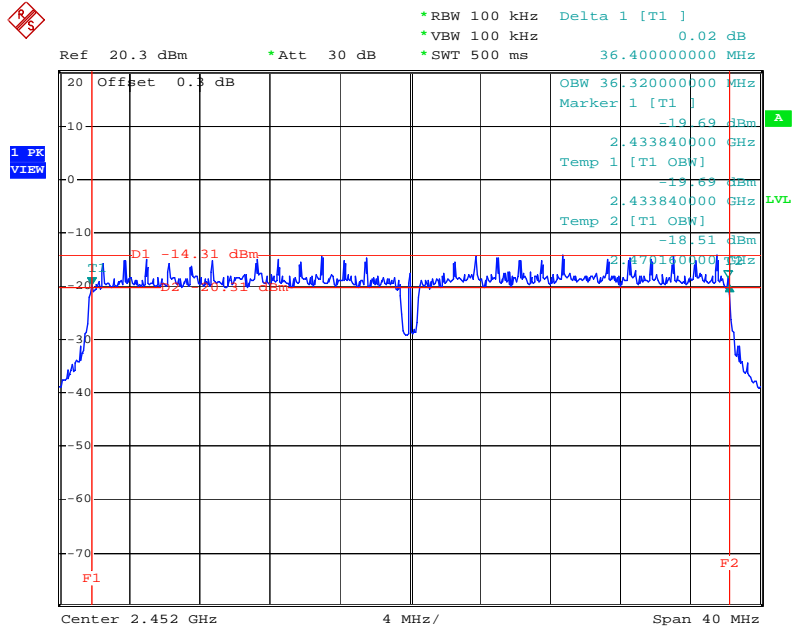

Date: 26.MAY.2008 17:03:54


For Two Chain:

6 dB Bandwidth Plot on Configuration of IEEE 802.11n-5G Ant. A & B (20MHz) / 5745 MHz

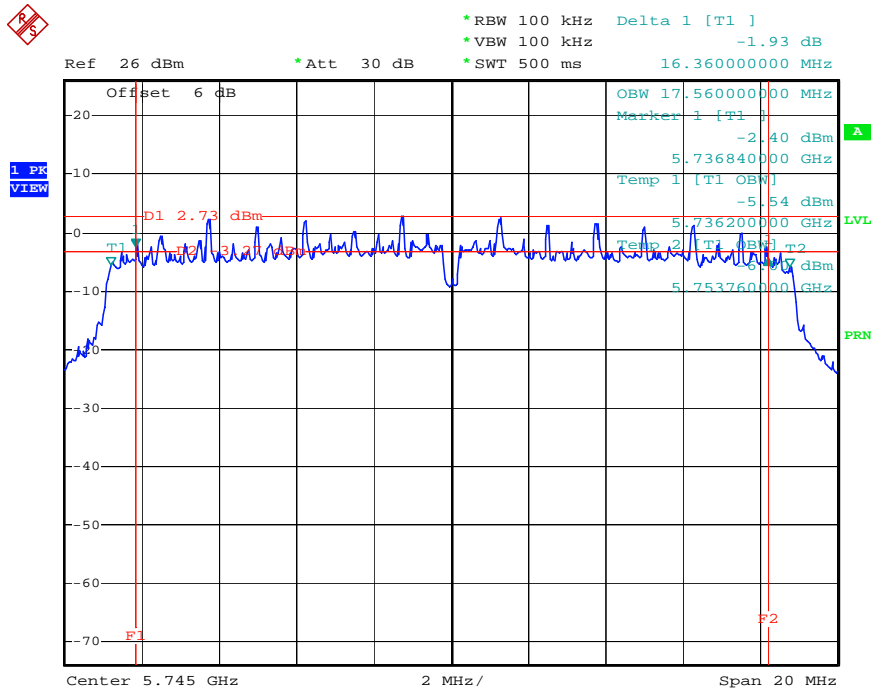


Date: 31.MAY.2008 20:53:08

6 dB Bandwidth Plot on Configuration of IEEE 802.11n-5G Ant. A & B (20MHz) / 5785 MHz

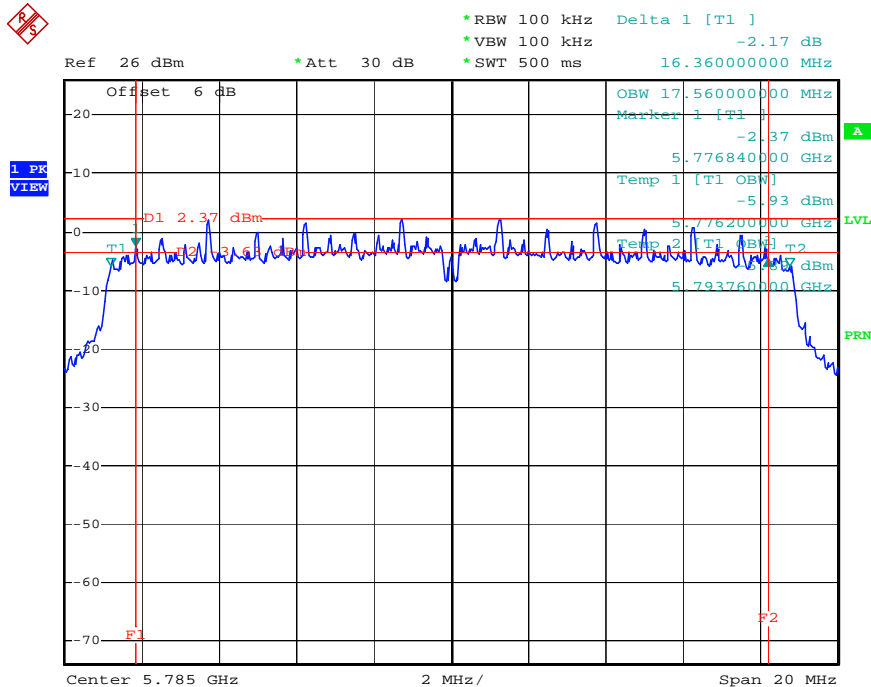


Date: 31.MAY.2008 20:47:28

6 dB Bandwidth Plot on Configuration of IEEE 802.11n-5G Ant. A & B (20MHz) / 5825 MHz

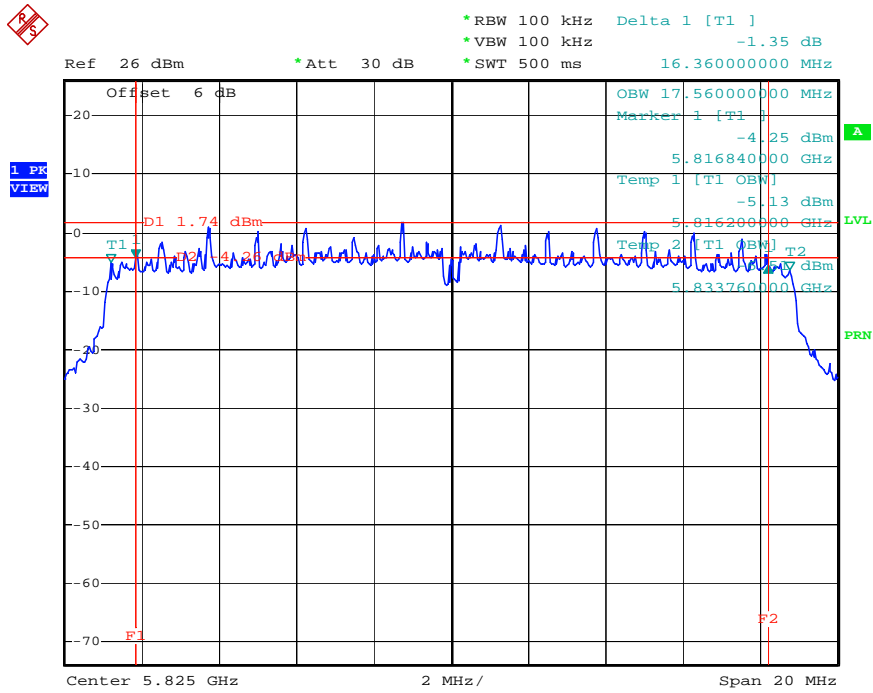


Date: 31.MAY.2008 20:41:59

6 dB Bandwidth Plot on Configuration of IEEE 802.11n-5G Ant. A & B (40MHz) / 5755 MHz

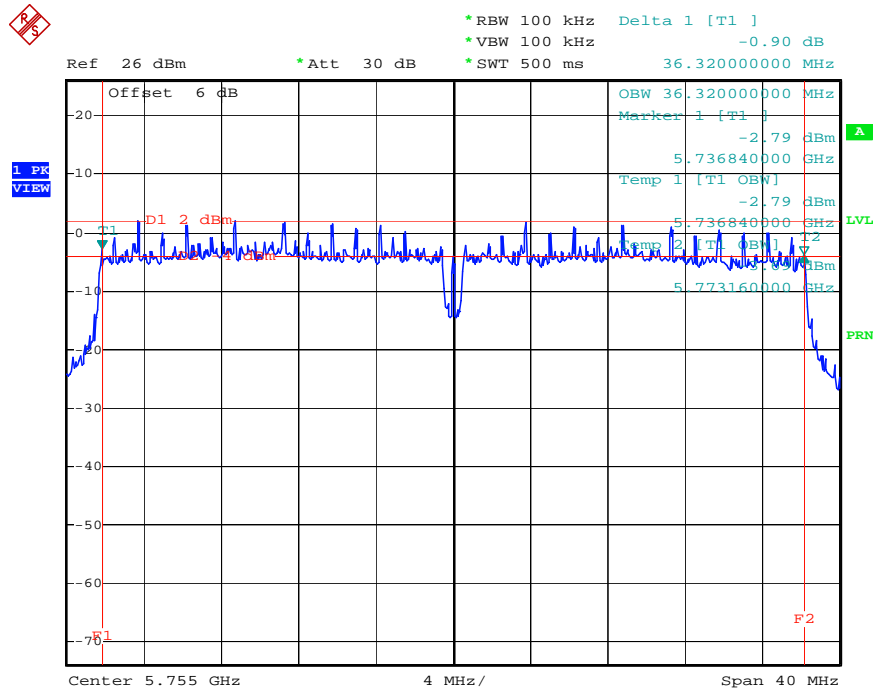


Date: 31.MAY.2008 21:58:14

6 dB Bandwidth Plot on Configuration of IEEE 802.11n-5G Ant. A & B (40MHz) / 5795 MHz

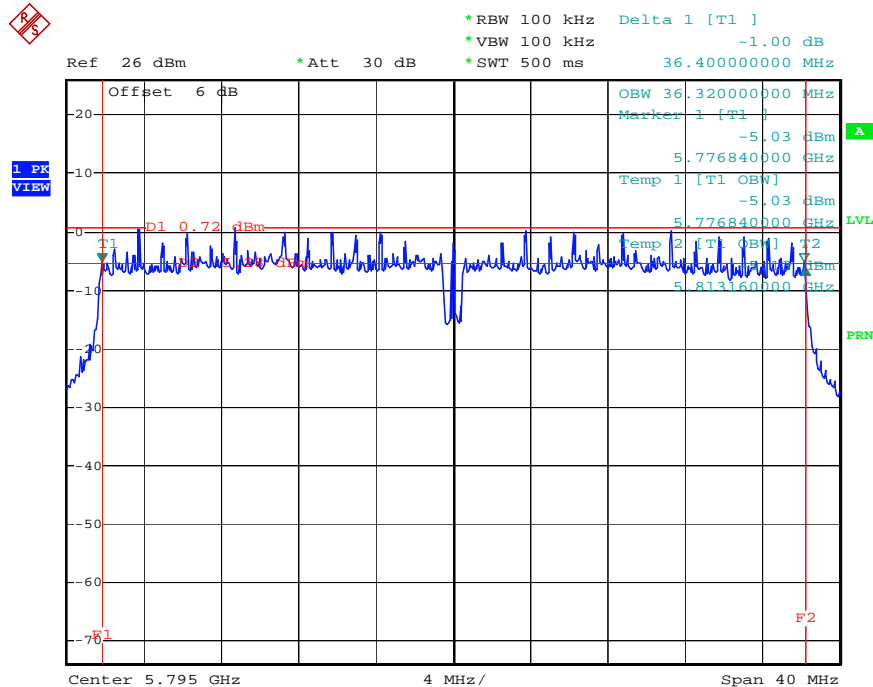


Date: 31.MAY.2008 21:53:31

6 dB Bandwidth Plot on Configuration of IEEE 802.11n-2.4G Ant. A & B (20MHz) / 2412 MHz

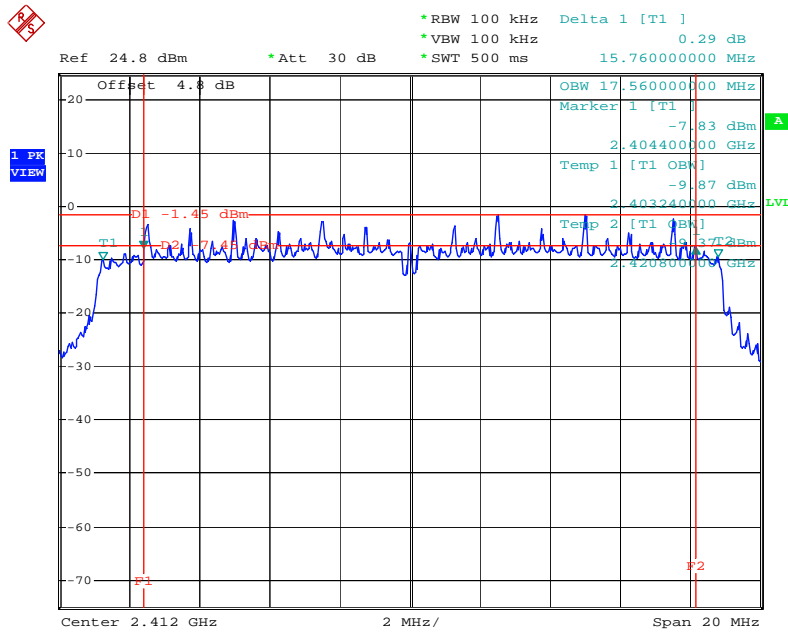


Date: 26.MAY.2008 18:20:38

6 dB Bandwidth Plot on Configuration of IEEE 802.11n-2.4G Ant. A & B (20MHz) / 2437 MHz

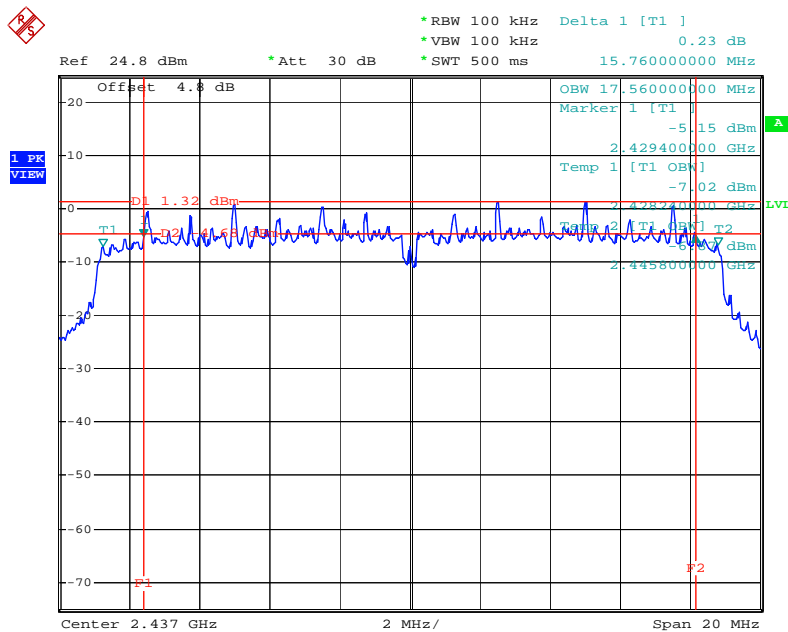


Date: 26.MAY.2008 18:29:22

6 dB Bandwidth Plot on Configuration of IEEE 802.11n-2.4G Ant. A & B (20MHz) / 2462 MHz

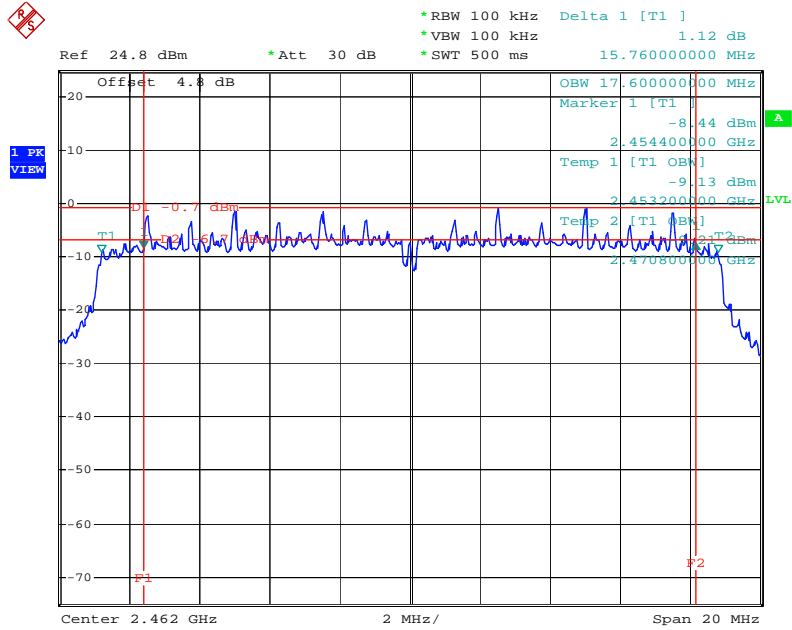


Date: 26.MAY.2008 18:17:36

6 dB Bandwidth Plot on Configuration of IEEE 802.11n-2.4G Ant. A & B (40MHz) / 2422 MHz

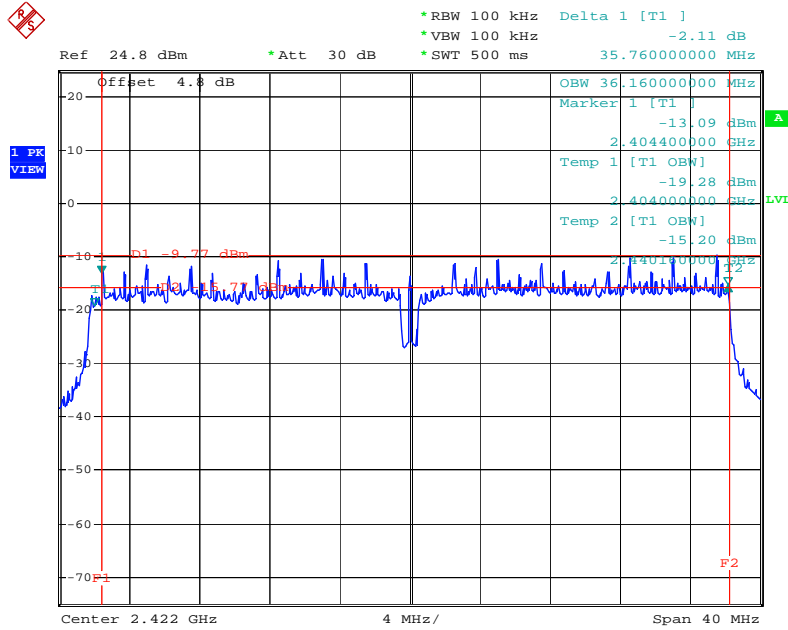


Date: 27.MAY.2008 17:36:12

6 dB Bandwidth Plot on Configuration of IEEE 802.11n-2.4G Ant. A & B (40MHz) / 2437 MHz

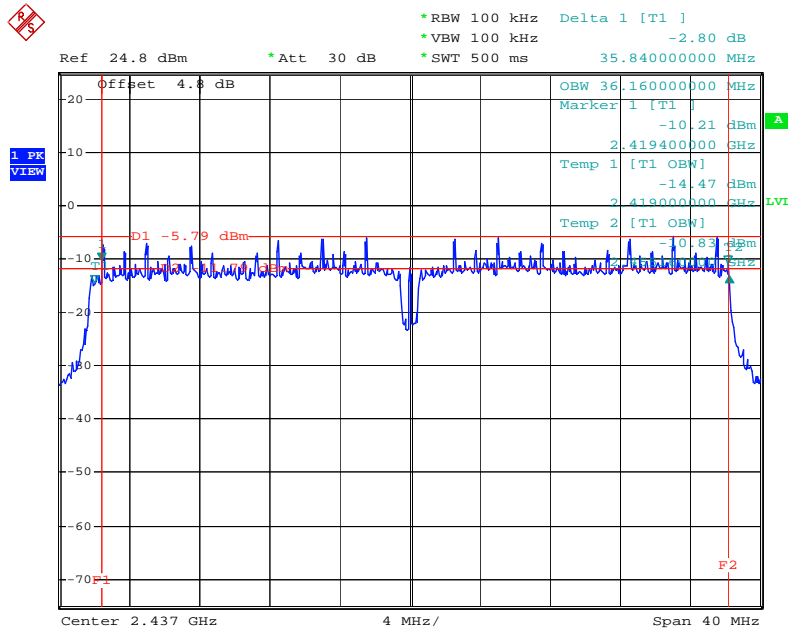

Date: 27.MAY.2008 17:42:17

6 dB Bandwidth Plot on Configuration of IEEE 802.11n-2.4G Ant. A & B (40MHz) / 2452 MHz

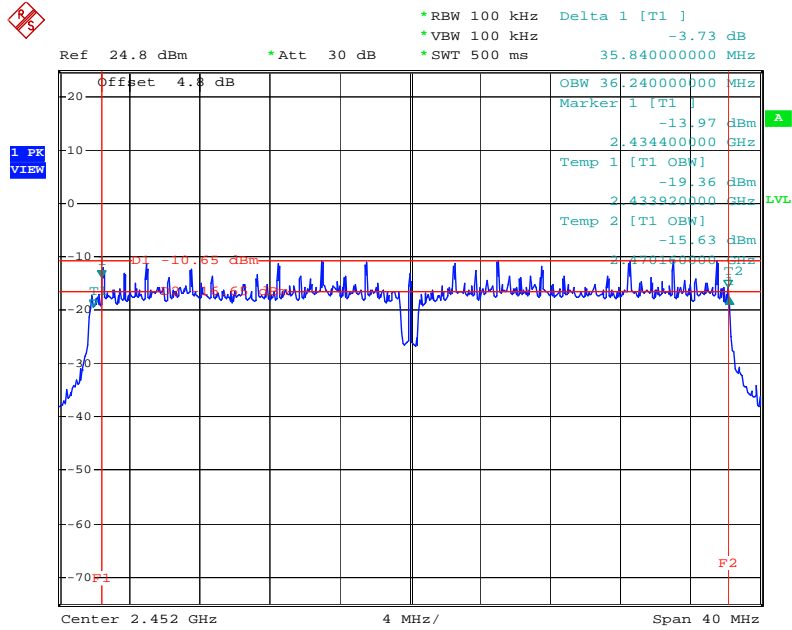

Date: 27.MAY.2008 17:43:49

3.5 Radiated Emissions Measurement

3.5.1 Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

3.5.2 Measuring Instruments and Setting

Please refer to section 4 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	100KHz / 100KHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.5.3 Test Procedures


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

3.5.4 Test Setup Layout

For radiated emissions below 30MHz

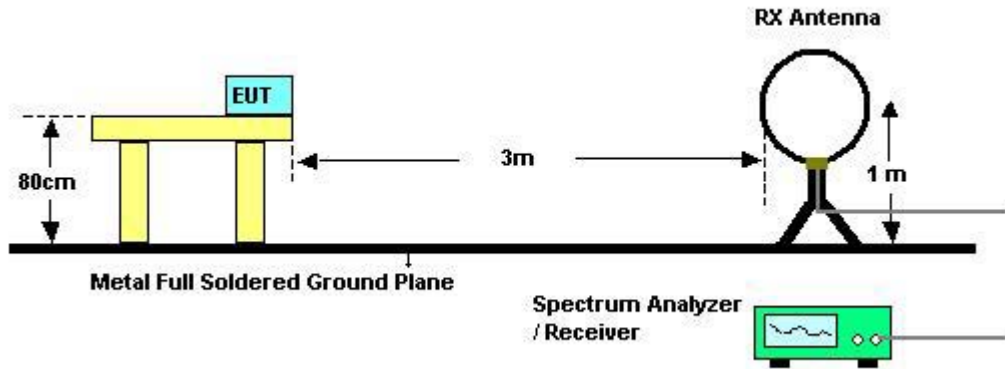

For radiated emissions above 30MHz

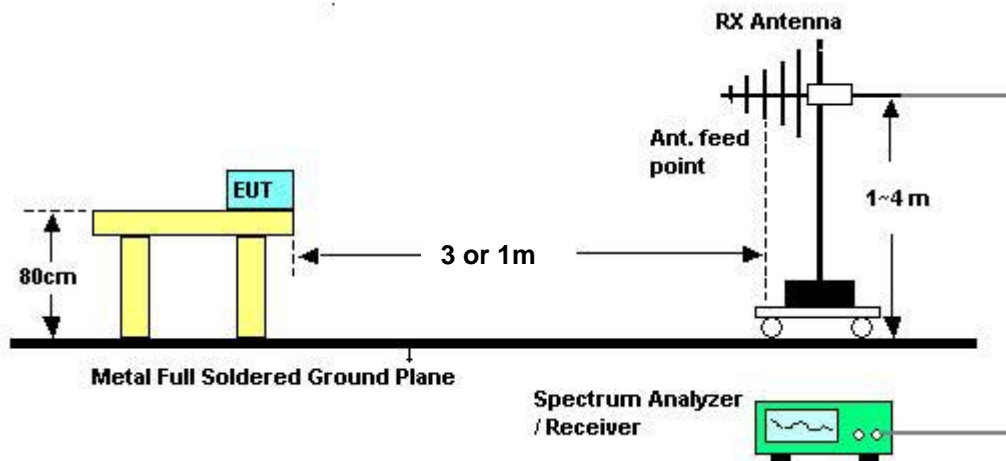

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [9.54 dB].

3.5.5 Test Deviation

There is no deviation with the original standard.

3.5.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

3.5.7 Results of Radiated Emissions (9kHz~30MHz)

Test date	May 30, 2008	Test Site No.	03CH03-HY
Temperature	26	Humidity	54%
Test Engineer	Duncan		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

3.5.8 Results of Radiated Emissions (30MHz~1GHz)


Test date	May 30, 2008	Test Site No.	03CH03-HY
Temperature	26	Humidity	54%
Test Engineer	Duncan	Configuration	(Adapter: DSA-20D-12 3 120150)

Horizontal

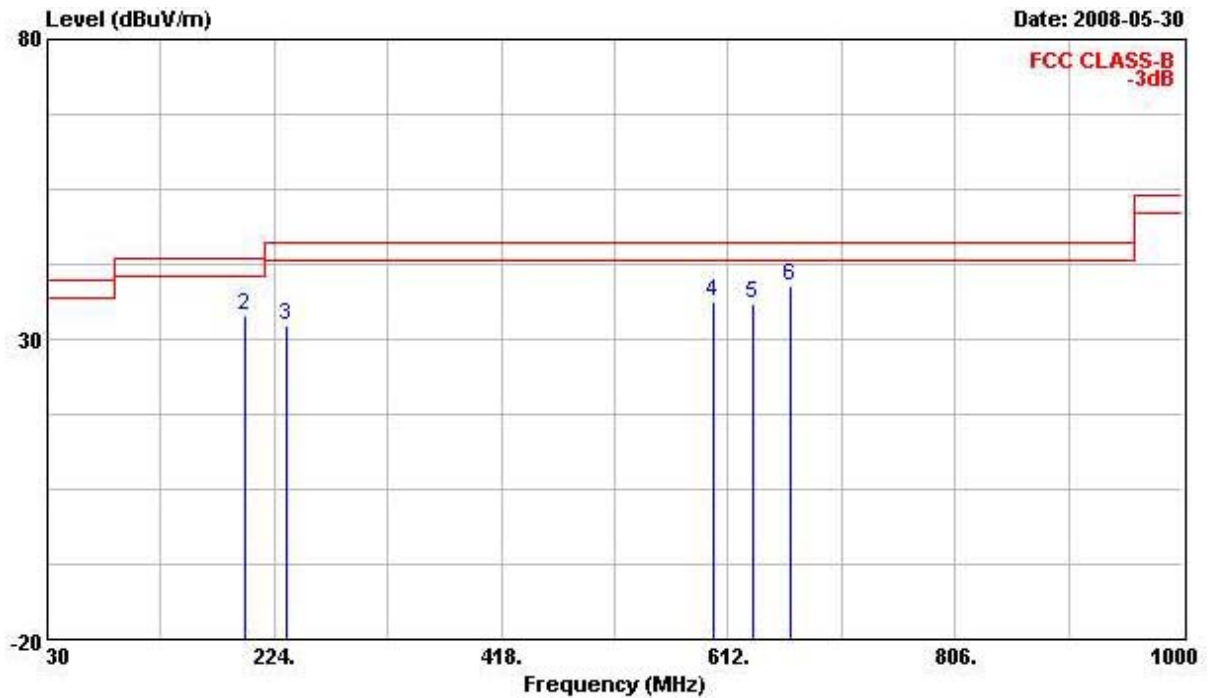

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 @	30.010	33.63	-6.37	40.00	41.82	18.48	1.01	27.68	Peak
2	198.780	33.97	-9.53	43.50	50.05	9.61	2.38	28.07	Peak
3	233.700	32.43	-13.57	46.00	47.21	10.84	2.62	28.23	Peak
4	599.390	36.29	-9.71	46.00	41.67	19.30	4.45	29.14	Peak
5	633.340	36.07	-9.93	46.00	41.76	19.52	4.28	29.49	Peak
6	665.350	38.85	-7.15	46.00	44.21	19.73	4.45	29.55	Peak

Vertical

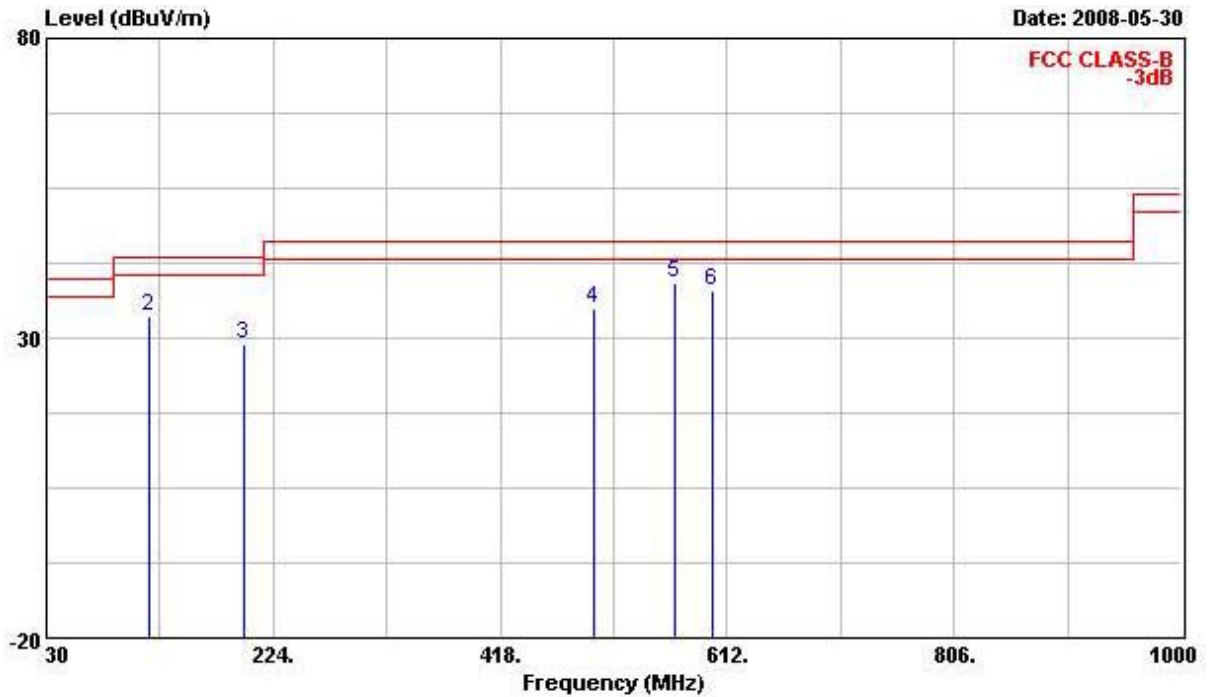

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	30.010	34.65	-5.35	40.00	42.84	18.48	1.01	27.68	QP
2	118.270	33.69	-9.81	43.50	47.09	12.61	1.83	27.84	Peak
3	198.780	29.05	-14.45	43.50	45.13	9.61	2.38	28.07	Peak
4	498.510	34.94	-11.06	46.00	42.01	18.09	3.76	28.92	Peak
5	567.380	39.30	-6.70	46.00	44.80	19.30	4.09	28.90	Peak
6	599.390	37.87	-8.13	46.00	43.25	19.30	4.45	29.14	Peak

Note:


The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


Test date	May 30, 2008	Test Site No.	03CH03-HY
Temperature	26	Humidity	54%
Test Engineer	Duncan	Configuration	(Adapter: DSA-15P-12 US 120150)

Horizontal

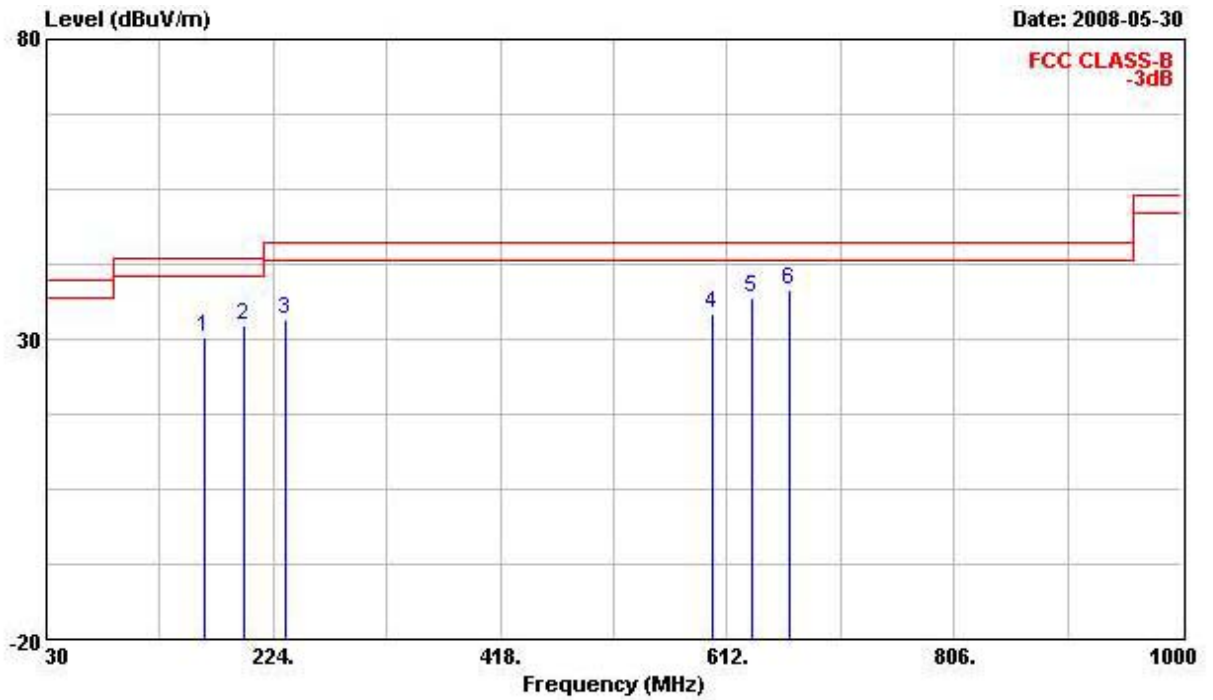

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB	
1	164.830	30.31	-13.19	43.50	46.23	9.89	2.17	27.98	Peak
2	198.780	32.14	-11.36	43.50	48.22	9.61	2.38	28.07	Peak
3	233.700	33.44	-12.56	46.00	48.22	10.84	2.62	28.23	Peak
4	599.390	34.32	-11.68	46.00	39.70	19.30	4.45	29.14	Peak
5	633.340	37.04	-8.96	46.00	42.73	19.52	4.28	29.49	Peak
6	665.350	38.16	-7.84	46.00	43.52	19.73	4.45	29.55	Peak

Vertical

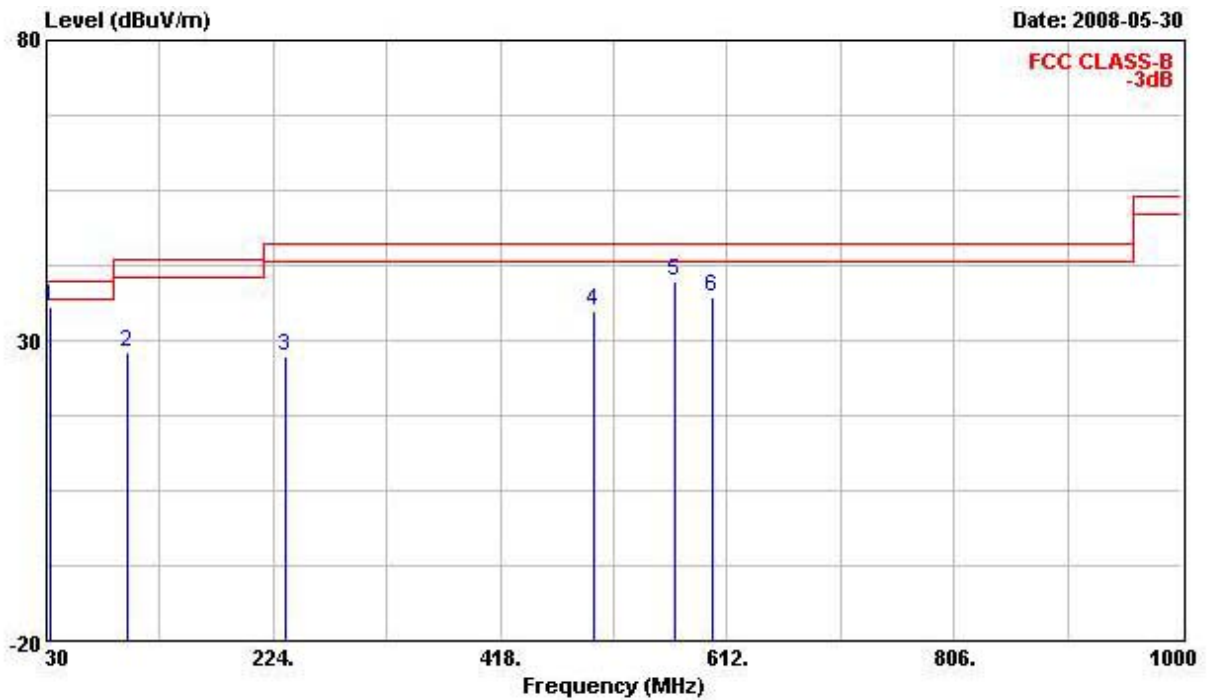

	Freq	Level	Over Limit	Limit Line	ReadAntenna	Cable	Preamp	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	
1 @	32.910	35.43	-4.57	40.00	45.39	16.71	1.03	27.70 QP
2	98.870	28.17	-15.33	43.50	43.24	11.03	1.72	27.82 Peak
3	233.700	27.46	-18.54	46.00	42.24	10.84	2.62	28.23 Peak
4	498.510	34.95	-11.05	46.00	42.02	18.09	3.76	28.92 Peak
5 @	567.380	39.80	-6.20	46.00	45.30	19.30	4.09	28.90 Peak
6	599.390	37.24	-8.76	46.00	42.62	19.30	4.45	29.14 Peak

Note:


The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


Test date	May 01, 2008	Test Site No.	03CH03-HY
Temperature	26	Humidity	54%
Test Engineer	Duncan	Configuration	(Power Supply: POE20U-560(G) -R)

Horizontal

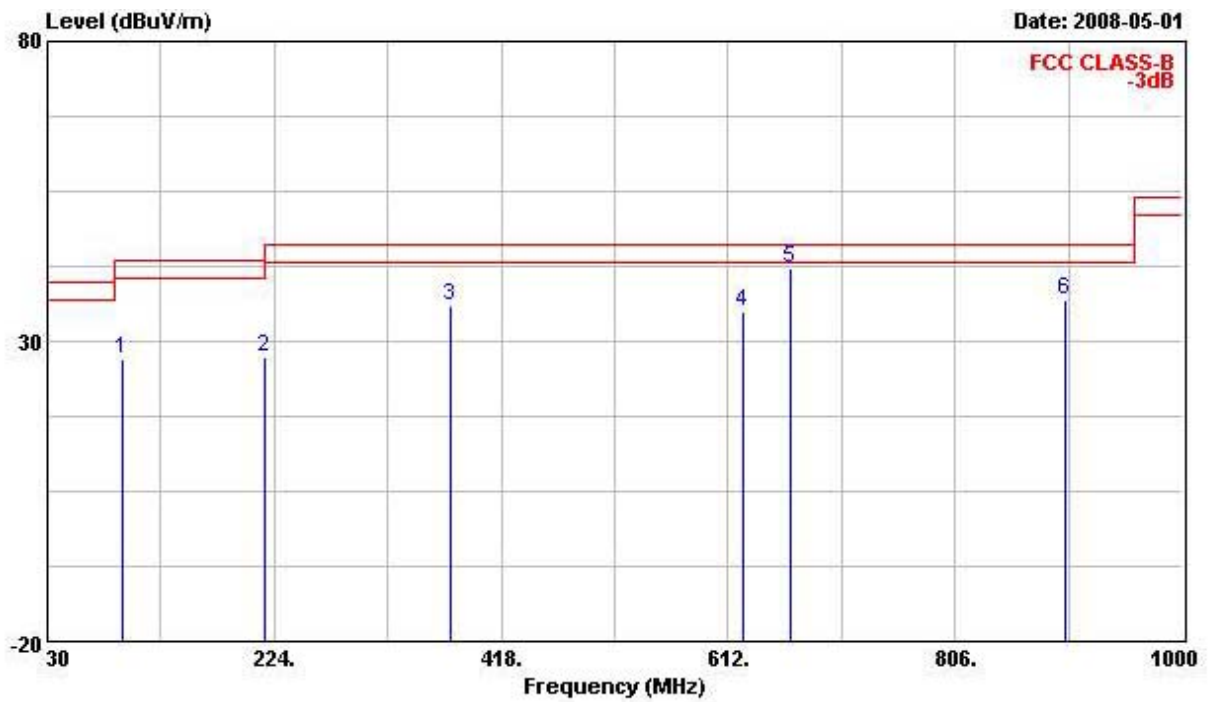

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	94.990	27.16	-16.34	43.50	42.95	10.35	1.68	27.81	Peak
2	215.270	27.24	-16.26	43.50	43.61	9.27	2.52	28.15	Peak
3	374.350	36.00	-10.00	46.00	45.72	15.62	3.42	28.76	Peak
4	625.580	34.80	-11.20	46.00	40.54	19.47	4.29	29.50	Peak
5	665.350	42.26	-3.74	46.00	47.62	19.73	4.45	29.55	Peak
6	901.060	36.81	-9.19	46.00	39.85	21.04	5.25	29.33	Peak

Vertical

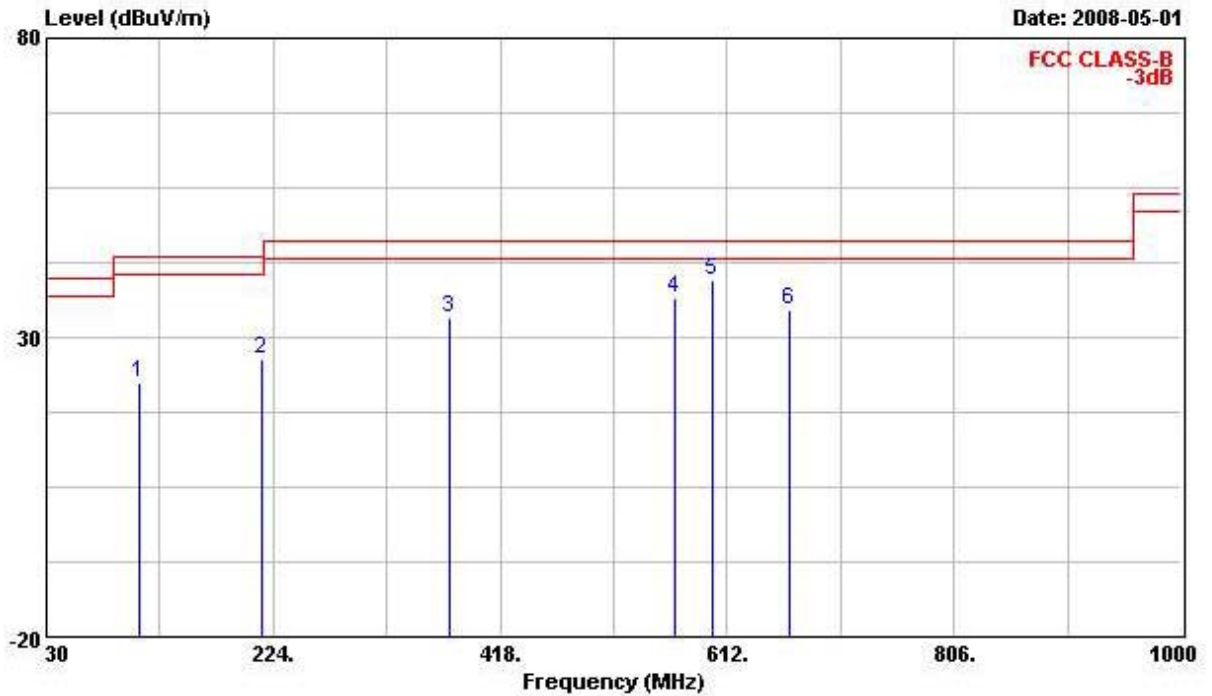

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	109.540	22.36	-21.14	43.50	36.00	12.40	1.76	27.80	Peak
2	214.300	26.38	-17.12	43.50	42.71	9.29	2.53	28.15	Peak
3	374.350	33.36	-12.64	46.00	43.08	15.62	3.42	28.76	Peak
4	567.380	36.47	-9.53	46.00	41.97	19.30	4.09	28.90	Peak
5	599.390	39.62	-6.38	46.00	45.00	19.30	4.45	29.14	Peak
6	665.350	34.75	-11.25	46.00	40.11	19.73	4.45	29.55	Peak

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.