


<b>Applicant:</b>	CUSTOM S.p.A Via Berettine 2/B – 43010 Fontevivo – Parma - Italy Phone: 0521 680111		
<b>Trademark:</b>			
<b>Test item:</b>	Printer MP RANGER USB TH FI BLACK IT		
<b>Identification / Type No.:</b>	MP350		
<b>FCC ID:</b>	OAH-5040120		
<b>Order content:</b>	RF exposure evaluation according to the following standard:		
<b>Test specification:</b>	47 CFR § 1.1310 47 CFR § 2.1091		
<b>Date of receipt:</b>	22/02/2022		
<b>Internal storage No.:</b>	A003216149-003		
<b>Testing period:</b>	04/04/2022		
<b>Place of testing:</b>	TÜV Rheinland Italia S.r.l. Via E. Mattei, 3 20005 Pogliano Milanese – Milano – Italy		
<b>Testing laboratory:</b>	TÜV Rheinland Italia S.r.l. Via E. Mattei, 3 20005 Pogliano Milanese – Milano – Italy		
<b>Test result:</b>	PASS		
<b>Tested by:</b>	Francesco Lombardi	<b>Authorized by:</b>	Giovanni Molteni
<b>Date:</b>	16/09/2022	<b>Date:</b>	16/09/2022
<b>Position</b>	Sachverständige(r)/Expert	<b>Position</b>	Sachverständige(r)/Expert
<b>Condition of the test item at delivery:</b>	Test item complete and undamaged		
<p>The test results reported in this test report shall refer only to the samples tested.          This report may not be partially reproduced, except with the prior written permission of the issuing Laboratory.          TRI refuses any responsibility about information supplied by the customer contained in this test report.          TRI is not responsible for the sampling phase.</p>			



The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system. Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.

As contractually agreed, this document has been signed digitally only. TUV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TUV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged.


Test clauses with remark of \* are subcontracted to qualified subcontractors and described under the respective test clause in the report. Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.

Unless otherwise agreed with the customer, a conformity assessment is always carried out based on the applied standards. At the customer's request, the statement on the conformity of the product tested in this test report is carried out according to the criteria/requirements of the applied standards. Evaluation conditions deviating from these are documented separately in the respective chapters.

## 0. Table of Contents

0. Table of Contents .....	3
1. General description of test item(s) .....	4
2. Equipment using during test .....	6
3. Radio module identification .....	8
4. Channel list Wi-Fi .....	11
5. Applied reference standards.....	12
6. FCC Calculation method and limits .....	13
7. Operating modes .....	16
8. EUT configuration .....	18
9. Climatic conditions.....	18
10. Statement of the measurement uncertainty .....	19
11. Measurement uncertainty.....	19
12. Example for interpretation of measuring results .....	20
13. Result summary section .....	21
14. Change history .....	21
15. RF exposure evaluation.....	22
16. List of test equipment.....	35

**1. General description of test item(s)**

<b>Description</b>	Printer MP RANGER USB TH FI BLACK IT
<b>Model</b>	MP350
<b>Serial number</b>	ESB1026121280071
<b>Part number</b>	911MM010100P33
<b>Manufacturer</b>	CUSTOM S.p.A
<b>Country of manufacturer</b>	Italy
<b>Trademark</b>	
<b>Power supply</b>	DC Power
<b>Supply voltage</b>	Internal Battery (Technology: Lithium-ion)
<b>Battery model name</b>	INR18650-2S1P
<b>Battery voltage-capacity</b>	7.2V 2.6Ah 18.72Wh
<b>Battery cycle</b>	750
<b>Battery life (print)</b>	720 minutes x 300 tickets
<b>Manufacturer (Battery)</b>	Shenzhen Hypercell Co.,LTD
<b>Equipment type</b>	Intentional radiator
<b>Hardware version</b>	St145-c

<b>Software version</b>	1.22
<b>Dimensions</b>	149(L) x 53(H) x 122(P) mm
<b>Weight</b>	475gr (with battery included)
<b>Printing width</b>	76.2 mm and 80 mm
<b>Operating temperature</b>	From -10°C to +50°C
<b>Operating humidity (RH)</b>	Form 10% to 95%
<b>Test sample obtaining:</b>	<input checked="" type="checkbox"/> Sampling by customer <input type="checkbox"/> Sampling by TÜV Rheinland Group <input type="checkbox"/> others:

## 2. Equipment using during test

### Equipment under test

No.	Product type	Manufacturer	Model	Comments
1	Printer MP RANGER USB TH FI BLACK IT	CUSTOM S.p.A.	MP350	---

### Auxiliary Equipment / Peripherals

Nr.	Product type	Manufacturer	Model	Comments
1	Laboratory PC	DELL	---	- used to enable wireless communication (Bluetooth Low Energy, Bluetooth Enhanced Data Rate & Wi-Fi) on EUT, via software Printerset.
				- used ESP_RF_test_tool_v1.1.0, for setting the radio module in the following radio communications: BLE, BT EDR & Wi-Fi
2	Cradle 1 slot P-Ranger	CUSTOM S.p.A	---	- used to charge battery
3	Switching power adapter	CUSTOM S.p.A	POWER SUPPLY FOR CRADLE 4 SLOTS P-RANGER	- use to power supply cradle




Input/Output ports

No.	Name	Type	Cable length	Cable shielded	Comments
1	Enclosure port	Plastic	---	---	closed by snaps
2	AC power port	---	---	---	port not present
3	DC power port	Internal battery	---	---	Battery model: INR18650-2S1P
4	Signal control port	---	---	---	port not present
5	Wired network port	---	---	---	port not present

EUT modification

None

### 3. Radio module identification


Wi-Fi module & Antenna technical data	
Module manufacturer	 <b>ESPRESSIF</b>
Radio type	Transceiver
Chip radio	ESP32-PICO-D4
Type of equipment	<input type="checkbox"/> stand-alone equipment <input checked="" type="checkbox"/> combined equipment <input type="checkbox"/> multi-radio equipment
Protocols	802.11 b/g/n (802.11n up to 150 Mbps)
Frequency range	2400 – 2500GHz
Channel bandwidth	22MHz
Channel separation	5MHz
Number of channel	11
Modulation type	<input type="checkbox"/> Frequency hopping (FHSS) equipment <input checked="" type="checkbox"/> Wideband data transmission (non-FHSS equipment) (DSS, CCK, OFDM, HT20, HT40, MCS32)
Sensitivity	DSSS, 1 Mbps -98dBm CCK, 11 Mbps -91dBm OFDM, 6 Mbps -93dBm OFDM, 54 Mbps -75dBm HT20, MCS0 -93dBm HT20, MCS7 -73dBm HT40, MCS0 -90dBm HT40, MCS7 -70dBm MCS32 -89dBm
Transmit operating mode	<input checked="" type="checkbox"/> single antenna <input type="checkbox"/> multiple antennas, no beamforming <input type="checkbox"/> multiple antennas, with beamforming






With regard adaptivity, the type of equipment	<input type="checkbox"/> non-adaptive equipment <input type="checkbox"/> adaptive equipment <input checked="" type="checkbox"/> Equipment that can operate in both an adaptive and non-adaptive mode;
Spectrum access mechanism	<input type="checkbox"/> LBT (Listen Before Talk) Technique <input type="checkbox"/> DAA (Detect And Avoid) Technique <input checked="" type="checkbox"/> Duty cycle
Environmental equipment	<input checked="" type="checkbox"/> Test only in normal conditions <input type="checkbox"/> Test in normal conditions and extreme conditions
Equipment that support a geo-location capability	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No



Antenna	Description:	AMCA31-2R450G-S1F-T3
	Peak Gain:	0.5 dBi
	Type:	<input type="checkbox"/> External antenna <input checked="" type="checkbox"/> Dedicated antenna <input type="checkbox"/> Integral antenna
	Frequency	2450 MHz
	Impedance	50 Ω
	Manufacturer	

Antenna	Description:	Chip-Antenna WE-MCA
	Peak Gain:	0.5 dBi
	Type:	<input type="checkbox"/> External antenna <input checked="" type="checkbox"/> Dedicated antenna <input type="checkbox"/> Integral antenna
	Frequency	2400 - 2500 MHz
	Impedance	50 Ω
	Manufacturer	

Note: The test has been performed with Antenna AMCA31-2R450G-S1F-T3, manufacturer Abracon.

#### 4. Channel list Wi-Fi

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
<b>1</b>	<b>2412</b>	<b>6</b>	<b>2437</b>	<b>11</b>	<b>2462</b>
2	2417	7	2442		
<b>3</b>	<b>2422</b>	8	2447		
4	2427	<b>9</b>	<b>2452</b>		
5	2432	10	2457		

## 5. Applied reference standards

47 CFR § 1.1310	Radiofrequency radiation exposure limits
47 CFR § 2.1091	Radiofrequency radiation exposure evaluation: mobile devices
447498 D01 General RF Exposure Guidance v06	RF exposure procedures and equipment authorization policies for mobile and portable devices

## 6. FCC Calculation method and limits

Table 1 below sets forth limits for Maximum Permissible Exposure (MPE) to radiofrequency electromagnetic fields.

**Table 1 - Limits for Maximum Permissible Exposure (MPE)**

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
<b>(i) Limits for Occupational/Controlled Exposure</b>				
0.3-3.0	614	1.63	*(100)	≤6
3.0-30	1842/f	4.89/f	*(900/f <sup>2</sup> )	<6
30-300	61.4	0.163	1.0	<6
300-1,500			f/300	<6
1,500-100,000			5	<6
<b>(ii) Limits for General Population/Uncontrolled Exposure</b>				
0.3-1.34	614	1.63	*(100)	<30
1.34-30	824/f	2.19/f	*(180/f <sup>2</sup> )	<30
30-300	27.5	0.073	0.2	<30
300-1,500			f/1500	<30
1,500-100,000			1.0	<30

f = frequency in MHz. \* = Plane-wave equivalent power density.



**FCC SAR limits**

Region	Occupational SAR values (W/Kg)	General public SAR values (W/Kg)
Whole body SAR averaging mass = entire body	0,4	0,08
Partial body SAR averaging mass = 1g	8,0	1,6
Hands, wrists, feet and ankles SAR averaging mass = 10g	20	4

**FCC SAR exemption**

**General SAR test exclusion guidance according to KDB 447498 (Par. 4.3)**

Standalone SAR test exclusion considerations:

Unless specifically required by the published RF exposure KDB procedures, standalone 1-g head or body and 10-g extremity SAR evaluation for general population exposure conditions, by measurement or numerical simulation, is not required when the corresponding SAR Test Exclusion Threshold condition(s), listed below, is (are) satisfied. These test exclusion conditions are based on source-based time-averaged maximum conducted output power of the RF channel requiring evaluation, adjusted for tune-up tolerance, and the minimum test separation distance required for the exposure conditions. The minimum test separation distance defined in 4.1 f) is determined by the smallest distance from the antenna and radiating structures or outer surface of the device, according to the host form factor, exposure conditions and platform requirements, to any part of the body or extremity of a user or bystander. To qualify for SAR test exclusion, the test separation distances applied must be fully explained and justified, typically in the SAR measurement or SAR analysis report, by the operating configurations and exposure conditions of the transmitter and applicable host platform requirements, according to the required published RF exposure KDB procedures. When no other RF exposure testing or reporting are required, a statement of justification and compliance must be included in the equipment approval, in lieu of the SAR report, to qualify for SAR test exclusion. When required, the device specific conditions described in the other published RF exposure KDB procedures must be satisfied before applying these SAR test exclusion provisions; for example, handheld PTT two-way radios, handsets, laptops and tablets, etc.

a) For 100 MHz to 6 GHz and test separation distances ≤ 50 mm, the 1-g and 10-g SAR test exclusion thresholds are determined by the following:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [v_f(\text{GHz})] \leq 3.0 \text{ for 1-g SAR, and } \leq 7.5 \text{ for 10-g extremity SAR, where}$$

- f(GHz) is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- The values 3.0 and 7.5 are referred to as numeric thresholds in step b) below



The test exclusions are applicable only when the minimum test separation distance is  $\leq 50$  mm, and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is  $< 5$  mm, a distance of 5 mm according to 4.1 f) is applied to determine SAR test exclusion.

b) For 100 MHz to 6 GHz and test separation distances  $> 50$  mm, the 1-g and 10-g SAR test exclusion thresholds are determined by the following (also illustrated in Appendix B):

1)  $\{[\text{Power allowed at numeric threshold for 50 mm in step a)}] + [(\text{test separation distance} - 50 \text{ mm}) \cdot (f(\text{MHz})/150)]\}$  mW, for 100 MHz to 1500 MHz

2)  $\{[\text{Power allowed at numeric threshold for 50 mm in step a)}] + [(\text{test separation distance} - 50 \text{ mm}) \cdot 10]\}$  mW, for  $> 1500$  MHz and  $\leq 6$  GHz

c) For frequencies below 100 MHz, the following may be considered for SAR test exclusion (also illustrated in Appendix C):

1) For test separation distances  $> 50$  mm and  $< 200$  mm, the power threshold at the corresponding test separation distance at 100 MHz in step b) is multiplied by  $[1 + \log(100/f(\text{MHz}))]$

2) For test separation distances  $\leq 50$  mm, the power threshold determined by the equation in c) 1) for 50 mm and 100 MHz is multiplied by  $\frac{1}{2}$

3) SAR measurement procedures are not established below 100 MHz.

When SAR test exclusion cannot be applied, a KDB inquiry is required to determine SAR evaluation requirements for any SAR test results below 100 MHz to be acceptable.

## 7. Operating modes

No.	Description
1	Continuous Wi-Fi Modulation RF Transmission at maximum power, at low channel. Radio module (model ESP32-PICO-D4), set via ESP_RF_test_tool_v1.1.0, with the following parameters: ChipType: ESP32 BaudRate: 115200 Load bin: ESP32_RF_TEST_BIN_V1.4.6_20181019.bin Test Mode: Wi-Fi (TX continue) Wi-Fi Rate: 11b 1M, 11b 2M, 11b 5.5M, 11b 11M 11g 6M, 11g 9M, 11g 12M, 11g 18M, 11g 24M, 11g 36M, 11g 48M, 11g 54M 11n MCS0, 11n MCS1, 11n MCS2, 11n MCS3, 11n MCS4, 11n MCS5, 11n MCS6, 11n MCS7 BandWidth: 20M Channel: 1/2412MHz Attenuation: 0 dB
2	Continuous Wi-Fi Modulation RF Transmission at maximum power, at low channel. Radio module (model ESP32-PICO-D4), set via ESP_RF_test_tool_v1.1.0, with the following parameters: ChipType: ESP32 BaudRate: 115200 Load bin: ESP32_RF_TEST_BIN_V1.4.6_20181019.bin Test Mode: Wi-Fi (TX continue) Wi-Fi Rate: 11n MCS0, 11n MCS1, 11n MCS2, 11n MCS3, 11n MCS4, 11n MCS5, 11n MCS6, 11n MCS7 BandWidth: 40M Channel: 3/2422MHz Attenuation: 0 dB





No.	Description
3	<p>Continuous Wi-Fi Modulation RF Transmission at maximum power, at middle channel. Radio module (model ESP32-PICO-D4), set via ESP_RF_test_tool_v1.1.0, with the following parameters: ChipType: ESP32 BaudRate: 115200 Load bin: ESP32_RF_TEST_BIN_V1.4.6_20181019.bin Test Mode: Wi-Fi (TX continue) Wi-Fi Rate: 11b 1M, 11b 2M, 11b 5.5M, 11b 11M                   11g 6M, 11g 9M, 11g 12M, 11g 18M, 11g 24M, 11g 36M, 11g 48M, 11g 54M                   11n MCS0, 11n MCS1, 11n MCS2, 11n MCS3, 11n MCS4, 11n MCS5, 11n MCS6, 11n MCS7 BandWidth: 20M / 40M Channel: 6/2437MHz Attenuation: 0 dB</p>
4	<p>Continuous Wi-Fi Modulation RF Transmission (duty cycle &gt;98%) at maximum power, at high channel. Radio module (model ESP32-PICO-D4), set via ESP_RF_test_tool_v1.1.0, with the following parameters: ChipType: ESP32 BaudRate: 115200 Load bin: ESP32_RF_TEST_BIN_V1.4.6_20181019.bin Test Mode: Wi-Fi (TX continue) Wi-Fi Rate: 11b 1M, 11b 2M, 11b 5.5M, 11b 11M                   11g 6M, 11g 9M, 11g 12M, 11g 18M, 11g 24M, 11g 36M, 11g 48M, 11g 54M                   11n MCS0, 11n MCS1, 11n MCS2, 11n MCS3, 11n MCS4, 11n MCS5, 11n MCS6, 11n MCS7 BandWidth: 20M Channel: 11/2462MHz Attenuation: 0 dB</p>
5	<p>Continuous Wi-Fi Modulation RF Transmission (duty cycle &gt;98%) at maximum power, at high channel. Radio module (model ESP32-PICO-D4), set via ESP_RF_test_tool_v1.1.0, with the following parameters: ChipType: ESP32 BaudRate: 115200 Load bin: ESP32_RF_TEST_BIN_V1.4.6_20181019.bin Test Mode: Wi-Fi (TX continue) Wi-Fi Rate: 11n MCS0, 11n MCS1, 11n MCS2, 11n MCS3, 11n MCS4, 11n MCS5, 11n MCS6, 11n MCS7 BandWidth: 40M Channel: 9/2452MHz Attenuation: 0 dB</p>

## 8. EUT configuration

The test setup was made in accordance with mentioned FF standards.

Measurements and tests were executed under "worst case" conditions. Typical EUT arrangements or operating modes were chosen or assumed which let suspect maximum emission or susceptibility (a so called "unfavourable configuration").

Details of test setup or adjustments are (particularly) shown inside the photo documentation.

As far as not mentioned otherwise these statements are valid for all following tests.

## 9. Climatic conditions

<b>Ambient Temperature</b>	10 – 40 °C
<b>Relative Humidity</b>	10 – 90 %
<b>Air pressure</b>	Not specified

## 10. Statement of the measurement uncertainty


The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16-4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the quality system acc. to ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation.

The manufacturer has the sole responsibility of continued compliance of the device

## 11. Measurement uncertainty

Test Method	Uncertainty (95%)	Coverage factor k
TX Carrier Power – Conducted (1GHz – 8GHz)	1,5 dB	2,0

## 12. Example for interpretation of measuring results

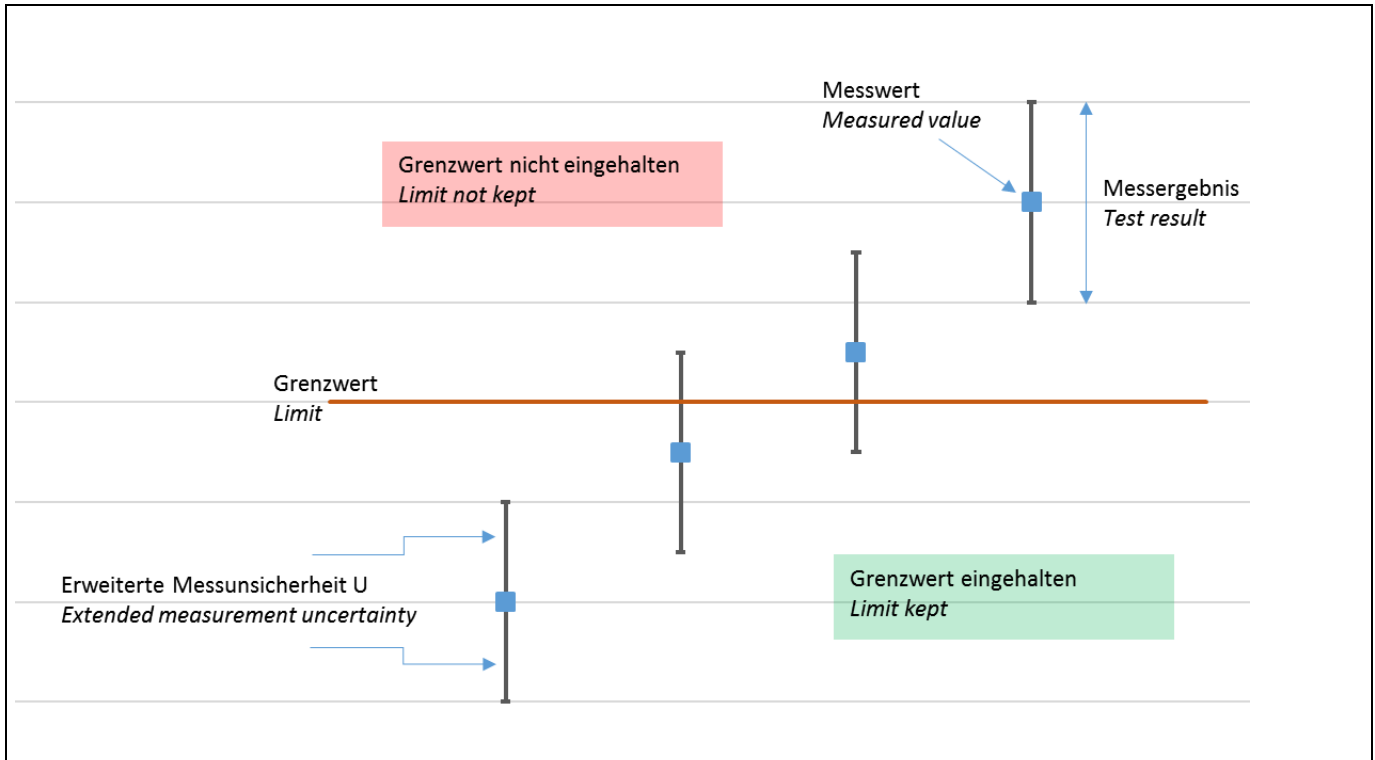

Example for interpretation of measuring results

<i>Measured value</i>	<i>Limit</i>	<i>Extended measurement uncertainty (k=2)</i>	<i>Test result</i>
48.9 dB $\mu$ V @ 16.5 MHz	50 dB $\mu$ V	2.2 dB	46.7 dB $\mu$ V – 51.1 dB $\mu$ V

**Decision rule :**

Statements of conformity (PASS or FAIL) to specifications are made in this report without taking measurement uncertainty into account.

Where statements of conformity are made in this report, the following decision rules are applied:

**PASS** – Results within limits/specifications

**FAIL** – Results exceed limits/specifications

**13. Result summary section**

<b>Requirement – Test case</b>	<b>Operating modes</b>	<b>Result</b>
Radiofrequency radiation exposure	1, 2, 3, 4, 5	<b>PASS</b>

**14. Change history**

<b>Test report number</b>	<b>List of revisions</b>	<b>Date</b>
IT22KSS0 001	First edition	16/09/2022

**15. RF exposure evaluation**

<b>Test date</b>	04/04/2022
<b>Applied Standard</b>	47 CFR § 2.1091
<b>Temperature</b>	23,1°
<b>Humidity</b>	54%
<b>Tested by</b>	Francesco Lombardi
<b>Model</b>	MP350
<b>Internal Storage No.</b>	1 (Storage no. A003216149-003)
<b>Operating mode</b>	1, 2, 3, 4, 5
<b>Tested terminals</b>	Antenna connector
<b>Result</b>	PASS

**EUT classification**

- Fixed: device physically secured at one fixed location and cannot be easily re-located.
- Mobile: transmitting device designed to be used in other than fixed locations and to generally be used in such a way that a separation distance of at least 20 centimeters is normally maintained between the transmitter's radiating structure(s) and the body of the user or nearby persons (47 cfr 2.1091)
- Portable: transmitting device designed to be used so that the radiating structure(s) of the device is/are within 20 centimeters of the body of the user (47 cfr 2.1093)



Test Result								
Operation mode: 1 (Channel 0 – Frequency 2412)								
Protocol: 11b								
Data Rate	Frequency (MHz)	Conducted Output Power		Antenna Gain		Separation Distance (r) (cm)	(S) Power density (mW/cm²)	(S) Power density Limit (mW/cm²)
		dBm	mW	dBi	Numeric (G)			
11b, 1M	2412	16.66	46.34	0.5	1.12	20	0.0103	1
11b, 2M	2412	16.68	46.56	0.5	1.12	20	0.0104	1
11b, 5.5M	2412	14.81	30.27	0.5	1.12	20	0.0067	1
11b, 11M	2412	16.47	44.36	0.5	1.12	20	0.0100	1
MPE test exclusion condition: $S = \frac{\text{Max. power of channel (mW)} \times \text{Antenna Gain (numerical)}}{4 \pi \times r^2 \text{ (cm)}}$								
MPE evaluation is not required because the value is less than exemption limit (separation distance 20cm)								



Test Result								
Operation mode: 1 (Channel 0 – Frequency 2412)								
Protocol: 11g								
Data Rate	Frequency (MHz)	Conducted Output Power		Antenna Gain		Separation Distance (r) (cm)	(S) Power density (mW/cm <sup>2</sup> )	(S) Power density Limit (mW/cm <sup>2</sup> )
		dBm	mW	dBi	Numeric (G)			
11g, 6M	2412	14.98	31.47	0.5	1.12	20	0.0070	1
11g, 9M	2412	14.90	30.90	0.5	1.12	20	0.0069	1
11g, 12M	2412	15.14	32.66	0.5	1.12	20	0.0073	1
11g, 18M	2412	15.25	33.50	0.5	1.12	20	0.0075	1
11g, 24M	2412	13.50	22.39	0.5	1.12	20	0.0050	1
11g, 36M	2412	13.67	23.28	0.5	1.12	20	0.0052	1
11g, 48M	2412	12.64	18.36	0.5	1.12	20	0.0041	1
11g 54M	2412	12.47	17.66	0.5	1.12	20	0.0040	1

MPE test exclusion condition:

$$S = \frac{\text{Max. power of channel (mW)} \times \text{Antenna Gain (numerical)}}{4 \pi \times r^2 \text{ (cm)}}$$

**MPE evaluation is not required because the value is less than exemption limit (separation distance 20cm)**





**Test Result**

Operation mode: 1 (Channel 0 – Frequency 2412)

Protocol: HT20

Data Rate	Frequency (MHz)	Conducted Output Power		Antenna Gain		Separation Distance (r) (cm)	(S) Power density (mW/cm <sup>2</sup> )	(S) Power density Limit (mW/cm <sup>2</sup> )
		dBm	mW	dBi	Numeric (G)			
11n, MCS0 (HT20)	2412	14.96	31.33	0.5	1.12	20	0.0070	1
11n, MCS1 (HT20)	2412	15.56	35.98	0.5	1.12	20	0.0080	1
11n, MCS2 (HT20)	2412	14.96	31.33	0.5	1.12	20	0.0070	1
11n, MCS3 (HT20)	2412	13.42	21.98	0.5	1.12	20	0.0050	1
11n, MCS4 (HT20)	2412	13.90	24.55	0.5	1.12	20	0.0055	1
11n, MCS5 (HT20)	2412	12.41	17.42	0.5	1.12	20	0.0039	1
11n, MCS6 (HT20)	2412	11.83	15.24	0.5	1.12	20	0.0034	1
11n, MCS7 (HT20)	2412	11.11	12.91	0.5	1.12	20	0.0029	1

MPE test exclusion condition:

$$S = \frac{\text{Max. power of channel (mW)} \times \text{Antenna Gain (numerical)}}{4 \pi \times r^2 \text{ (cm)}}$$

**MPE evaluation is not required because the value is less than exemption limit (separation distance 20cm)**



**Test Result**

Operation mode: 2 (Channel 3 – Frequency 2422)

Protocol: HT40

Data Rate	Frequency (MHz)	Conducted Output Power		Antenna Gain		Separation Distance (r) (cm)	(S) Power density (mW/cm <sup>2</sup> )	(S) Power density Limit (mW/cm <sup>2</sup> )
		dBm	mW	dBi	Numeric (G)			
11n, MCS0 (HT40)	2422	12.77	18.92	0.5	1.12	20	0.0042	1
11n, MCS1 (HT40)	2422	12.82	19.14	0.5	1.12	20	0.0043	1
11n, MCS2 (HT40)	2422	11.79	15.10	0.5	1.12	20	0.0034	1
11n, MCS3 (HT40)	2422	8.73	7.46	0.5	1.12	20	0.0016	1
11n, MCS4 (HT40)	2422	9.19	8.30	0.5	1.12	20	0.0018	1
11n, MCS5 (HT40)	2422	8.46	7.01	0.5	1.12	20	0.0015	1
11n, MCS6 (HT40)	2422	7.57	5.71	0.5	1.12	20	0.0013	1
11n, MCS7 (HT40)	2422	7.01	5.02	0.5	1.12	20	0.0011	1

MPE test exclusion condition:

$$S = \frac{\text{Max. power of channel (mW)} \times \text{Antenna Gain (numerical)}}{4 \pi \times r^2 \text{ (cm)}}$$

**MPE evaluation is not required because the value is less than exemption limit (separation distance 20cm)**



Test Result

Operation mode: 3 (Channel 6 – Frequency 2437)

Protocol: 11b

Data Rate	Frequency (MHz)	Conducted Output Power		Antenna Gain		Separation Distance (r) (cm)	(S) Power density (mW/cm²)	(S) Power density Limit (mW/cm²)
		dBm	mW	dBi	Numeric (G)			
11b, 1M	2437	16.45	44.16	0.5	1.12	20	0.0099	1
11b, 2M	2437	16.40	43.65	0.5	1.12	20	0.0097	1
11b, 5.5M	2437	14.44	27.80	0.5	1.12	20	0.0062	1
11b, 11M	2437	16.21	41.78	0.5	1.12	20	0,0093	1

MPE test exclusion condition:

$$S = \frac{\text{Max. power of channel (mW)} \times \text{Antenna Gain (numerical)}}{4 \pi \times r^2 \text{ (cm)}}$$

MPE evaluation is not required because the value is less than exemption limit (separation distance 20cm)



Test Result								
Operation mode: 3 (Channel 6 – Frequency 2437)								
Protocol: 11g								
Data Rate	Frequency (MHz)	Conducted Output Power		Antenna Gain		Separation Distance (r) (cm)	(S) Power density (mW/cm <sup>2</sup> )	(S) Power density Limit (mW/cm <sup>2</sup> )
		dBm	mW	dBi	Numeric (G)			
11g, 6M	2437	14.65	29.17	0.5	1.12	20	0.0065	1
11g, 9M	2437	14.56	28.58	0.5	1.12	20	0.0063	1
11g, 12M	2437	14.86	30.62	0.5	1.12	20	0.0068	1
11g, 18M	2437	14.82	30.34	0.5	1.12	20	0.0068	1
11g, 24M	2437	12.96	19.77	0.5	1.12	20	0.0044	1
11g, 36M	2437	12.93	19.63	0.5	1.12	20	0.0044	1
11g, 48M	2437	11.98	15.77	0.5	1.12	20	0.0035	1
11g 54M	2437	12.21	16.63	0.5	1.12	20	0.0037	1
MPE test exclusion condition: $S = \frac{\text{Max. power of channel (mW)} \times \text{Antenna Gain (numerical)}}{4 \pi \times r^2 \text{ (cm)}}$								
MPE evaluation is not required because the value is less than exemption limit (separation distance 20cm)								



**Test Result**

Operation mode: 3 (Channel 6 – Frequency 2437)

Protocol: HT20

Data Rate	Frequency (MHz)	Conducted Output Power		Antenna Gain		Separation Distance (r) (cm)	(S) Power density (mW/cm <sup>2</sup> )	(S) Power density Limit (mW/cm <sup>2</sup> )
		dBm	mW	dBi	Numeric (G)			
11n, MCS0 (HT20)	2437	14.84	30.48	0.5	1.12	20	0.0068	1
11n, MCS1 (HT20)	2437	15.38	34.51	0.5	1.12	20	0.0077	1
11n, MCS2 (HT20)	2437	14.85	30.55	0.5	1.12	20	0.0068	1
11n, MCS3 (HT20)	2437	12.76	18.88	0.5	1.12	20	0.0042	1
11n, MCS4 (HT20)	2437	13.21	20.94	0.5	1.12	20	0.0047	1
11n, MCS5 (HT20)	2437	12.03	15.96	0.5	1.12	20	0.0035	1
11n, MCS6 (HT20)	2437	11.64	14.59	0.5	1.12	20	0.0032	1
11n, MCS7 (HT20)	2437	10.83	12.10	0.5	1.12	20	0.0027	1

MPE test exclusion condition:

$$S = \frac{\text{Max. power of channel (mW)} \times \text{Antenna Gain (numerical)}}{4 \Pi \times r^2 \text{ (cm)}}$$

**MPE evaluation is not required because the value is less than exemption limit (separation distance 20cm)**



**Test Result**

Operation mode: 3 (Channel 6 – Frequency 2437)

Protocol: HT40

Data Rate	Frequency (MHz)	Conducted Output Power		Antenna Gain		Separation Distance (r) (cm)	(S) Power density (mW/cm <sup>2</sup> )	(S) Power density Limit (mW/cm <sup>2</sup> )
		dBm	mW	dBi	Numeric (G)			
11n, MCS0 (HT40)	2437	11.28	13.43	0.5	1.12	20	0.0030	1
11n, MCS1 (HT40)	2437	12.03	15.96	0.5	1.12	20	0.0035	1
11n, MCS2 (HT40)	2437	11.66	14.65	0.5	1.12	20	0.0033	1
11n, MCS3 (HT40)	2437	8.42	6.95	0.5	1.120.	20	0,0015	1
11n, MCS4 (HT40)	2437	8.94	7.83	0.5	1.12	20	0.0017	1
11n, MCS5 (HT40)	2437	9.08	8.10	0.5	1.12	20	0.0019	1
11n, MCS6 (HT40)	2437	7.58	5.73	0.5	1.12	20	0.0013	1
11n, MCS7 (HT40)	2437	6.93	4.93	0.5	1.12	20	0.0011	1

MPE test exclusion condition:

$$S = \frac{\text{Max. power of channel (mW)} \times \text{Antenna Gain (numerical)}}{4 \Pi \times r^2 \text{ (cm)}}$$

**MPE evaluation is not required because the value is less than exemption limit (separation distance 20cm)**



Test Result								
Operation mode: 4 (Channel 11 – Frequency 2462)								
Protocol: 11b								
Data Rate	Frequency (MHz)	Conducted Output Power		Antenna Gain		Separation Distance (r) (cm)	(S) Power density (mW/cm²)	(S) Power density Limit (mW/cm²)
		dBm	mW	dBi	Numeric (G)			
11b, 1M	2462	16.27	42.36	0.5	1.12	20	0.0095	1
11b, 2M	2462	16.14	41.11	0.5	1.12	20	0.0091	1
11b, 5.5M	2462	14.36	27.29	0.5	1.12	20	0.0060	1
11b, 11M	2462	15.97	39.54	0.5	1.12	20	0.0088	1

MPE test exclusion condition:

$$S = \frac{\text{Max. power of channel (mW)} \times \text{Antenna Gain (numerical)}}{4 \pi \times r^2 \text{ (cm)}}$$

**MPE evaluation is not required because the value is less than exemption limit (separation distance 20cm)**



Test Result								
Operation mode: 4 (Channel 11 – Frequency 2462)								
Protocol: 11g								
Data Rate	Frequency (MHz)	Conducted Output Power		Antenna Gain		Separation Distance (r) (cm)	(S) Power density (mW/cm <sup>2</sup> )	(S) Power density Limit (mW/cm <sup>2</sup> )
		dBm	mW	dBi	Numeric (G)			
11g, 6M	2462	14.41	27.61	0.5	1.12	20	0.0062	1
11g, 9M	2462	14.34	27.16	0.5	1.12	20	0.0061	1
11g, 12M	2462	14.53	28.38	0.5	1.12	20	0.0063	1
11g, 18M	2462	14.62	28.97	0.5	1.12	20	0.0065	1
11g, 24M	2462	12.97	19.81	0.5	1.12	20	0.0044	1
11g, 36M	2462	12.97	19.81	0.5	1.12	20	0.0044	1
11g, 48M	2462	12.02	15.92	0.5	1.12	20	0.0035	1
11g 54M	2462	12.00	15.85	0.5	1.12	20	0.0035	1
MPE test exclusion condition: $S = \frac{\text{Max. power of channel (mW)} \times \text{Antenna Gain (numerical)}}{4 \pi \times r^2 \text{ (cm)}}$								
MPE evaluation is not required because the value is less than exemption limit (separation distance 20cm)								





**Test Result**

Operation mode: 4 (Channel 11 – Frequency 2462)

Protocol: HT20

Data Rate	Frequency (MHz)	Conducted Output Power		Antenna Gain		Separation Distance (r) (cm)	(S) Power density (mW/cm <sup>2</sup> )	(S) Power density Limit (mW/cm <sup>2</sup> )
		dBm	mW	dBi	Numeric (G)			
11n, MCS0 (HT20)	2462	14.34	27.16	0.5	1.12	20	0.0061	1
11n, MCS1 (HT20)	2462	14.86	30.62	0.5	1.12	20	0.0068	1
11n, MCS2 (HT20)	2462	14.46	27.92	0.5	1.12	20	0.0062	1
11n, MCS3 (HT20)	2462	12.37	17.26	0.5	1.12	20	0.0038	1
11n, MCS4 (HT20)	2462	13.11	20.46	0.5	1.12	20	0.0046	1
11n, MCS5 (HT20)	2462	11.82	15.20	0.5	1.12	20	0.0033	1
11n, MCS6 (HT20)	2462	11.09	12.85	0.5	1.12	20	0.0029	1
11n, MCS7 (HT20)	2462	10.46	11.11	0.5	1.12	20	0.0025	1

MPE test exclusion condition:

$$S = \frac{\text{Max. power of channel (mW)} \times \text{Antenna Gain (numerical)}}{4 \Pi \times r^2 \text{ (cm)}}$$

**MPE evaluation is not required because the value is less than exemption limit (separation distance 20cm)**



**Test Result**

Operation mode: 5 (Channel 9 – Frequency 2452 MHz)

Protocol: HT40

Data Rate	Frequency (MHz)	Conducted Output Power		Antenna Gain		Separation Distance (r) (cm)	(S) Power density (mW/cm <sup>2</sup> )	(S) Power density Limit (mW/cm <sup>2</sup> )
		dBm	mW	dBi	Numeric (G)			
11n, MCS0 (HT40)	2452	10.80	12.02	0.5	1.12	20	0.0027	1
11n, MCS1 (HT40)	2452	11.66	14.65	0.5	1.12	20	0.0033	1
11n, MCS2 (HT40)	2452	10.99	12.56	0.5	1.12	20	0,0028	1
11n, MCS3 (HT40)	2452	8.34	6.82	0.5	1.12	20	0.0015	1
11n, MCS4 (HT40)	2452	8.82	7.62	0.5	1.12	20	0.0017	1
11n, MCS5 (HT40)	2452	8.04	6.38	0.5	1.12	20	0.0014	1
11n, MCS6 (HT40)	2452	7.04	5.06	0.5	1.12	20	0.0011	1
11n, MCS7 (HT40)	2452	6.52	4.49	0.5	1.12	20	0.0010	1

MPE test exclusion condition:

$$S = \frac{\text{Max. power of channel (mW)} \times \text{Antenna Gain (numerical)}}{4 \Pi \times r^2 \text{ (cm)}}$$

**MPE evaluation is not required because the value is less than exemption limit (separation distance 20cm)**

## 16. List of test equipment

Equipment	Type	Inventory no.	Manufacturer	Last calibration date	Calibration due date
<b>Test stand: RF exposure evaluation</b>					
EMI Receiver	ESU40	2782345	Rohde&Schwarz	11/2021	11/2022
Fast Power Sensor	NRP-Z81	2782701	Rohde&Schwarz	07/2021	07/2022

--- END OF TEST REPORT ---