

Certification Test Report

FCC ID: ODB-LANCER450030

FCC Rule Part: 15.247

ACS Report Number: 12-2148.W03.1B

Manufacturer: ValidFill, LLC
Model: HD011SA002

Test Begin Date: **November 21, 2012**
Test End Date: **December 8, 2012**

Report Issue Date: April 15, 2013



FOR THE SCOPE OF ACCREDITATION UNDER CERTIFICATE NUMBER AT-1533

This report must not be used by the client to claim product certification, approval, or endorsement by ACCLASS, ANSI, or any agency of the Federal Government.

Project Manager:

A handwritten signature in black ink, appearing to read "Thierry Jean-Charles".

Thierry Jean-Charles
EMC Engineer
Advanced Compliance Solutions, Inc.

Reviewed by:

A handwritten signature in black ink, appearing to read "Kirby Munroe".

Kirby Munroe
Director, Wireless Certifications
Advanced Compliance Solutions, Inc.

This test report shall not be reproduced except in full. This report may be reproduced in part with prior written consent of ACS, Inc. The results contained in this report are representative of the sample(s) submitted for evaluation.

This report contains 31 pages

TABLE OF CONTENTS

| | | |
|----------|--|-----------|
| 1 | GENERAL | 3 |
| 1.1 | Purpose | 3 |
| 1.2 | Manufacturer Information | 3 |
| 1.3 | Product description | 3 |
| 1.4 | Test Methodology and Considerations | 3 |
| 2 | TEST FACILITIES | 4 |
| 2.1 | Location..... | 4 |
| 2.2 | Laboratory Accreditations/Recognitions/Certifications | 4 |
| 2.3 | Radiated & Conducted Emissions Test Site Description | 5 |
| 3 | APPLICABLE STANDARD REFERENCES..... | 6 |
| 4 | LIST OF TEST EQUIPMENT..... | 7 |
| 5 | EQUIPMENT UNDER TEST AND SUPPORT EQUIPMENT..... | 8 |
| 6 | EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM | 8 |
| 7 | SUMMARY OF TESTS..... | 9 |
| 7.1 | Antenna Requirement – FCC: Section 15.203 | 9 |
| 7.2 | Power Line Conducted Emissions – FCC: Section 15.207 | 9 |
| 7.3 | Peak Output Power - FCC Section 15.247(b)(2) | 12 |
| 7.4 | Channel Usage Requirements..... | 14 |
| 7.5 | Band-Edge Compliance and Spurious Emissions-FCC 15.247(d)..... | 22 |
| 8 | CONCLUSION..... | 30 |

1 GENERAL**1.1 Purpose**

The purpose of this report is to demonstrate compliance with Part 15 Subpart C of the FCC's Code of Federal Regulations.

1.2 Manufacturer Information

ValidFill, LLC
6222 Tower Lane, Suite B-7
Sarasota, FL 34240

1.3 Product description

The ValidFill Lancer 4500 30, Model HD011SA002, is soda dispensing machine which includes a 900 MHz RFID transceiver.

Technical Parameters:

Band of Operation: 902.75 - 927.25 MHz
Number of Channels: 50
Mode of Operation: FHSS
Antenna Type/Gain: PCB Loop Antenna, 0.55 dBi
Operating Voltage: 120V / 60 Hz

Model Number: HD011SA002

Test Sample Serial Number(s): 854541H0736M251X

Test Sample Condition: The samples were in good conditions with no observable physical damages.

1.4 Test Methodology and Considerations

The HD011SA002 includes one 900 MHz radio with one RF output. The RF output is then connected to a 12 channel multiplexer, were 10 of the 12 are connected to the loop antennas while the remaining two are not used. Preliminary evaluations were performed on the 10 multiplexer ports and the data is reported for the configuration leading to the highest emissions.

For the RF conducted emissions evaluation, the measurements were collected at the output of the multiplexer.

The power line conducted emissions evaluations were performed with the 900 MHz radio constantly hopping.

The unit was also evaluated for compliance to the unintentional emissions requirements in accordance with the Class A Limits. The results are documented separately in a Verification test report.

2 TEST FACILITIES

2.1 Location

The radiated and conducted emissions test sites are located at the following address:

Advanced Compliance Solutions, Inc.
3998 FAU Blvd, Suite 310
Boca Raton, Florida 33431
Phone: (561) 961-5585
Fax: (561) 961-5587
www.acstestlab.com

FCC Test Firm Registration #: 475089
Industry Canada Lab Code: 4175C

2.2 Laboratory Accreditations/Recognitions/Certifications

ACS is accredited to ISO/IEC 17025 by ANSI-ASQ National Accreditation Board under their ACLASS program and has been issued certificate number AT-1533 in recognition of this accreditation. Unless otherwise specified, all test methods described within this report are covered under the ISO/IEC 17025 scope of accreditation.

2.3 Radiated & Conducted Emissions Test Site Description

2.3.1 Semi-Anechoic Chamber Test Site

The EMC radiated test facility consists of an RF-shielded enclosure. The interior dimensions of the indoor semi-anechoic chamber are approximately 48 feet (14.6 m) long by 36 feet (10.8 m) wide by 24 feet (7.3 m) high and consist of rigid, 1/8 inch (0.32 cm) steel-clad, wood core modular panels with steel framing. In the shielded enclosure, the faces of the panels are galvanized and the chamber is self-supporting. 8-foot RF absorbing cones are installed on 4 walls and the ceiling. The steel-clad ground plane is covered with vinyl floor.

The turntable is driven by pneumatic motor, which is capable of supporting a 2000 lb. load. The turntable is flushed with the chamber floor which it is connected to, around its circumference, with a continuous metallic loaded spring. An EMCO Model 1050 Multi-device Controller controls the turntable position.

A pneumatic motor is used to control antenna polarizations and height relative to the ground. The height information is displayed on the control unit EMCO Model 1050.

The control room is an RF shielded enclosure attached to the semi-anechoic chamber with two bulkhead panels for connecting RF, and control cables. The dimension of the room is 7.3 m x 4.9 m x 3 m high and the entrance doors of both control and conducted rooms are 3 feet (0.91 m) by 7 feet (2.13 m).

A diagram of the Semi-Anechoic Chamber Test Site is shown in Figure 2.3.1-1 below:

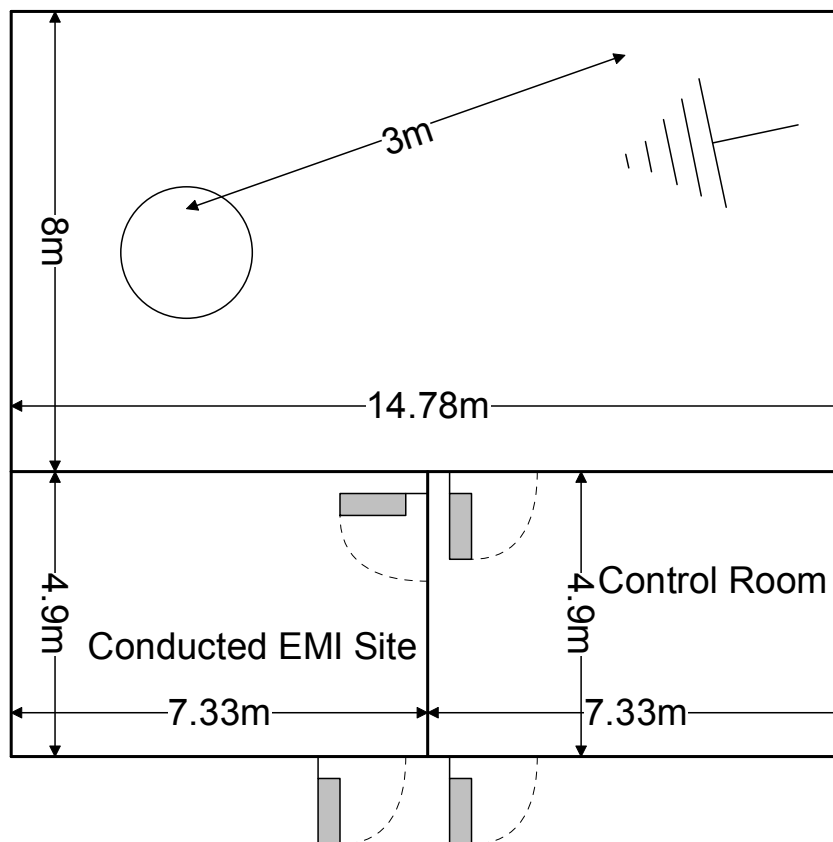


Figure 2.3.1-1: Semi-Anechoic Chamber Test Site

2.3.2 Conducted Emissions Test Site Description

The dimensions of the shielded conducted room are 7.3 x 4.9 x 3 m³. As per ANSI C63.4 2003 requirements, the data were taken using two LISNs; a Solar Model 8028-50 50 Ω /50 μ H and an EMCO Model 3825, which are installed as shown in Photograph 3. For 220 V, 50 Hz, a Polarad LISN (S/N 879341/048) is used in conjunction with a 1 kVA, 50 Hz/220 V EDGAR variable frequency generator, Model 1001B, to filter conducted noise from the generator.

A diagram of the room is shown below in figure 2.3.2-1:

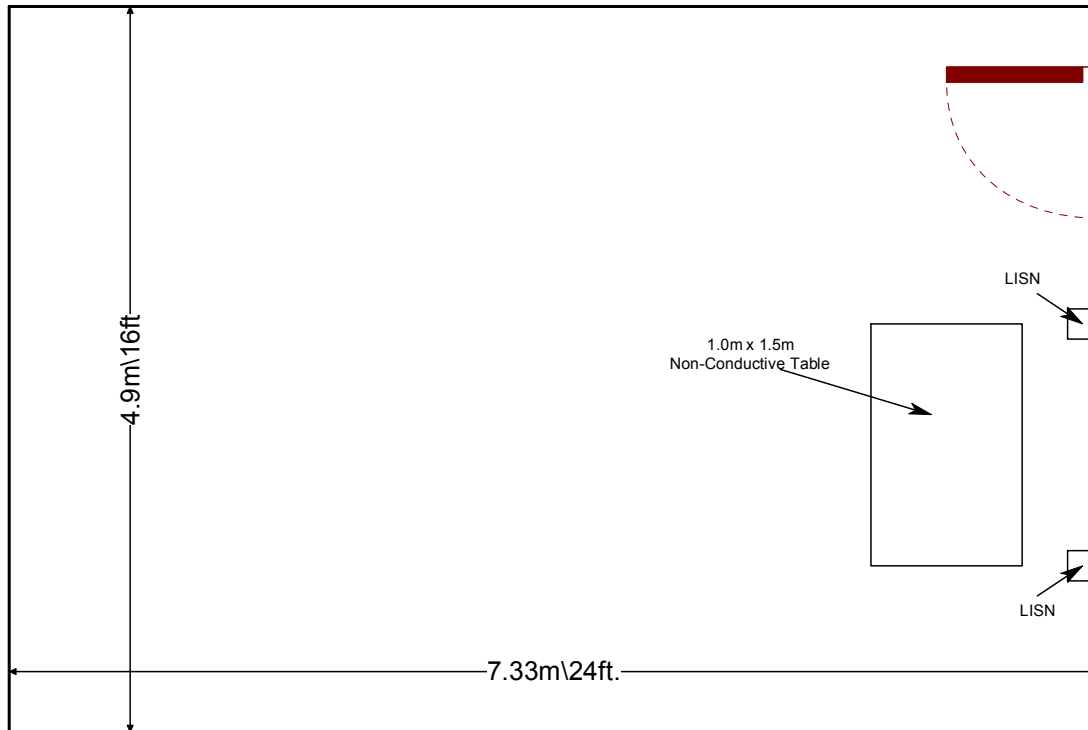


Figure 2.3.2-1: AC Mains Conducted EMI Site

3 APPLICABLE STANDARD REFERENCES

The following standards were used:

- ❖ ANSI C63.4-2003: Method of Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the 9KHz to 40GHz
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 2, Subpart J: Equipment Authorization Procedures, 2012
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 15, Subpart C: Radio Frequency Devices, Intentional Radiators, 2012
- ❖ FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems, March 30, 2000

4 LIST OF TEST EQUIPMENT

The calibration interval of test equipment is annually or the manufacturer's recommendations. Where the calibration interval deviates from the annual cycle based on the instrument manufacturer's recommendations, it shall be stated below.

Table 4-1: Test Equipment

| AssetID | Manufacturer | Model # | Equipment Type | Serial # | Last Calibration Date | Calibration Due Date |
|---------|----------------------------|------------------------|--------------------|------------|-----------------------|----------------------|
| 523 | Agilent | E7405 | Spectrum Analyzers | MY45103293 | 1/5/2011 | 1/5/2013 |
| 524 | Chase | CBL6111 | Antennas | 1138 | 1/7/2011 | 1/7/2013 |
| 2006 | EMCO | 3115 | Antennas | 2573 | 3/2/2011 | 3/2/2013 |
| 2011 | Hewlett-Packard | HP 8447D | Amplifiers | 2443A03952 | 1/2/2012 | 1/2/2013 |
| 2022 | EMCO | LISN3825/2R | LISN | 1095 | 8/19/2011 | 8/19/2013 |
| 2037 | ACS Boca | Chamber EM Cable Set | Cable Set | 2037 | 1/2/2012 | 1/2/2013 |
| 2044 | QMI | N/A | Cables | 2044 | 1/2/2012 | 1/2/2013 |
| 2045 | ACS Boca | Conducted Cable Set | Cable Set | 2045 | 1/2/2012 | 1/2/2013 |
| 2064 | CIR Q-TEL | FHT/22-10K-13/50-3A/3A | Filter | 9 | 12/30/2011 | 12/30/2012 |
| 2071 | Trilithic, Inc. | 4HC1400-1-KK | Filter | 9643263 | 1/19/2012 | 1/19/2013 |
| 2097 | Alpha Wire | 9055B | Cables | 2097 | 6/29/2012 | 6/29/2013 |
| 2075 | Hewlett Packard | 8495B | Attenuators | 2626A11012 | 1/2/2012 | 1/2/2013 |
| 2076 | Hewlett Packard | HP5061-5458 | Cables | 2076 | 1/2/2012 | 1/2/2013 |
| RE587 | Fairview Microwave Inc. | SA3N511-15 | Attenuators | RE587 | 4/18/2012 | 4/18/2013 |
| 2086 | Merrimac | FAN-6-10K | Attenuators | 23148-83-1 | 12/30/2011 | 12/30/2012 |
| 2089 | Agilent Technologies, Inc. | 83017A | Amplifiers | 3123A00214 | 12/22/2011 | 12/22/2012 |
| 2091 | Agilent Technologies, Inc. | 8573A | Spectrum Analyzers | 2407A03233 | 12/12/2011 | 12/12/2013 |
| 2095 | ETS Lindgren | TILE4! - Version 4.2.A | Software | 85242 | NCR | NCR |

NCR=No Calibration Required

5 EQUIPMENT UNDER TEST AND SUPPORT EQUIPMENT

Table 5-1: EUT and Support Equipment Description

| Item # | Type Device | Manufacturer | Model/Part # | Serial # |
|--------|-------------|--------------|--------------|------------------|
| 1 | EUT | ValidFill | HD011SA002 | 854541H0736M251X |

Note: The EUT is a stand-alone equipment with no support for external accessories.

Table 5.2: Cable Description

| Cable # | Cable Type | Length | Shield | Termination |
|---------|------------|--------|--------|-----------------|
| A | Power Cord | 2m | No | EUT to AC Mains |

6 EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM

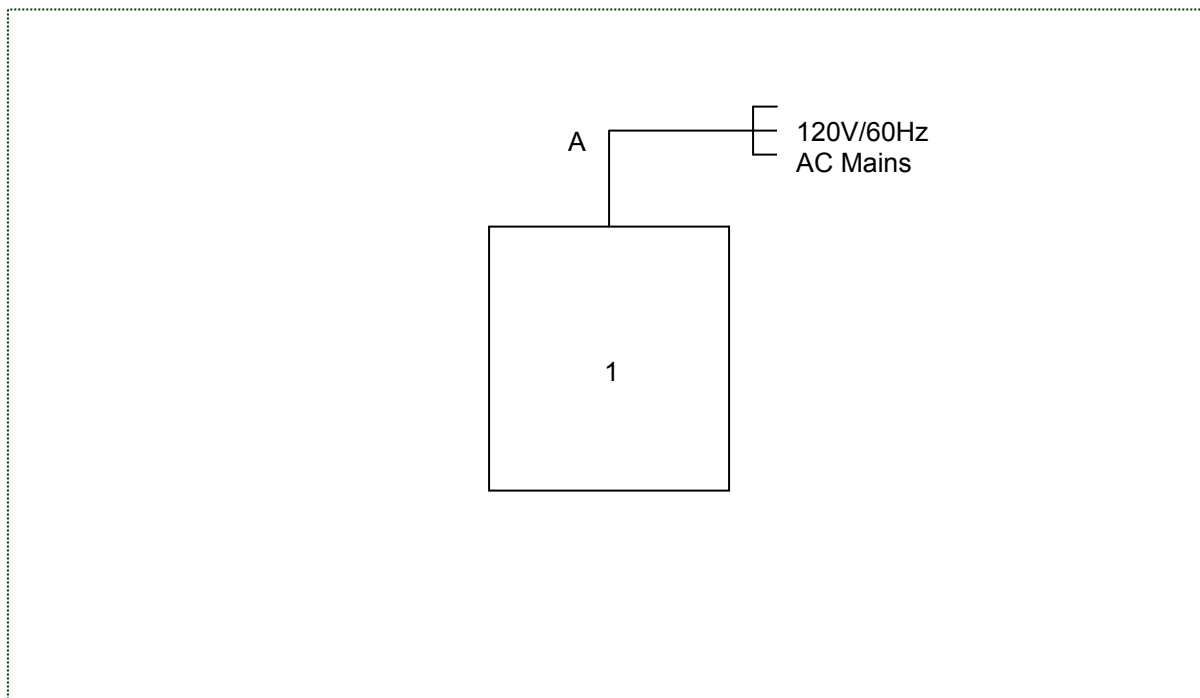


Figure 6-1: Test Set Up

7 SUMMARY OF TESTS

Along with the tabular data shown below, plots were taken of all signals deemed important enough to document.

7.1 Antenna Requirement – FCC: Section 15.203

The EUT uses internal loop antennas which are not easily accessible to the end-user, thus meeting the requirements of 15.203.

7.2 Power Line Conducted Emissions – FCC: Section 15.207

7.2.1 Measurement Procedure

ANSI C63.4 sections 6 and 7 were the guiding documents for this evaluation. Conducted emissions were performed from 150 kHz to 30 MHz with the spectrum analyzer's resolution bandwidth set to 9 kHz and the video bandwidth set to 30 kHz. The calculation for the conducted emissions is as follows:

$$\text{Corrected Reading} = \text{Analyzer Reading} + \text{LISN Loss} + \text{Cable Loss}$$

$$\text{Margin} = \text{Applicable Limit} - \text{Corrected Reading}$$

7.2.2 Measurement Results

Results are shown below.

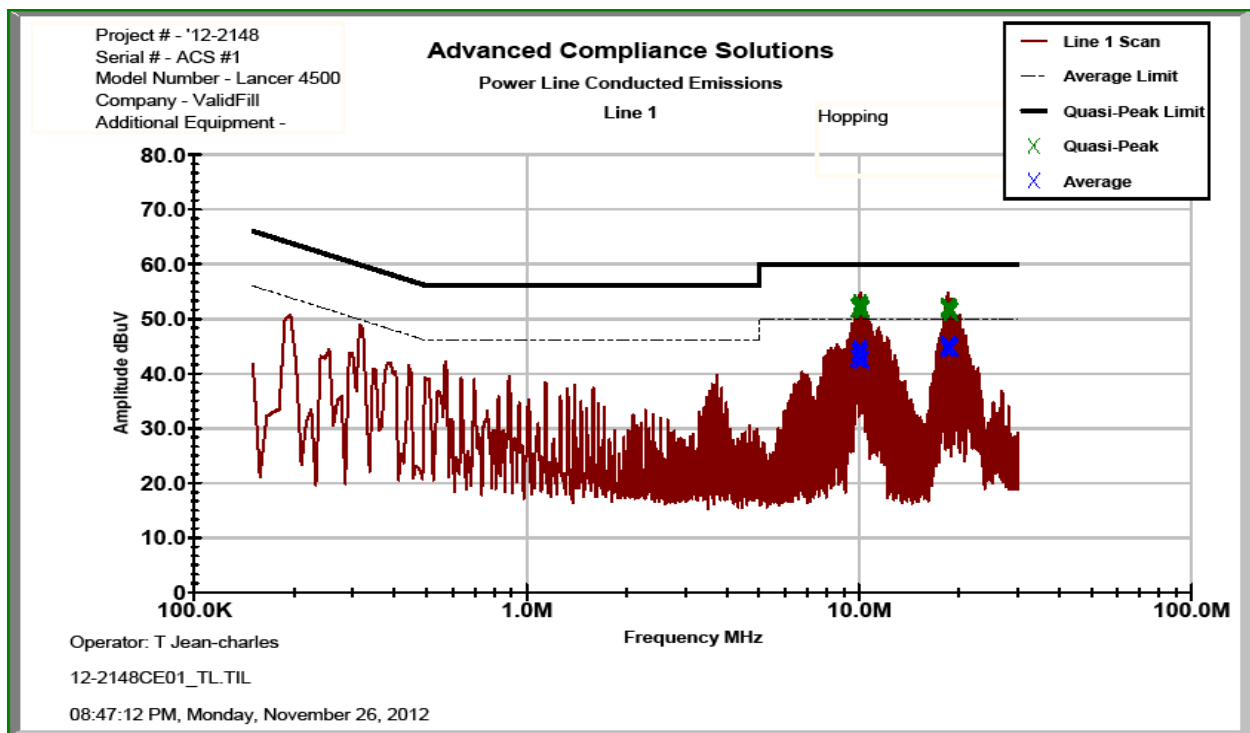


Figure 7.2.2-1: Conducted Emissions Results – Line 1

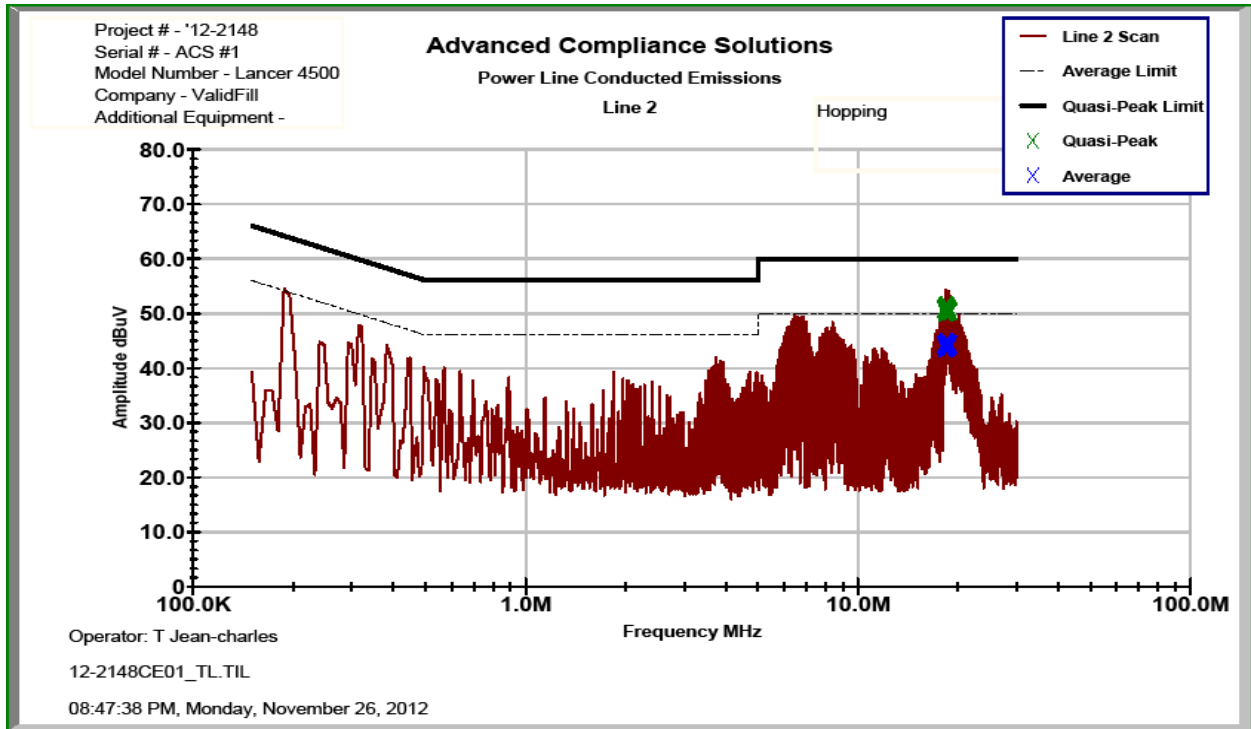


Figure 7.2.2-2: Conducted Emissions Results – Line 2

Table 7.2.2-1: Conducted EMI Results

| <input checked="" type="checkbox"/> Line 1 <input checked="" type="checkbox"/> Line 2 <input type="checkbox"/> Line 3 <input type="checkbox"/> Line 4 <input checked="" type="checkbox"/> To Ground <input type="checkbox"/> Floating <input type="checkbox"/> Telecom Port _____ <input checked="" type="checkbox"/> dB μ V <input type="checkbox"/> dB μ A Plot Number: <u>12-2148CE01</u> Power Supply Description: <u>N/A</u> | | | | | | | | | |
|---|---------------------|---------|------------------------------|-----------------|---------|------------|---------|-------------|---------|
| Frequency (MHz) | Uncorrected Reading | | Total Correction Factor (dB) | Corrected Level | | Limit | | Margin (dB) | |
| | Quasi-Peak | Average | | Quasi-Peak | Average | Quasi-Peak | Average | Quasi-Peak | Average |
| Line 1 | | | | | | | | | |
| 9.93574 | 49.155 | 39.982 | 1.21 | 50.37 | 41.19 | 60.00 | 50.00 | 9.6 | 8.8 |
| 9.9968 | 49.245 | 40.937 | 1.22 | 50.46 | 42.16 | 60.00 | 50.00 | 9.5 | 7.8 |
| 10.0605 | 49.994 | 41.617 | 2.88 | 52.88 | 44.50 | 60.00 | 50.00 | 7.1 | 5.5 |
| 10.1235 | 49.505 | 40.827 | 2.88 | 52.39 | 43.71 | 60.00 | 50.00 | 7.6 | 6.3 |
| 10.1885 | 48.792 | 39.665 | 2.88 | 51.67 | 42.54 | 60.00 | 50.00 | 8.3 | 7.5 |
| 18.4132 | 49.46 | 42.107 | 2.33 | 51.79 | 44.44 | 60.00 | 50.00 | 8.2 | 5.6 |
| 18.5365 | 49.679 | 42.636 | 2.34 | 52.02 | 44.97 | 60.00 | 50.00 | 8.0 | 5.0 |
| 18.6002 | 49.355 | 42.611 | 2.34 | 51.69 | 44.95 | 60.00 | 50.00 | 8.3 | 5.0 |
| 18.727 | 49.435 | 42.572 | 2.34 | 51.78 | 44.92 | 60.00 | 50.00 | 8.2 | 5.1 |
| 18.853 | 48.794 | 42.203 | 2.35 | 51.14 | 44.55 | 60.00 | 50.00 | 8.9 | 5.4 |
| Line 2 | | | | | | | | | |
| 18.1577 | 48.237 | 41.796 | 2.33 | 50.56 | 44.12 | 60.00 | 50.00 | 9.4 | 5.9 |
| 18.286 | 47.645 | 41.138 | 2.33 | 49.98 | 43.47 | 60.00 | 50.00 | 10.0 | 6.5 |
| 18.3485 | 48.728 | 41.245 | 2.33 | 51.06 | 43.58 | 60.00 | 50.00 | 8.9 | 6.4 |
| 18.4103 | 49.038 | 42.307 | 2.34 | 51.37 | 44.64 | 60.00 | 50.00 | 8.6 | 5.4 |
| 18.4739 | 48.796 | 41.827 | 2.34 | 51.13 | 44.16 | 60.00 | 50.00 | 8.9 | 5.8 |
| 18.5364 | 48.827 | 41.776 | 2.34 | 51.17 | 44.12 | 60.00 | 50.00 | 8.8 | 5.9 |
| 18.6004 | 48.748 | 41.92 | 2.34 | 51.09 | 44.26 | 60.00 | 50.00 | 8.9 | 5.7 |
| 18.661 | 48.369 | 41.226 | 2.34 | 50.71 | 43.57 | 60.00 | 50.00 | 9.3 | 6.4 |
| 18.7256 | 48.395 | 41.752 | 2.35 | 50.74 | 44.10 | 60.00 | 50.00 | 9.3 | 5.9 |
| 18.8515 | 47.777 | 41.767 | 2.35 | 50.13 | 44.12 | 60.00 | 50.00 | 9.9 | 5.9 |

* Note: Results are reported for the EUT configuration leading to the worst case emissions.

7.3 Peak Output Power - FCC Section 15.247(b)(2)

7.3.1 Measurement Procedure (Conducted Method)

The RF output port of the EUT was directly connected to the input of the spectrum analyzer. The display values were corrected for cable and external attenuation.

7.3.2 Measurement Results

Results are shown below.

Table 7.3.2-1: RF Output Power

| Frequency (MHz) | Power (dBm) |
|-----------------|-------------|
| 902.75 | 20.47 |
| 915.25 | 20.01 |
| 927.25 | 18.69 |

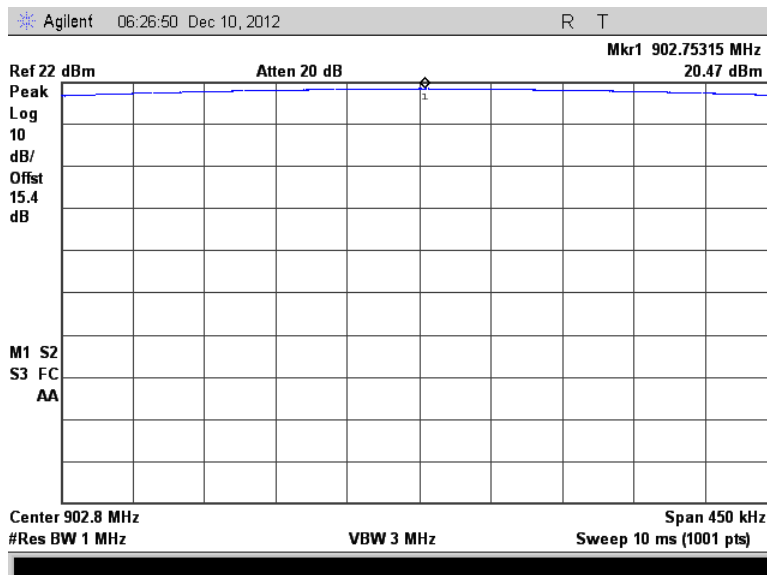


Figure 7.3.2-1: RF Output Power - Low Channel

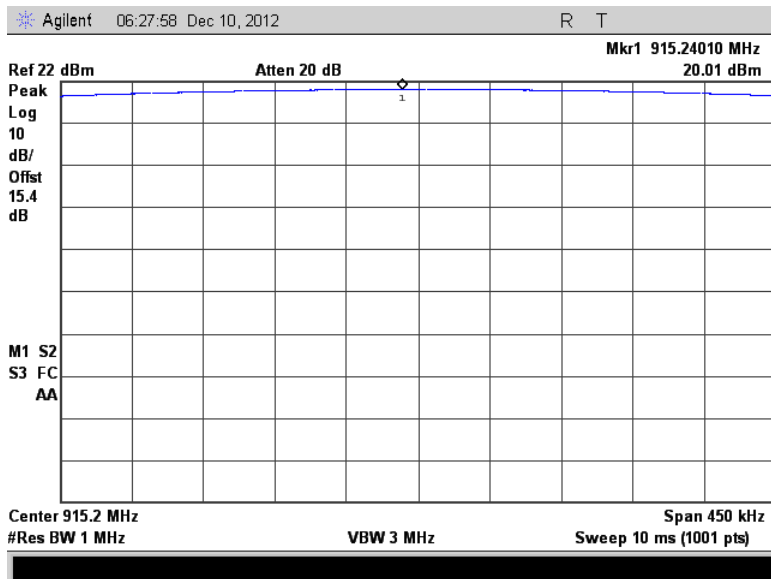


Figure 7.3.2-2: RF Output Power - Middle Channel

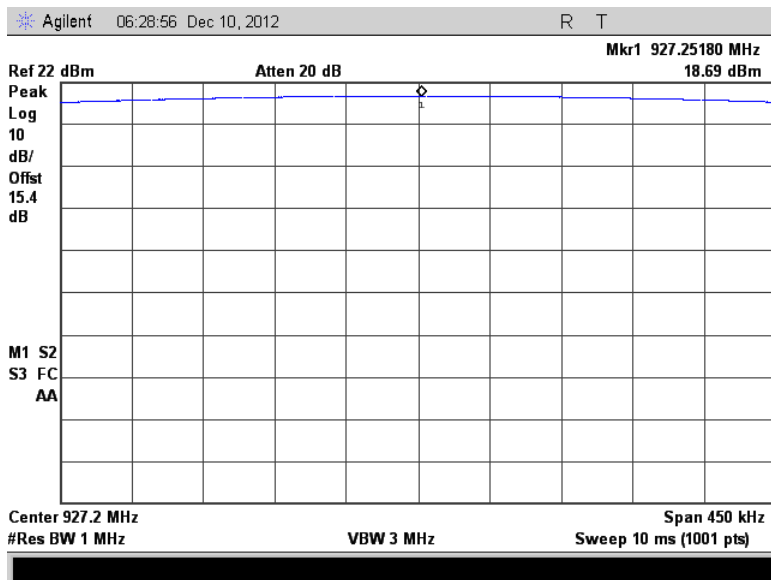


Figure 7.3.2-3: RF Output Power - High Channel

7.4 Channel Usage Requirements

7.4.1 Carrier Frequency Separation – FCC: Section 15.247(a)(1)

7.4.1.1 Measurement Procedure

The RF output port of the EUT was directly connected to the input of the spectrum analyzer. The span of the spectrum analyzer was set wide enough to capture two adjacent peaks and the RBW and VBW were set to $\geq 1\%$ of the span.

7.4.1.2 Measurement Results

Results are shown below.

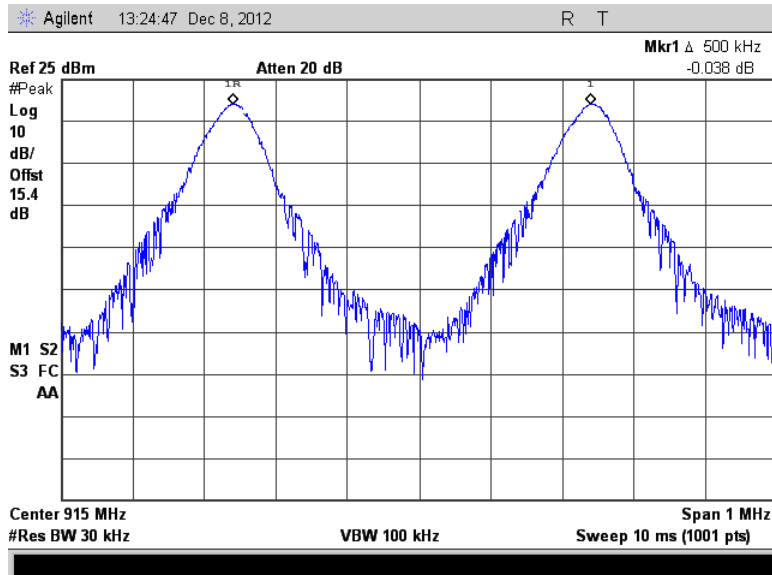


Figure 7.4.1.2-1: Carrier Frequency Separation

7.4.2 Number of Hopping Channels – FCC: Section 15.247(a)(1)(i)

7.4.2.1 Measurement Procedure

The RF output port of the EUT was directly connected to the input of the spectrum analyzer through suitable attenuation. The span of the spectrum analyzer was set wide enough to capture the number of hopping channels. The peak detector max hold function was enabled for the measurements.

7.4.2.2 Measurement Results

Results are shown below.

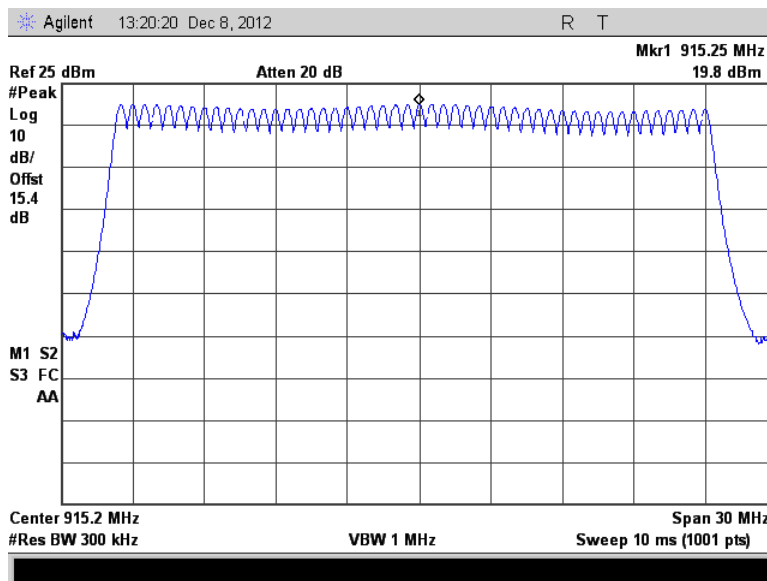


Figure 7.4.2.2-1: Number of Hopping Channels

7.4.3 Channel Dwell Time – FCC: Section 15.247(a)(1)(i)

7.4.3.1 Measurement Procedure

The RF output port of the EUT was directly connected to the input of the spectrum analyzer. The span of the spectrum analyzer was set 0 Hz centered on a hopping channel. The RBW was set to 1 MHz and the sweep time adjusted to capture the entire dwell time per channel with peak detector max hold function.

7.4.3.2 Measurement Results

Results are shown below.

Table 7.4.3.2-1 Dwell Time on a 20 Second Cycle

| Number of Hops Per Sec. (NHPS) | Number of Hops per Channel Per Sec. (NHPCPS) | Number of hops on a 20 s Cycle (NHPC) | Measured Dwell Times (ms) | Dwell Times on a 20 s Cycle (ms) | Limit (ms) | Status |
|-----------------------------------|---|--|------------------------------|-------------------------------------|---------------|--------|
| 2.5 | 0.05 | 1 | 400.000 | 400.00 | 400 | PASS |

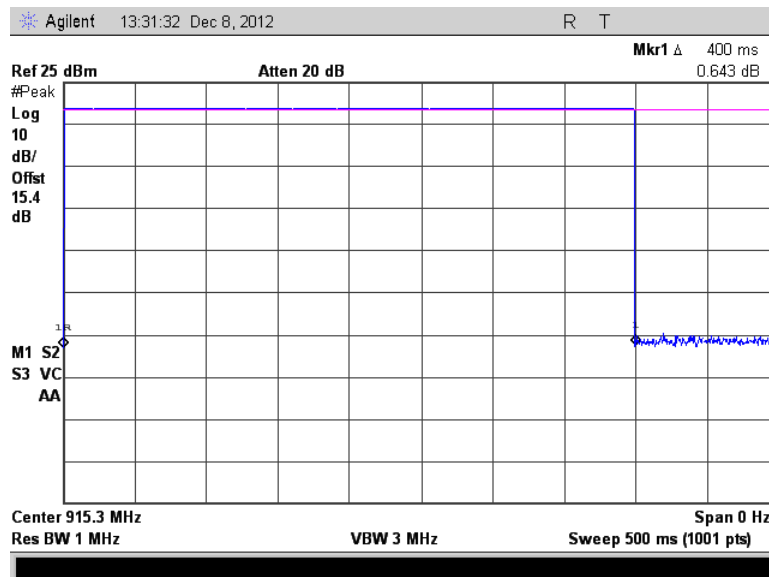


Figure 7.4.3.2-1: Channel Dwell Time

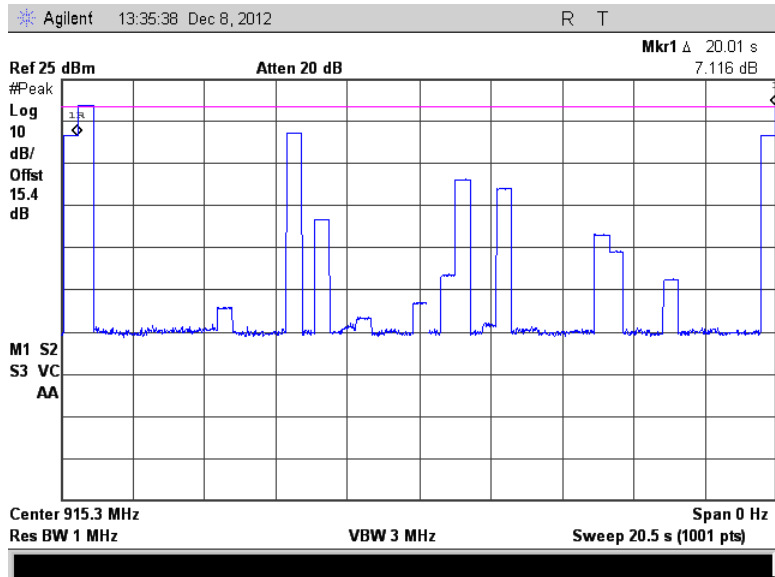


Figure 7.4.3.2-2: Channel Dwell Time – 20 seconds

Note: The emissions below the triggering levels are generated by the channels adjacent to the one evaluated.

7.4.4 20dB / 99% Bandwidth - FCC: Section 15.247(a)(1)(i)

7.4.4.1 Measurement Procedure

The RF output port of the EUT was directly connected to the input of the spectrum analyzer. The spectrum analyzer span was set to 2 to 3 times the estimated bandwidth of the emission. The RBW was to $\geq 1\%$ of the estimated emission bandwidth. The trace was set to max hold with a peak detector active. The Delta function of the analyzer was utilized to determine the 20 dB bandwidth of the emission.

The 99% occupied bandwidth was measured with the spectrum analyzer span set to fully display the emission, including the emissions skirts. The RBW was to 1% of the span. . The occupied 99% bandwidth was measured by using a delta marker at the lower and upper frequencies leading to 0.5% of the total power.

7.4.4.2 Measurement Results

Results are shown below.

Table 7.4.4.2-1: 20dB / 99% Bandwidth

| Frequency [MHz] | 20dB Bandwidth [kHz] | 99% Bandwidth [kHz] |
|-----------------|----------------------|---------------------|
| 902.75 | 86.0 | 79.5 |
| 915.25 | 84.8 | 79.8 |
| 927.25 | 85.6 | 79.5 |

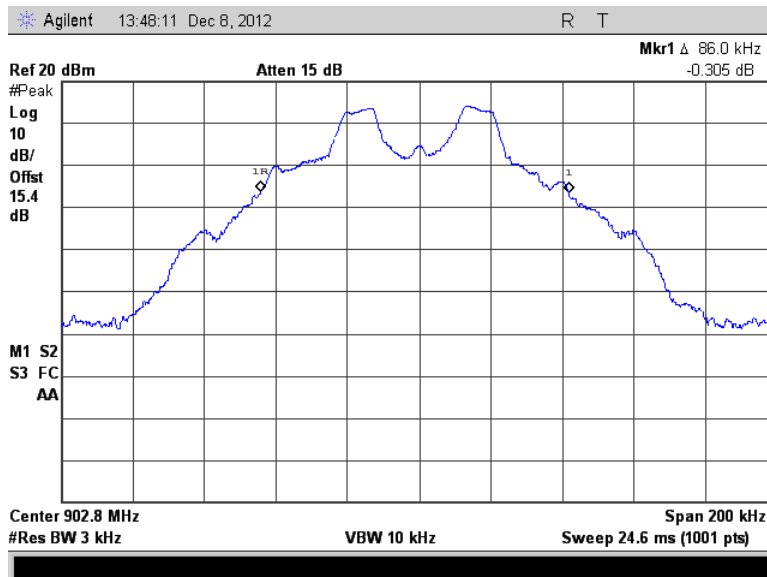


Figure 7.4.4.2-1: 20dB BW Low Channel

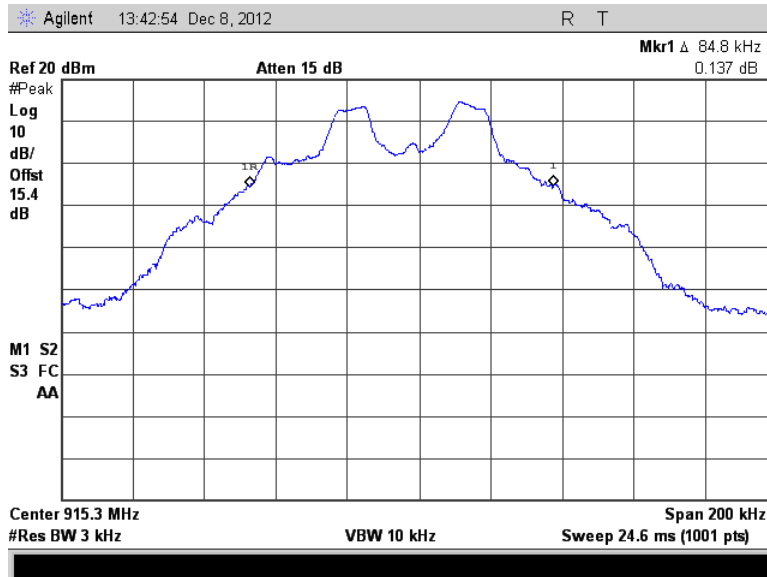


Figure 7.4.4.2-2: 20dB BW Middle Channel

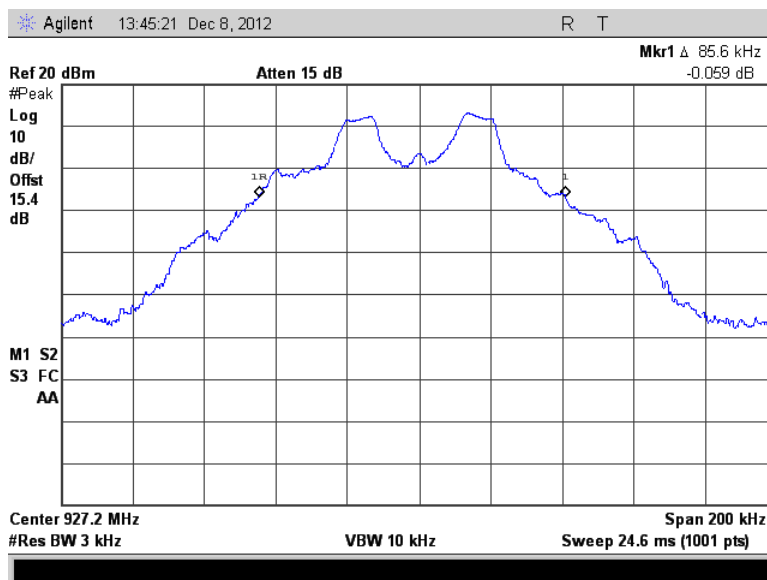


Figure 7.4.4.2-3: 20dB BW High Channel

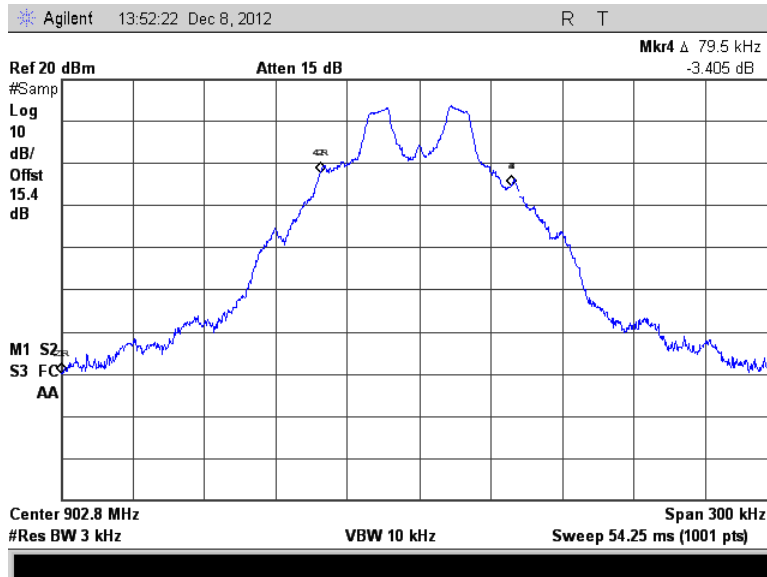


Figure 7.4.4.2-4: 99% OBW Low Channel

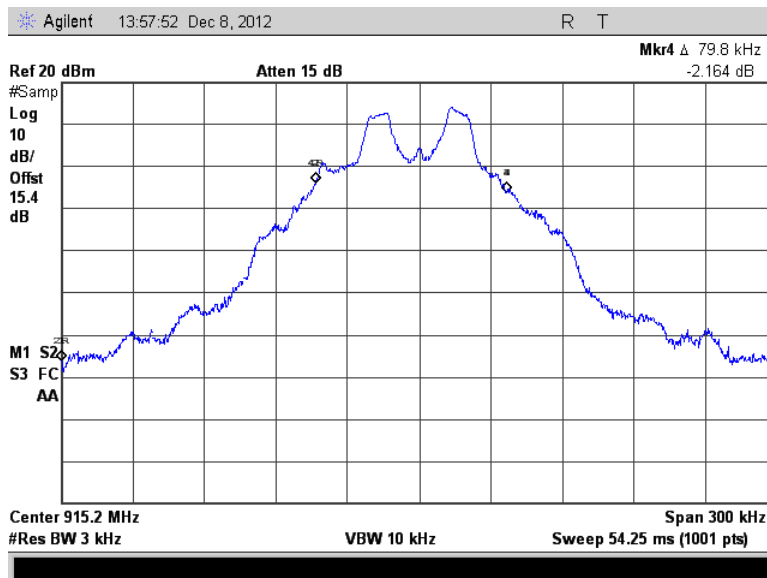


Figure 7.4.4.2-5: 99% OBW Middle Channel

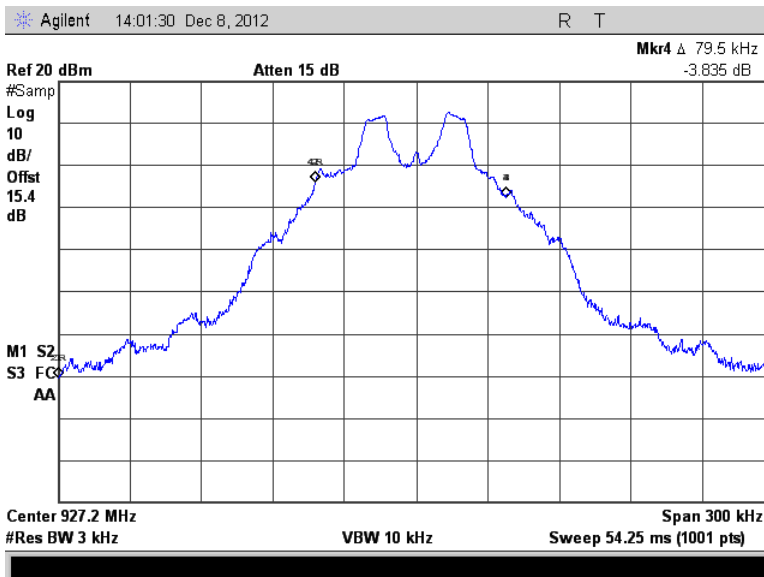


Figure 7.4.4.2-6: 99% OBW High Channel

7.5 Band-Edge Compliance and Spurious Emissions-FCC 15.247(d)

7.5.1 Band-Edge Compliance of RF Conducted Emissions

7.5.1.1 Measurement Procedure

The RF output port of the EUT was connected to the input of the spectrum analyzer through suitable attenuation. The EUT was investigated at the lowest and highest channel available to determine band-edge compliance. For each measurement the spectrum analyzer's RBW was set to 100 kHz, which is $\geq 1\%$ of the span, and the VBW was set to ≥ 300 kHz.

7.5.1.2 Measurement Results

Results are shown below.

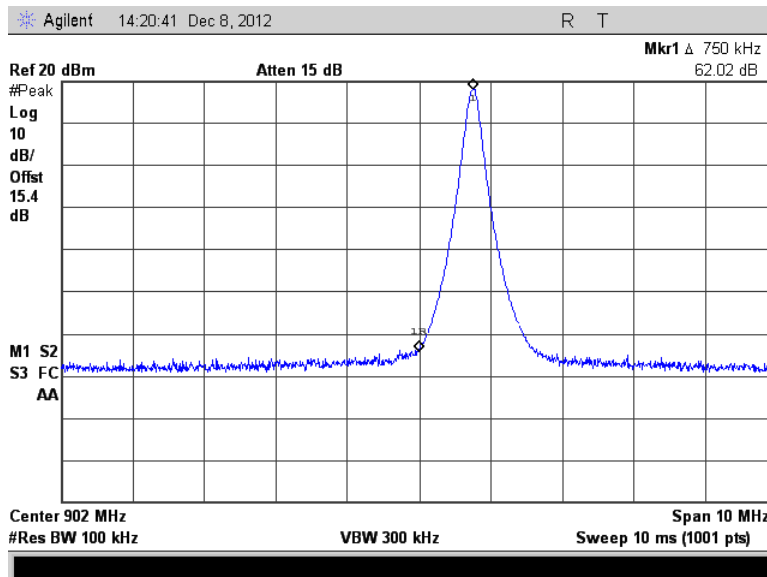


Figure 7.5.1.2-1: Lower Band-edge – Single Channel Mode

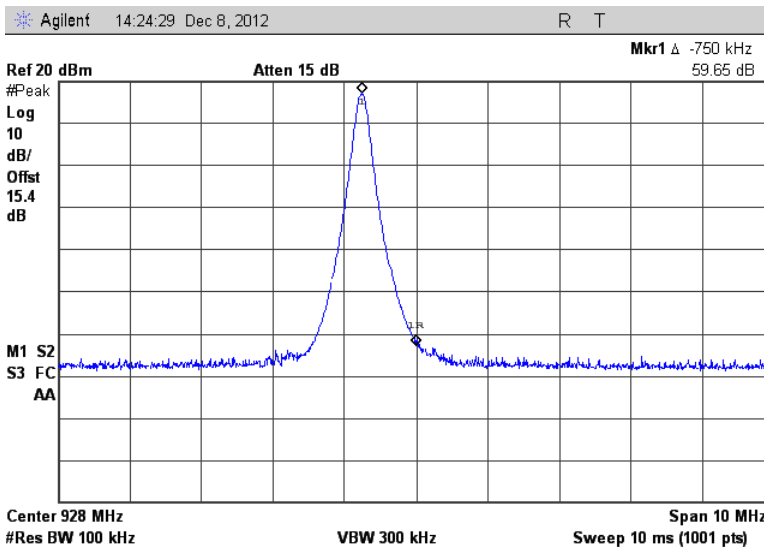


Figure 7.5.1.2-2: Upper Band-edge – Single Channel Mode

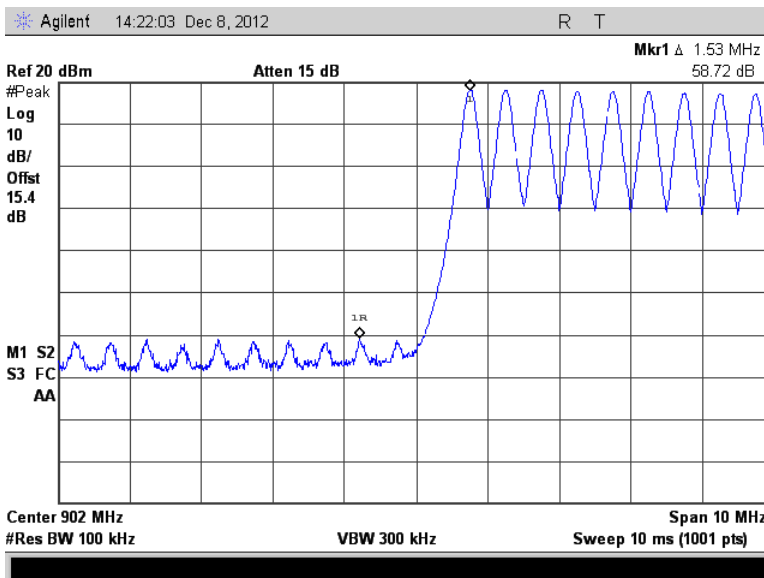


Figure 7.5.1.2-3: Lower Band-edge – Hopping Mode

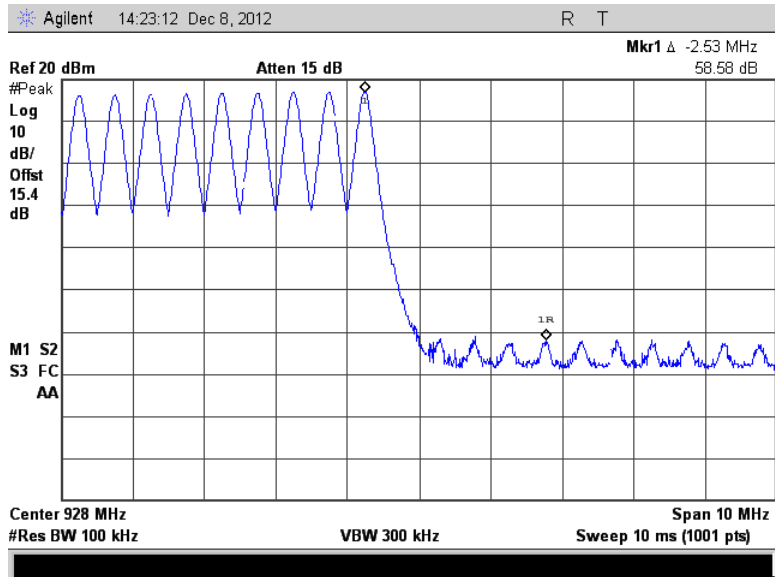


Figure 7.5.1.2-4: Upper Band-edge – Hopping Mode

7.5.2 RF Conducted Spurious Emissions

7.5.2.1 Measurement Procedure

The RF output port of the EUT was connected to the spectrum analyzer input using a 15 dB attenuator. The EUT was investigated for conducted spurious emissions from 30MHz to 10 GHz, 10 times the highest fundamental frequency. Measurements were made at the low, center and high channels of the EUT. For each measurement, the spectrum analyzer's RBW was set to 100 kHz. A peak detector function was used with the trace set to max hold. The levels were corrected for cable and attenuator losses.

7.5.2.2 Measurement Results

Results are shown below.

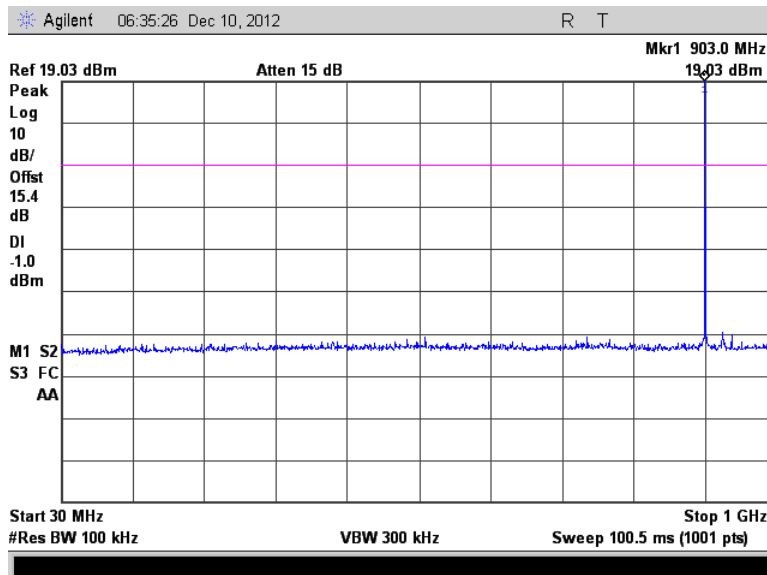


Figure 7.5.2.2-1: 30 MHz – 1 GHz – Low Channel

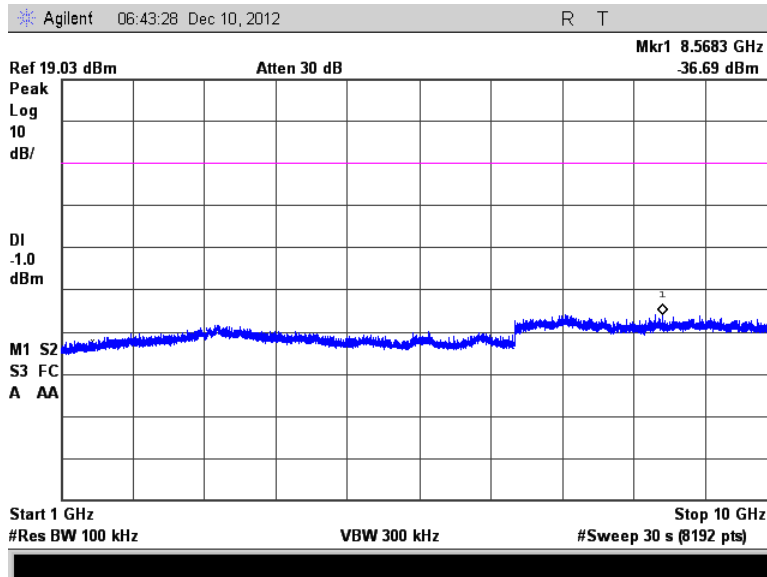


Figure 7.5.2.2-2: 1 GHz –10 GHz – Low Channel

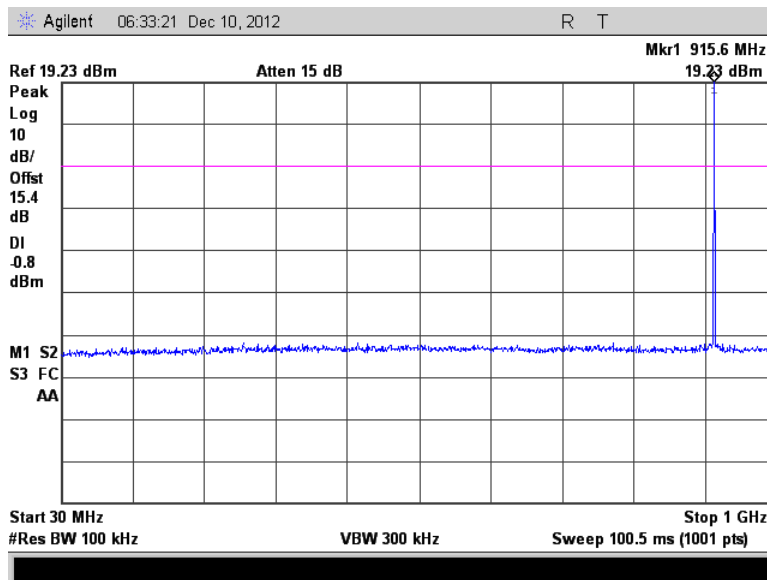


Figure 7.5.2.2-3: 30 MHz – 1 GHz – Middle Channel

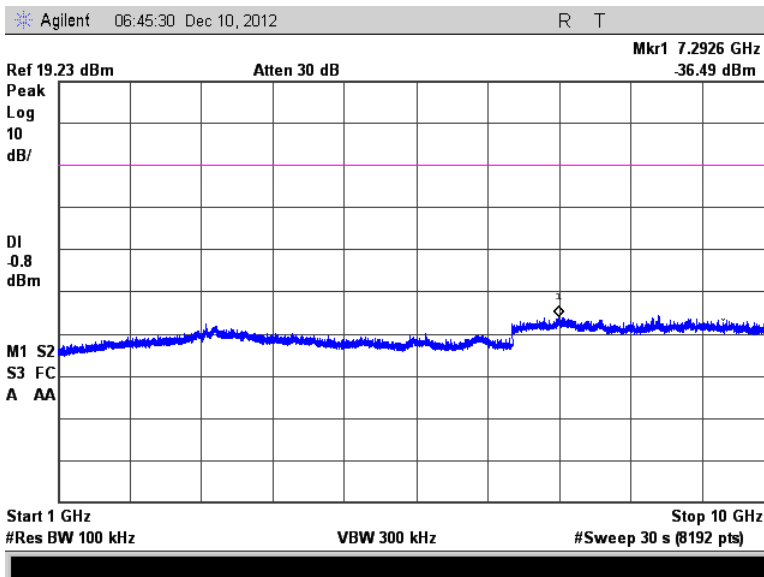


Figure 7.5.2.2-4: 1 GHz - 10 GHz - Middle Channel

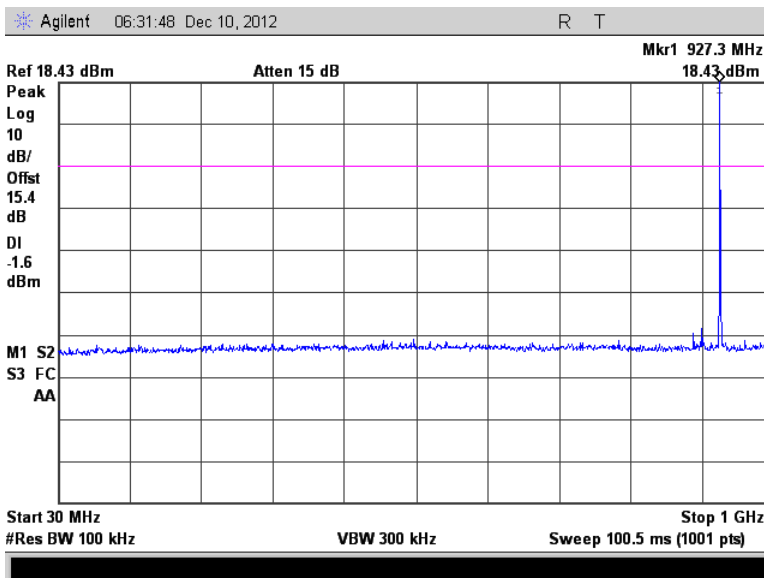


Figure 7.5.2.2-5: 30 MHz - 1 GHz - High Channel

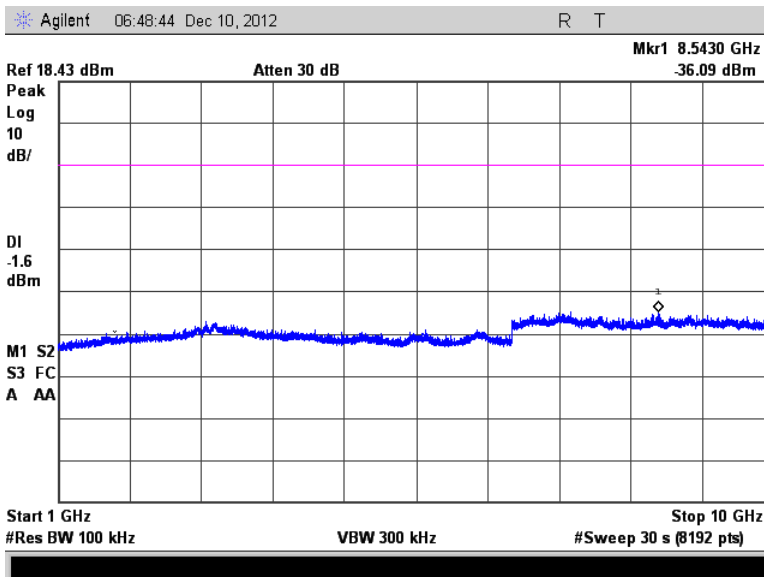


Figure 7.5.2.2-6: 1 GHz –10 GHz – High Channel

7.5.3 Radiated Spurious Emissions - FCC Section 15.205

7.5.3.1 Measurement Procedure

Radiated emissions tests were made over the frequency range of 30 MHz to 10 GHz, 10 times the highest fundamental frequency.

The EUT was rotated through 360° and the receive antenna height was varied from 1m to 4m so that the maximum radiated emissions level would be detected. For frequencies below 1000MHz, quasi-peak measurements were made using a resolution bandwidth RBW of 120 kHz and a video bandwidth VBW of 300 kHz. For frequencies above 1000 MHz, peak and average measurements made with RBW and VBW of 1 MHz and 3 MHz respectively.

The EUT was caused to generate a continuous carrier signal on the hopping channel.

7.5.3.2 Measurement Results

Radiated spurious emissions found in the band of 30MHz to 10GHz are reported in the tables below.

Table 7.5.3.2-1: Radiated Spurious Emissions Tabulated Data

| Frequency (MHz) | Level (dBuV) | | Antenna Polarity (H/V) | Correction Factors (dB) | Corrected Level (dBuV/m) | | Limit (dBuV/m) | | Margin (dB) | |
|------------------------------------|--------------|---------|------------------------|-------------------------|--------------------------|---------|----------------|---------|-------------|---------|
| | pk | Qpk/Avg | | | pk | Qpk/Avg | pk | Qpk/Avg | pk | Qpk/Avg |
| Low Channel (902.75 MHz) | | | | | | | | | | |
| 2706.75 | 48.93 | 35.80 | H | -6.89 | 42.04 | 28.91 | 74.0 | 54.0 | 32.0 | 25.1 |
| 2706.75 | 48.27 | 35.14 | V | -6.89 | 41.38 | 28.25 | 74.0 | 54.0 | 32.6 | 25.7 |
| 3609 | 47.17 | 35.97 | H | -3.64 | 43.53 | 32.33 | 74.0 | 54.0 | 30.5 | 21.7 |
| 3609 | 47.19 | 35.09 | V | -3.64 | 43.55 | 31.45 | 74.0 | 54.0 | 30.5 | 22.6 |
| 4511.25 | 46.78 | 34.52 | H | -2.34 | 44.44 | 32.18 | 74.0 | 54.0 | 29.6 | 21.8 |
| 4511.25 | 46.19 | 33.71 | V | -2.34 | 43.85 | 31.37 | 74.0 | 54.0 | 30.1 | 22.6 |
| 5413.5 | 46.54 | 33.82 | H | 0.20 | 46.74 | 34.02 | 74.0 | 54.0 | 27.3 | 20.0 |
| 5413.5 | 45.56 | 33.12 | V | 0.20 | 45.76 | 33.32 | 74.0 | 54.0 | 28.2 | 20.7 |
| Middle Channel (915.25 MHz) | | | | | | | | | | |
| 3661 | 47.41 | 35.20 | H | -3.46 | 43.95 | 31.74 | 74.0 | 54.0 | 30.0 | 22.3 |
| 3661 | 46.98 | 35.36 | V | -3.46 | 43.52 | 31.90 | 74.0 | 54.0 | 30.5 | 22.1 |
| 7322 | 46.72 | 34.38 | H | 3.16 | 49.88 | 37.54 | 74.0 | 54.0 | 24.1 | 16.5 |
| 7322 | 46.79 | 34.12 | V | 3.16 | 49.95 | 37.28 | 74.0 | 54.0 | 24.0 | 16.7 |
| High Channel (927.25 MHz) | | | | | | | | | | |
| 1448.8 | 56.16 | 47.34 | V | -12.80 | 43.36 | 34.54 | 74.0 | 54.0 | 30.6 | 19.5 |
| 3709 | 47.97 | 38.22 | H | -3.28 | 44.69 | 34.94 | 74.0 | 54.0 | 29.3 | 19.1 |
| 3709 | 47.71 | 35.91 | V | -3.28 | 44.43 | 32.63 | 74.0 | 54.0 | 29.6 | 21.4 |
| 4636.25 | 45.01 | 32.80 | H | -2.01 | 43.00 | 30.79 | 74.0 | 54.0 | 31.0 | 23.2 |
| 7418 | 46.35 | 34.15 | H | 3.50 | 49.85 | 37.65 | 74.0 | 54.0 | 24.1 | 16.3 |
| 7418 | 47.85 | 34.25 | V | 3.50 | 51.35 | 37.75 | 74.0 | 54.0 | 22.6 | 16.2 |

* Notes:

All emissions above 7418 MHz were attenuated below the limits and the noise floor of the measurement equipment.

7.5.3.3 Sample Calculation:

$$R_C = R_U + CF_T$$

Where:

CF_T = Total Correction Factor (AF+CA+AG)-DC (Average Measurements Only)R_U = Uncorrected ReadingR_C = Corrected Level

AF = Antenna Factor

CA = Cable Attenuation

AG = Amplifier Gain

DC = Duty Cycle Correction Factor

Example Calculation: PeakCorrected Level: 48.93+ (-6.89) = 42.04dB μ V/mMargin: 74 dBuV/m – 42.04dB μ V/m = 32.0dB**Example Calculation: Average**Corrected Level: 35.8 + (-6.89) = 28.91dB μ V/mMargin: 54 dBuV/m – 28.91dB μ V/m = 25.1dB**8 CONCLUSION**

In the opinion of ACS, Inc., the HD011SA002 manufactured by ValidFill, LLC meets the requirements of FCC Part 15 subpart C.

END REPORT