

---

# FCC Test Report

---

Report No.: AGC00190170501FE03

**FCC ID** : ODCHB-B2  
**APPLICATION PURPOSE** : Original Equipment  
**PRODUCT DESIGNATION** : bone conduction Bluetooth headset  
**BRAND NAME** : badasheng  
**MODEL NAME** : HB-B2, B2, B3  
**CLIENT** : Shenzhen Bada Sheng Electronic Co., Ltd.  
**DATE OF ISSUE** : Jun.12, 2017  
**STANDARD(S)**  
**TEST PROCEDURE(S)** : FCC Part 15 Subpart C Section 15.249  
**REPORT VERSION** : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



**CAUTION:**

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



### Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Jun.12, 2017	Valid	Original Report

## TABLE OF CONTENTS

<b>1. VERIFICATION OF CONFORMITY .....</b>	<b>4</b>
<b>2. GENERAL INFORMATION .....</b>	<b>5</b>
2.1. PRODUCT DESCRIPTION .....	5
2.2. TABLE OF CARRIER FREQUENCYS .....	5
<b>3. MEASUREMENT UNCERTAINTY.....</b>	<b>7</b>
<b>4. DESCRIPTION OF TEST MODES.....</b>	<b>7</b>
<b>5. SYSTEM TEST CONFIGURATION .....</b>	<b>9</b>
5.1. CONFIGURATION OF EUT SYSTEM.....	9
5.2. EQUIPMENT USED IN EUT SYSTEM.....	9
5.3. SUMMARY OF TEST RESULTS.....	9
<b>6. TEST FACILITY .....</b>	<b>10</b>
<b>7. TEST METHOD .....</b>	<b>10</b>
<b>8. ALL TEST EQUIPMENT LIST .....</b>	<b>10</b>
<b>9. RADIATED EMISSION .....</b>	<b>12</b>
9.1TEST LIMIT.....	12
9.2. MEASUREMENT PROCEDURE.....	13
9.3. TEST SETUP.....	15
9.4. TEST RESULT .....	17
<b>10. BAND EDGE EMISSION .....</b>	<b>46</b>
10.1. MEASUREMENT PROCEDURE.....	46
10.2 TEST SETUP .....	46
10.3 RADIATED TEST RESULT .....	47
<b>11. 20DB BANDWIDTH.....</b>	<b>55</b>
11.1. MEASUREMENT PROCEDURE .....	55
11.2. TEST SET-UP .....	55
11.3. LIMITS AND MEASUREMENT RESULTS.....	55
<b>12. FCC LINE CONDUCTED EMISSION TEST .....</b>	<b>64</b>
12.1. LIMITS OF LINE CONDUCTED EMISSION TEST.....	64
12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST.....	64
12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST .....	65
12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST.....	65
12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST.....	66
<b>APPENDIX A: PHOTOGRAPHS OF TEST SETUP .....</b>	<b>70</b>
<b>APPENDIX B: PHOTOGRAPHS OF EUT .....</b>	<b>73</b>

## 1. VERIFICATION OF CONFORMITY

<b>Applicant</b>	Shenzhen Bada Sheng Electronic Co., Ltd.
<b>Address</b>	Blk 12 Foodstuff Ind Park, Songyuan Village, Guanlan Town, Shenzhen, China
<b>Manufacturer</b>	Shenzhen Bada Sheng Electronic Co., Ltd.
<b>Address</b>	Blk 12 Foodstuff Ind Park, Songyuan Village, Guanlan Town, Shenzhen, China
<b>Product Designation</b>	bone conduction Bluetooth headset
<b>Brand Name</b>	badasheng
<b>Test Model</b>	HB-B2
<b>Series Model</b>	B2, B3
<b>Difference description</b>	All the same except for the model name
<b>Date of test</b>	Jun.07, 2017 to Jun.09, 2017
<b>Deviation</b>	None
<b>Condition of Test Sample</b>	Normal
<b>Report Template</b>	AGCRT-US-BR/RF

We hereby certify that:

The above equipment was tested by Dongguan Precise Testing Service Co., Ltd. The test data, the energy emitted by the sample tested as described in this report is in compliance with the requirements of FCC Rules Part 15.249.



Tested By \_\_\_\_\_  
Time Huang(Huang Nanhui) Jun.09, 2017



Reviewed By \_\_\_\_\_  
Forrest Lei(Lei Yonggang) Jun.12, 2017



Approved By \_\_\_\_\_  
Solger Zhang(Zhang Hongyi)  
Authorized Officer Jun.12, 2017

## 2. GENERAL INFORMATION

### 2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

<b>Operation Frequency</b>	2.402 GHz to 2.480GHz
<b>RF Output Power(BR/EDR)</b>	3.90dBm(Max EIRP Power=Max radiation field-95.2)
<b>RF Output Power(BLE)</b>	3.87dBm(Max EIRP Power=Max radiation field-95.2)
<b>Bluetooth Version</b>	V4.0
<b>Modulation</b>	GFSK, $\pi/4$ -DQPSK, 8DPSK for BR/EDR, GFSK for BLE
<b>Number of channels</b>	79 for BR/EDR, 40 for BLE
<b>Hardware Version</b>	V1.1
<b>Software Version</b>	V1.0
<b>Antenna Designation</b>	Ceramic Antenna
<b>Antenna Gain</b>	2.64dBi
<b>Power Supply</b>	DC 3.7V by battery

**Note:** The USB port only be used for charging and can't be used to transfer data with PC.

### 2.2. TABLE OF CARRIER FREQUENCIES

BR/EDR Channel List

Frequency Band	Channel Number	Frequency
2400~2483.5MHz	0	2402MHz
	1	2403MHz
	:	:
	38	2440 MHz
	39	2441 MHz
	40	2442 MHz
	:	:
	77	2479 MHz
	78	2480 MHz

BLE Channel List

Frequency Band	Channel Number	Frequency
2400~2483.5MHz	0	2402MHz
	1	2404MHz
	:	:
	38	2478 MHz
	39	2480 MHz

### 3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 3.18\text{dB}$
2	All emissions, radiated	$\pm 3.91\text{dB}$
3	Temperature	$\pm 0.5^\circ\text{C}$
4	Humidity	$\pm 2\%$

### 4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel TX(GFSK)
2	Middle channel TX (GFSK)
3	High channel TX (GFSK)
4	Low channel TX( $\pi/4$ -DQPSK)
5	Middle channel TX( $\pi/4$ -DQPSK)
6	High channel TX ( $\pi/4$ -DQPSK)
7	Low channel TX(8DPSK)
8	Middle channel TX (8DPSK)
9	High channel TX (8DPSK)
10	BT Link with charging
11	BT Link

Note:

1. All the test modes can be supply by battery, only the result of the worst case was recorded in the report, if no other cases.
2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
3. The EUT used fully-charged battery when tested.

### Software Setting

The screenshot displays the BlueTest3 software interface. The window title is "BlueTest3". It is divided into several sections:

- Test Mode:** A list of test modes including PAUSE, RADIO STATUS, RADIO STATUS FULL, TXSTART, TXDATA1 (highlighted), TXDATA2, TXDATA3, TXDATA4, RXSTART1, RXSTART2, and RXDATA1.
- Test Arguments:** Fields for "LO Freq. (MHz)" set to 2402 and "Power (Ext, Int)" set to 55 and 50.
- Buttons:** "Close", "Execute", "Cold Reset", and "Warm Reset".
- Test Results:** A section with a "Save to file" checkbox, a "Browse for file" button, and a "Display" section with "Standard" selected and "Bit Error" unselected. A file path ".\logfile.txt" is shown.
- Log Output:** A text area showing the following log entries:


```
Opening USB SPI (600732).
Transport active.
dal (Hardware ID 0x332) firmware version 8648.
Sent Command Varid 5004, parameters: 0017 0003 0011 0000 0000 0000
Radio Test CFG PKT successful
Sent Command Varid 5004, parameters: 0004 0962 FF32 0000 0000 0000
Radio Test TXDATA1 successful
Sent Command Varid 5004, parameters: 0004 0962 3232 0000 0000 0000
Radio Test TXDATA1 successful
Sent Command Varid 5004, parameters: 0004 0989 3232 0000 0000 0000
Radio Test TXDATA1 successful
Sent Command Varid 5004, parameters: 0004 0989 3228 0000 0000 0000
Radio Test TXDATA1 successful
Sent Command Varid 5004, parameters: 0004 0989 3728 0000 0000 0000
Radio Test TXDATA1 successful
Sent Command Varid 5004, parameters: 0004 0980 3728 0000 0000 0000
Radio Test TXDATA1 successful
Sent Command Varid 5004, parameters: 0004 0962 3728 0000 0000 0000
Radio Test TXDATA1 successful
```



## 5. SYSTEM TEST CONFIGURATION


### 5.1. CONFIGURATION OF EUT SYSTEM

Configure 1: (Normal hopping)

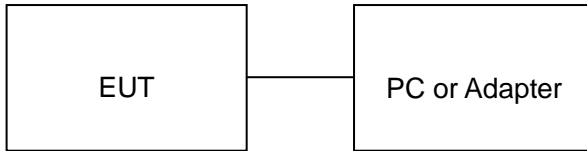

**Note:** Owing to the EUT has own battery, Testing will be performed while PC or adapter remove.

Configure 2: (Control continuous TX)

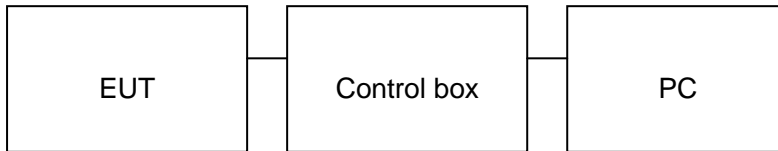

### 5.2. EQUIPMENT USED IN EUT SYSTEM

ITEM	EQUIPMENT	MFR/BRAND	MODEL/TYPE NO.	REMARK
1	bone conduction Bluetooth headset	badasheng	HB-B2	EUT
2	Battery	BYT	451819	Accessory
3	PC	Sony	E1412AYCW	A.E
4	PC Adapter	Sony	VGP-AC19V36	A.E
5	Control box	CSR	USB_SPI_TOOL	A.E
6	Adapter	IPRO	NTR-S01	A.E
7	USB Cable	N/A	1.0m Unshielded	A.E

### 5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.249(a) §15.209	Radiated Emission	Compliant
§15.249(d)	Band Edges	Compliant
§15.207	Conduction Emission	Compliant
§15.215	Bandwidth	Compliant

## 6. TEST FACILITY

<b>Site</b>	Dongguan Precise Testing Service Co., Ltd.
<b>Location</b>	Building D,Baoding Technology Park,Guangming Road2,Dongcheng District, Dongguan, Guangdong, China,
<b>FCC Registration No.</b>	371540
<b>Description</b>	The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2014.

## 7. TEST METHOD

All measurements contained in this report were conducted with ANSI C63.10-2013

## 8. ALL TEST EQUIPMENT LIST

FOR RADIATED EMISSION TEST (BELOW 1GHz)

Radiated Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	ROHDE & SCHWARZBECK	ESCI	101417	July 4, 2016	July 3, 2017
Trilog Broadband Antenna (25M-1GHz)	SCHWARZBECK	VULB9160	9160-3355	July 4, 2016	July 3, 2017
Signal Amplifier	SCHWARZBECK	BBV 9475	9745-0013	July 4, 2016	July 3, 2017
RF Cable	SCHWARZBECK	AK9515E	96221	July 4, 2016	July 3, 2017
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2017	June 5, 2018
MULTI-DEVICE Positioning Controller	MAX-FULL	MF-7802	MF780208339	N/A	N/A
Active loop antenna (9K-30MHz)	SCHWARZBECK	FMZB1519	1519-038	June 6, 2017	June 5, 2018
Spectrum analyzer	AGILENT	E4407B	MY46185649	June 6, 2017	June 5, 2018
Radiation Cable 1	MXT	RS1	R005	June 6, 2017	June 5, 2018
Radiation Cable 2	MXT	RS1	R006	June 6, 2017	June 5, 2018
temporary antenna connector	N/A	S100	--	July 4, 2016	July 3, 2017

FOR RADIATED EMISSION TEST (1GHz ABOVE)

Radiated Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	ROHDE & SCHWARZBECK	ESCI	101417	July 4, 2016	July 3, 2017
Horn Antenna (1G-18GHz)	SCHWARZBECK	BBHA9120D	9120D-1246	July 11, 2016	July 10, 2017
Spectrum Analyzer	AGILENT	E4411B	MY4511453	July 4, 2016	July 3, 2017
Signal Amplifier	SCHWARZBECK	BBV 9718	9718-269	July 7, 2016	July 6, 2017
RF Cable	SCHWARZBECK	AK9515H	96220	July 8, 2016	July 7, 2017
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2017	June 5, 2018
MULTI-DEVICE Positioning Controller	MAX-FULL	MF-7802	MF780208339	N/A	N/A
Horn Ant (18G-40GHz)	SCHWARZBECK	BBHA 9170	9170-181	June 6, 2017	June 5, 2018
Radiation Cable 1	MXT	RS1	R005	June 6, 2017	June 5, 2018
Radiation Cable 2	MXT	RS1	R006	June 6, 2017	June 5, 2018

Conducted Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	ROHDE & SCHWARZBECK	ESCI	101417	July 4, 2016	July 3, 2017
Artificial Mains Network	NARDA	L2-16B	000WX31025	July 8, 2016	July 7, 2017
Artificial Mains Network (AUX)	NARDA	L2-16B	000WX31026	July 8, 2016	July 7, 2017
RF Cable	SCHWARZBECK	AK9515E	96222	July 4, 2016	July 3, 2017
Shielded Room	CHENGYU	843	PTS-002	June 6, 2017	June 5, 2018
Conduction Cable	MXT	SE1	S003	June 6, 2017	June 5, 2018

## 9. RADIATED EMISSION

### 9.1 TEST LIMIT

#### Standard FCC15.249

Fundamental Frequency	Field Strength of Fundamental (millivolts/meter)	Field Strength of Harmonics (microvolts/meter)
900-928MHz	50	500
2400-2483.5MHz	50	500
5725-5875MHz	50	500
24.0-24.25GHz	250	2500

#### Standard FCC 15.209

Frequency (MHz)	Distance Meters	Field Strengths Limit	
		$\mu$ V/m	dB( $\mu$ V)/m
0.009 ~ 0.490	300	2400/F(kHz)	---
0.490 ~ 1.705	30	24000/F(kHz)	---
1.705 ~ 30	30	30	---
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	Other:74.0 dB( $\mu$ V)/m (Peak) 54.0 dB( $\mu$ V)/m (Average)	

Remark: (1) Emission level  $\text{dB}\mu\text{V} = 20 \log \text{Emission level } \mu\text{V/m}$   
(2) The smaller limit shall apply at the cross point between two frequency bands.  
(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

## 9.2. MEASUREMENT PROCEDURE


1. The measuring distance of 3m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Below 1GHz)
2. The measuring distance of 3m shall used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Above 1GHz)
3. The height of the test antenna shall vary between 1m to 4m.Both horizontal and vertical polarization Of the antenna are set to make the measurement.
4. The initial step in collecting radiated emission data is a receive peak detector mode. Pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
5. All readings are peak unless otherwise stated QP in column of Note. Peak denoted that the Peak reading compliance with the QP limits and then QP Mode measurement didn't perform(Below 1GHz)
6. All readings are Peak mode value unless otherwise stated AVG in column of Note. If the Peak mode measured value compliance with the Peak limits and lower than AVG Limits, the EUT shall be deemed to meet Peak & AVG limits and then only Peak mode was measured, but AVG mode didn't perform.(Above 1GHz)

The following table is the setting of spectrum analyzer and receiver.


<b>Spectrum Parameter</b>	<b>Setting</b>
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz RBW 2MHz/VBW 6MHz for Peak, RBW 1.5MHz/10Hz for Average
<b>Receiver Parameter</b>	<b>Setting</b>
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP

### 9.3. TEST SETUP


#### RADIATED EMISSION TEST SETUP BELOW 30MHz

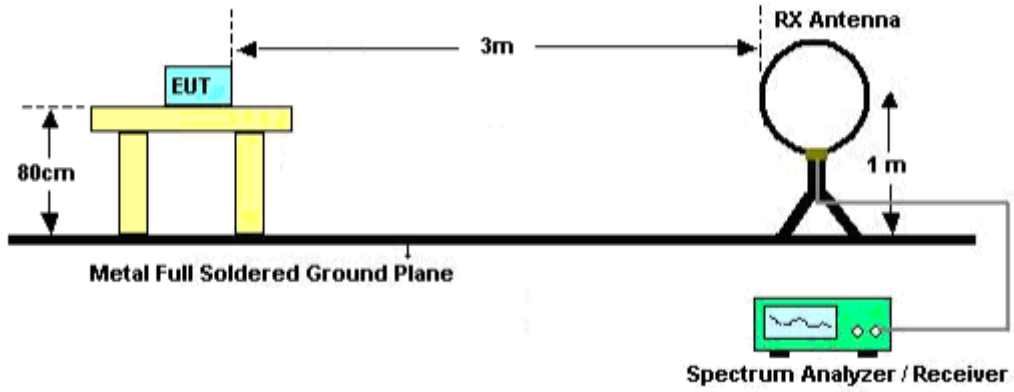

#### RADIATED EMISSION TEST SETUP 30MHz-1000MHz

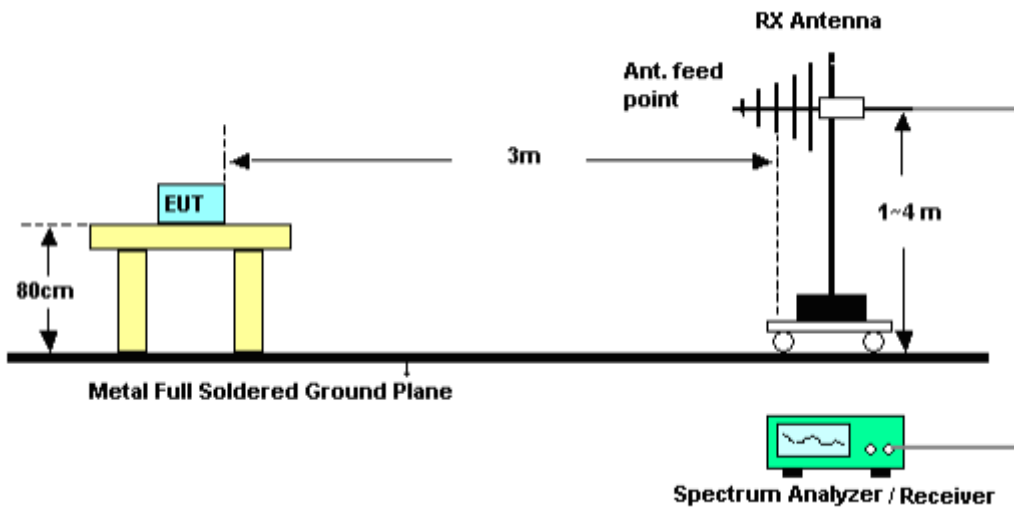

### RADIATED EMISSION TEST SETUP ABOVE 1000MHz

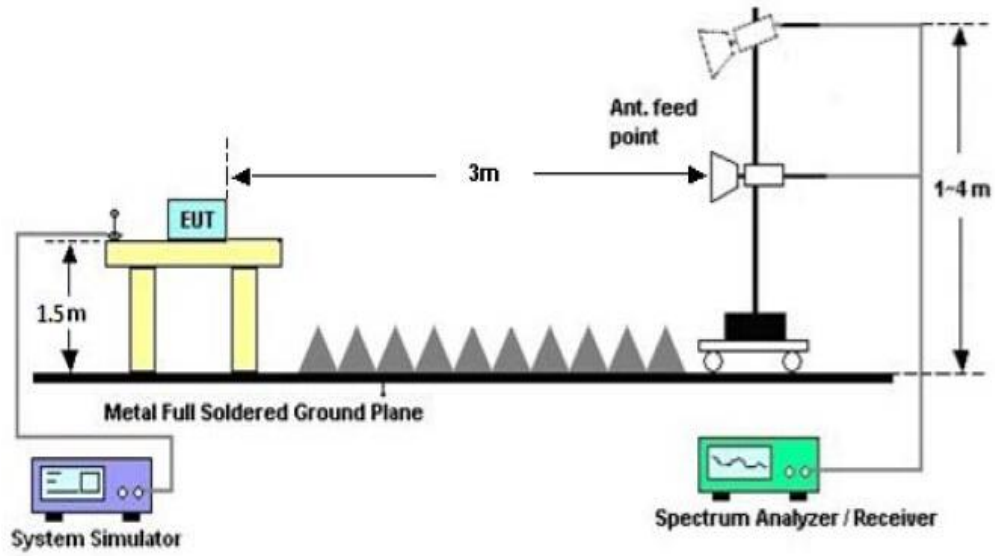



#### **9.4. TEST RESULT**

**(Worst modulation:GFSK)**


**FOR BR/EDR**

#### **RADIATED EMISSION BELOW 30MHz**

No emission found between lowest internal used/generated frequencies to 30MHz.

**RADIATED EMISSION BELOW 1GHz**

**RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL-HORIZONTAL**

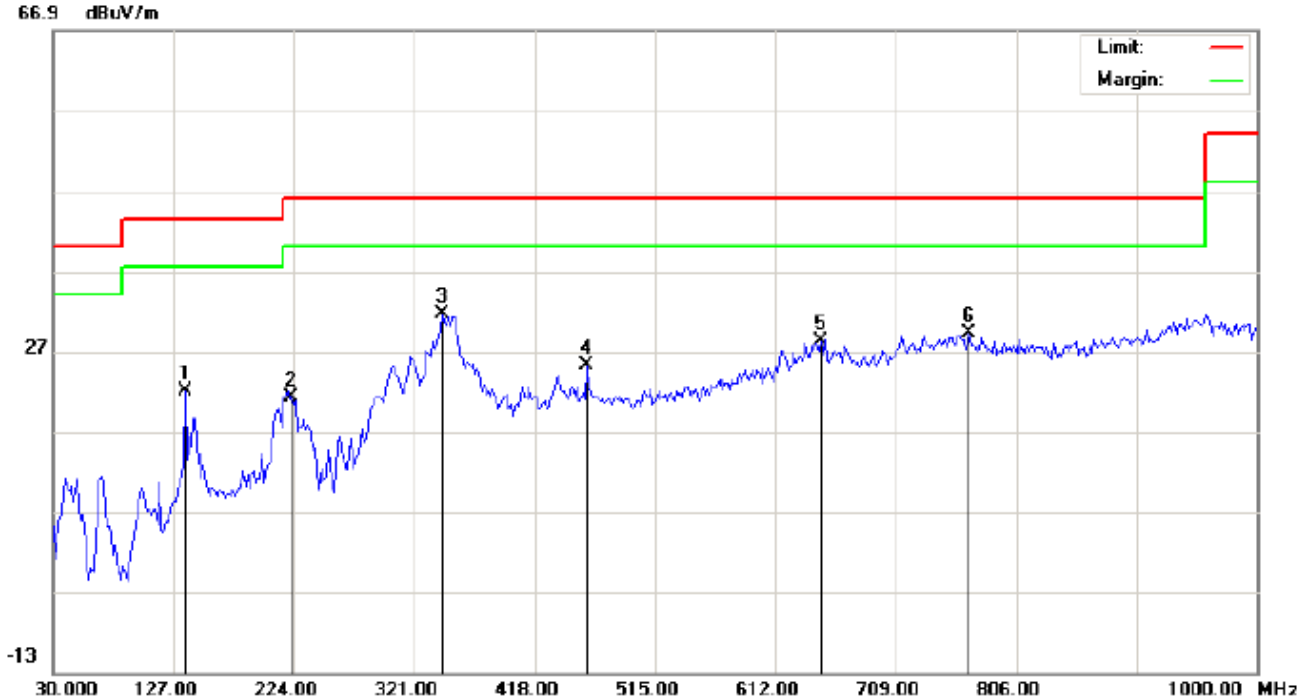

Site: site #1  
Limit: FCC Class B 3M Radiation  
EUT: bone conduction Bluetooth headset  
M/N: HB-B2  
Mode: Low Channel TX  
Note:


Polarization: *Horizontal*  
Power:  
Distance:

Temperature: 22.4  
Humidity: 52.5 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		136.7000	8.39	13.66	22.05	43.50	-21.45	peak			
2		222.3833	11.49	9.72	21.21	46.00	-24.79	peak			
3	*	343.6333	13.19	18.32	31.51	46.00	-14.49	peak			
4		460.0333	4.48	20.70	25.18	46.00	-20.82	peak			
5		649.1833	4.29	23.85	28.14	46.00	-17.86	peak			
6		767.2000	2.32	26.87	29.19	46.00	-16.81	peak			

**RESULT: PASS**

RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL -VERTICAL

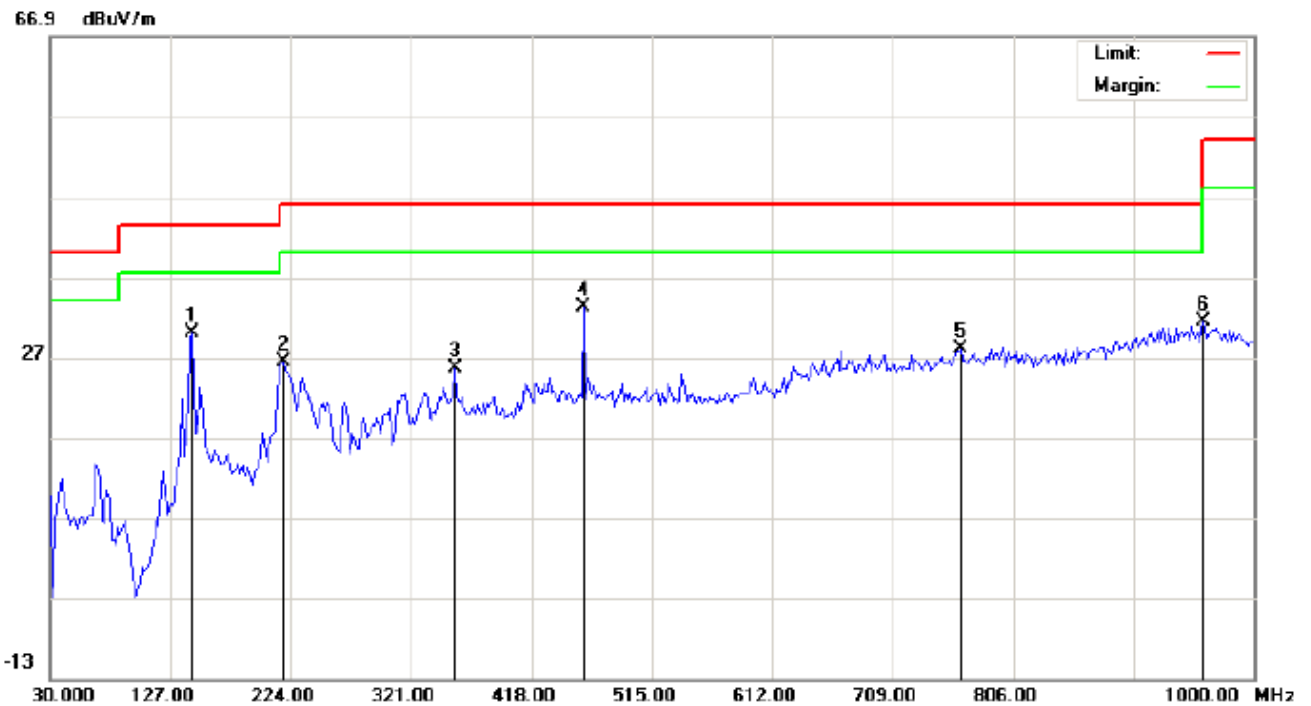

Site: site #1  
Limit: FCC Class B 3M Radiation  
EUT: bone conduction Bluetooth headset  
M/N: HB-B2  
Mode: Low Channel TX  
Note:

Polarization: **Vertical**  
Power:  
Distance:

Temperature: 22.4  
Humidity: 52.5 %


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		144.7833	14.80	15.23	30.03	43.50	-13.47	peak			
2		217.5333	15.66	10.72	26.38	46.00	-19.62	peak			
3		356.5667	6.78	18.78	25.56	46.00	-20.44	peak			
4	*	460.0333	12.53	20.70	33.23	46.00	-12.77	peak			
5		763.9667	1.18	26.82	28.00	46.00	-18.00	peak			
6		959.5833	1.49	29.91	31.40	46.00	-14.60	peak			

**RESULT: PASS**

**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

RADIATED EMISSION TEST- (30MHz-1GHz)-MIDDLE CHANNEL-HORIZONTAL

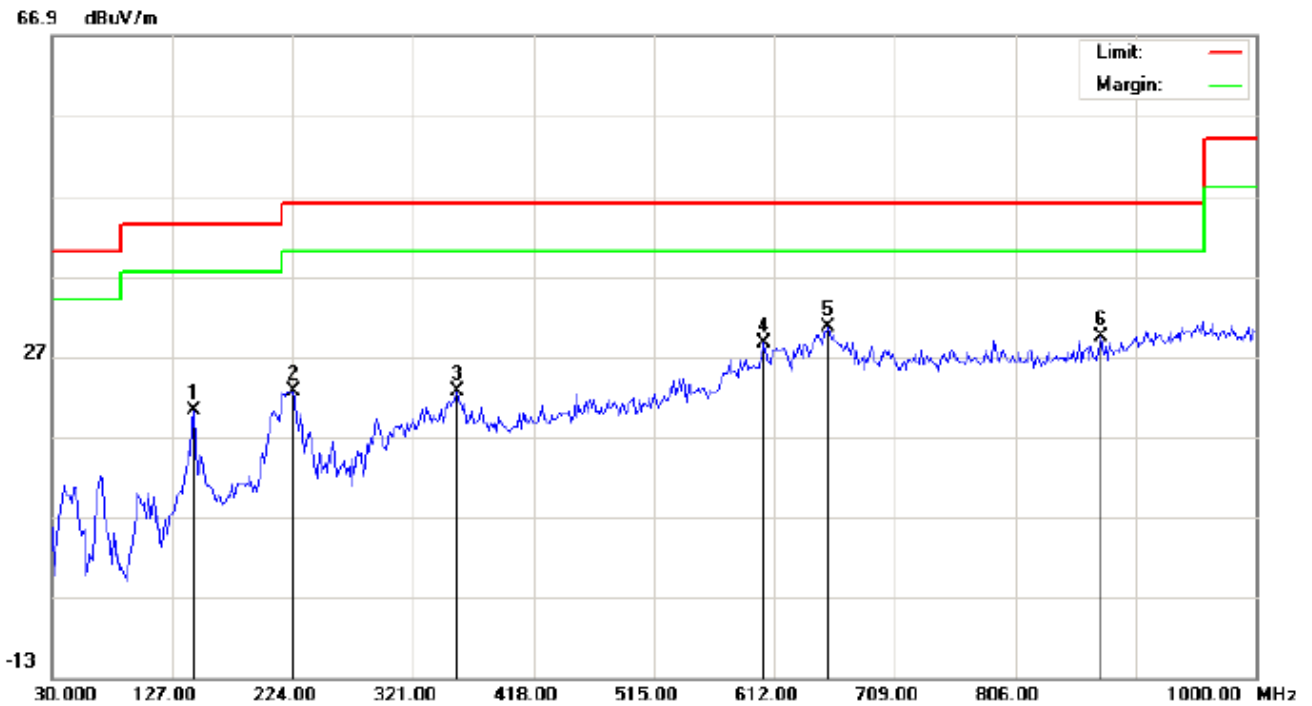

Site: site #1  
Limit: FCC Class B 3M Radiation  
EUT: bone conduction Bluetooth headset  
M/N: HB-B2  
Mode: Middle Channel TX  
Note:


Polarization: *Horizontal*  
Power:  
Distance:

Temperature: 22.4  
Humidity: 52.5 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		144.7833	6.23	14.04	20.27	43.50	-23.23	peak			
2		224.0000	13.13	9.55	22.68	46.00	-23.32	peak			
3		356.5667	3.83	18.78	22.61	46.00	-23.39	peak			
4		603.9167	4.92	23.74	28.66	46.00	-17.34	peak			
5	*	655.6500	6.53	24.00	30.53	46.00	-15.47	peak			
6		875.5167	1.49	27.97	29.46	46.00	-16.54	peak			

**RESULT: PASS**

RADIATED EMISSION TEST- (30MHz-1GHz)- MIDDLE CHANNEL –VERTICAL

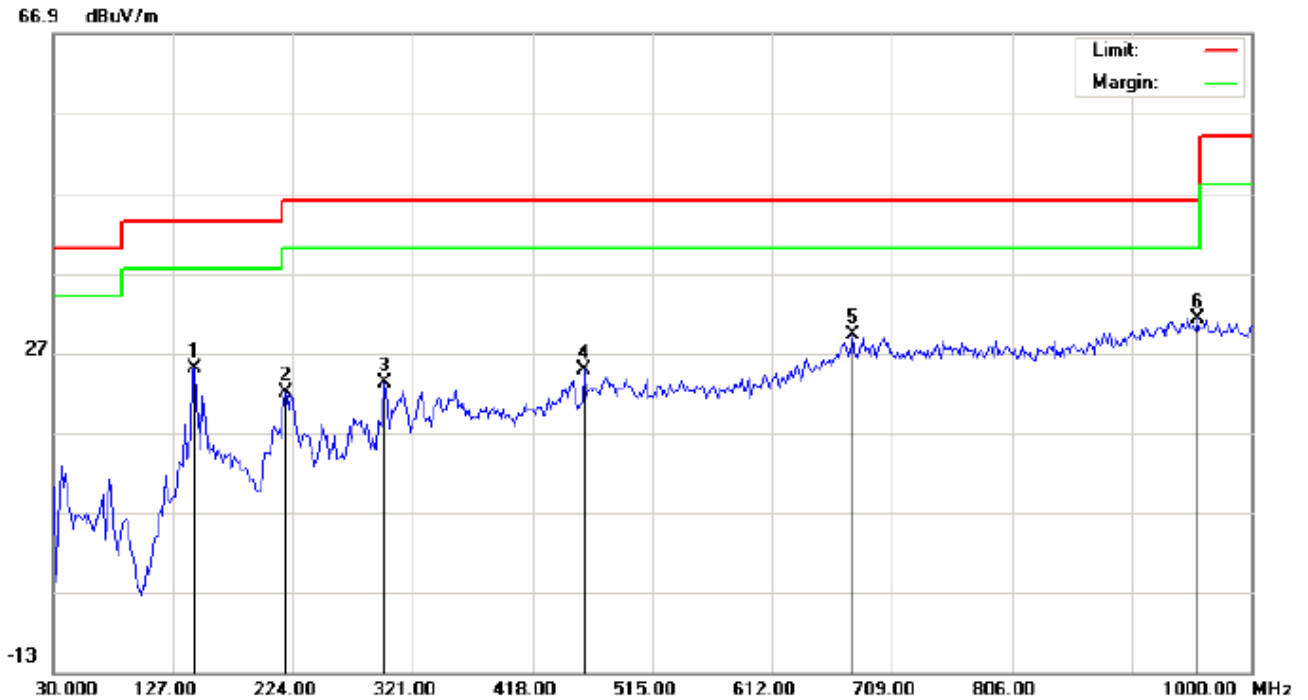

Site: site #1  
Limit: FCC Class B 3M Radiation  
EUT: bone conduction Bluetooth headset  
M/N: HB-B2  
Mode: Middle Channel TX  
Note:

Polarization: *Vertical*  
Power:  
Distance:

Temperature: 22.4  
Humidity: 52.5 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		144.7833	9.82	15.23	25.05	43.50	-18.45	peak			
2		217.5333	11.33	10.72	22.05	46.00	-23.95	peak			
3		298.3667	7.83	15.36	23.19	46.00	-22.81	peak			
4		460.0333	4.01	20.70	24.71	46.00	-21.29	peak			
5		676.6667	4.64	24.56	29.20	46.00	-16.80	peak			
6	*	956.3500	1.35	29.94	31.29	46.00	-14.71	peak			

**RESULT: PASS**

**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The “Factor” value can be calculated automatically by software of measurement system.

RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL-HORIZONTAL



Site: site #1  
Limit: FCC Class B 3M Radiation  
EUT: bone conduction Bluetooth headset  
M/N: HB-B2  
Mode: High Channel TX  
Note:


Polarization: *Horizontal*  
Power:  
Distance:

Temperature: 22.4  
Humidity: 52.5 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		136.7000	8.42	13.66	22.08	43.50	-21.42	peak			
2		217.5333	14.94	10.21	25.15	46.00	-20.85	peak			
3	*	346.8667	12.95	18.53	31.48	46.00	-14.52	peak			
4		460.0333	6.63	20.70	27.33	46.00	-18.67	peak			
5		650.8000	6.36	23.87	30.23	46.00	-15.77	peak			
6		746.1833	3.08	26.52	29.60	46.00	-16.40	peak			

**RESULT: PASS**

RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL -VERTICAL

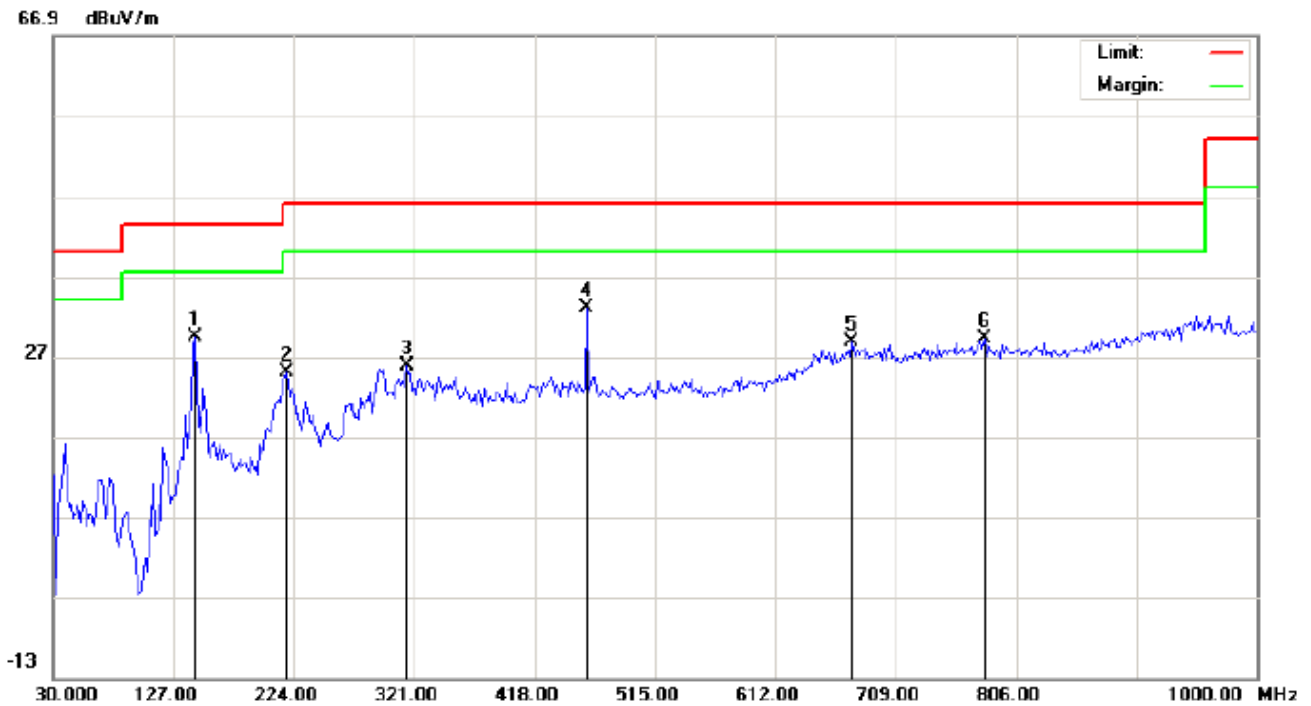

Site: site #1  
Limit: FCC Class B 3M Radiation  
EUT: bone conduction Bluetooth headset  
M/N: HB-B2  
Mode: High Channel TX  
Note:

Polarization: *Vertical*  
Power:  
Distance:

Temperature: 22.4  
Humidity: 52.5 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		144.7833	14.25	15.23	29.48	43.50	-14.02	peak			
2		217.5333	14.23	10.72	24.95	46.00	-21.05	peak			
3		314.5333	9.37	16.38	25.75	46.00	-20.25	peak			
4	*	460.0333	12.37	20.70	33.07	46.00	-12.93	peak			
5		673.4333	4.30	24.48	28.78	46.00	-17.22	peak			
6		780.1333	2.06	27.05	29.11	46.00	-16.89	peak			

**RESULT: PASS**

**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.


FOR BLE

**RADIATED EMISSION BELOW 30MHz**

No emission found between lowest internal used/generated frequencies to 30MHz.

**RADIATED EMISSION BELOW 1GHz**

RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL-HORIZONTAL

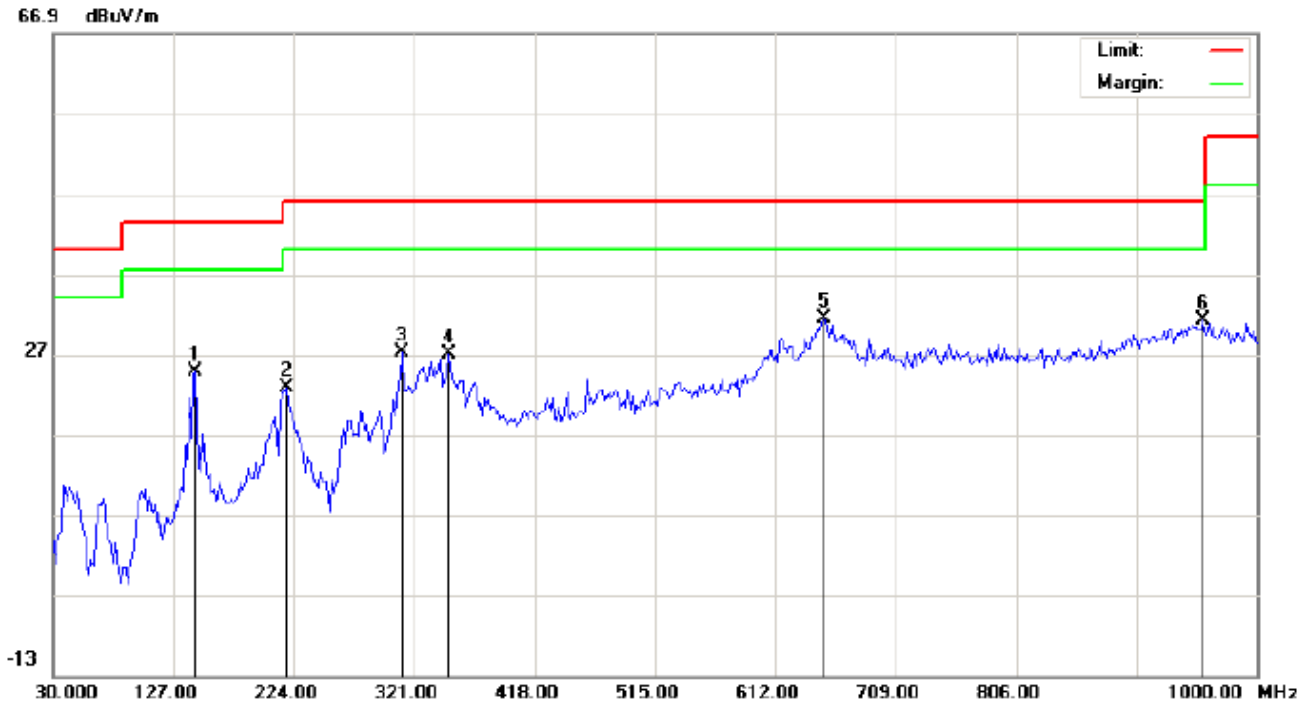

Site: site #1  
Limit: FCC Class B 3M Radiation  
EUT: bone conduction Bluetooth headset  
M/N: HB-B2  
Mode: Low Channel TX  
Note:

Polarization: *Horizontal*  
Power:  
Distance:


Temperature: 22.4  
Humidity: 52.5 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		144.7833	10.77	14.04	24.81	43.50	-18.69	peak			
2		217.5333	12.54	10.21	22.75	46.00	-23.25	peak			
3		311.3000	11.02	16.16	27.18	46.00	-18.82	peak			
4		348.4833	8.32	18.64	26.96	46.00	-19.04	peak			
5	*	650.8000	7.56	23.87	31.43	46.00	-14.57	peak			
6		956.3500	1.19	29.94	31.13	46.00	-14.87	peak			

**RESULT: PASS**



RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL -VERTICAL

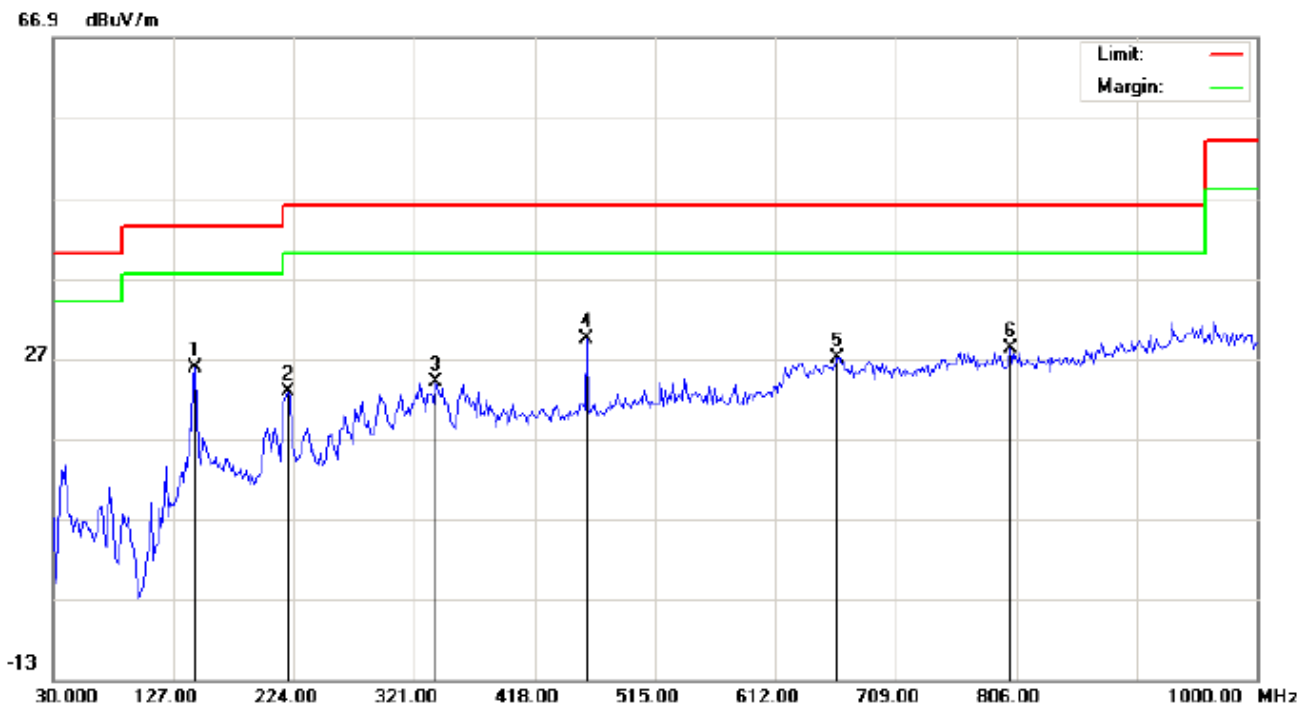

Site: site #1  
Limit: FCC Class B 3M Radiation  
EUT: bone conduction Bluetooth headset  
M/N: HB-B2  
Mode: Low Channel TX  
Note:

Polarization: **Vertical**  
Power:  
Distance:

Temperature: 22.4  
Humidity: 52.5 %


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		144.7833	10.53	15.23	25.76	43.50	-17.74	peak			
2		219.1500	12.01	10.88	22.89	46.00	-23.11	peak			
3		338.7833	5.99	17.99	23.98	46.00	-22.02	peak			
4	*	460.0333	8.63	20.70	29.33	46.00	-16.67	peak			
5		662.1167	2.88	24.17	27.05	46.00	-18.95	peak			
6		801.1500	0.90	27.32	28.22	46.00	-17.78	peak			

**RESULT: PASS**

**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

RADIATED EMISSION TEST- (30MHz-1GHz)-MIDDLE CHANNEL-HORIZONTAL

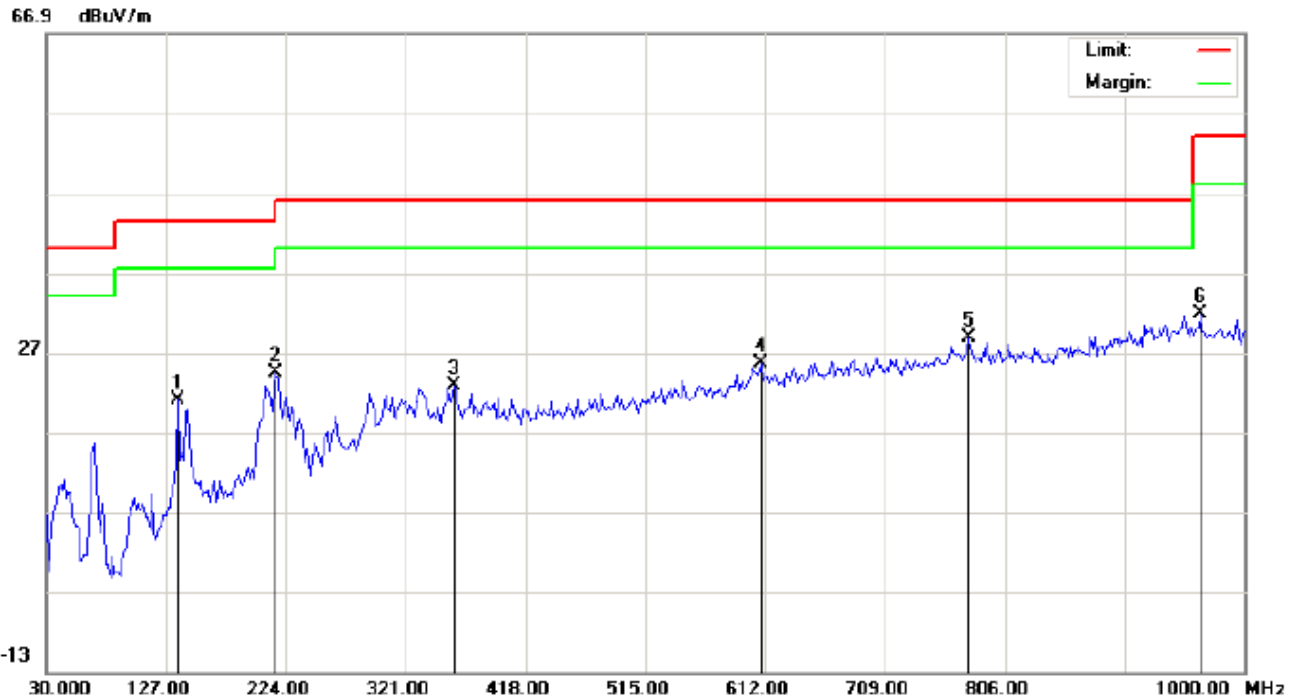

Site: site #1  
Limit: FCC Class B 3M Radiation  
EUT: bone conduction Bluetooth headset  
M/N: HB-B2  
Mode: Middle Channel TX  
Note:

Polarization: *Horizontal*  
Power:  
Distance:


Temperature: 22.4  
Humidity: 52.5 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		136.7000	7.31	13.66	20.97	43.50	-22.53	peak			
2		215.9167	14.12	10.38	24.50	43.50	-19.00	peak			
3		359.8000	4.07	18.80	22.87	46.00	-23.13	peak			
4		608.7667	1.93	23.75	25.68	46.00	-20.32	peak			
5	*	776.9000	1.79	27.00	28.79	46.00	-17.21	peak			
6		964.4333	1.99	29.86	31.85	54.00	-22.15	peak			

**RESULT: PASS**



RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL-HORIZONTAL

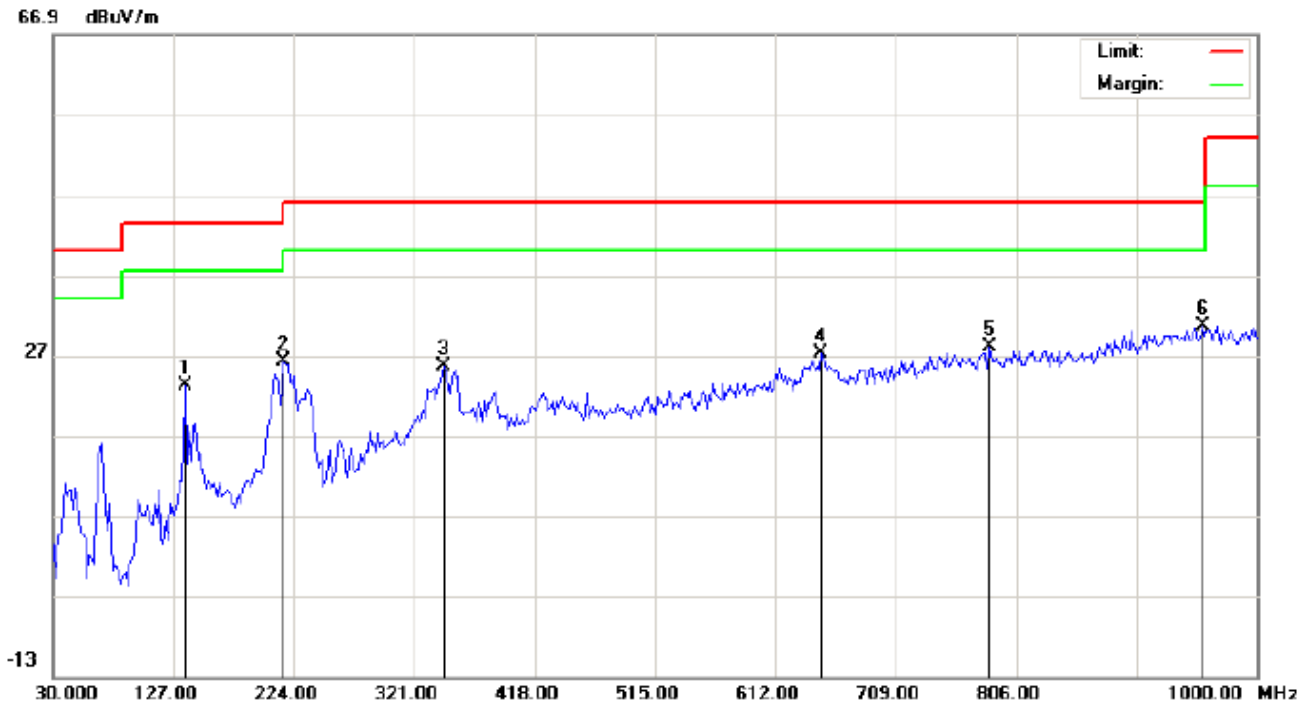

Site: site #1  
 Limit: FCC Class B 3M Radiation  
 EUT: bone conduction Bluetooth headset  
 M/N: HB-B2  
 Mode: High Channel TX  
 Note:


Polarization: *Horizontal*  
 Power:  
 Distance:

Temperature: 22.4  
 Humidity: 52.5 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		136.7000	9.51	13.66	23.17	43.50	-20.33	peak			
2		215.9167	15.75	10.38	26.13	43.50	-17.37	peak			
3		345.2500	7.12	18.42	25.54	46.00	-20.46	peak			
4		649.1833	3.37	23.85	27.22	46.00	-18.78	peak			
5		784.9833	0.85	27.11	27.96	46.00	-18.04	peak			
6	*	956.3500	0.57	29.94	30.51	46.00	-15.49	peak			

**RESULT: PASS**

RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL –VERTICAL

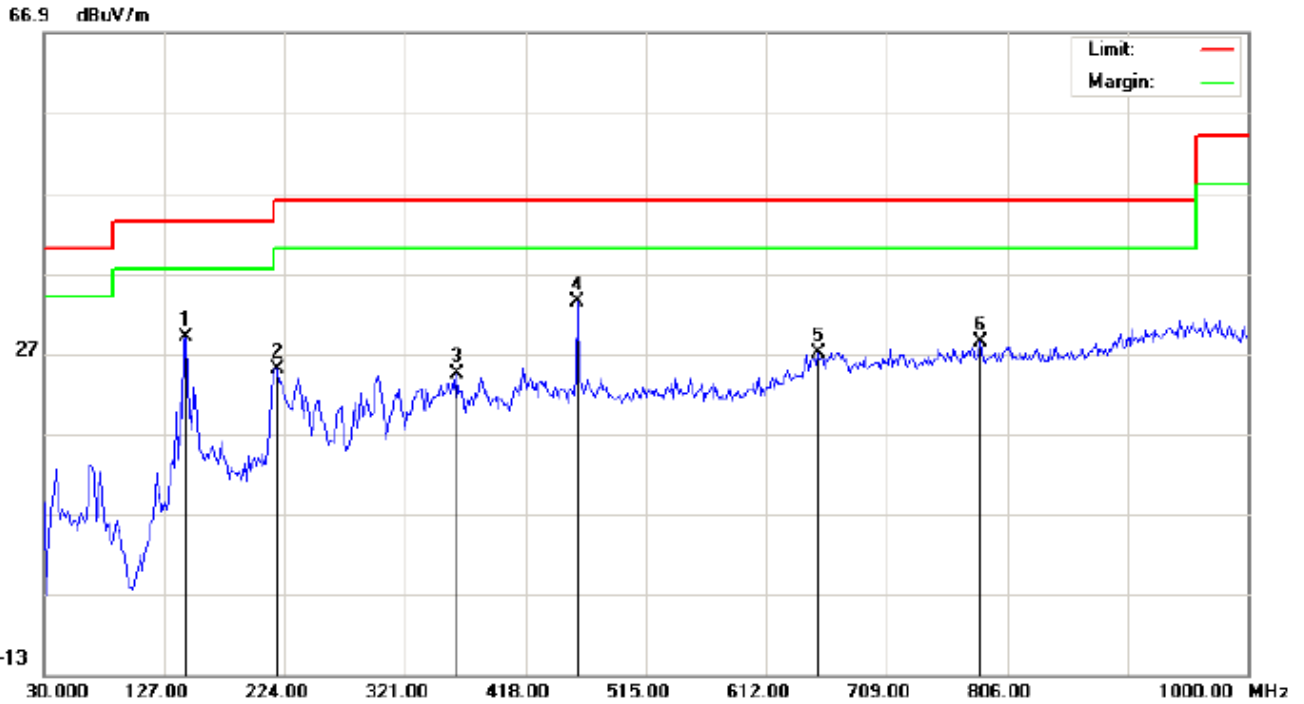

Site: site #1 Polarization: *Vertical* Temperature: 22.4  
Limit: FCC Class B 3M Radiation Power: Humidity: 52.5 %  
EUT: bone conduction Bluetooth headset Distance:  
M/N: HB-B2  
Mode: High Channel TX  
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
									cm	degree	
1		144.7833	13.81	15.23	29.04	43.50	-14.46	peak			
2		217.5333	14.33	10.72	25.05	46.00	-20.95	peak			
3		363.0333	5.53	18.83	24.36	46.00	-21.64	peak			
4	*	460.0333	12.71	20.70	33.41	46.00	-12.59	peak			
5		654.0333	3.07	23.96	27.03	46.00	-18.97	peak			
6		784.9833	1.28	27.11	28.39	46.00	-17.61	peak			

**RESULT: PASS**


**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.





RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL-HORIZONTAL

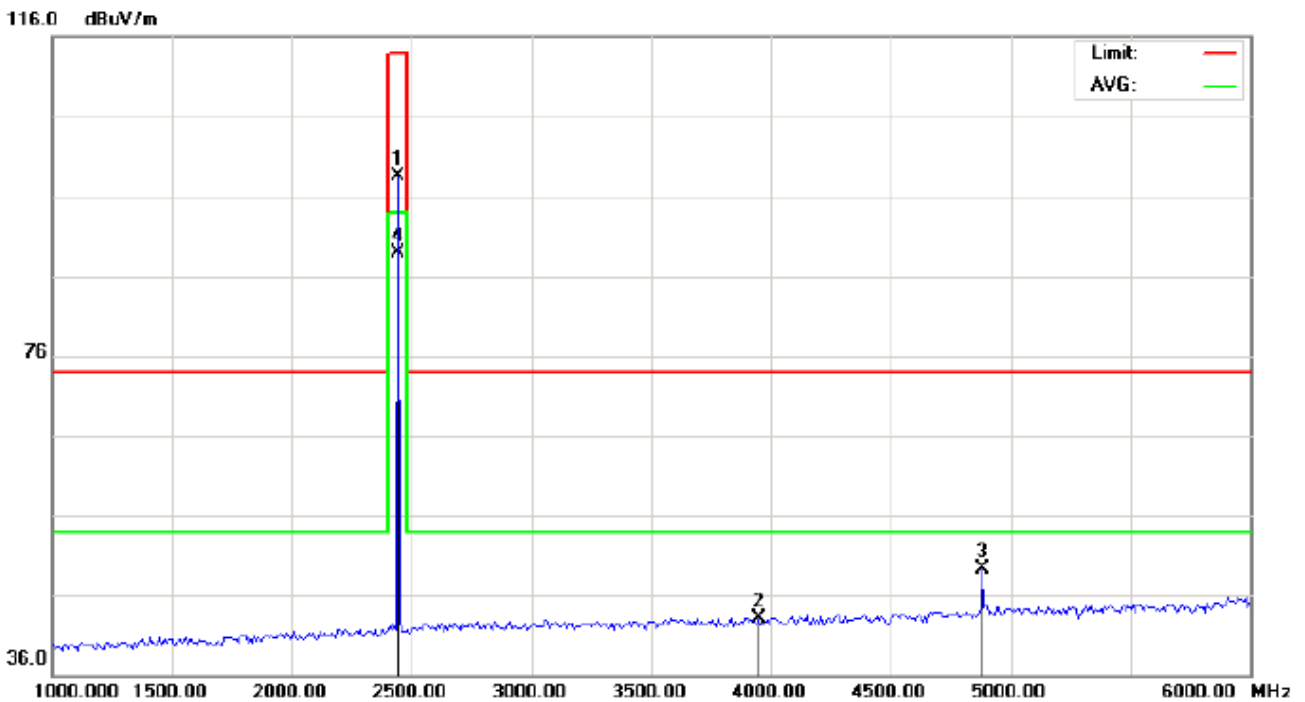


Site: site #1 Polarization: *Horizontal* Temperature: 22.7  
 Limit: FCC Class B 3M Radiation above 1GHz(PK)- Power: Humidity: 53.6 %  
 EUT: bone conduction Bluetooth headset Distance:  
 M/N: HB-B2  
 Mode: Middle Channel TX  
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2441.000	88.24	10.36	98.60	114.00	-15.40	peak			
2		3950.000	28.25	14.88	43.13	74.00	-30.87	peak			
3		4882.000	41.38	7.89	49.27	74.00	-24.73	peak			
4	*	2441.000	78.59	10.36	88.95	94.00	-5.05	AVG	100	351	

**RESULT: PASS**



RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL- VERTICAL

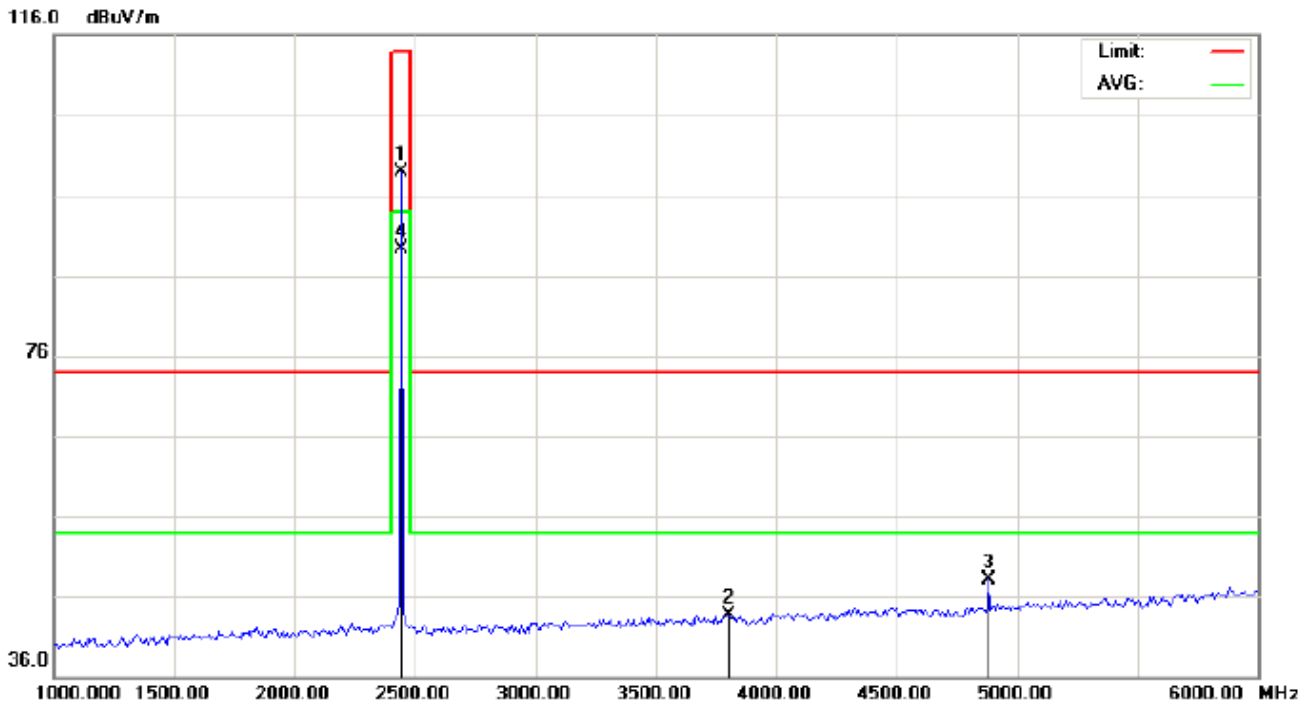

Site: site #1  
Limit: FCC Class B 3M Radiation above 1GHz(PK)-  
EUT: bone conduction Bluetooth headset  
M/N: HB-B2  
Mode: Middle Channel TX  
Note:


Polarization: *Vertical*  
Power:  
Distance:

Temperature: 22.7  
Humidity: 53.6 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2441.000	88.49	10.36	98.85	114.00	-15.15	peak			
2		3800.000	29.77	13.96	43.73	74.00	-30.27	peak			
3		4882.000	40.31	7.89	48.20	74.00	-25.80	peak			
4	*	2441.000	78.92	10.36	89.28	94.00	-4.72	AVG	100	125	

**RESULT: PASS**

RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL-HORIZONTAL

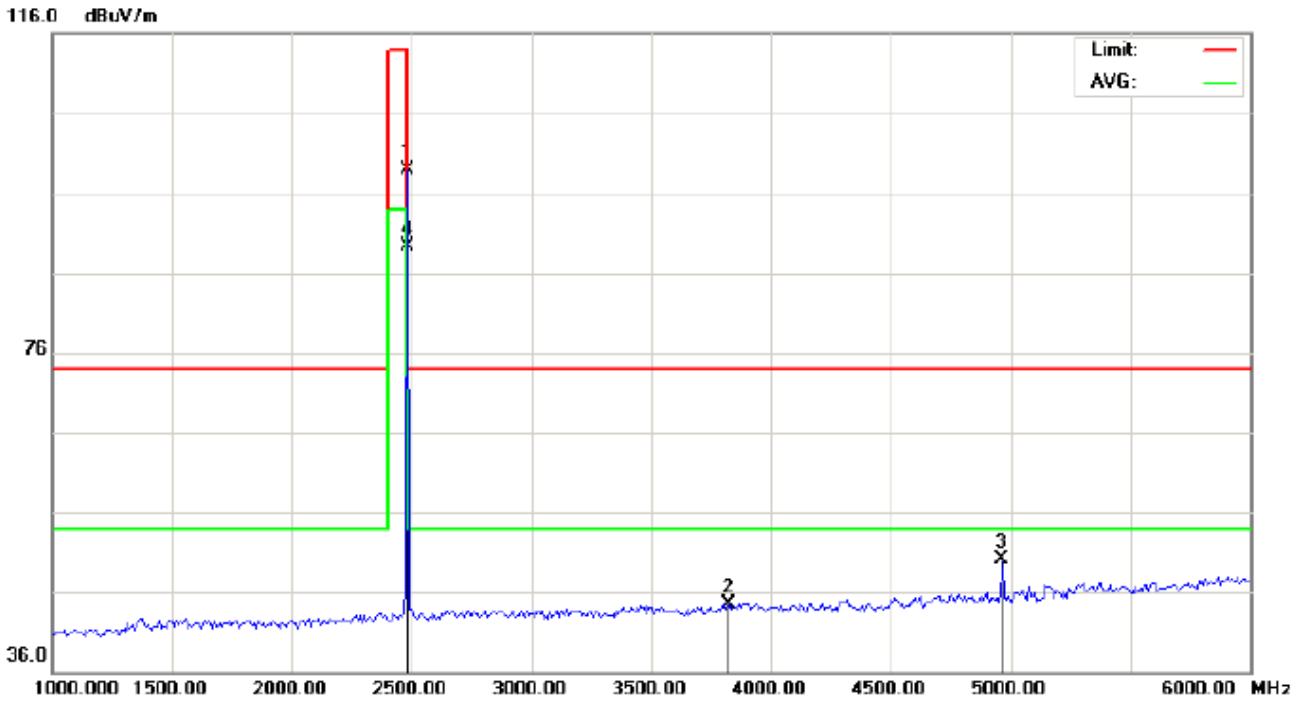


Site: site #1 Polarization: *Horizontal* Temperature: 22.7  
 Limit: FCC Class B 3M Radiation above 1GHz(PK)- Power: Humidity: 53.6 %  
 EUT: bone conduction Bluetooth headset Distance:  
 M/N: HB-B2  
 Mode: High Channel TX  
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2480.000	88.47	10.41	98.88	114.00	-15.12	peak			
2		3825.000	30.48	14.11	44.59	74.00	-29.41	peak			
3		4960.000	42.01	8.09	50.10	74.00	-23.90	peak			
4	*	2480.000	78.82	10.41	89.23	94.00	-4.77	AVG	100	354	

**RESULT: PASS**

RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL- VERTICAL

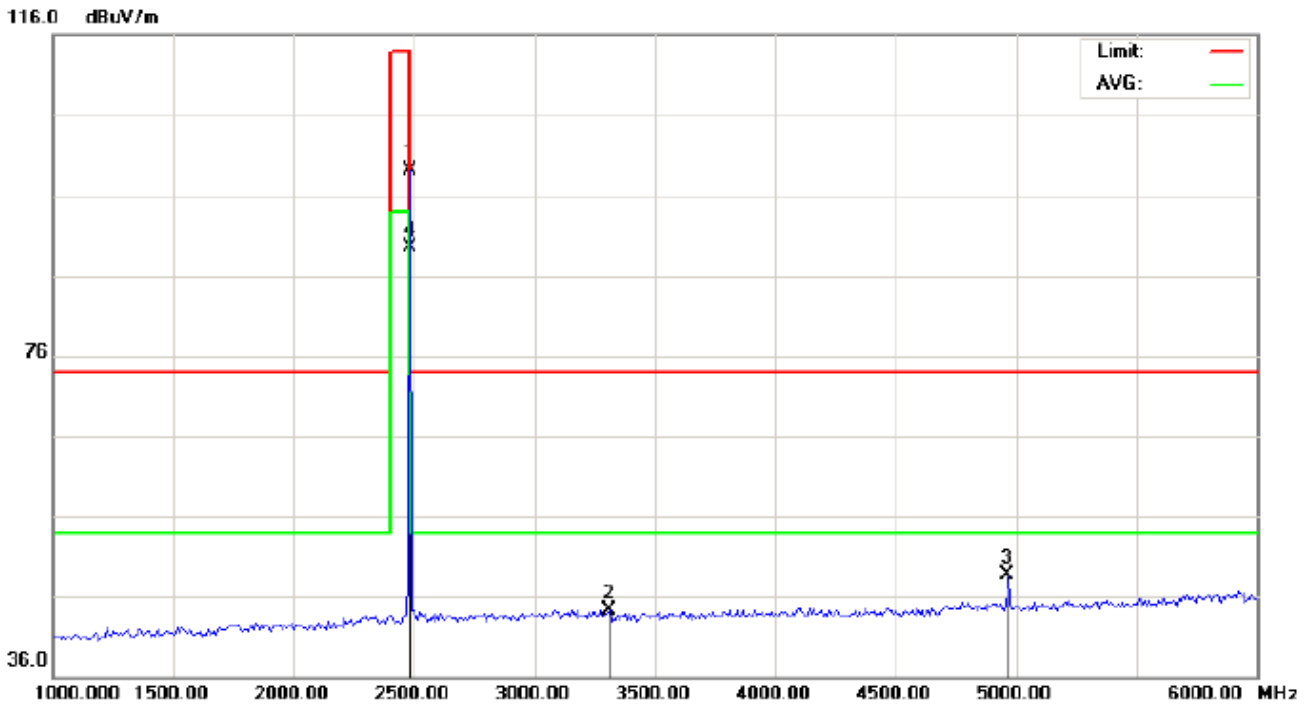

Site: site #1  
 Limit: FCC Class B 3M Radiation above 1GHz(PK)-  
 EUT: bone conduction Bluetooth headset  
 M/N: HB-B2  
 Mode: High Channel TX  
 Note:

Polarization: *Vertical*  
 Power:  
 Distance:

Temperature: 22.7  
 Humidity: 53.6 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2480.000	88.69	10.41	99.10	114.00	-14.90	peak			
2		3308.333	32.47	11.93	44.40	74.00	-29.60	peak			
3		4960.000	40.66	8.09	48.75	74.00	-25.25	peak			
4	*	2480.000	79.16	10.41	89.57	94.00	-4.43	AVG	100	121	

**RESULT: PASS**

**Note:** 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

**Field strength of the fundamental signal****1Mbps Result:****Peak value**

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	85.71	10.32	96.03	114	-17.97	Horizontal
2402	85.82	10.32	96.14	114	-17.86	Vertical
2441	88.24	10.36	98.60	114	-15.40	Horizontal
2441	88.49	10.36	98.85	114	-15.15	Vertical
2480	88.47	10.41	98.88	114	-15.12	Horizontal
2480	88.69	10.41	99.10	114	-14.90	Vertical

**Average value**

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	76.02	10.32	86.34	94	-7.66	Horizontal
2402	76.14	10.32	86.46	94	-7.54	Vertical
2441	78.59	10.36	88.95	94	-5.05	Horizontal
2441	78.92	10.36	89.28	94	-4.72	Vertical
2480	78.82	10.41	89.23	94	-4.77	Horizontal
2480	79.16	10.41	89.57	94	-4.43	Vertical

**2Mbps Result:****Peak value**

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	85.69	10.32	96.01	114	-17.99	Horizontal
2402	85.54	10.32	95.86	114	-18.14	Vertical
2441	88.35	10.36	98.71	114	-15.29	Horizontal
2441	88.16	10.36	98.52	114	-15.48	Vertical
2480	88.57	10.41	98.98	114	-15.02	Horizontal
2480	88.32	10.41	98.73	114	-15.27	Vertical

**Average value**

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	75.99	10.32	86.31	94	-7.69	Horizontal
2402	75.79	10.32	86.11	94	-7.89	Vertical
2441	78.76	10.36	89.12	94	-4.88	Horizontal
2441	78.65	10.36	89.01	94	-4.99	Vertical
2480	79.03	10.41	89.44	94	-4.56	Horizontal
2480	78.84	10.41	89.25	94	-4.75	Vertical

**3Mbps Result:**

**Peak value**


Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	85.40	10.32	95.72	114	-18.28	Horizontal
2402	85.33	10.32	95.65	114	-18.35	Vertical
2441	87.91	10.36	98.27	114	-15.73	Horizontal
2441	87.77	10.36	98.13	114	-15.87	Vertical
2480	88.05	10.41	98.46	114	-15.54	Horizontal
2480	87.86	10.41	98.27	114	-15.73	Vertical

**Average value**

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	75.65	10.32	85.97	94	-8.03	Horizontal
2402	75.54	10.32	85.86	94	-8.14	Vertical
2441	78.45	10.36	88.81	94	-5.19	Horizontal
2441	78.38	10.36	88.74	94	-5.26	Vertical
2480	78.61	10.41	89.02	94	-4.98	Horizontal
2480	78.52	10.41	88.93	94	-5.07	Vertical

FOR BLE

RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL-HORIZONTAL

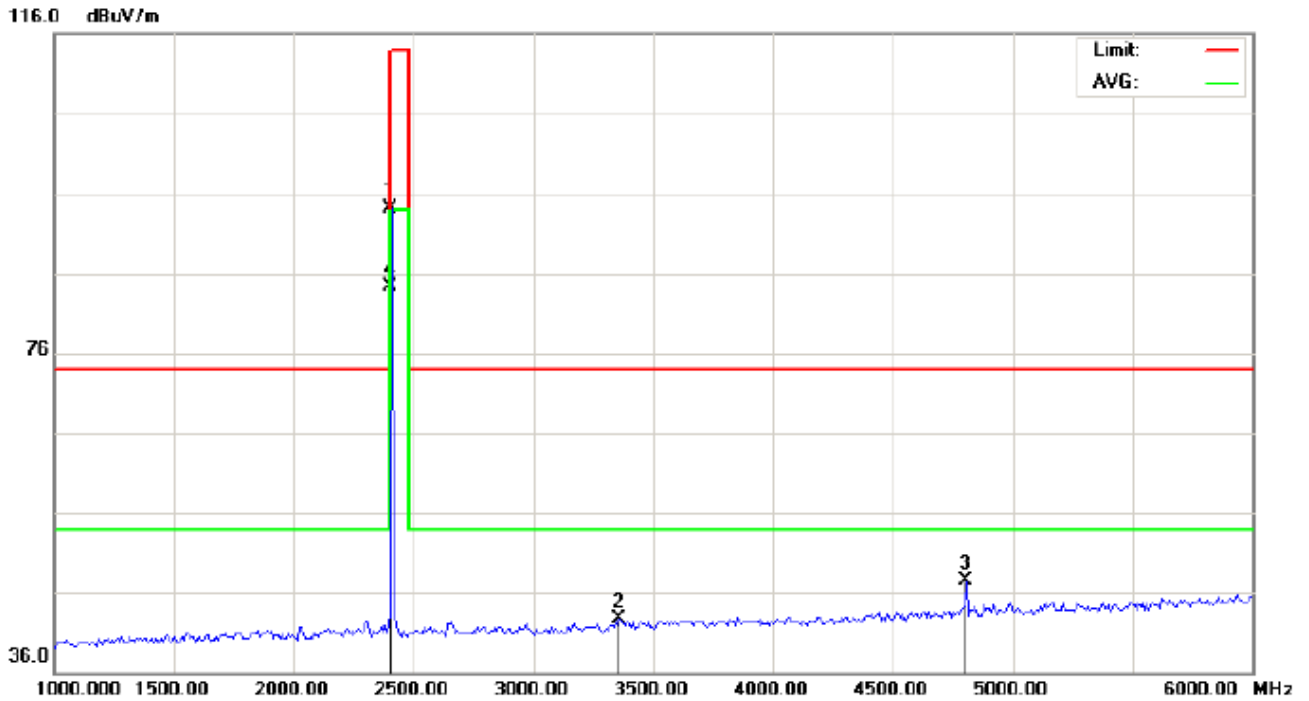

Site: site #1  
 Limit: FCC Class B 3M Radiation above 1GHz(PK)-  
 EUT: bone conduction Bluetooth headset  
 M/N: HB-B2  
 Mode: Low Channel TX  
 Note:


Polarization: *Horizontal*  
 Power:  
 Distance:

Temperature: 22.7  
 Humidity: 53.6 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2402.000	83.71	10.32	94.03	114.00	-19.97	peak			
2		3358.333	30.67	11.98	42.65	74.00	-31.35	peak			
3		4804.000	39.74	7.69	47.43	74.00	-26.57	peak			
4	*	2402.000	73.97	10.32	84.29	94.00	-9.71	AVG	100	339	

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL- VERTICAL

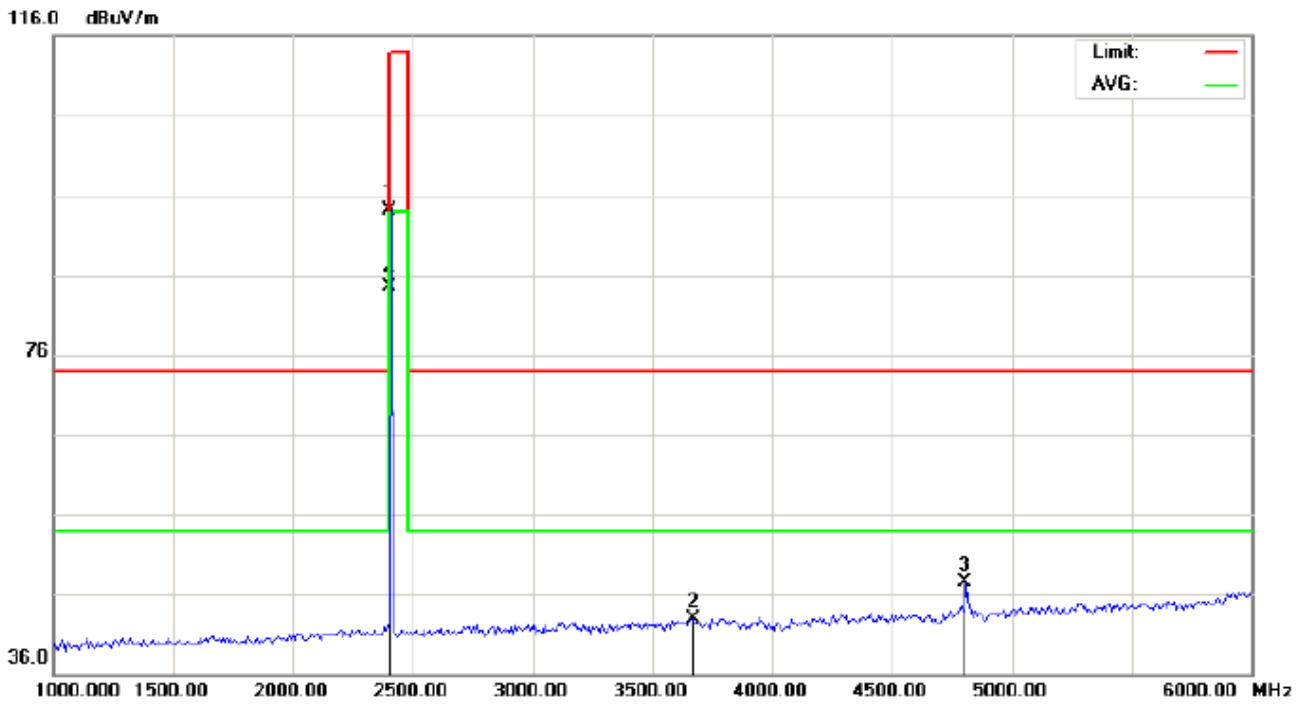


Site: site #1 Polarization: *Vertical* Temperature: 22.7  
Limit: FCC Class B 3M Radiation above 1GHz(PK)- Power: Humidity: 53.6 %  
EUT: bone conduction Bluetooth headset Distance:  
M/N: HB-B2  
Mode: Low Channel TX  
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2402.000	83.82	10.32	94.14	114.00	-19.86	peak			
2		3666.667	29.85	13.14	42.99	74.00	-31.01	peak			
3		4804.000	39.88	7.69	47.57	74.00	-26.43	peak			
4	*	2402.000	74.10	10.32	84.42	94.00	-9.58	AVG	100	134	

**RESULT: PASS**



RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL-HORIZONTAL

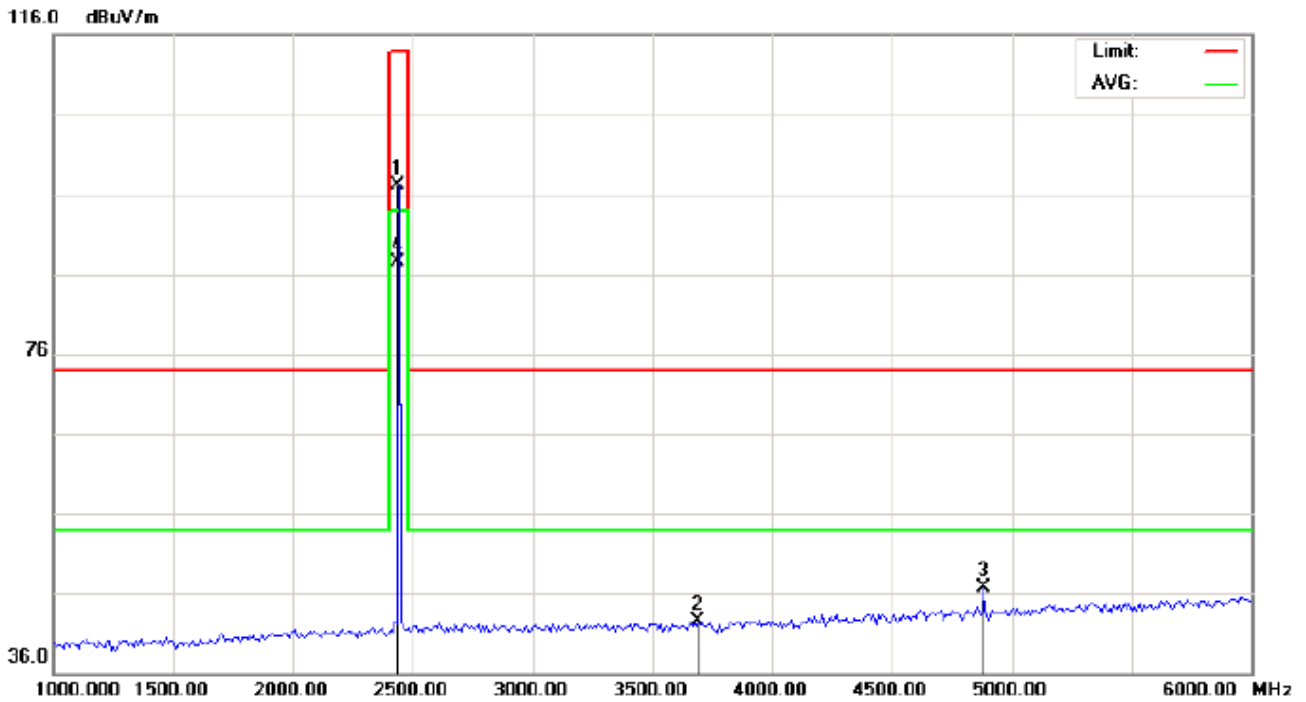


Site: site #1 Polarization: *Horizontal* Temperature: 22.7  
 Limit: FCC Class B 3M Radiation above 1GHz(PK)- Power: Humidity: 53.6 %  
 EUT: bone conduction Bluetooth headset Distance:  
 M/N: HB-B2  
 Mode: Middle Channel TX  
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2440.000	86.74	10.36	97.10	114.00	-16.90	peak			
2		3691.667	29.29	13.29	42.58	74.00	-31.42	peak			
3		4882.000	38.88	7.89	46.77	74.00	-27.23	peak			
4	*	2440.000	77.20	10.36	87.56	94.00	-6.44	AVG	100	341	

**RESULT: PASS**

RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL- VERTICAL

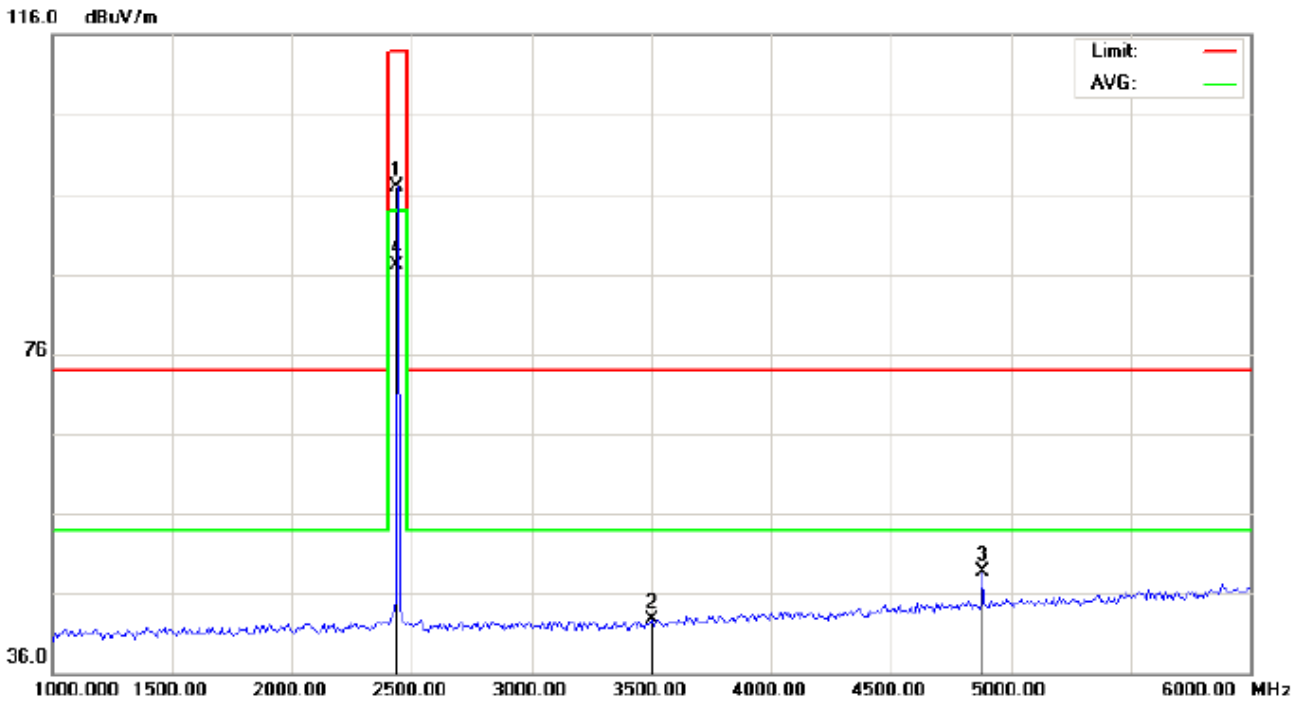


Site: site #1 Polarization: *Vertical* Temperature: 22.7  
Limit: FCC Class B 3M Radiation above 1GHz(PK)- Power: Humidity: 53.6 %  
EUT: bone conduction Bluetooth headset Distance:  
M/N: HB-B2  
Mode: Middle Channel TX  
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2440.000	86.49	10.36	96.85	114.00	-17.15	peak			
2		3500.000	30.51	12.11	42.62	74.00	-31.38	peak			
3		4882.000	40.81	7.89	48.70	74.00	-25.30	peak			
4	*	2440.000	76.70	10.36	87.06	94.00	-6.94	AVG	100	131	

**RESULT: PASS**

RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL-HORIZONTAL

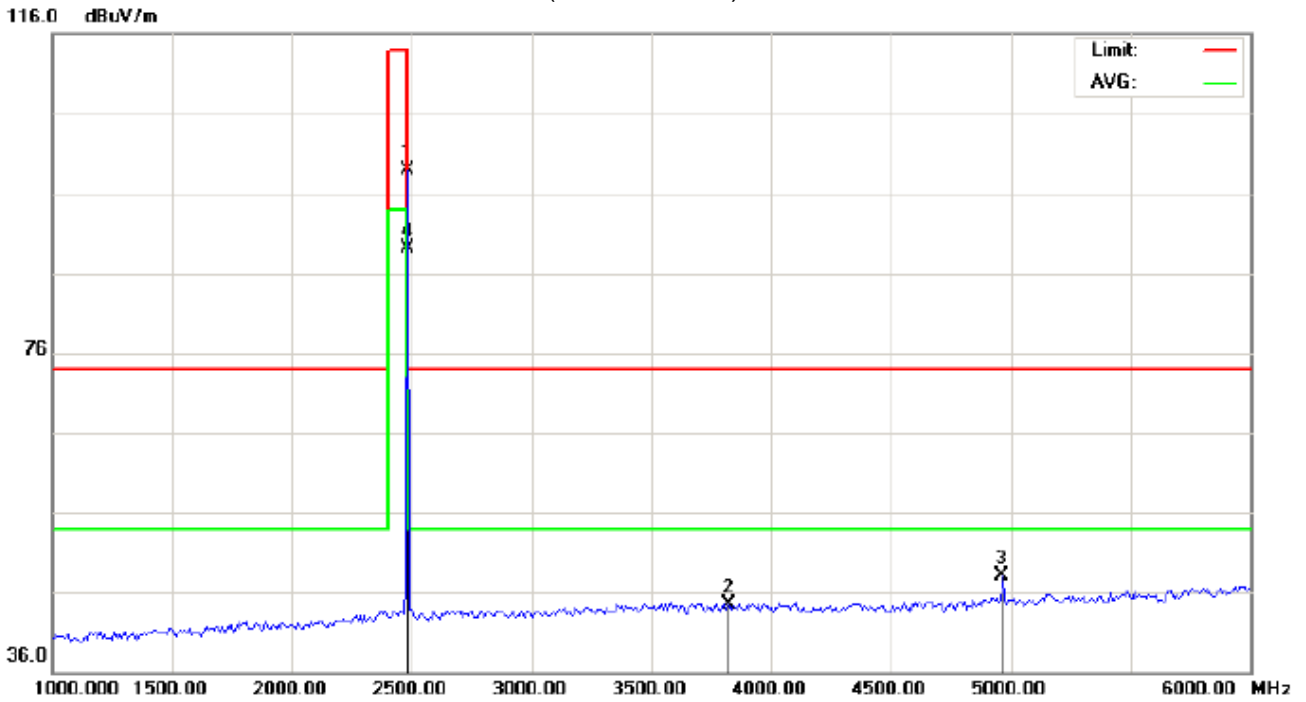

Site: site #1  
 Limit: FCC Class B 3M Radiation above 1GHz(PK)-  
 EUT: bone conduction Bluetooth headset  
 M/N: HB-B2  
 Mode: High Channel TX  
 Note:


Polarization: *Horizontal*  
 Power:  
 Distance:

Temperature: 22.7  
 Humidity: 53.6 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2480.000	88.50	10.41	98.91	114.00	-15.09	peak			
2		3825.000	30.48	14.11	44.59	74.00	-29.41	peak			
3		4960.000	40.01	8.09	48.10	74.00	-25.90	peak			
4	*	2480.000	78.71	10.41	89.12	94.00	-4.88	AVG	100	342	

**RESULT: PASS**

RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL- VERTICAL

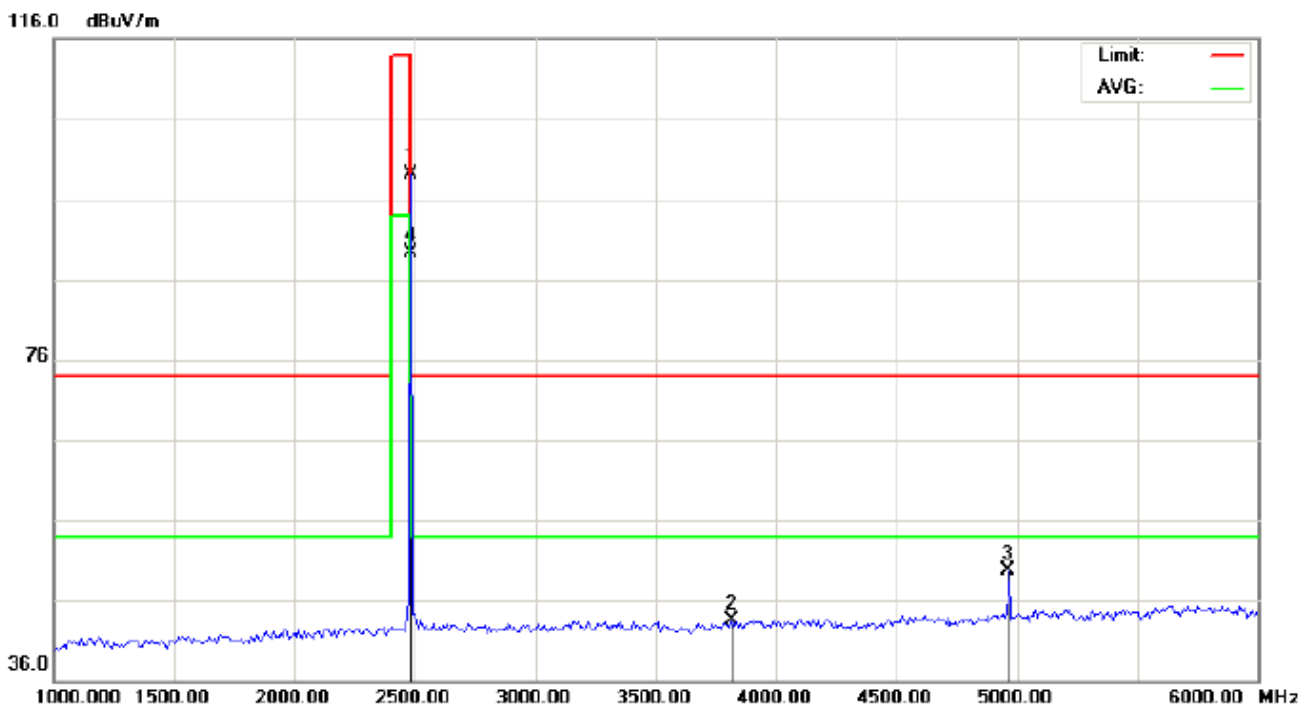

Site: site #1 Polarization: *Vertical* Temperature: 22.7  
 Limit: FCC Class B 3M Radiation above 1GHz(PK)- Power: Humidity: 53.6 %  
 EUT: bone conduction Bluetooth headset Distance:  
 M/N: HB-B2  
 Mode: High Channel TX  
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2480.000	88.66	10.41	99.07	114.00	-14.93	peak			
2		3816.667	29.41	14.06	43.47	74.00	-30.53	peak			
3		4960.000	41.66	8.09	49.75	74.00	-24.25	peak			
4	*	2480.000	78.80	10.41	89.21	94.00	-4.79	AVG	100	132	

**RESULT: PASS**

**Note:** 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

**Field strength of the fundamental signal**

**1Mbps Result:**

**Peak value**

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	83.71	10.32	94.03	114	-19.97	Horizontal
2402	83.82	10.32	94.14	114	-19.86	Vertical
2440	86.74	10.36	97.10	114	-16.90	Horizontal
2440	86.49	10.36	96.85	114	-17.15	Vertical
2480	88.50	10.41	98.91	114	-15.09	Horizontal
2480	88.66	10.41	99.07	114	-14.93	Vertical

**Average value**

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	73.97	10.32	84.29	94	-9.71	Horizontal
2402	74.10	10.32	84.42	94	-9.58	Vertical
2440	77.20	10.36	87.56	94	-6.44	Horizontal
2440	76.70	10.36	87.06	94	-6.94	Vertical
2480	78.71	10.41	89.12	94	-4.88	Horizontal
2480	78.80	10.41	89.21	94	-4.79	Vertical


## 10. BAND EDGE EMISSION

### 10.1. MEASUREMENT PROCEDURE

1. The EUT operates at hopping-off test mode. The lowest or highest channels are tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.
2. Max hold the trace of the setup1, and the EUT operates at hopping-on test mode to verify the largest spurious emissions power.
3. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission

### 10.2 TEST SETUP

RADIATED EMISSION TEST SETUP

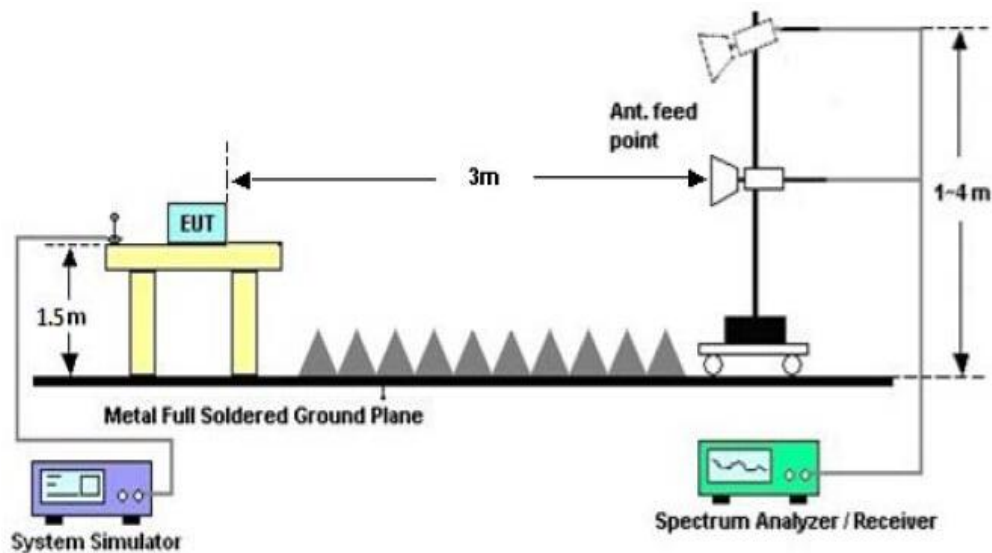


### 10.3 RADIATED TEST RESULT

(Worst modulation: GFSK)

FOR BR/EDR

TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal

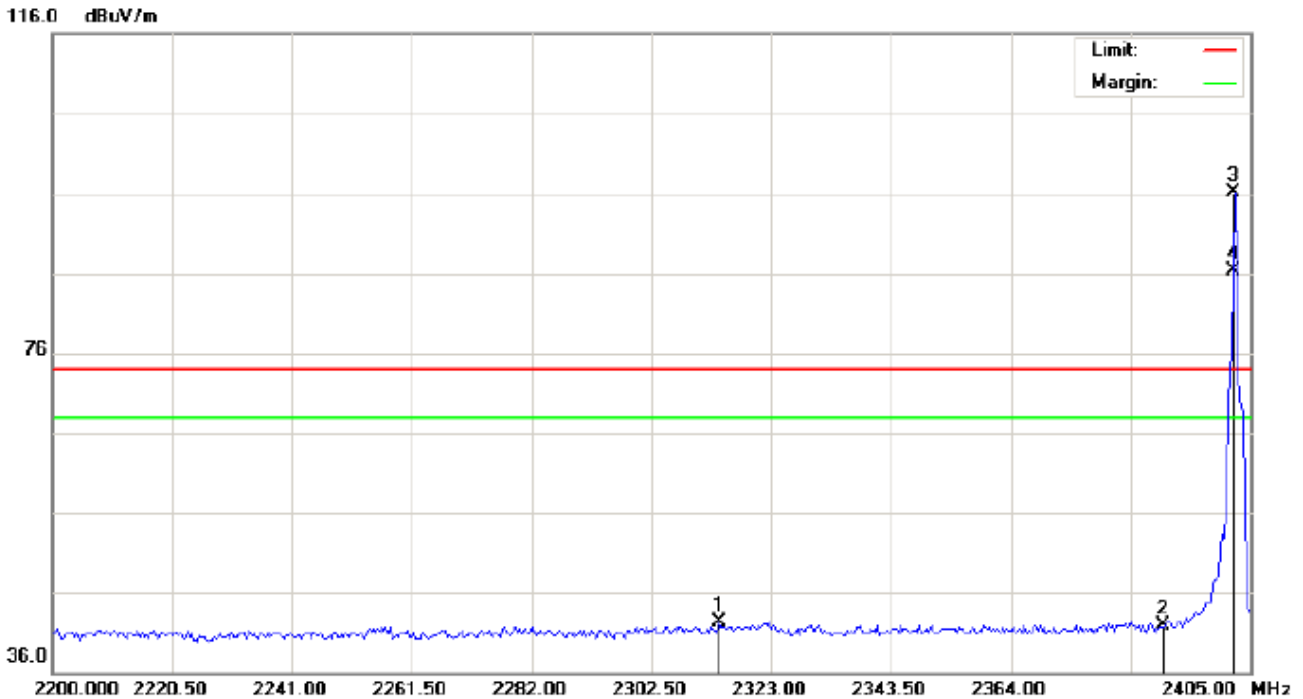

Site: site #1  
Limit: FCC Class B 3M Radiation above 1GHz(PK)  
EUT: bone conduction Bluetooth headset  
M/N: HB-B2  
Mode: Low Channel TX  
Note:

Polarization: *Horizontal*  
Power:  
Distance:


Temperature: 26  
Humidity: 60 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2314.117	32.06	10.23	42.29	74.00	-31.71	peak			
2		2390.000	31.50	10.31	41.81	74.00	-32.19	peak			
3	*	2402.000	85.72	10.32	96.04	74.00	22.04	peak			
4	X	2402.000	75.99	10.32	86.31	74.00	12.31	AVG	100	357	





TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

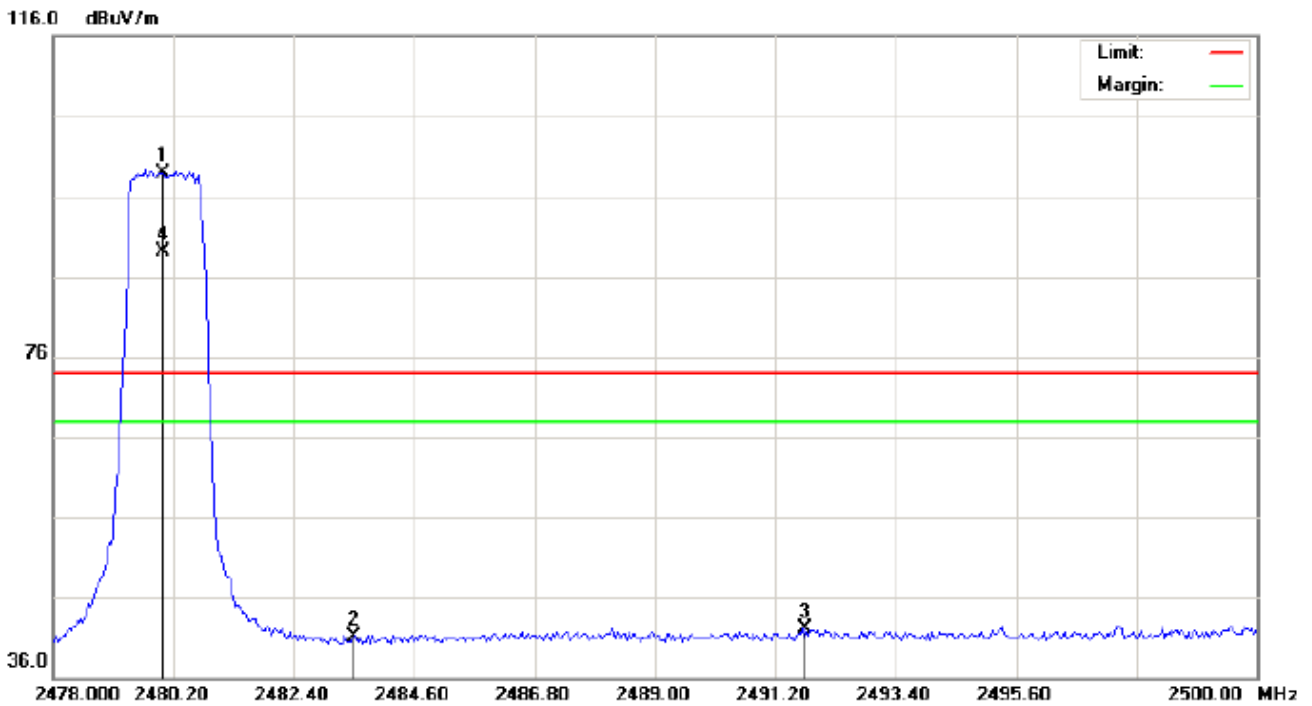

Site: site #1 Polarization: *Horizontal* Temperature: 26  
Limit: FCC Class B 3M Radiation above 1GHz(PK) Power: Humidity: 60 %  
EUT: bone conduction Bluetooth headset Distance:  
M/N: HB-B2  
Mode: High Channel TX  
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	88.55	10.41	98.96	74.00	24.96	peak			
2		2483.500	30.69	10.41	41.10	74.00	-32.90	peak			
3		2491.750	31.67	10.42	42.09	74.00	-31.91	peak			
4	X	2480.000	78.76	10.41	89.17	74.00	15.17	AVG	100	346	










TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical

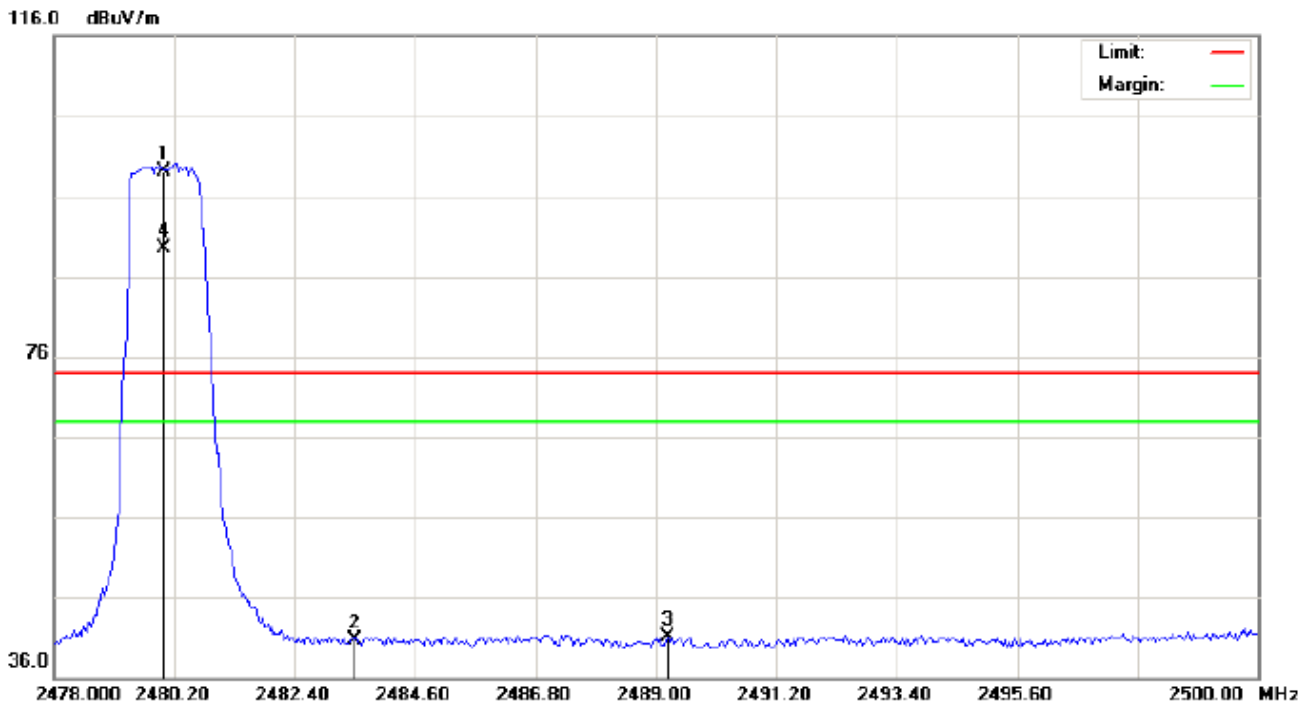

Site: site #1 Polarization: *Vertical* Temperature: 26  
 Limit: FCC Class B 3M Radiation above 1GHz(PK) Power: Humidity: 60 %  
 EUT: bone conduction Bluetooth headset Distance:  
 M/N: HB-B2  
 Mode: High Channel TX  
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	88.74	10.41	99.15	74.00	25.15	peak			
2		2483.500	30.26	10.41	40.67	74.00	-33.33	peak			
3		2489.220	30.64	10.42	41.06	74.00	-32.94	peak			
4	X	2480.000	79.05	10.41	89.46	74.00	15.46	AVG	100	138	

**RESULT: PASS**

**Note:** The other modes radiation emission have enough 20dB margin.

Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.


Hopping on mode and Hopping off mode have been tested, but only worst case reported.

## 11. 20DB BANDWIDTH

### 11.1. MEASUREMENT PROCEDURE

1. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
2. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel  
RBW  $\geq$  1% of the 20 dB bandwidth, VBW  $\geq$  RBW; Sweep = auto; Detector function = peak
3. Set SPA Trace 1 Max hold, then View.

### 11.2. TEST SET-UP

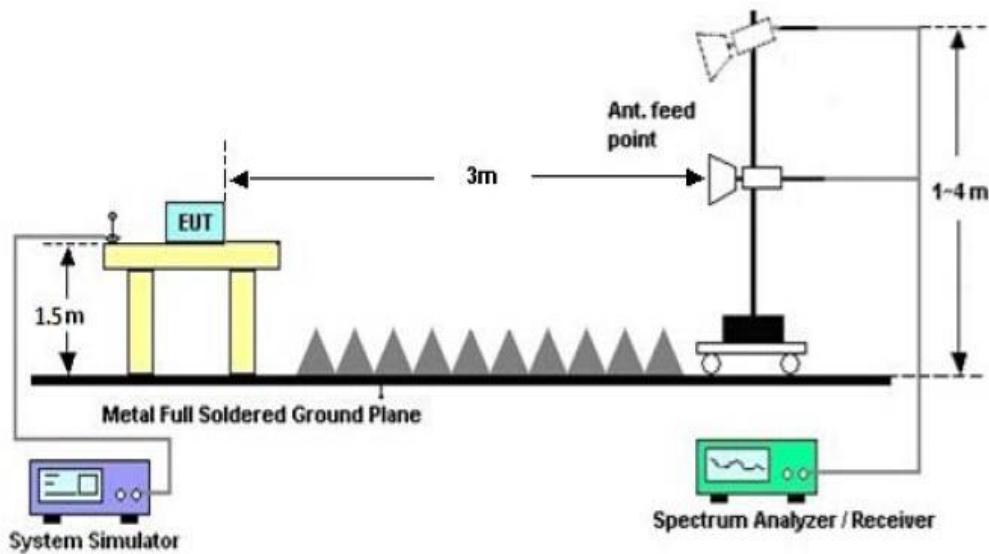


### 11.3. LIMITS AND MEASUREMENT RESULTS


#### FOR BR/EDR

BLUETOOTH 1Mbps LIMITS AND MEASUREMENT RESULT				
Applicable Limits	Measurement Result			
	Test Data (MHz)			Result
		99%OBW (MHz)	-20dB BW(MHz)	
N/A	Low Channel	0.916	1.084	PASS
	Middle Channel	0.919	1.089	PASS
	High Channel	0.908	1.081	PASS

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

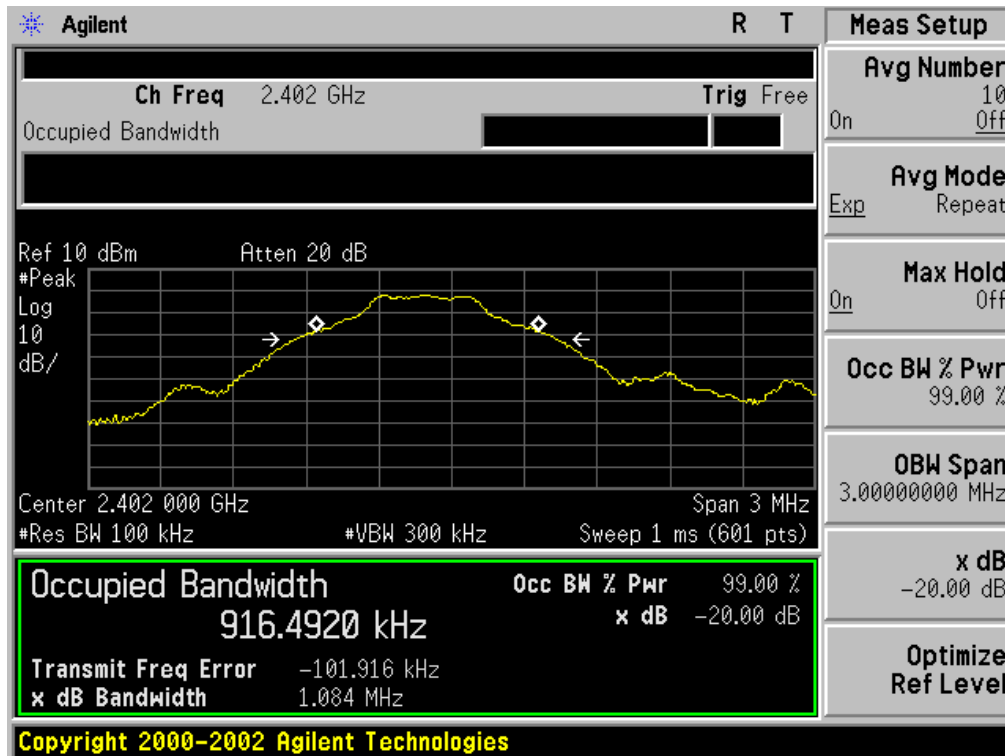


TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

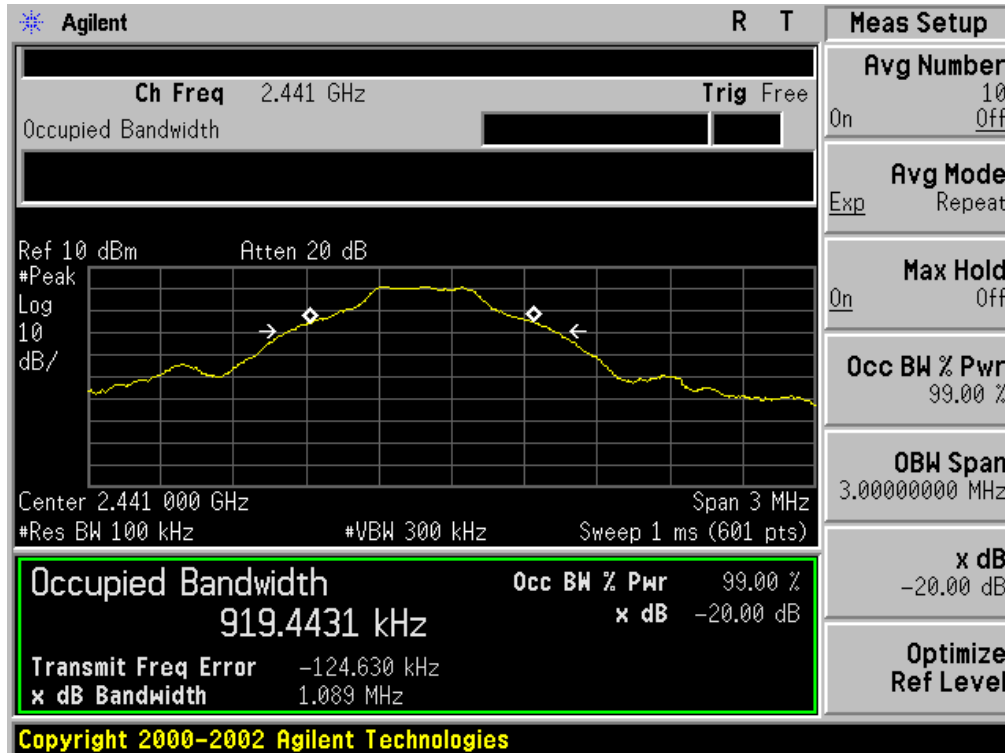




TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

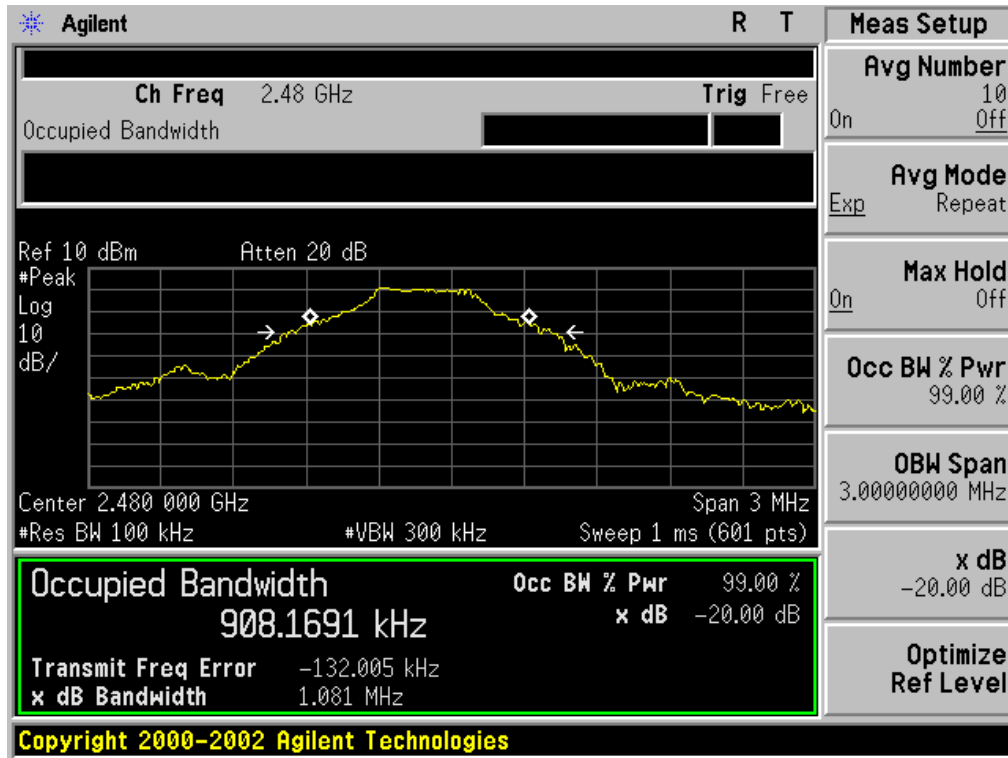


BLUETOOTH 2MBPS LIMITS AND MEASUREMENT RESULT				
Applicable Limits	Measurement Result			
	Test Data (MHz)			Result
		99%OBW (MHz)	-20dB BW(MHz)	
N/A	Low Channel	1.218	1.368	PASS
	Middle Channel	1.204	1.356	PASS
	High Channel	1.221	1.384	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

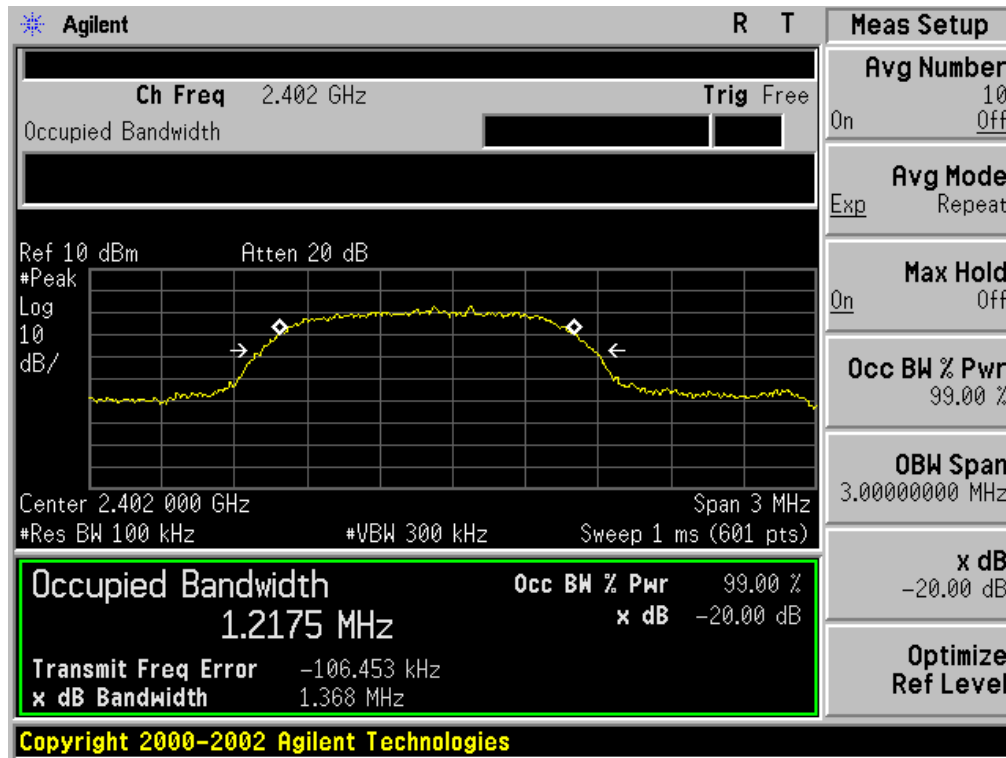

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

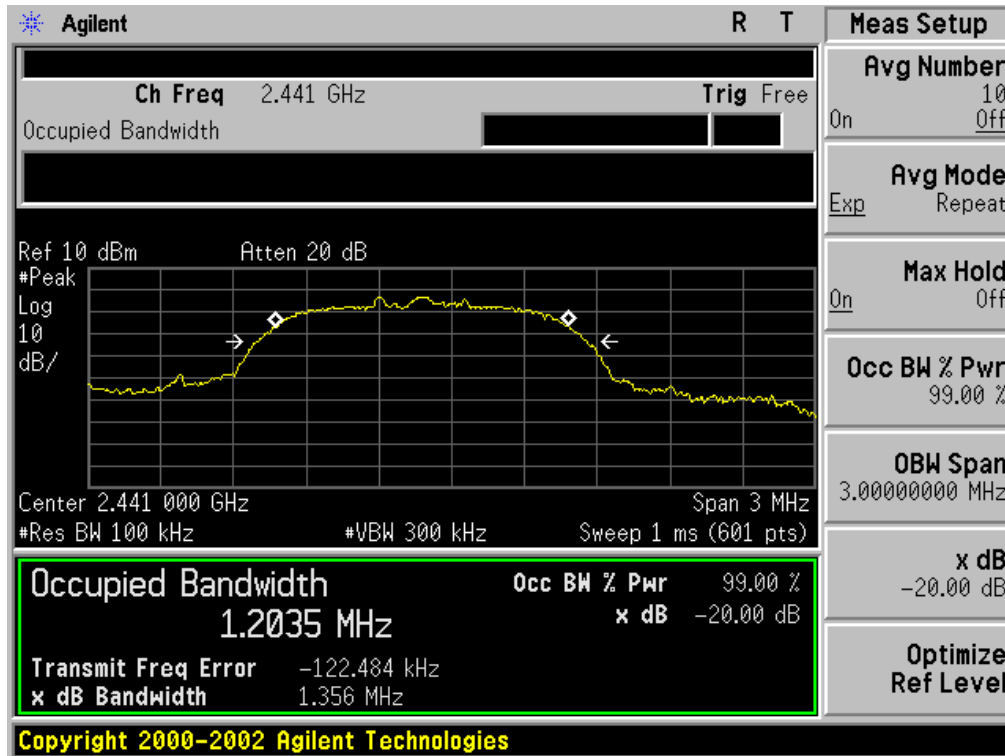


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

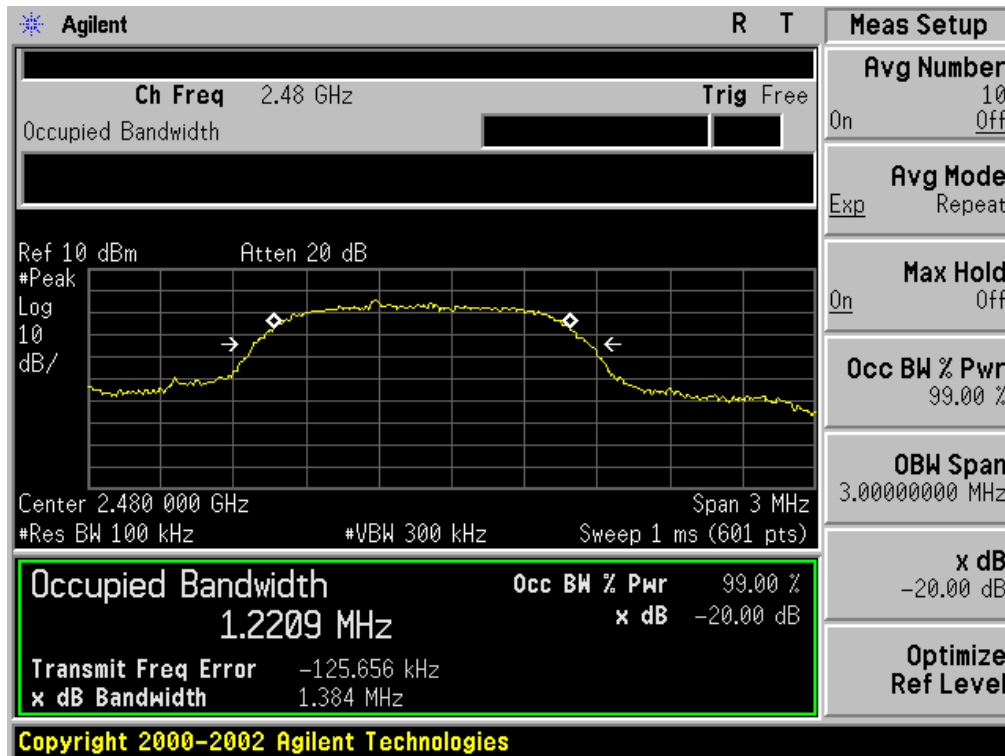


BLUETOOTH 3MBPS LIMITS AND MEASUREMENT RESULT				
Applicable Limits	Measurement Result			
	Test Data (MHz)			Result
		99%OBW (MHz)	-20dB BW(MHz)	
N/A	Low Channel	1.204	1.360	PASS
	Middle Channel	1.197	1.365	PASS
	High Channel	1.201	1.365	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

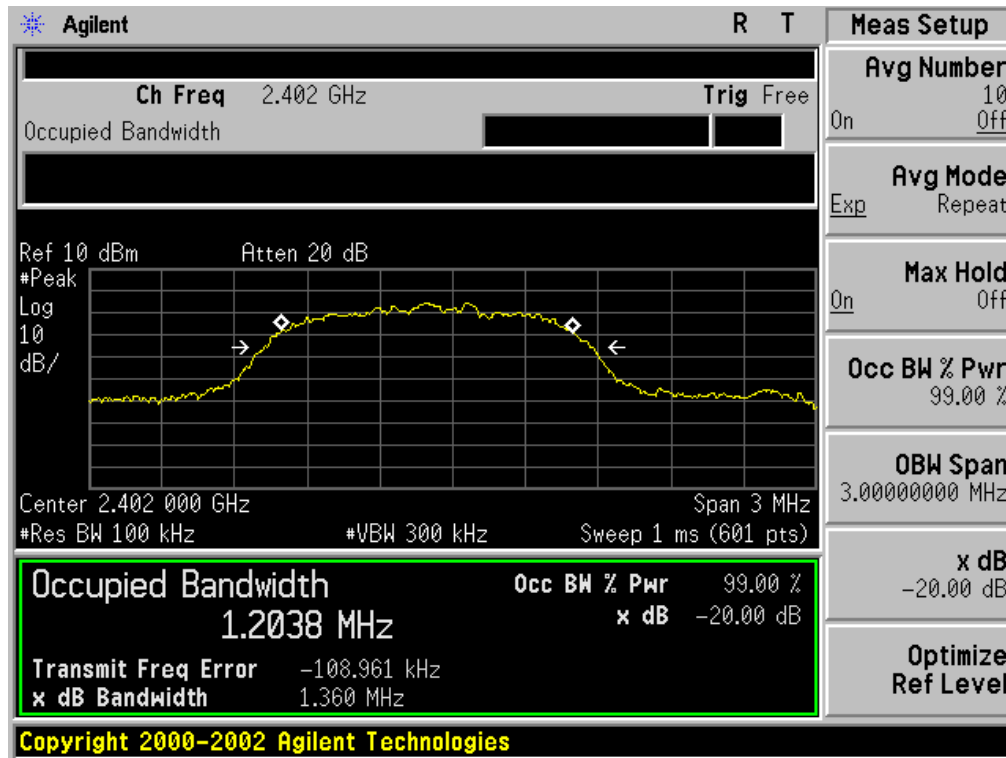

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

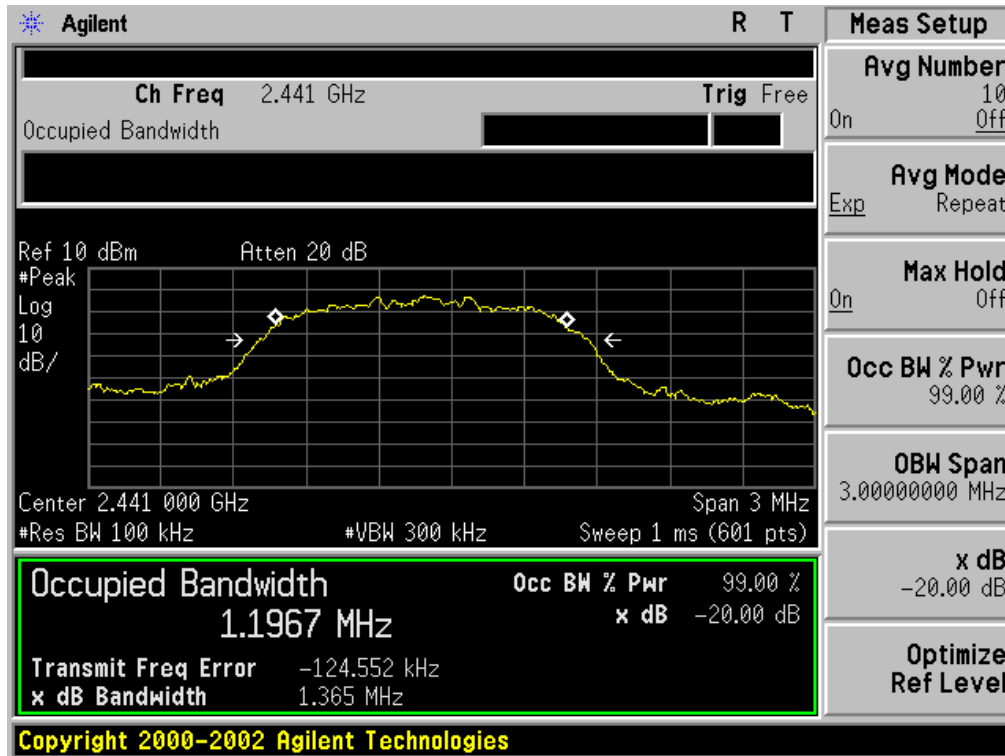


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

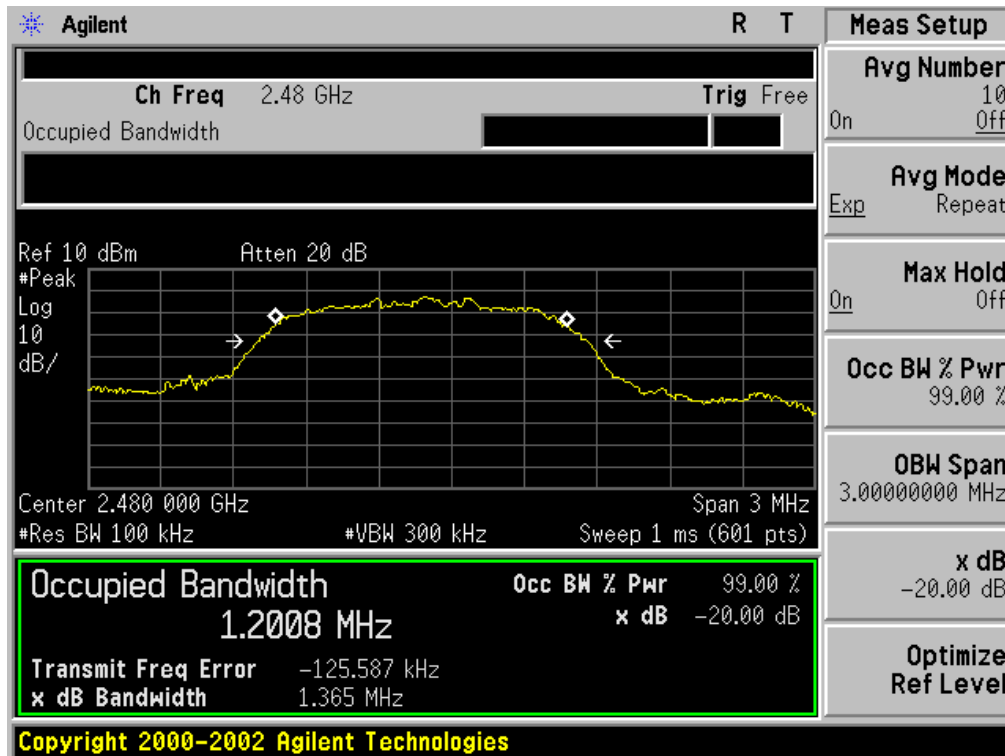


FOR BLE

BLUETOOTH 1Mbps LIMITS AND MEASUREMENT RESULT				
Applicable Limits	Measurement Result			
	Test Data (MHz)			Result
		99%OBW (MHz)	-20dB BW(MHz)	
N/A	Low Channel	1.044	1.200	PASS
	Middle Channel	1.039	1.198	PASS
	High Channel	1.042	1.203	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

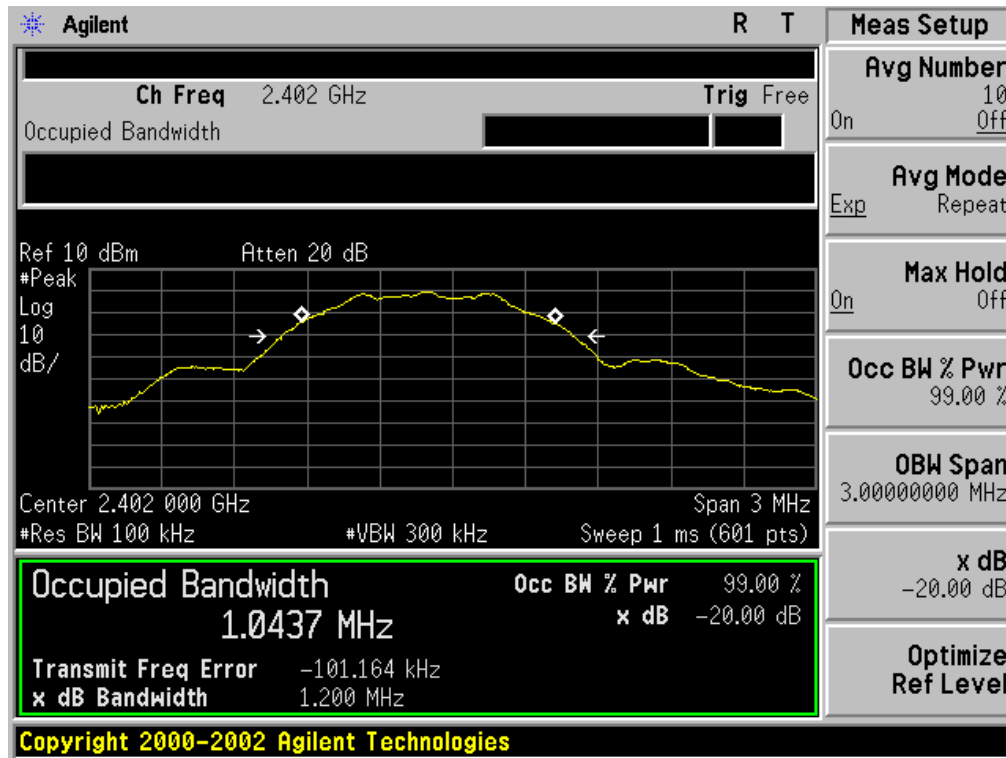

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

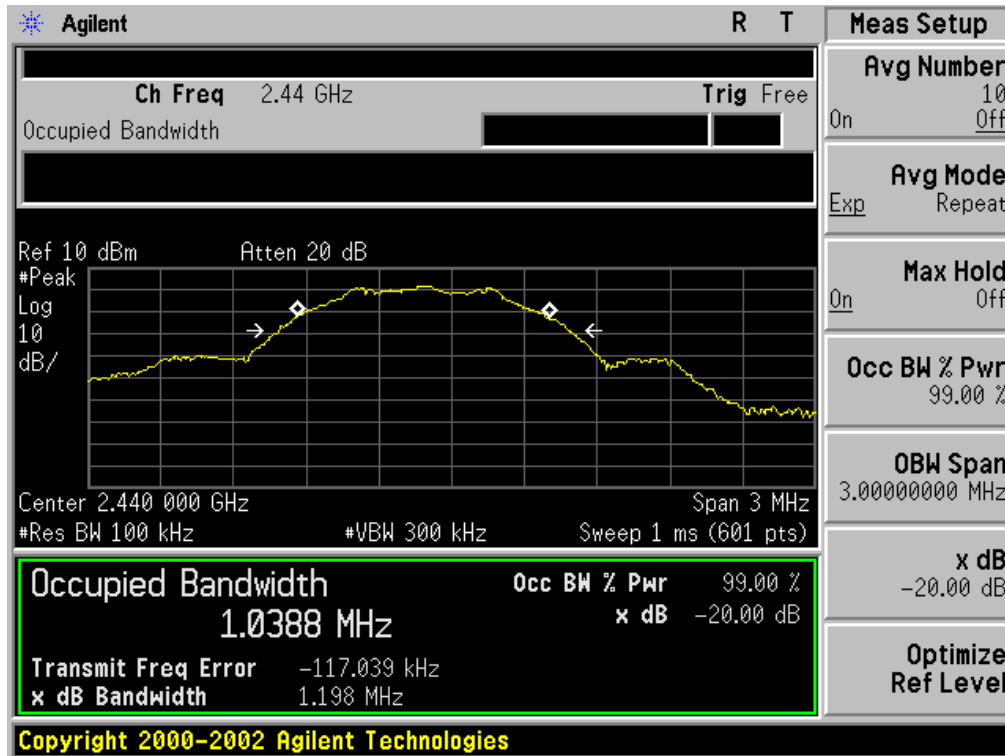

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

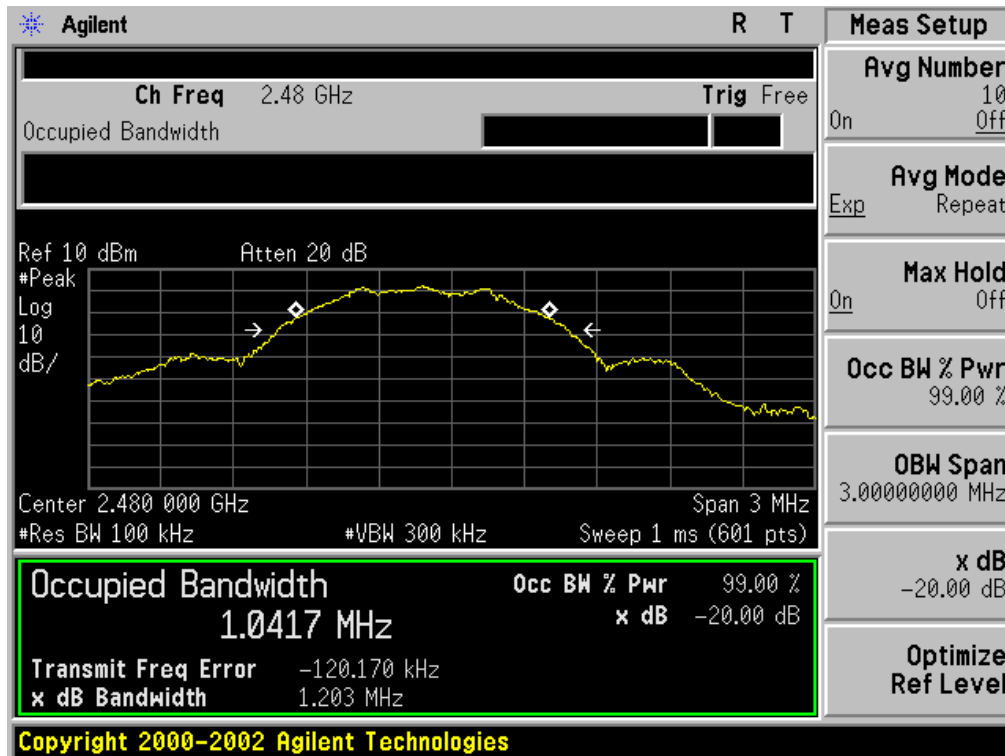

## 12. FCC LINE CONDUCTED EMISSION TEST


### 12.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage	
	Q.P.( dBuV)	Average( dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Note:

1. The lower limit shall apply at the transition frequency.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

### 12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

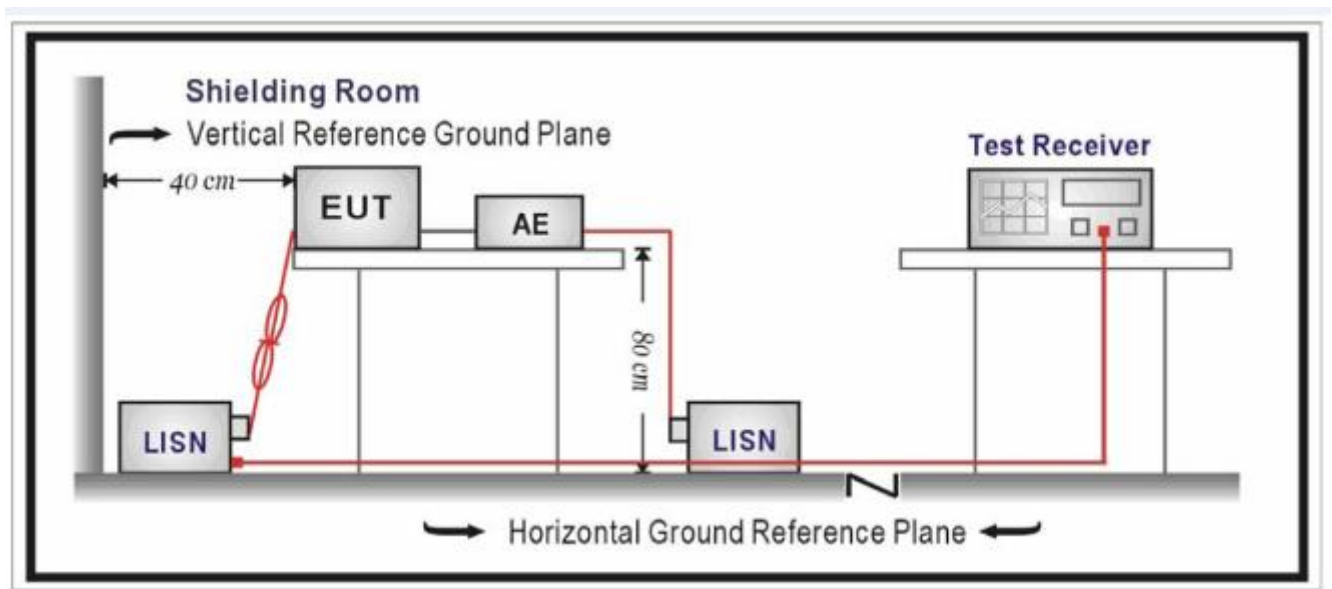



### **12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST**

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
2. Support equipment, if needed, was placed as per ANSI C63.10.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
4. All support equipments received AC120V/60Hz power from a LISN, if any.
5. The EUT received DC charging voltage by adapter or PC which received 120V/60Hz power by a LISN.
6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.
9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

### **12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST**


1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
3. The test data of the worst case condition(s) was reported on the Summary Data page.

### 12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

By adapter(worst case)

FOR BR/EDR

Line Conducted Emission Test Line 1-L

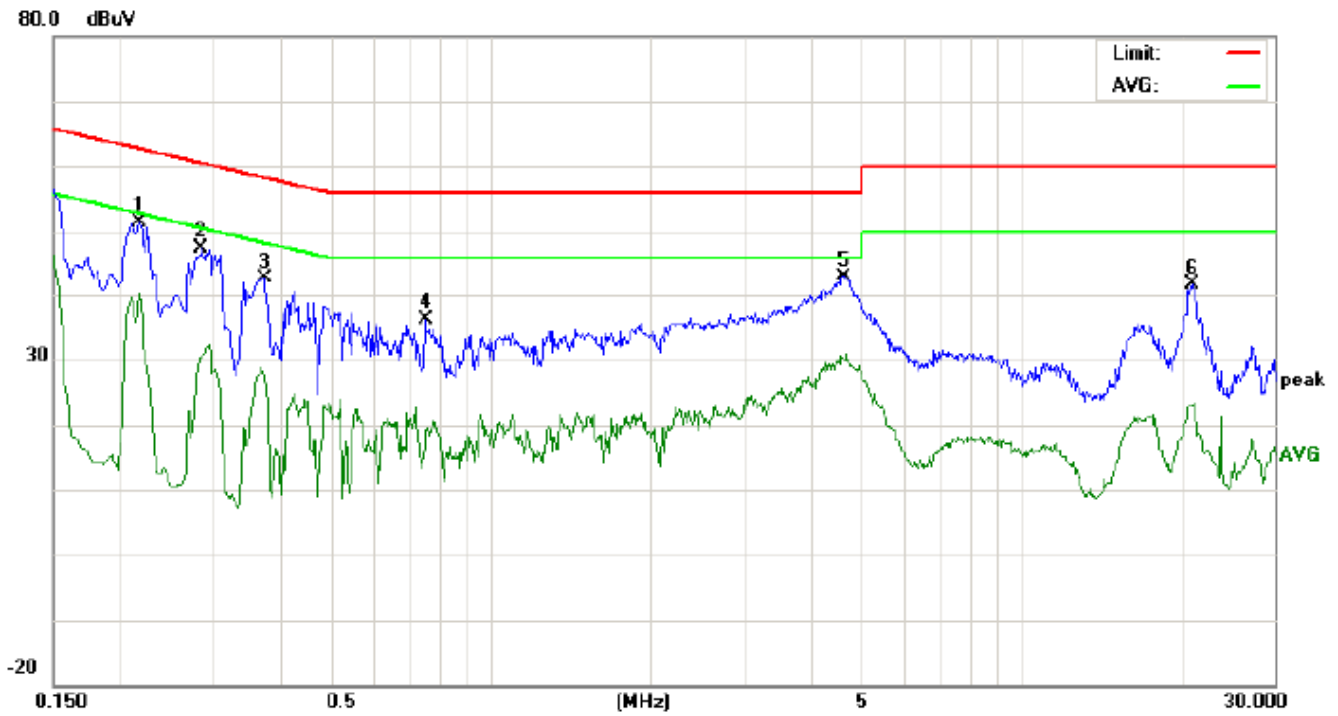

Site: Conduction  
 Limit: FCC Class B Conduction(QP)  
 EUT: bone conduction Bluetooth headset  
 M/N: HB-B2  
 Mode: BT Link with charging  
 Note:

Phase: **L1**  
 Power:

Temperature: 26  
 Humidity: 60 %

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor (dB)	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.2180	41.25		29.99	10.23	51.48		40.22	62.89	52.89	-11.41	-12.67	P	
2	0.2860	36.99		20.20	10.28	47.27		30.48	60.64	50.64	-13.37	-20.16	P	
3	0.3740	32.37		16.87	10.32	42.69		27.19	58.41	48.41	-15.72	-21.22	P	
4	0.7539	25.73		6.48	10.31	36.04		16.79	56.00	46.00	-19.96	-29.21	P	
5	4.6419	32.62		19.93	10.22	42.84		30.15	56.00	46.00	-13.16	-15.85	P	
6	20.9860	31.37		12.84	10.13	41.50		22.97	60.00	50.00	-18.50	-27.03	P	

Line Conducted Emission Test Line 2-N




Site: Conduction Phase: **N** Temperature: 26  
 Limit: FCC Class B Conduction(QP) Power: Humidity: 60 %  
 EUT: bone conduction Bluetooth headset  
 M/N: HB-B2  
 Mode: BT Link with charging  
 Note:

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor (dB)	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1980	45.35		32.19	10.21	55.56		42.40	63.69	53.69	-8.13	-11.29	P	
2	0.2700	40.50		23.63	10.28	50.78		33.91	61.12	51.12	-10.34	-17.21	P	
3	0.9260	28.83		13.60	10.40	39.23		24.00	56.00	46.00	-16.77	-22.00	P	
4	2.2620	28.46		13.57	10.33	38.79		23.90	56.00	46.00	-17.21	-22.10	P	
5	4.6019	33.10		18.17	10.22	43.32		28.39	56.00	46.00	-12.68	-17.61	P	
6	20.6740	28.71		14.18	10.12	38.83		24.30	60.00	50.00	-21.17	-25.70	P	

FOR BLE


Line Conducted Emission Test Line 1-L

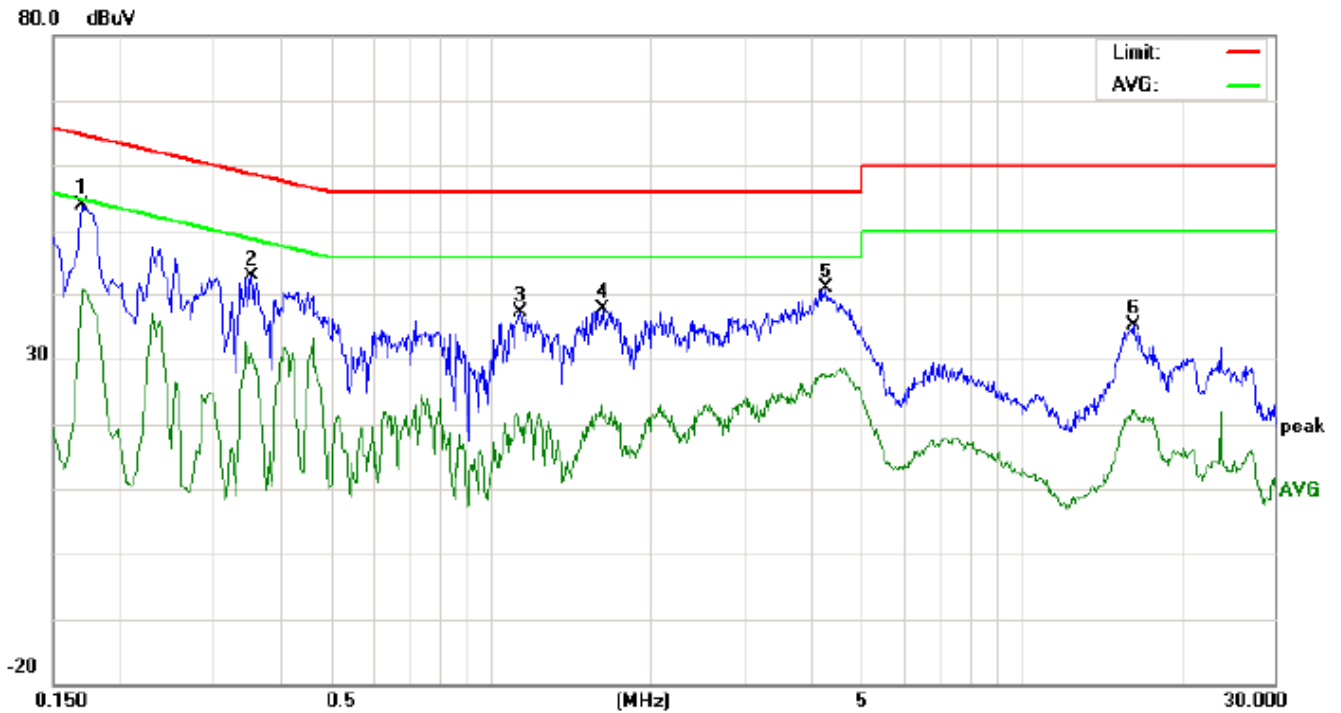

Site: Conduction Phase: **L1** Temperature: 26  
 Limit: FCC Class B Conduction(QP) Power: Humidity: 60 %  
 EUT: bone conduction Bluetooth headset  
 M/N: HB-B2  
 Mode: BT Link with charging  
 Note:

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor (dB)	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1700	43.58		30.53	10.18	53.76		40.71	64.96	54.96	-11.20	-14.25	P	
2	0.3540	32.61		20.52	10.31	42.92		30.83	58.87	48.87	-15.95	-18.04	P	
3	1.1380	26.77		8.45	10.37	37.14		18.82	56.00	46.00	-18.86	-27.18	P	
4	1.6300	27.33		10.54	10.34	37.67		20.88	56.00	46.00	-18.33	-25.12	P	
5	4.2819	30.59		17.31	10.31	40.90		27.62	56.00	46.00	-15.10	-18.38	P	
6	16.2339	24.92		12.07	10.11	35.03		22.18	60.00	50.00	-24.97	-27.82	P	

Line Conducted Emission Test Line 2-N

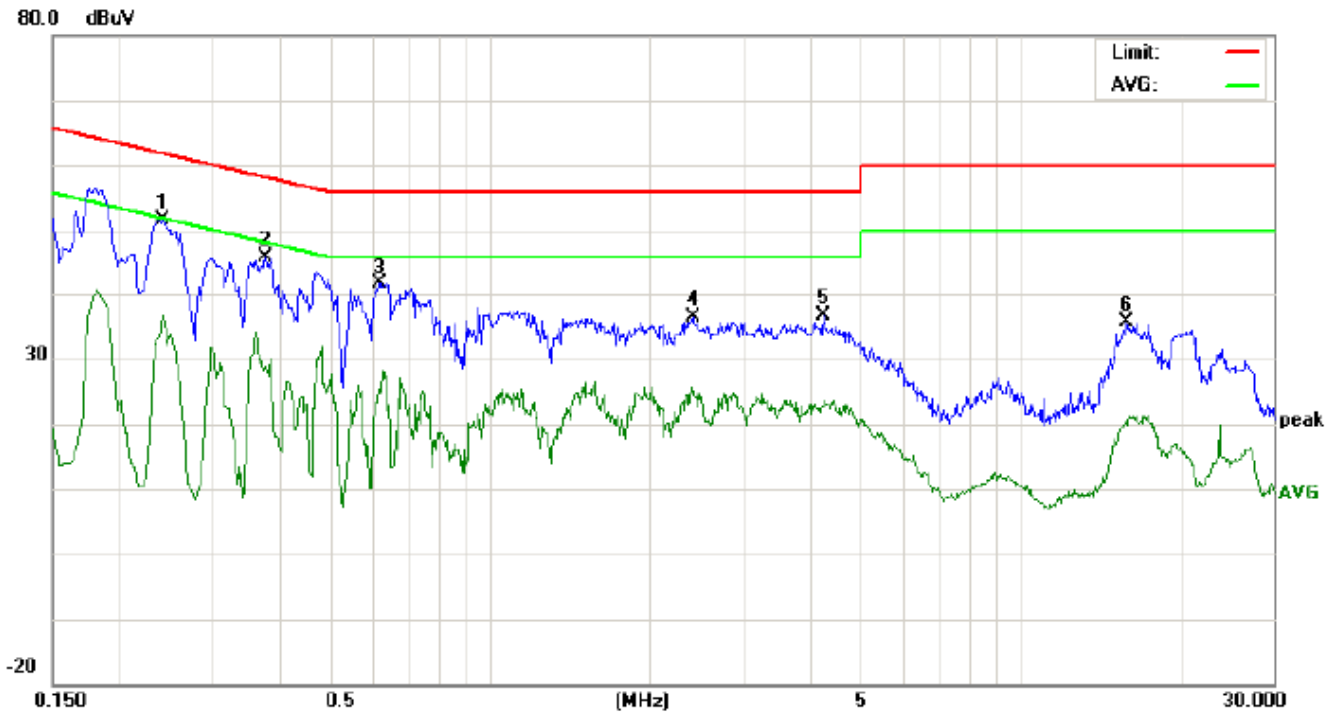


Site: Conduction Phase: **N** Temperature: 26  
Limit: FCC Class B Conduction(QP) Power: Humidity: 60 %  
EUT: bone conduction Bluetooth headset  
M/N: HB-B2  
Mode: BT Link with charging  
Note:

No.	Freq. (MHz)	Reading Level (dBuV)			Correct Factor (dB)	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.2420	41.36		26.45	10.26	51.62		36.71	62.02	52.02	-10.40	-15.31	P	
2	0.3780	35.46		18.46	10.32	45.78		28.78	58.32	48.32	-12.54	-19.54	P	
3	0.6180	31.40		15.03	10.32	41.72		25.35	56.00	46.00	-14.28	-20.65	P	
4	2.4180	25.99		14.59	10.40	36.39		24.99	56.00	46.00	-19.61	-21.01	P	
5	4.2619	26.42		12.35	10.31	36.73		22.66	56.00	46.00	-19.27	-23.34	P	
6	15.8019	25.58		10.25	10.11	35.69		20.36	60.00	50.00	-24.31	-29.64	P	



### APPENDIX A: PHOTOGRAPHS OF TEST SETUP

#### FCC LINE CONDUCTED EMISSION TEST SETUP

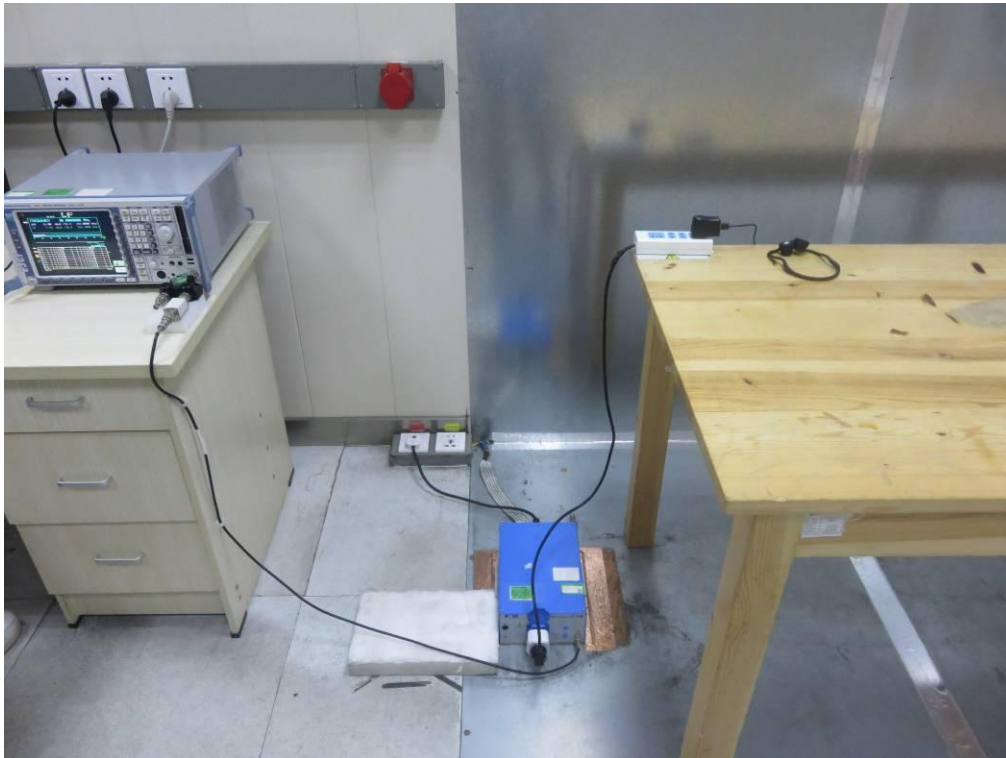


#### FCC RADIATED EMISSION TEST SETUP



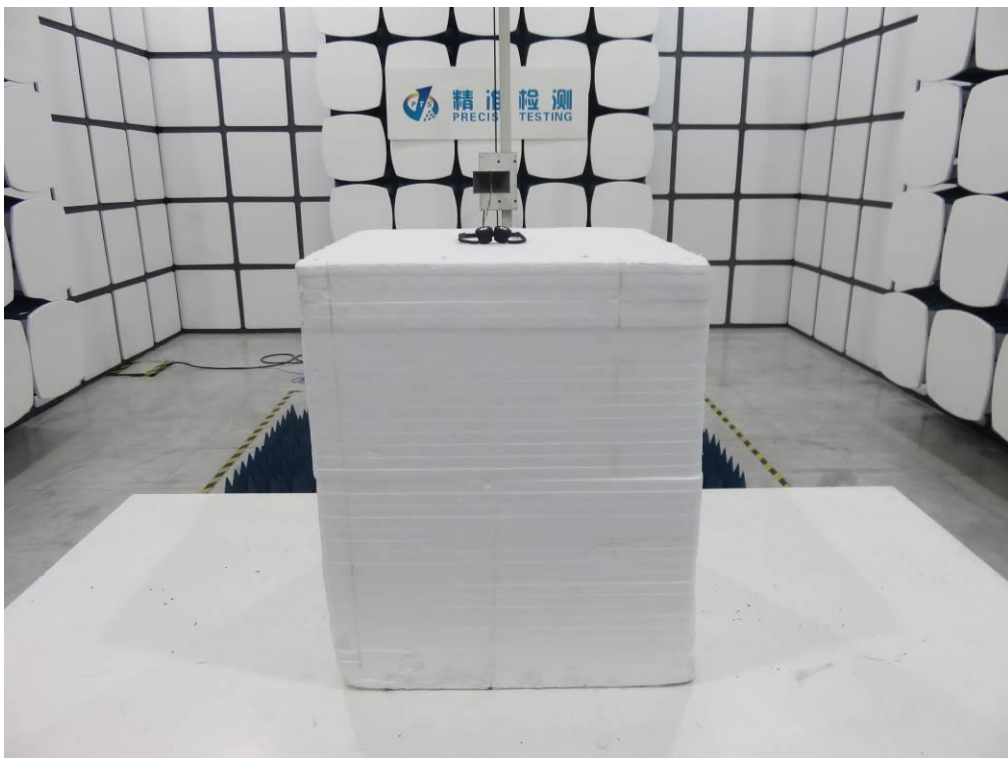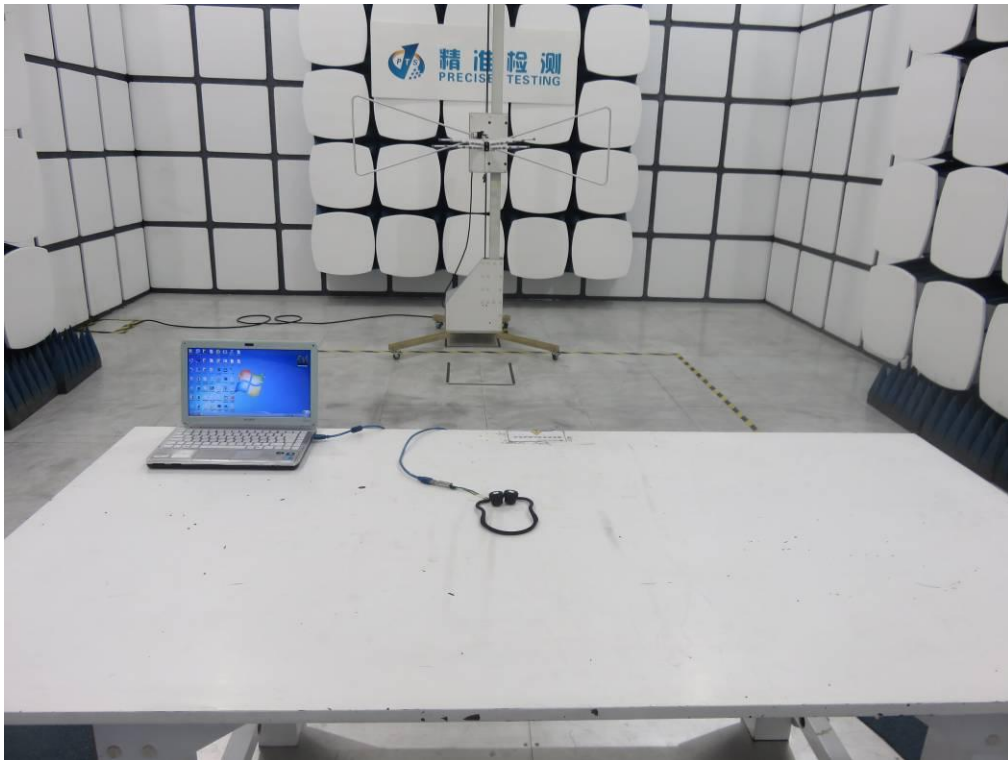



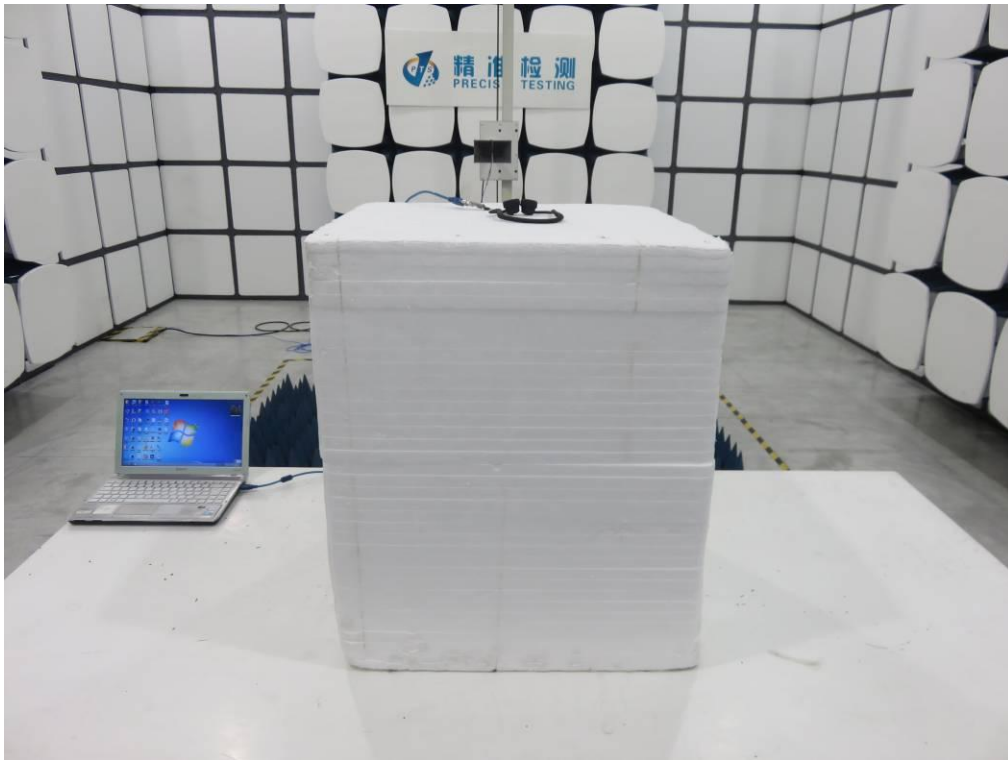



**APPENDIX B: PHOTOGRAPHS OF EUT**  
TOP VIEW OF EUT



**BOTTOM VIEW OF EUT**



FRONT VIEW OF EUT



BACK VIEW OF EUT





LEFT VIEW OF EUT



RIGHT VIEW OF EUT



VIEW OF EUT (PORT)




OPEN VIEW OF EUT







INTERNAL VIEW OF EUT-1

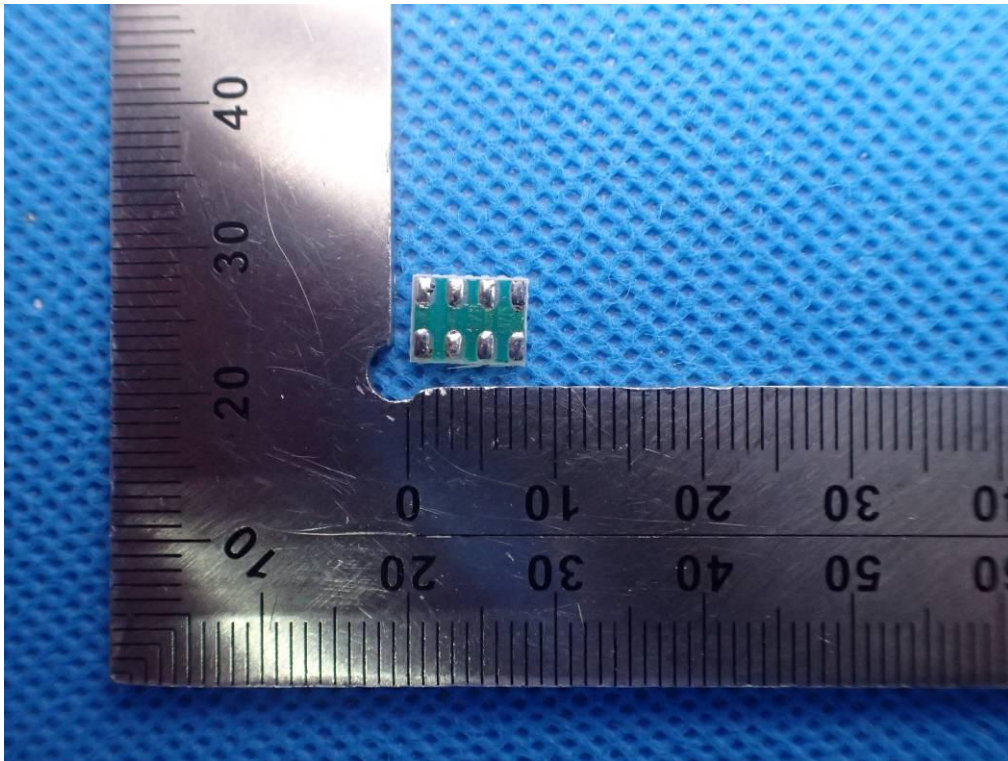


INTERNAL VIEW OF EUT-2

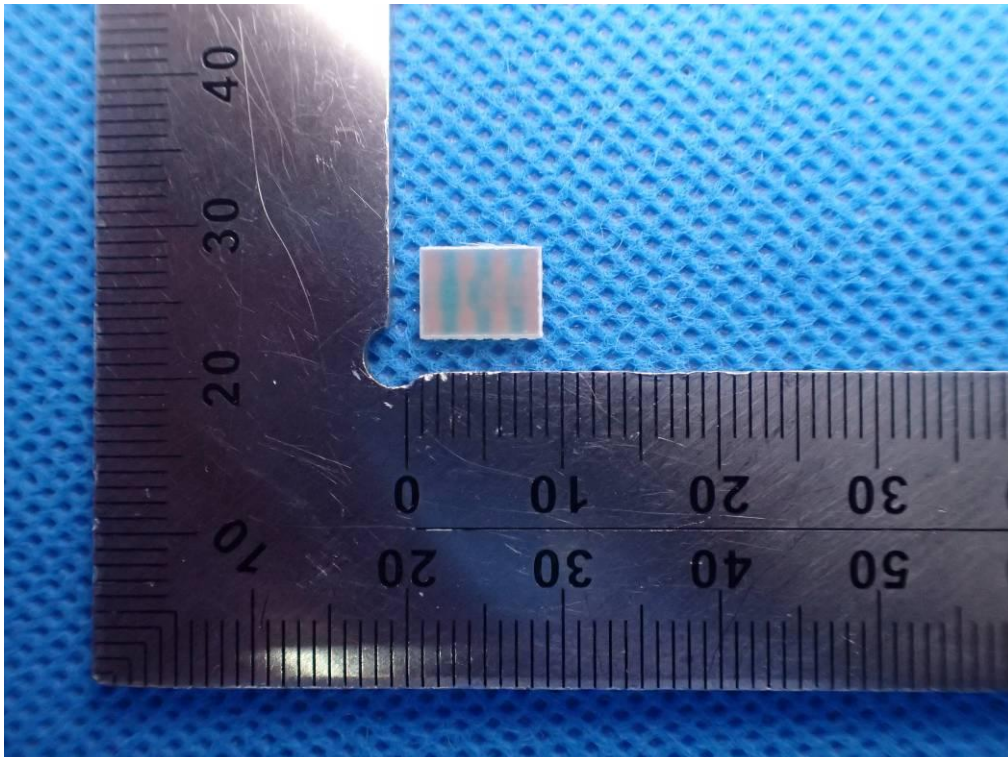

INTERNAL VIEW OF EUT-3

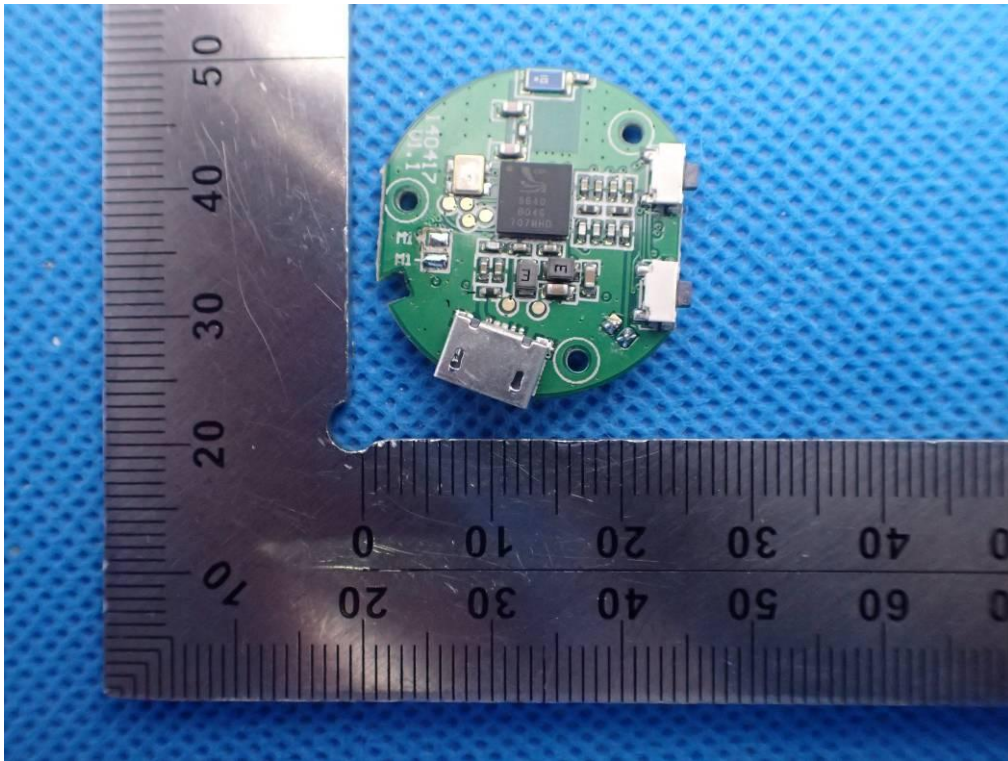


INTERNAL VIEW OF EUT-4

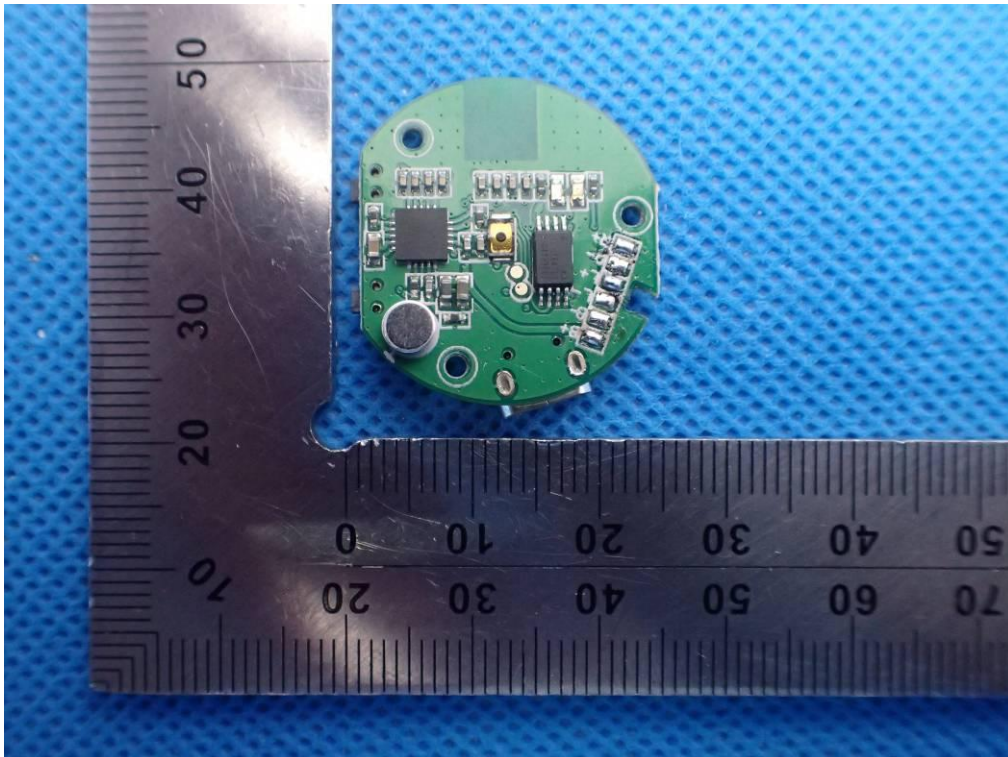



INTERNAL VIEW OF EUT-5

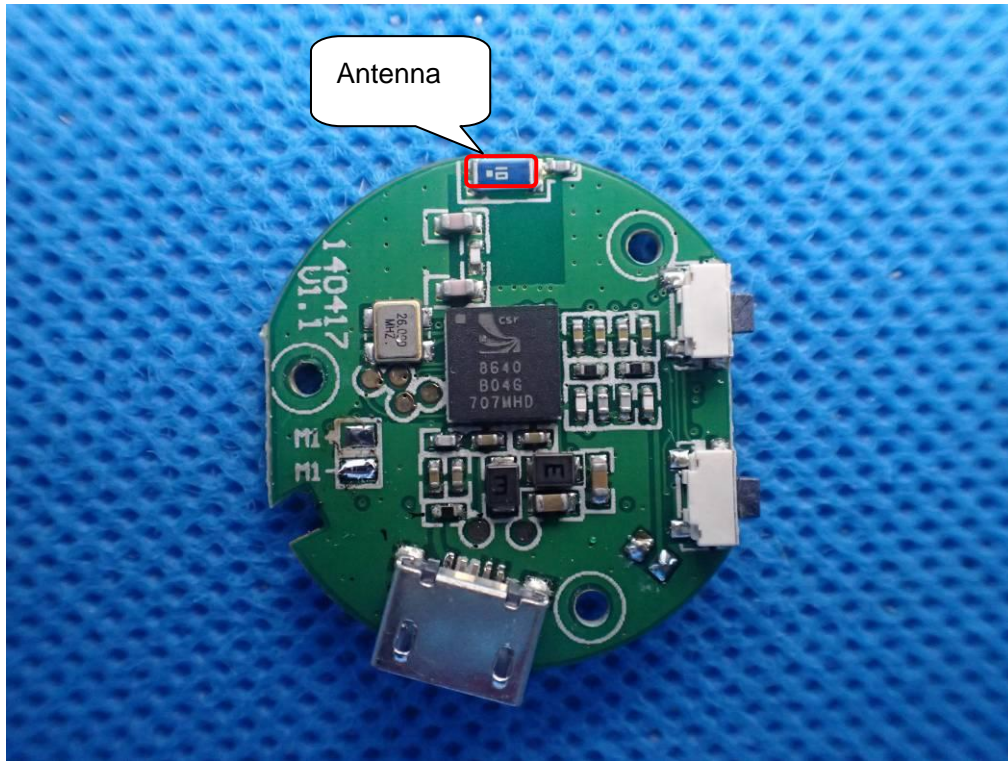

VIEW OF ADAPTER (AE)



THE ADAPTER SUPPLIED BY AGC

----END OF REPORT----