

# **FCC TEST REPORT**

for

## **PART 15, SUBPART B CLASS B**

**EQUIPMENT** : 10/100 BASE-TX Fast Ethernet Adapter

**MODEL NO.** : LFE-8139ATX

**F C C I D** : ODMFE0199-NIC-1

**FILING TYPE** : Original Grant

**APPLICANT** : **OvisLink Corp.**  
2F, No.8, Lane 130, Min Chuan Road,  
Hsin-Tien City, Taipei, Taiwan, R.O.C.

- The test result refers exclusively to the test presented test model / sample.
- Without the written authorization of the test lab., the Test Report may not be copied.

### ***SPORTON INTERNATIONAL INC.***

*6F, No. 106, Hsin Tai Wu Rd., Sec. 1, Hsi Chih, Taipei Hsien, Taiwan, R.O.C.*

**TABLE OF CONTENT**

<b>SECTION TITLE</b>	<b>PAGE</b>
<b>CERTIFICATE OF COMPLIANCE .....</b>	<b>3</b>
<b>1. GENERAL DESCRIPTION OF EQUIPMENT UNDER TEST .....</b>	<b>4</b>
1.1. APPLICANT .....	4
1.2. MANUFACTURER : .....	4
1.3. BASIC DESCRIPTION OF EQUIPMENT UNDER TEST .....	4
1.4. Feature of Equipment under Test .....	4
<b>2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST .....</b>	<b>5</b>
2.1. TEST MANNER .....	5
2.2. DESCRIPTION OF TEST SYSTEM .....	5
2.3. CONNECTION DIAGRAM OF TEST SYSTEM .....	7
<b>3. TEST SOFTWARE .....</b>	<b>8</b>
<b>4. GENERAL INFORMATION OF TEST .....</b>	<b>9</b>
4.1. TEST FACILITY .....	9
4.2. STANDARD FOR METHODS OF MEASUREMENT .....	9
4.3. TEST IN COMPLIANCE WITH .....	9
4.4. FREQUENCY RANGE INVESTIGATED .....	9
4.5. TEST DISTANCE .....	9
<b>5. TEST OF CONDUCTED POWERLINE .....</b>	<b>10</b>
5.1. MAJOR MEASURING INSTRUMENTS .....	10
5.2. TEST PROCEDURES .....	11
5.3. TYPICAL TEST SETUP LAYOUT OF CONDUCTED POWERLINE .....	12
5.4. TEST RESULT OF AC POWERLINE CONDUCTED EMISSION .....	13
5.5. PHOTOGRAPHS OF CONDUCTED POWERLINE TEST CONFIGURATION .....	15
<b>6. TEST OF RADIATED EMISSION .....</b>	<b>17</b>
6.1. MAJOR MEASURING INSTRUMENTS .....	17
6.2. TEST PROCEDURES .....	18
6.3. TYPICAL TEST SETUP LAYOUT OF RADIATED EMISSION .....	19
6.4. TEST RESULT OF RADIATED EMISSION .....	20
6.5. PHOTOGRAPHS OF RADIATED EMISSION TEST CONFIGURATION .....	22
<b>7. ANTENNA FACTOR AND CABLE LOSS .....</b>	<b>23</b>
<b>8 LIST OF MEASURING EQUIPMENT USED .....</b>	<b>24</b>

# **CERTIFICATE OF COMPLIANCE**

for

## **FCC PART 15, SUBPART B CLASS B**

EQUIPMENT : 10/100 BASE-TX Fast Ethernet Adapter

MODEL NO. : LFE-8139ATX

**F C C I D** : ODMFE0199-NIC-1

APPLICANT : **OvisLink Corp.**

2F, No. 8, 130 Lane, Min-Chuan Rd., Hsin-Tien City,  
Taipei, Taiwan, R.O.C.

### **I HEREBY CERTIFY THAT :**

The measurement shown in this report were made in accordance with the procedures given in **ANSI C63.4 -1992** and the energy emitted by this equipment was **passed** both radiated and conducted emissions **Class B** limits. Testing was carried out on **Oct. 20, 1998** at **SPORTON International Inc. LAB.**

---

W. L. Huang  
General Manager

### **SPORTON INTERNATIONAL INC.**

*6F, No. 106, Hsin Tai Wu Rd., Sec. 1, Hsi Chih, Taipei Hsien, Taiwan, R.O.C.*

## **1. GENERAL DESCRIPTION OF EQUIPMENT UNDER TEST**

### **1.1. APPLICANT**

**OvisLink Corp.**

2F, No. 8, 130 Lane, Min-Chuan Rd., Hsin-Tien City,  
Taipei, Taiwan, R.O.C.

### **1.2. MANUFACTURER :**

Same as 1.1.

### **1.3. BASIC DESCRIPTION OF EQUIPMENT UNDER TEST**

Equipment : 10/100 BASE-TX Fast Ethernet Adapter  
FCC ID : ODMFE0199-NIC-1  
Model No. : LFE-8139 ATX  
Trade Name : OvisLink  
STP : Shielded  
Power Supply Type : Switching  
Power Cord : Non-Shielded

### **1.4. Feature of Equipment under Test**

- Full compliance with PCI Rev.2.1
- Complies with the Ethernet/IEEE 802.3u, 100BASE-TX 10 BASE-T industry standard
- Complies to AGP(Rev 1.0), PCI Power Management (Rev 1.1), and Device Class Power Management reference Specification(V 1.0a), such as to support OS Directed Power Management (OSPM) environment.
- Supports full-duplex operations, thus doubling the network speed up to 20Mbps on 10BASE-T Ethernet or 200Mbps on 100BASE-TX Fast when setting in full-duplex mode.
- One RJ-45 connector with Auto-sense of cable type of or 100Mbps network operation
- Support PCI clock speed from 16.75 to 40MHz, capable of zero wait state

## 2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST

### 2.1. TEST MANNER

- a. The EUT has been associated with personal computer and peripherals pursuant to ANSI C63.4-1992 and configuration operated in a manner which tended to maximize its emission characteristics in a typical application.
- b. The SONY Monitor, DELL PS/2 Keyboard, PRIMAX PS/2 Mouse, HP Printer, ACEEX Modem and EUT were connected to the FIC PC for EMI test.
- c. Using the Twisted Pair cable to connect the EUT and workstation which is installed with the other ethernet lan card.
- d. Frequency range investigated: conduction 450 KHz to 30 MHz, radiation 30 MHz to 1,000 MHz.

### 2.2. DESCRIPTION OF TEST SYSTEM

#### Support Unit 1. -- Personal Computer (FIC)

FCC ID	: N/A
Model No.	: P2L97
Power Supply Type	: Switching
Power Cord	: Non-Shielded
Serial No.	: SP0037
Data Cable	: Shielded, 360 degree via metal backshells
Remark	: This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

#### Support Unit 2. -- Monitor (SONY)

FCC ID	: AK8GDM17SE2T
Model No.	: GDM-17SE2T
Power Supply Type	: Switching
Power Cord	: Non-Shielded
Serial No.	: SP0043
Data Cable	: Double-Shielded, 360 degree via metal backshells

#### Support Unit 3. -- PS/2 Keyboard (DELL)

FCC ID	: GYUM92SK
Model No.	: AT101(DE8M)
Power Supply Type	: N/A
Serial No.	: SP0054
Data Cable	: Shielded, 360 degree via metal backshells

## Support Unit 4. -- PS/2 Mouse (PRIMAX)

FCC ID : EMJMUSJQ  
Model No. : MUS9J  
Power Supply Type : N/A  
Serial No. : SP0045  
Data Cable : Braided-Shielded, 360 degree via metal backshells


## Support Unit 5. -- Printer (HP)

FCC ID : B94C2642X  
Model No. : DeskJet 400  
Power Supply Type : Linear  
Power Cord : N/A  
Serial No. : SP0048  
Data Cable : Braided-Shielded, 360 degree via metal backshells

## Support Unit 6. -- Modem (ACEEX)

FCC ID : IFAXDM1414  
Model No. : DM1414  
Power Supply Type : Linear  
Power Cord : N/A  
Serial No. : SP0059  
Data Cable : Braided-Shielded, 360 degree via metal backshells

**2.3. CONNECTION DIAGRAM OF TEST SYSTEM**

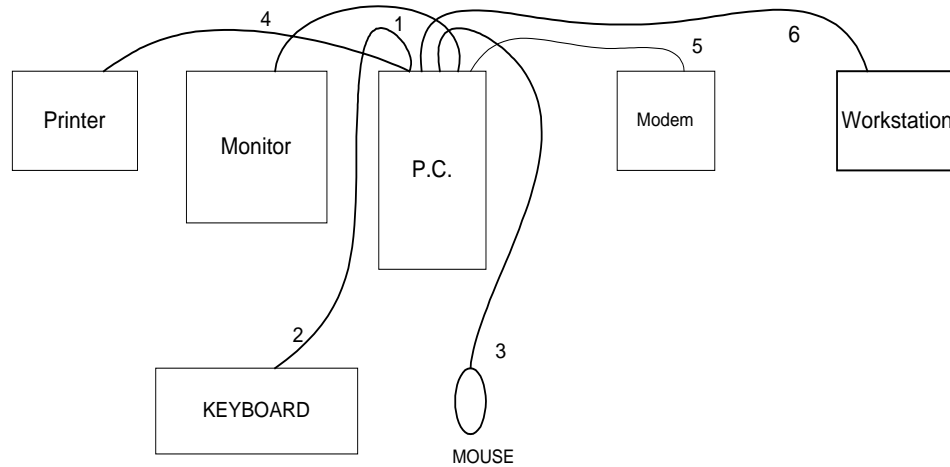

1. The I/O cable is connected to the support device 2.
2. The I/O cable is connected to the support device 3.
3. The I/O cable is connected to the support device 4.
4. The I/O cable is connected to the support device 5.
5. The I/O cable is connected to the support device 6.
6. The I/O cable is connected from EUT to the workstation.

### **3. TEST SOFTWARE**

An executive program, EMITEST.EXE under WIN 98, which generates a complete line of continuously repeating " H " pattern was used as the test software.

The program was executed as follows :

- a. Turn on the power of all equipment.
- b. The PC reads the test program from the floppy disk drive and runs it.
- c. The PC sends " H " messages to the monitor, and the monitor displays " H " patterns on the screen.
- d. The PC sends " H " messages to the printer, then the printer prints them on the paper.
- e. The PC sends " H " messages to the modem.
- f. The PC sends " H " messages to the internal Hard Disk, and the Hard Disk reads and writes the message.
- g. Repeat the steps from b to f.



## **4. GENERAL INFORMATION OF TEST**

### **4.1. TEST FACILITY**

This test was carried out by SPORTON INTERNATIONAL INC.

Openarea Test Site Location : No. 30-1, Lin 6, Diing-Fwu Tsuen, Lin-Kou-Hsiang,  
Taipei Hsien, Taiwan, R.O.C.

TEL : 886-2-2601-1640

FAX : 886-2-2601-1695

### **4.2. STANDARD FOR METHODS OF MEASUREMENT**

ANSI C63.4-1992

### **4.3 .TEST IN COMPLIANCE WITH**

FCC PART 15, SUBPART B CLASS B

### **4.4. FREQUENCY RANGE INVESTIGATED**

- a. Conduction : from 450 KHz to 30 MHz
- b. Radiation : from 30 MHz to 1000 MHz.

### **4.5. TEST DISTANCE**

The test distance of radiated emission from antenna to EUT is 3M.

## 5. TEST OF CONDUCTED POWERLINE

Conducted Emissions were measured from 450 KHz to 30 MHz with a bandwidth of 9 KHz on the 115 VAC power and return leads of the EUT according to the methods defined in ANSI C63.4-1992 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in Figure 5-3. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.


### 5.1. MAJOR MEASURING INSTRUMENTS

Test Receiver	HP 8591EM
Attenuation	0 dB
Start Frequency	0.45 MHz
Stop Frequency	30 MHz
Step MHz	0.007 MHz
IF Bandwidth	9 kHz

**5.2. TEST PROCEDURES**

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room and was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network ( LISN ).
- c. All the support units are connect to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm , 50 microhenry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 450 KHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- i. If the emission level of the EUT in peak mode was 6 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported otherwise the emissions which do not have 6 dB margin will be retested on by one using the quasi-peak method and reported.

5.3. TYPICAL TEST SETUP LAYOUT OF CONDUCTED POWERLINE

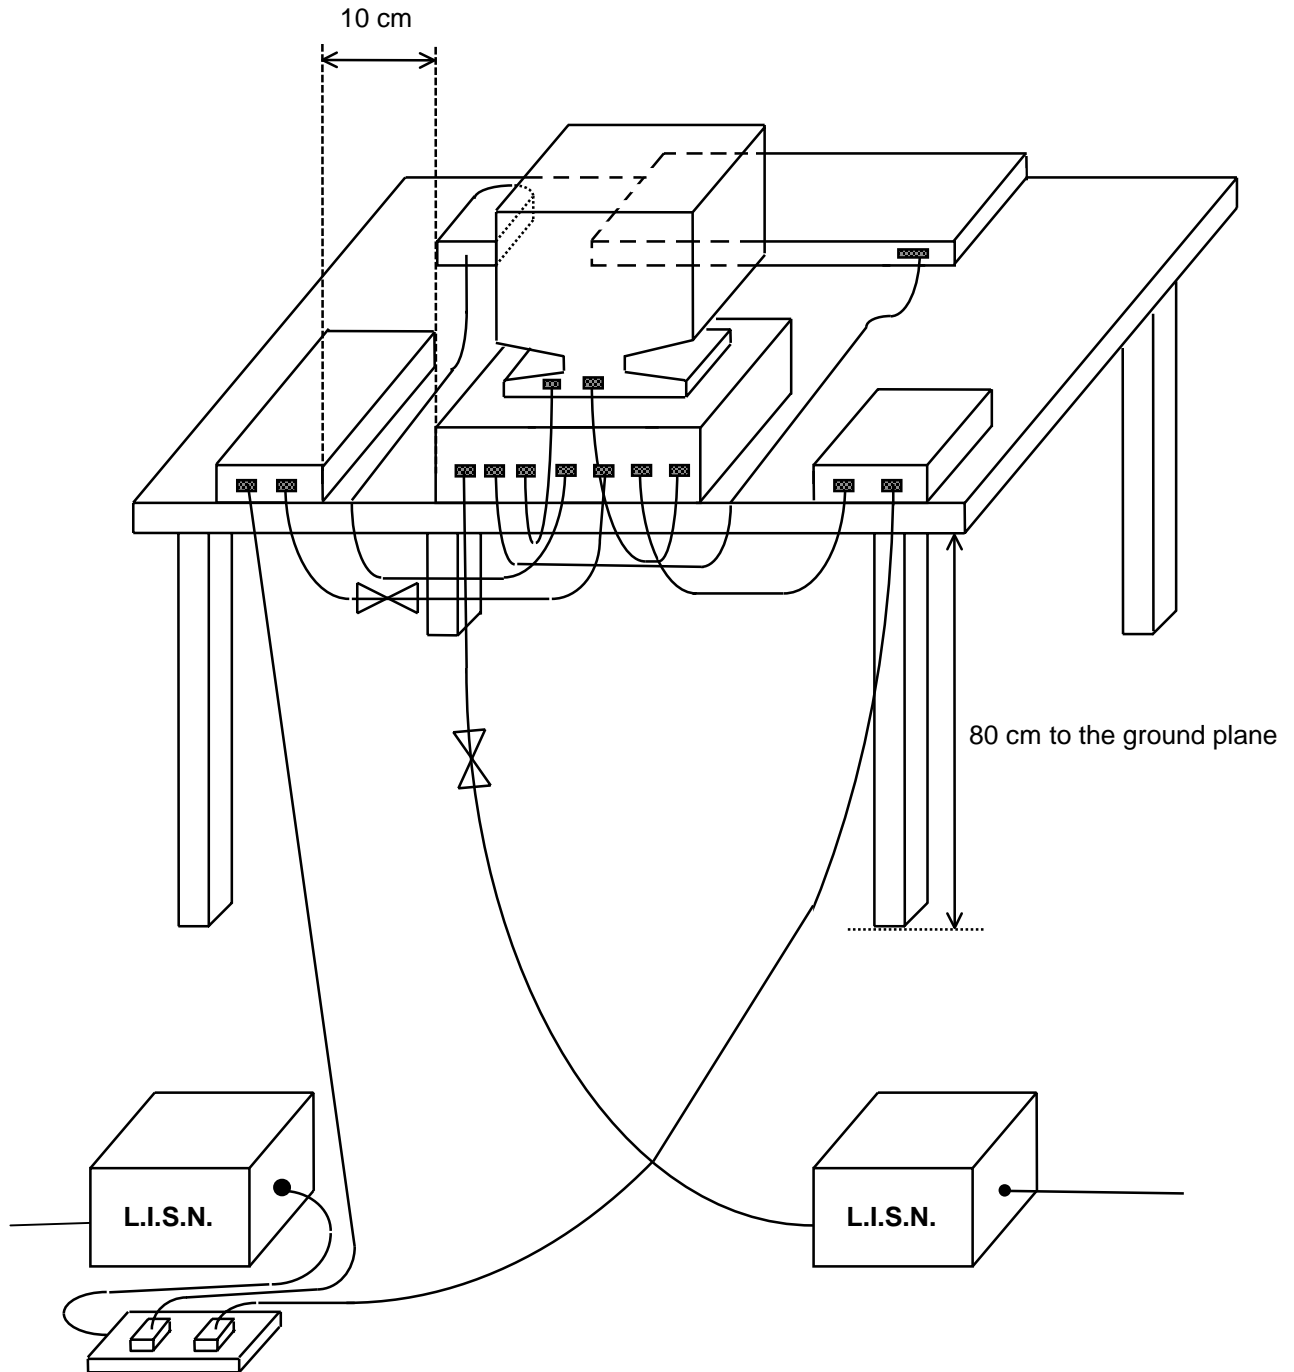

**5.4. TEST RESULT OF AC POWERLINE CONDUCTED EMISSION**

- Frequency Range of Test : from 0.45 MHz to 30 MHz
- All emissions not reported here are more than 10 dB below the prescribed limit.
- Temperature : 24°C
- Relative Humidity : 58 %
- Test Mode: 10M
- Test Date : Oct. 20, 1998
- All emissions not reported here are more than 10 dB below the prescribed limit.

**The Conducted Emission test was passed at minimum margin**

**LINE 8.000 MHz / 35.30 dBuV.**

Freq. (MHz)	Line/ Neutral	Meter Reading		Limits		Margin
		(dBuV)	(uV)	(dBuV)	(uV)	(dB)
8.000	L	35.30	58.00	48.00	251.19	-12.70
24.774	L	30.20	32.00	48.00	251.19	-17.80
8.000	N	35.20	58.00	48.00	251.19	-12.80
10.002	N	33.50	47.00	48.00	251.19	-14.50
11.250	N	30.70	34.00	48.00	251.19	-17.30
23.830	N	30.70	34.00	48.00	251.19	-17.30

Test Engineer : \_\_\_\_\_

KENNY CHUANG

**5.4.1. TEST RESULT OF AC POWERLINE CONDUCTED EMISSION**

- Frequency Range of Test : from 0.45 MHz to 30 MHz
- All emissions not reported here are more than 10 dB below the prescribed limit.
- Temperature : 24°C
- Relative Humidity : 58 %
- Test Mode: 100M
- Test Date : Oct. 20, 1998
- All emissions not reported here are more than 10 dB below the prescribed limit.

**The Conducted Emission test was passed at minimum margin**

**LINE 8.000 MHz / 36.10 dBuV.**


Freq. (MHz)	Line/ Neutral	Meter Reading		Limits		Margin
		(dBuV)	(uV)	(dBuV)	(uV)	(dB)
8.000	L	36.10	64.00	48.00	251.19	-11.90
9.000	L	30.40	33.00	48.00	251.19	-17.60
25.620	L	29.20	29.00	48.00	251.19	-18.80
0.507	N	29.50	30.00	48.00	251.19	-18.50
8.000	N	35.60	60.00	48.00	251.19	-12.40
26.706	N	32.80	44.00	48.00	251.19	-15.20

Test Engineer : \_\_\_\_\_


KENNY CHUANG

**5.5. PHOTOGRAPHS OF CONDUCTED POWERLINE TEST CONFIGURATION**


FRONT VIEW



REAR VIEW



SIDE VIEW





## 6. TEST OF RADIATED EMISSION

Radiated emissions from 30 MHz to 1000 MHz were measured with a bandwidth of 120 KHz according to the methods defines in ANSI C63.4-1992. The EUT was placed on a nonmetallic stand in the open-field site, 0.8 meter above the ground plane, as shown in Figure 6-3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions.


### 6.1. MAJOR MEASURING INSTRUMENTS

Amplifier	(HP 8447D)
Attenuation	0 dB
RF Gain	25 dB
Signal Input	0.1 MHz to 1.3 GHz
Spectrum Analyzer	(HP 8560E)
Attenuation	0 dB
Start Frequency	30 MHz
Stop Frequency	1,000 MHz
Stop Frequency	1,000 MHz
Video Bandwidth	1 MHz
Signal Input	30 Hz to 2.9 GHz
Test Receiver	(R&S ESVP)
Resolution Bandwidth	120 KHz
Frequency Band	30 MHz to 1 GHz
Quasi-Peak Detector	ON for Quasi-Peak Mode OFF for Peak Mode

**6.2. TEST PROCEDURES**

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a half wave dipole and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower ( from 1 M to 4 M ) and turn table ( from 0 degree to 360 degrees ) to find the maximum reading.
- f. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 6 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported otherwise the emissions which do not have 6 dB margin will be repeated one by one using the quasi-peak method and reported.

6.3. TYPICAL TEST SETUP LAYOUT OF RADIATED EMISSION

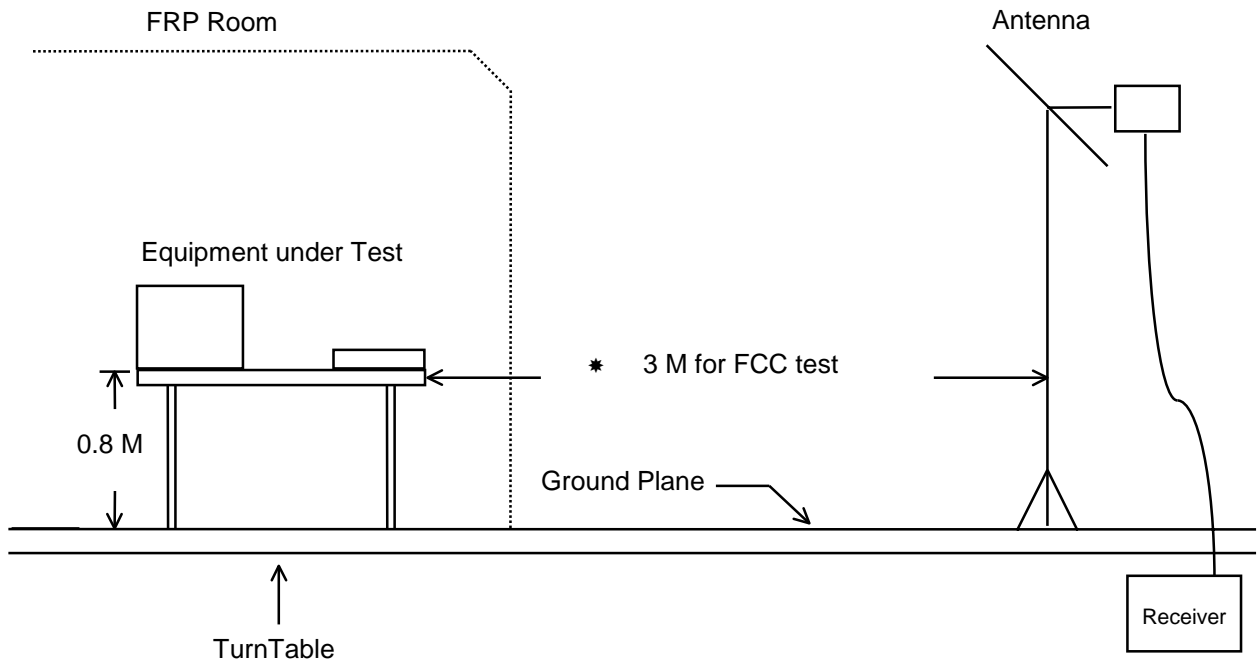

**6.4. TEST RESULT OF RADIATED EMISSION**

- Equipment meets the technical specifications of 15.109
- Frequency Range of Test : from 30 MHz to 1000 MHz
- Test Distance : 3 M
- Test Mode: 10M
- Temperature : 27°C
- Relative Humidity : 45 %
- Test Date : Oct. 13, 1998
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Antenna Factor + Cable Loss + Reading = Emission

**The Radiated Emission test was passed at minimum margin**

**630.192 MHz / 42.89 dBuV (VERTICAL) Antenna Height 2.9 Meter, Turntable Degree 180 °.**

Frequency (MHz)	Polarity	Antenna Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Limits		Emission (dBuV)	Level (uV)	Margin (dB)
					(dBuV)	(uV)			
564.041	H	20.00	4.00	18.00	46.00	199.53	42.45	133.00	-3.55
572.011	H	20.00	4.00	18.00	46.00	199.53	42.01	126.00	-3.99
630.192	H	20.00	4.00	19.00	46.00	199.53	42.89	139.00	-3.11
638.162	H	20.00	4.00	18.00	46.00	199.53	42.14	128.00	-3.86
661.275	H	21.00	4.00	18.00	46.00	199.53	42.63	135.00	-3.37
450.867	V	17.00	4.00	21.00	46.00	199.53	41.87	124.00	-4.13

Test Engineer : \_\_\_\_\_

JACK DENG

**6.4.1. TEST RESULT OF RADIATED EMISSION**

- Equipment meets the technical specifications of 15.109
- Frequency Range of Test : from 30 MHz to 1000 MHz
- Test Distance : 3 M
- Test Mode : 100M
- Temperature : 27°C
- Relative Humidity : 45 %
- Test Date : Oct. 13, 1998
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Antenna Factor + Cable Loss + Reading = Emission

**The Radiated Emission test was passed at minimum margin**


**434.130 MHz / 42.99 dBuV (VERTICAL) Antenna Height 3.5 Meter, Turntable Degree 200 °.**

Frequency (MHz)	Polarity	Antenna Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Limits		Emission (dBuV)	Level (uV)	Margin (dB)
					(dBuV)	(uV)			
434.130	H	17.00	4.00	22.00	46.00	199.53	42.99	141.00	-3.01
534.552	H	19.00	4.00	18.00	46.00	199.53	41.40	117.00	-4.60
733.802	H	21.00	5.00	16.00	46.00	199.53	42.50	133.00	-3.50
239.662	V	11.00	3.00	28.00	46.00	199.53	42.32	131.00	-3.68
400.656	V	16.00	3.00	21.00	46.00	199.53	39.79	98.00	-6.21
450.867	V	17.00	4.00	19.00	46.00	199.53	40.03	100.00	-5.97


Test Engineer : \_\_\_\_\_  
 JACK DENG

**6.5. PHOTOGRAPHS OF RADIATED EMISSION TEST CONFIGURATION**

FRONT VIEW



REAR VIEW



**7. ANTENNA FACTOR AND CABLE LOSS**

Frequency (MHz)	Antenna Factor (dB)	Cable Loss (dB)
30	17.7	0.9
35	15.6	1.1
40	13.0	1.0
45	10.1	1.2
50	8.0	1.2
55	6.4	1.2
60	6.1	1.2
65	5.9	1.4
70	6.4	1.3
75	6.3	1.5
80	7.2	1.5
85	7.5	1.6
90	8.5	1.6
100	10.1	1.7
110	10.4	1.9
120	11.8	1.8
130	11.2	2.3
140	11.7	2.0
150	11.9	2.2
160	10.5	2.1
180	9.0	2.0
200	9.1	2.3
225	9.5	2.5
250	11.8	2.6
300	13.6	2.9
350	14.8	3.1
400	16.3	3.4
450	17.3	3.7
500	17.7	3.7
550	19.5	3.9
600	20.0	4.1
650	20.4	4.3
700	21.0	4.6
750	21.4	4.9
800	22.1	4.8
850	22.9	5.0
900	22.7	5.1
950	24.1	5.3
1000	24.9	5.5

**8 LIST OF MEASURING EQUIPMENT USED**

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration	Remark
EMC Receiver (site 2)	HP	8591EM	3710A01187	9 KHz - 18 GHz	Sep. 15, 1998	Conduction
LISN (EUT) (site 2)	Telemeter	NNB-2/16Z	98009	50 ohm / 50 uH	Jan. 29, 1998	Conduction
LISN (Support Unit) (site 2)	EMCO	3810/2NM	9703-1839	50 ohm / 50 uH	Jul. 06, 1998	Conduction
Spectrum Analyzer (Site 4)	HP	8560E	3728A03186	30Hz - 2.9GHz	Sep. 16, 1998	Radiation
Amplifier (Site 4)	HP	8447D	2944A09072	0.1MHz -1.3GHz	Sep. 04, 1998	Radiation
Test Receiver (Site 4)	R&S	ESVP	893610/003	20MHz - 1.3GHz	Apr. 13, 1998	Radiation
Bilog Antenna (Site 4)	CHASE	CBL6112A	2288	30MHz -2GHz	Jul. 14, 1998	Radiation
Half-wave dipole antenna (Site 4)	EMCO	3121C	9705-1285	28 M - 1GHz	May 19, 1998	Radiation
Turn Table (site 4)	EMCO	2080	9711-1090	0 ~ 360 degree	N/A	Radiation
Antenna Mast (site 4)	EMCO	2075	9711-2114	1 m- 4 m	N/A	Radiation

The column of Remark indicates that the instruments used for conduction (“C”) or radiation (“R”) test.