

TEST REPORT

Product Name : TLSR8298 Development Board
Brand Mark : Telink
Model No. : TLSR8298DK56D
FCC ID : OEOTLSR8298DK56D
Report Number : BLA-EMC-202206-A11402
Date of Sample Receipt : 2022/6/27
Date of Test : 2022/6/27 to 2022/7/7
Date of Issue : 2022/7/7
Test Standard : 47 CFR Part 15, Subpart C 15.247
Test Result : Pass

Telink Semiconductor (Shanghai) Co., Ltd.
Building 3, No. 1500 Zuchongzhi Rd Zhangjiang Hi-Tech Park, Shanghai

Prepared by:

BlueAsia of Technical Services(Shenzhen) Co.,Ltd.
Building C, No. 107, Shihuan Road, Shiyao Sub-District, Baoan District,
Shenzhen, Guangdong Province, China
TEL: +86-755-23059481

Compiled by: *Charlie*

Review by: *Sueals*

Approved by: *Blue Zhong*

Date: 2022/7/7



REPORT REVISE RECORD

Version No.	Date	Description
00	2022/7/7	Original

BlueAsia

TABLE OF CONTENTS

1	TEST SUMMARY	5
2	GENERAL INFORMATION	6
3	GENERAL DESCRIPTION OF E.U.T.	6
4	TEST ENVIRONMENT	7
5	TEST MODE	7
6	MEASUREMENT UNCERTAINTY	7
7	DESCRIPTION OF SUPPORT UNIT	8
8	LABORATORY LOCATION	8
9	TEST INSTRUMENTS LIST	9
10	CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ)	12
10.1	LIMITS	12
10.2	BLOCK DIAGRAM OF TEST SETUP	12
10.3	PROCEDURE	12
10.4	TEST DATA	14
11	CONDUCTED BAND EDGES MEASUREMENT	16
11.1	LIMITS	16
11.2	BLOCK DIAGRAM OF TEST SETUP	16
11.3	TEST DATA	17
12	ANTENNA REQUIREMENT	17
12.1	CONCLUSION	17
13	RADIATED SPURIOUS EMISSIONS	18
13.1	LIMITS	18
13.2	BLOCK DIAGRAM OF TEST SETUP	19
13.3	PROCEDURE	19
13.4	TEST DATA	21
14	RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS	29
14.1	LIMITS	29
14.2	BLOCK DIAGRAM OF TEST SETUP	30
14.3	PROCEDURE	30
14.4	TEST DATA	32

15	CONDUCTED SPURIOUS EMISSIONS	36
15.1	LIMITS	36
15.2	BLOCK DIAGRAM OF TEST SETUP	36
15.3	TEST DATA	37
16	POWER SPECTRUM DENSITY	37
16.1	LIMITS	37
16.2	BLOCK DIAGRAM OF TEST SETUP	37
16.3	TEST DATA	37
17	CONDUCTED PEAK OUTPUT POWER	38
17.1	LIMITS	38
17.2	BLOCK DIAGRAM OF TEST SETUP	38
17.3	TEST DATA	39
18	MINIMUM 6DB BANDWIDTH	39
18.1	LIMITS	39
18.2	BLOCK DIAGRAM OF TEST SETUP	39
18.3	TEST DATA	39
19	APPENDIX	40
	APPENDIX A: PHOTOGRAPHS OF TEST SETUP	68
	APPENDIX B: PHOTOGRAPHS OF EUT	70

1 TEST SUMMARY

Test item	Test Requirement	Test Method	Class/Severity	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2	47 CFR Part 15, Subpart C 15.247(d)	Pass
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass
Power Spectrum Density	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.10.2	47 CFR Part 15, Subpart C 15.247(e)	Pass
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.5	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass
Minimum 6dB Bandwidth	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.8.1	47 CFR Part 15, Subpart C 15.247a(2)	Pass
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	Pass

2 GENERAL INFORMATION

Applicant	Telink Semiconductor (Shanghai) Co., Ltd.
Address	Building 3, No. 1500 Zuchongzhi Rd Zhangjiang Hi-Tech Park, Shanghai
Manufacturer	Telink Semiconductor (Shanghai) Co., Ltd.
Address	Building 3, No. 1500 Zuchongzhi Rd Zhangjiang Hi-Tech Park, Shanghai
Factory	Telink Semiconductor (Shanghai) Co., Ltd.
Address	Building 3, No. 1500 Zuchongzhi Rd Zhangjiang Hi-Tech Park, Shanghai
Product Name	TLSR8298 Development Board
Test Model No.	TLSR8298DK56D

3 GENERAL DESCRIPTION OF E.U.T.

Hardware Version	V1.2
Software Version	V0001

BLE

Operation Frequency:	2402MHz-2480MHz
Modulation Type:	GFSK
Channel Spacing:	2MHz
Number of Channels:	40
Rate data	1Mbps, 2Mbps
Antenna Type:	External Antenna
Antenna Gain:	2dBi(Provided by the customer)

4 TEST ENVIRONMENT

Environment	Temperature	Voltage
Normal	25°C	DC3.3V

5 TEST MODE

TEST MODE	TEST MODE DESCRIPTION
TX	Keep the EUT in transmitting mode
Remark: Only the data of the worst mode would be recorded in this report. For radiated emission test, 1Mbps mode and 2Mbps mode all have been tested, 1Mbps was found as worse case, only worse case is reported.	

6 MEASUREMENT UNCERTAINTY

Parameter	Expanded Uncertainty (Confidence of 95%)
Radiated Emission(9kHz-30MHz)	±4.34dB
Radiated Emission(30Mz-1000MHz)	±4.24dB
Radiated Emission(1GHz-18GHz)	±4.68dB
AC Power Line Conducted Emission(150kHz-30MHz)	±3.45dB

7 DESCRIPTION OF SUPPORT UNIT

Device Type	Manufacturer	Model Name	Serial No.	Remark
PC	ACE	N/A	N/A	N/A

8 LABORATORY LOCATION

All tests were performed at:
BlueAsia of Technical Services(Shenzhen) Co., Ltd.
Building C, No. 107, Shihuan Road, Shiyuan Sub-District, Baoan District, Shenzhen, Guangdong Province,
China
Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673
No tests were sub-contracted.

9 TEST INSTRUMENTS LIST

Test Equipment Of Conducted Emissions at AC Power Line (150kHz-30MHz)					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Shield room	SKET	833	N/A	25/11/2020	24/11/2023
Receiver	R&S	ESPI3	101082	24/9/2021	23/9/2022
LISN	R&S	ENV216	3560.6550.15	24/9/2021	23/9/2022
LISN	AT	AT166-2	AKK1806000003	26/9/2021	25/9/2022
EMI software	EZ	EZ-EMC	N/A	N/A	N/A

Test Equipment Of Conducted Band Edges Measurement					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2022
Spectrum	Agilent	N9020A	MY49100060	24/9/2021	23/9/2022
Signal Generator	Agilent	N5182A	MY49060650	24/9/2021	23/9/2022
Signal Generator	Agilent	E8257D	MY44320250	24/9/2021	23/9/2022

Test Equipment Of Radiated Spurious Emissions					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber	SKET	966	N/A	10/11/2020	9/11/2023
Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2022
Receiver	R&S	ESR7	101199	24/9/2021	23/9/2022
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	26/9/2020	25/9/2022
Horn Antenna	Schwarzbeck	9120D	01892 P:00331	26/9/2020	25/9/2022

Amplifier	SKET	LNPA-0118-45	N/A	24/9/2021	23/9/2022
EMI software	EZ	EZ-EMC	N/A	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	26/9/2020	25/9/2022

Test Equipment Of Radiated Emissions which fall in the restricted bands

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber	SKET	966	N/A	10/11/2020	9/11/2023
Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2022
Receiver	R&S	ESR7	101199	24/9/2021	23/9/2022
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	26/9/2020	25/9/2022
Horn Antenna	Schwarzbeck	9120D	01892 P:00331	26/9/2020	25/9/2022
Amplifier	SKET	LNPA-0118-45	N/A	24/9/2021	23/9/2022
EMI software	EZ	EZ-EMC	N/A	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	26/9/2020	25/9/2022

Test Equipment Of Conducted Spurious Emissions

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2022
Spectrum	Agilent	N9020A	MY49100060	24/9/2021	23/9/2022
Signal Generator	Agilent	N5182A	MY49060650	24/9/2021	23/9/2022
Signal Generator	Agilent	E8257D	MY44320250	24/9/2021	23/9/2022

Test Equipment Of Power Spectrum Density

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
-----------	--------------	-------	-----	----------	---------

Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2022
Spectrum	Agilent	N9020A	MY49100060	24/9/2021	23/9/2022
Signal Generator	Agilent	N5182A	MY49060650	24/9/2021	23/9/2022
Signal Generator	Agilent	E8257D	MY44320250	24/9/2021	23/9/2022

Test Equipment Of Conducted Peak Output Power

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2022
Spectrum	Agilent	N9020A	MY49100060	24/9/2021	23/9/2022
Signal Generator	Agilent	N5182A	MY49060650	24/9/2021	23/9/2022
Signal Generator	Agilent	E8257D	MY44320250	24/9/2021	23/9/2022

Test Equipment Of Minimum 6dB Bandwidth

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2022
Spectrum	Agilent	N9020A	MY49100060	24/9/2021	23/9/2022
Signal Generator	Agilent	N5182A	MY49060650	24/9/2021	23/9/2022
Signal Generator	Agilent	E8257D	MY44320250	24/9/2021	23/9/2022

Test Equipment Of Antenna Requirement

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
-----------	--------------	-------	-----	----------	---------

10 CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ)


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

10.1 LIMITS

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

10.2 BLOCK DIAGRAM OF TEST SETUP

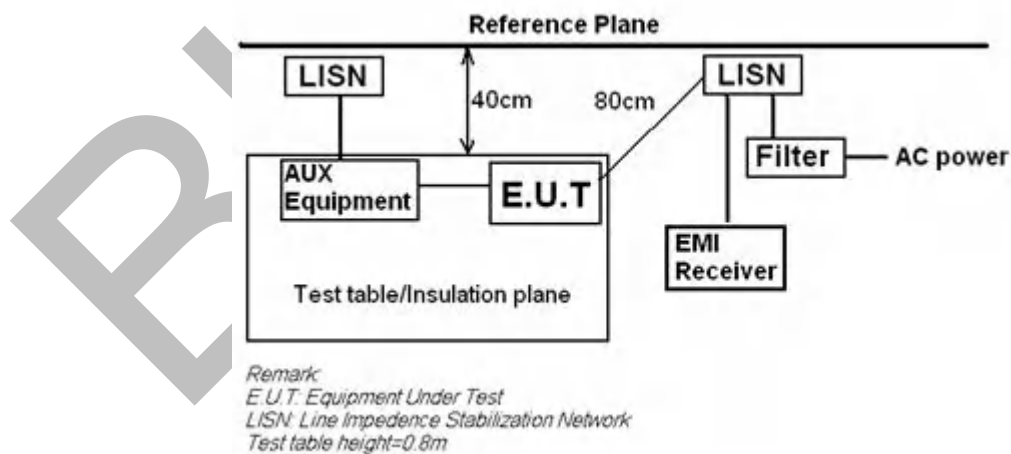

10.3 PROCEDURE

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50H + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.

3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,

4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.


5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: LISN=Read Level+ Cable Loss+ LISN Factor

BlueAsia

10.4 TEST DATA

[TestMode: TX]; [Line: Line]; Voltage:[120V/60Hz]

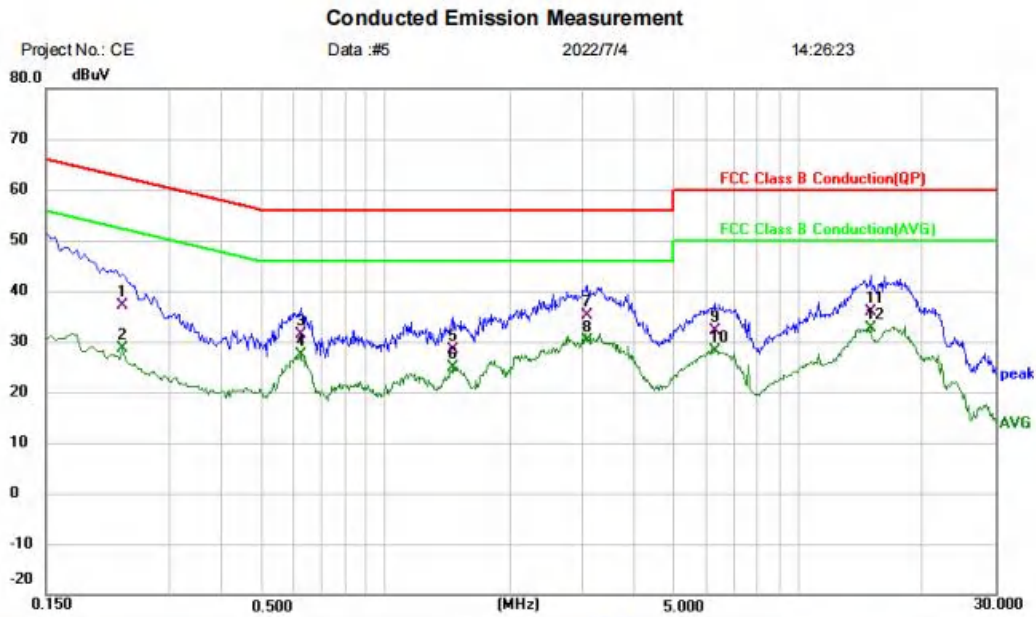

Site: _____ Phase: **L1** Temperature: (C)
 Limit: FCC Class B Conduction(QP) Power: _____ Humidity: %RH
 EUT: TLSR8298 Development Board
 M/N: TLSR8298DK56D
 Mode: BLE TX mode
 Note:


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.2300	26.83	10.30	37.13	62.45	-25.32	QP	
2		0.2300	18.37	10.30	28.67	52.45	-23.78	AVG	
3		0.6220	21.60	9.87	31.47	56.00	-24.53	QP	
4		0.6220	17.42	9.87	27.29	46.00	-18.71	AVG	
5		1.4580	18.42	9.93	28.35	56.00	-27.65	QP	
6		1.4580	14.97	9.93	24.90	46.00	-21.10	AVG	
7		3.0780	25.20	9.96	35.16	56.00	-20.84	QP	
8	*	3.0780	20.28	9.96	30.24	46.00	-15.76	AVG	
9		6.2619	21.97	10.06	32.03	60.00	-27.97	QP	
10		6.2619	17.97	10.06	28.03	50.00	-21.97	AVG	
11		14.9140	25.43	10.36	35.79	60.00	-24.21	QP	
12		14.9140	22.23	10.36	32.59	50.00	-17.41	AVG	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX]; [Line: Neutral]; Voltage:[120V/60Hz]

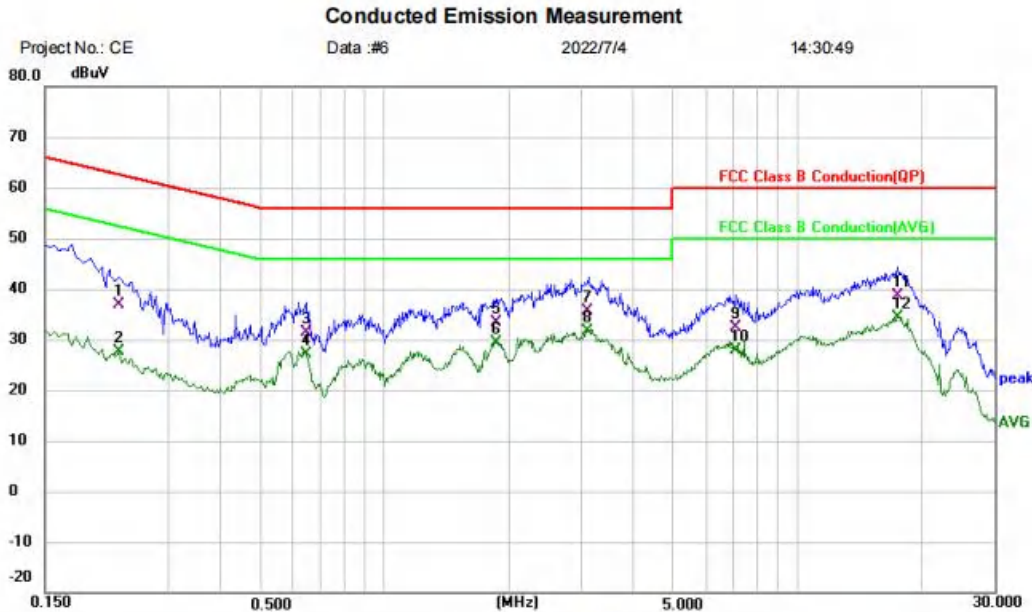

Site Phase: **N** Temperature: (C)

Limit: FCC Class B Conduction(QP) Power: Humidity: %RH

EUT: TLSR8298 Development Board

M/N: TLSR8298DK56D

Mode: BLE TX mode

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.2260	26.65	10.22	36.87	62.60	-25.73	QP	
2		0.2260	17.31	10.22	27.53	52.60	-25.07	AVG	
3		0.6460	21.47	9.80	31.27	56.00	-24.73	QP	
4		0.6460	17.41	9.80	27.21	46.00	-18.79	AVG	
5		1.8660	23.57	9.86	33.43	56.00	-22.57	QP	
6		1.8660	19.40	9.86	29.26	46.00	-16.74	AVG	
7		3.1099	25.69	9.90	35.59	56.00	-20.41	QP	
8	*	3.1099	21.80	9.90	31.70	46.00	-14.30	AVG	
9		7.0820	22.27	10.02	32.29	60.00	-27.71	QP	
10		7.0820	17.90	10.02	27.92	50.00	-22.08	AVG	
11		17.4860	28.37	10.36	38.73	60.00	-21.27	QP	
12		17.4860	24.12	10.36	34.48	50.00	-15.52	AVG	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass


11 CONDUCTED BAND EDGES MEASUREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

11.1 LIMITS

Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
---------------	--

11.2 BLOCK DIAGRAM OF TEST SETUP

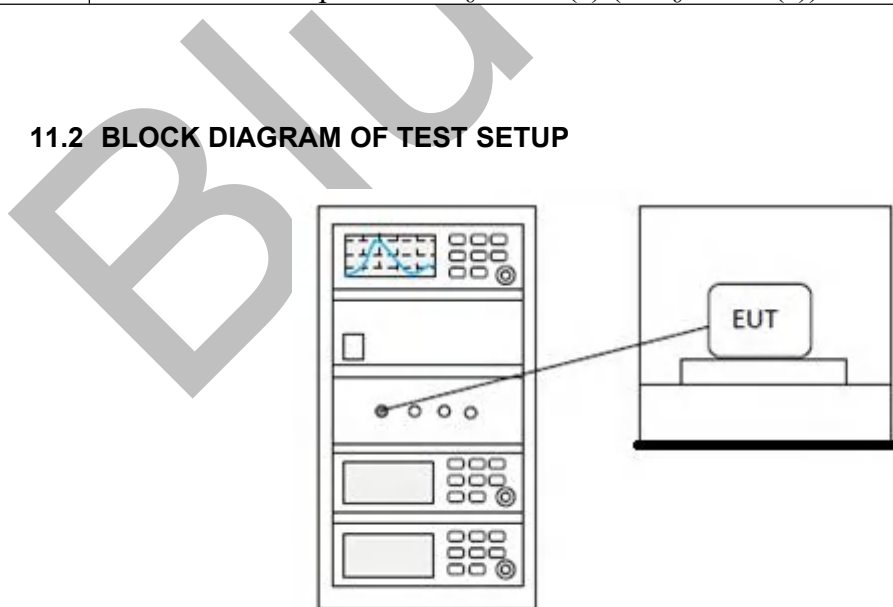

11.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

12 ANTENNA REQUIREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	N/A


12.1 CONCLUSION

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

This product uses a uniquely coupled antenna with an intentional radiator, a detachable non-standard jack antenna, it is reverse polarity, the connector is RP-SMA, female screw fulfill the requirement of this section. The best case gain of the antenna is 2dBi.

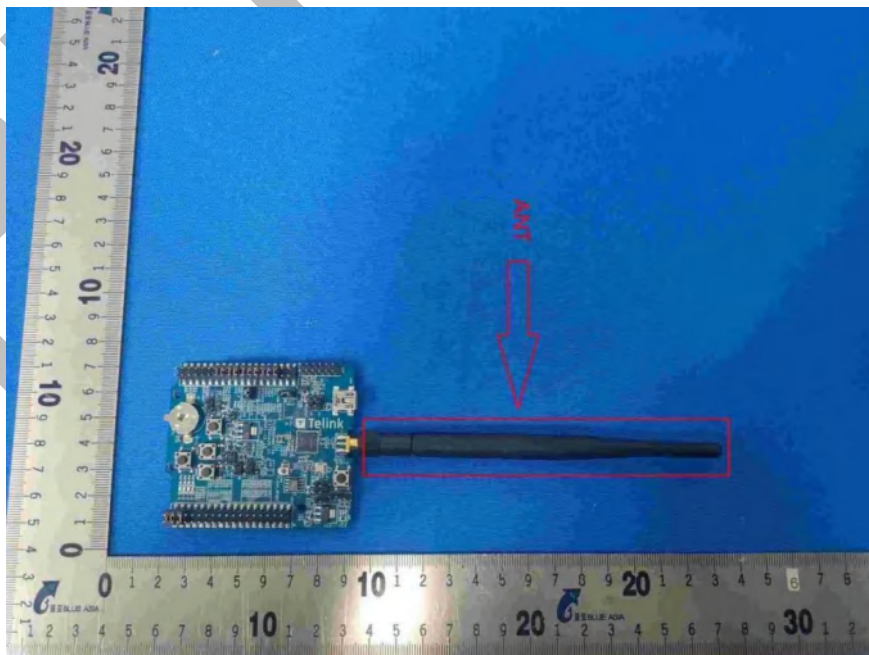

13 RADIATED SPURIOUS EMISSIONS


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.4,6.5,6.6
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

13.1 LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

13.2 BLOCK DIAGRAM OF TEST SETUP

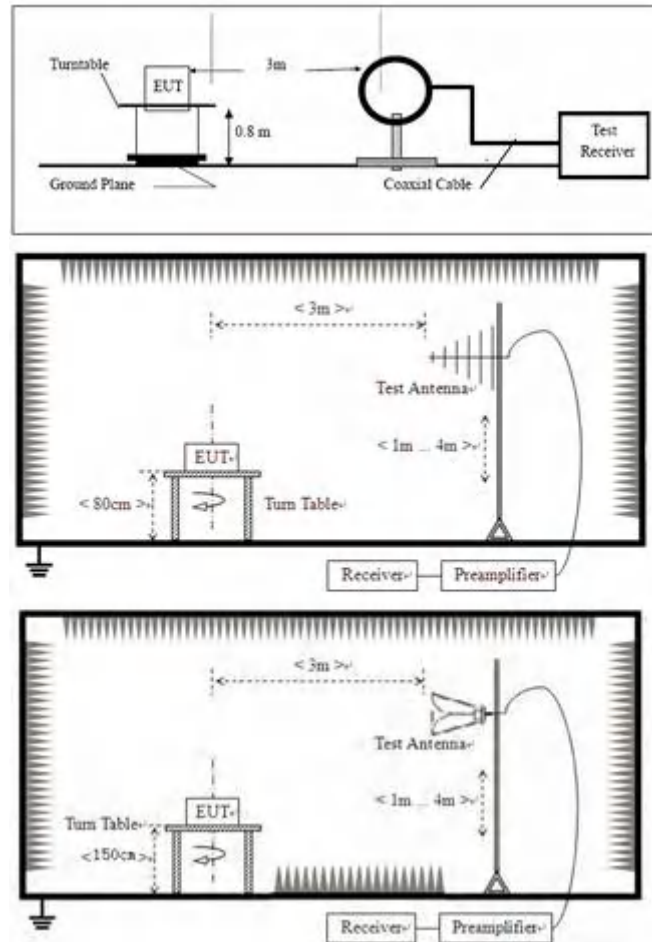

13.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark:


- 1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, the disturbance above 12.75GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. fundamental frequency is blocked by filter, and only spurious emission is shown.
- 4) For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

13.4 TEST DATA

Below 1GHz

[TestMode: TX]; [Polarity: Horizontal]

Test Lab: BlueAsia EMC Lab (RE #1)	Project: BLA-EMC-202206-A114
EUT: TLSR8298 Development Board	Test Engineer: York
M/N: TLSR8298DK56D	Temperature:
S/N:	Humidity:
Test Mode: BLE TX mode	Test Voltage:
Note:	Test Data: 2022-07-02 09:45:44

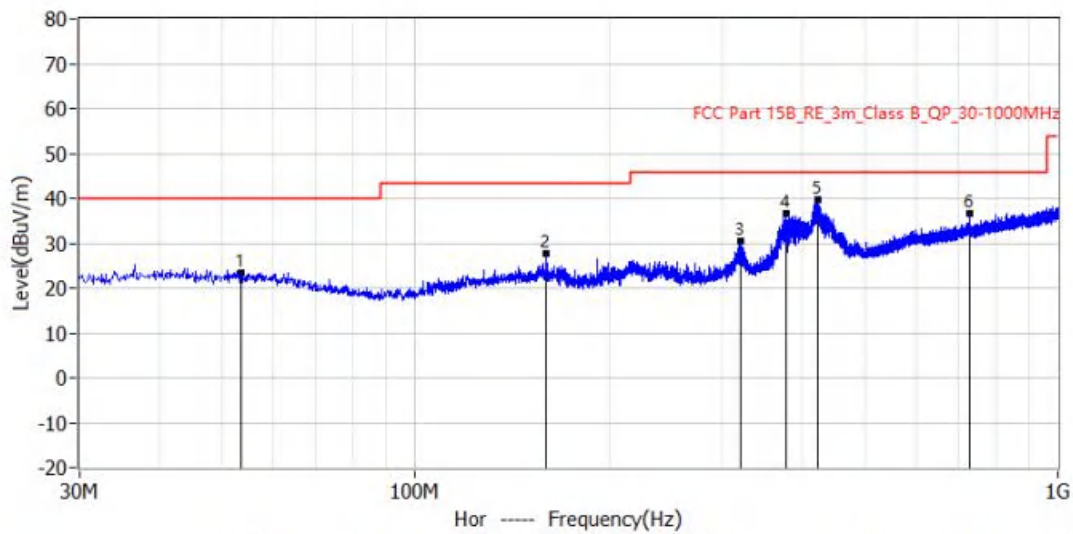


No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Reading dBuV	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	53.523MHz	40.0	23.4	-16.6	-0.3	23.7	QP	Hor	100.0	0.0
2*	159.980MHz	43.5	27.8	-15.7	4.5	23.3	QP	Hor	100.0	0.0
3*	321.243MHz	46.0	30.6	-15.4	5.9	24.7	QP	Hor	100.0	0.0
4*	378.230MHz	46.0	36.6	-9.4	10.0	26.6	QP	Hor	100.0	63.0
5*	422.001MHz	46.0	39.7	-6.3	12.2	27.5	QP	Hor	100.0	72.0
6*	728.643MHz	46.0	36.6	-9.4	4.0	32.6	QP	Hor	100.0	170.0

Test Result: Pass

[TestMode: TX]; [Polarity: Vertical]

Test Lab: BlueAsia EMC Lab (RE #1)	Project: BLA-EMC-202206-A114
EUT: TLSR8298 Development Board	Test Engineer: York
M/N: TLSR8298DK56D	Temperature:
S/N:	Humidity:
Test Mode: BLE TX mode	Test Voltage:
Note:	Test Data: 2022-07-02 09:52:20

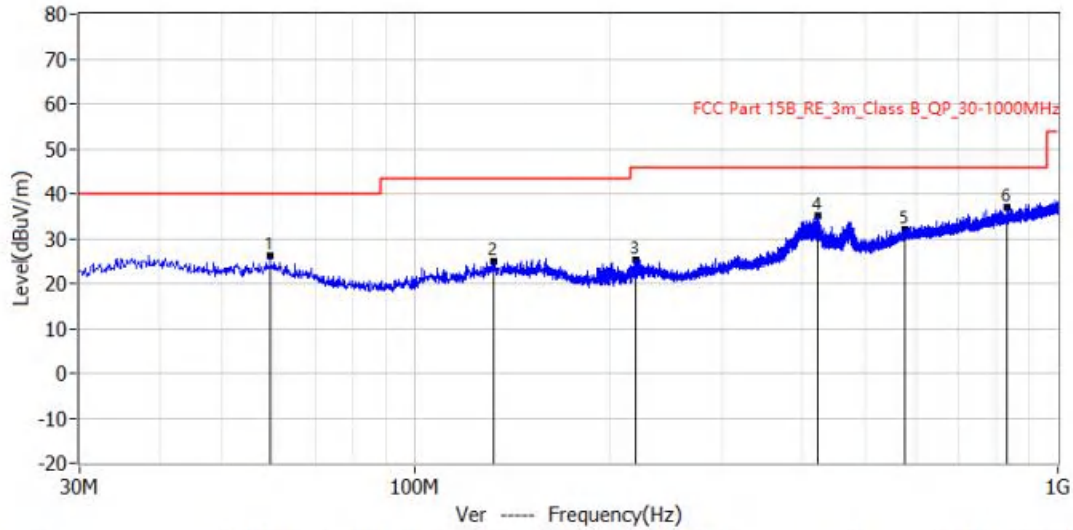


No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Reading dBuV	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	59.343MHz	40.0	26.2	-13.8	2.7	23.5	QP	Ver	100.0	0.0
2*	132.214MHz	43.5	24.8	-18.7	1.5	23.3	QP	Ver	100.0	0.0
3*	219.635MHz	46.0	25.1	-20.9	3.3	21.8	QP	Ver	100.0	0.0
4*	422.971MHz	46.0	35.2	-10.8	7.7	27.5	QP	Ver	100.0	311.0
5*	577.323MHz	46.0	32.0	-14.0	1.4	30.6	QP	Ver	100.0	0.0
6*	831.463MHz	46.0	36.9	-9.1	2.5	34.4	QP	Ver	100.0	0.0

Test Result: Pass

Above 1GHz

[TestMode: TX low channel]; [Polarity: Vertical]

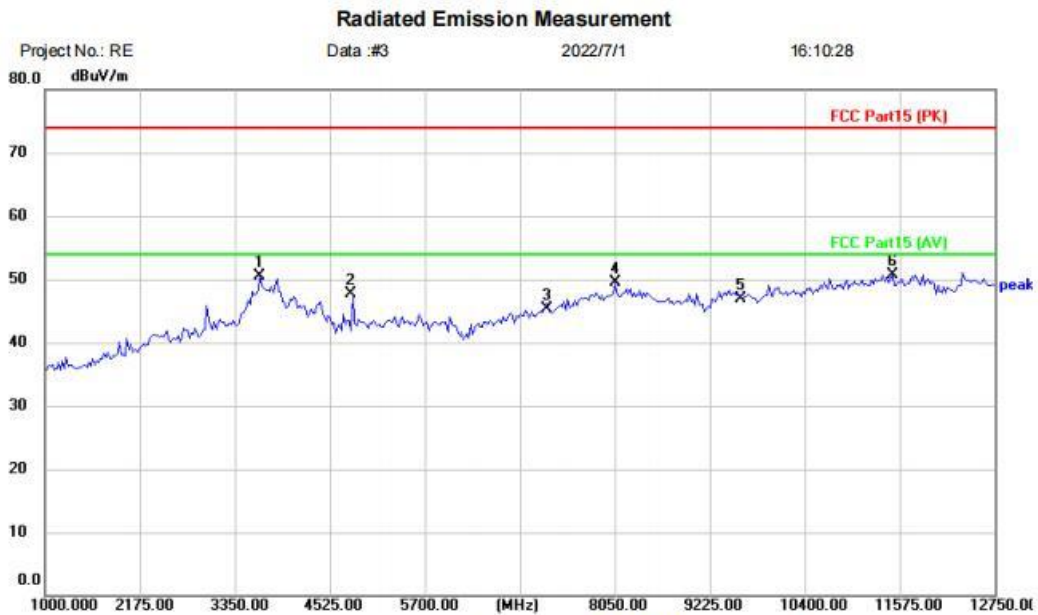

Site: Polarization: **Vertical** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: TLSR8298 Development Board
 M/N: TLSR8298DK56D
 Mode: BLE1M TX-L
 Note:


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		3655.500	42.68	7.76	50.44	74.00	-23.56	peak	
2		4804.000	44.01	3.71	47.72	74.00	-26.28	peak	
3		7206.000	39.42	5.96	45.38	74.00	-28.62	peak	
4		8050.000	41.47	8.01	49.48	74.00	-24.52	peak	
5		9608.000	37.60	9.29	46.89	74.00	-27.11	peak	
6	*	11481.000	38.83	11.88	50.71	74.00	-23.29	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX low channel]; [Polarity: Horizontal]

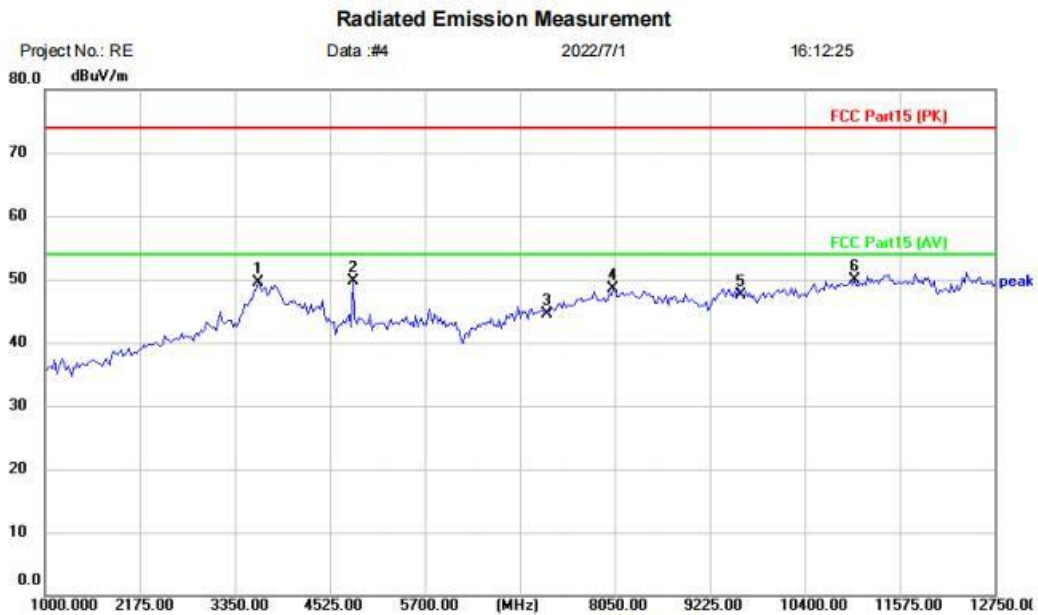

Site: Polarization: **Horizontal** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: TLSR8298 Development Board
 M/N: TLSR8298DK56D
 Mode: BLE1M TX-L
 Note:


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		3632.000	41.73	7.77	49.50	74.00	-24.50	peak	
2		4807.000	45.93	3.71	49.64	74.00	-24.36	peak	
3		7206.000	38.62	5.96	44.58	74.00	-29.42	peak	
4		8026.500	40.44	7.98	48.42	74.00	-25.58	peak	
5		9608.000	38.22	9.29	47.51	74.00	-26.49	peak	
6	*	11011.000	37.83	11.99	49.82	74.00	-24.18	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX middle channel]; [Polarity: Vertical]

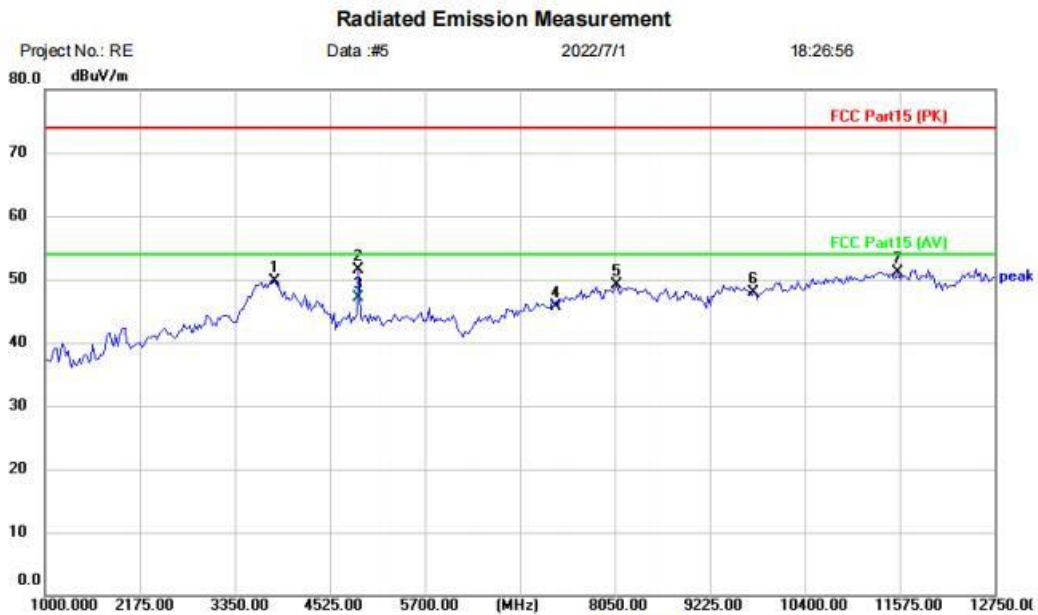

Site: Polarization: **Vertical** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: TLSR8298 Development Board
 M/N: TLSR8298DK56D
 Mode: BLE1M TX-M
 Note:


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		3843.500	42.68	7.12	49.80	74.00	-24.20	peak	
2		4877.500	48.22	3.37	51.59	74.00	-22.41	peak	
3	*	4877.500	43.65	3.37	47.02	54.00	-6.98	AVG	
4		7326.000	39.35	6.44	45.79	74.00	-28.21	peak	
5		8073.500	41.07	8.04	49.11	74.00	-24.89	peak	
6		9768.000	38.29	9.63	47.92	74.00	-26.08	peak	
7		11551.500	39.15	11.98	51.13	74.00	-22.87	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX middle channel]; [Polarity: Horizontal]

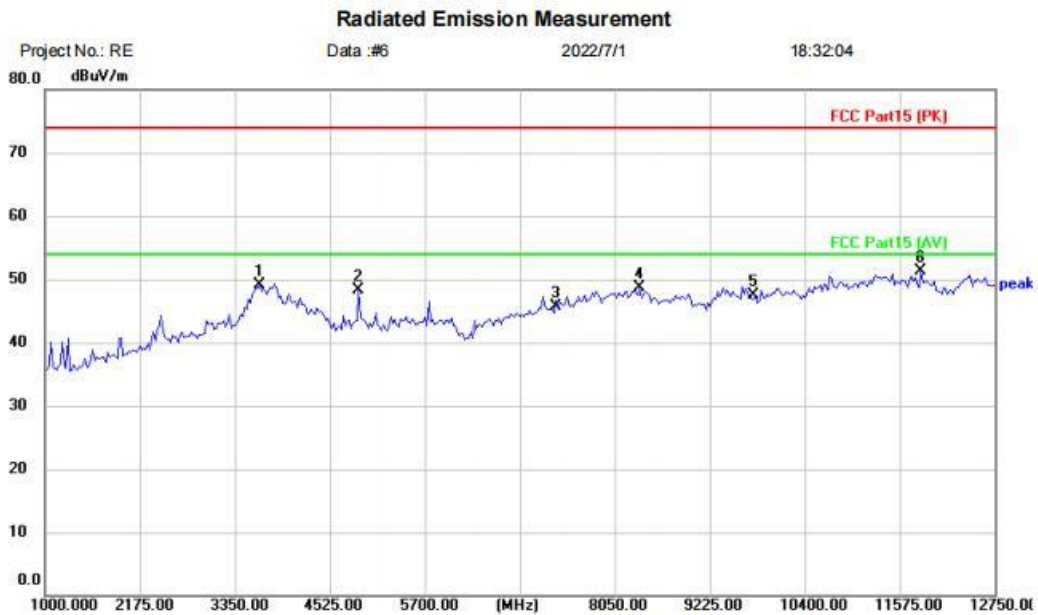

Site: Polarization: **Horizontal** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: TLSR8298 Development Board
 M/N: TLSR8298DK56D
 Mode: BLE1M TX-M
 Note:


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		3655.500	41.26	7.76	49.02	74.00	-24.98	peak	
2		4877.500	44.90	3.37	48.27	74.00	-25.73	peak	
3		7326.000	39.34	6.44	45.78	74.00	-28.22	peak	
4		8355.500	40.39	8.27	48.66	74.00	-25.34	peak	
5		9768.000	37.86	9.63	47.49	74.00	-26.51	peak	
6	*	11833.500	39.80	11.50	51.30	74.00	-22.70	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX High channel]; [Polarity: Horizontal]

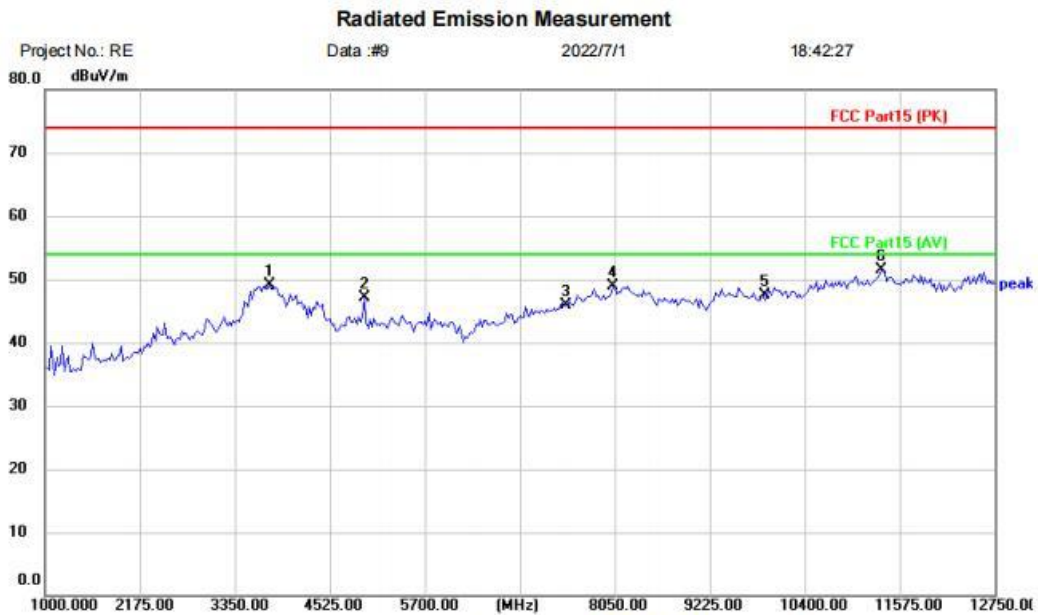

Site: Polarization: **Horizontal** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: TLSR8298 Development Board
 M/N: TLSR8298DK56D
 Mode: BLE1M TX-H
 Note:


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		3773.000	41.34	7.67	49.01	74.00	-24.99	peak	
2		4948.000	43.40	3.65	47.05	74.00	-26.95	peak	
3		7440.000	39.06	6.86	45.92	74.00	-28.08	peak	
4		8026.500	40.98	7.98	48.96	74.00	-25.04	peak	
5		9920.000	37.28	10.16	47.44	74.00	-26.56	peak	
6	*	11340.000	39.73	11.85	51.58	74.00	-22.42	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX High channel]; [Polarity: Vertical]

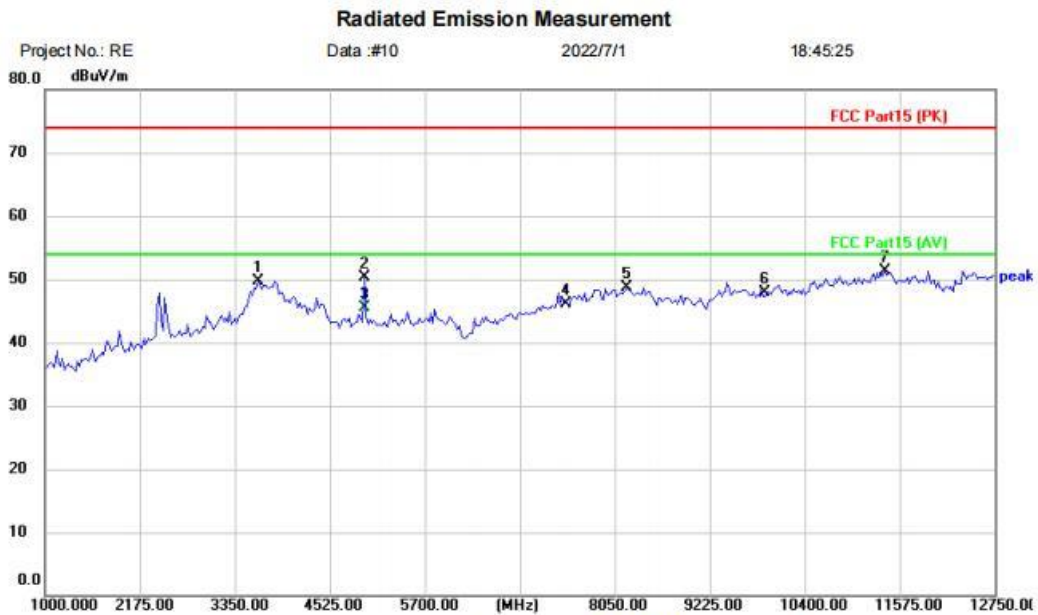

Site: Polarization: **Vertical** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: TLSR8298 Development Board
 M/N: TLSR8298DK56D
 Mode: BLE1M TX-H
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		3632.000	42.00	7.77	49.77	74.00	-24.23	peak	
2		4948.000	46.59	3.65	50.24	74.00	-23.76	peak	
3	*	4948.000	41.87	3.65	45.52	54.00	-8.48	AVG	
4		7440.000	39.33	6.86	46.19	74.00	-27.81	peak	
5		8191.000	40.50	8.20	48.70	74.00	-25.30	peak	
6		9920.000	37.68	10.16	47.84	74.00	-26.16	peak	
7		11387.000	39.50	11.78	51.28	74.00	-22.72	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

14 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.10.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

14.1 LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

14.2 BLOCK DIAGRAM OF TEST SETUP

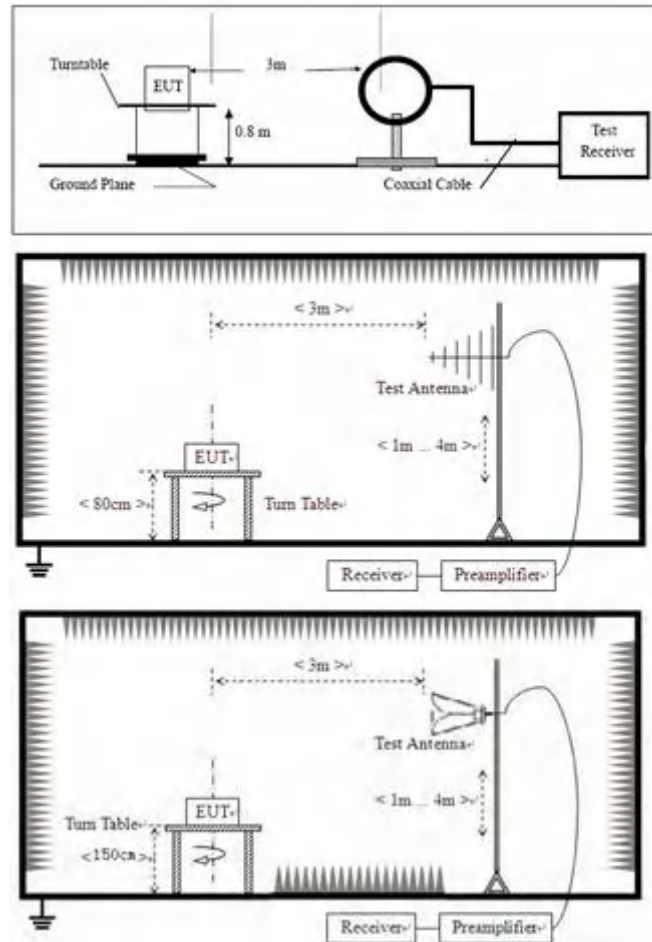

14.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.


Remark 1: $Level = Read\ Level + Cable\ Loss + Antenna\ Factor - Preamp\ Factor$

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

BlueAsia

14.4 TEST DATA

[TestMode: TX low channel]; [Polarity: Vertical]

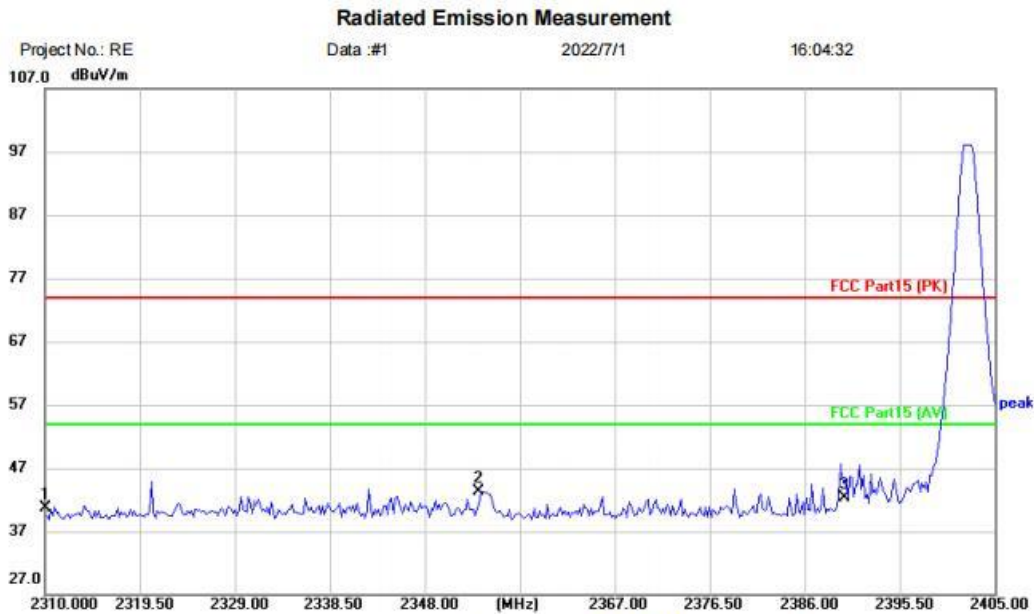

Site: Polarization: **Vertical** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: TLSR8298 Development Board
 M/N: TLSR8298DK56D
 Mode: BLE1M TX-L
 Note:


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2310.000	44.70	-3.93	40.77	74.00	-33.23	peak	
2	*	2353.597	47.04	-3.74	43.30	74.00	-30.70	peak	
3		2390.000	45.85	-3.58	42.27	74.00	-31.73	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX low channel]; [Polarity: Horizontal]

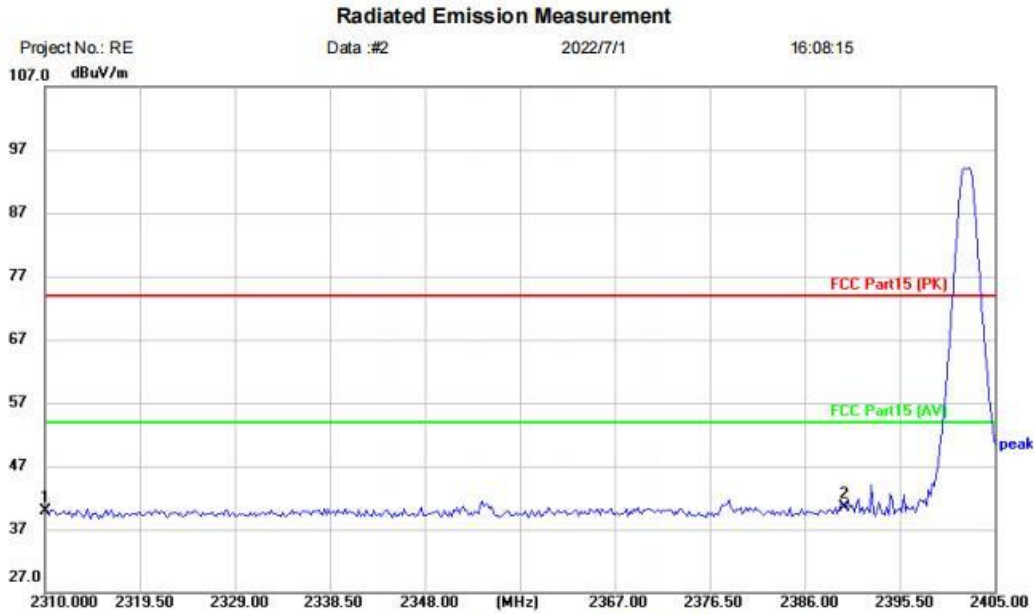

Site	Polarization: Horizontal	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: TLSR8298 Development Board		
M/N: TLSR8298DK56D		
Mode: BLE1M TX-L		
Note:		


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2310.000	43.85	-3.93	39.92	74.00	-34.08	peak	
2	*	2390.000	44.10	-3.58	40.52	74.00	-33.48	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX high channel]; [Polarity: Horizontal]

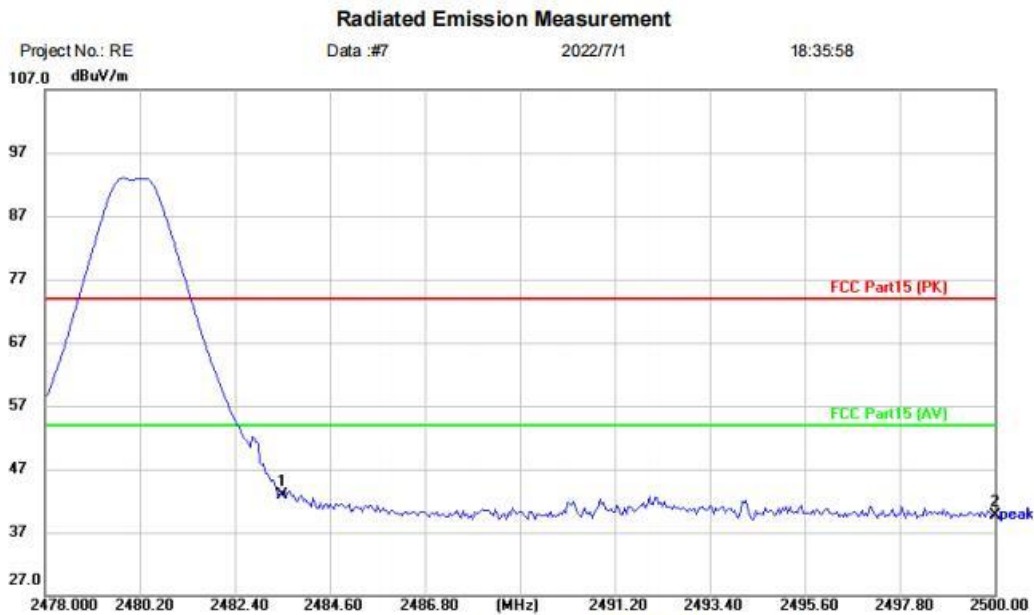

Site: Polarization: **Horizontal** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: TLSR8298 Development Board
 M/N: TLSR8298DK56D
 Mode: BLE1M TX-H
 Note:


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2483.500	46.04	-3.14	42.90	74.00	-31.10	peak	
2		2500.000	42.77	-3.08	39.69	74.00	-34.31	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX high channel]; [Polarity: Vertical]

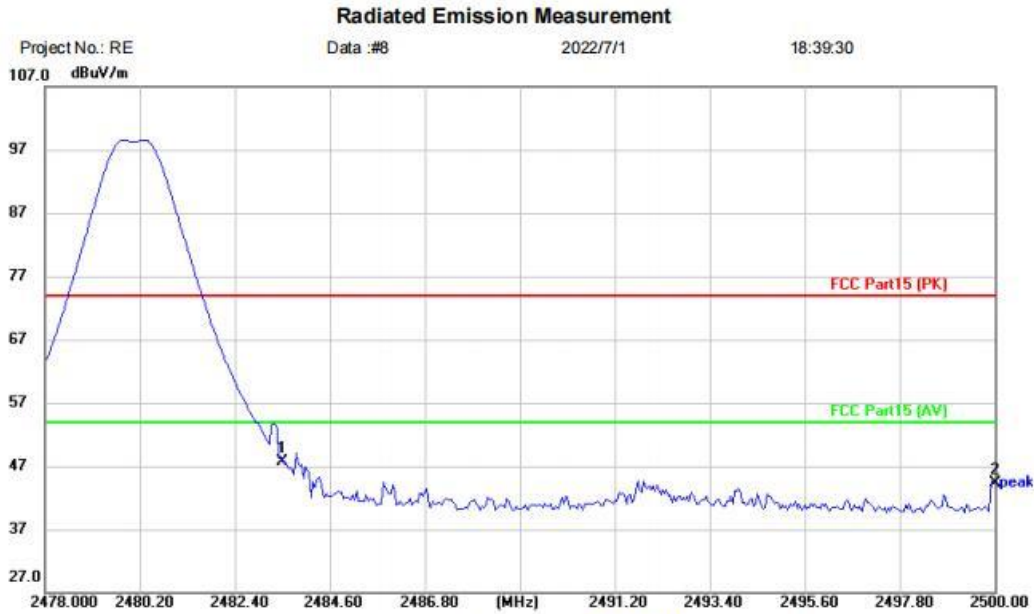

Site	Polarization: Vertical	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: TLSR8298 Development Board		
M/N: TLSR8298DK56D		
Mode: BLE1M TX-H		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	*	2483.500	50.85	-3.14	47.71	74.00	-26.29	peak	
2		2500.000	47.35	-3.08	44.27	74.00	-29.73	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass


15 CONDUCTED SPURIOUS EMISSIONS

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

15.1 LIMITS

Limit:	<p>In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).</p>
---------------	---

15.2 BLOCK DIAGRAM OF TEST SETUP

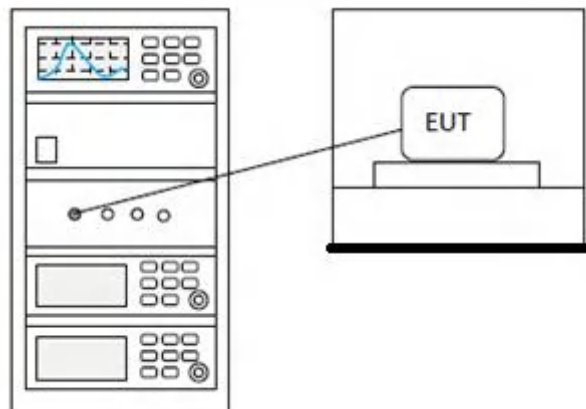

15.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details


16 POWER SPECTRUM DENSITY

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 11.10.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

16.1 LIMITS

Limit: $\leq 8\text{dBm}$ in any 3 kHz band during any time interval of continuous transmission

16.2 BLOCK DIAGRAM OF TEST SETUP

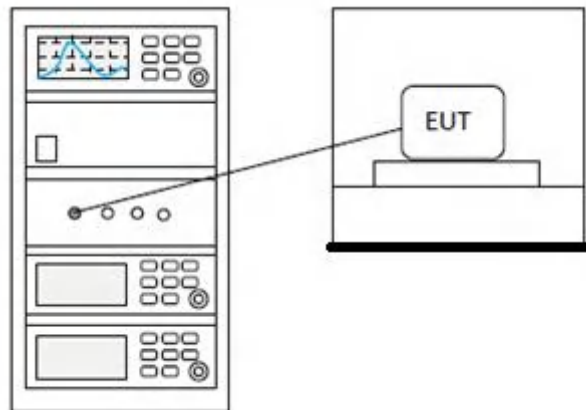

16.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details


17 CONDUCTED PEAK OUTPUT POWER

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

17.1 LIMITS

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

17.2 BLOCK DIAGRAM OF TEST SETUP

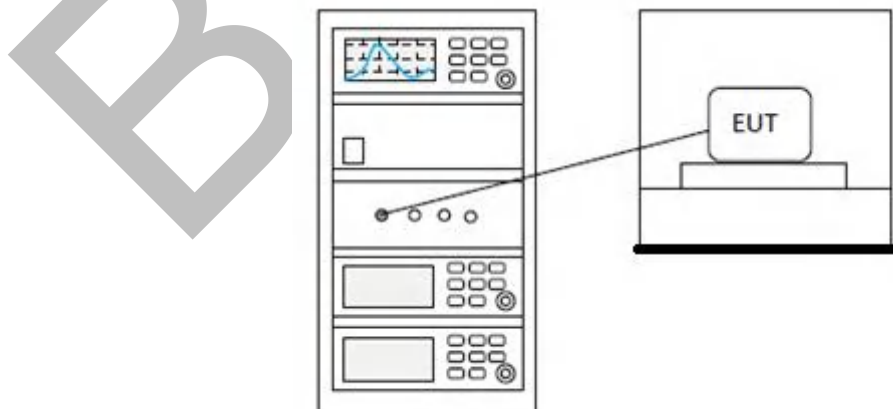

17.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details


18 MINIMUM 6DB BANDWIDTH

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 11.8.1
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

18.1 LIMITS

Limit: ≥ 500 kHz

18.2 BLOCK DIAGRAM OF TEST SETUP

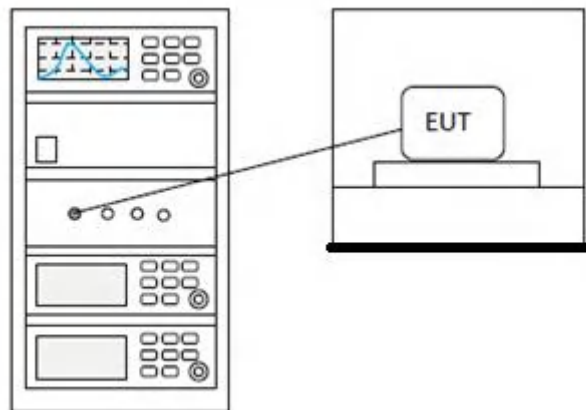

18.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details


19 APPENDIX

Appendix1

Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	5.342	30	Pass
NVNT	BLE 1M	2442	Ant1	5.271	30	Pass
NVNT	BLE 1M	2480	Ant1	5.19	30	Pass
NVNT	BLE 2M	2402	Ant1	5.278	30	Pass
NVNT	BLE 2M	2442	Ant1	5.252	30	Pass
NVNT	BLE 2M	2480	Ant1	5.267	30	Pass


Power NVNT BLE 1M 2402MHz Ant1

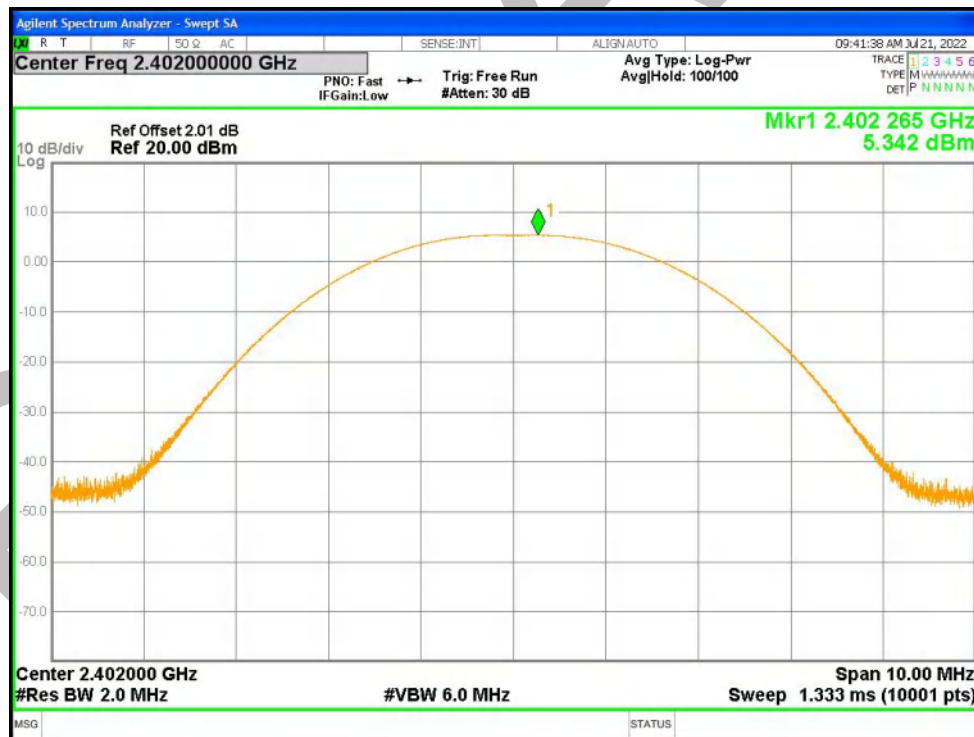


Power NVNT BLE 1M 2442MHz Ant1




Power NVNT BLE 1M 2480MHz Ant1

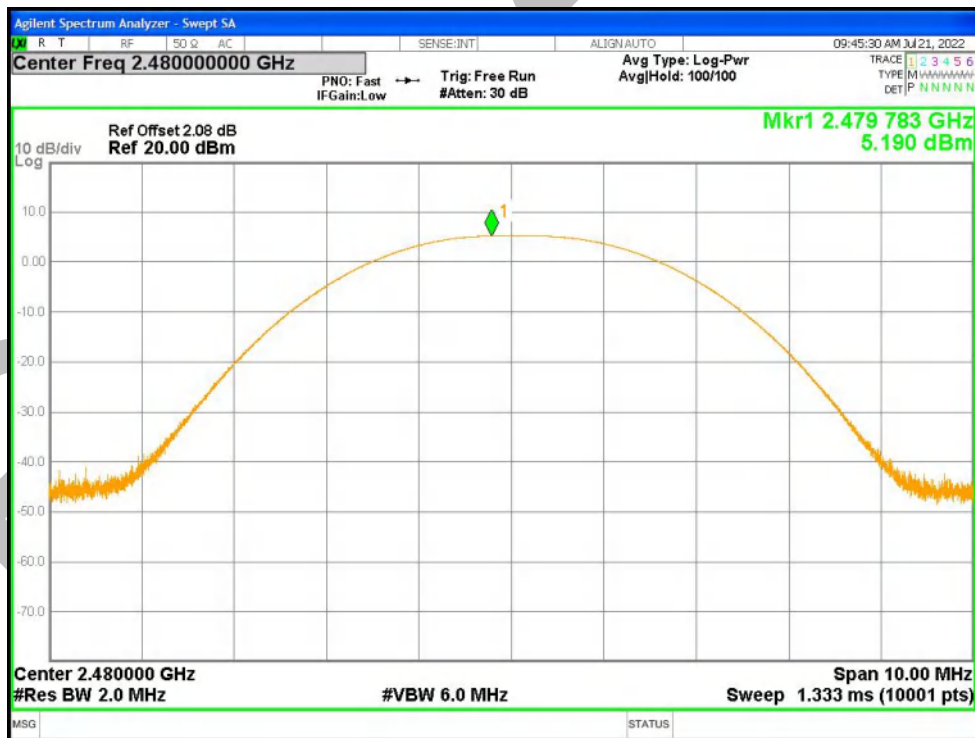


Power NVNT BLE 2M 2402MHz Ant1

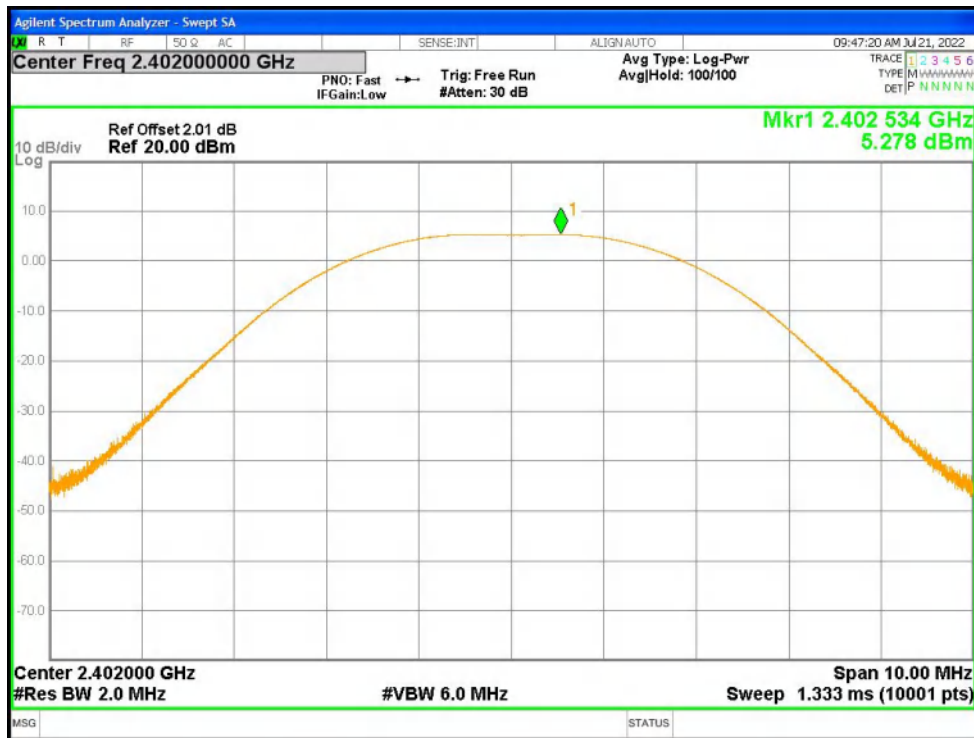

Power NVNT BLE 2M 2442MHz Ant1

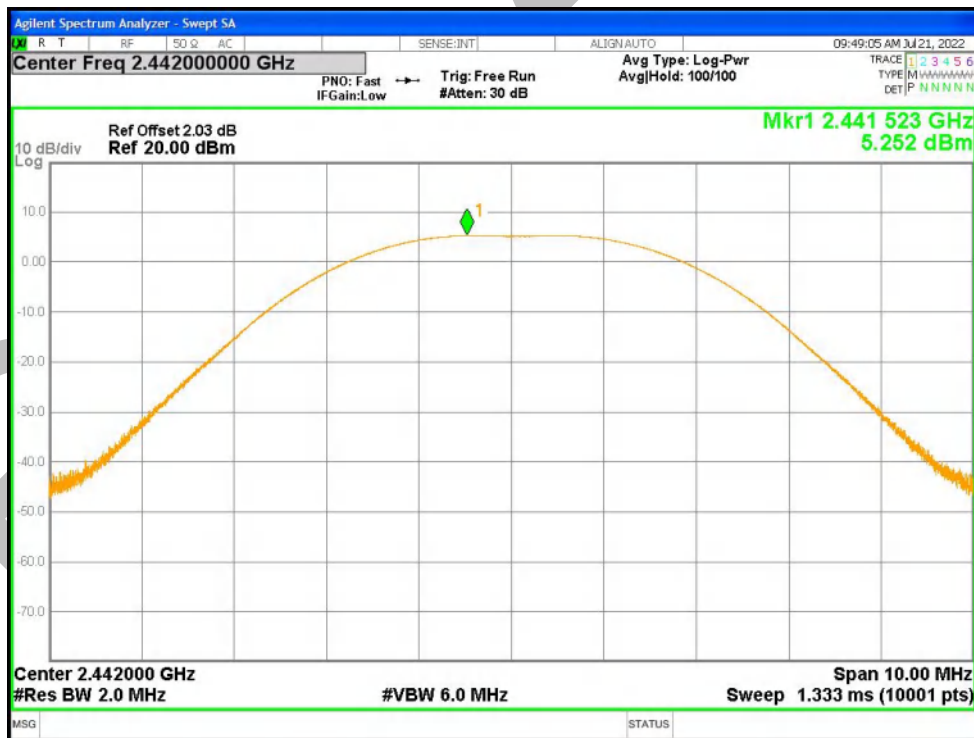


Power NVNT BLE 2M 2480MHz Ant1

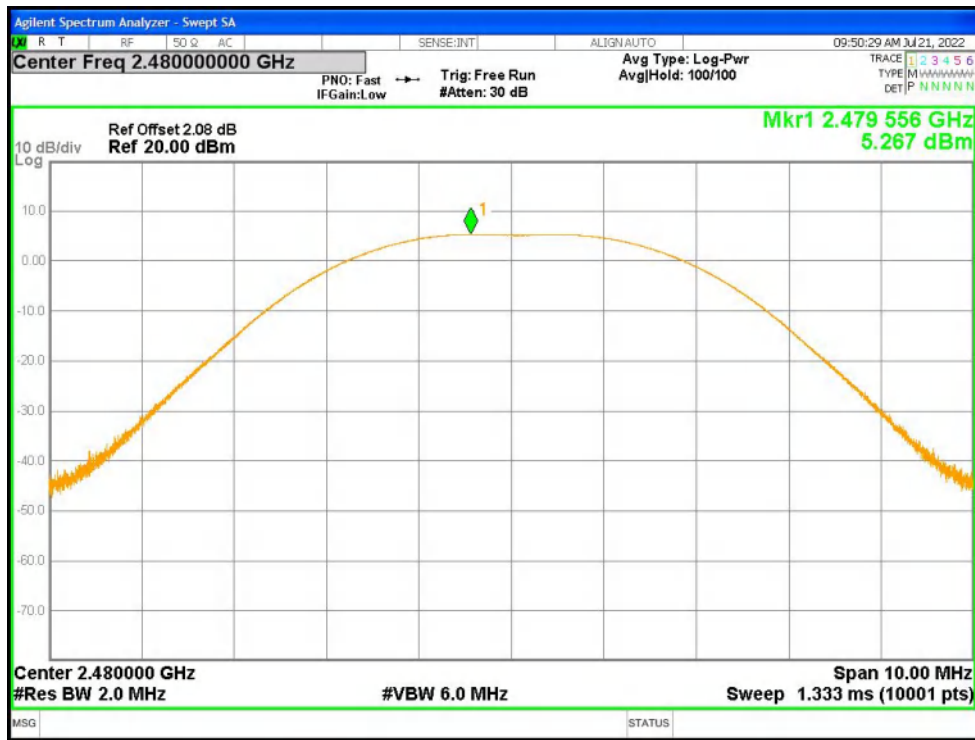


BlueAsia


-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	Ant1	0.679	0.5	Pass
NVNT	BLE 1M	2442	Ant1	0.67	0.5	Pass
NVNT	BLE 1M	2480	Ant1	0.664	0.5	Pass
NVNT	BLE 2M	2402	Ant1	1.27	0.5	Pass
NVNT	BLE 2M	2442	Ant1	1.296	0.5	Pass
NVNT	BLE 2M	2480	Ant1	1.376	0.5	Pass

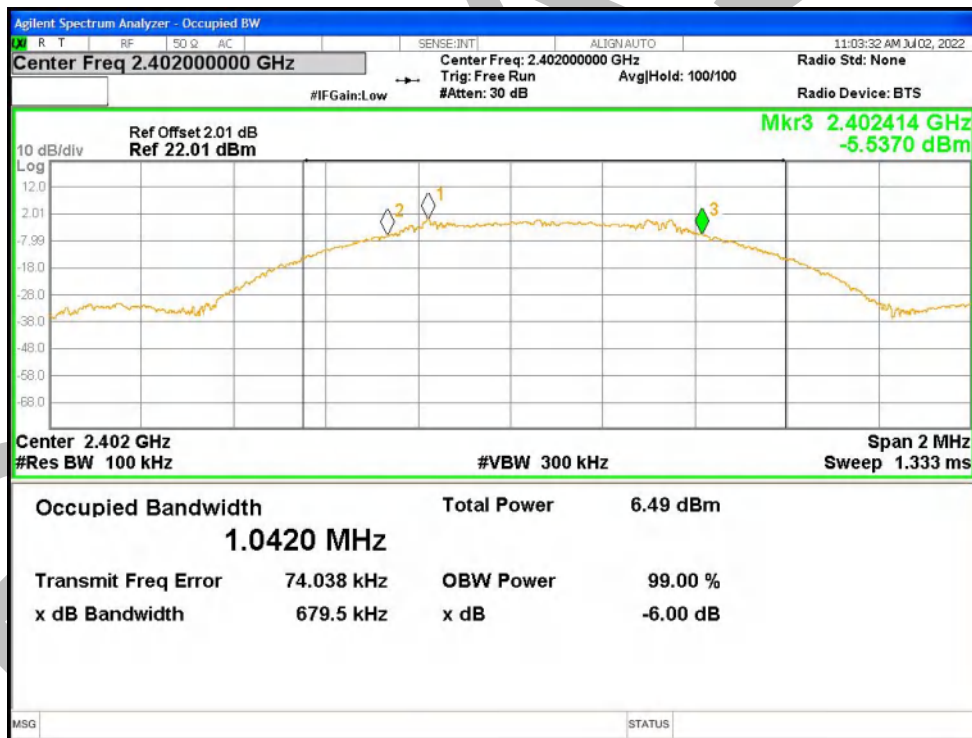
-6dB Bandwidth NVNT BLE 1M 2402MHz Ant1

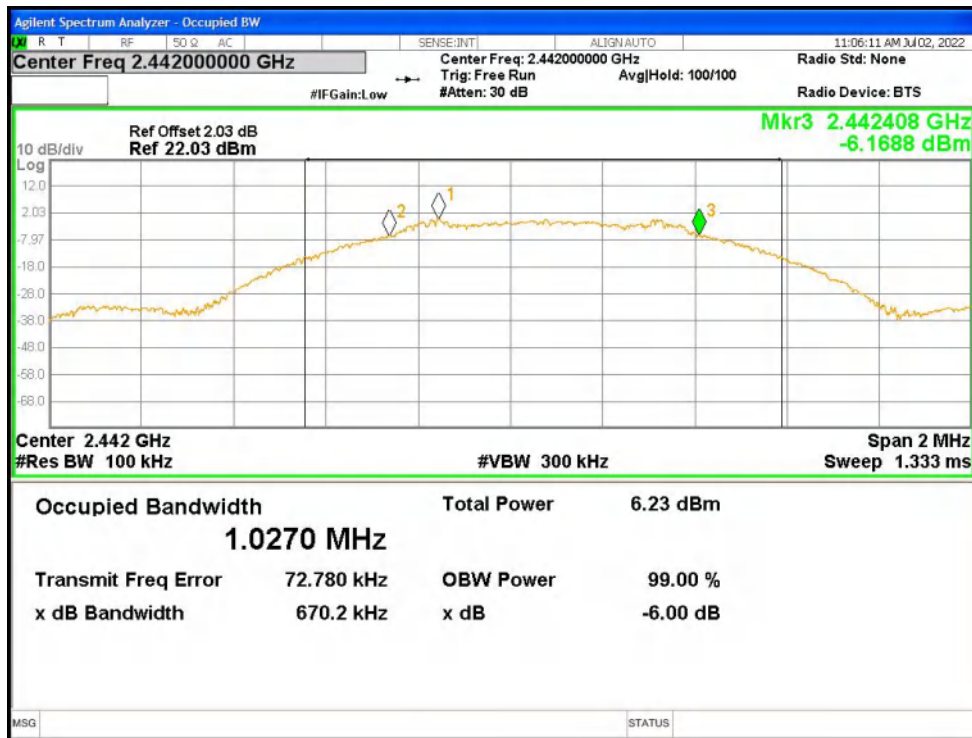-6dB Bandwidth NVNT BLE 1M 2442MHz Ant1

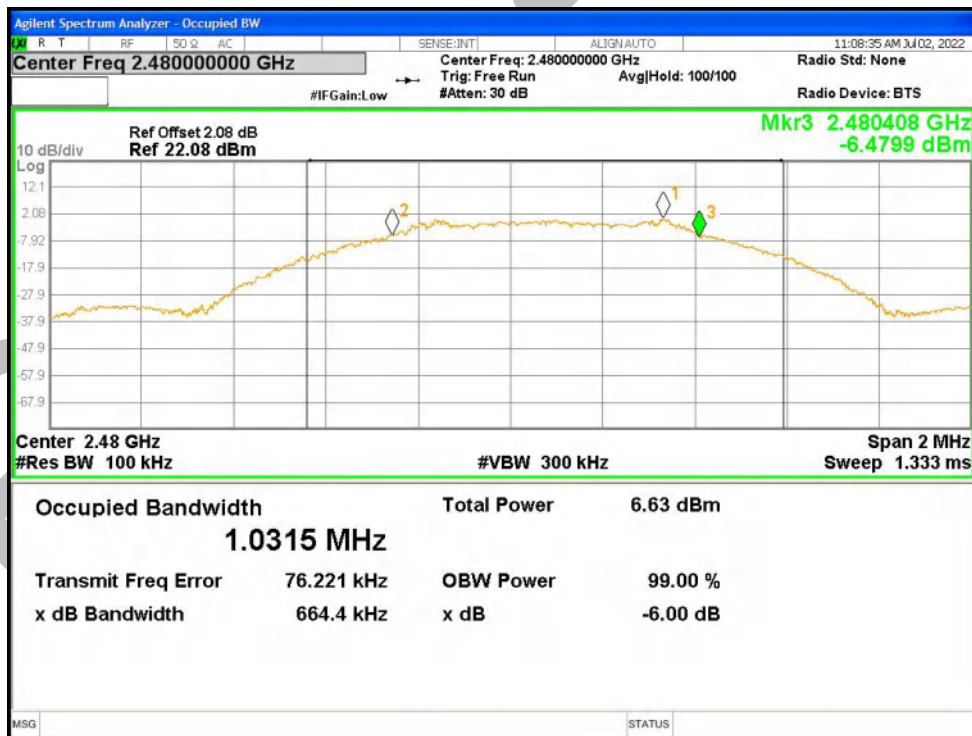


-6dB Bandwidth NVNT BLE 1M 2480MHz Ant1

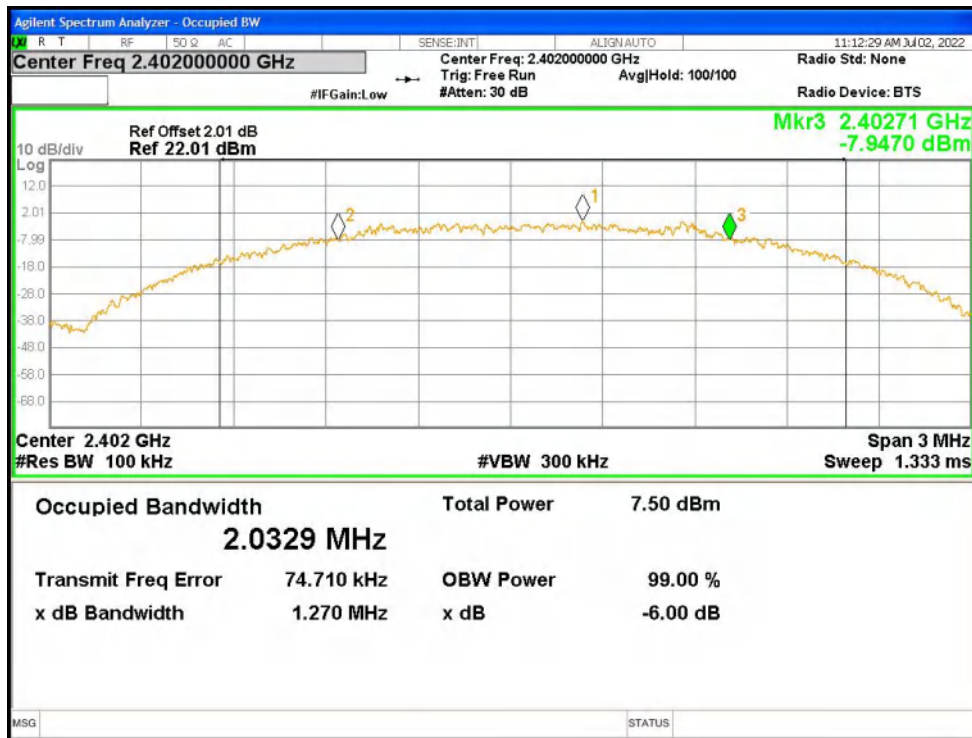


-6dB Bandwidth NVNT BLE 2M 2402MHz Ant1



-6dB Bandwidth NVNT BLE 2M 2442MHz Ant1

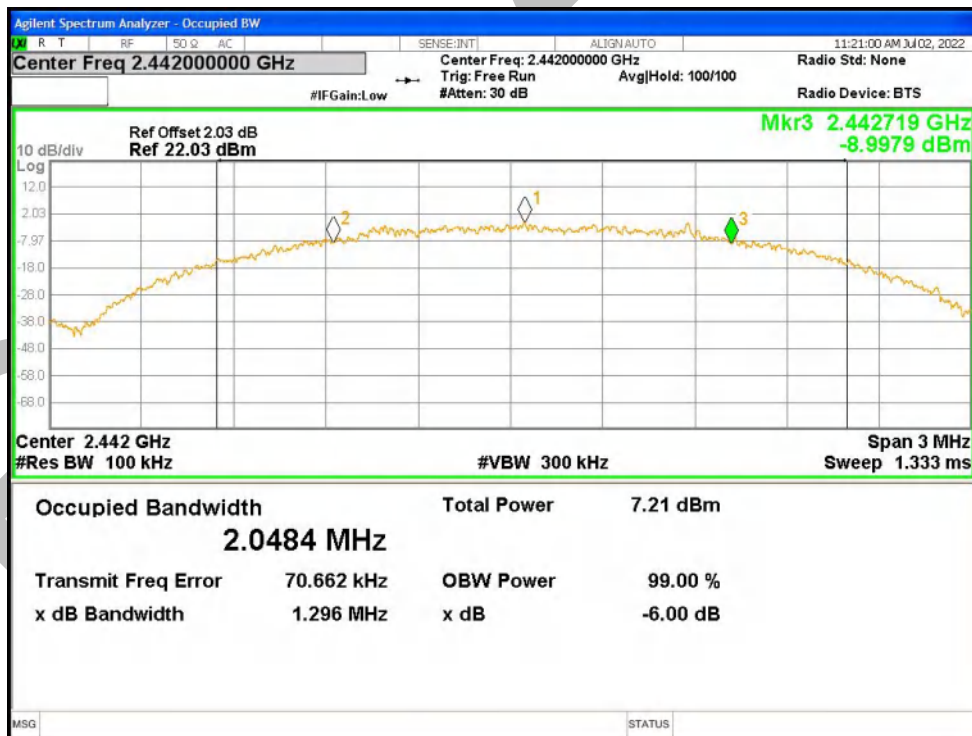

-6dB Bandwidth NVNT BLE 2M 2480MHz Ant1

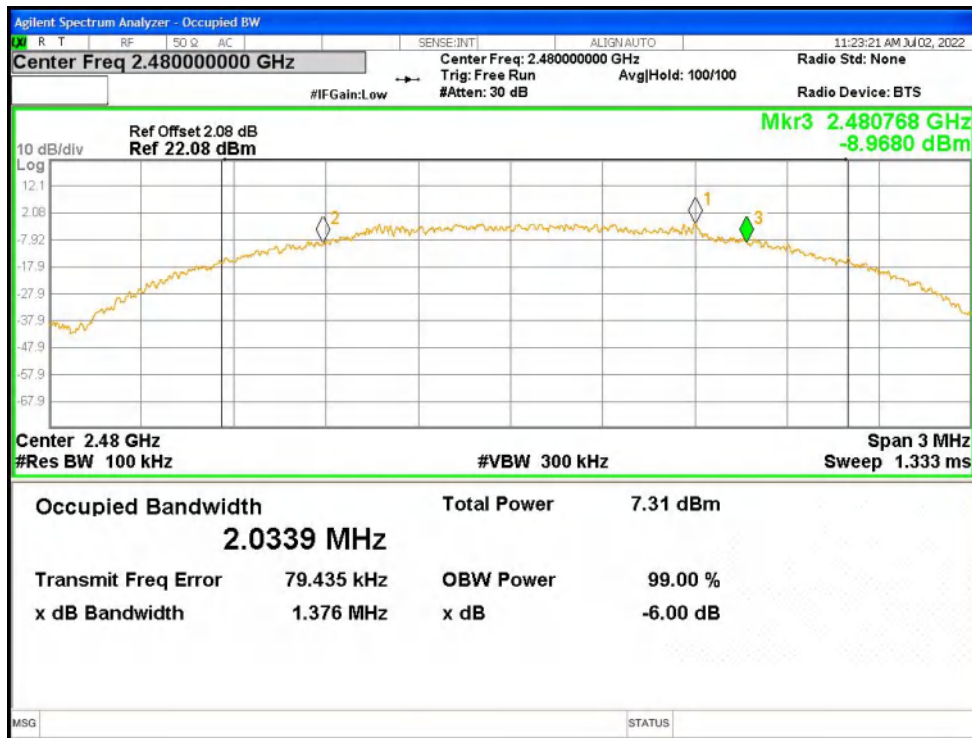


Blue


Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	BLE 1M	2402	Ant1	1.0192
NVNT	BLE 1M	2442	Ant1	1.0213
NVNT	BLE 1M	2480	Ant1	1.0241
NVNT	BLE 2M	2402	Ant1	2.0543
NVNT	BLE 2M	2442	Ant1	2.0168
NVNT	BLE 2M	2480	Ant1	2.0227


OBW NVNT BLE 1M 2402MHz Ant1

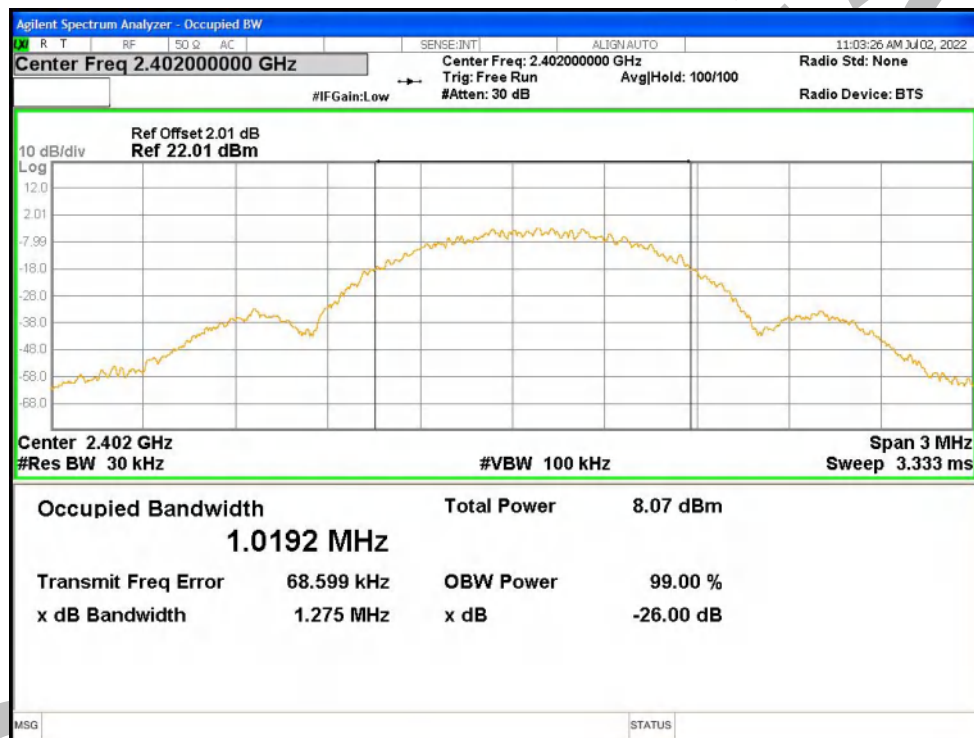


OBW NVNT BLE 1M 2442MHz Ant1

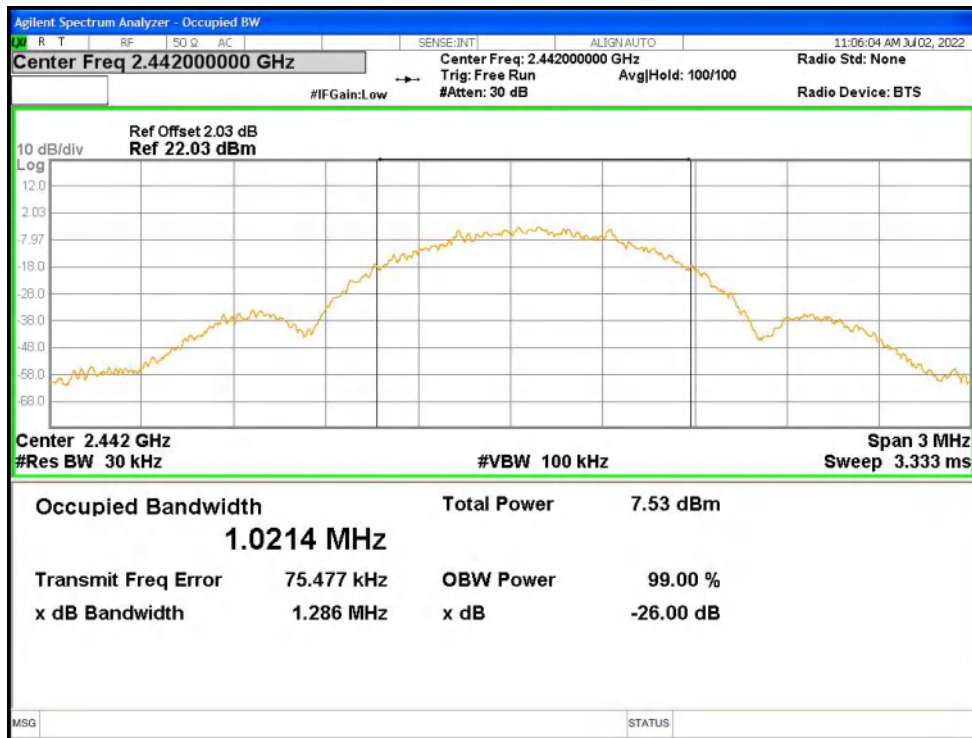


OBW NVNT BLE 1M 2480MHz Ant1

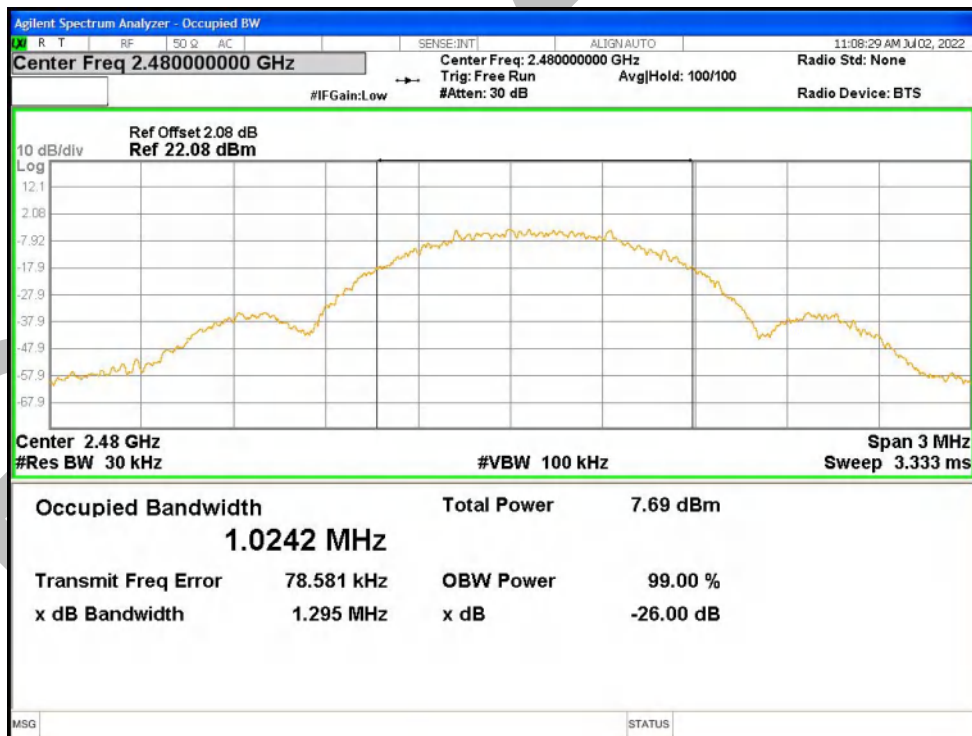


OBW NVNT BLE 2M 2402MHz Ant1

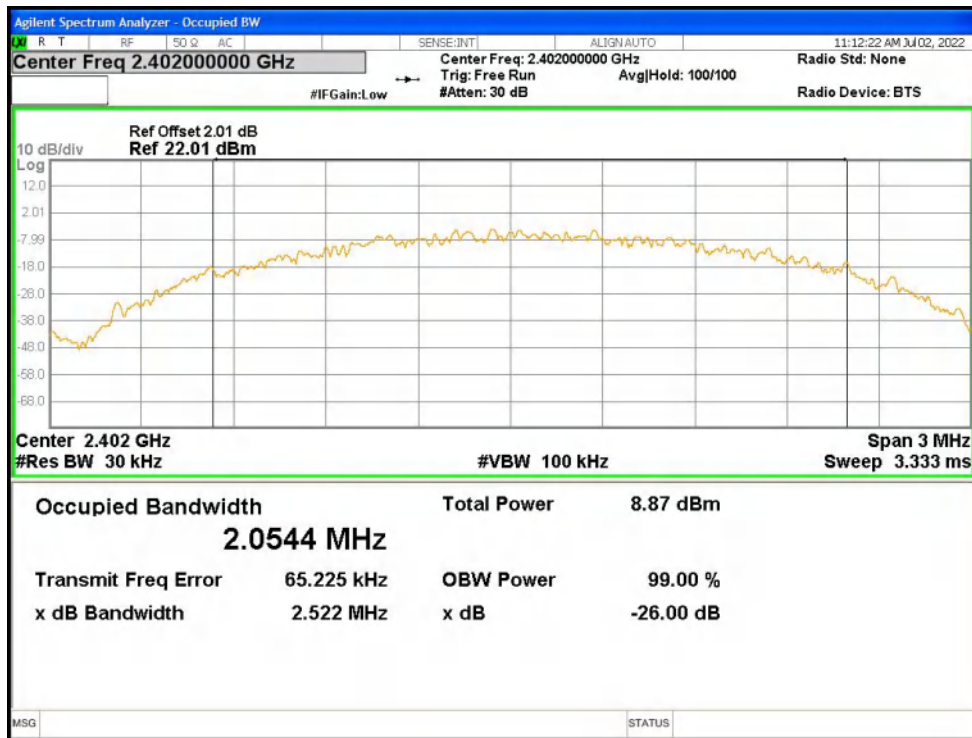

OBW NVNT BLE 2M 2442MHz Ant1

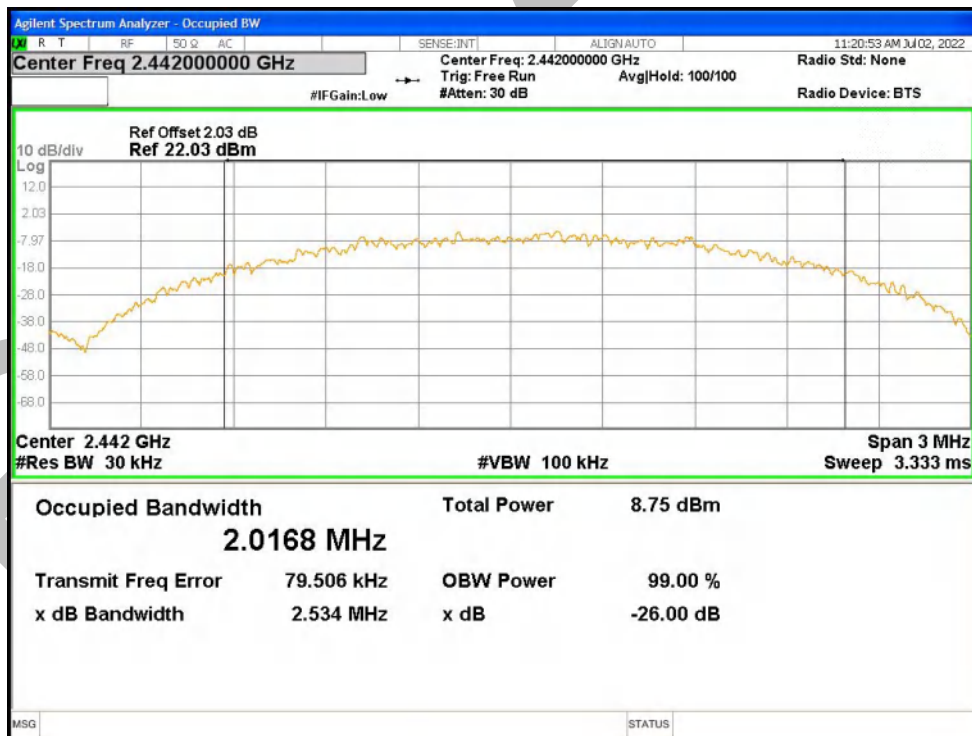

OBW NVNT BLE 2M 2480MHz Ant1

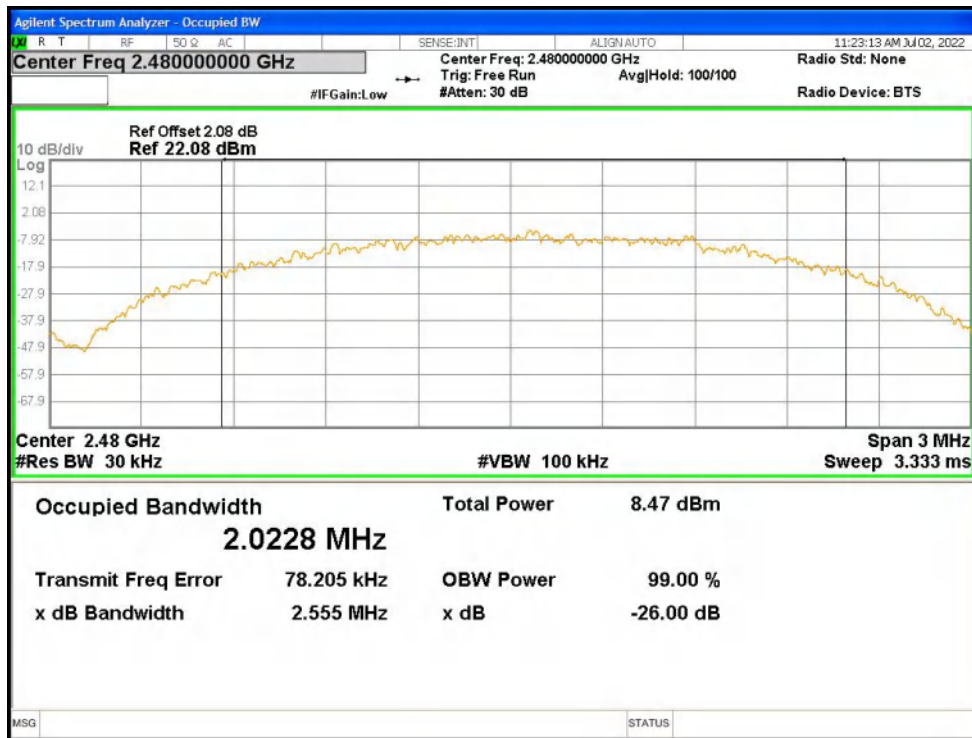


BlueAsia


Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	-4.807	8	Pass
NVNT	BLE 1M	2442	Ant1	-5.793	8	Pass
NVNT	BLE 1M	2480	Ant1	-5.435	8	Pass
NVNT	BLE 2M	2402	Ant1	-7.326	8	Pass
NVNT	BLE 2M	2442	Ant1	-7.633	8	Pass
NVNT	BLE 2M	2480	Ant1	-7.628	8	Pass


PSD NVNT BLE 1M 2402MHz Ant1

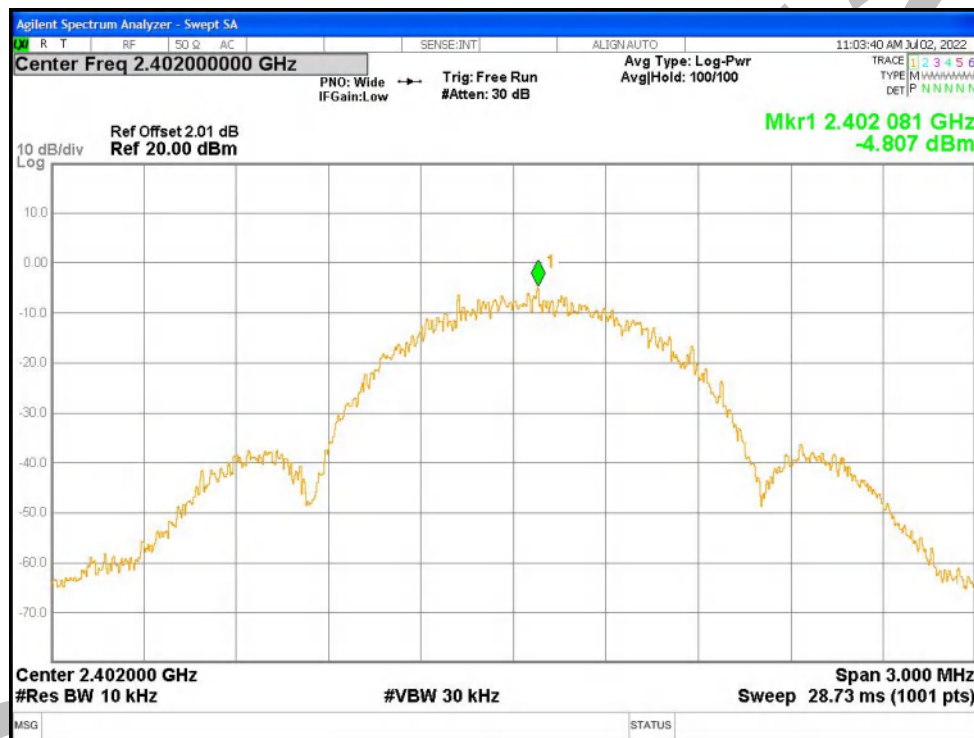


PSD NVNT BLE 1M 2442MHz Ant1

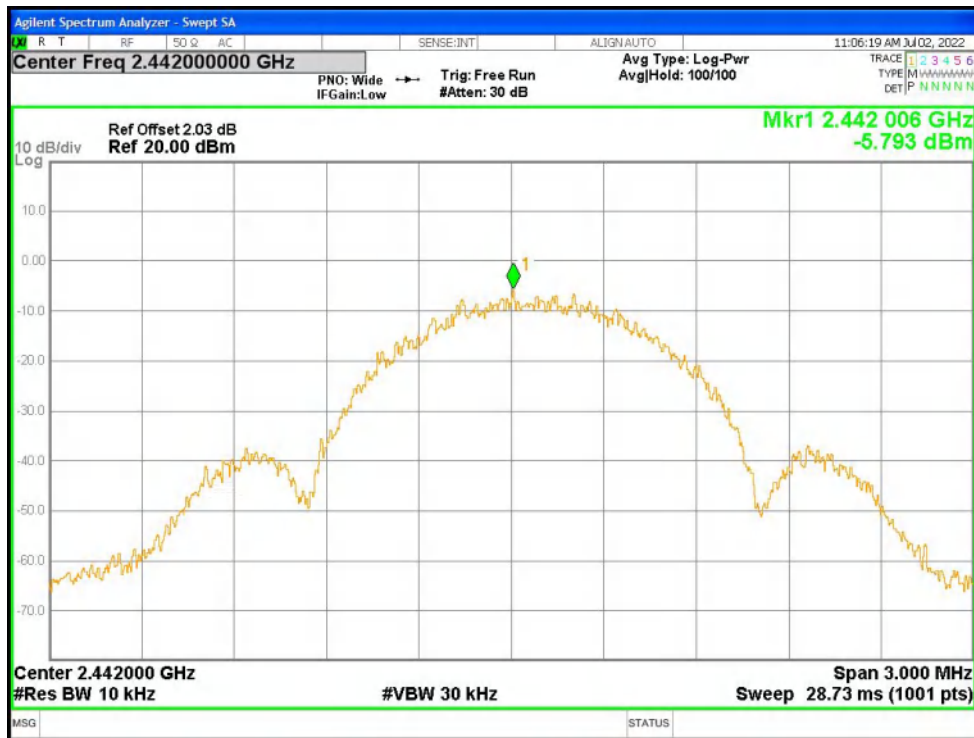


PSD NVNT BLE 1M 2480MHz Ant1

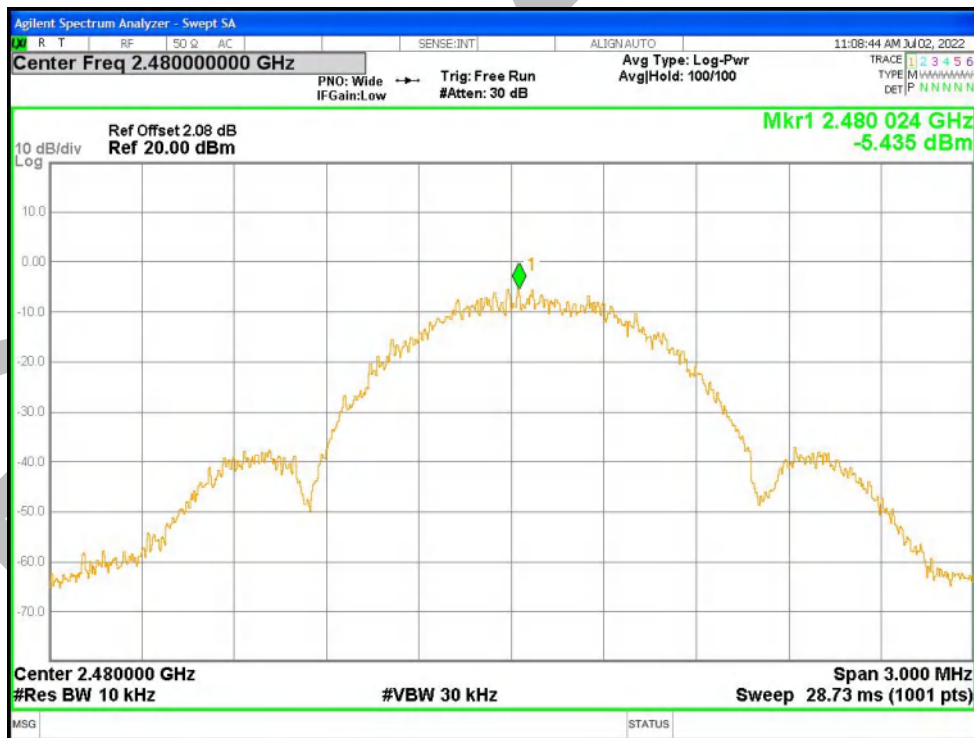


PSD NVNT BLE 2M 2402MHz Ant1

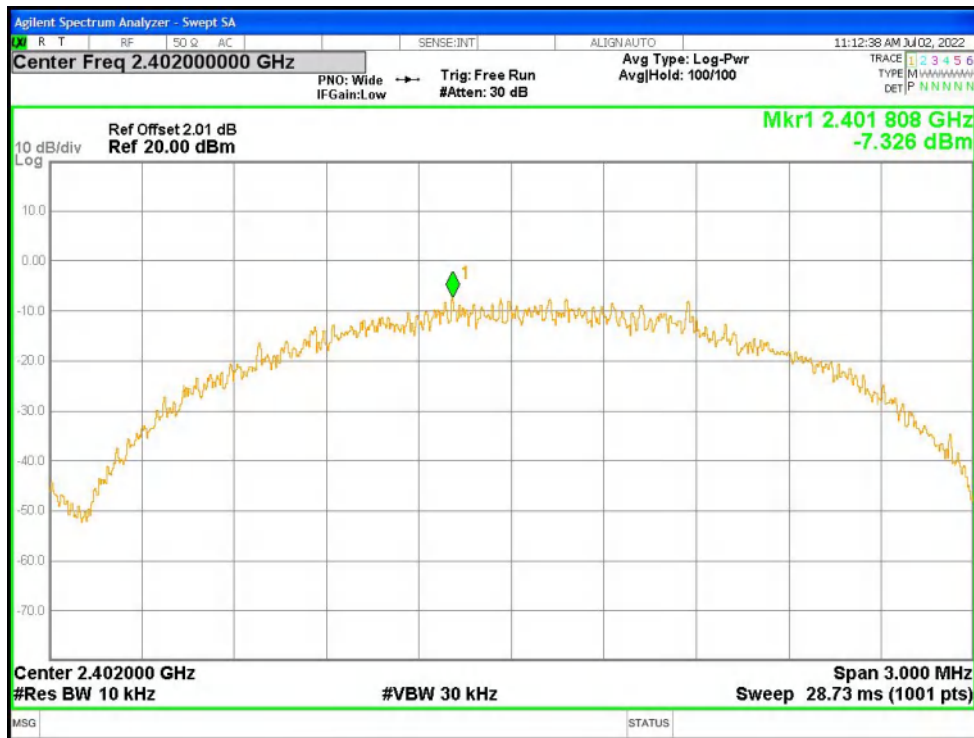

PSD NVNT BLE 2M 2442MHz Ant1

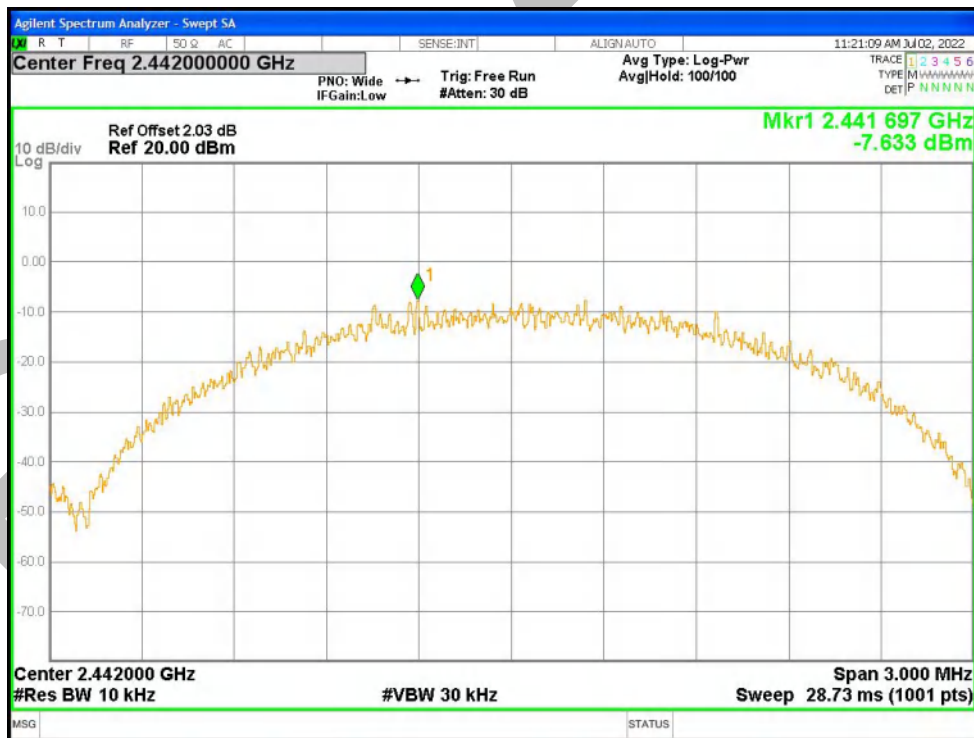

PSD NVNT BLE 2M 2480MHz Ant1

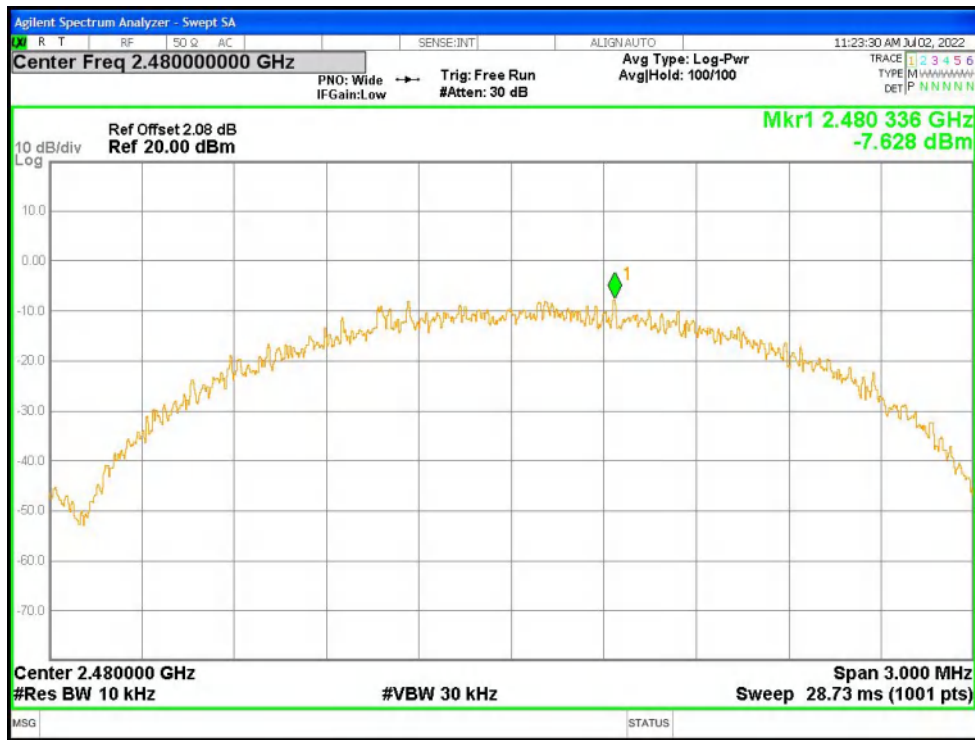


BlueK


Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-54.98	-30	Pass
NVNT	BLE 1M	2480	Ant1	-55.73	-30	Pass
NVNT	BLE 2M	2402	Ant1	-52.82	-30	Pass
NVNT	BLE 2M	2480	Ant1	-54.26	-30	Pass

Band Edge NVNT BLE 1M 2402MHz Ant1 Ref

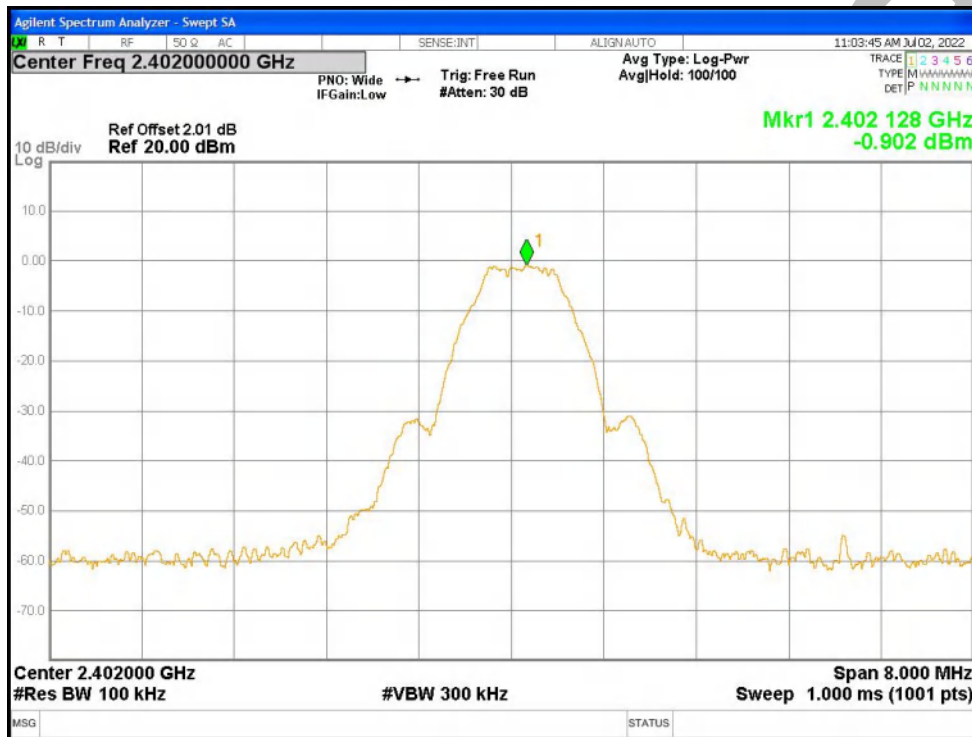


Band Edge NVNT BLE 1M 2402MHz Ant1 Emission

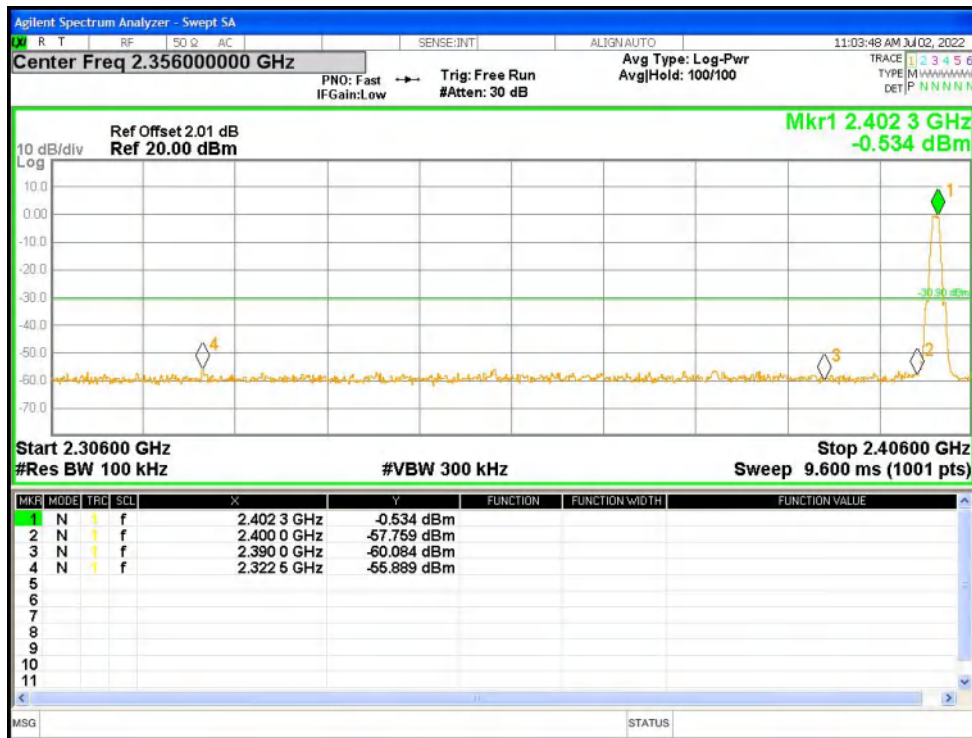


Band Edge NVNT BLE 1M 2480MHz Ant1 Ref




Band Edge NVNT BLE 1M 2480MHz Ant1 Emission

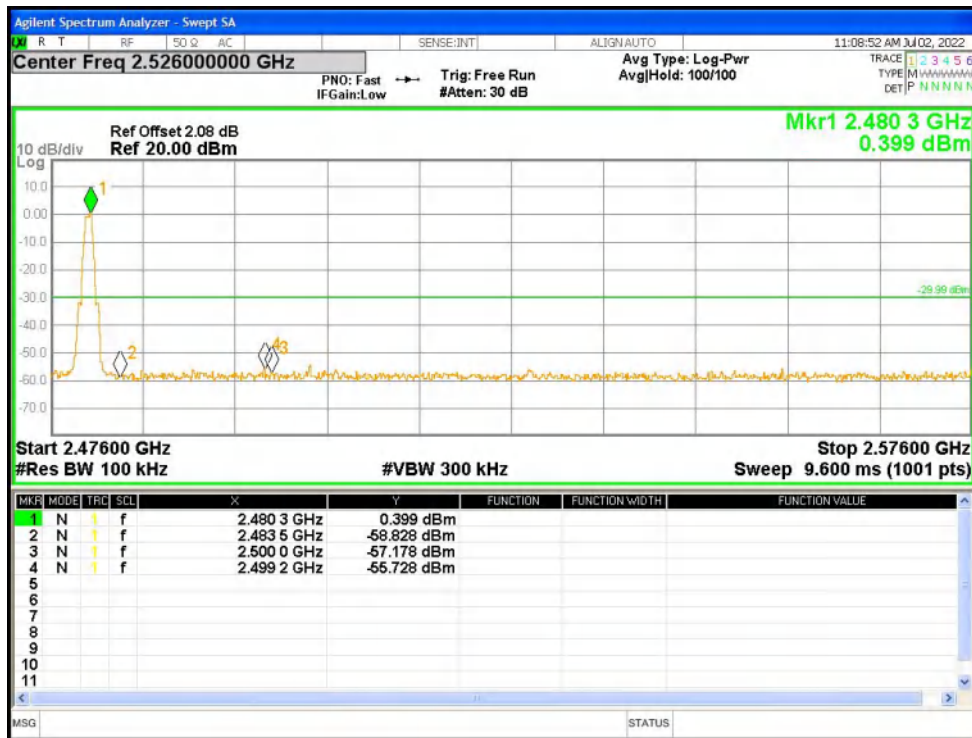

Band Edge NVNT BLE 2M 2402MHz Ant1 Ref

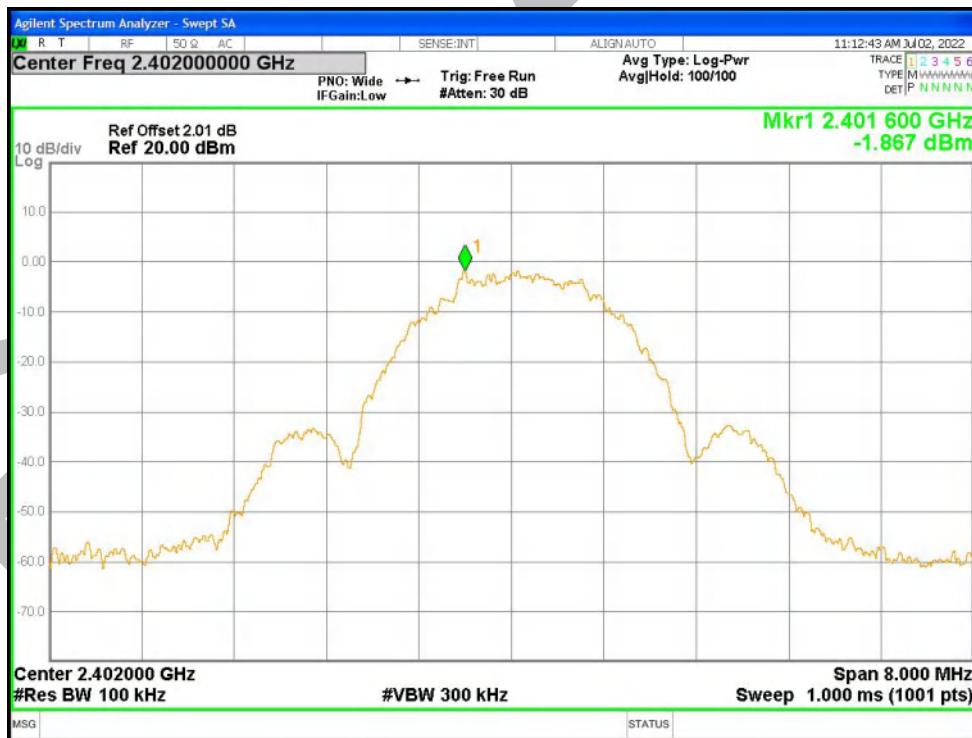

Band Edge NVNT BLE 2M 2402MHz Ant1 Emission

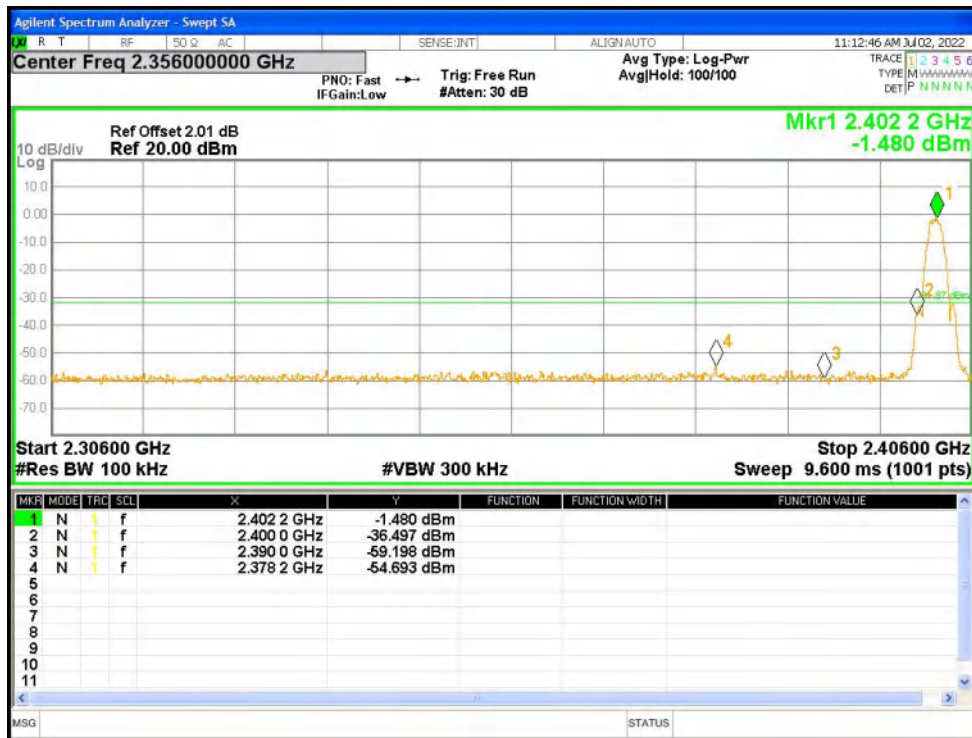

Band Edge NVNT BLE 2M 2480MHz Ant1 Ref




Band Edge NVNT BLE 2M 2480MHz Ant1 Emission

Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-46.73	-30	Pass
NVNT	BLE 1M	2442	Ant1	-45.90	-30	Pass
NVNT	BLE 1M	2480	Ant1	-45.68	-30	Pass
NVNT	BLE 2M	2402	Ant1	-43.57	-30	Pass
NVNT	BLE 2M	2442	Ant1	-44.45	-30	Pass
NVNT	BLE 2M	2480	Ant1	-43.56	-30	Pass


Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Ref

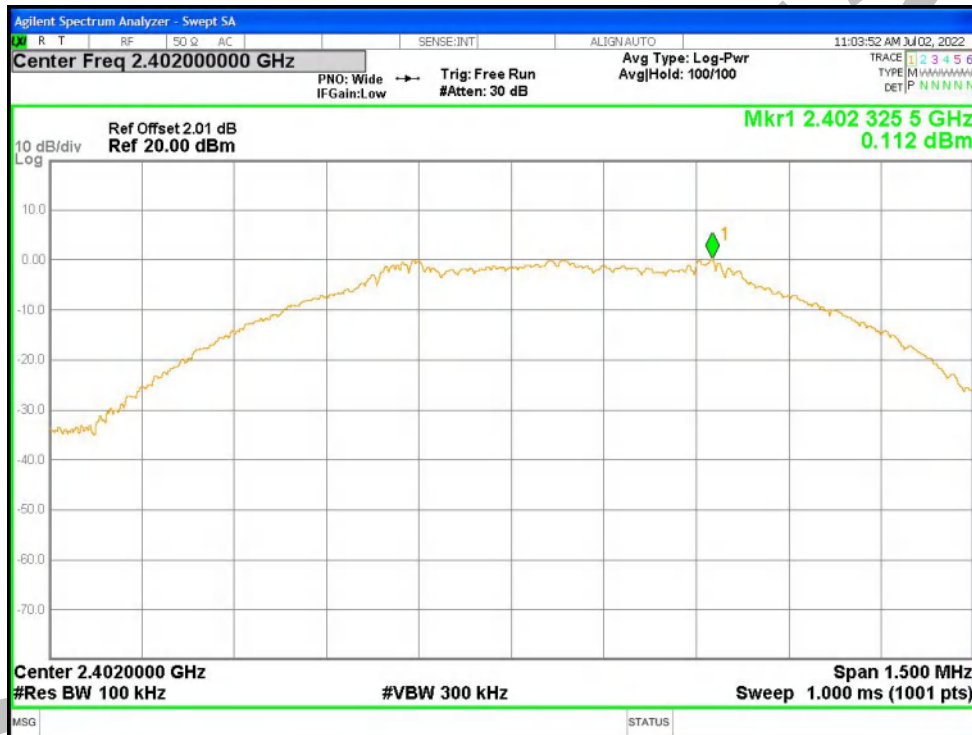


Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Emission




Tx. Spurious NVNT BLE 1M 2442MHz Ant1 Ref

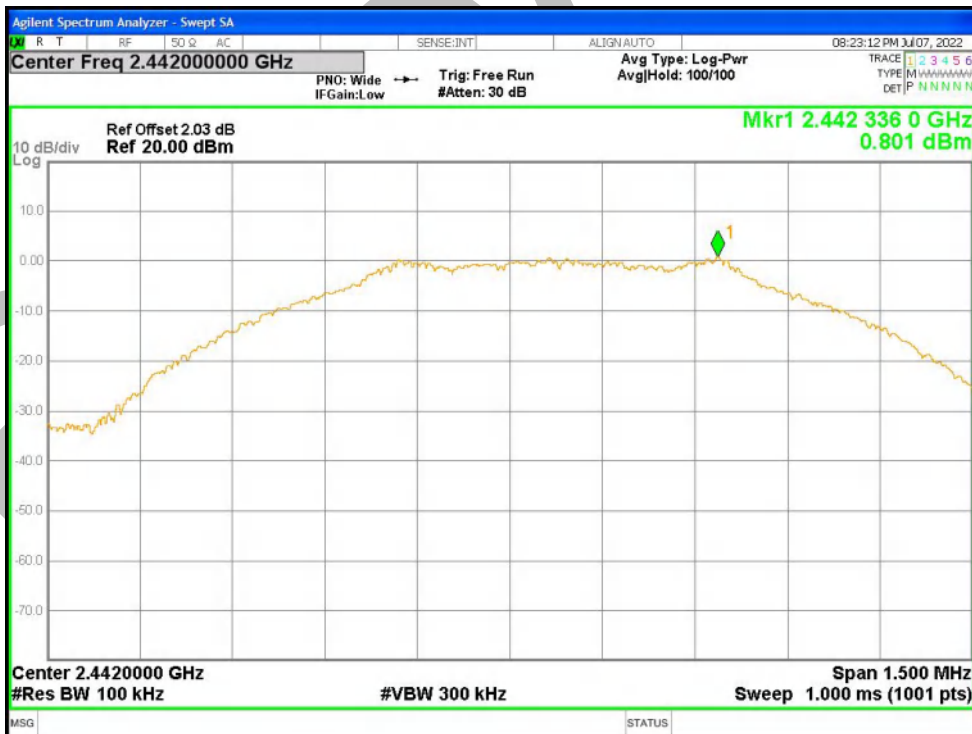

Tx. Spurious NVNT BLE 1M 2442MHz Ant1 Emission

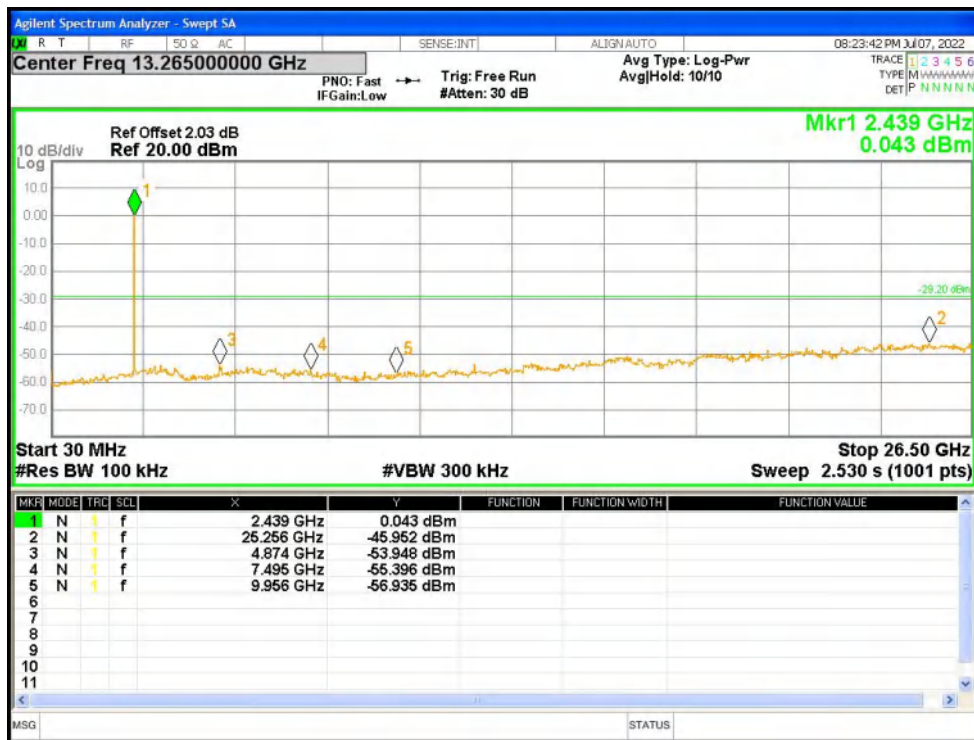


Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Ref

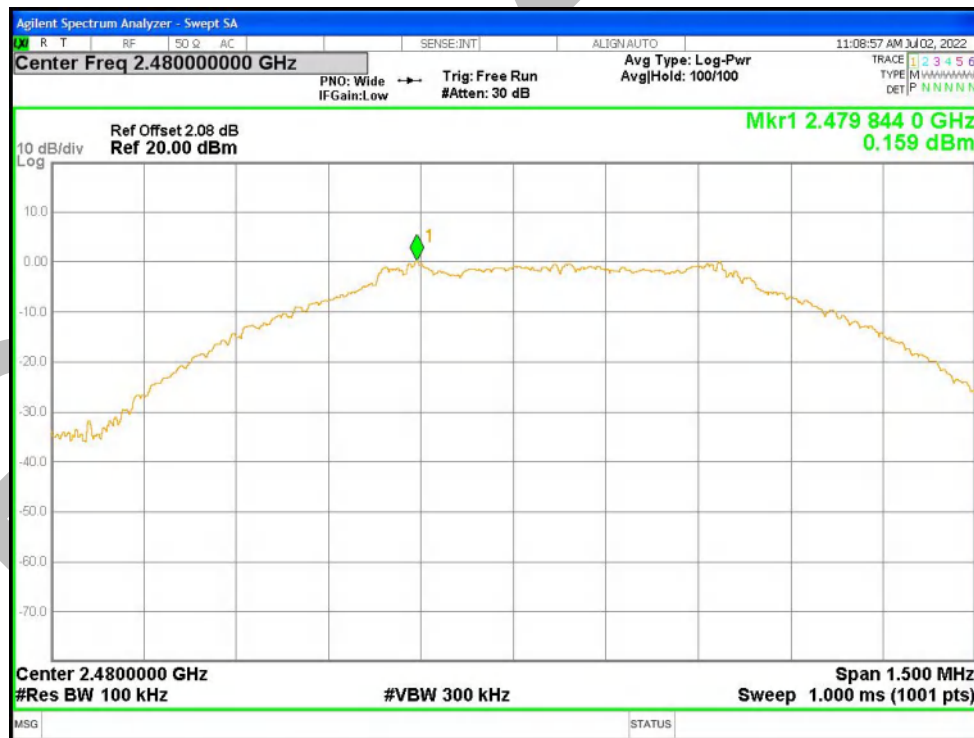

Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Emission




Tx. Spurious NVNT BLE 2M 2402MHz Ant1 Ref

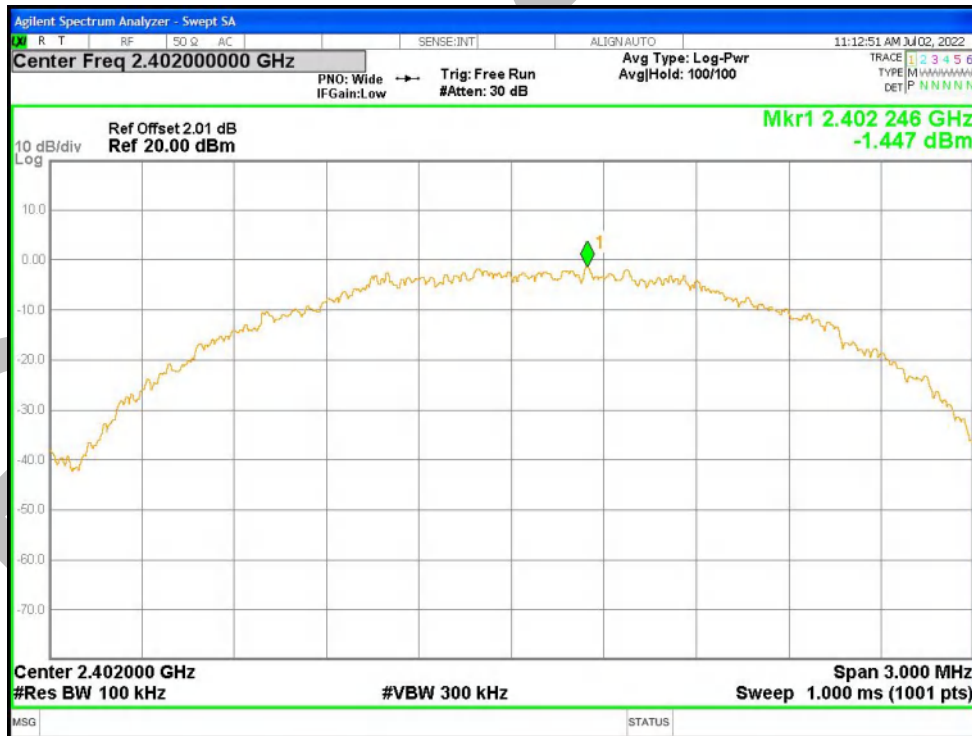

Tx. Spurious NVNT BLE 2M 2402MHz Ant1 Emission




Tx. Spurious NVNT BLE 2M 2442MHz Ant1 Ref

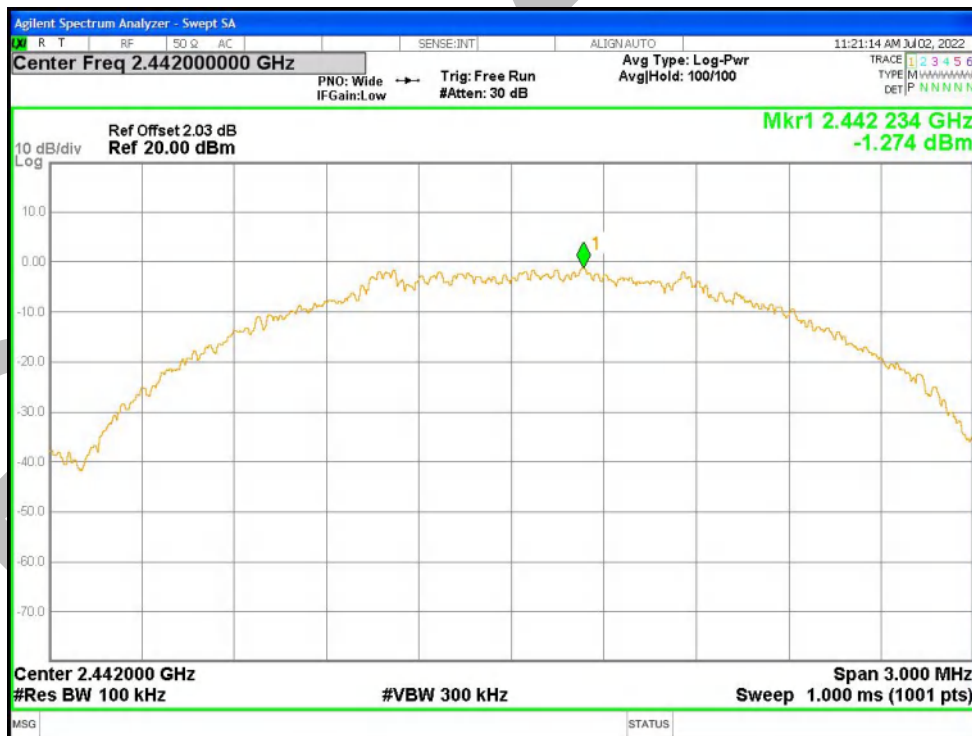

Tx. Spurious NVNT BLE 2M 2442MHz Ant1 Emission



Tx. Spurious NVNT BLE 2M 2480MHz Ant1 Ref

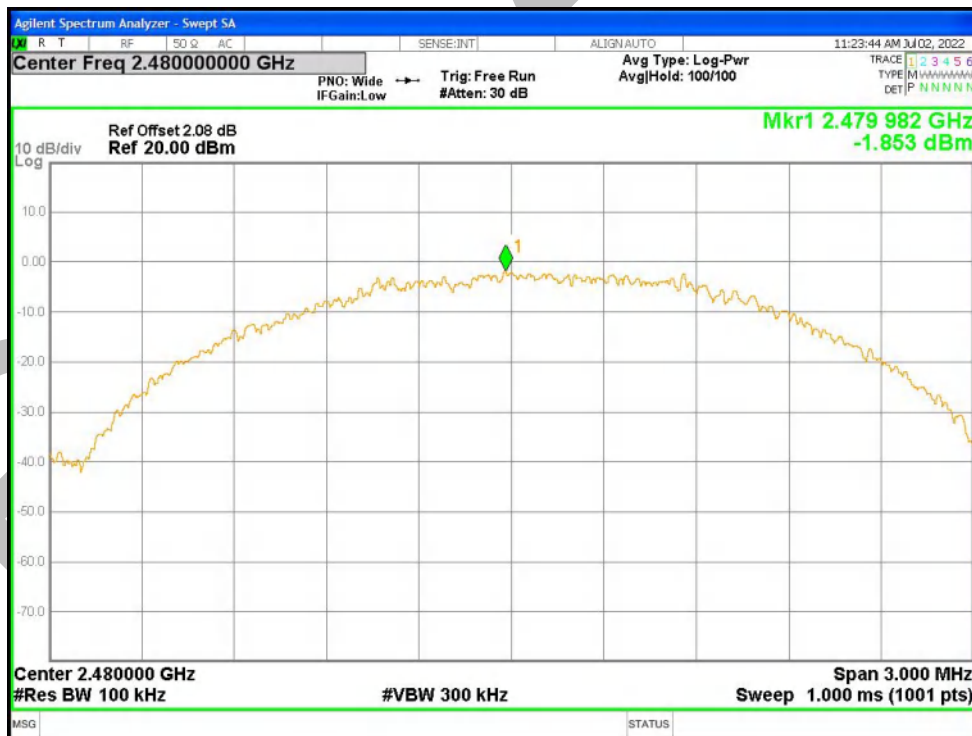

Tx. Spurious NVNT BLE 2M 2480MHz Ant1 Emission



BlueE


APPENDIX A: PHOTOGRAPHS OF TEST SETUP

Conducted Emissions at AC Power Line (150kHz-30MHz)



Radiated Spurious Emissions



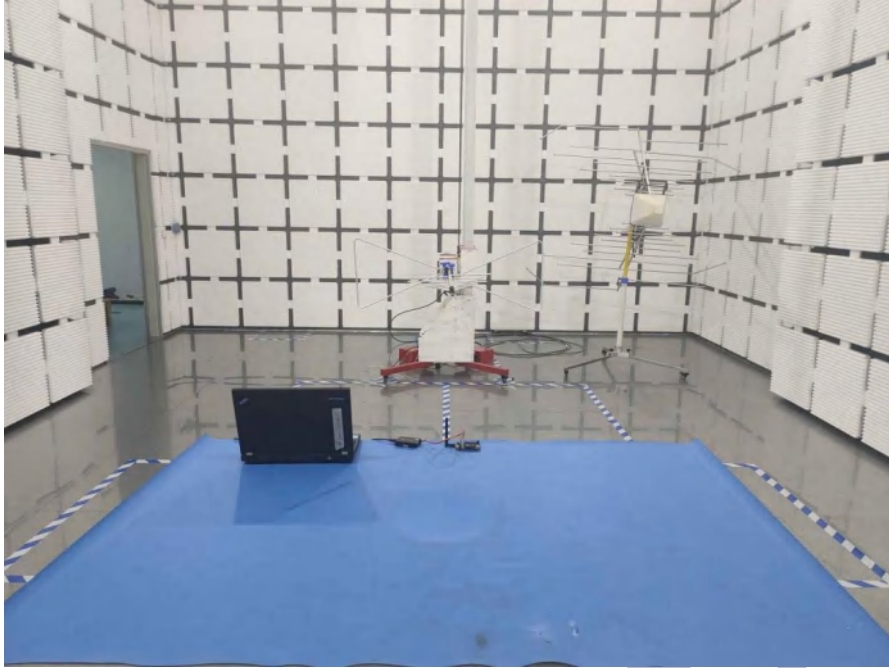

BlueAsia

APPENDIX B: PHOTOGRAPHS OF EUT

Reference to the test report No. BLA-EMC-202206-A11401

----END OF REPORT----

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of BlueAsia, this report can't be reproduced except in full.