

Straubing, 15 April 2004

TEST - REPORT

No. 56502-40192

for

Sesam 506

UHF Handheld Transmitter

Applicant: Akerströms Björbo AB

Test Specification: FCC Code of Federal Regulations,
Part 15 Subpart C, Section 15.231

Note:

The test data of this report relate only to the individual item which has been tested.
This report shall not be reproduced except in full extent without the written approval of
the testing laboratory.

Table of Contents


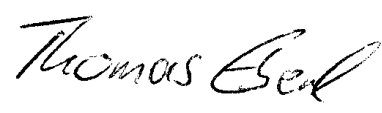
1.	Administrative Data	3
2.	Identification of Test Laboratory	4
3.	Operation Mode of EUT	6
4.	Configuration.....	7
5.	Measuring Methods	8
5.1.	Field Strength of Emissions, Prescans in a fully-anechoic room (30 MHz – 1 GHz).....	9
5.2.	Fieldstrength of Emissions, Measurement at Open Area Test Site (30 MHz – 1 GHz).....	10
5.3.	Fieldstrength of Emissions above 1 GHz.....	11
6.	Photographs Taken During Testing	12
7.	List of Measurements.....	17
8.	Referenced Regulations	22
	Charts taken during testing.....	23

1. Administrative Data

Test item (EUT)	
Type designation	Sesam 506
Serial number(s):	92 6116-0864
Type of equipment:	UHF Handheld Transmitter
Parts/accessories:	
FCC-ID:	OG4S506
Technical data	
Frequency range	433.050 MHz - 434.790 MHz
Operational frequency	433.930 MHz
Type of modulation	10K0F1D
Pulse frequency	N/A
Pulse width	N/A
Antenna	Integrated
Power supply	Battery 9.0 V
Applicant: (full address)	Akerströms Björbo AB S-780 45 Björbo
Contract identification:	---
Contact person:	Mr. Bernt Eriksson
Manufacturer:	Akerströms Björbo AB
Application details	
Receipt of EUT:	06 April 2004
Date of test:	22 March to 07 April 2004
Note:	---
Responsible for testing:	Thomas Eberl
Responsible for test report:	Thomas Eberl

2. Identification of Test Laboratory

DETAILS OF THE TEST LABORATORY	
COMPANY NAME:	Senton GmbH EMI/EMC Test Center
ADDRESS:	Aeussere Fruehlingsstrasse 45 D-94315 Straubing Germany
LABORATORY ACCREDITATION:	DAR-Registration No. TTI-P-G 062/94-01
FCC TEST SITE LISTING	90926
INDUSTRY CANADA TEST SITE REGISTRATION	IC 3050
NAME FOR CONTACT PURPOSES:	Mr. Johann Roidt
TELEPHONE: (+49) (0)9421 5522-0	FAX: (+49) (0)9421 5522-99

PERSONNEL INVOLVED IN THIS TEST REPORT	
LABORATORY MANAGER:	 Mr. Johann Roidt
RESPONSIBLE FOR TESTING:	 Mr. Thomas Eberl
RESPONSIBLE FOR TEST REPORT:	Mr. Thomas Eberl

SUMMARY OF TEST RESULTS

The tested sample complies with the requirements set forth in the
FCC Code of Federal Regulations
Part 15, Subpart C, Section 15.231

3. Operation Mode of EUT

While one button is pressed, the transmitter continuously sends the corresponding datagram. When the button is released, the transmitter stops working instantly.

4. Configuration

Configuration of the EUT
Not applicable

Cables connected to the EUT
Not applicable

Peripheral devices connected to the EUT
Not applicable

5. Measuring Methods


5.1. Field Strength of Emissions, Prescans in a fully-anechoic room (30 MHz – 1 GHz)

Rules and Specifications:	Sections 15.109 & 15.231
Guide:	ANSI C63.4 1997

Measurement Procedure:

Radiated emissions are measured over the frequency range from 30 MHz to 1 GHz.

Measurements were made in both the horizontal and vertical planes of polarization in a fully anechoic room using a spectrum analyzer with the detector function set to peak and resolution bandwidth set to 100 kHz. All tests were performed at a test-distance of 3 meters. Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing.

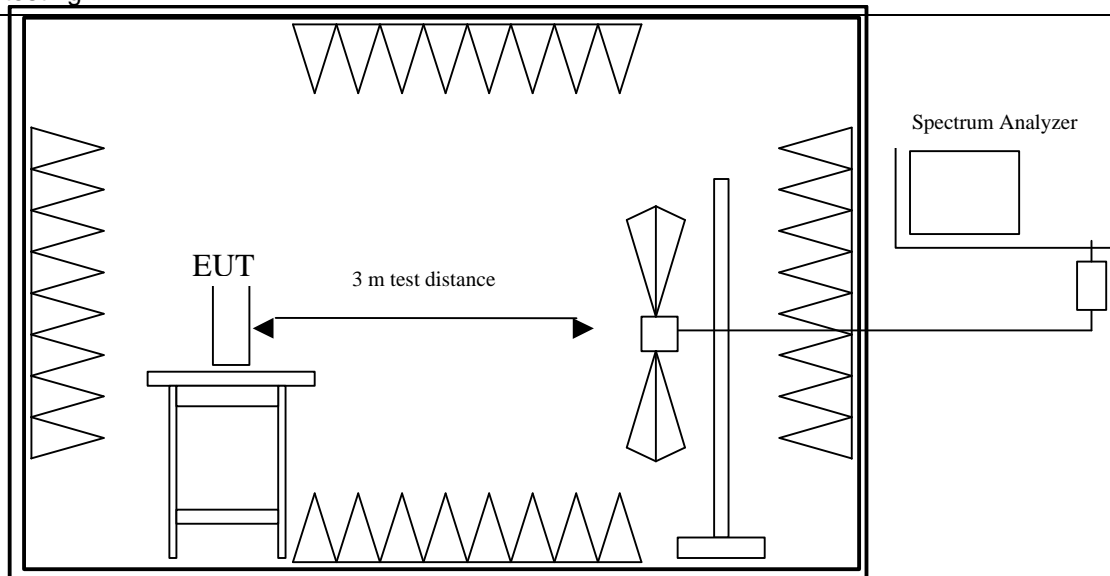

Fully anechoic chamber


Test instruments used:

No.	Type	Model	Serial Number	Manufacturer
01	Spectrum Analyzer	FSP 30	100063	Rohde & Schwarz
113	Preamplifier	CPA9231A	3393	Schaffner
141	Biconical antenna	HK 116	829708/006	Rohde & Schwarz
143	Log. periodic antenna	3147	9112-1054	EMCO
003	Fully anechoic room	No. 2	1452	Albatross Projects

5.2. Fieldstrength of Emissions, Measurement at Open Area Test Site (30 MHz – 1 GHz)

Rules and Specifications:	Sections 15.109 & 15.231
Guide:	ANSI C63.4 1997

Measurement Procedure:
<p>Measurement Procedure:</p> <p>For final testing an open-area test-site was used. Radiated emissions are measured over the frequency range from 30 MHz to 1 GHz.</p> <p>Measurements were made in both the horizontal and vertical planes of polarisation at a open area test site using a spectrum analyser with the detector function set to CISPR. All test were performed at a test distance of 3 meters. During the tests the EUT is rotated all around, and the receiving-antenna is rased and lowered from 1m to 4m to find the maximum levels of emissions. The cables and equipment were placed and moved within the range of position likely to find their maximum emissions.</p>

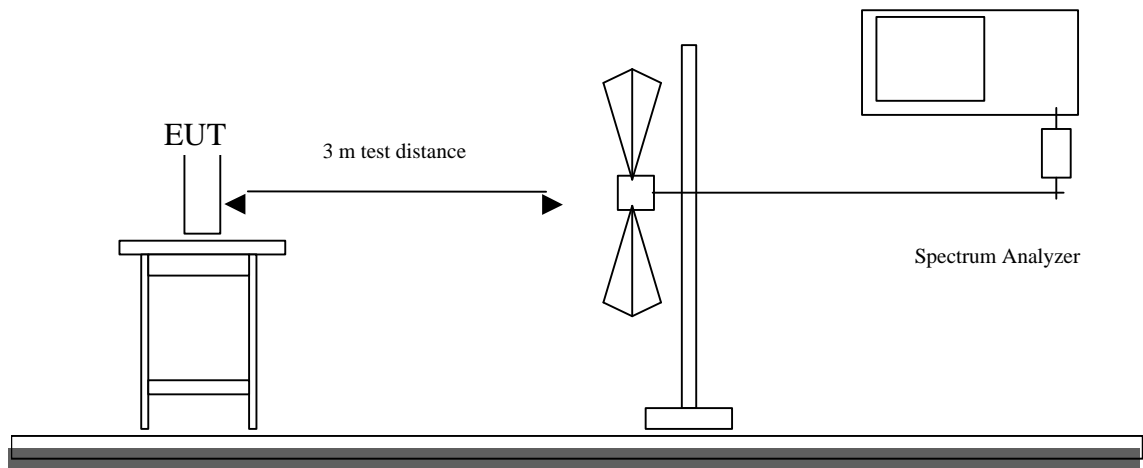

Test instruments used:

No.	Type	Model	Serial Number	Manufacturer
01	EMI Receiver	ESVP	881414/009	Rohde & Schwarz
141	Biconical antenna	HK 116	829708/006	Rohde & Schwarz
143	Log. periodic antenna	3147	9112-1054	EMCO
003	Open Field Test Site	No. 1	N/A	Senton

5.3. Fieldstrength of Emissions above 1 GHz

Rules and Specifications:	Sections 15.109 & 15.209
Guide:	ANSI C63.4 1997

Measurement Procedure:


Radiated emissions are measured in the frequency range 1 GHz to the 10th harmonic of the maximum frequency of the EUT.

Resolution and video bandwidth of the spectrum analyzer are set to 1 MHz. Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing. Additional measurements are performed at critical frequencies with reduced span.

EUT is rotated all around and receiving antenna is raised and lowered to find the maximum levels of emission. The cables and equipment are placed and moved within the range of position likely to find their maximum emissions.

All tests are performed in a fully-anechoic chamber with a test-distance of 3 meters.

If required preamplifiers are used for the whole frequency range. Special care is taken to avoid overload in transmit mode (using appropriate attenuators and filters if necessary).

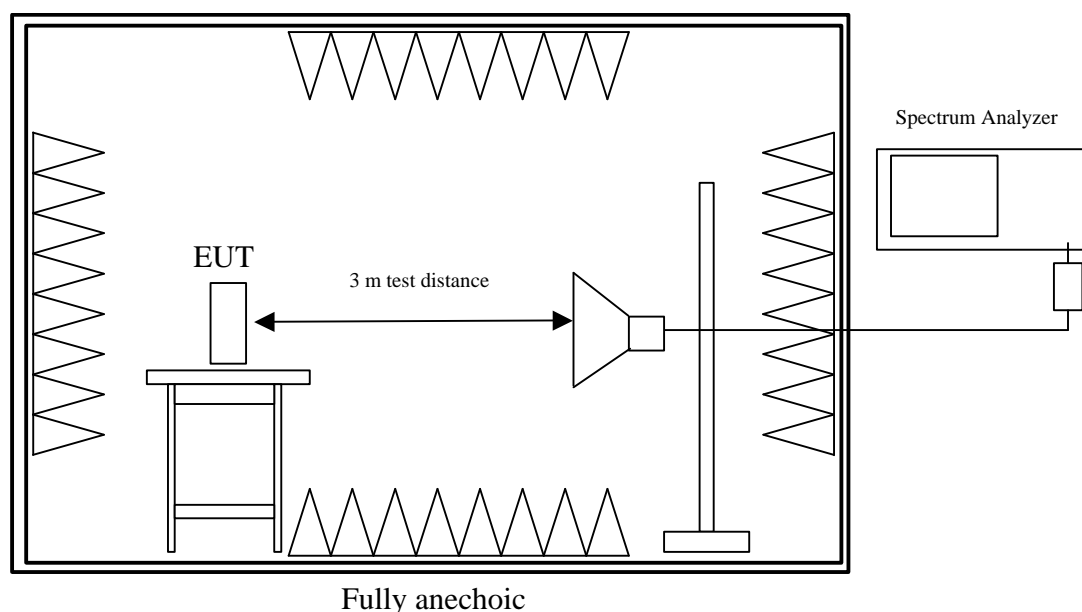

Test instruments used:

No.	Type	Model	Serial Number	Manufacturer
01	Spectrum Analyzer	FSP 30	100063	Rohde & Schwarz
143	Log. periodic antenna	3147	9112-1054	EMCO
145	Horn antenna	3115	9508-4553	EMCO
146	Horn antenna set	3160-03/-09	9112-1003	EMCO
114	Preamplifier 1-8 GHz	AFS3-00100800-32-LN	847743	Miteq
115	Preamplifier 8-18 GHz	ACO/180-3530	32641	CTT
003	Fully anechoic room	No. 2	1452	Albatross Projects

6. Photographs Taken During Testing

**Test setup for radiated emission measurement
(fully anechoic room)**



**Test setup for radiated emission measurement
(fully anechoic room)**



Test setup for radiated emission measurement (open-area test-side)



Test setup for radiated emission measurement (open-area test-side)



7. List of Measurements

FCC Part 15		
Section(s):	Test	Result
15.205 15.207 15.231 (a) (1) 15.231 (b) 15.231 (b) 15.231 (c)		
	Restricted Bands	Pass
	AC powerline emissions	Not applicable
	Periodic operation	Pass
	Duty Cycle Correction	Pass
	Field strength of emissions	Pass
	Bandwidth of emissions	Pass

Field strength of emissions

Rules and Specifications:	15.231 (b) Radiated Emission Limits		
Guide:	ANSI C63.4		
Limit:	In addition to the provisions of Section 15.205, the field strength of emissions from intentional radiators operated under Section 15.231 shall not exceed the following:		
	Fundamental Frequency (MHz)	Field Strength of Fundamental (microvolts/meter)	Field Strength of Spurious Emissions (microvolts/meter)
	40.66 – 40.70	2.250	225
	70 – 130	1.250	125
	130 - 174	1.250 to 3.750**	125 to 375 **
	174 - 260	3.750	375
	260 – 470	3750 to 12.500**	375 to 1250 **
	above 470	12.500	1250

** linear interpolations

Test Site:	Open Area Test Site (< 1 GHz), Fully anechoic chamber (> 1 GHz)
Distance:	3 Meter

Frequency (MHz)	Detector	Antenna Polarization	Analyzer Reading (dBμV)	Antenna Correction (dB/m)	Duty Cycle Correction (dB/m)	Field Strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
433.93	PK	horizontal	65	19.50	-8.3	76.20	80.85	-4.6
887.86	PK	horizontal	26.00	27.20	-8.3	44.90	60.85	-16.0
1301.00	PK	horizontal	20.55	27.32	-8.3	39.57	60.85	-21.3
1735.00	PK	horizontal	26.19	29.68	-8.3	47.57	60.85	-13.3
2169.00	PK	horizontal	28.71	31.36	-8.3	51.77	60.85	-9.1
3037.00	PK	vertical	11.32	34.4	-8.3	37.42	60.85	-23.4
3471.000	PK	horizontal	20.58	35.84	-8.3	48.12	60.85	-12.7
3905.000	PK	horizontal	9.62	37.09	-8.3	38.41	60.85	-22.4
4346.000	PK	vertical	8.33	37.49	-8.3	37.52	60.85	-23.3

*** = All emissions showed more than 20 dB margin to the limit

A negative value for Margin indicates, that the limit is kept.

Sample calculation of erp values:

$$\text{Field Strength (dB}\mu\text{V/m)} = \text{Analyzer Reading (dB}\mu\text{V)} + \text{Antenna Correction (dB/m)} + \text{Duty Cycle Correction (dB)}$$

Test Results:	Pass
---------------	------


Duty Cycle Correction

Rules and Specifications:	15.231 (b) (2) Limits on the Field Strength of Emissions
Guide:	ANSI C63.4
ANSI C63.4	When average detector function limits are specified for a pulse modulated transmitter, the average level of emissions may be found by measuring the peak levels of the emissions and correcting them with the duty cycle according to ANSI C64.4, section I4 (10)


$$Duty\ Cycle\ Correction[dB] = 20 \cdot \log\left(\frac{Sum\ of\ the\ Pulse\ Widths}{100ms}\right) = -dB$$

$$20 \times \log (38.48ms/100ms) = - 8.3\ dB$$


Total stream

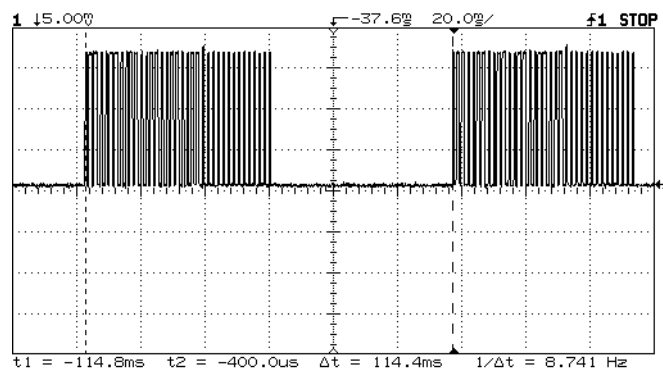


Bit sequence

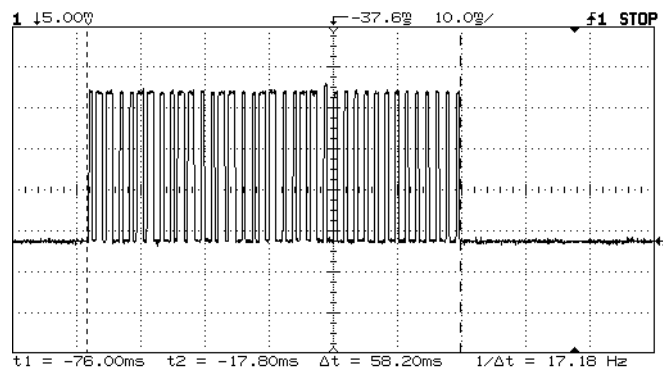

Low Bit

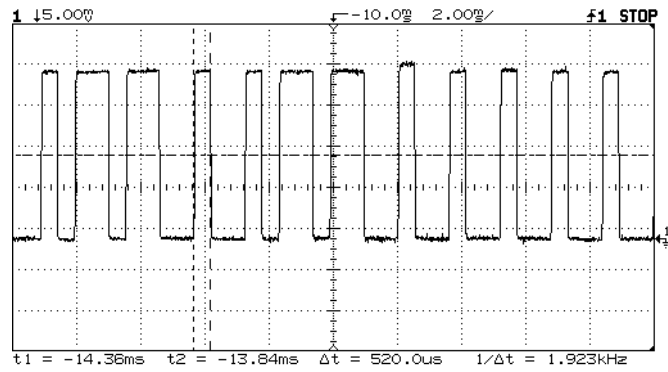

High Bit

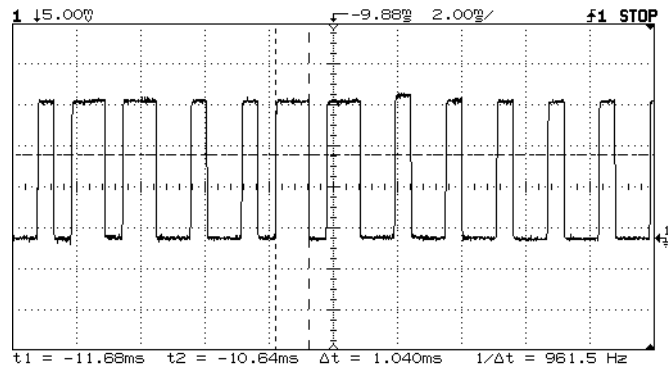


Total Bit on max: 1.04 ms x 37 bit = 38.48 ms (1stream)

Bandwidth of Emission

Rules and Specifications:	15.231 c
Guide:	ANSI C63.4
Limit:	The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB from the modulated carrier

Test Results:	Pass
---------------	------

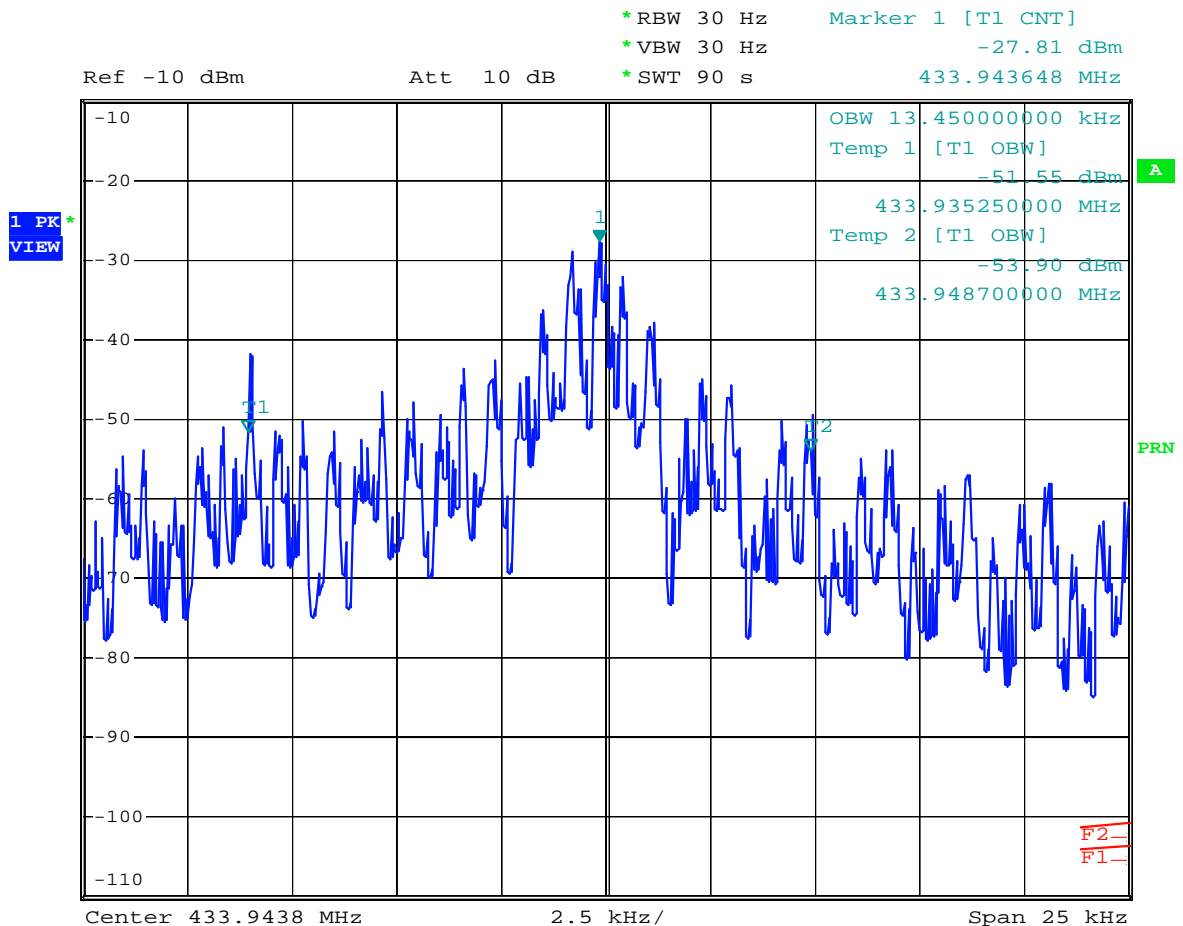

Comment A: akerstroms 40192 OBW 01
Date: 7.APR.2004 15:37:14

8. Referenced Regulations

All tests were performed with reference to the following regulations and standards:


<input checked="" type="checkbox"/>	FCC Part 2	Code of Federal Regulations Part 2 Frequency allocation and radio treaty matters; General rules and regulations	October 01, 1999
<input type="checkbox"/>	FCC Part 15 Subpart A	Code of Regulations Part 15 (Radio Frequency Devices), Subpart A (General) of the Federal Communication Commission (FCC)	May 30, 2002
<input type="checkbox"/>	FCC Part 15 Subpart B	Code of Regulations Part 15 (Radio Frequency Devices), Subpart B (Unintentional Radiators) of the Federal Communication Commission (FCC)	May 30, 2002
<input checked="" type="checkbox"/>	FCC Part 15 Subpart C	Code of Regulations Part 15 (Radio Frequency Devices), Subpart C (Intentional Radiators) of the Federal Communication Commission (FCC)	May 30, 2002
<input type="checkbox"/>	FCC Part 74 Subpart H	Code of Regulations Part 15 (Radio Frequency Devices), Subpart H (Low Power Auxiliary Stations) of the Federal Communication Commission (FCC)	October 20, 1997
<input checked="" type="checkbox"/>	ANSI C63.4	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz - 40 GHz	October, 1992
<input type="checkbox"/>	RSS-210	Radio Standards Specification RSS-210 Issue 5 for Low Power Licence-Exempt Radiocommunication Devices of Industry Canada	November, 2001

Charts taken during testing

Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: Sesam 506	Comment: - TX mode - EUT in horizontal position - rear side on table (1)
Serial no.: #1	
Applicant: Akerströms Björbo AB	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 03/24/2004	Operator: T. Eberl
Test performed: automatically	File name: default.emi

Detector: Peak	List of values: 10 dB Margin
	50 Subranges

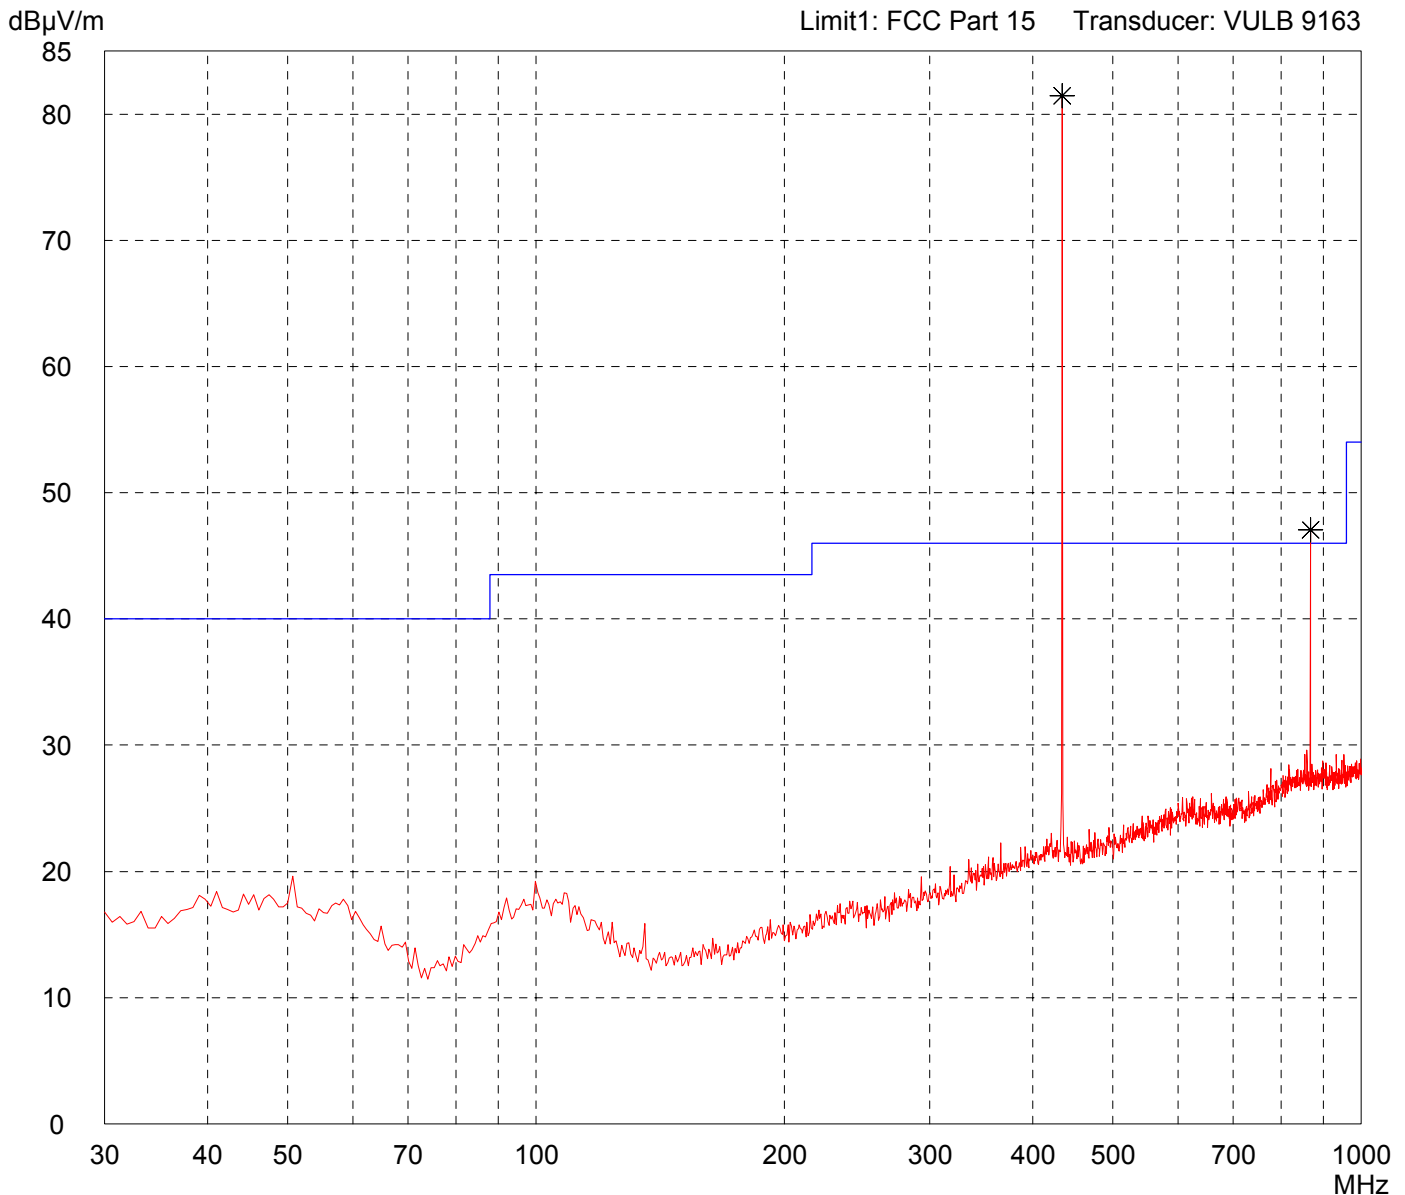


Result: Prescan	Project file: 56502-40192
	Page of Pages

Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: Sesam 506	Comment: - TX mode - EUT in horizontal position - right side on table (2)
Serial no.: #1	
Applicant: Akerströms Björbo AB	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 03/24/2004	Operator: T. Eberl
Test performed: automatically	File name: default.emi

Detector: Peak	List of values: <div style="display: flex; justify-content: space-between;"> 10 dB Margin 50 Subranges </div>
--------------------------	--

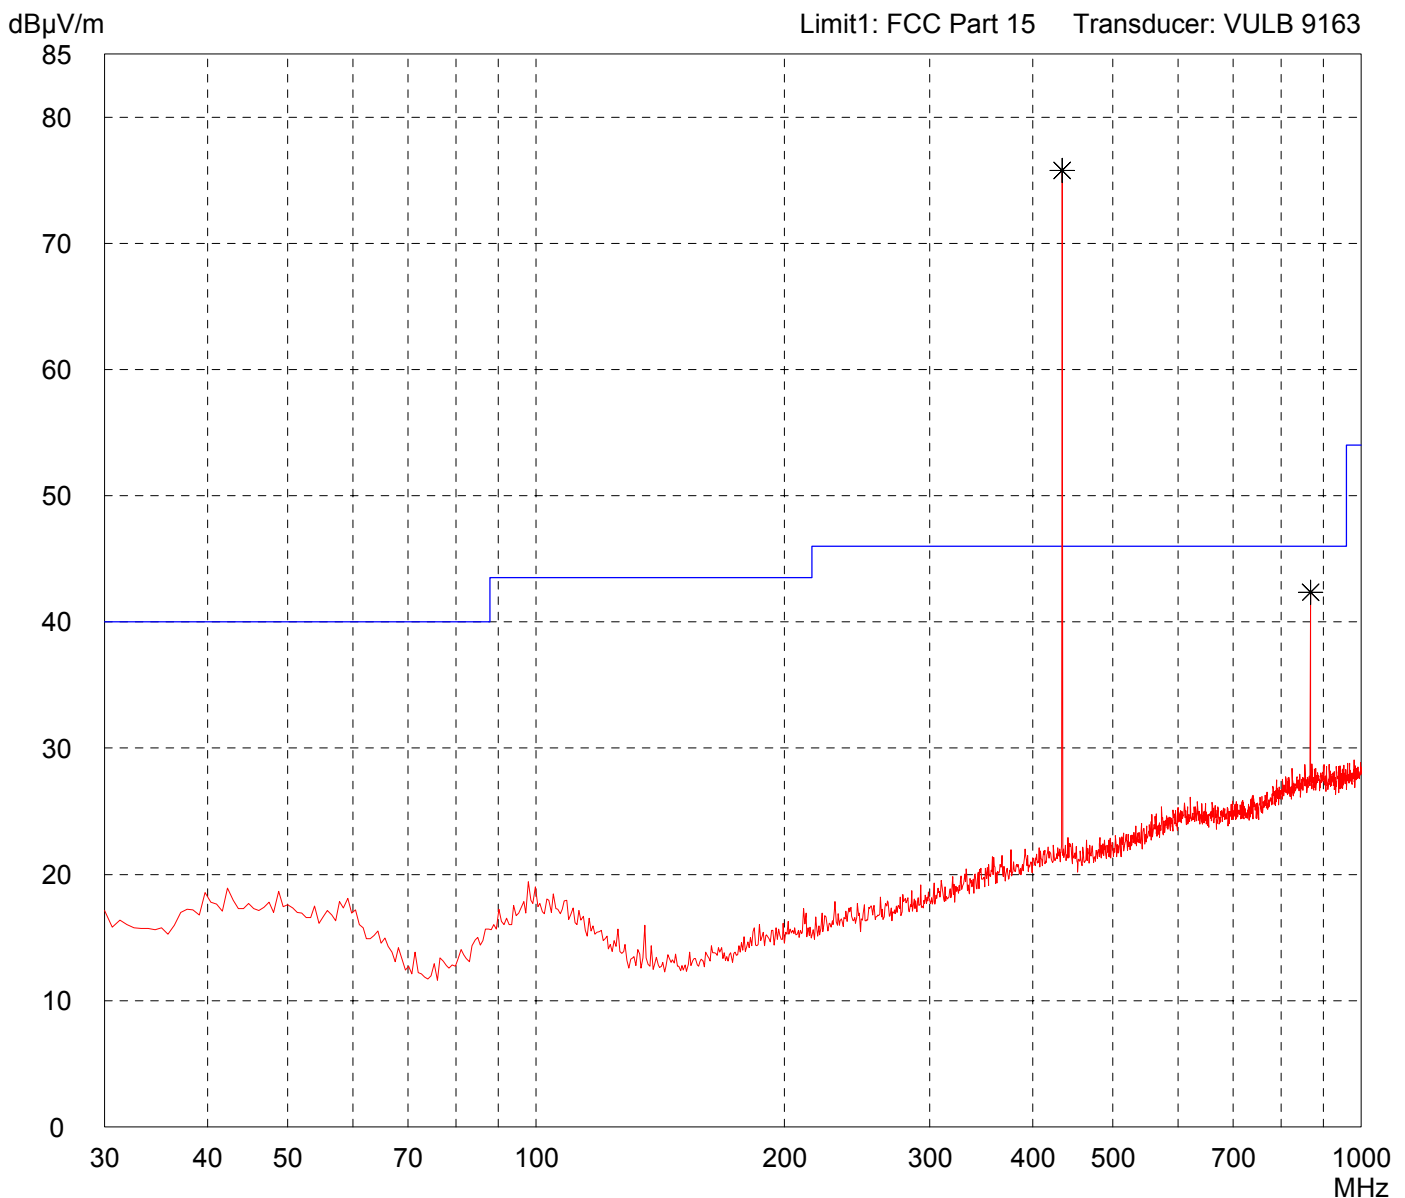


Result: Prescan	Project file: 56502-40192
	Page of Pages

Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: Sesam 506	Comment: - TX mode - EUT in vertical position (3)
Serial no.: #1	
Applicant: Akerströms Björbo AB	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 03/24/2004	Operator: T. Eberl
Test performed: automatically	File name: default.emi

Detector: Peak	List of values: <div style="display: flex; justify-content: space-between;"> 10 dB Margin 50 Subranges </div>
--------------------------	--

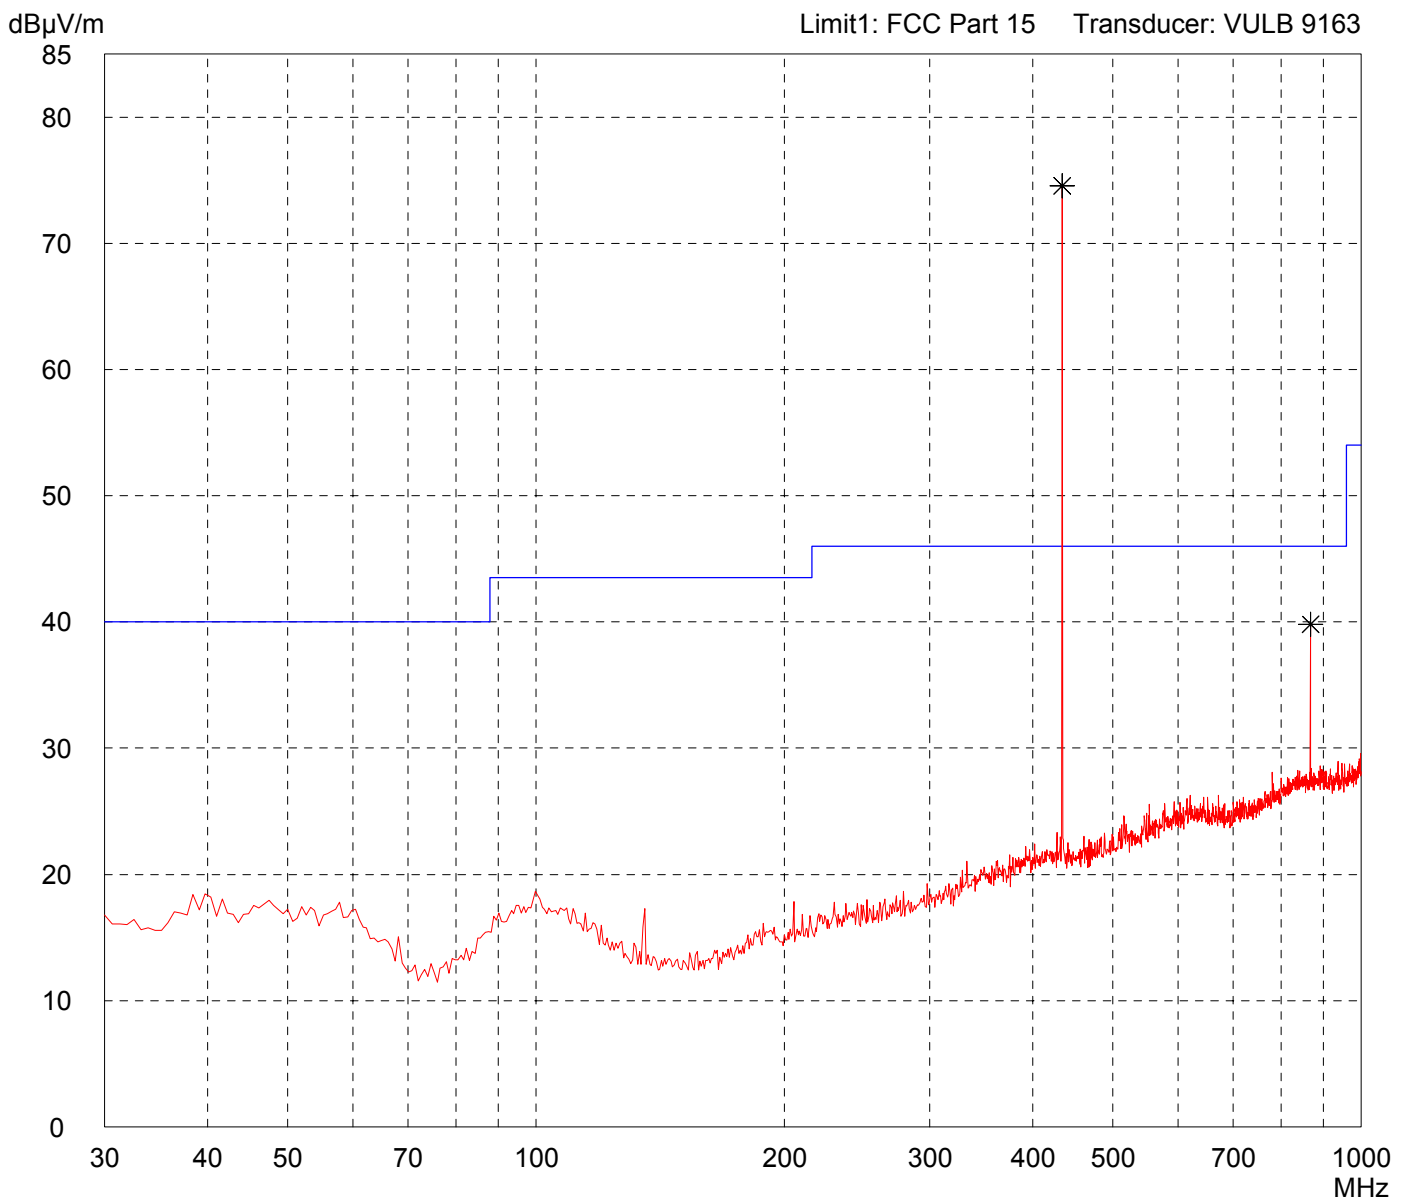


Result: Prescan	Project file: 56502-40192
	Page of Pages

Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: Sesam 506	Comment: - TX mode - EUT in horizontal position - rear side on table (1)
Serial no.: #1	
Applicant: Akerströms Björbo AB	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 03/24/2004	Operator: T. Eberl
Test performed: automatically	File name: default.emi

Detector: Peak	List of values: 10 dB Margin
	50 Subranges

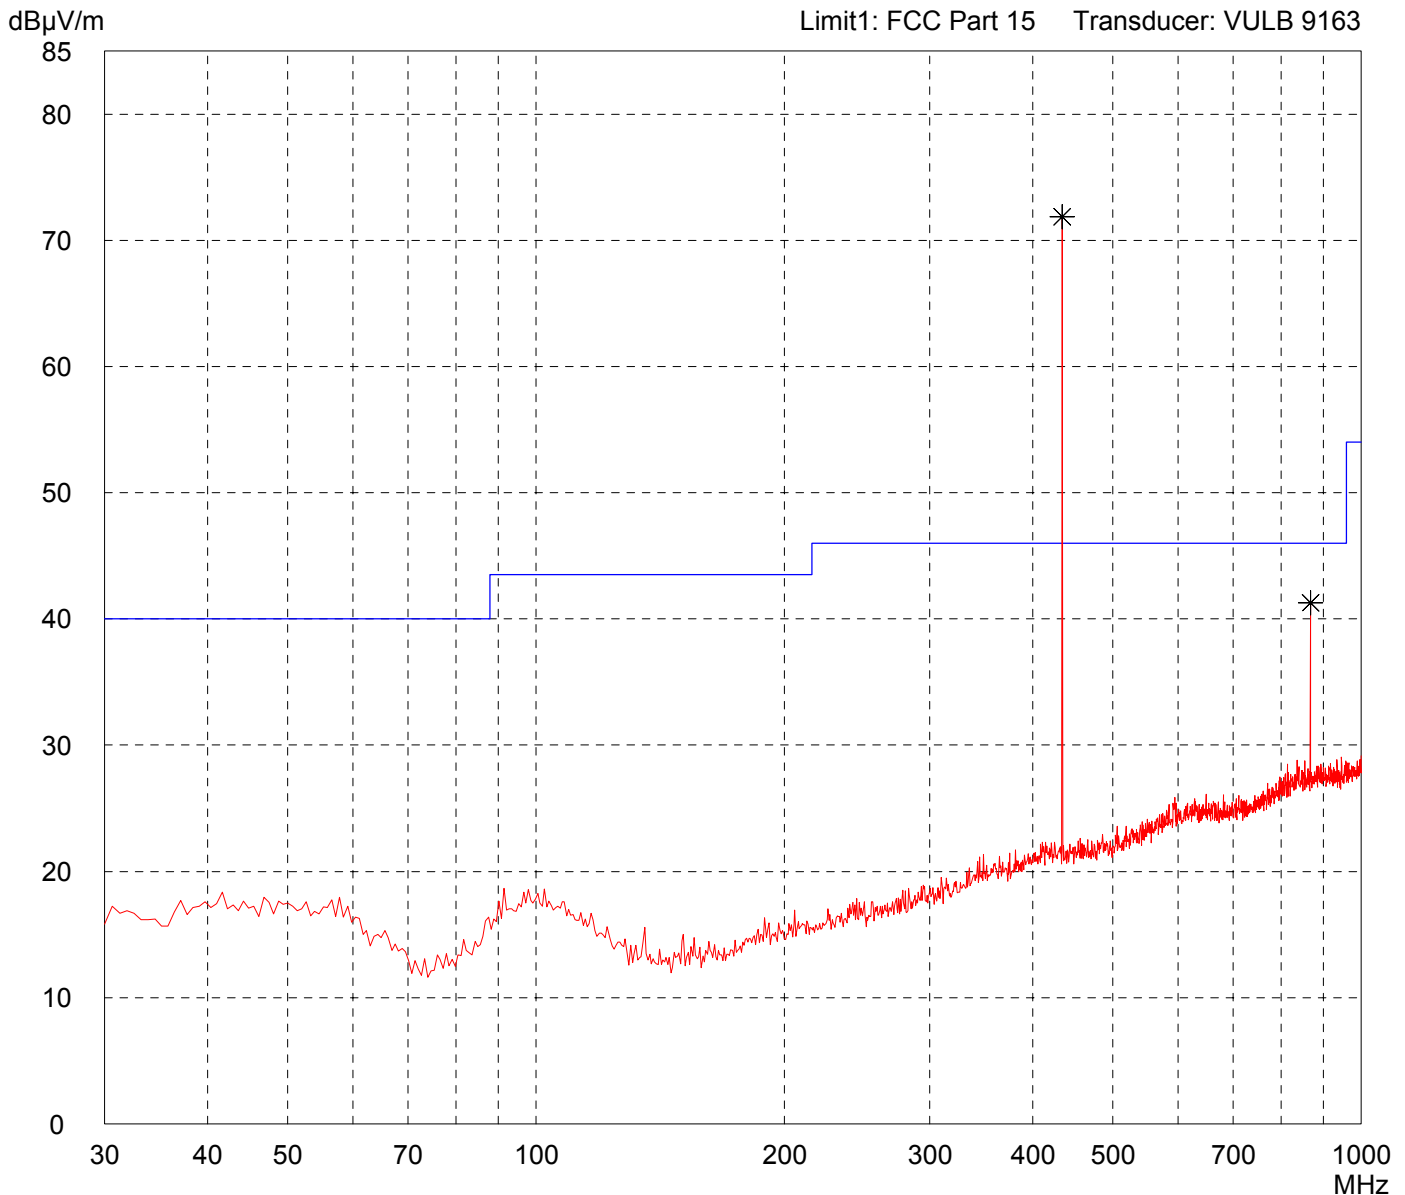


Result: Limit kept	Project file: 56502-40192
	Page of Pages

Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: Sesam 506	Comment: - TX mode - EUT in horizontal position - right side on table (2)
Serial no.: #1	
Applicant: Akerströms Björbo AB	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 03/24/2004	Operator: T. Eberl
Test performed: automatically	File name: default.emi

Detector: Peak	List of values: <div style="display: flex; justify-content: space-between;"> 10 dB Margin 50 Subranges </div>
--------------------------	--

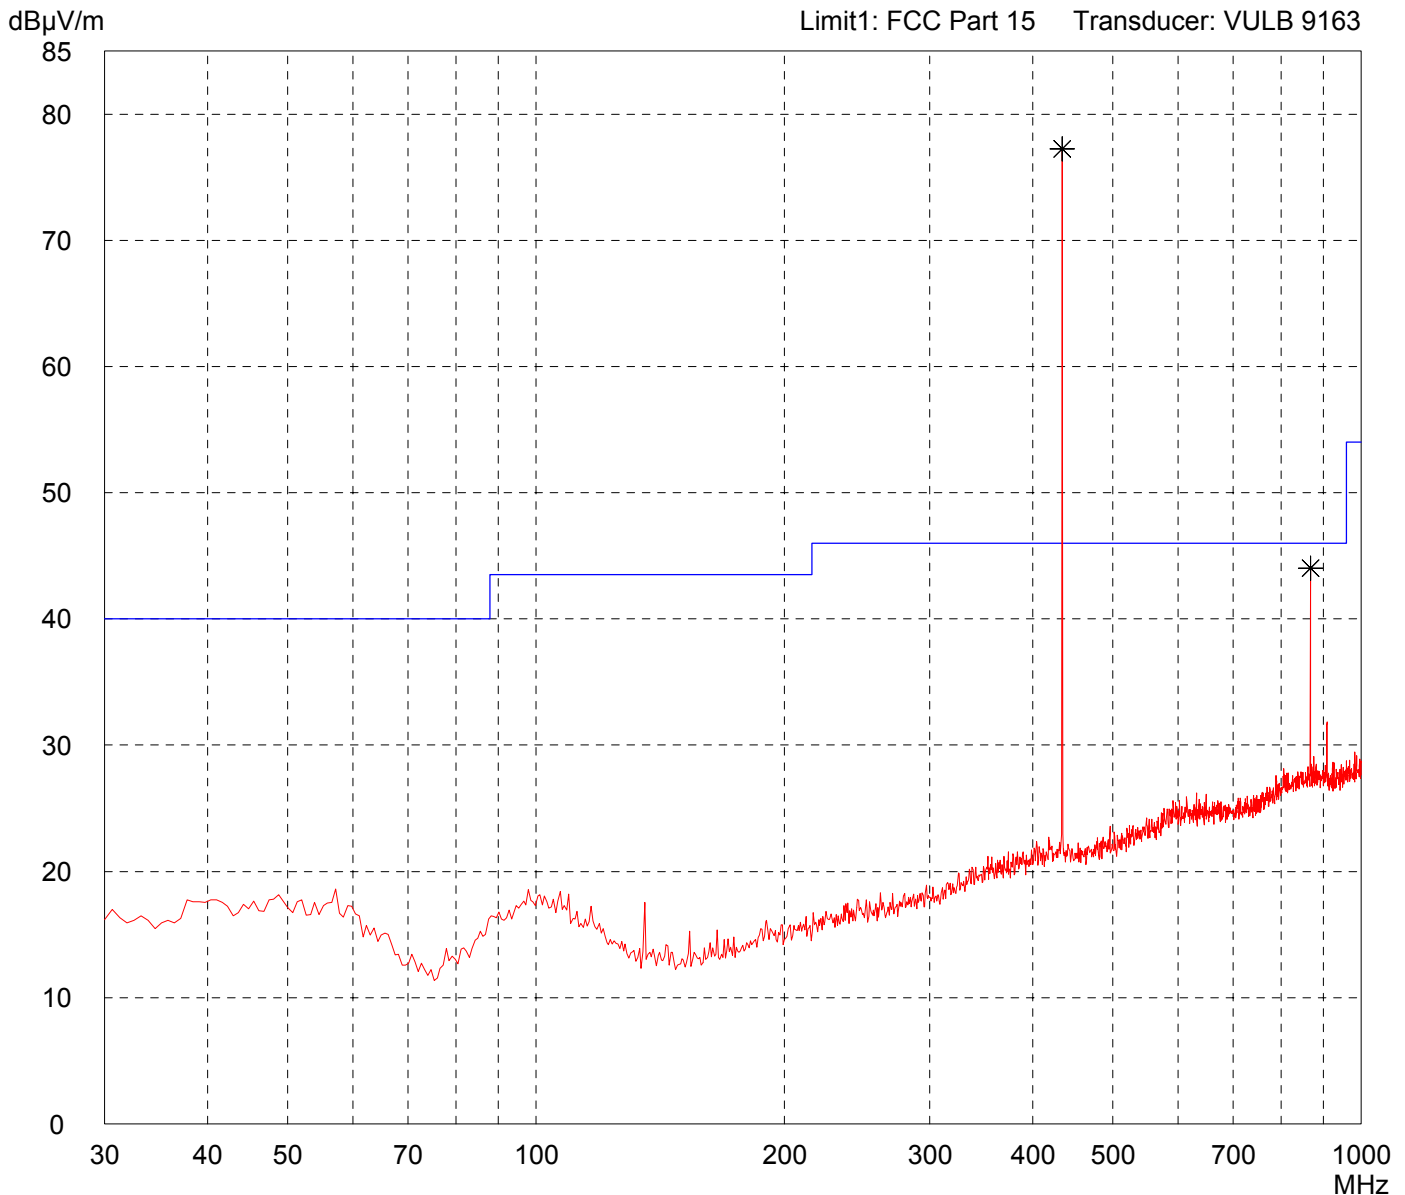


Result: Prescan	Project file: 56502-40192
	Page of Pages

Radiated Emission Test 30 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: Sesam 506	Comment: - TX mode - EUT in vertical position (3)
Serial no.: #1	
Applicant: Akerströms Björbo AB	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 03/24/2004	Operator: T. Eberl
Test performed: automatically	File name: default.emi

Detector: Peak	List of values: 10 dB Margin
	50 Subranges

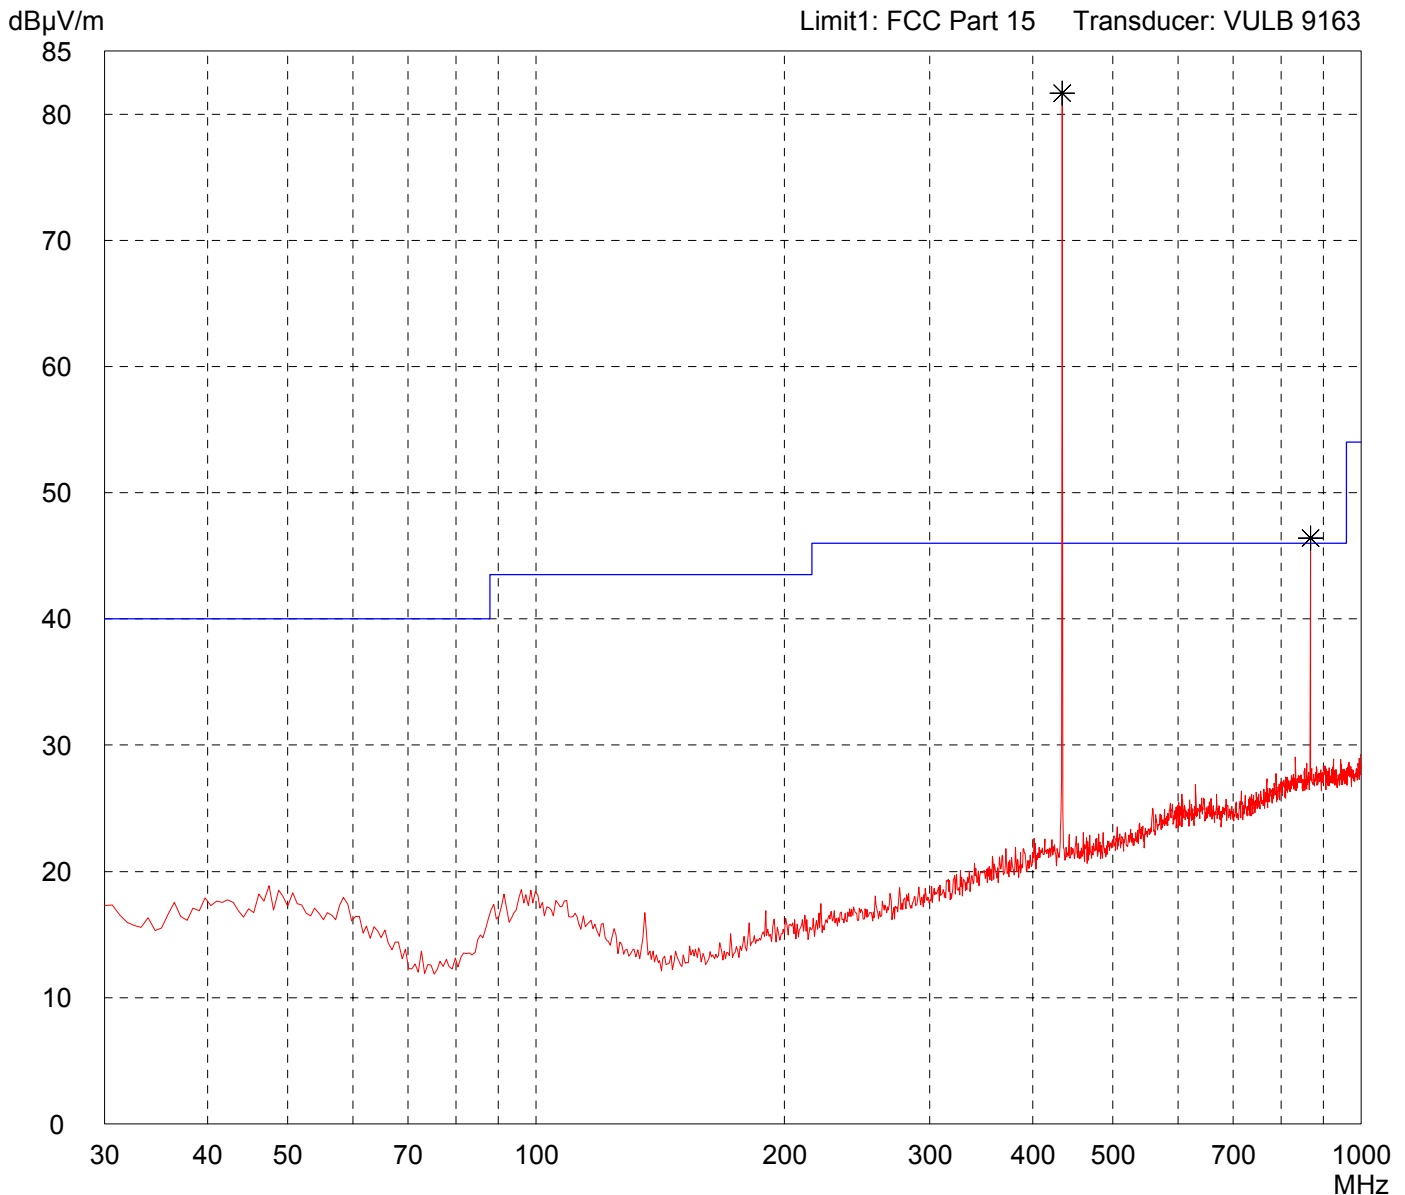


Result: Prescan	Project file: 56502-40192
	Page of Pages

Radiated Emission Test 1 GHz - 4.5 GHz acc. to FCC Part 15 (EMCO 3115)

Model: Sesam 506	Comment: - TX mode - EUT in horizontal position - rear side on table (1)
Serial no.: #1	
Applicant: Akerströms Björbo AB	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 03/24/2004	Operator: T. Eberl
Test performed: automatically	File name: default.emi

Detector: Peak	List of values: Selected by hand
--------------------------	--

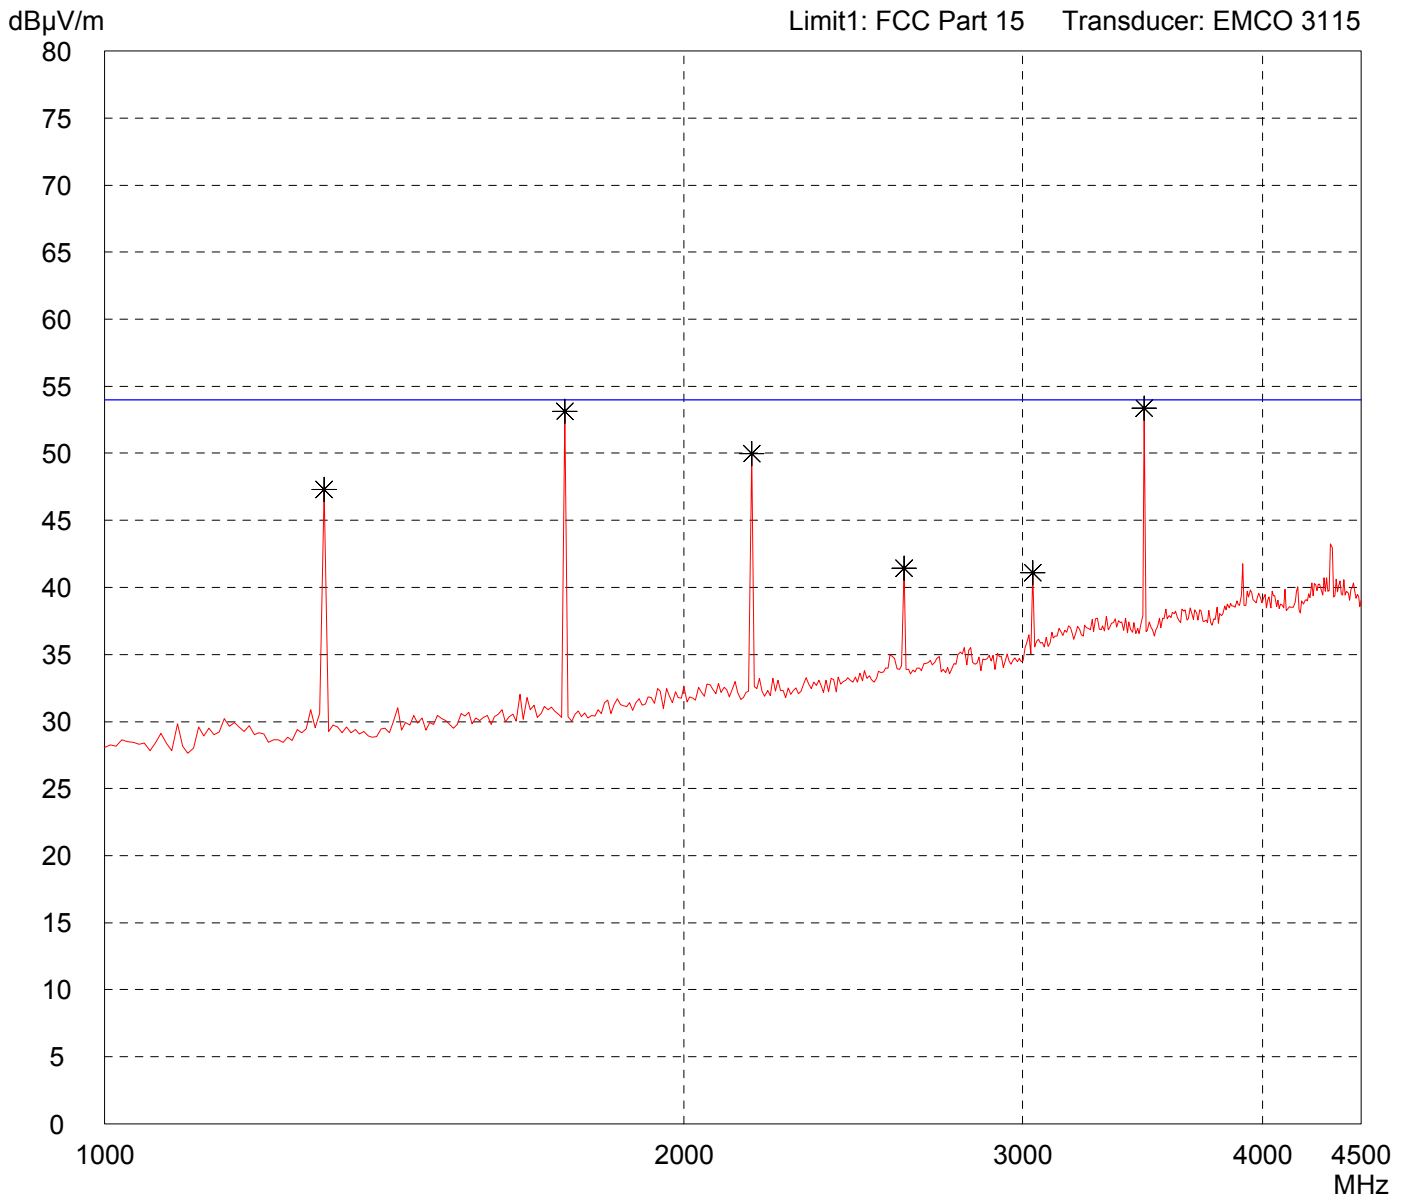


Result: Limit kept	Project file: 56502-40192
	Page of Pages

Radiated Emission Test 1 GHz - 4.5 GHz acc. to FCC Part 15 (EMCO 3115)

Model: Sesam 506	Comment: - TX mode - EUT in horizontal position - right side on table (2)
Serial no.: #1	
Applicant: Akerströms Björbo AB	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 03/24/2004	Operator: T. Eberl
Test performed: automatically	File name: default.emi

Detector: Peak	List of values: Selected by hand
--------------------------	--

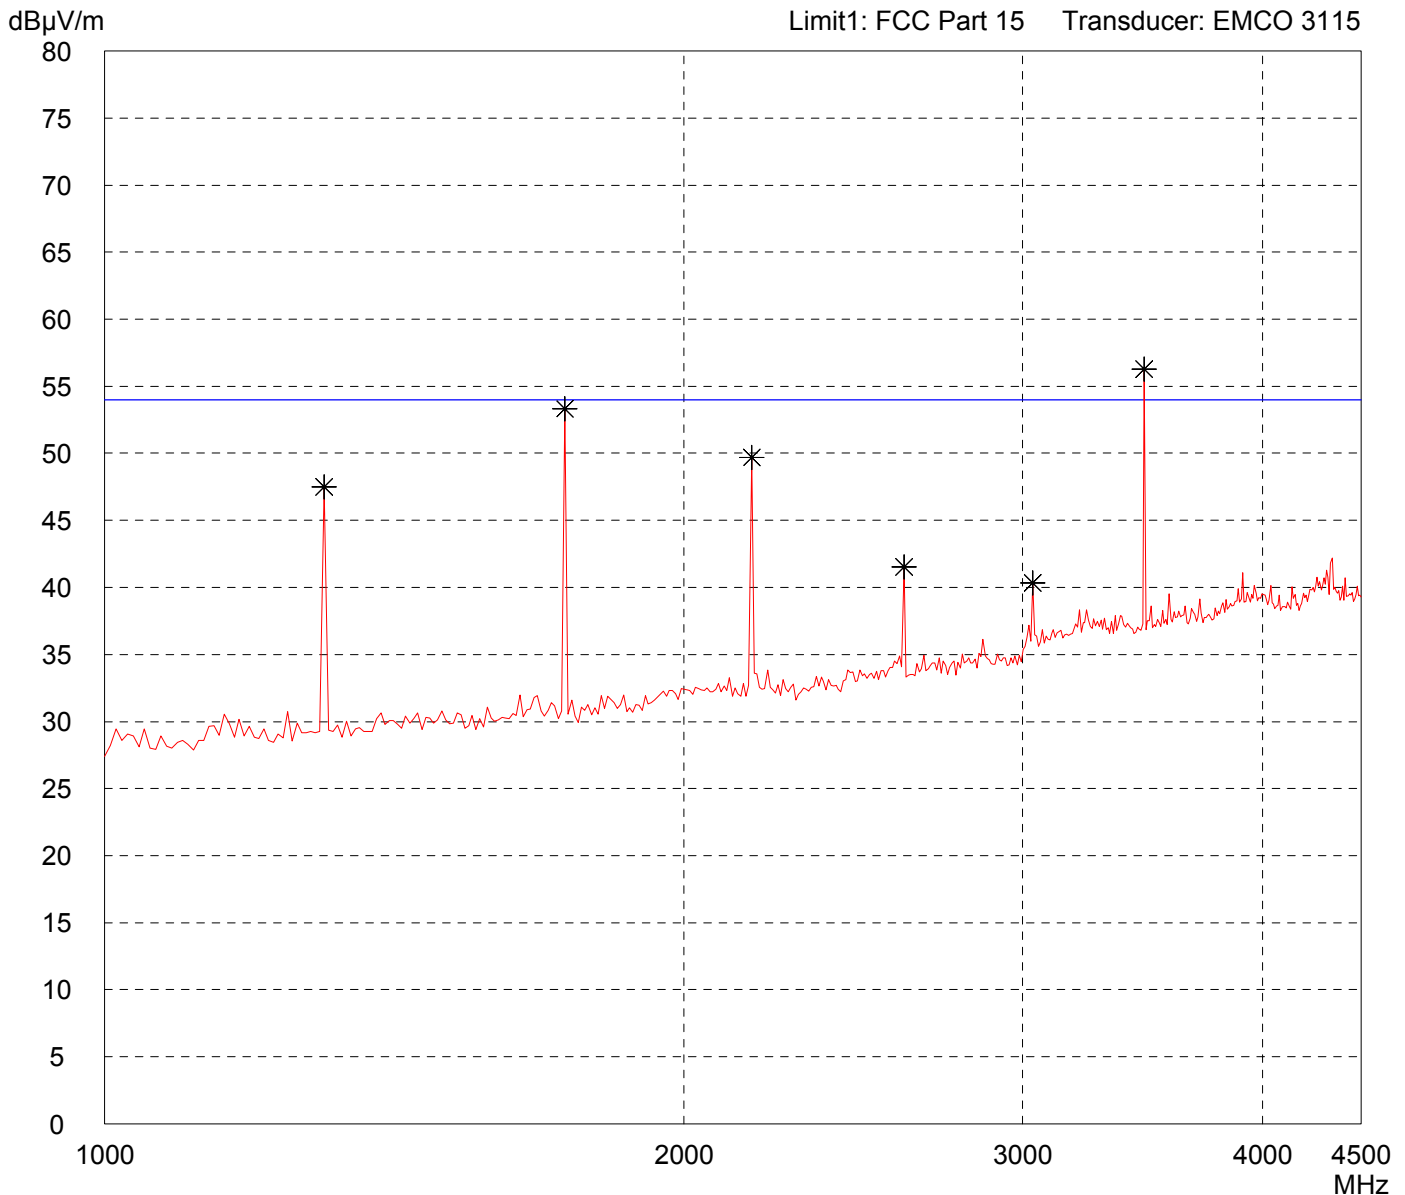


Result: Limit kept	Project file: 56502-40192
	Page of Pages

Radiated Emission Test 1 GHz - 4.5 GHz acc. to FCC Part 15 (EMCO 3115)

Model: Sesam 506	Comment: - TX mode - EUT in vertical position (3)
Serial no.: #1	
Applicant: Akerströms Björbo AB	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 03/24/2004	Operator: T. Eberl
Test performed: automatically	File name: default.emi

Detector: Peak	List of values: Selected by hand
--------------------------	--

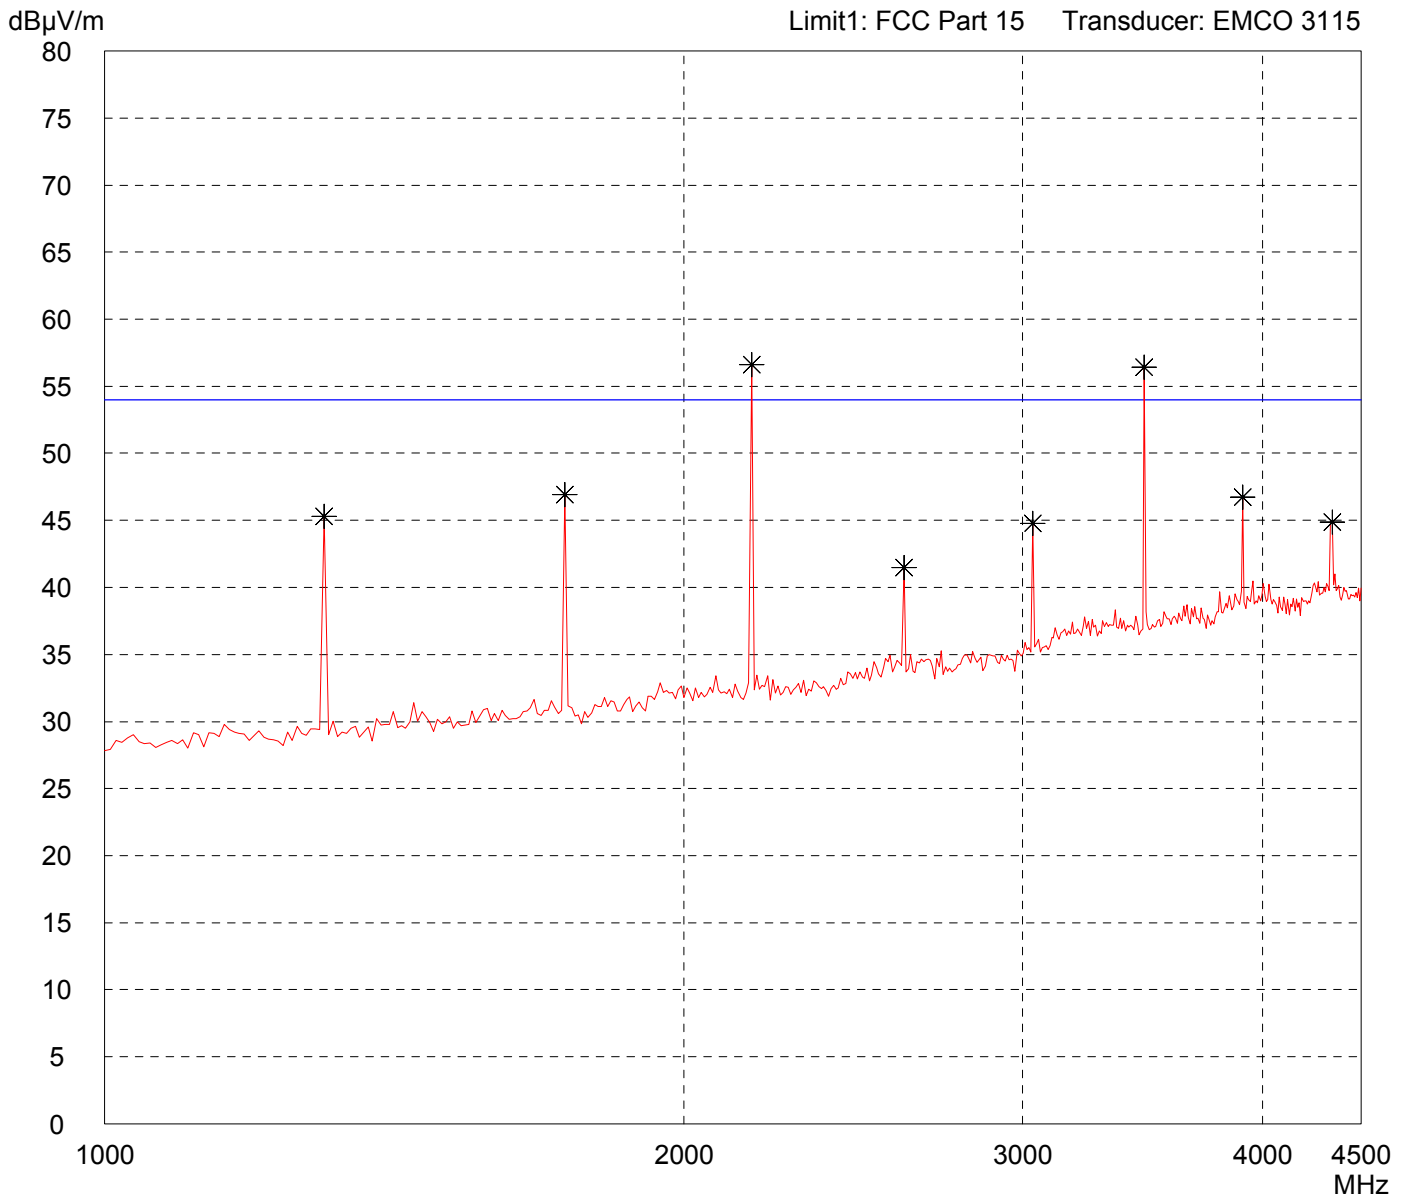


Result: Limit kept	Project file: 56502-40192
	Page of Pages

Radiated Emission Test 1 GHz - 4.5 GHz acc. to FCC Part 15 (EMCO 3115)

Model: Sesam 506	Comment: - TX mode - EUT in horizontal position - rear side on table (1)
Serial no.: #1	
Applicant: Akerströms Björbo AB	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 03/24/2004	Operator: T. Eberl
Test performed: automatically	File name: default.emi

Detector: Peak	List of values: Selected by hand
--------------------------	--

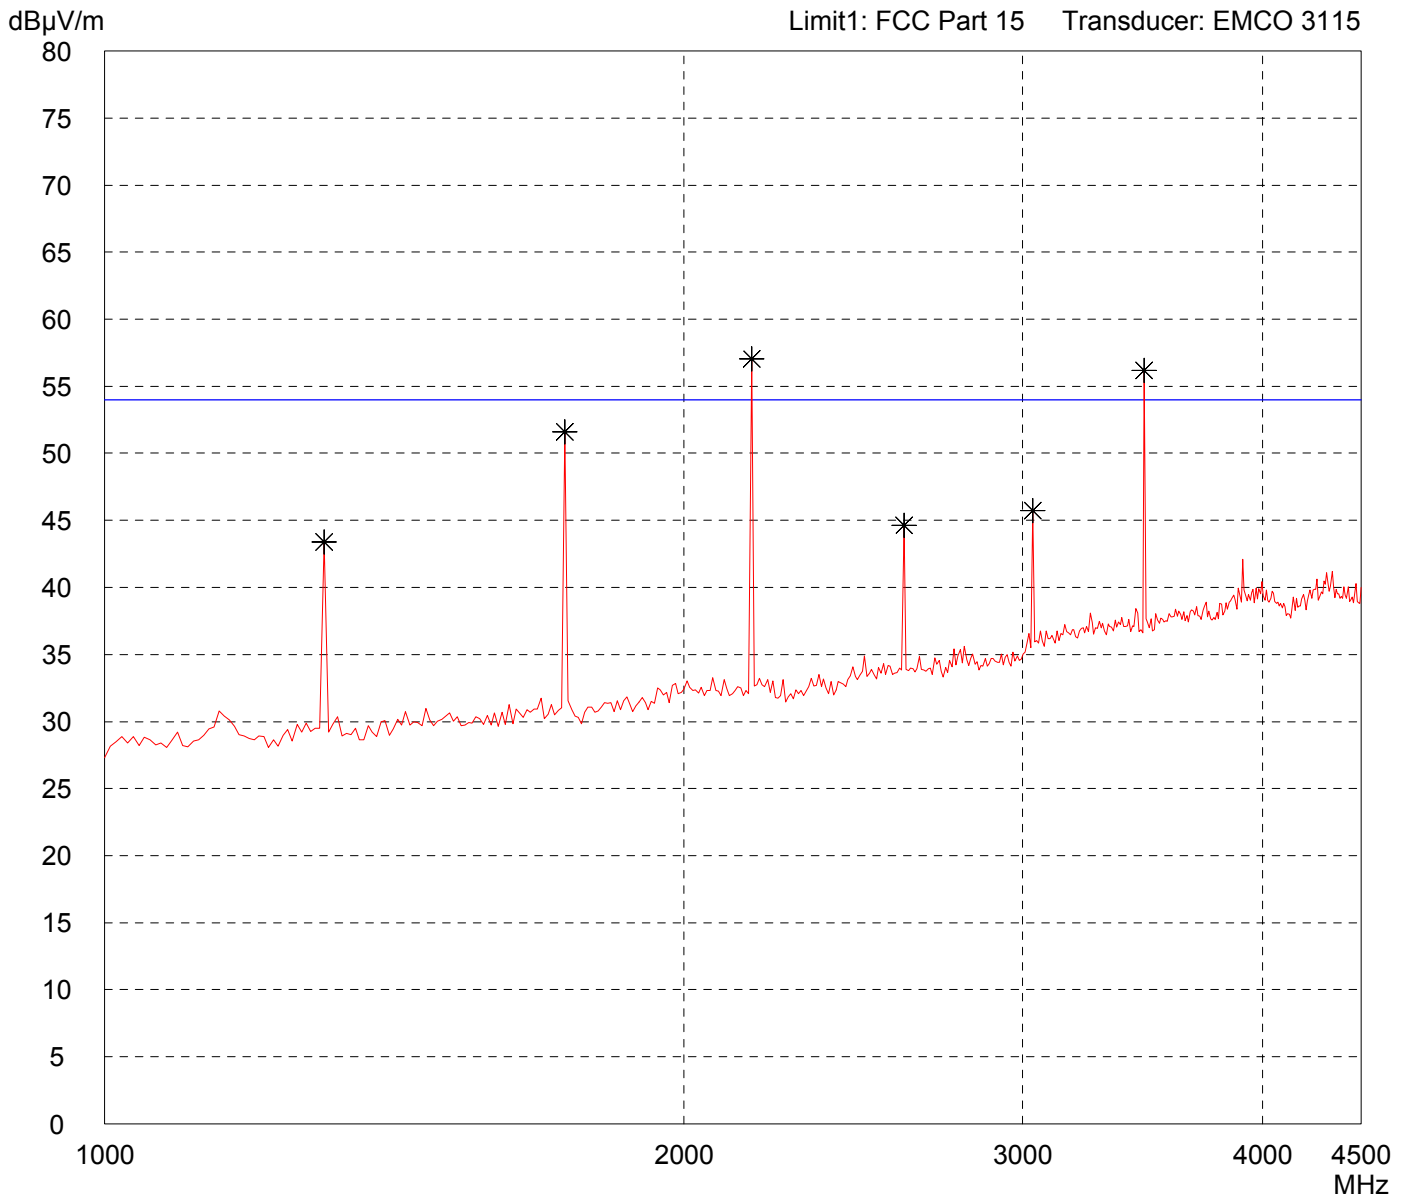


Result: Limit kept	Project file: 56502-40192
	Page of Pages

Radiated Emission Test 1 GHz - 4.5 GHz acc. to FCC Part 15 (EMCO 3115)

Model: Sesam 506	Comment: - TX mode - EUT in horizontal position - right side on table (2)
Serial no.: #1	
Applicant: Akerströms Björbo AB	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 03/24/2004	Operator: T. Eberl
Test performed: automatically	File name: default.emi

Detector: Peak	List of values: Selected by hand
--------------------------	--

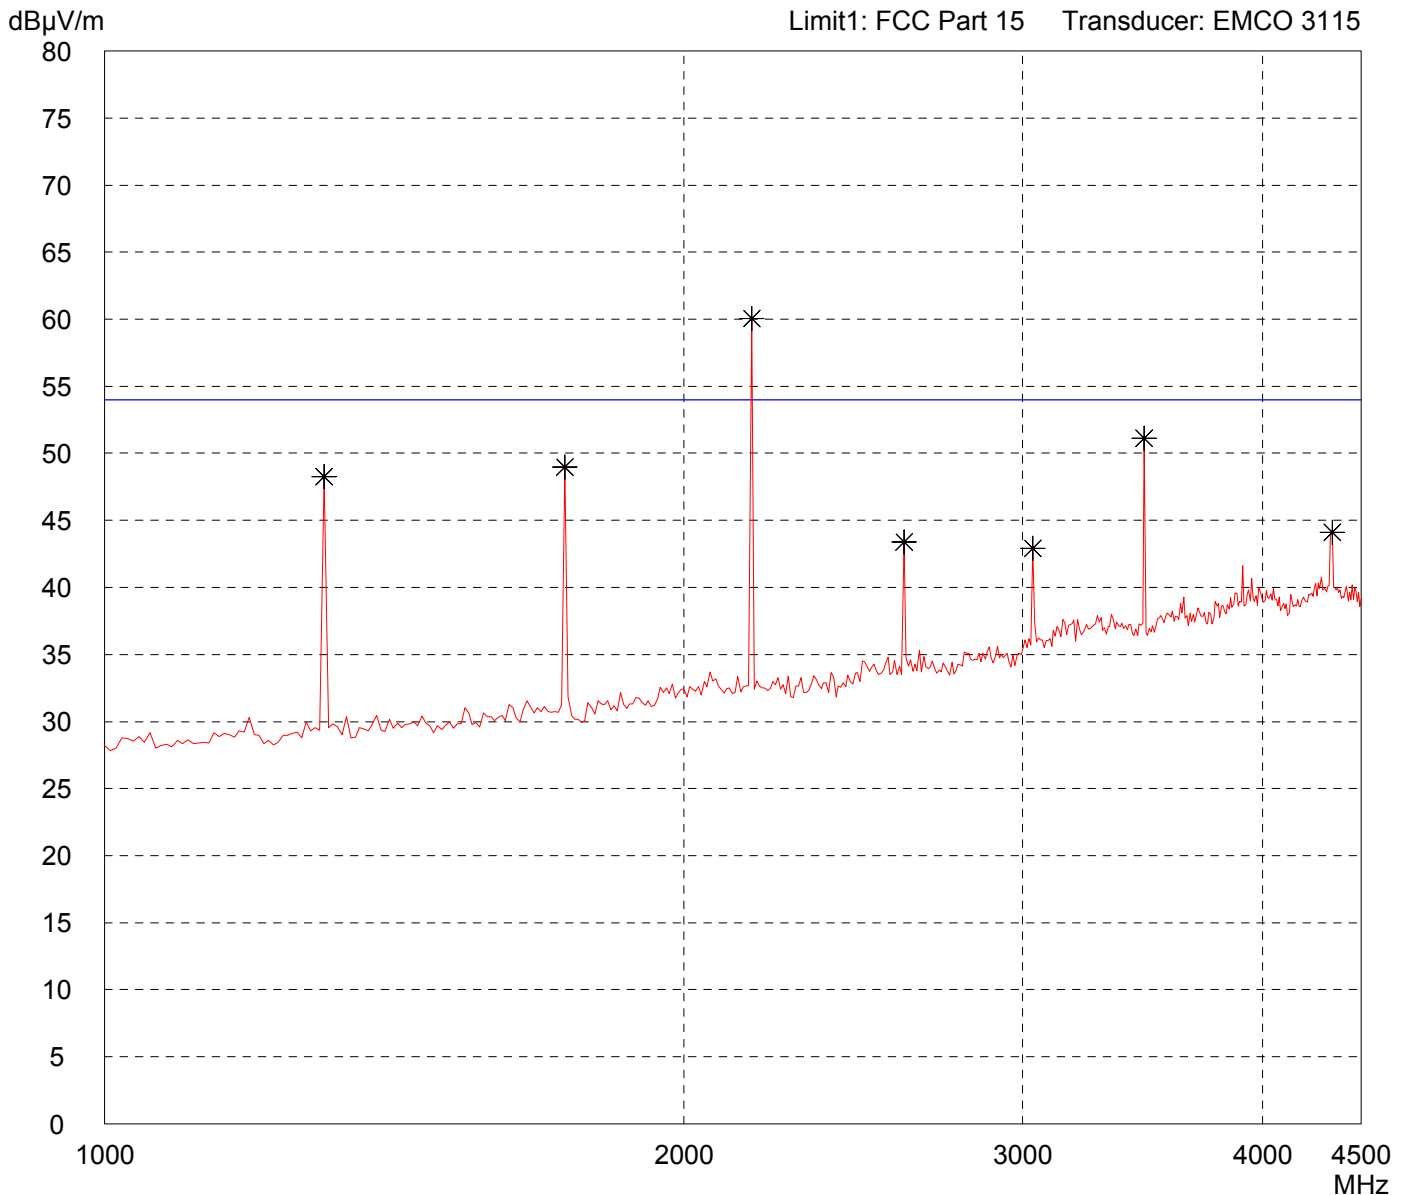


Result: Limit kept (with duty circle)	Project file: 56502-40192
	Page of Pages

Radiated Emission Test 1 GHz - 4.5 GHz acc. to FCC Part 15 (EMCO 3115)

Model: Sesam 506	Comment: - TX mode - EUT in vertical position (3)
Serial no.: #1	
Applicant: Akerströms Björbo AB	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 03/24/2004	Operator: T. Eberl
Test performed: automatically	File name: default.emi

Detector: Peak	List of values: Selected by hand
--------------------------	--

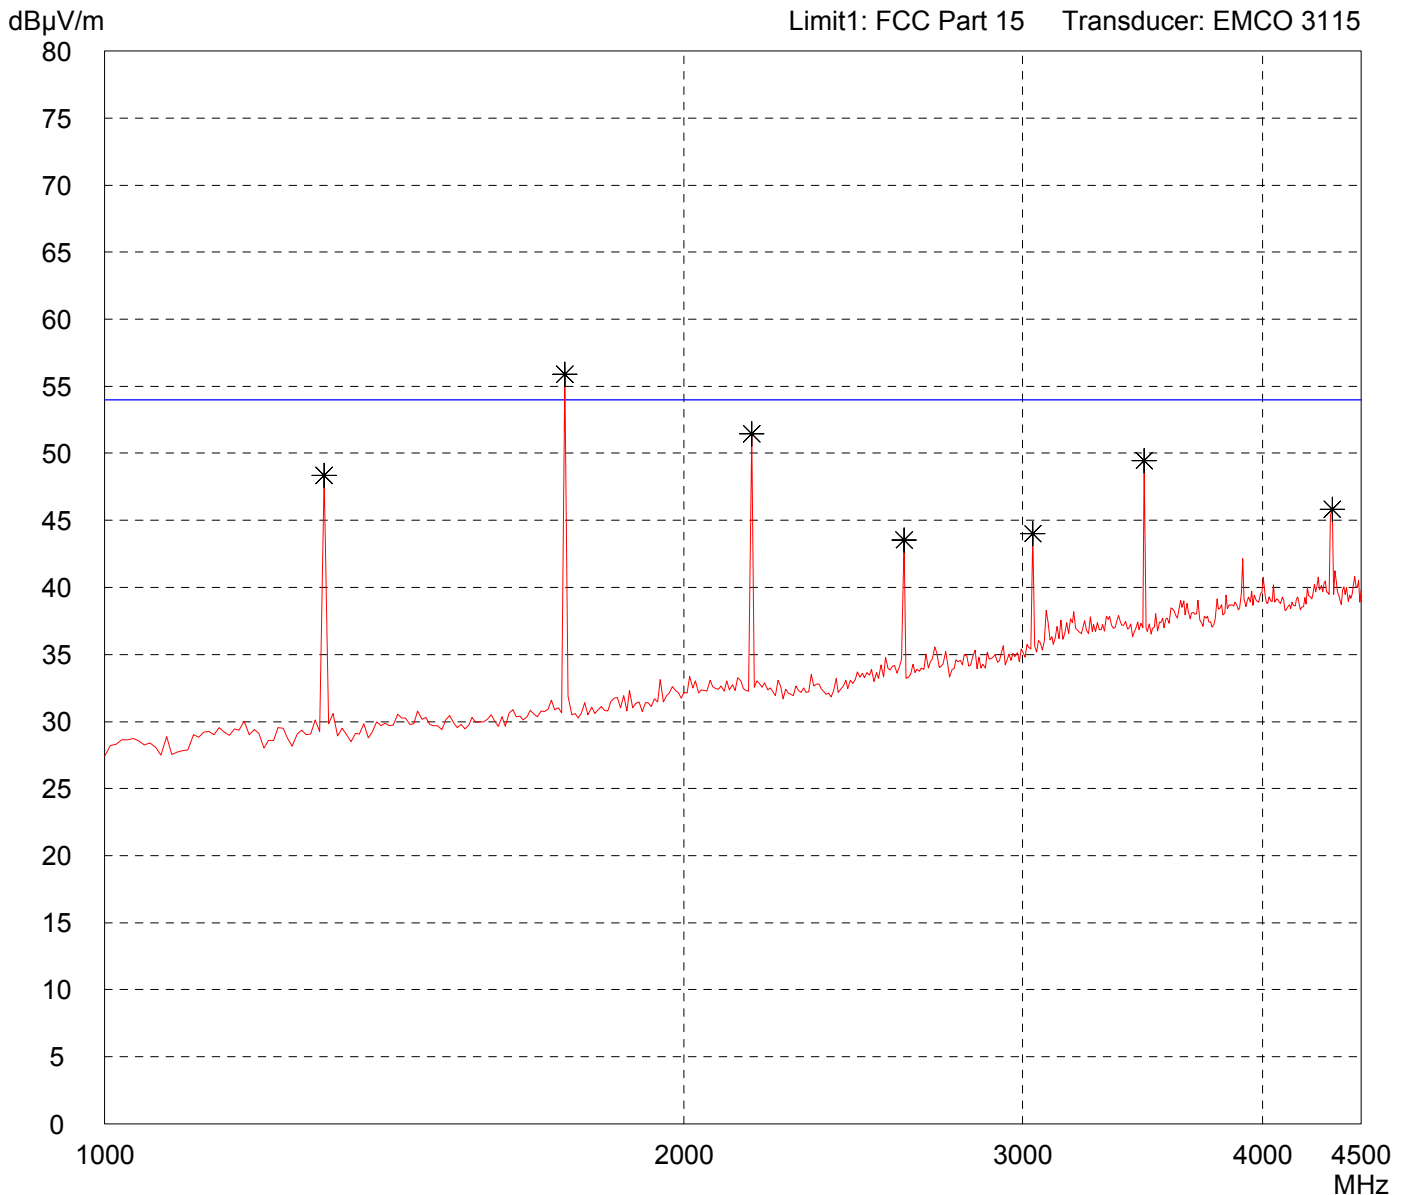

Result: Limit kept	Project file: 56502-40192
	Page of Pages