

TEST REPORT

of

FCC Part 15 Subpart C

☒ New Application; ☐ Class I PC; ☐ Class II PC

Product Name: Pyxis AIO Panel
Brand Name N/A
Model Name: 351300-XX
Model Different: Where x is 0-9 , A-Z , a-z , -or blank for marketing purpose
FCC ID: OHB351300
FCC Rule Part: §15.247, Cat: DSS
Applicant: AAEON Technology Inc
Address: 5F, No.135, Lane 235, Pao Chiao Rd.
Hsin-Tien Dist, New Taipei City , Taiwan,
R.O.C.

Test Performed by:

International Standards Laboratory

<Lung-Tan LAB>

*Site Registration No.

BSMI: SL2-IN-E-0013; MRA TW1036; TAF: 0997; IC: IC4067B-3;

*Address:

No. 120, Lane 180, San Ho suen, Hsin Ho Rd.

Lung-Tan Hsiang, Tao Yuan County 325, Taiwan

*Tel : 886-3-407-1718; Fax: 886-3-407-1738

Report No.: **ISL-13LR73FCB**

Issue Date : **2013/05/10**

Test results given in this report apply only to the specific sample(s) tested and are traceable to national or international standard through calibration of the equipment and evaluating measurement uncertainty herein.

This report MUST not be used to claim product endorsement by TAF, NVLAP or any agency of the Government.

This test report shall not be reproduced except in full, without the written approval of International Standards Laboratory.



VERIFICATION OF COMPLIANCE

Applicant: AAEON Technology Inc
Product Description: Pyxis AIO Panel
Brand Name: N/A
Model Name: 351300-XX
Model Different: Where x is 0-9 , A-Z , a-z , -or blank for marketing purpose
FCC ID: OHB351300
FCC Rule Part: §15.247
Date of test: 2013/04/24 ~ 2013/05/09
Date of EUT Received: 2013/04/24

We hereby certify that:

All the tests in this report have been performed and recorded in accordance with the standards described above and performed by an independent electromagnetic compatibility consultant, International Standards Laboratory.

The test results contained in this report accurately represent the measurements of the characteristics and the energy generated by sample equipment under test at the time of the test. The sample equipment tested as described in this report is in compliance with the limits of above standards.

Test By:	 _____ Dion Chang / Engineer	Date:	2013/05/10 _____
Prepared By:	 _____ Gigi Yeh / Specialist	Date:	2013/05/10 _____
Approved By:	 _____ Vincent Su / Technical Manager	Date:	2013/05/10 _____

Version

Version No.	Date	Description
00	2013/05/10	Initial creation of document

Table of Contents

1. GENERAL INFORMATION	6
1.1. Related Submittal(s) / Grant (s)	8
1.2. Test Methodology	8
1.3. Test Facility	8
1.4. Special Accessories	8
1.5. Equipment Modifications	8
2. SYSTEM TEST CONFIGURATION	9
2.1. EUT Configuration	9
2.2. EUT Exercise	9
2.3. Test Procedure	9
2.4. Configuration of Tested System	10
3. SUMMARY OF TEST RESULTS	11
4. DESCRIPTION OF TEST MODES	11
5. AC POWER LINE CONDUCTED EMISSION TEST	12
5.1. Standard Applicable:	12
5.2. Measurement Equipment Used:	12
5.3. EUT Setup:	13
5.4. Measurement Procedure:	13
5.5. Measurement Result:	14
6. PEAK OUTPUT POWER MEASUREMENT	16
6.1. Standard Applicable:	16
6.2. Measurement Equipment Used:	16
6.3. Test Set-up:	16
6.4. Measurement Procedure:	16
6.5. Measurement Result:	17
7. 100KHz BANDWIDTH OF BAND EDGES MEASUREMENT	18
7.1. Standard Applicable:	18
7.2. Measurement Equipment Used:	18
7.3. Test SET-UP:	19
7.4. Measurement Procedure:	20
7.5. Field Strength Calculation	20
7.6. Measurement Result:	20
8. SPURIOUS EMISSION TEST	27
8.1. Standard Applicable:	27
8.2. Measurement Equipment Used:	27
8.3. Test SET-UP:	27

8.4.	Measurement Procedure:	27
8.5.	Field Strength Calculation	28
8.6.	Measurement Result:	28
9.	FREQUENCY SEPARATION	38
9.1.	Standard Applicable:	38
9.2.	Measurement Equipment Used:	38
9.3.	Test Set-up:	38
9.4.	Measurement Procedure:	38
9.5.	Measurement Result:	38
10.	NUMBER OF HOPPING FREQUENCY	40
10.1.	Standard Applicable:	40
10.2.	Measurement Equipment Used:	40
10.3.	Test Set-up:	40
10.4.	Measurement Procedure:	40
10.5.	Measurement Result:	40
11.	TIME OF OCCUPANCY (DWELL TIME)	42
11.1.	Standard Applicable:	42
11.2.	Measurement Equipment Used:	42
11.3.	Test Set-up:	42
11.4.	Measurement Procedure:	42
11.5.	Measurement Result:	42
12.	20dB Bandwidth.....	48
12.1.	Standard Applicable:	48
12.2.	Measurement Equipment Used:	48
12.3.	Test Set-up:	48
12.4.	Measurement Procedure:	48
12.5.	Measurement Result:	49
13.	ANTENNA REQUIREMENT	56
13.1.	Standard Applicable:	56
13.2.	Antenna Connected Construction:	56
14.	RF EXPOSURE	57
14.1.	Standard Applicable	57
14.2.	Maximum Permissible Exposure (MPE) Evaluation	58

1. GENERAL INFORMATION

General:

Product Name	Pyxis AIO Panel
Brand Name	N/A
Model Name	351300-XX
Model Difference	Where x is 0-9 , A-Z , a-z , -or blank for marketing purpose
Docking assembly	Model name: 351253-xx
Power Supply	DC12V form AC/DC Adapter Model No.: EA11001F-240

WLAN: 1TX/1RX:

Frequency Range:	802.11b/g/n HT20: 2412 – 2462MHz 802.11n HT40: 2422 – 2452MHz
Channel number:	802.11b/g/n HT20: 11 channels 802.11n HT40: 7 channels
Transmit Power(Peak):	802.11b: 17.99dBm 802.11g: 20.21dBm 802.11n HT20: 19.81dBm 802.11n HT40: 20.13dBm
Modulation Technology	11b/g: DSSS, OFDM 11n: OFDM
Modulation type:	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
Transition Rate:	802.11 b: 1/2/5.5/11 Mbps 802.11 g: 6/9/12/18/24/36/48/54 Mbps 802.11 n HT20MHz: 6.5 – 65Mbps 802.11 n HT40MHz: 13.5 – 135Mbps
Antenna Designation:	Dipole Antenna: 2.87 dBi;P/N: PFA-02-P33-70-200-K Dipole Antenna, 2.82dBi ;P/N: PFA-02-P33-70B-350-K

The EUT is compliance with IEEE 802.11 b/g/n Standard.

Bluetooth: 1TX

Bluetooth Version	V2.1 + EDR (GFSK + $\pi/4$ DQPSK + 8DPSK)	V4.0(GFSK)
Frequency Range:	2402 – 2480MHz	2402 – 2480MHz
Channel number:	79 channels	40 channels
Modulation type:	Frequency Hopping Spread Spectrum	Digital Modulation (Direct Sequence Spread Spectrum)
Transmit Power: (Peak)	5.50 dBm	2.87dBm
Dwell Time:	$\leq 0.4s$	N/A
Operating Mode:	Point-to-Point	
Antenna Designation:	Dipole Antenna: 2.87 dBi;P/N: PFA-02-P33-70-200-K Dipole Antenna, 2.82dBi ;P/N: PFA-02-P33-70B-350-K	

The EUT is compliance with Bluetooth EDR V2.1 +V4.0 Standard.

This test report applies for Bluetooth V2.1 + EDR function.

Remark: The above DUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.1. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: OHB351300** filing to comply with Section 15.247 of the FCC Part 15C, Subpart C Rules.

1.2. Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 (2003). Radiated testing was performed at an antenna to EUT distance 3 meters.

Tested in accordance with FCC Public Notice DA 00-705

1.3. Test Facility

The measurement facilities used to collect the 3m Radiated Emission and AC power line conducted data are located on the address of **International Standards Laboratory** <Lung-Tan LAB> No. 120, Lane 180, San Ho Tsuen, Hsin Ho Rd., Lung-Tan Hsiang, Tao Yuan County 325, Taiwan which are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003. FCC Registration Number is: TW1036, Canada Registration Number: 4067B-3.

1.4. Special Accessories

Not available for this EUT intended for grant.

1.5. Equipment Modifications

Not available for this EUT intended for grant.

2. SYSTEM TEST CONFIGURATION

2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2. EUT Exercise

The EUT (Transmitter) was tested with a test program to fix the Tx/RX frequency that was for the purpose of the measurements. For more information please see test data and APPENDIX 1 for set-up photographs.

2.3. Test Procedure

2.3.1 Conducted Emissions

The EUT is placed on a turn table which is 0.8 m above ground plane. According to the requirements in Section 7, 13 of ANSI C63.4-2003. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and Average detector mode.

2.3.2 Radiated Emissions

The EUT is placed on a turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made “while keeping the antenna in the ‘cone of radiation’ from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response.” is still within the 3dB illumination BW of the measurement antenna. according to the requirements in Section 8 and 13 of ANSI C63.4-2003 and DA 00-705.

2.4. Configuration of Tested System

Fig. 2-1 Configuration of Tested System (Fixed channel)

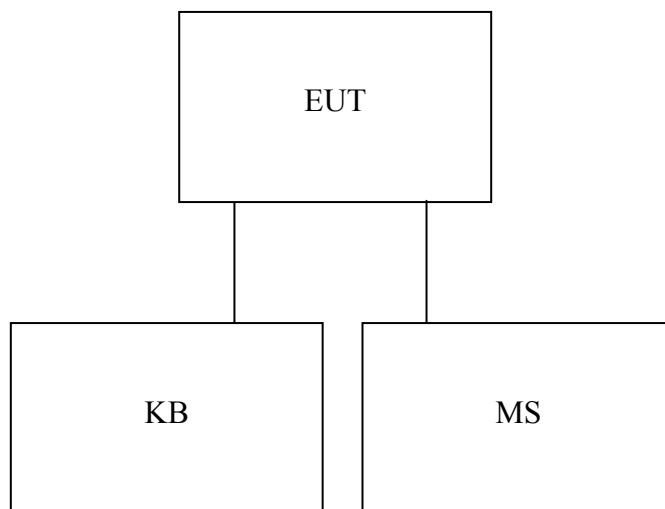


Table 2-1 Equipment Used in Tested System

Item	Equipment	Mrf/Brand	Model name	Series No	Data Cable	Power Cable
1	KB	DELL	SK-8115	N/A	Shield	N/A
2	MS	DELL	MO56UC	N/A	No- Shiel- ding	N/A

3. SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
§15.207(a)	AC Power line Conducted Emission	Compliant
§15.247(b)(1)	Peak Output Power	Compliant
§15.247(d)	100 KHz Bandwidth Of Frequency Band Edges	Compliant
§15.247(c)	Spurious Emission	Compliant
§15.247(a)(1)	Frequency Separation	Compliant
§15.247(a)(1)(iii)	Number of hopping frequency	Compliant
§15.247(a)(1)(ii)	Time of Occupancy	Compliant
§15.247	Peak Power Density	Compliant
§15.247(a)(1)	20dB Bandwidth	Compliant
§15.203, §15.247(c)	Antenna Requirement	Compliant
§2.1091	RF EXPOSURE	Compliant

4. DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel low (2402MHz), mid (2441MHz) and high (2480MHz) with each data rate are chosen for full testing.

The worst case of EDR 3M mode was reported for Radiated Spurious Emission.

5. AC POWER LINE CONDUCTED EMISSION TEST

5.1. Standard Applicable:

According to §15.207, frequency range within 150KHz to 30MHz shall not exceed the Limit table as below.

Frequency range MHz	Limits dB(uV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Note

- 1.The lower limit shall apply at the transition frequencies
- 2.The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

5.2. Measurement Equipment Used:

AC Power Line Test Site					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
EMI Test Receiver	ROHDE & SCHWARZ	ESCI7	100877	10/25/2012	10/25/2013
LISN 16	ROHDE & SCHWARZ	ESH3-Z6	100795	10/20/2012	10/20/2013
LISN 17	ROHDE & SCHWARZ	ESH3-Z6	100796	10/20/2012	10/20/2013
LISN 18	ROHDE & SCHWARZ	ENV216	101424	03/13/2013	03/13/2014
LISN 19	ROHDE & SCHWARZ	ENV216	101425	03/13/2013	03/13/2014
INS T8 07	Teseq GmbH	ISN T800	30834	05/29/2012	05/29/2013
Conduction 04-1 Cable	WOKEN	CFD 300-NL	Conduction 04 -1	09/10/2012	09/10/2013

5.3. EUT Setup:


1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.4-2003.
2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
3. The LISN was connected with 120Vac/60Hz power source.

5.4. Measurement Procedure:

1. The EUT was placed on a table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

5.5. Measurement Result:

Operation Mode:	Operation Mode	Test Date:	2013/04/29
Test By:	Lake		

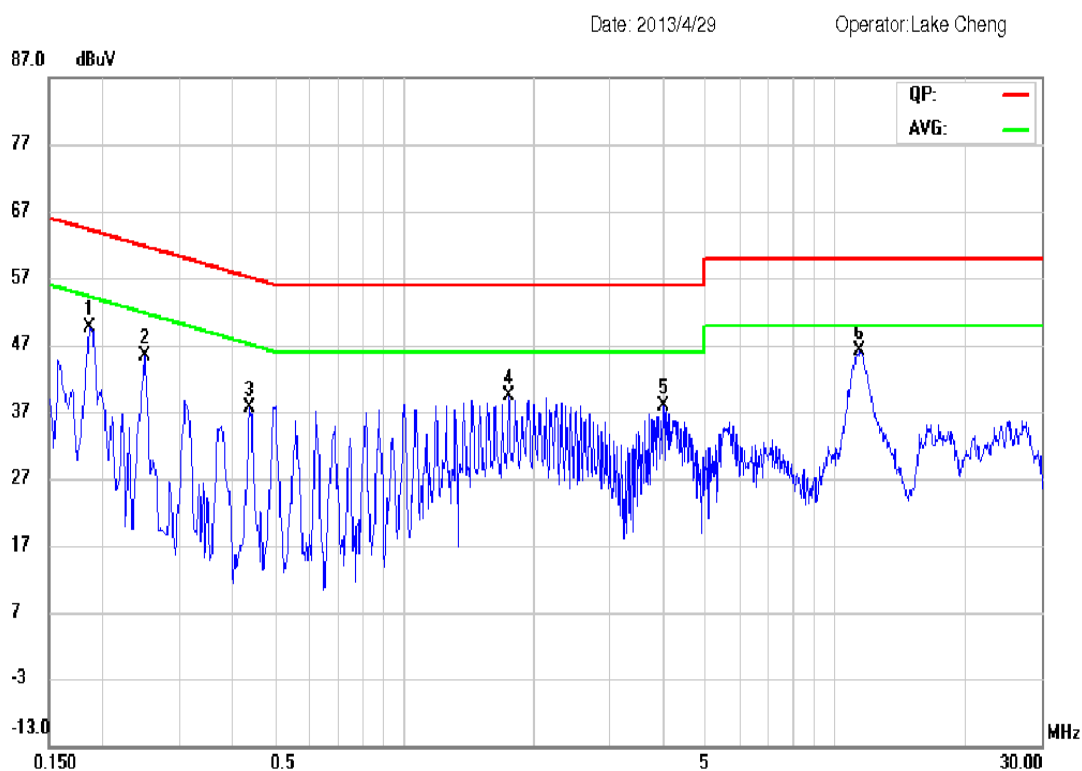

Site Conduction 04

Phase: **L1**

Temperature: 26 °C


Condition : CISPR22 Class B Conduction

Humidity: 54 %

No.	Freq. MHz	Reading_Level (dBuV)			Correct Factor (dB)	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		peak	QP	AVG	P/Q	AVG	P/Q	AVG		
1	0.1860	40.90	39.69	30.39	9.61	50.51	49.30	40.00	64.21	54.21	-14.91	-14.21		
2	0.2500	36.15	34.01	25.36	9.61	45.76	43.62	34.97	61.76	51.76	-18.14	-16.79		
3	0.4380	30.38	28.43	24.10	9.61	39.99	38.04	33.71	57.10	47.10	-19.06	-13.39		
4 *	1.7500	30.53	28.41	24.23	9.62	40.15	38.03	33.85	56.00	46.00	-17.97	-12.15		
5	4.0060	29.10	25.97	19.49	9.63	38.73	35.60	29.12	56.00	46.00	-20.40	-16.88		
6	11.4300	29.30	24.22	15.34	9.67	38.97	33.89	25.01	60.00	50.00	-26.11	-24.99		

Date: 2013/4/29

Operator: Lake Cheng

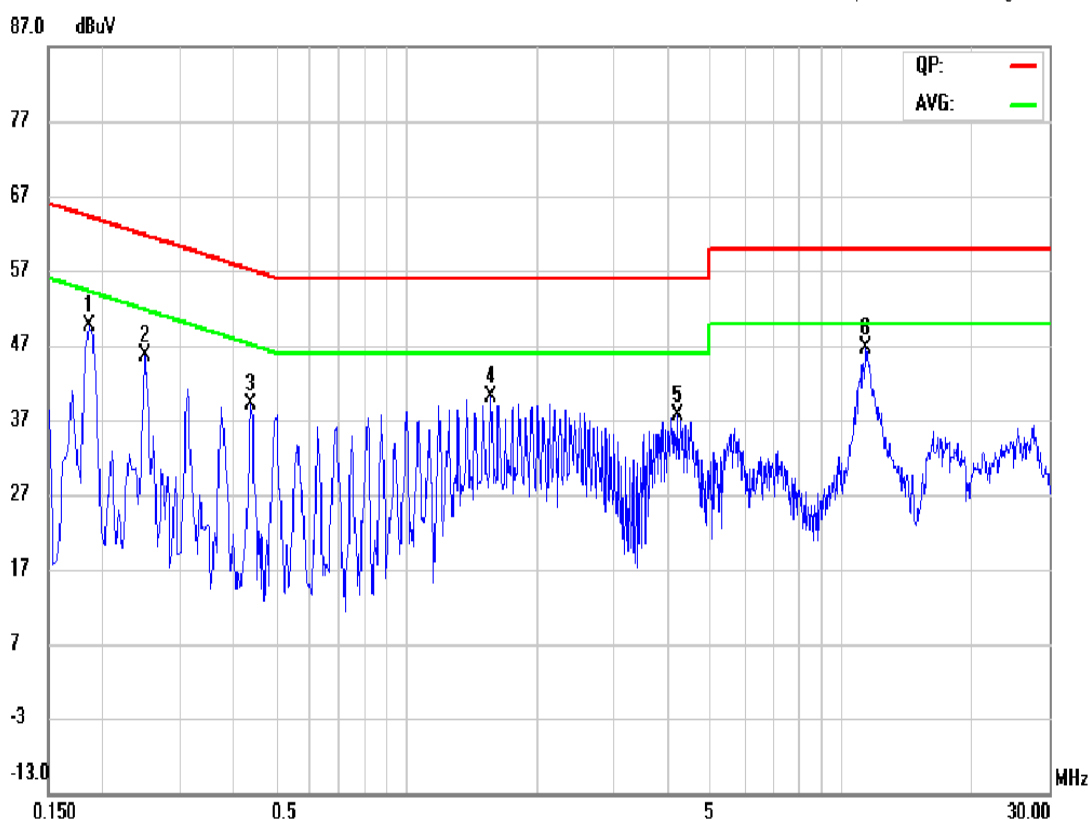

Site Conduction 04

Phase: **N**

Temperature: 26 °C

Condition : CISPR22 Class B Conduction

Humidity: 54 %

No.	Freq. MHz	Reading_Level (dBuV)			Correct Factor (dB)	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		peak	QP	AVG	P/Q	AVG	P/Q	AVG		
1	0.1860	40.59	38.94	29.74	9.58	50.17	48.52	39.32	64.21	54.21	-15.69	-14.89		
2	0.2500	36.71	34.13	25.88	9.58	46.29	43.71	35.46	61.76	51.76	-18.05	-16.30		
3	0.4380	30.04	27.61	22.87	9.58	39.62	37.19	32.45	57.10	47.10	-19.91	-14.65		
4 *	1.5660	30.80	29.00	24.71	9.60	40.40	38.60	34.31	56.00	46.00	-17.40	-11.69		
5	4.1900	29.00	26.02	17.17	9.61	38.61	35.63	26.78	56.00	46.00	-20.37	-19.22		
6	11.3940	37.97	33.31	24.21	9.69	47.66	43.00	33.90	60.00	50.00	-17.00	-16.10		

6. PEAK OUTPUT POWER MEASUREMENT


6.1. Standard Applicable:

According to §15.247(b)(1), For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, and all frequency hopping systems in the 5725-5850MHz band: 1Watt. For all other frequency hopping systems in the 2400 – 2483.5MHz band: 0.125 Watts.

6.2. Measurement Equipment Used:

Conducted Emission Test Site					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Power Meter 05	Anritsu	ML2495A	1116010	04/19/2013	04/18/2014
Power Sensor 05	Anritsu	MA2411B	34NKF50	04/19/2013	04/18/2014
Temperature Chamber	KSON	THS-B4H100	2287	03/15/2013	03/14/2014
DC Power supply	ABM	51850	N/A	06/17/2012	06/16/2013
AC Power supply	EXTECH	CFC105W	NA	12/19/2012	12/18/2013
Splitter	MCLI	PS4-199	12465	07/18/2012	07/17/2013
Spectrum analyzer	Agilent	N9030A	MY51360021	03/29/2013	03/28/2014

6.3. .Test Set-up:

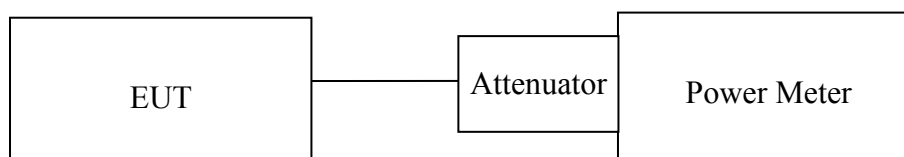

6.4. Measurement Procedure:

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter or spectrum. (Channel power function, RBW, VBW = 1MHz)
3. Record the max. reading.
4. Repeat above procedures until all frequency measured were complete.

6.5. Measurement Result:

BDR Mode

Frequency (MHz)	Reading Power (dBm)	Cable Loss	Output Power (dBm)	Output Power (W)	Limit (W)
2402.00	2.84	0.00	2.84	0.00192	1
2441.00	2.14	0.00	2.14	0.00164	1
2480.00	1.99	0.00	1.99	0.00158	1

EDR 2M Mode

Frequency (MHz)	Reading Power (dBm)	Cable Loss	Output Power (dBm)	Output Power (W)	Limit (W)
2402.00	5.05	0.00	5.05	0.00320	1
2441.00	4.41	0.00	4.41	0.00276	1
2480.00	4.14	0.00	4.14	0.00259	1

EDR 3M Mode

Frequency (MHz)	Reading Power (dBm)	Cable Loss	Output Power (dBm)	Output Power (W)	Limit (W)
2402.00	5.50	0.00	5.50	0.00355	1
2441.00	4.89	0.00	4.89	0.00308	1
2480.00	4.63	0.00	4.63	0.00290	1

offset: 9.5dB

7. 100KHz BANDWIDTH OF BAND EDGES MEASUREMENT

7.1. Standard Applicable:

According to §15.247(d), in any 100 KHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

7.2. Measurement Equipment Used:

7.2.1. Conducted Emission at antenna port:

Refer to section 6.2 for details.

7.2.2. Radiated emission:

Chamber 14(966)					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer 21(26.5GHz)	Agilent	N9010A	MY49060537	07/17/2012	07/16/2013
Spectrum Analyzer 20(6.5GHz)	Agilent	E4443A	MY48250315	05/24/2012	05/23/2013
Spectrum Analyzer 22(43GHz)	R&S	FSU43	100143	04/25/2013	04/24/2014
Loop Antenna 9K-30M	A.H.SYSTEM	SAS-564	294	03/07/2013	03/06/2015
Bilog Antenna 30-1G	Schaffner	CBL 6112B	2756	01/11/2013	01/10/2014
Horn antenna 1-18G(06)	EMCO	3117	0006665	10/15/2012	10/14/2013
Horn antenna 26-40G(05)	Com-power	AH-640	100A	01/09/2013	01/08/2015
Horn antenna 18-26G(04)	Com-power	AH-826	081001	05/04/2013	05/03/2015
Preamplifier 9-1000M	HP	8447D	NA	02/19/2013	02/18/2014
Preamplifier 1-18G	MITEQ	AFS44-001018 00-25-10P-44	1329256	07/23/2012	07/22/2013
Preamplifier 1-26G	EM	EM01M26G	NA	02/26/2013	02/25/2014
Preamplifier 26-40G	MITEQ	JS-26004000-2 7-5A	818471	05/21/2011	05/20/2013
Cable 1-18G	HUBER SUHNER	Sucoflex 106	NA	09/07/2012	09/06/2013
Cable UP to 1G	HUBER SUHNER	RG 214/U	NA	10/08/2012	10/07/2013
SUCOFLEX 1GHz~40GHz cable	HUBER SUHNER	Sucoflex 102	27963/2&3742 1/2	09/21/2011	09/20/2013
2.4G Filter	Micro-Tronics	Brm50702	76	12/27/2012	12/26/2013


7.3. Test SET-UP:

7.3.1. Conducted Emission at antenna port:


Refer to section 6.3 for details.

7.3.2. Radiated emission:

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

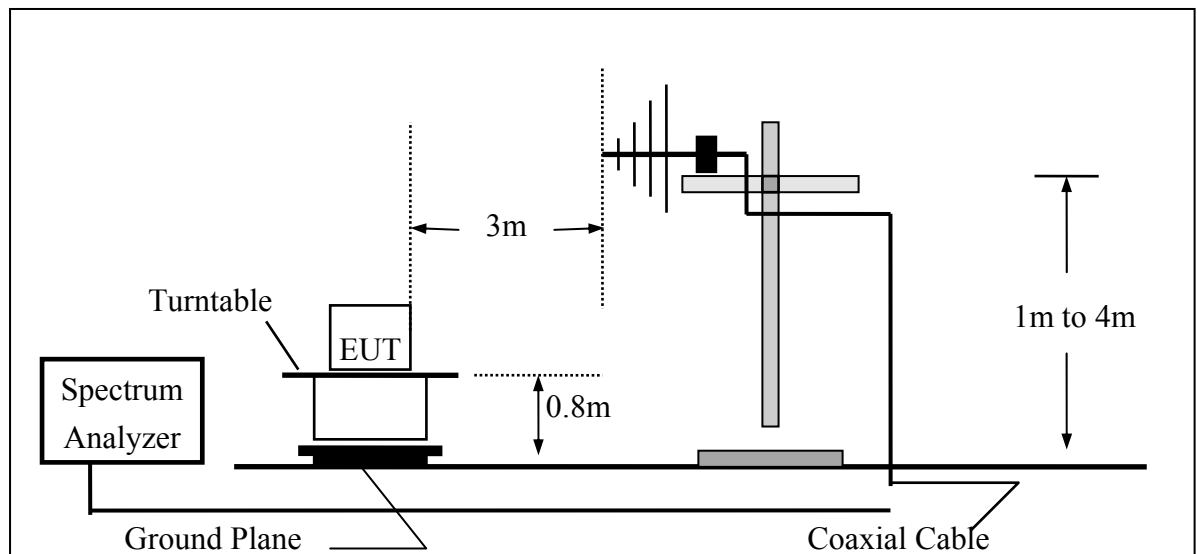

(B) Radiated Emission Test Set-UP Frequency Over 1 GHz

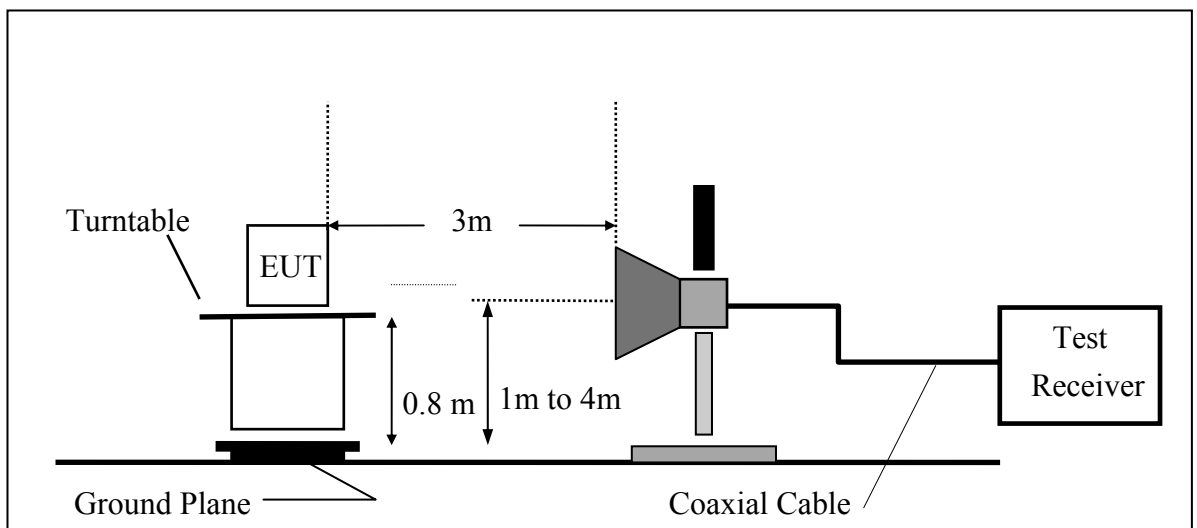

7.4. Measurement Procedure:

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = operating frequency.
4. Set the spectrum analyzer as RBW, VBW=100KHz, Span=25MHz, Sweep = auto
5. Mark Peak, 2.390GHz and 2.4835GHz and record the max. level.
6. Repeat above procedures until all frequency measured were complete.

7.5. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:


$$FS = RA + AF + CL - AG$$

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	


7.6. Measurement Result:

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

BDR Mode Band Edges Test Data CH-Low

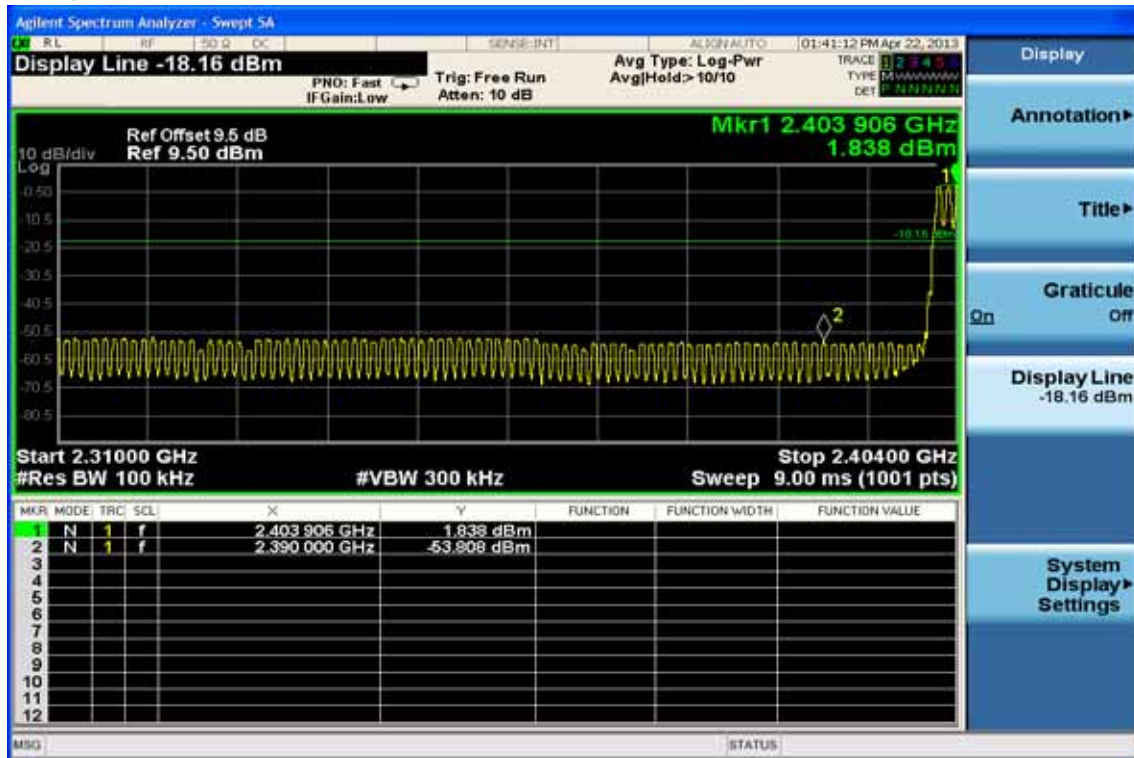

Band Edges Test Data CH-High

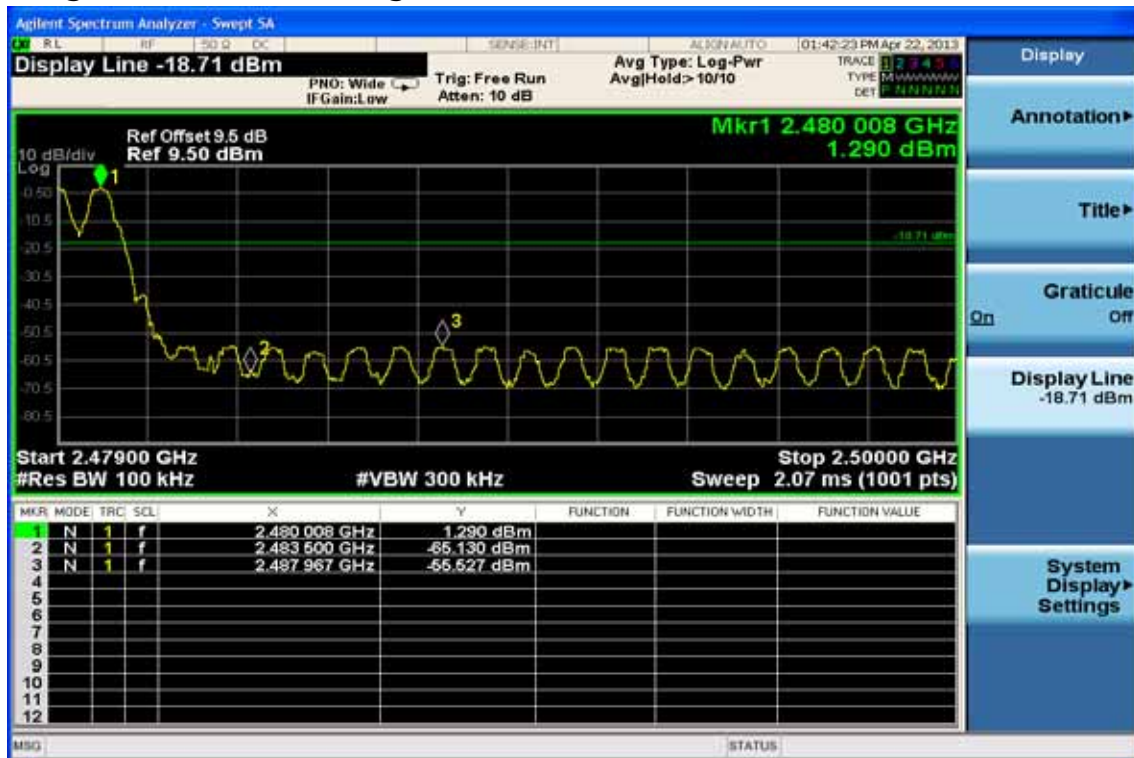

Radiated Emission: (BDR mode)

Operation Mode TX CH Low
Fundamental Frequency 2402 MHz
Temperature 25

Test Date 2013/04/25
Test By Dino
Humidity 60 %

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	2321.87	54.81	-7.17	47.64	74.00	-26.36	Peak	VERTICAL
2	2390.00	50.59	-7.01	43.58	74.00	-30.42	Peak	VERTICAL
1	2322.33	53.34	-7.17	46.17	74.00	-27.83	Peak	HORIZONTAL
2	2390.00	50.30	-7.01	43.29	74.00	-30.71	Peak	HORIZONTAL

Operation Mode TX CH High
Fundamental Frequency 2480 MHz
Temperature 25


Test Date 2013/04/25
Test By Dino
Humidity 60 %

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	2483.50	51.52	-6.81	44.71	74.00	-29.29	Peak	VERTICAL
2	2499.98	56.00	-6.77	49.23	74.00	-24.77	Peak	VERTICAL
1	2483.50	50.06	-6.81	43.25	74.00	-30.75	Peak	HORIZONTAL
2	2499.88	57.95	-6.77	51.18	74.00	-22.82	Peak	HORIZONTAL


Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 "F" denotes fundamental frequency; "H" denotes harmonics frequency. "S" denotes spurious frequency.
- 4 Measurement of data within this frequency range shown " - " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 6 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

EDR 2M Mode Band Edges Test Data CH-Low

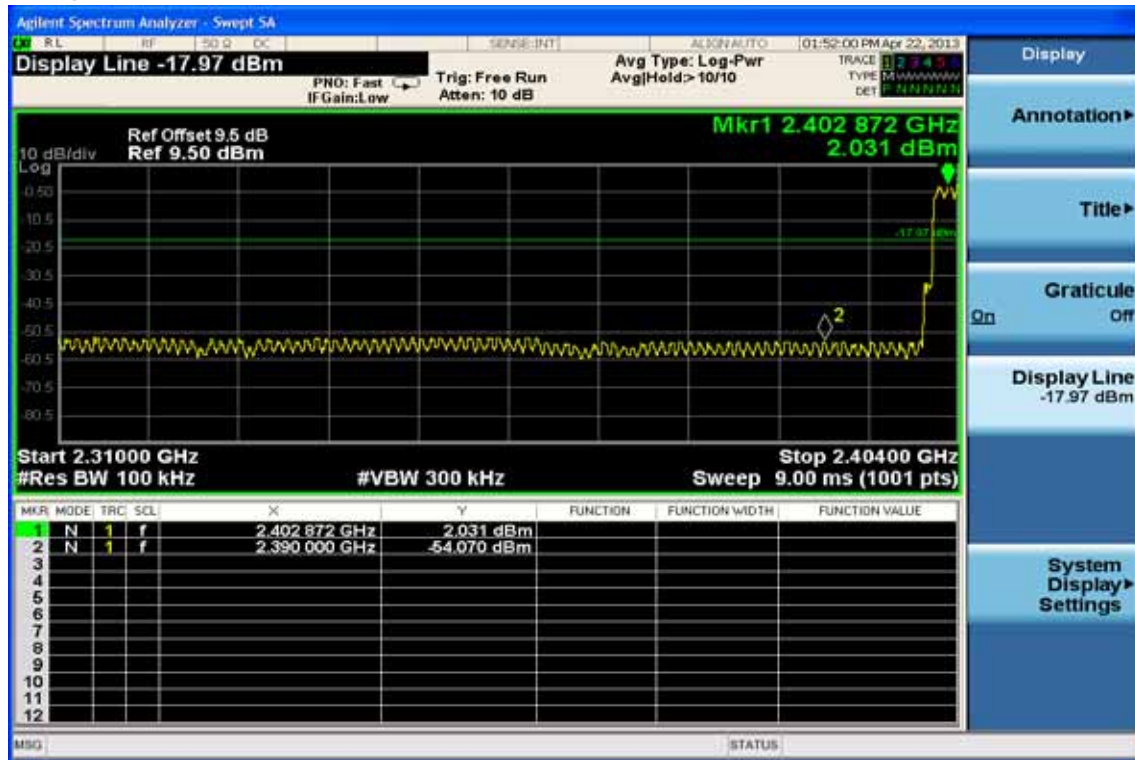

Band Edges Test Data CH-High

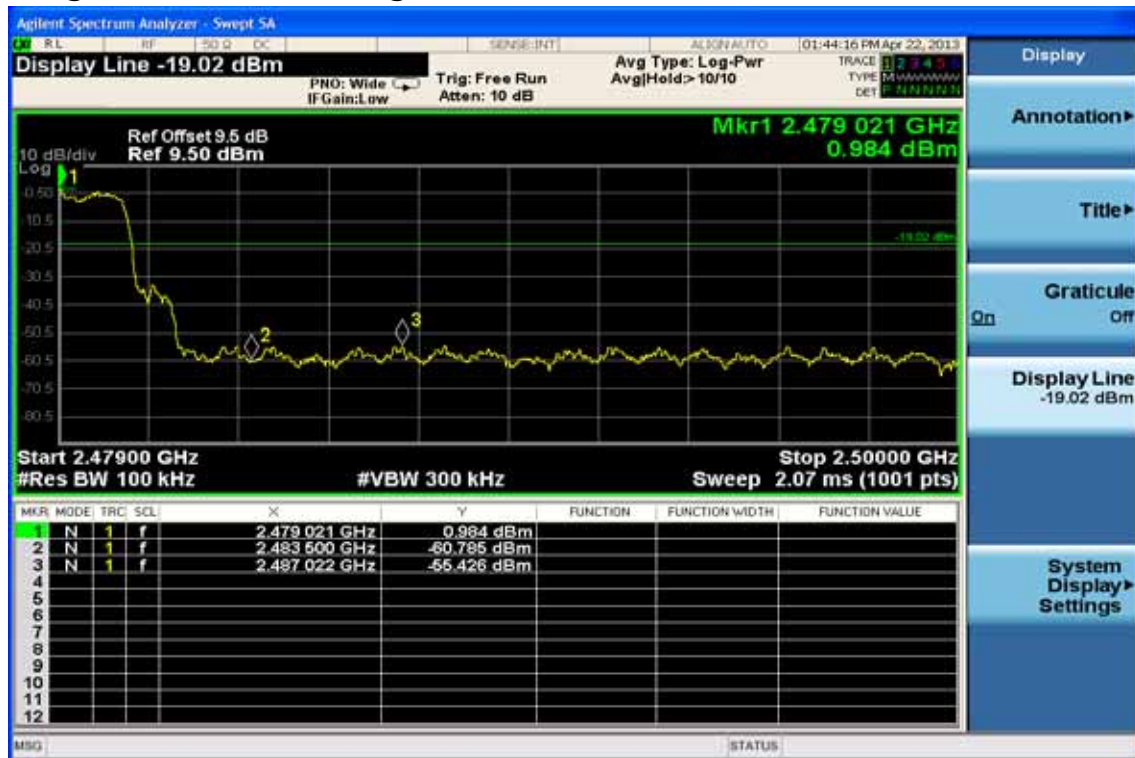

Radiated Emission (EDR 2M mode):

Operation Mode TX CH Low
Fundamental Frequency 2402 MHz
Temperature 25

Test Date 2013/04/25
Test By Dino
Humidity 60 %

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	2322.24	54.68	-7.17	47.51	74.00	-26.49	Peak	VERTICAL
2	2390.00	50.38	-7.01	43.37	74.00	-30.63	Peak	VERTICAL
1	2321.96	53.50	-7.17	46.33	74.00	-27.67	Peak	HORIZONTAL
2	2390.00	50.61	-7.01	43.60	74.00	-30.40	Peak	HORIZONTAL

Operation Mode TX CH High
Fundamental Frequency 2480 MHz
Temperature 25


Test Date 2013/04/25
Test By Dino
Humidity 60 %

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	2483.50	52.18	-6.81	45.37	74.00	-28.63	Peak	VERTICAL
2	2499.96	56.42	-6.77	49.65	74.00	-24.35	Peak	VERTICAL
1	2483.50	51.93	-6.81	45.12	74.00	-28.88	Peak	HORIZONTAL
2	2499.82	57.87	-6.77	51.10	74.00	-22.90	Peak	HORIZONTAL


Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 "F" denotes fundamental frequency; "H" denotes harmonics frequency. "S" denotes spurious frequency.
- 4 Measurement of data within this frequency range shown " - " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 6 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

EDR 3M Mode Band Edges Test Data CH-Low

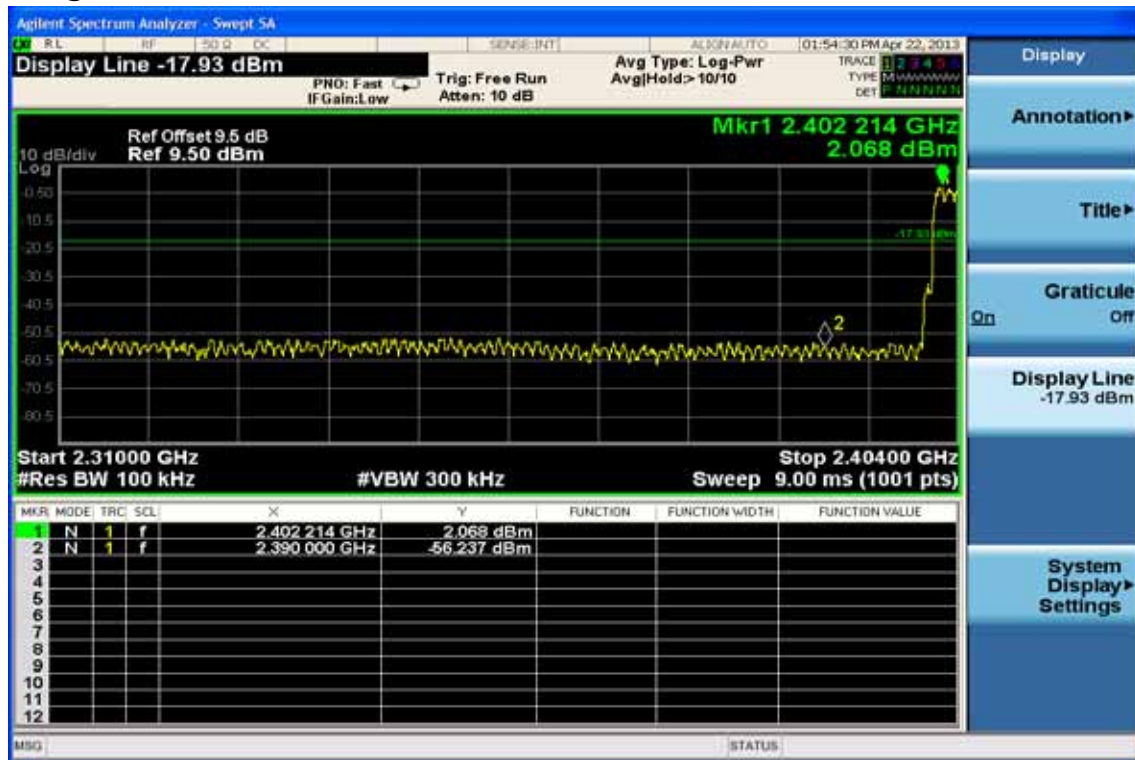

Band Edges Test Data CH-High

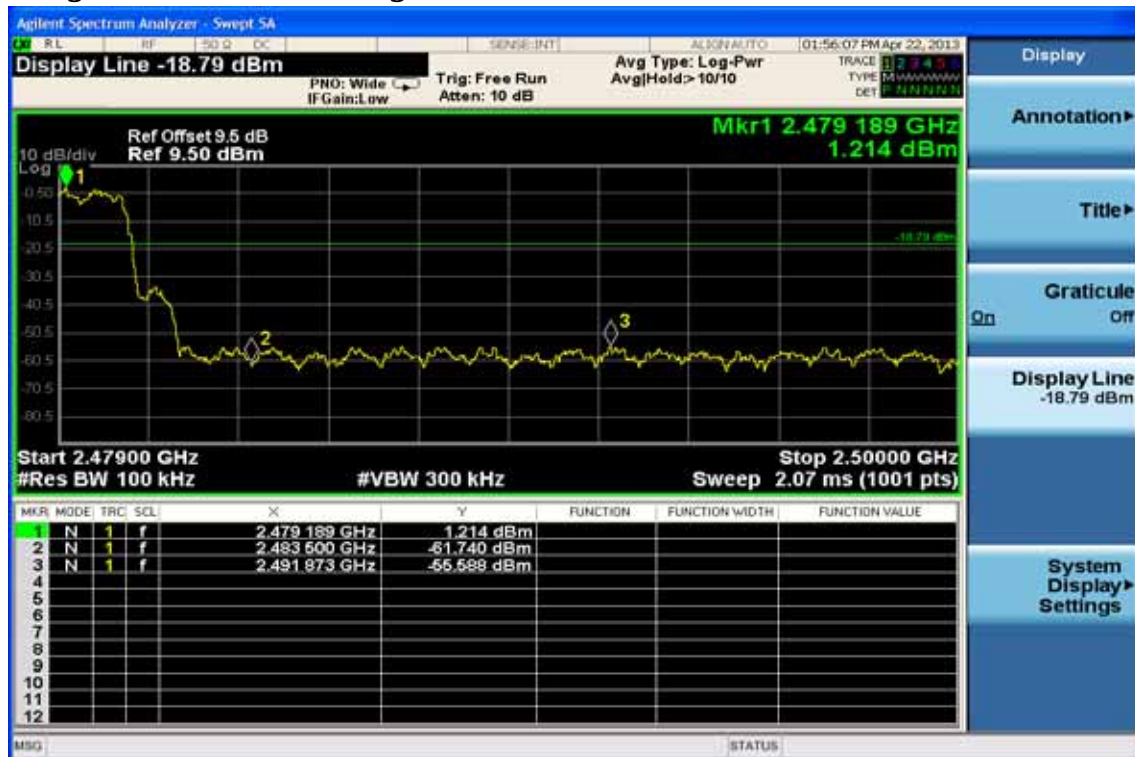

Radiated Emission (EDR 3M mode):

Operation Mode TX CH Low
Fundamental Frequency 2402 MHz
Temperature 25

Test Date 2013/04/25
Test By Dino
Humidity 60 %

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	2322.05	54.90	-7.17	47.73	74.00	-26.27	Peak	VERTICAL
2	2390.00	51.37	-7.01	44.36	74.00	-29.64	Peak	VERTICAL
1	2322.24	53.03	-7.17	45.86	74.00	-28.14	Peak	HORIZONTAL
2	2390.00	50.33	-7.01	43.32	74.00	-30.68	Peak	HORIZONTAL

Operation Mode TX CH High
Fundamental Frequency 2480 MHz
Temperature 25

Test Date 2013/04/25
Test By Dino
Humidity 60 %

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	2483.50	51.60	-6.81	44.79	74.00	-29.21	Peak	VERTICAL
2	2499.86	56.13	-6.77	49.36	74.00	-24.64	Peak	VERTICAL
1	2483.50	51.02	-6.81	44.21	74.00	-29.79	Peak	HORIZONTAL
2	2499.42	57.62	-6.77	50.85	74.00	-23.15	Peak	HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 "F" denotes fundamental frequency; "H" denotes harmonics frequency. "S" denotes spurious frequency.
- 4 Measurement of data within this frequency range shown " - " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 6 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

8. SPURIOUS EMISSION TEST

8.1. Standard Applicable:

According to §15.247(c), all other emissions outside these bands shall not exceed the general radiated emission limits specified in §15.209(a). And according to §15.33(a)(1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

8.2. Measurement Equipment Used:

8.2.1. Conducted Emission at antenna port:

Refer to section 6.2 for details.

8.2.2. Radiated emission:

Refer to section 7.2 for details.

8.3. Test SET-UP:

8.3.1. Conducted Emission at antenna port:

Refer to section 6.3 for details.

8.3.2. Radiated emission:

Refer to section 7.3 for details.

8.4. Measurement Procedure:

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
4. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made “while keeping the antenna in the ‘cone of radiation’ from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response.” is still within the 3dB illumination BW of the measurement antenna.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. Repeat above procedures until all frequency measured were complete.

8.5. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:


$$FS = RA + AF + CL - AG$$

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	


8.6. Measurement Result:

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.


Conducted Spurious Emission Measurement Result (worst case: EDR 3Mode) Ch Low 30MHz – 3GHz

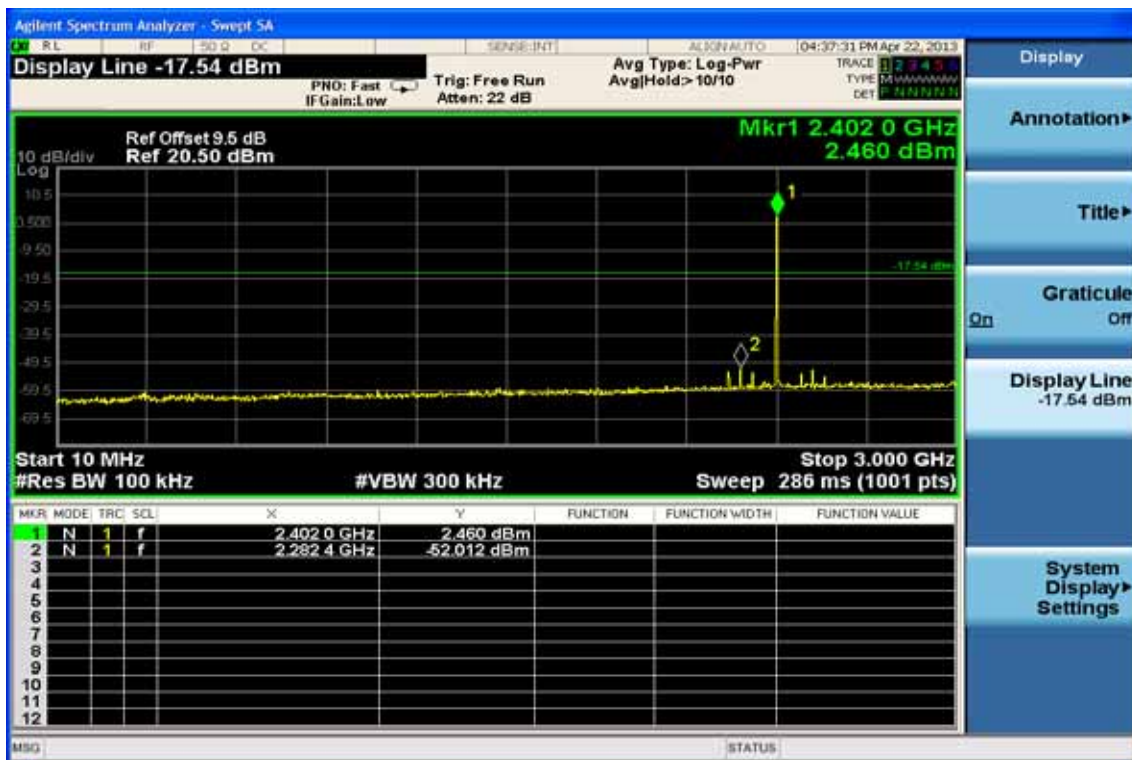


Ch Low 3GHz – 26.5GHz

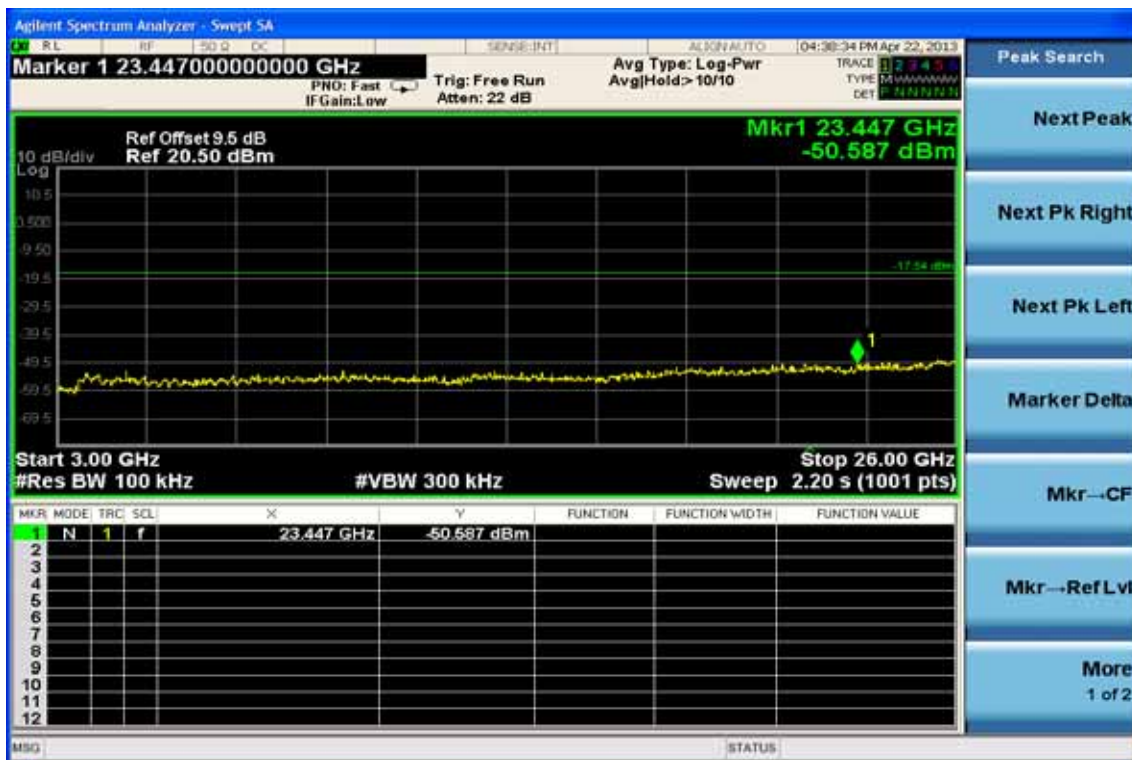


Ch Mid 30MHz – 3GHz

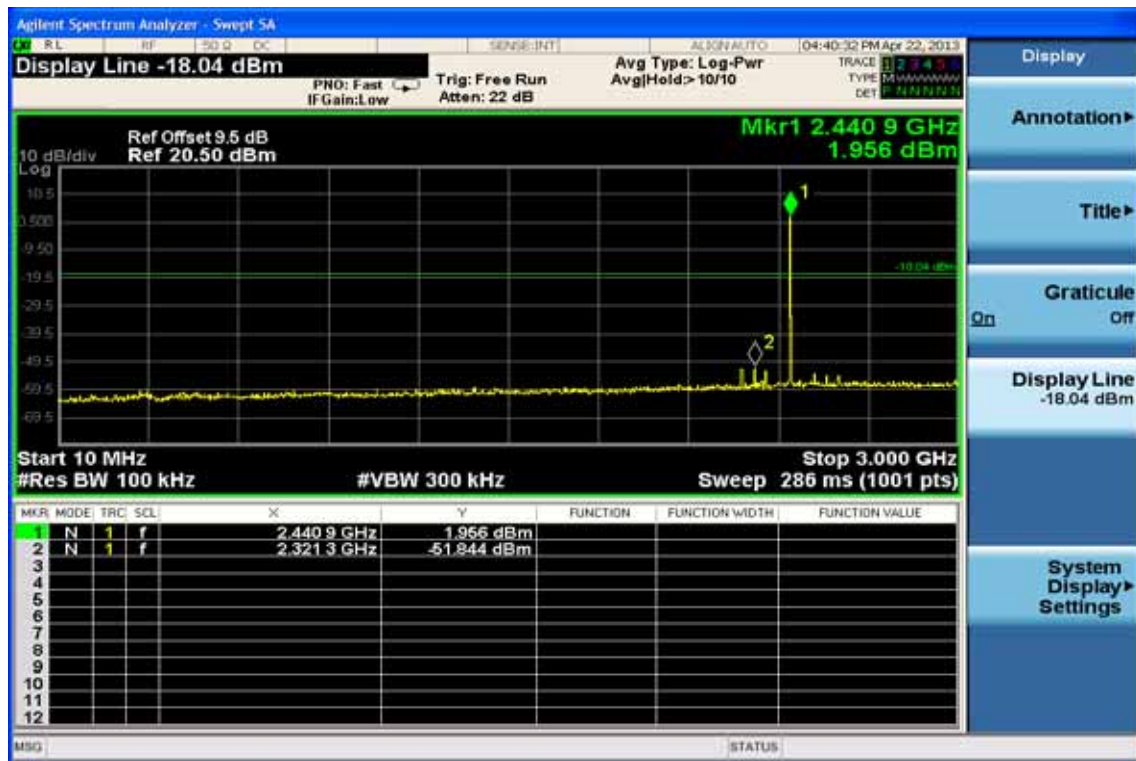


Ch Mid 3GHz – 26.5GHz

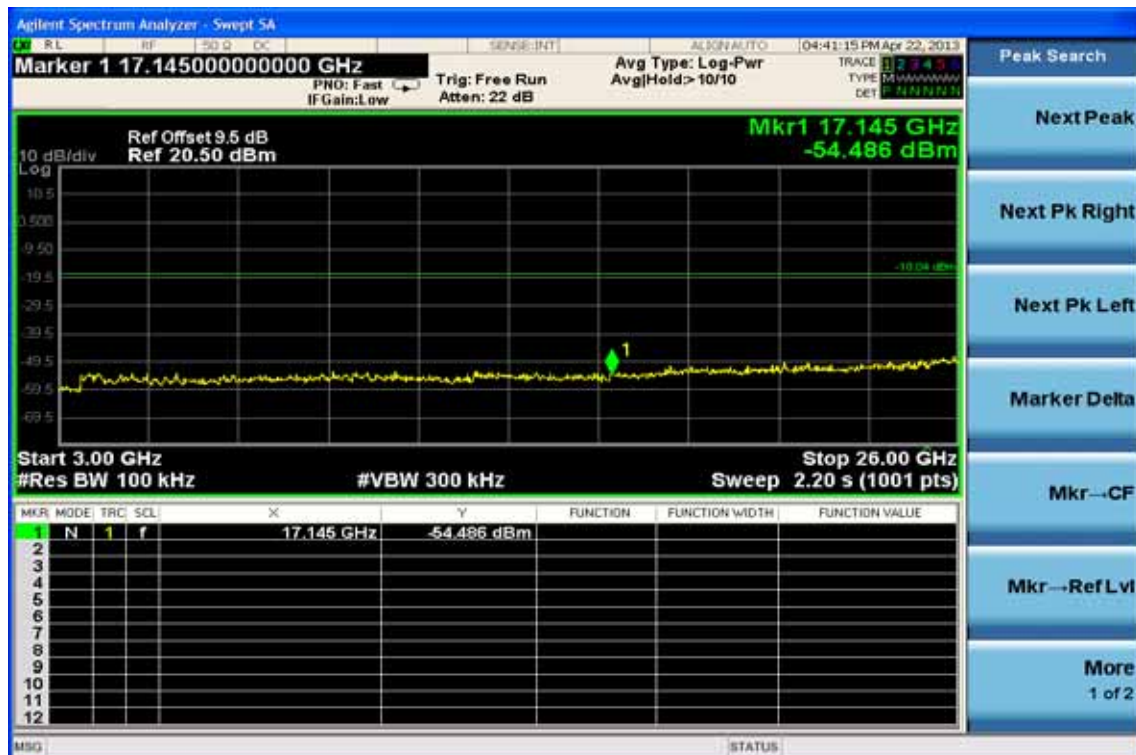

Ch High 30MHz – 3GHz

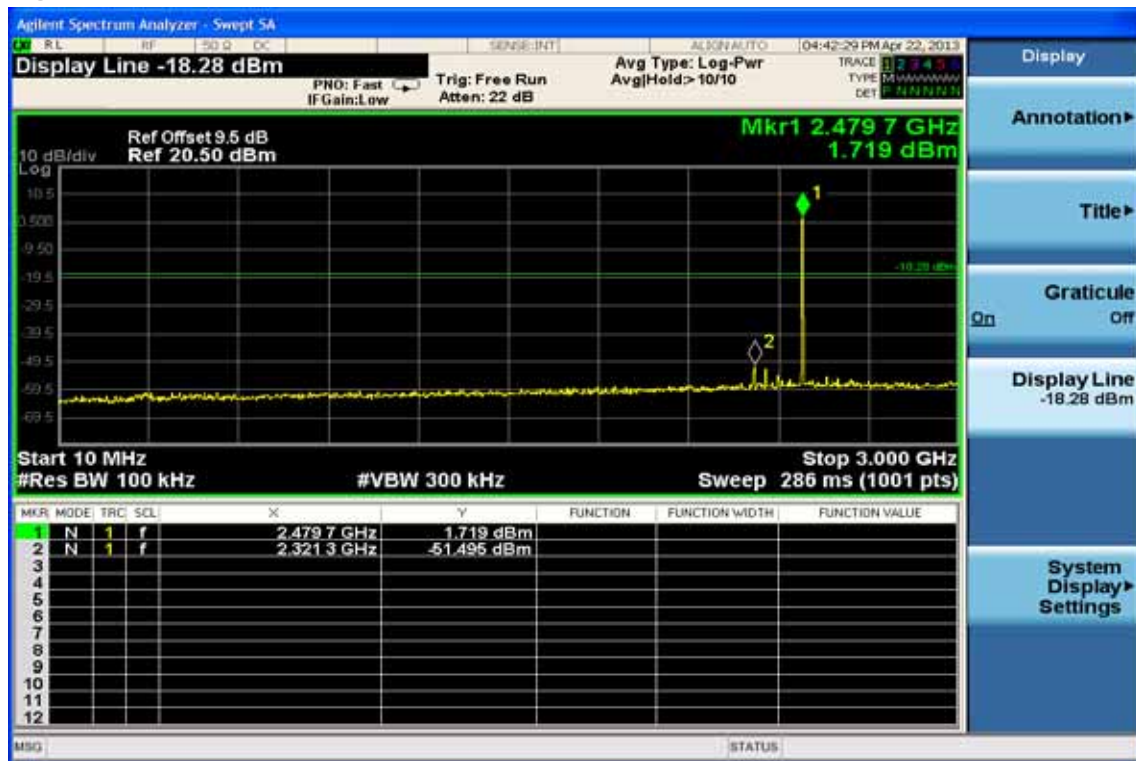

Ch High 3GHz – 26.5GHz

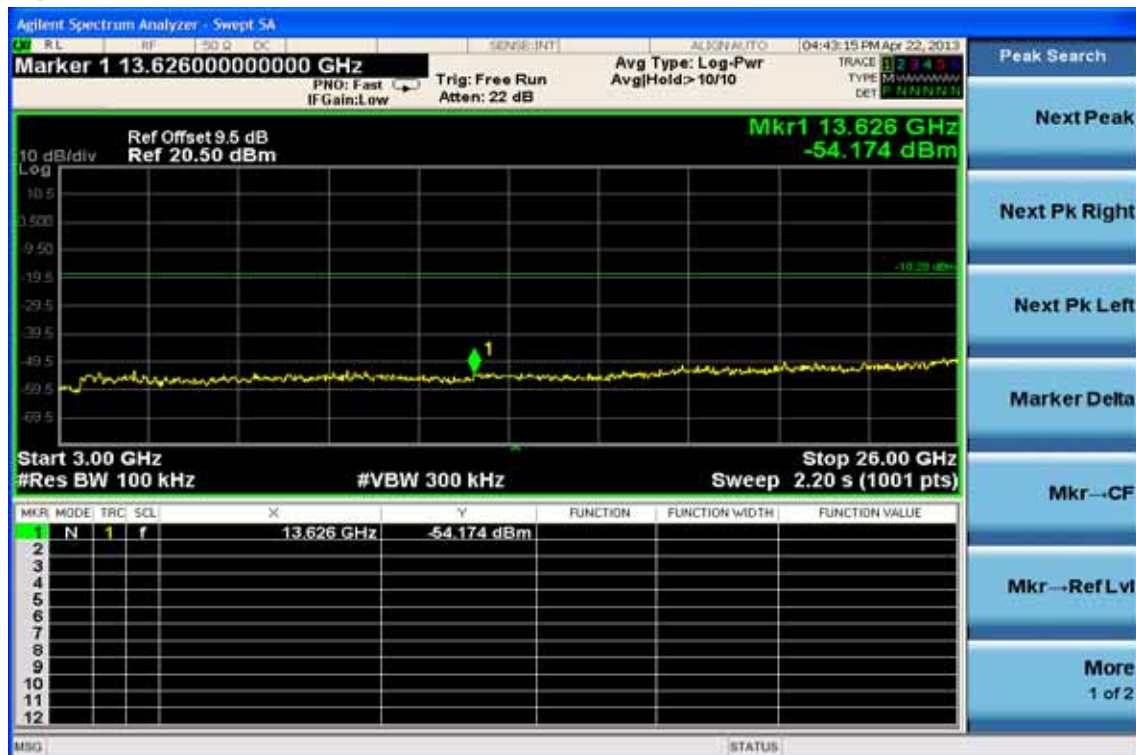

Radiated Spurious Emission Measurement Result (below 1GHz) (EDR 3 mode worst case)

Operation Mode TX CH Low
Fundamental Frequency 2402MHz
Temperature 25

Test Date 2013/04/25
Test By Dino
Humidity 60 %

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	42.61	49.20	-13.24	35.96	40.00	-4.04	Peak	VERTICAL
2	120.21	51.81	-15.24	36.57	43.50	-6.93	Peak	VERTICAL
3	260.86	51.91	-13.61	38.30	46.00	-7.70	Peak	VERTICAL
4	456.80	50.65	-8.93	41.72	46.00	-4.28	Peak	VERTICAL
5	480.08	50.12	-8.70	41.42	46.00	-4.58	Peak	VERTICAL
6	790.48	42.82	-2.75	40.07	46.00	-5.93	Peak	VERTICAL
1	41.64	49.98	-13.26	36.72	40.00	-3.28	Peak	HORIZONTAL
2	130.88	50.70	-15.00	35.70	43.50	-7.80	Peak	HORIZONTAL
3	243.40	50.89	-14.07	36.82	46.00	-9.18	Peak	HORIZONTAL
4	390.84	45.59	-10.27	35.32	46.00	-10.68	Peak	HORIZONTAL
5	455.83	44.04	-8.95	35.09	46.00	-10.91	Peak	HORIZONTAL
6	600.36	48.98	-6.10	42.88	46.00	-3.12	Peak	HORIZONTAL

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak / QP detector mode.
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz, VBW=300KHz.

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode TX CH Mid
Fundamental Frequency 2441MHz
Temperature 25

Test Date 2013/04/25
Test By Dino
Humidity 60 %

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	41.64	47.90	-13.26	34.64	40.00	-5.36	Peak	VERTICAL
2	119.24	51.55	-15.33	36.22	43.50	-7.28	Peak	VERTICAL
3	260.86	52.46	-13.61	38.85	46.00	-7.15	Peak	VERTICAL
4	455.83	49.71	-8.95	40.76	46.00	-5.24	Peak	VERTICAL
5	480.08	49.70	-8.70	41.00	46.00	-5.00	Peak	VERTICAL
6	745.86	41.90	-3.18	38.72	46.00	-7.28	Peak	VERTICAL
1	41.64	50.66	-13.26	37.40	40.00	-2.60	Peak	HORIZONTAL
2	134.76	51.43	-14.47	36.96	43.50	-6.54	Peak	HORIZONTAL
3	243.40	51.93	-14.07	37.86	46.00	-8.14	Peak	HORIZONTAL
4	455.83	44.59	-8.95	35.64	46.00	-10.36	Peak	HORIZONTAL
5	600.36	47.42	-6.10	41.32	46.00	-4.68	Peak	HORIZONTAL
6	716.76	40.69	-4.00	36.69	46.00	-9.31	Peak	HORIZONTAL

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak / QP detector mode.
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz, VBW=300KHz.

Radiated Spurious Emission Measurement Result (below 1GHz)

Operation Mode TX CH High
Fundamental Frequency 2480MHz
Temperature 25

Test Date 2013/04/25
Test By Dino
Humidity 60 %

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	40.67	50.42	-13.28	37.14	40.00	-2.86	Peak	VERTICAL
2	117.30	51.78	-15.53	36.25	43.50	-7.25	Peak	VERTICAL
3	260.86	51.85	-13.61	38.24	46.00	-7.76	Peak	VERTICAL
4	325.85	48.84	-11.49	37.35	46.00	-8.65	Peak	VERTICAL
5	456.80	50.04	-8.93	41.11	46.00	-4.89	Peak	VERTICAL
6	719.67	42.34	-3.92	38.42	46.00	-7.58	Peak	VERTICAL
1	40.67	48.99	-13.28	35.71	40.00	-4.29	Peak	HORIZONTAL
2	134.76	50.13	-14.47	35.66	43.50	-7.84	Peak	HORIZONTAL
3	244.37	52.21	-14.04	38.17	46.00	-7.83	Peak	HORIZONTAL
4	396.66	45.53	-10.21	35.32	46.00	-10.68	Peak	HORIZONTAL
5	600.36	46.73	-6.10	40.63	46.00	-5.37	Peak	HORIZONTAL
6	867.11	39.04	-1.71	37.33	46.00	-8.67	Peak	HORIZONTAL

Remark:

- 1 No further spurious emissions detected from the lowest internal frequency and 30MHz.
- 2 Measuring frequencies from the lowest internal frequency to the 1GHz.
- 3 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak / QP detector mode.
- 4 Measurement result within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 The IF bandwidth of SPA between 30MHz to 1GHz was 100KHz, VBW=300KHz.

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode TX CH Low
Fundamental Frequency 2402 MHz
Temperature 25

Test Date 2013/04/25
Test By Dino
Humidity 60 %

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	1497.00	51.57	-10.94	40.63	74.00	-33.37	Peak	VERTICAL
2	4804.00	48.46	1.25	49.71	74.00	-24.29	Peak	VERTICAL
1	1672.00	48.71	-9.87	38.84	74.00	-35.16	Peak	HORIZONTAL
2	4804.00	47.22	1.25	48.47	74.00	-25.53	Peak	HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 "F" denotes fundamental frequency; "H" denotes harmonics frequency. "S" denotes spurious frequency.
- 4 Measurement of data within this frequency range shown " - " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 6 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode	TX CH Mid	Test Date	2013/04/25
Fundamental Frequency	2441 MHz	Test By	Dino
Temperature	25	Humidity	60 %

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	2001.00	52.86	-7.90	44.96	74.00	-29.04	Peak	VERTICAL
2	4882.00	41.81	1.48	43.29	74.00	-30.71	Peak	VERTICAL
1	2001.00	49.87	-7.90	41.97	74.00	-32.03	Peak	HORIZONTAL
2	4882.00	42.29	1.48	43.77	74.00	-30.23	Peak	HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 "F" denotes fundamental frequency; "H" denotes harmonics frequency. "S" denotes spurious frequency.
- 4 Measurement of data within this frequency range shown " - " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 6 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

Radiated Spurious Emission Measurement Result (above 1GHz)

Operation Mode TX CH High
Fundamental Frequency 2480 MHz
Temperature 25

Test Date 2013/04/25
Test By Dino
Humidity 60 %

No	Freq MHz	Reading dBuV	Factor dB	Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark	Pol V/H
1	2001.00	52.04	-7.90	44.14	74.00	-29.86	Peak	VERTICAL
2	4960.00	43.56	1.72	45.28	74.00	-28.72	Peak	VERTICAL
1	3625.00	47.85	-3.41	44.44	74.00	-29.56	Peak	HORIZONTAL
2	4960.00	42.51	1.72	44.23	74.00	-29.77	Peak	HORIZONTAL

Remark:

- 1 Measuring frequencies from the lowest internal frequency to the 10th of fundamental frequency
- 2 Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- 3 "F" denotes fundamental frequency; "H" denotes harmonics frequency. "S" denotes spurious frequency.
- 4 Measurement of data within this frequency range shown " - " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5 Spectrum Peak mode IF bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, Sweep time= 200 ms., the VBW setting was 3 MHz.
- 6 Spectrum AV mode if bandwidth Setting : 1GHz- 26GHz, RBW= 1MHz, VBW= 10Hz, Sweep time= 200 ms.

9. FREQUENCY SEPARATION

9.1. Standard Applicable:

According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25KHz or the 20dB bandwidth of the hopping channel, whichever is greater.

9.2. Measurement Equipment Used:

Refer to section 6.2 for details.

9.3. Test Set-up:

Refer to section 6.3 for details.

9.4. Measurement Procedure:


1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = middle of hopping channel .
4. Set the spectrum analyzer as RBW,VBW=100KHz, Adjust Span to 3.0 MHz, Sweep = auto.
5. Max hold. Mark 3 Peaks of hopping channel and record the 3 peaks frequency.

9.5. Measurement Result:

Channel separation (MHz)	Limit	Result
1	$\geq 25\text{KHz}$ or 2/3 times 20dB bandwidth	PASS

Note: Refer to next page for plots.

Frequency Separation Test Data

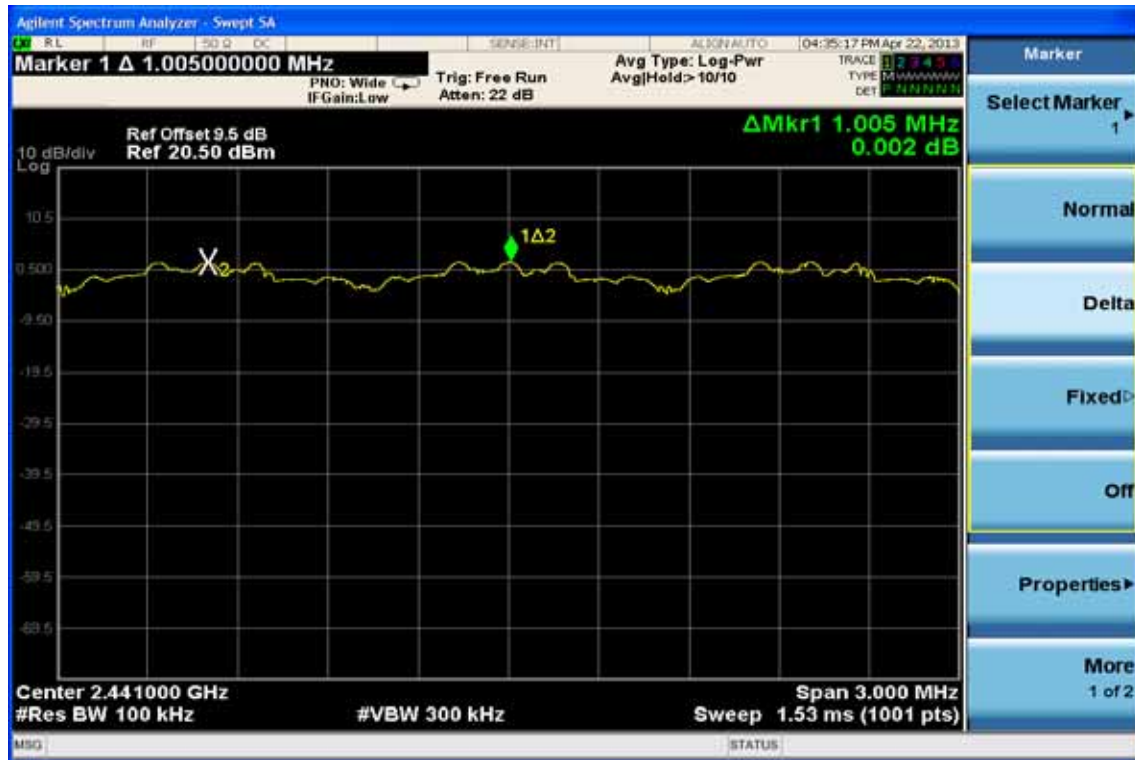

10. NUMBER OF HOPPING FREQUENCY

10.1. Standard Applicable:

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 15 hopping frequencies.

10.2. Measurement Equipment Used:

Refer to section 6.2 for details.

10.3. Test Set-up:

Refer to section 6.3 for details.


10.4. Measurement Procedure:

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set spectrum analyzer Start=2400MHz, Stop = 2441MHz and Start=2441MHz, Stop = 2483.5MHz, Sweep = auto.
4. Set the spectrum analyzer as RBW=300KHz, VBW=1MHz
5. Max hold, view and count how many channel in the band.


10.5. Measurement Result:

Note: Refer to next page for plots.

Channel Number 2.4 GHz – 2.441GHz

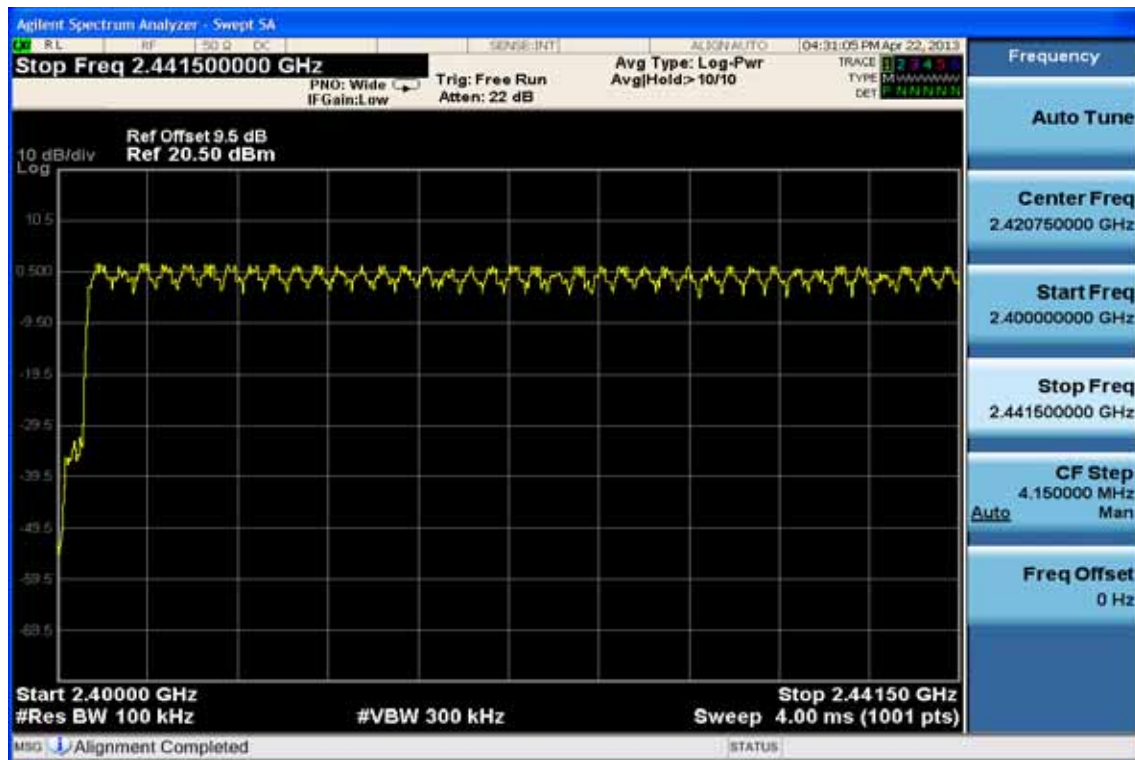

2.441 GHz – 2.4835GHz

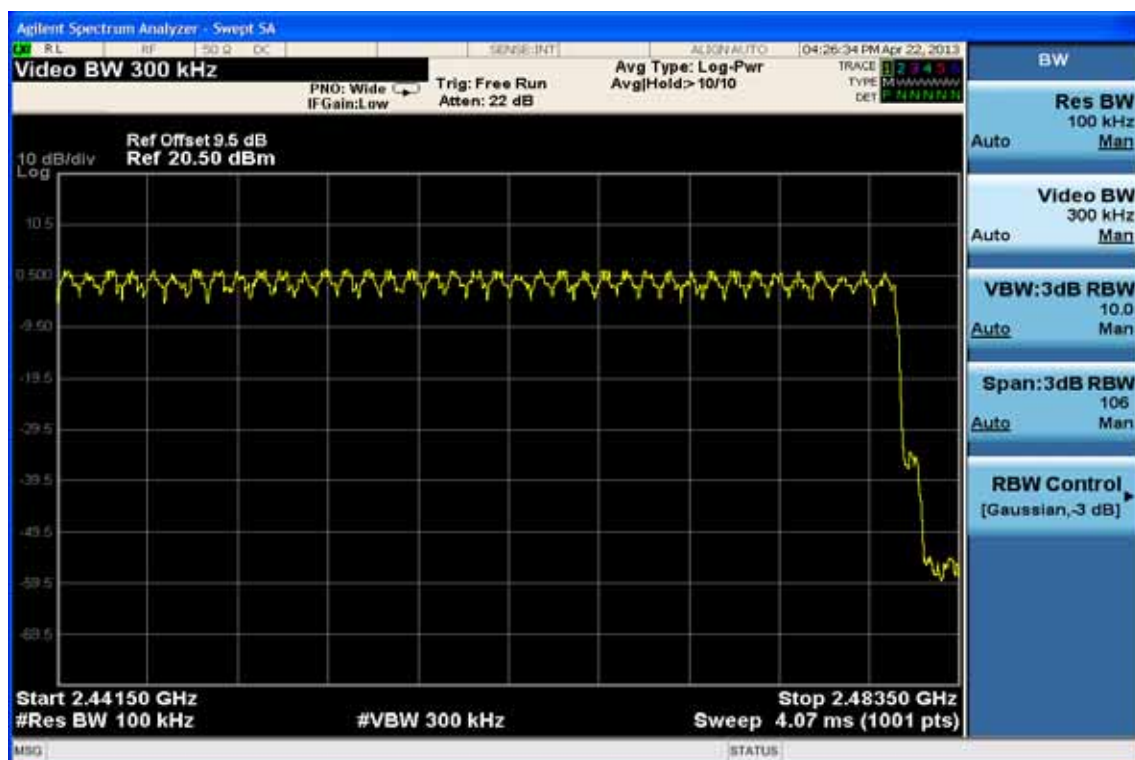

11. TIME OF OCCUPANCY (DWELL TIME)

11.1. Standard Applicable:

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz. The average time of occupancy on any frequency shall not greater than 0.4 s within period of 0.4 seconds multiplied by the number of hopping channel employed.

11.2. Measurement Equipment Used:

Refer to section 6.2 for details.

11.3. Test Set-up:

Refer to section 6.3 for details.

11.4. Measurement Procedure:

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = operating frequency.
4. Set the spectrum analyzer as RBW / VBW = 1MHz, Span = 0Hz , Adjust Sweep = 2.5ms.
5. Repeat above procedures until all frequency measured were complete.

11.5. Measurement Result:

A period time = 0.4 (ms) * 79 = 31.6 (s)

CH Low DH1 time slot = 0.390 (ms) * (1600/2/79) * 31.6 = 124.80 (ms)

DH3 time slot = 1.650 (ms) * (1600/4/79) * 31.6 = 264.00 (ms)

DH5 time slot = 2.880 (ms) * (1600/6/79) * 31.6 = 307.20 (ms)

CH Mid DH1 time slot = 0.390 (ms) * (1600/2/79) * 31.6 = 124.80 (ms)

DH3 time slot = 1.650 (ms) * (1600/4/79) * 31.6 = 264.00 (ms)

DH5 time slot = 2.860 (ms) * (1600/6/79) * 31.6 = 305.07 (ms)


CH High DH1 time slot = 0.393 (ms) * (1600/2/79) * 31.6 = 125.76 (ms)

DH3 time slot = 1.635 (ms) * (1600/4/79) * 31.6 = 261.60 (ms)


DH5 time slot = 2.900 (ms) * (1600/6/79) * 31.6 = 309.33 (ms)

Note: Refer to next page for plots.


CH-Low DH1

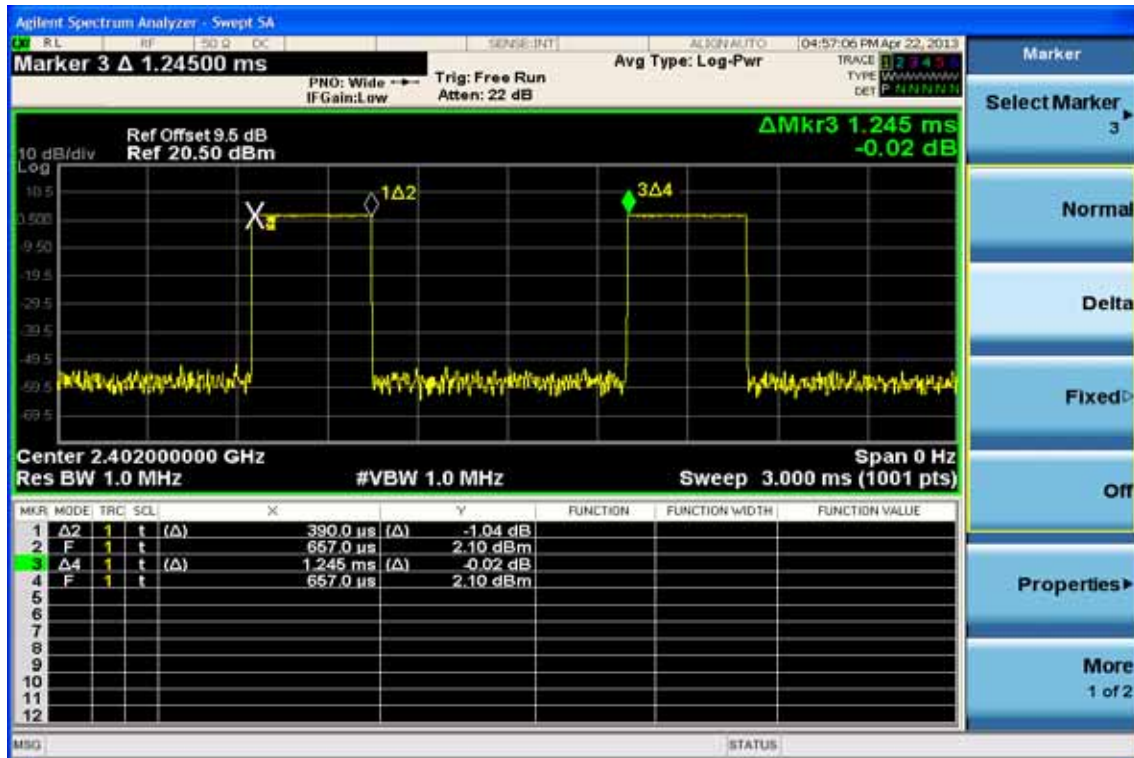

DH3

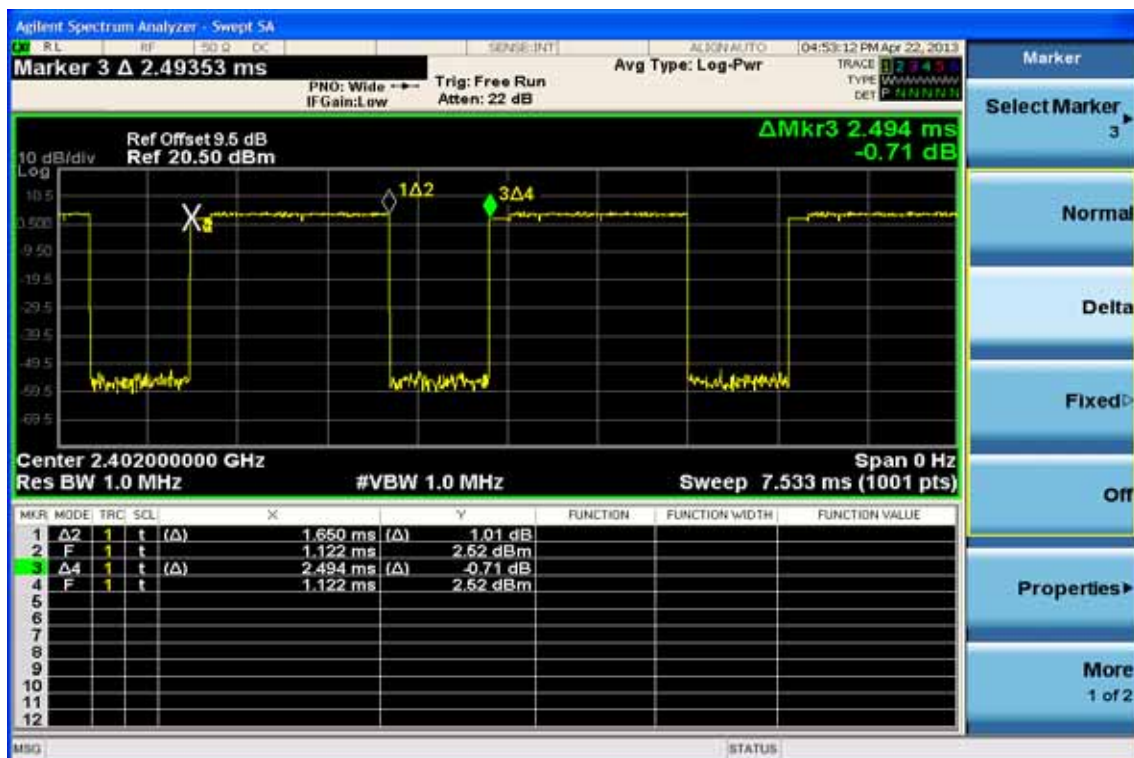


DH5

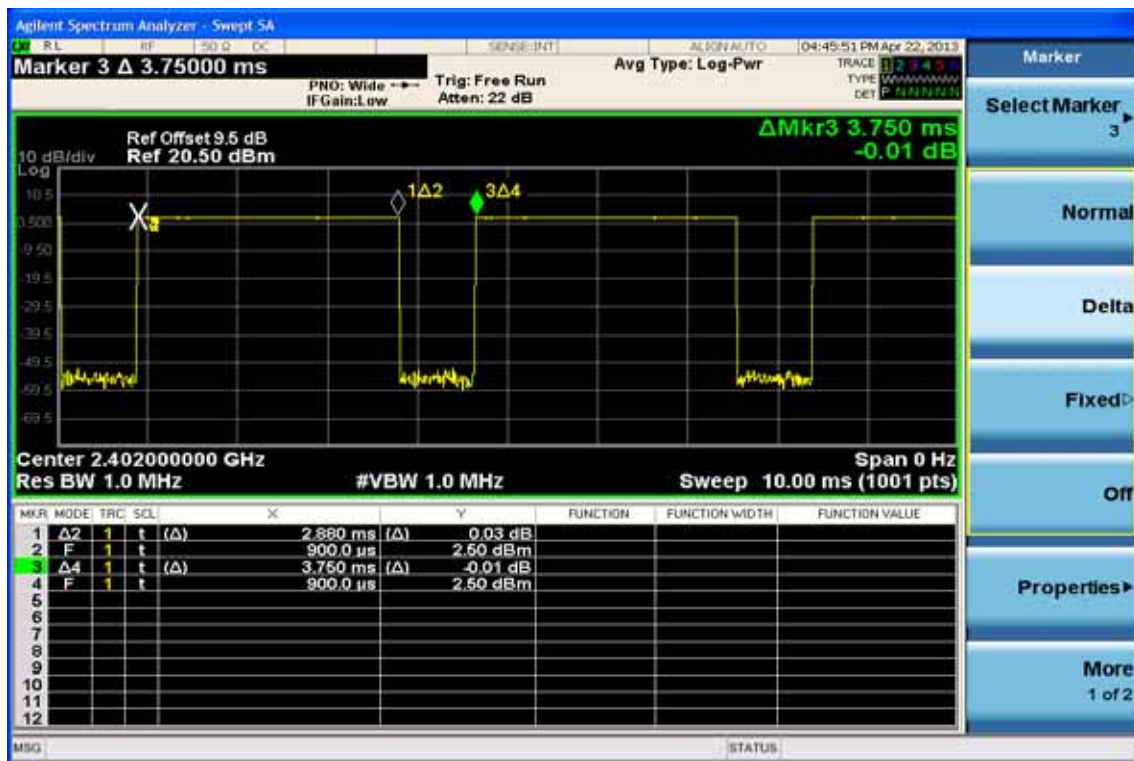


CH-Mid


DH1


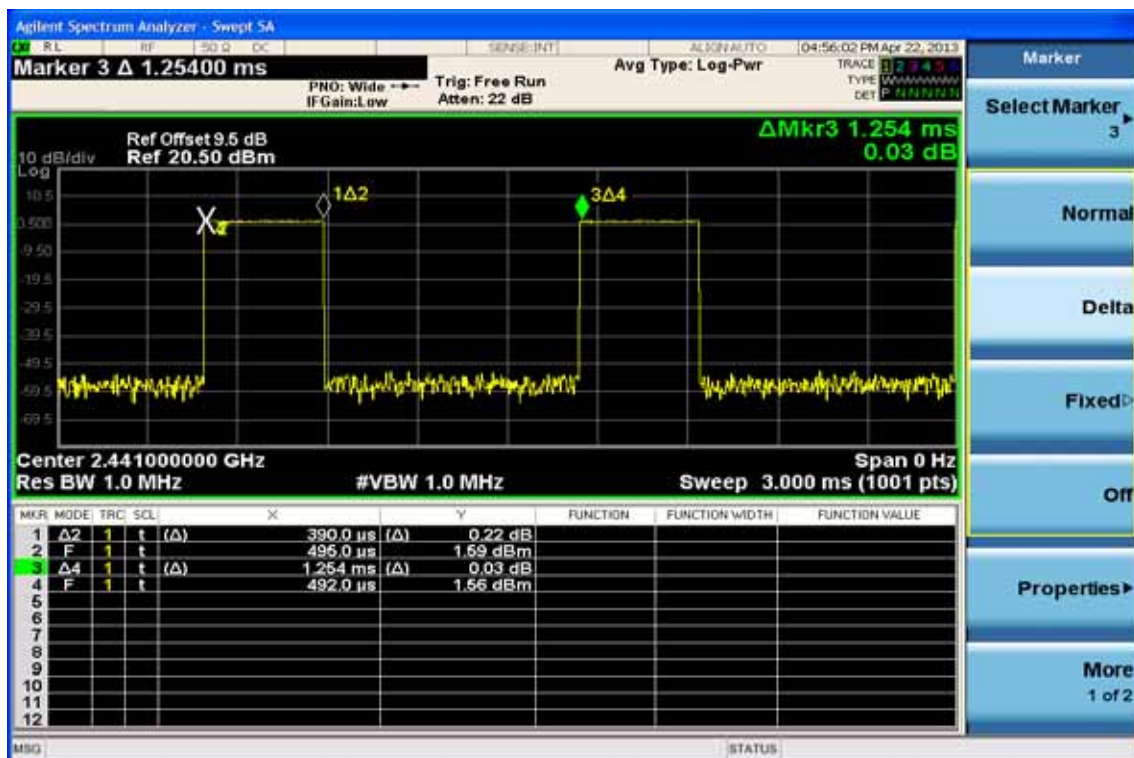


DH3

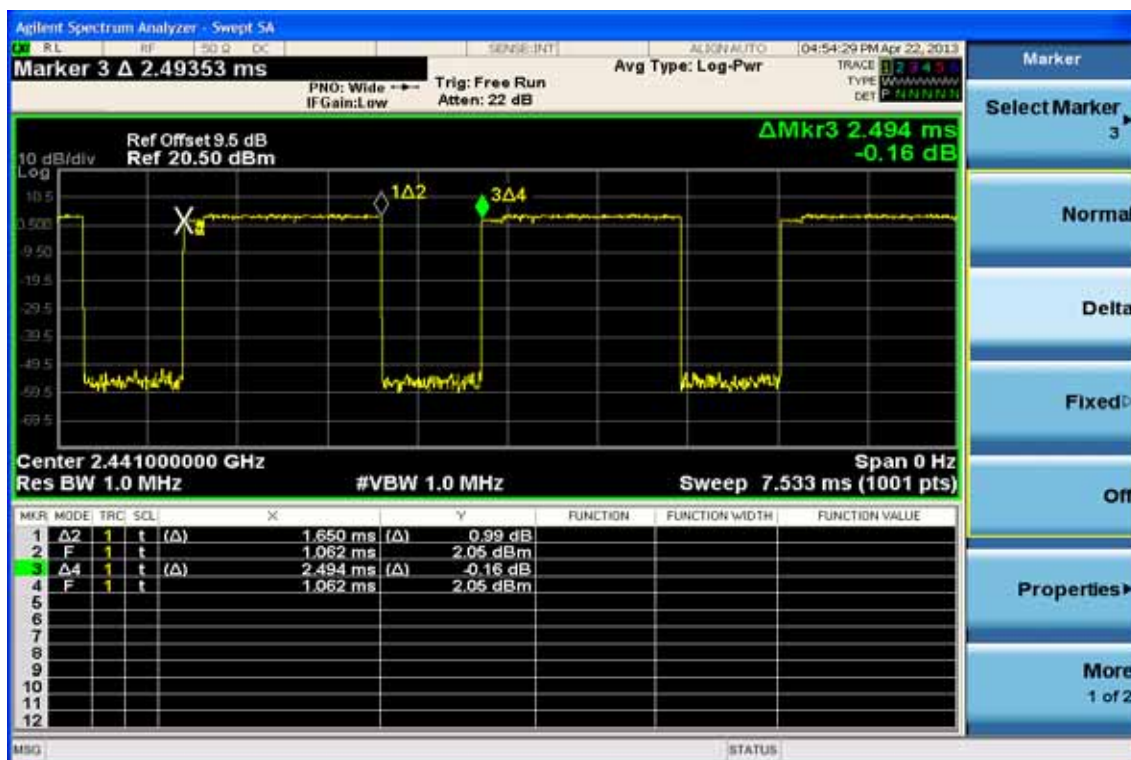


DH5

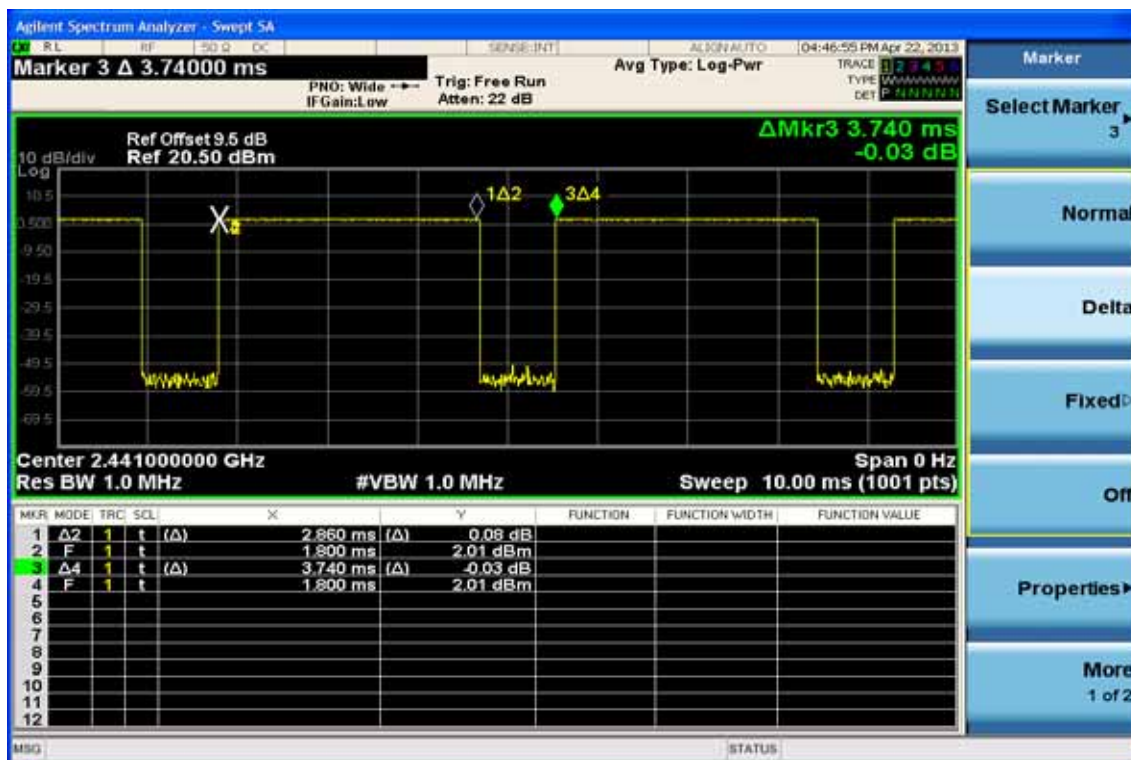

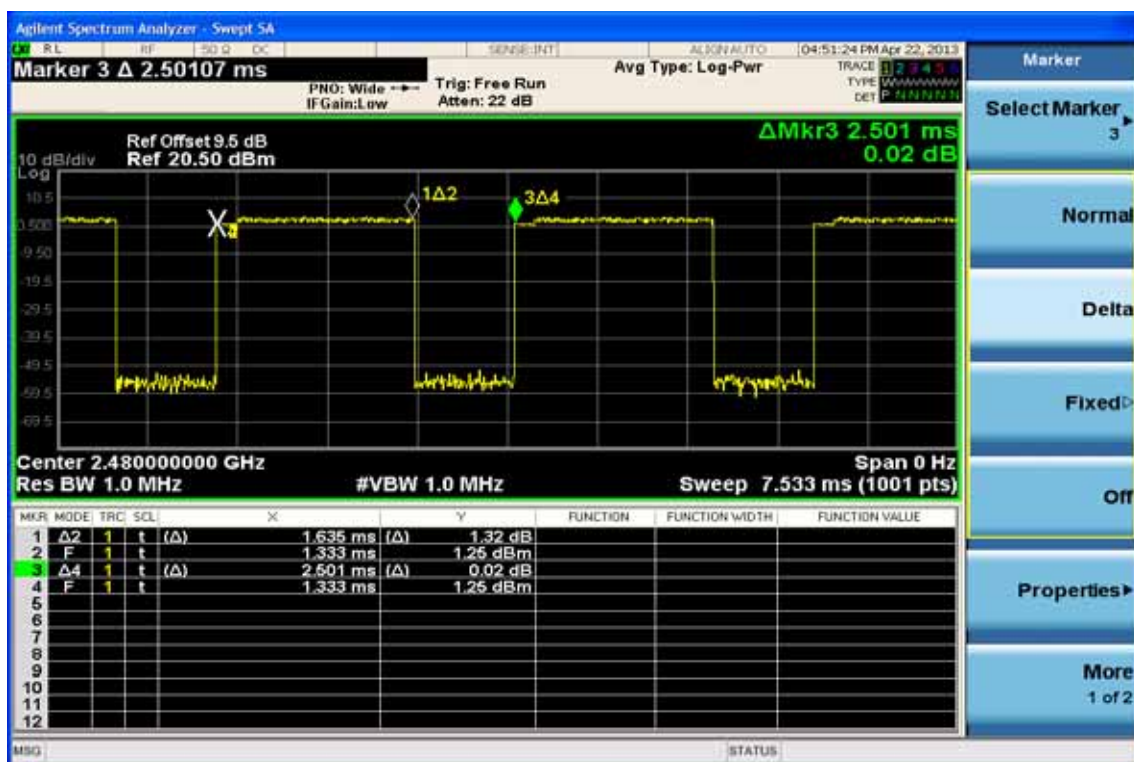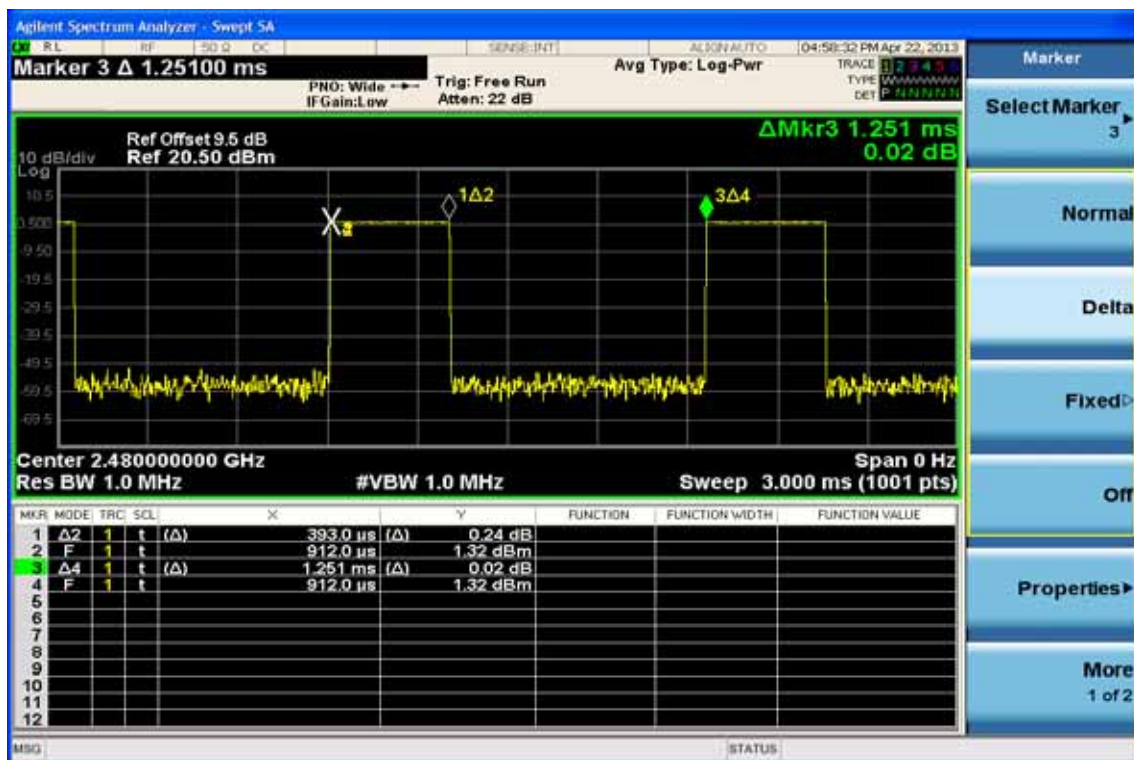

DH5

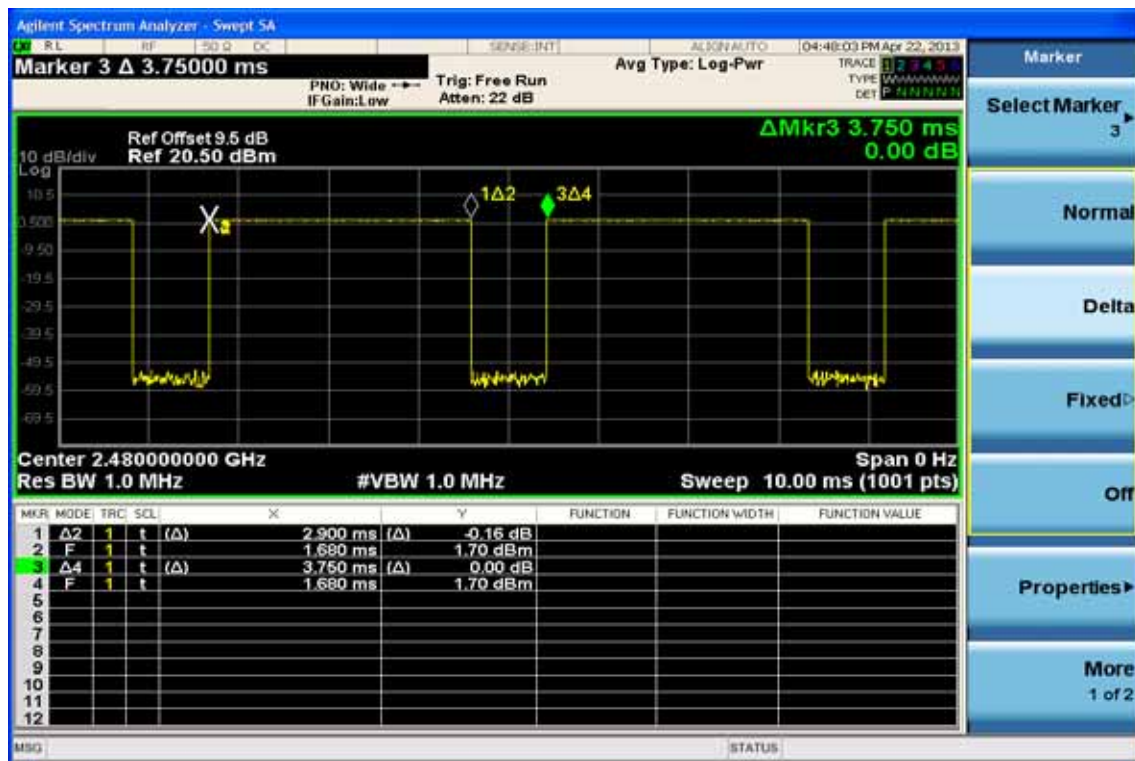

12. 20dB Bandwidth

12.1. Standard Applicable:

According to §15.247(a)(1) for frequency hopping systems operating in the 2400MHz-2483.5 MHz no limit for 20dB bandwidth.

12.2. Measurement Equipment Used:

Refer to section 6.2 for details.

12.3. Test Set-up:

Refer to section 6.3 for details.

12.4. Measurement Procedure:

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW=10KHz (1 % of Bandwidth.), Span= 3MHz, Sweep=auto
4. Mark the peak frequency and -20dB (upper and lower) frequency.
5. Repeat above procedures until all frequency measured were complete.

12.5. Measurement Result:

20dB Bandwidth

BDR Mode

CH	Bandwidth (MHz)
Lower	0.9287
Mid	0.9289
Higher	0.9292

EDR 2M Mode

CH	Bandwidth (MHz)	2/3 Bandwidth (MHz)
Lower	1.28	0.853
Mid	1.277	0.851
Higher	1.278	0.852

EDR 3M Mode

CH	Bandwidth (MHz)	2/3 Bandwidth (MHz)
Lower	1.293	0.862
Mid	1.293	0.862
Higher	1.294	0.863

Note: Refer to next page for plots.

BDR Mode


20dB Bandwidth Test Data CH-Low




20dB Bandwidth Test Data CH-Mid




20dB Bandwidth Test Data CH-High

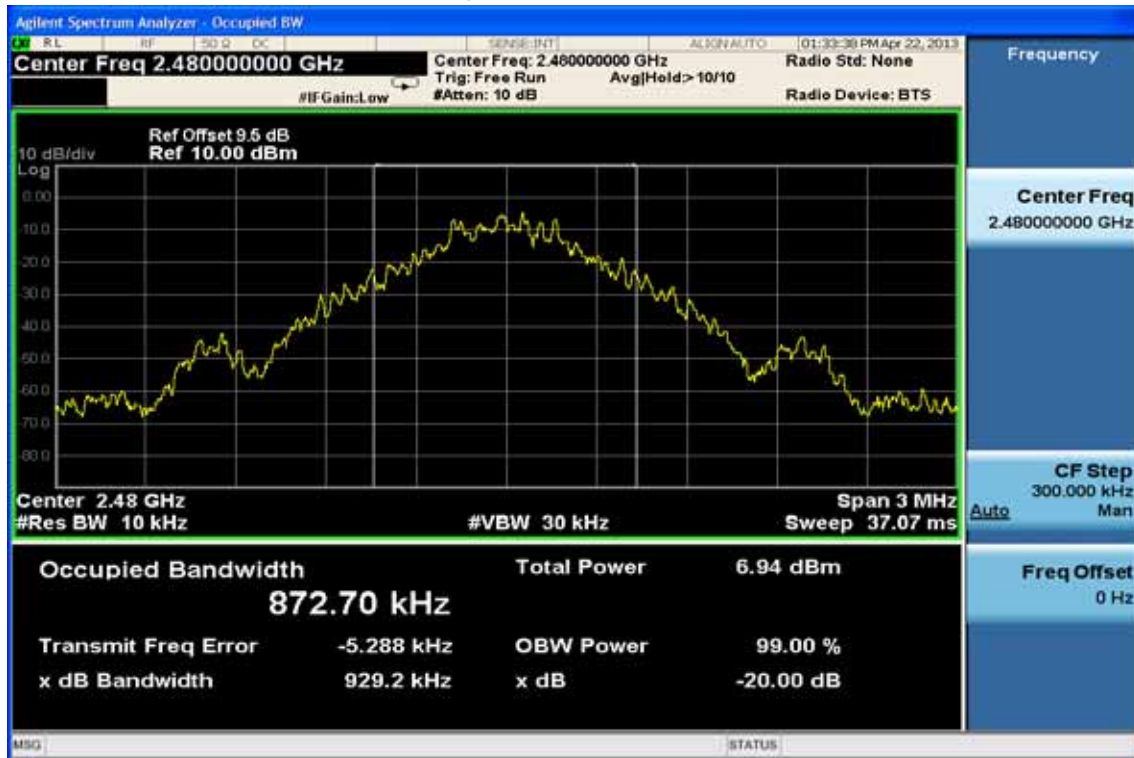


EDR 2M Mode 20dB Bandwidth Test Data CH-Low

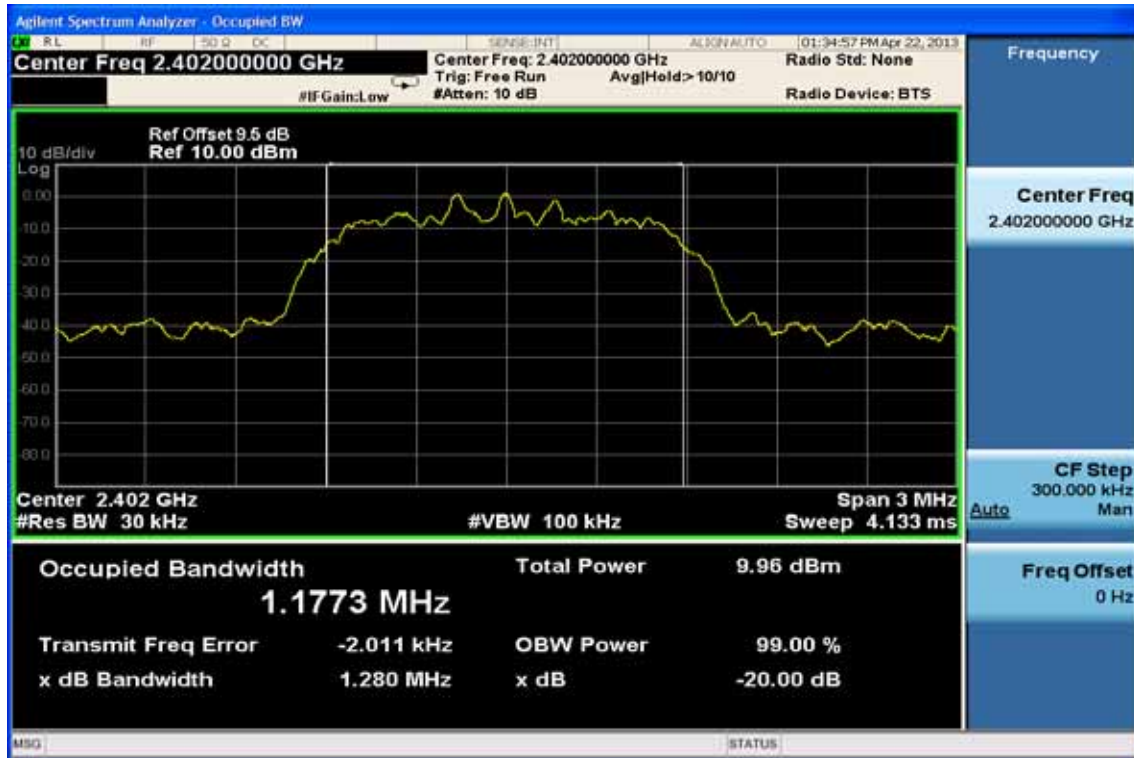


20dB Bandwidth Test Data CH-Mid

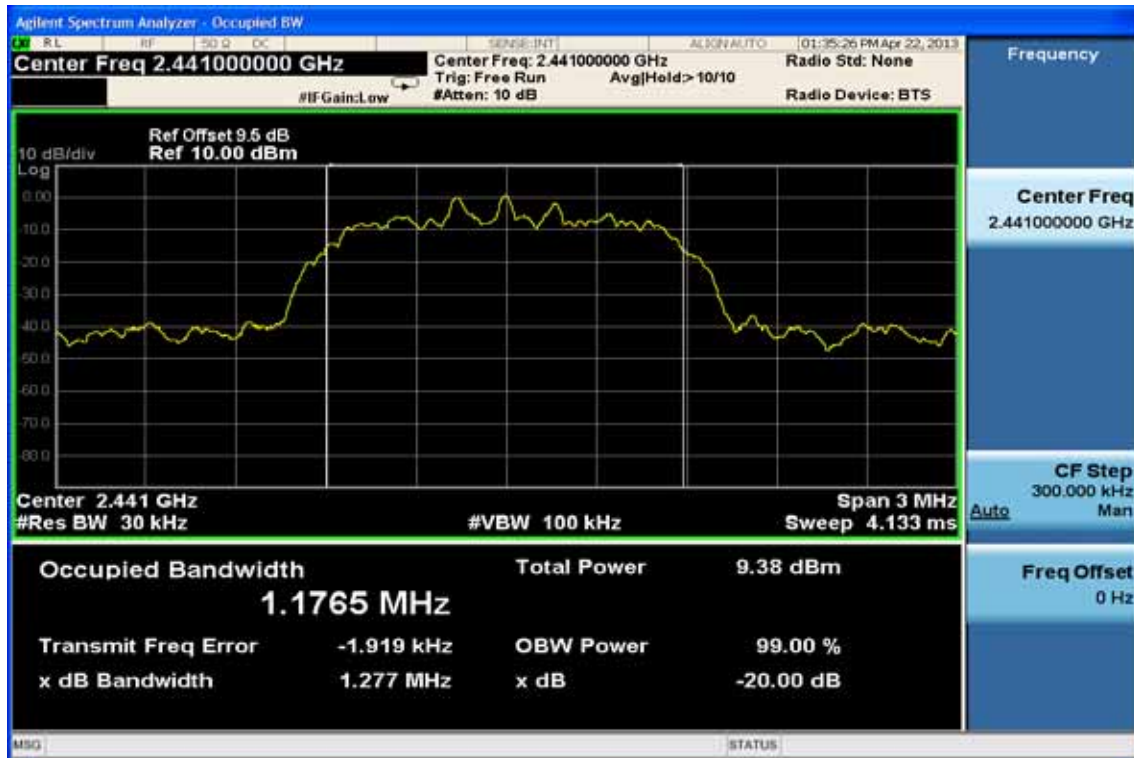


20dB Bandwidth Test Data CH-High

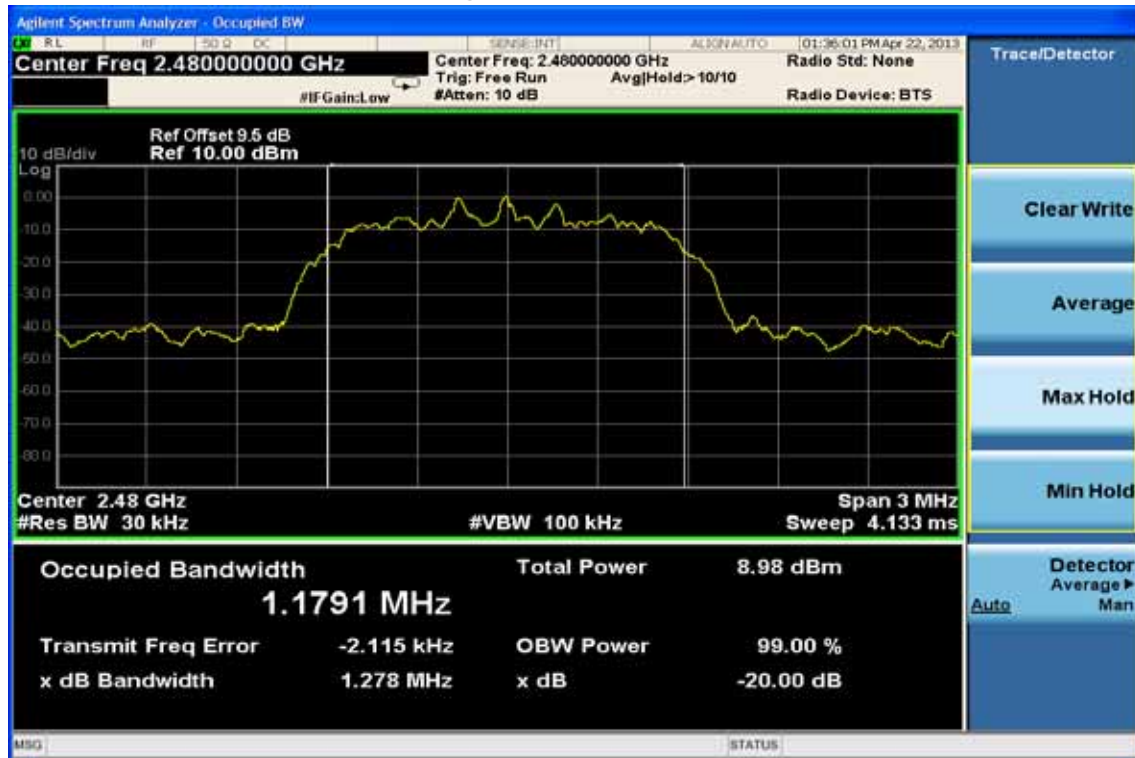


EDR 3M Mode 20dB Bandwidth Test Data CH-Low

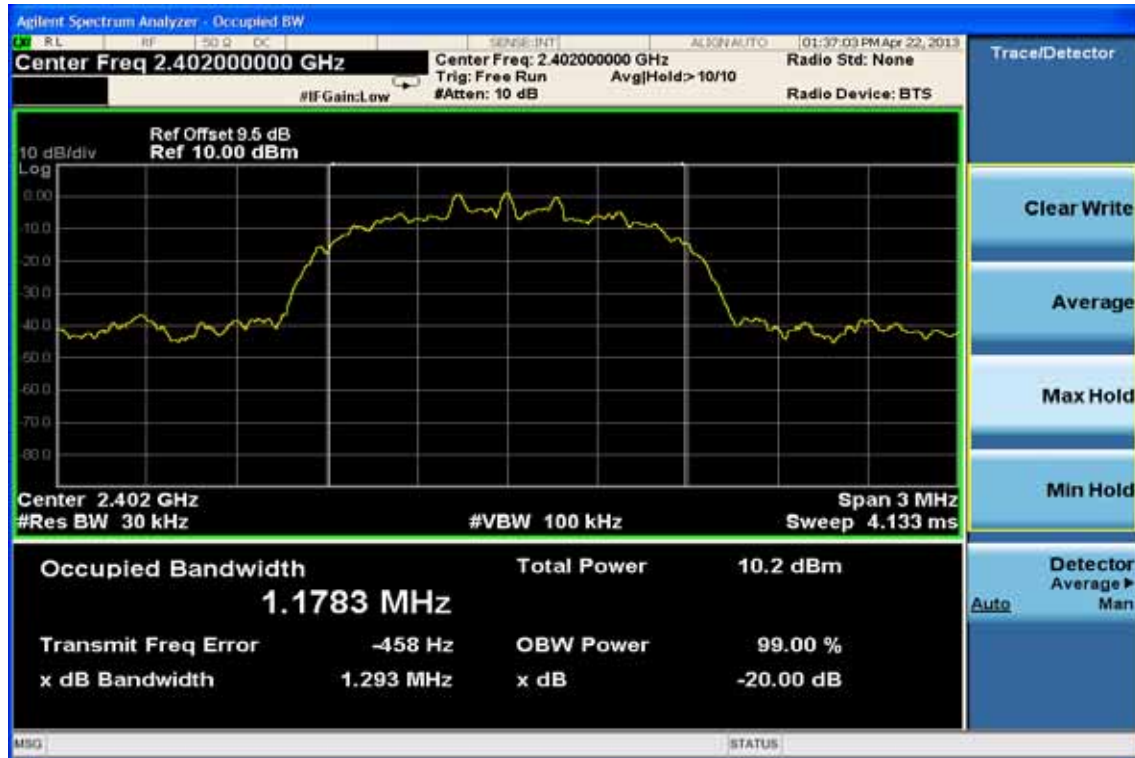

20dB Bandwidth Test Data CH-Mid

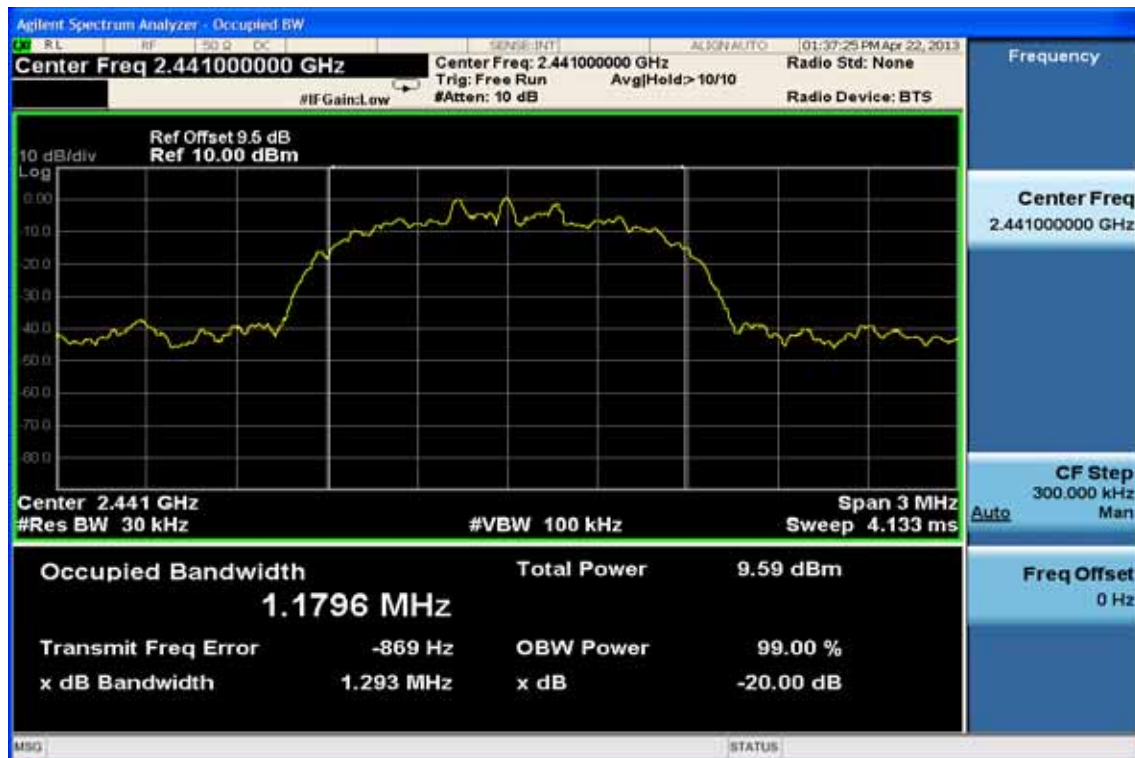

20dB Bandwidth Test Data CH-High

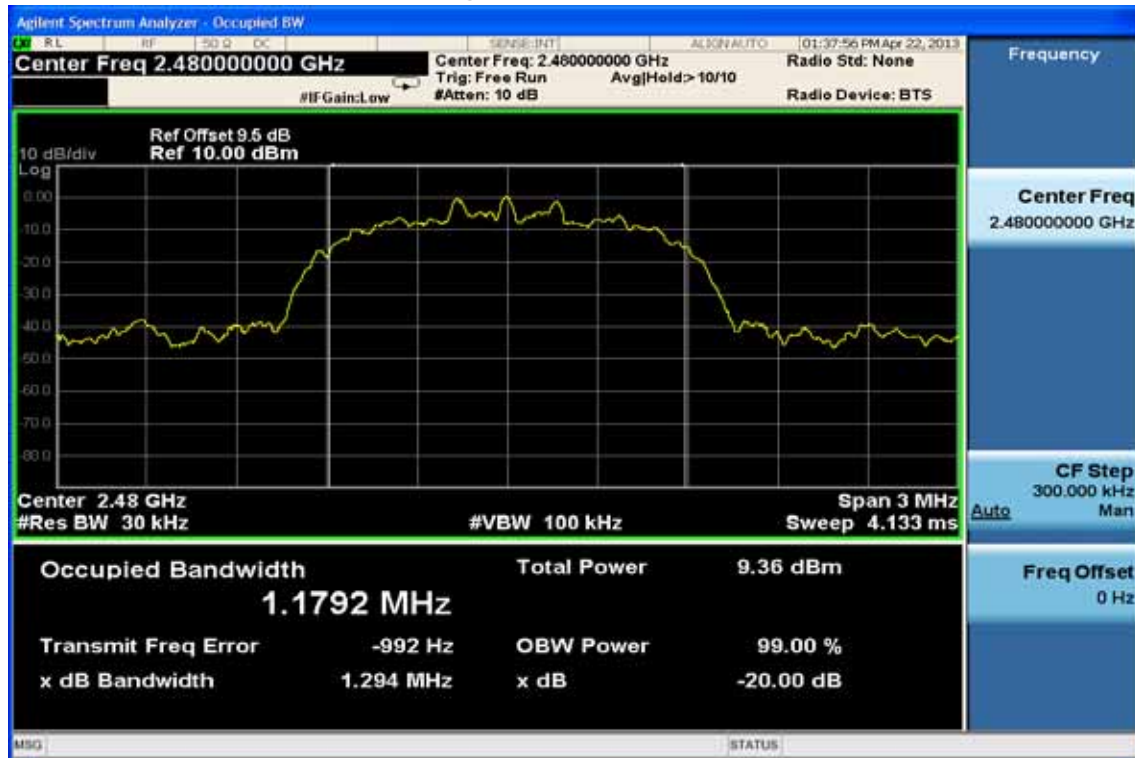

13. ANTENNA REQUIREMENT

13.1. Standard Applicable:

According to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

And according to §15.246(1), if transmitting antennas of directional gain greater than 6dBi are used the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

13.2. Antenna Connected Construction:

The directional gains of antenna used for transmitting is 2.87dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Please see EUT photo for details.

14. RF EXPOSURE

14.1. Standard Applicable

According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to §1.1310 and 2.1091, This is a Mobile device, the MPE is required.

Limits for Maximum Permissive Exposure (MPE)

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minute)
Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	F/1500	30
1500-15000	/	/	1.0	30

F = frequency in MHz

* = Plane-wave equipment power density

14.2. Maximum Permissible Exposure (MPE) Evaluation

The worst case of Peak power of BT EDR 3M mode: refer to section 6.5 for detail measurement date.

EDR 3M Mode

Frequency (MHz)	Reading Power (dBm)	Cable Loss	Output Power (dBm)	Output Power (W)	Limit (W)
2402.00	5.50	0.00	5.50	0.00355	1
2441.00	4.89	0.00	4.89	0.00308	1
2480.00	4.63	0.00	4.63	0.00290	1

MPE Prediction (BT EDR 3M Mode)

Prediction of MPE limit at a given distance

Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = PG / 4 \pi R^2$$

Where: S = Power density

P = Power input to antenna

G = Power gain of the antenna in the direction of interest relative to an isotropic radiator

R = Distance to the center of radiation of the antenna

Maximum Peak output power at antenna input terminal:	5.5	(dBm)
Maximum Peak output power at antenna input terminal:	3.548133892	(mW)
Duty cycle:	78	(%)
Maximum Pav :	2.767544436	(mW)
Antenna gain (typical):	2.87	(dBi)
Maximum antenna gain:	1.936421964	(numeric)
Prediction distance:	20	(cm)
Prediction frequency:	2402	(MHz)
MPE limit for uncontrolled exposure at prediction	1	(mW/cm ²)
Power density at predication frequency at 20 (cm)	0.0010667	(mW/cm ²)

Measurement Result

The predicted power density level at 20 cm is 0.0010mW/cm². This is below the uncontrolled exposure limit of 1 mW/cm² at 2402MHz.