

Radio Test Report

FCC ID: OIE55855TR

Original Grant

Report No. : TB-FCC182877
Applicant : LB Technology Co., Ltd.
Equipment Under Test (EUT)
EUT Name : Baby Monitor
Model No. : LB55855T
Series Model No. : LB55855PT, JLB55855T, JLB55855PT
Brand Name : Lbtech JLBtech
Sample ID : TBBJ-20201223-17-01#
Receipt Date : 2021-07-23
Test Date : 2021-07-23 to 2021-08-24
Issue Date : 2021-08-24
Standards : FCC Part 15, Subpart C 15.247
Test Method : ANSI C63.10: 2013
Conclusions : **PASS**

In the configuration tested, the EUT complied with the standards specified above,
The EUT technically complies with the FCC requirements

Test/Witness Engineer : 

Seven Wu

Engineer Supervisor : 

Ivan Su

Engineer Manager : 

Ray Lai



This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in the report.E

Contents

CONTENTS.....	2
1. GENERAL INFORMATION ABOUT EUT	5
1.1 Client Information.....	5
1.2 General Description of EUT (Equipment Under Test)	5
1.3 Block Diagram Showing the Configuration of System Tested.....	6
1.4 Description of Support Units	7
1.5 Description of Test Mode.....	7
1.6 Description of Test Software Setting	8
1.7 Measurement Uncertainty	8
1.8 Test Facility.....	9
2. TEST SUMMARY	10
3. TEST SOFTWARE.....	10
4. TEST EQUIPMENT.....	11
5.CONDUCTED EMISSION TEST.....	12
5.1 Test Standard and Limit.....	12
5.2 Test Setup.....	12
5.3 Test Procedure.....	13
5.4 Deviation From Test Standard.....	13
5.5 EUT Operating Mode	13
5.6 Test Data.....	13
6. RADIATED EMISSION TEST	14
6.1 Test Standard and Limit.....	14
6.2 Test Setup.....	15
6.3 Test Procedure.....	16
6.4 Deviation From Test Standard.....	17
6.5 EUT Operating Condition	17
6.6 Test Data.....	17
7. RESTRICTED BANDS AND BAND-EDGE TEST	18
7.1 Test Standard and Limit.....	18
7.2 Test Setup.....	18
7.3 Test Procedure.....	19
7.4 Deviation From Test Standard.....	19
7.5 EUT Operating Condition	19
7.6 Test Data.....	19
8. NUMBER OF HOPPING CHANNEL	20
8.1 Test Standard and Limit.....	20
8.2 Test Setup.....	20
8.3 Test Procedure.....	20
8.4 Deviation From Test Standard.....	20
8.5 EUT Operating Condition	20

8.6 Test Data.....	20
9. AVERAGE TIME OF OCCUPANCY.....	21
9.1 Test Standard and Limit.....	21
9.2 Test Setup.....	21
9.3 Test Procedure.....	21
9.4 EUT Operating Condition	21
9.4 Deviation From Test Standard.....	21
9.5 Test Data.....	21
10. CHANNEL SEPARATION AND BANDWIDTH TEST.....	22
10.1 Test Standard and Limit	22
10.2 Test Setup.....	22
10.3 Test Procedure.....	22
10.4 Deviation From Test Standard.....	22
10.5 EUT Operating Condition	22
10.6 Test Data.....	22
11. PEAK OUTPUT POWER TEST.....	23
11.1 Test Standard and Limit	23
11.2 Test Setup.....	23
11.3 Test Procedure.....	23
11.4 Deviation From Test Standard.....	23
11.5 EUT Operating Condition	23
11.6 Test Data.....	23
12. ANTENNA REQUIREMENT.....	24
12.1 Standard Requirement.....	24
12.2 Deviation From Test Standard.....	24
12.3 Antenna Connected Construction.....	24
12.4 Result.....	24
ATTACHMENT A-- CONDUCTED EMISSION TEST DATA	25
ATTACHMENT B-- RADIATED EMISSION TEST DATA	27
ATTACHMENT C-- RESTRICTED BANDS REQUIREMENT TEST DATA.....	35
ATTACHMENT D-- NUMBER OF HOPPING CHANNEL TEST DATA.....	41
ATTACHMENT E-- AVERAGE TIME OF OCCUPANCY TEST DATA.....	42
ATTACHMENT F-- CHANNEL SEPARATION AND BANDWIDTH TEST DATA.....	44
BANDWIDTH TEST DATA:	44
ATTACHMENT G-- PEAK OUTPUT POWER TEST DATA	48

Revision History

Report No.	Version	Description	Issued Date
TB-FCC182877	Rev.01	Initial issue of report	2021-08-24

1. General Information about EUT

1.1 Client Information

Applicant	:	LB Technology Co., Ltd.
Address	:	No. 5 of Xiaoyang Rd, First Industrial Park, Tanzhou Town, Zhongshan City, Guangdong, China
Manufacturer	:	LB Technology Co., Ltd.
Address	:	No.1 of Fuhua Road, Anfu District, Tanzhou Town, Zhongshan City, Guangdong Province, China

1.2 General Description of EUT (Equipment Under Test)

EUT Name	:	Baby Monitor	
Models No.	:	LB55855T, LB55855PT, JLB55855T, JLB55855PT	
Model Difference	:	All these models are the same PCB, layout and electrical circuit, The only difference is the Brand Name.	
Product Description	:	Operation Frequency:	2410MHz~2477MHz
	:	Number of Channel:	23 Channels See Note 2
	:	Max Peak Output Power:	12.503dBm
	:	Antenna Gain:	3dBi FPC Antenna
	:	Modulation Type:	GFSK
Power Supply	:	DC Voltage Supply from AC/DC Adapter	
Power Rating	:	DC5V from Adapter Input: AC 100-240V~50/60Hz, 0.2A Output: DC 5.0V,1000mA	
Software Version	:	VC0902	
Hardware Version	:	V 1.0.0	
Remark	:	The adapter and antenna gain provided by the applicant, the verified for the RF conduction test provided by TOBY test lab.	

Note:

- (1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

(2) Channel List:

Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2410	15	2456		
01	2414	16	2459		
02	2417	17	2462		
03	2420	18	2465		
04	2423	19	2468		
05	2426	20	2471		
06	2429	21	2474		
07	2432	22	2477		
08	2435				
09	2438				
10	2441				
11	2444				
12	2447				
13	2450				
14	2453				

Note: Test frequencies are lowest channel: 2410MHz, middle channel: 2441MHz and highest channel: 2477MHz.

(3) The Antenna information about the equipment is provided by the applicant.

1.3 Block Diagram Showing the Configuration of System Tested

Adapter & TX Mode



1.4 Description of Support Units

The EUT has been tested as an independent unit.

1.5 Description of Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned follow was evaluated respectively.

For Conducted Test	
Final Test Mode	Description
Mode 1	Adapter+ TX Mode

For Radiated Test	
Final Test Mode	Description
Mode 1	TX GFSK Mode
Mode 2	TX Mode(GFSK) Channel 00/10/22
Mode 3	Hopping TX Mode

Note:

- (1) For all test, we have verified the construction and function in typical operation. And all the test modes were carried out with the EUT in transmitting operation in maximum power with all kinds of data rate. We have pretested all the test modes above.

According to ANSI C63.10 standards, the measurements are performed at the highest, middle, lowest available channels, and the worst case data rate as follows:

TX Mode: GFSK (4Mbps)

- (2) The EUT is considered a portable unit; it was pre-tested on the positioned of each 3 axis, X-plane, Y-plane and Z-plane. The worst case was found positioned on X-plane as the normal use. Therefore only the test data of this X-plane was used for radiated emission measurement test.

1.6 Description of Test Software Setting

During testing channel power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of Bluetooth mode.

Test Software Version	Adjust and control the corresponding transmission frequency through the EUT entity key.		
Frequency	2410 MHz	2441 MHz	2477 MHz
GFSK	DEF	DEF	DEF

1.7 Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

Test Item	Parameters	Expanded Uncertainty (U_{Lab})
Conducted Emission	Level Accuracy: 9kHz~150kHz 150kHz to 30MHz	± 3.50 dB ± 3.10 dB
Radiated Emission	Level Accuracy: 9kHz to 30 MHz	± 4.60 dB
Radiated Emission	Level Accuracy: 30MHz to 1000 MHz	± 4.20 dB
Radiated Emission	Level Accuracy: Above 1000MHz	± 4.20 dB

1.8 Test Facility

The testing report were performed by the Shenzhen Toby Technology Co., Ltd., in their facilities located at 1/F., Building 6, Rundongsheng Industrial Zone, Longzhu, Xixiang, Bao'an, Shenzhen, Guangdong, China. At the time of testing, the following bodies accredited the Laboratory:

CNAS (L5813)

The Laboratory has been accredited by CNAS to ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories for the competence in the field of testing. And the Registration No.: CNAS L5813.

A2LA Certificate No.: 4750.01

The laboratory has been accredited by American Association for Laboratory Accreditation(A2LA) to ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories for the technical competence in the field of Electrical Testing. And the A2LA Certificate No.: 4750.01. FCC Accredited Test Site Number: 854351. Designation Number:CN1223

IC Registration No.: (11950A-1)

The Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing. The site registration: Site# 11950A-1.

2. Test Summary

FCC Part 15 Subpart C(15.247)/ RSS 247 Issue 2				
Standard Section	Test Item	Test Sample(s)	Judgment	Remark
FCC				
15.203	Antenna Requirement	TBBJ-20201223-17-01#	PASS	N/A
15.207	Conducted Emission	TBBJ-20201223-17-01#	PASS	N/A
15.205	Restricted Bands	TBBJ-20201223-17-01#	PASS	N/A
15.247(a)(1)	Hopping Channel Separation	TBBJ-20201223-17-01#	PASS	N/A
15.247(a)(1)	Dwell Time	TBBJ-20201223-17-01#	PASS	N/A
15.247(b)(1)	Peak Output Power	TBBJ-20201223-17-01#	PASS	N/A
15.247(b)(1)	Number of Hopping Frequency	TBBJ-20201223-17-01#	PASS	N/A
15.247(d)	Band Edge	TBBJ-20201223-17-01#	PASS	N/A
15.247(c)& 15.209	Radiated Spurious Emission	TBBJ-20201223-17-01#	PASS	N/A
15.247(a)	99% Occupied Bandwidth & 20dB Bandwidth	TBBJ-20201223-17-01#	PASS	N/A

Note: N/A is an abbreviation for Not Applicable.

3. Test Software

Test Item	Test Software	Manufacturer	Version No.
Conducted Emission	EZ-EMC	EZ	CDI-03A2
Radiation Emission	EZ-EMC	EZ	FA-03A2RE
Radiation Emission	TS+	Tonsced	3.0.0.4
RF Conducted Measurement	MTS-8310	MWRfTest	V2.0.0.0

4. Test Equipment

5. Conducted Emission Test					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
EMI Test Receiver	Rohde & Schwarz	ESCI	100321	Jul. 02, 2021	Jul. 01, 2022
RF Switching Unit	Compliance Direction Systems Inc	RSU-A4	34403	Jul. 02, 2021	Jul. 01, 2022
AMN	SCHWARZBECK	NNBL 8226-2	8226-2/164	Jul. 02, 2021	Jul. 01, 2022
LISN	Rohde & Schwarz	ENV216	101131	Jul. 02, 2021	Jul. 01, 2022
Radiation Emission Test					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
Spectrum Analyzer	Agilent	E4407B	MY45106456	Jul. 02, 2021	Jul. 01, 2022
EMI Test Receiver	Rohde & Schwarz	ESPI	100010/007	Jul. 02, 2021	Jul. 01, 2022
Spectrum Analyzer	Rohde & Schwarz	FSV40-N	102197	Jul. 02, 2021	Jul. 01, 2022
Bilog Antenna	ETS-LINDGREN	3142E	00117537	Mar.01, 2020	Feb. 28, 2022
Horn Antenna	ETS-LINDGREN	3117	00143207	Mar.01, 2020	Feb. 28, 2022
Horn Antenna	ETS-LINDGREN	BBHA 9170	BBHA9170582	Mar.01, 2020	Feb. 28, 2022
Loop Antenna	SCHWARZBECK	FMZB 1519 B	1519B-059	Jul. 02, 2021	Jul. 01, 2022
Pre-amplifier	Sonoma	310N	185903	Feb.25, 2021	Feb. 24, 2022
Pre-amplifier	HP	8449B	3008A00849	Feb.25, 2021	Feb. 24, 2022
Pre-amplifier	SKET	LNPA_1840G-50	SK201904032	Feb.25, 2021	Feb. 24, 2022
Cable	HUBER+SUHNER	100	SUCOFLEX	Feb.25, 2021	Feb. 24, 2022
Positioning Controller	ETS-LINDGREN	2090	N/A	N/A	N/A
Antenna Conducted Emission					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
Spectrum Analyzer	Agilent	E4407B	MY45106456	Jul. 02, 2021	Jul. 01, 2022
Spectrum Analyzer	Rohde & Schwarz	ESPI	100010/007	Jul. 02, 2021	Jul. 01, 2022
MXA Signal Analyzer	Agilent	N9020A	MY49100060	Sep. 11, 2020	Sep. 10, 2021
Vector Signal Generator	Agilent	N5182A	MY50141294	Sep. 11, 2020	Sep. 10, 2021
Analog Signal Generator	Agilent	N5181A	MY50141953	Sep. 11, 2020	Sep. 10, 2021
RF Power Sensor	DARE!! Instruments	RadiPowerRPR3006W	17100015SNO26	Sep. 11, 2020	Sep. 10, 2021
	DARE!! Instruments	RadiPowerRPR3006W	17100015SNO29	Sep. 11, 2020	Sep. 10, 2021
	DARE!! Instruments	RadiPowerRPR3006W	17100015SNO31	Sep. 11, 2020	Sep. 10, 2021
	DARE!! Instruments	RadiPowerRPR3006W	17100015SNO33	Sep. 11, 2020	Sep. 10, 2021

5. Conducted Emission Test

5.1 Test Standard and Limit

5.1.1 Test Standard

FCC Part 15.207/RSS-GEN 8.8

5.1.2 Test Limit

Conducted Emission Test Limit

Frequency	Maximum RF Line Voltage (dB μ V)	
	Quasi-peak Level	Average Level
150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
500kHz~5MHz	56	46
5MHz~30MHz	60	50


Notes:

(1) *Decreasing linearly with logarithm of the frequency.

(2) The lower limit shall apply at the transition frequencies.

(3) The limit decrease in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

5.2 Test Setup

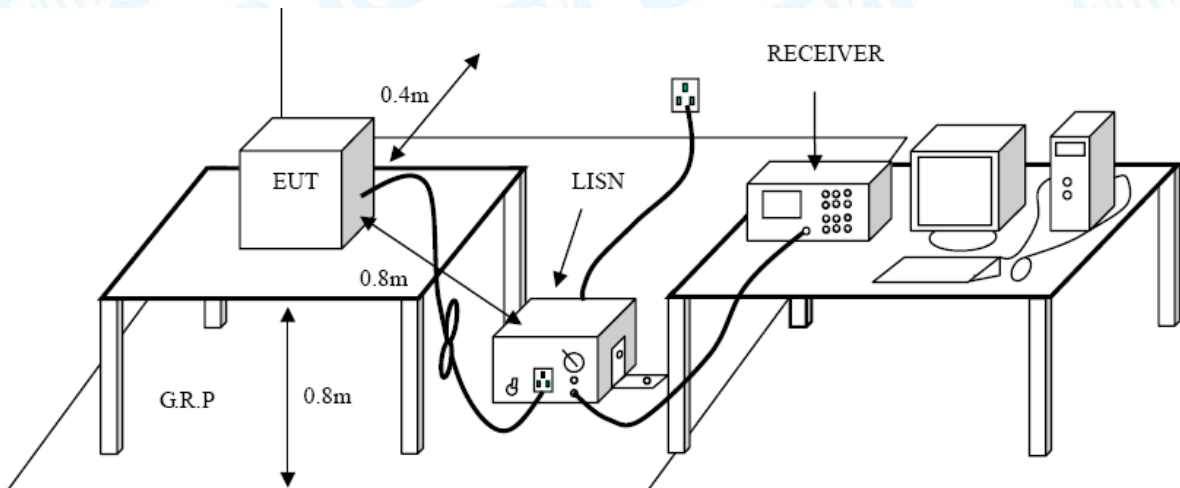

5.3 Test Procedure

The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/50uH of coupling impedance for the measuring instrument.

Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.

I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

LISN at least 80 cm from nearest part of EUT chassis

The bandwidth of EMI test receiver is set at 9kHz, and the test frequency band is from 0.15MHz to 30MHz.

5.4 Deviation From Test Standard

No deviation

5.5 EUT Operating Mode

Please refer to the description of test mode.

5.6 Test Data

Please refer to the Attachment A.

6. Radiated Emission Test

6.1 Test Standard and Limit

6.1.1 Test Standard

FCC Part 15.209/RSS-GEN 8.9

6.1.2 Test Limit

Radiated Emission Limit (9 kHz~1000MHz)

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3


Radiated Emission Limit (Above 1000MHz)

Frequency (MHz)	Distance Meters(at 3m)	
	Peak	Average
Above 1000	74	54


Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission Level (dBuV/m)=20log Emission Level (uV/m)


6.2 Test Setup

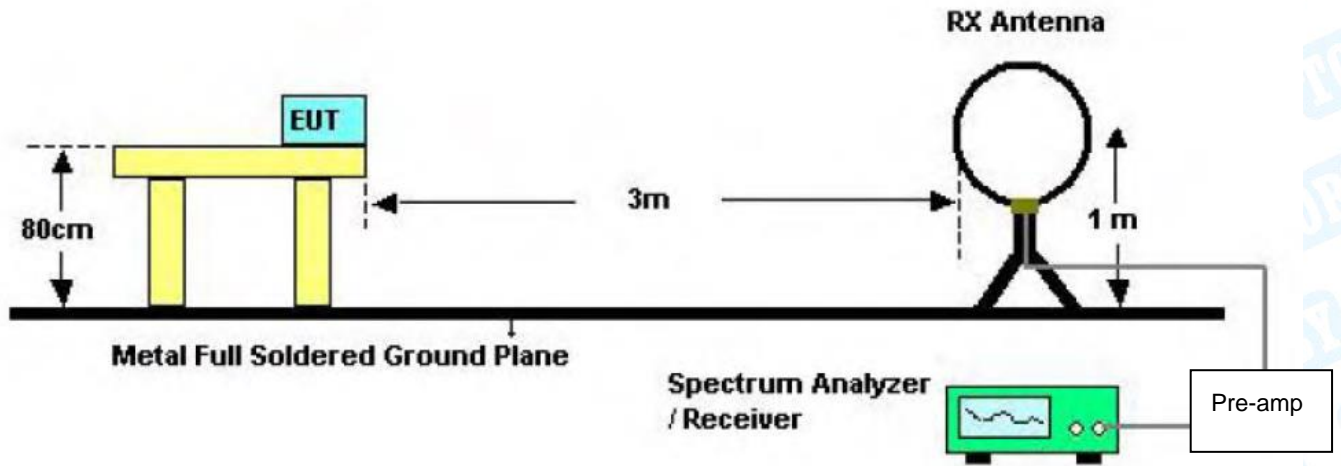

Below 30MHz Test Setup

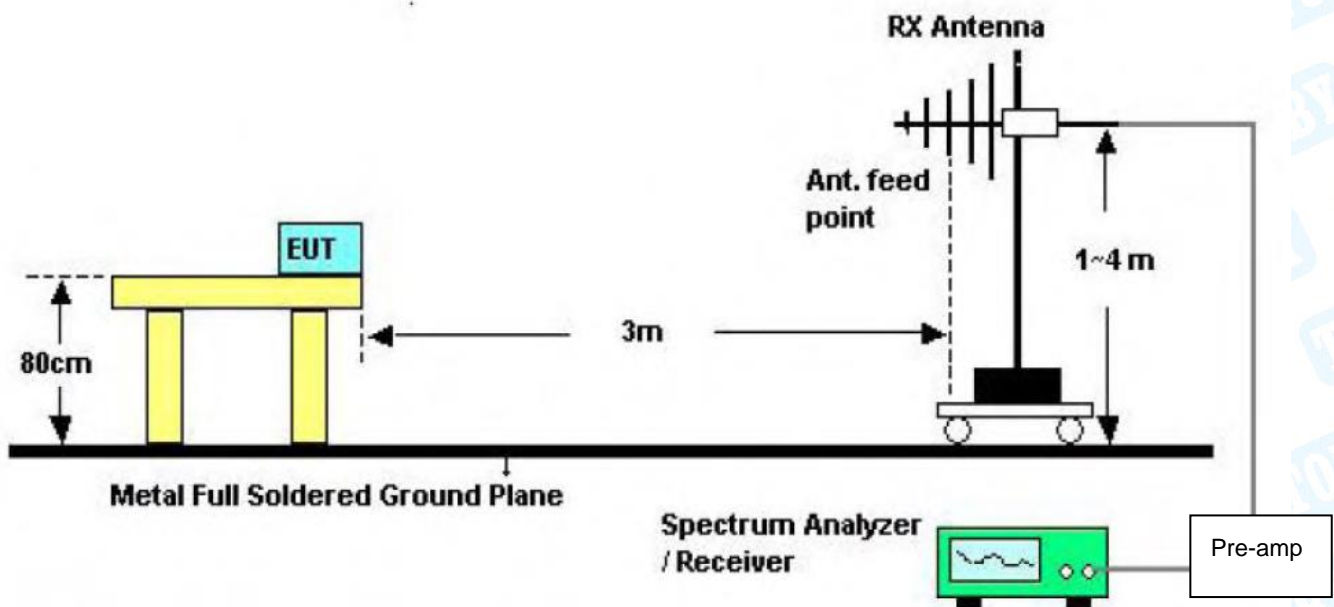

Below 1000MHz Test Setup

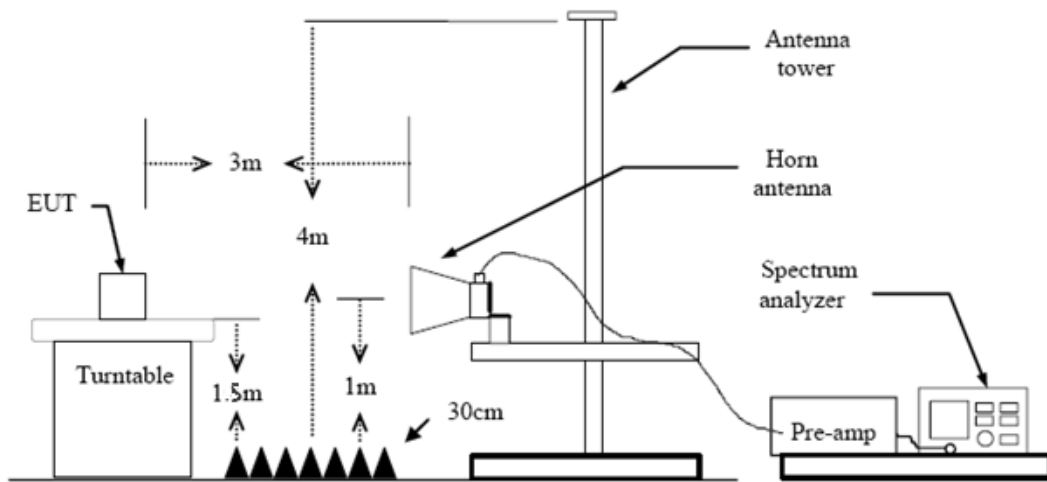

Above 1GHz Test Setup

6.3 Test Procedure

- (1) Measurements at frequency above 1GHz. The EUT was placed on a rotating 1.5m high above the ground. RF absorbers covered the ground plane with a minimum area of 3.0m by 3.0m between the EUT and measurement receiver antenna. The RF absorber shall not exceed 30cm in high above the conducting floor. The table was rotated 360 degrees to determine the position of the highest radiation.
- (2) Measurements at frequency Below 1GHz. The EUT was placed on a rotating 0.8m high above the ground. RF absorbers covered the ground plane with a minimum area of 3.0m by 3.0m between the EUT and measurement receiver antenna. The RF absorber shall not exceed 30cm in high above the conducting floor. The table was rotated 360 degrees to determine the position of the highest radiation.
- (3) The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
- (4) The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- (5) If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit Bellow 1 GHz, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed. But the Peak Value and average value both need to comply with applicable limit above 1 GHz.
- (6) Testing frequency range below 1GHz the measuring instrument use VBW=120 kHz with Quasi-peak detection.
- (7) Testing frequency range above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.
- (8) For the actual test configuration, please see the test setup photo.

6.4 Deviation From Test Standard

No deviation

6.5 EUT Operating Condition

The Equipment Under Test was set to Continual Transmitting in maximum power.

6.6 Test Data

Remark: During testing above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.

Please refer to the Attachment B.

7. Restricted Bands and Band-edge test

7.1 Test Standard and Limit

7.1.1 Test Standard

FCC Part 15.209&15.205


RSS-GEN 8.9&8.10

7.1.2 Test Limit

Restricted Frequency Band (MHz)	Distance Meters(at 3m)	
	Peak	Average
2310 ~2390	74	54
2483.5 ~2500	74	54

Note: All restriction bands have been tested, only the worst case is reported.

7.2 Test Setup

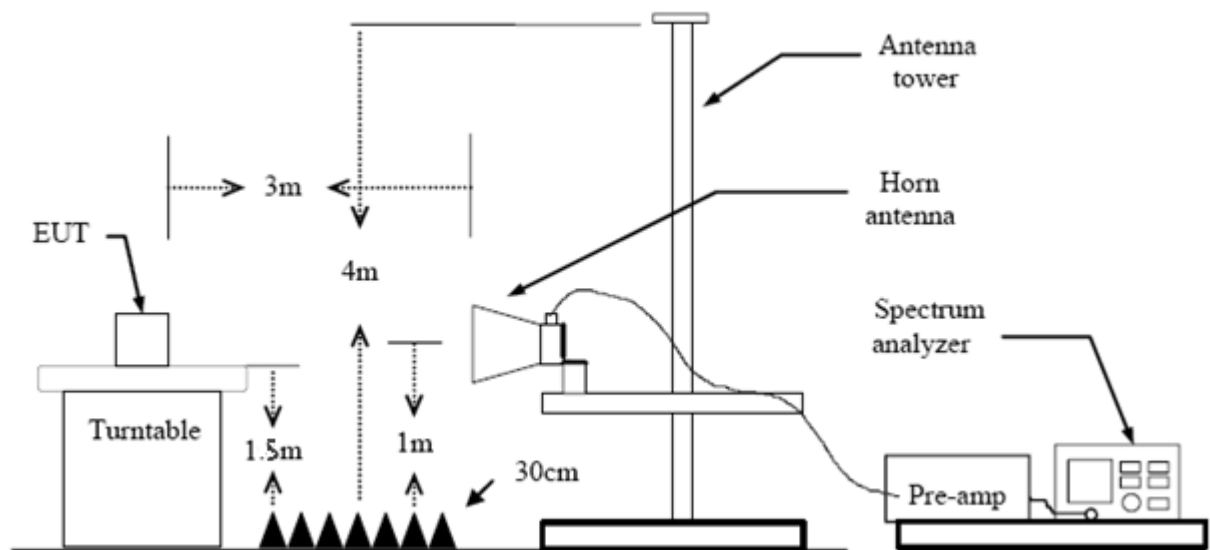

7.3 Test Procedure

- (1) The measuring distance of 3m shall be used for measurements at frequency up to 1GHz and above 1 GHz. The EUT was placed on a rotating 0.8m high above ground, the table was rotated 360 degrees to determine the position of the highest radiation.
- (2) Measurements at frequency above 1GHz. The EUT was placed on a rotating 1.5m high above the ground. RF absorbers covered the ground plane with a minimum area of 3.0m by 3.0m between the EUT and measurement receiver antenna. The RF absorber shall not exceed 30cm in high above the conducting floor. The table was rotated 360 degrees to determine the position of the highest radiation.
- (3) The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
- (4) The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- (5) If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit Bellow 1 GHz, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed. But the Peak Value and average value both need to comply with applicable limit above 1 GHz.
- (6) Testing frequency range below 1GHz the measuring instrument use VBW=120 kHz with Quasi-peak detection.
- (7) Testing frequency range above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with AVG Detector for Average Values.
- (8) For the actual test configuration, please see the test setup photo.

7.4 Deviation From Test Standard

No deviation

7.5 EUT Operating Condition

The Equipment Under Test was set to Continual Transmitting in maximum power.

7.6 Test Data

Remark: During testing above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.

All restriction bands have been tested, only the worst case is reported.

Please refer to the Attachment C.


8. Number of Hopping Channel

8.1 Test Standard and Limit

- 8.1.1 Test Standard
FCC Part 15.247 (a)(1)
- 8.1.2 Test Limit

Section	Test Item	Limit
15.247	Number of Hopping Channel	>15

8.2 Test Setup

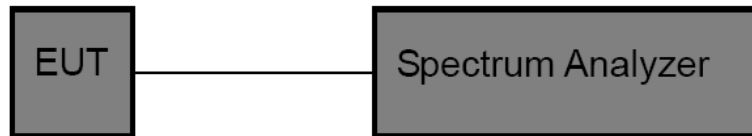

8.3 Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting: RBW=100 KHz, VBW=100 KHz, Sweep time= Auto.

8.4 Deviation From Test Standard

No deviation

8.5 EUT Operating Condition

The EUT was set to the Hopping Mode by the Customer.

8.6 Test Data

Please refer to the Attachment D.

9. Average Time of Occupancy

9.1 Test Standard and Limit


9.1.1 Test Standard

FCC Part 15.247 (a)(1) / RSS 247 5.1(d)

9.1.2 Test Limit

Test Item	Limit
Average Time of Occupancy	0.4 sec

9.2 Test Setup



9.3 Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting: RBW=100KHz, VBW=300KHz.
- (3) Use video trigger with the trigger level set to enable triggering only on full pulses.
- (4) Sweep Time is more than once pulse time.
- (5) Set the center frequency on any frequency would be measure and set the frequency span to zero.
- (6) Measure the maximum time duration of one single pulse.
- (7) Set the EUT for packet transmitting.
- (8) Measure the maximum time duration of one single pulse.

9.4 EUT Operating Condition

The average time of occupancy on any channel within the Period can be calculated with formulas:

The Dwell Time = Burst Width * Total Hops. The detailed calculations are showed as follows:

The duration for dwell time calculation: $0.4 [s] * \text{hopping number} = 0.4 [s] * 20 [ch] = 8.0 [s*ch]$;

The burst width, which is directly measured, refers to the duration on one channel hop.

The maximum number of hopping channels in 8.0s = $3 * (8.0/0.24) = 100$

The lowest, middle and highest channels are selected to perform testing to record the dwell time of each occupation measured in this channel, which is called Pulse Time here.

The EUT was set to the Hopping Mode by the Customer.

9.4 Deviation From Test Standard

No deviation

9.5 Test Data

Please refer to the Attachment E.

10. Channel Separation and Bandwidth Test

10.1 Test Standard and Limit


10.1.1 Test Standard

FCC Part 15.247/RSS 247 5.1(b)

10.1.2 Test Limit

Test Item	Limit	Frequency Range(MHz)
Bandwidth	≤ 1 MHz (20dB bandwidth)	2400~2483.5
Channel Separation	>25 KHz or $>$ two-thirds of the 20 dB bandwidth Which is greater	2400~2483.5

10.2 Test Setup

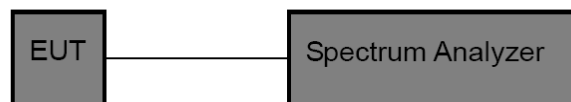

10.3 Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting:
Channel Separation: RBW=100 kHz, VBW=100 kHz.
Bandwidth: RBW=30 kHz, VBW=100 kHz.
- (3) The bandwidth is measured at an amplitude level reduced 20dB from the reference level. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst –case (i.e the widest) bandwidth.
- (4) Measure the channel separation the spectrum analyzer was set to Resolution Bandwidth:30 kHz, and Video Bandwidth:100 kHz. Sweep Time set auto.

10.4 Deviation From Test Standard

No deviation

10.5 EUT Operating Condition

The EUT was set to the Hopping Mode for Channel Separation Test and continuously transmitting for the Bandwidth Test.

10.6 Test Data

Please refer to the Attachment F.

11. Peak Output Power Test

11.1 Test Standard and Limit


11.1.1 Test Standard

FCC Part 15.247 (b) (1)/RSS 247 5.4(b)

11.1.2 Test Limit

Test Item	Limit	Frequency Range(MHz)
Peak Output Power	Hopping Channels>75 Power<1W(30dBm) Other <125 mW(21dBm)	2400~2483.5

11.2 Test Setup

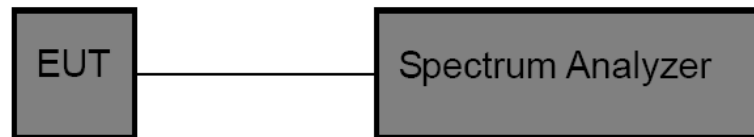

11.3 Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting:
 Peak Detector: RBW=1 MHz, VBW=3 MHz for bandwidth less than 1MHz.
 RBW=3 MHz, VBW=3 MHz for bandwidth more than 1MHz.

11.4 Deviation From Test Standard

No deviation

11.5 EUT Operating Condition

The EUT was set to continuously transmitting in the max power during the test.

11.6 Test Data

Please refer to the Attachment G.

12. Antenna Requirement

12.1 Standard Requirement

12.1.1 Standard

FCC Part 15.203

12.1.2 Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

12.2 Deviation From Test Standard

No deviation

12.3 Antenna Connected Construction

The gains of the antenna used for transmitting is 3 dBi, and the antenna connector is de-signed with permanent attachment and no consideration of replacement. Please see the EUT photo for details.


12.4 Result

The EUT antenna is a FPC Antenna. It complies with the standard requirement.

Antenna Type
<input checked="" type="checkbox"/> Permanent attached antenna
<input type="checkbox"/> Unique connector antenna
<input type="checkbox"/> Professional installation antenna

Attachment A-- Conducted Emission Test Data


Temperature:	24.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Terminal:	Line		
Test Mode:	TX GFSK Mode 2410MHz		
Remark:	All channels have been tested and Shows only the worst channels.		

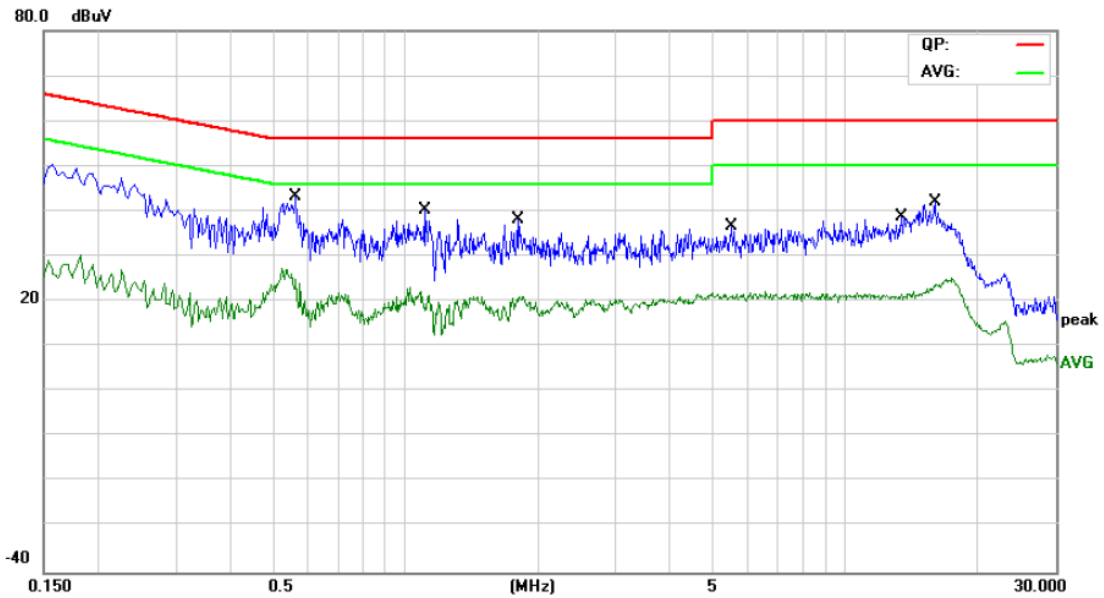

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV	dBuV	dB	
1	*	0.5620	25.75	9.80	35.55	56.00	-20.45	QP
2		0.5620	12.55	9.80	22.35	46.00	-23.65	AVG
3		1.1019	16.99	9.80	26.79	56.00	-29.21	QP
4		1.1019	7.98	9.80	17.78	46.00	-28.22	AVG
5		1.7940	18.09	9.80	27.89	56.00	-28.11	QP
6		1.7940	10.56	9.80	20.36	46.00	-25.64	AVG
7		5.4860	16.75	9.82	26.57	60.00	-33.43	QP
8		5.4860	10.12	9.82	19.94	50.00	-30.06	AVG
9		13.3580	17.81	9.97	27.78	60.00	-32.22	QP
10		13.3580	10.04	9.97	20.01	50.00	-29.99	AVG
11		15.9660	20.84	10.00	30.84	60.00	-29.16	QP
12		15.9660	12.06	10.00	22.06	50.00	-27.94	AVG

Emission Level= Read Level+ Correct Factor

Temperature:	24.8°C	Relative Humidity:	47%
Test Voltage:	AC 120V/60Hz		
Terminal:	Neutral		
Test Mode:	TX GFSK Mode 2410MHz		
Remark:	All channels have been tested and Shows only the worst channels.		

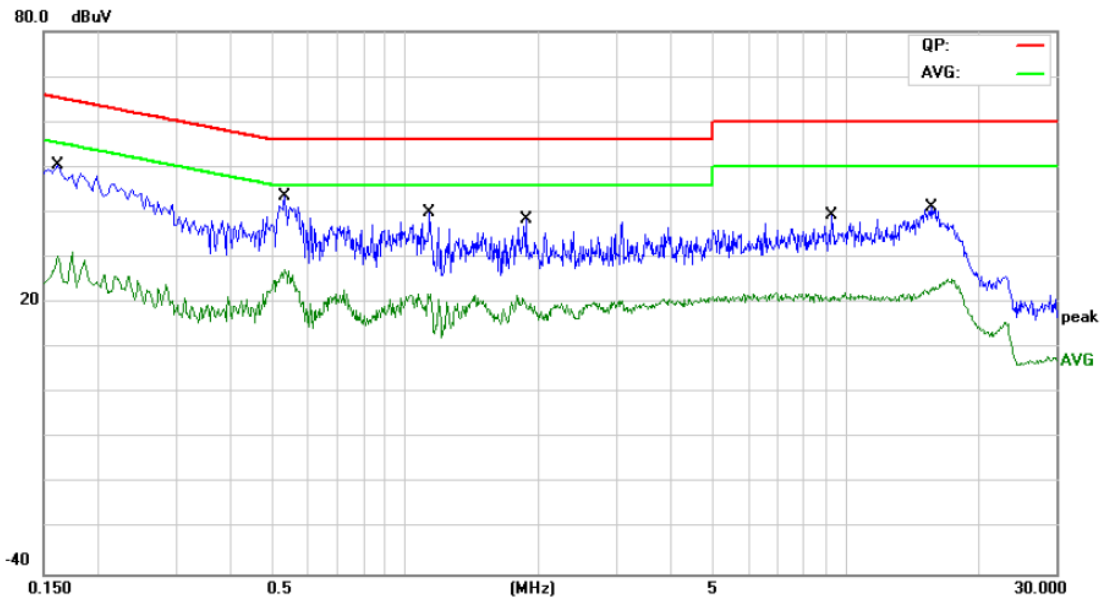

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1620	34.13	9.80	43.93	65.36	-21.43	QP
2		0.1620	16.05	9.80	25.85	55.36	-29.51	AVG
3	*	0.5299	26.73	9.80	36.53	56.00	-19.47	QP
4		0.5299	16.20	9.80	26.00	46.00	-20.00	AVG
5		1.1340	21.07	9.80	30.87	56.00	-25.13	QP
6		1.1340	9.67	9.80	19.47	46.00	-26.53	AVG
7		1.8740	17.56	9.80	27.36	56.00	-28.64	QP
8		1.8740	8.90	9.80	18.70	46.00	-27.30	AVG
9		9.2739	17.36	9.90	27.26	60.00	-32.74	QP
10		9.2739	9.91	9.90	19.81	50.00	-30.19	AVG
11		15.6020	21.09	10.00	31.09	60.00	-28.91	QP
12		15.6020	11.68	10.00	21.68	50.00	-28.32	AVG

Emission Level= Read Level+ Correct Factor

Attachment B-- Radiated Emission Test Data


9KHz~30MHz

From 9KHz to 30MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

30MHz~1GHz

Temperature:	23.7°C	Relative Humidity:	46%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX GFSK Mode 2406MHz		
Remark:	Only worse case is reported		

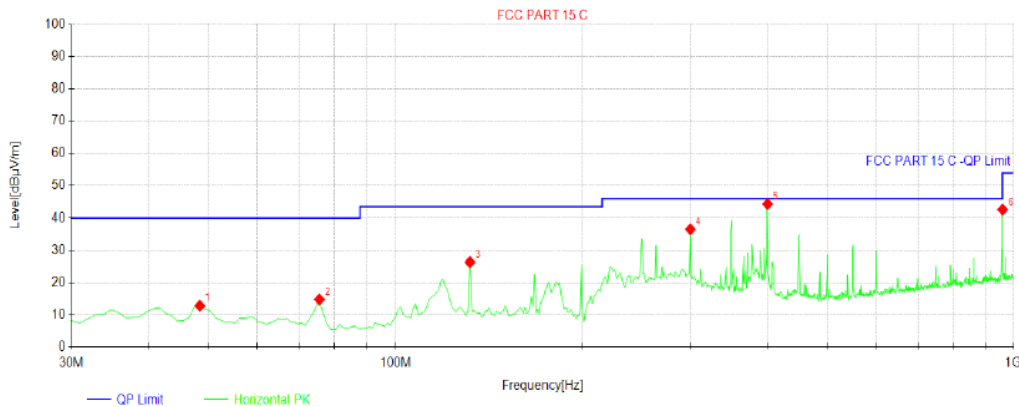


Suspected Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	48.4484	12.86	-28.70	40.00	27.14	100	83	Horizontal
2	75.6356	14.79	-32.05	40.00	25.21	100	29	Horizontal
3	131.952	26.32	-28.53	43.50	17.18	100	22	Horizontal
4	299.929	36.48	-27.91	46.00	9.52	100	290	Horizontal
5	399.939	44.30	-25.40	46.00	1.70	100	98	Horizontal
6	960.190	42.57	-15.81	54.00	11.43	100	236	Horizontal

*:Maximum data x:Over limit !:over margin

Emission Level= Read Level+ Correct Factor

Temperature:	23.7°C	Relative Humidity:	46%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX GFSK Mode 2406MHz		
Remark:	Only worse case is reported		

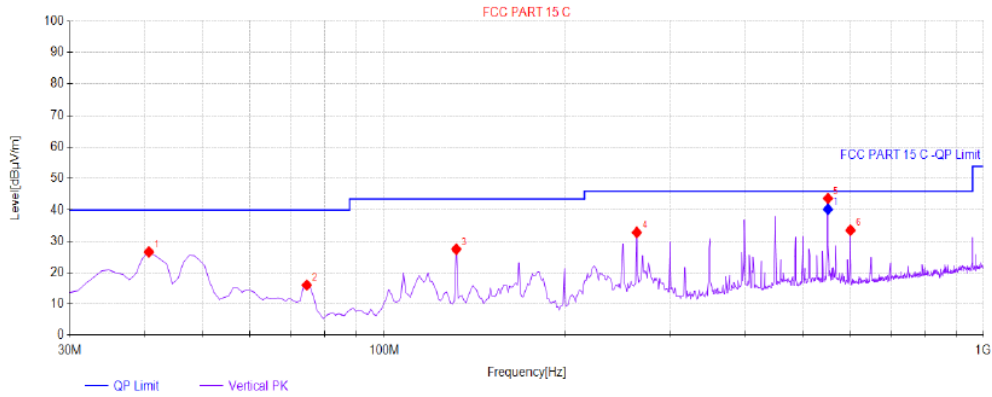

Suspected Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	40.6807	26.58	-28.29	40.00	13.42	100	4	Vertical
2	74.6647	15.98	-31.91	40.00	24.02	100	146	Vertical
3	131.952	27.45	-28.53	43.50	16.05	100	244	Vertical
4	264.004	32.82	-28.99	46.00	13.18	100	354	Vertical
5	550.440	43.66	-22.20	46.00	2.34	100	360	Vertical
6	599.960	33.52	-21.07	46.00	12.48	100	359	Vertical

Final Data List								
NO.	Freq. [MHz]	Factor [dB]	QP Value [dBµV/m]	QP Limit [dBµV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	550.440	-22.20	40.22	46.00	5.78	100	360	Vertical

*:Maximum data x:Over limit !:over margin

Emission Level= Read Level+ Correct Factor

Above 1GHz (Only worse case is reported)

Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX GFSK Mode 2410MHz		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	4809.964	28.22	13.05	41.27	54.00	-12.73	AVG
2		4810.344	41.71	13.06	54.77	74.00	-19.23	peak

Emission Level= Read Level+ Correct Factor

Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX GFSK Mode 2410MHz		
Remark:	No report for the emission which more than 10 dB below the prescribed limit.		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	4819.520	34.06	13.13	47.19	54.00	-6.81	AVG
2		4820.086	45.35	13.13	58.48	74.00	-15.52	peak

Emission Level= Read Level+ Correct Factor

Temperature:	25°C	Relative Humidity:	55%																																				
Test Voltage:	AC 120V/60Hz																																						
Ant. Pol.	Horizontal																																						
Test Mode:	TX GFSK Mode 2441MHz																																						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.																																						
<table border="1"> <thead> <tr> <th>No.</th> <th>Mk.</th> <th>Freq.</th> <th>Reading Level</th> <th>Correct Factor</th> <th>Measurement</th> <th>Limit</th> <th>Over</th> <th></th> </tr> <tr> <th></th> <th></th> <th>MHz</th> <th>dBuV</th> <th>dB/m</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td></td> <td>4881.628</td> <td>45.35</td> <td>13.59</td> <td>58.94</td> <td>74.00</td> <td>-15.06</td> <td>peak</td> </tr> <tr> <td>2</td> <td>*</td> <td>4881.910</td> <td>31.32</td> <td>13.59</td> <td>44.91</td> <td>54.00</td> <td>-9.09</td> <td>AVG</td> </tr> </tbody> </table>				No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over				MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	1		4881.628	45.35	13.59	58.94	74.00	-15.06	peak	2	*	4881.910	31.32	13.59	44.91	54.00	-9.09	AVG
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over																																
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector																															
1		4881.628	45.35	13.59	58.94	74.00	-15.06	peak																															
2	*	4881.910	31.32	13.59	44.91	54.00	-9.09	AVG																															
Emission Level= Read Level+ Correct Factor																																							

Temperature:	25°C	Relative Humidity:	55%																																				
Test Voltage:	AC 120V/60Hz																																						
Ant. Pol.	Vertical																																						
Test Mode:	TX GFSK Mode 2441MHz																																						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.																																						
<table border="1"> <thead> <tr> <th>No.</th> <th>Mk.</th> <th>Freq.</th> <th>Reading Level</th> <th>Correct Factor</th> <th>Measurement</th> <th>Limit</th> <th>Over</th> <th></th> </tr> <tr> <th></th> <th></th> <th>MHz</th> <th>dBuV</th> <th>dB/m</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>*</td> <td>4881.534</td> <td>32.81</td> <td>13.59</td> <td>46.40</td> <td>54.00</td> <td>-7.60</td> <td>AVG</td> </tr> <tr> <td>2</td> <td></td> <td>4881.890</td> <td>46.48</td> <td>13.59</td> <td>60.07</td> <td>74.00</td> <td>-13.93</td> <td>peak</td> </tr> </tbody> </table>				No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over				MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	1	*	4881.534	32.81	13.59	46.40	54.00	-7.60	AVG	2		4881.890	46.48	13.59	60.07	74.00	-13.93	peak
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over																																
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector																															
1	*	4881.534	32.81	13.59	46.40	54.00	-7.60	AVG																															
2		4881.890	46.48	13.59	60.07	74.00	-13.93	peak																															
Emission Level= Read Level+ Correct Factor																																							

Temperature:	25°C	Relative Humidity:	55%																																				
Test Voltage:	AC 120V/60Hz																																						
Ant. Pol.	Horizontal																																						
Test Mode:	TX GFSK Mode 2477MHz																																						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.																																						
<table border="1"> <thead> <tr> <th>No.</th> <th>Mk.</th> <th>Freq.</th> <th>Reading Level</th> <th>Correct Factor</th> <th>Measurement</th> <th>Limit</th> <th>Over</th> <th>Detector</th> </tr> <tr> <th></th> <th></th> <th>MHz</th> <th>dBuV</th> <th>dB/m</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>*</td> <td>4953.904</td> <td>30.71</td> <td>14.10</td> <td>44.81</td> <td>54.00</td> <td>-9.19</td> <td>AVG</td> </tr> <tr> <td>2</td> <td></td> <td>4953.964</td> <td>42.98</td> <td>14.10</td> <td>57.08</td> <td>74.00</td> <td>-16.92</td> <td>peak</td> </tr> </tbody> </table>				No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector			MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		1	*	4953.904	30.71	14.10	44.81	54.00	-9.19	AVG	2		4953.964	42.98	14.10	57.08	74.00	-16.92	peak
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector																															
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB																																
1	*	4953.904	30.71	14.10	44.81	54.00	-9.19	AVG																															
2		4953.964	42.98	14.10	57.08	74.00	-16.92	peak																															
Emission Level= Read Level+ Correct Factor																																							



Temperature:	25°C	Relative Humidity:	55%																																				
Test Voltage:	AC 120V/60Hz																																						
Ant. Pol.	Vertical																																						
Test Mode:	TX GFSK Mode 2477MHz																																						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.																																						
<table border="1"> <thead> <tr> <th>No.</th> <th>Mk.</th> <th>Freq.</th> <th>Reading Level</th> <th>Correct Factor</th> <th>Measurement</th> <th>Limit</th> <th>Over</th> <th>Detector</th> </tr> <tr> <th></th> <th></th> <th>MHz</th> <th>dBuV</th> <th>dB/m</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>*</td> <td>4953.558</td> <td>33.18</td> <td>14.10</td> <td>47.28</td> <td>54.00</td> <td>-6.72</td> <td>AVG</td> </tr> <tr> <td>2</td> <td></td> <td>4953.892</td> <td>47.10</td> <td>14.10</td> <td>61.20</td> <td>74.00</td> <td>-12.80</td> <td>peak</td> </tr> </tbody> </table>				No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector			MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		1	*	4953.558	33.18	14.10	47.28	54.00	-6.72	AVG	2		4953.892	47.10	14.10	61.20	74.00	-12.80	peak
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector																															
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB																																
1	*	4953.558	33.18	14.10	47.28	54.00	-6.72	AVG																															
2		4953.892	47.10	14.10	61.20	74.00	-12.80	peak																															
Emission Level= Read Level+ Correct Factor																																							

Conducted Emission Test Data

Temperature:	25 °C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX GFSK Mode		
Remark:	This report only shall the worst case mode.		



2410 MHz

0.03GHz-26.5GHz

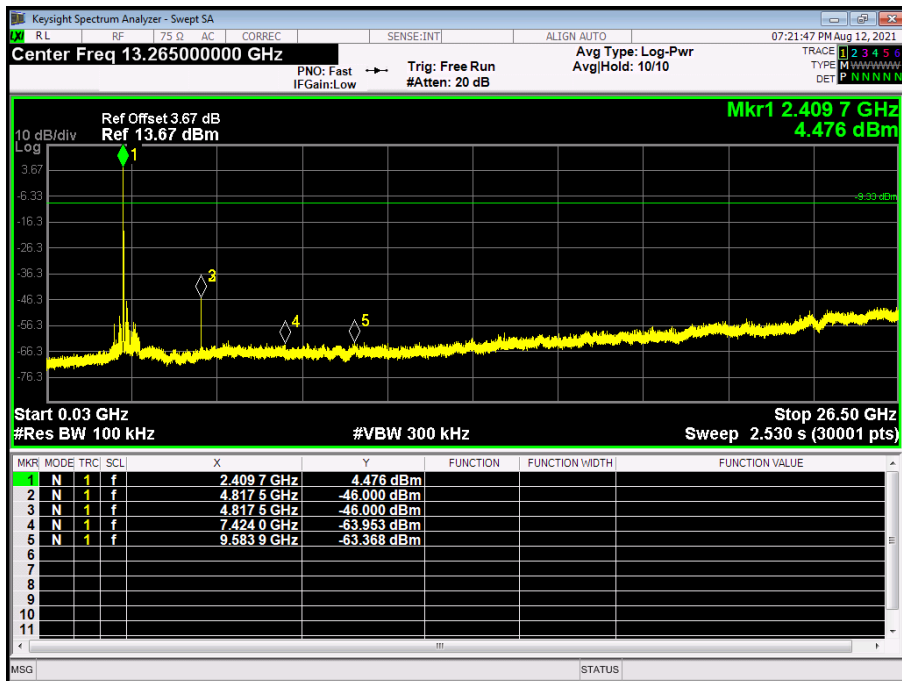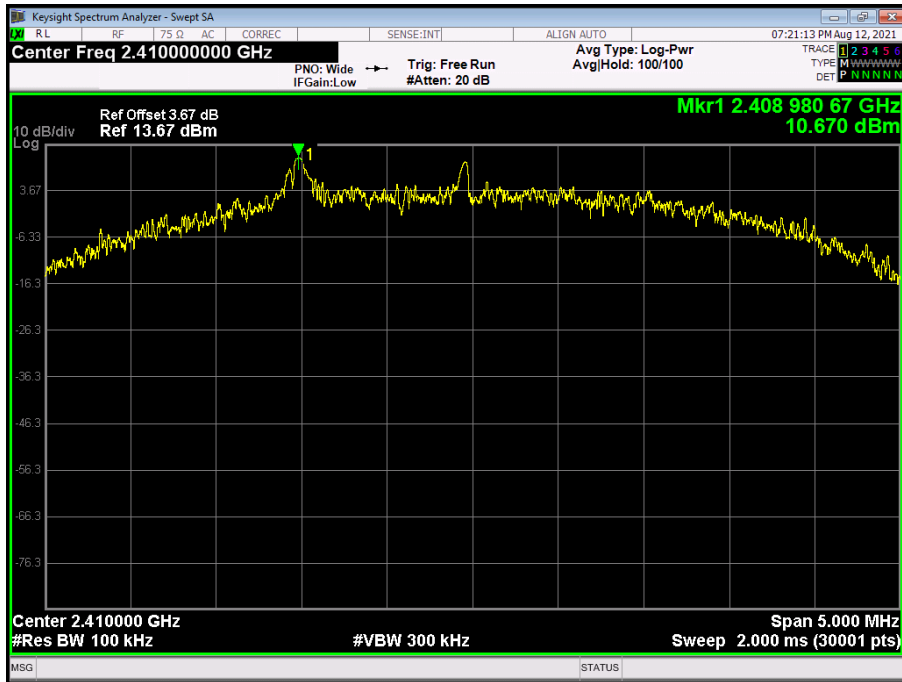



2441 MHz

0.03GHz-26.5GHz

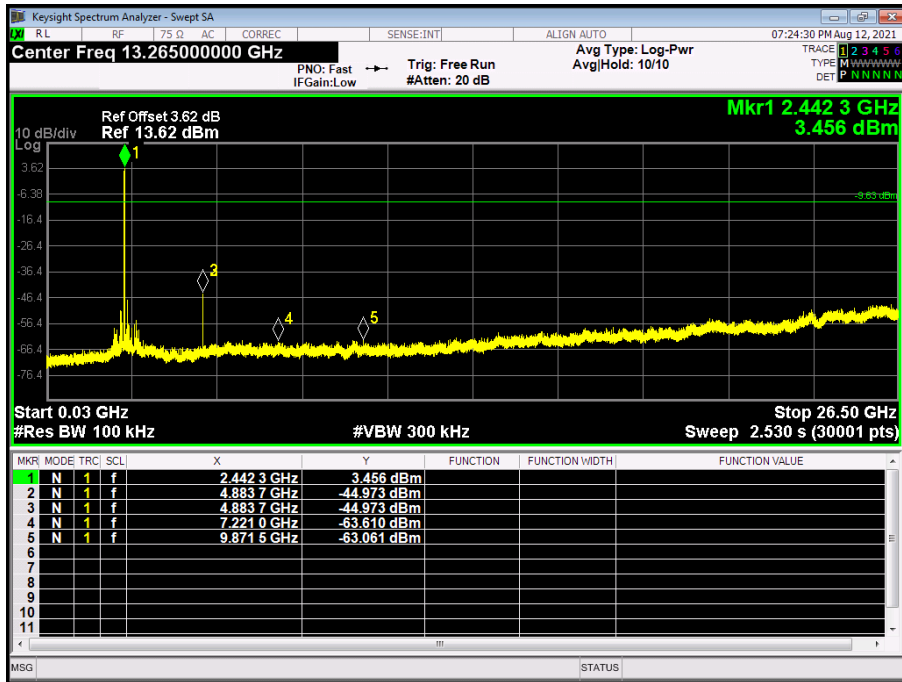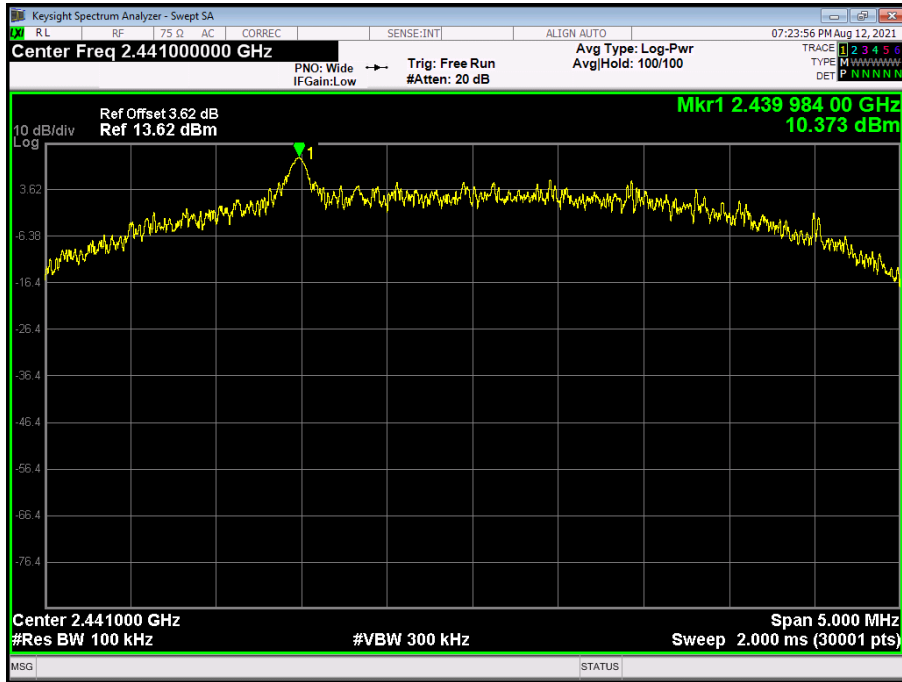

2477 MHz


0.03GHz-26.5GHz

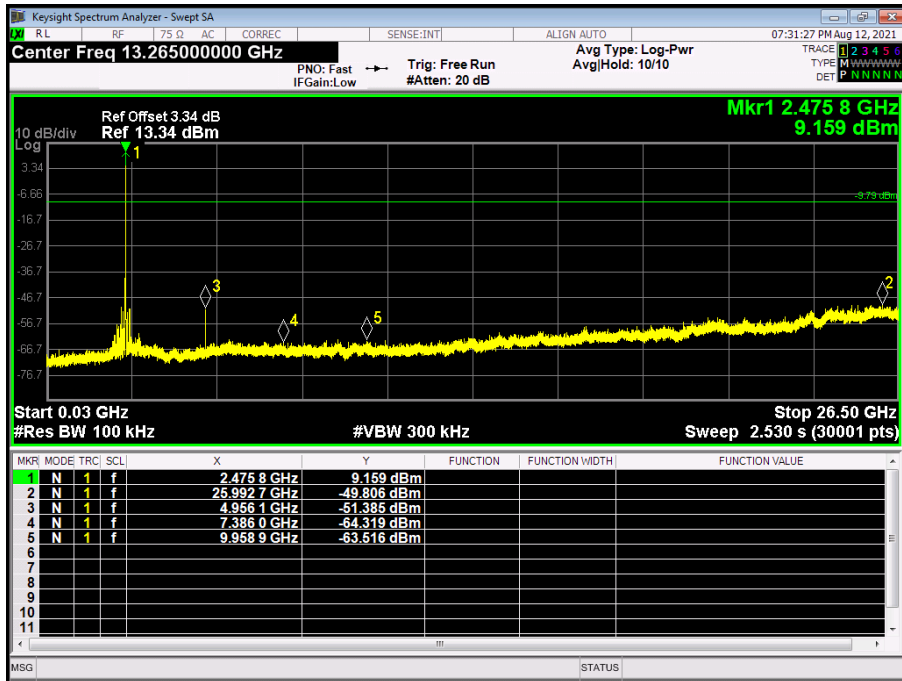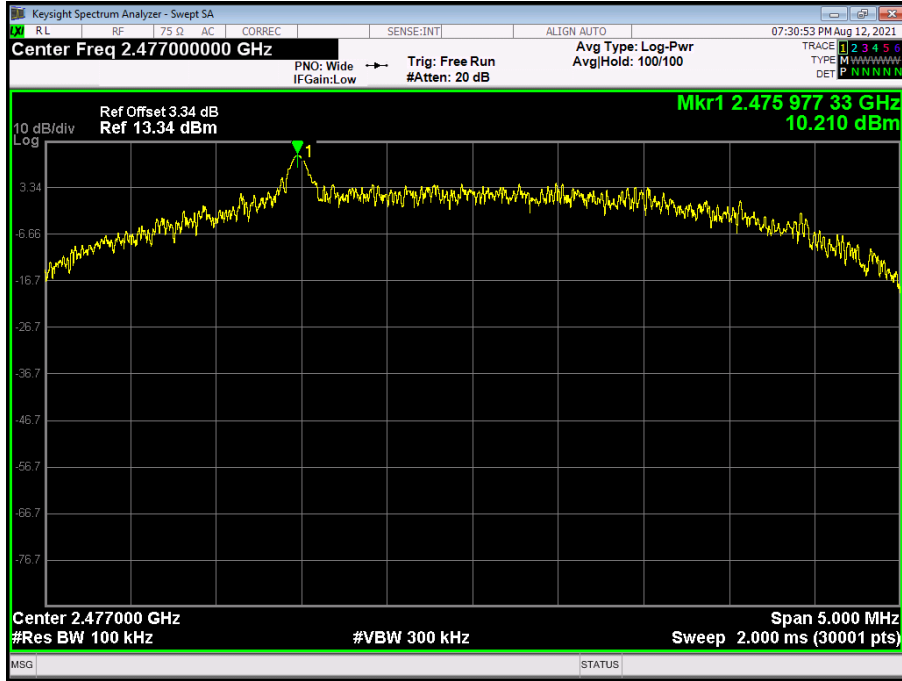

Attachment C-- Restricted Bands Requirement Test Data

(1) Radiation Test


Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX GFSK Mode 2410MHz		
Remark:	Only worse case is reported		

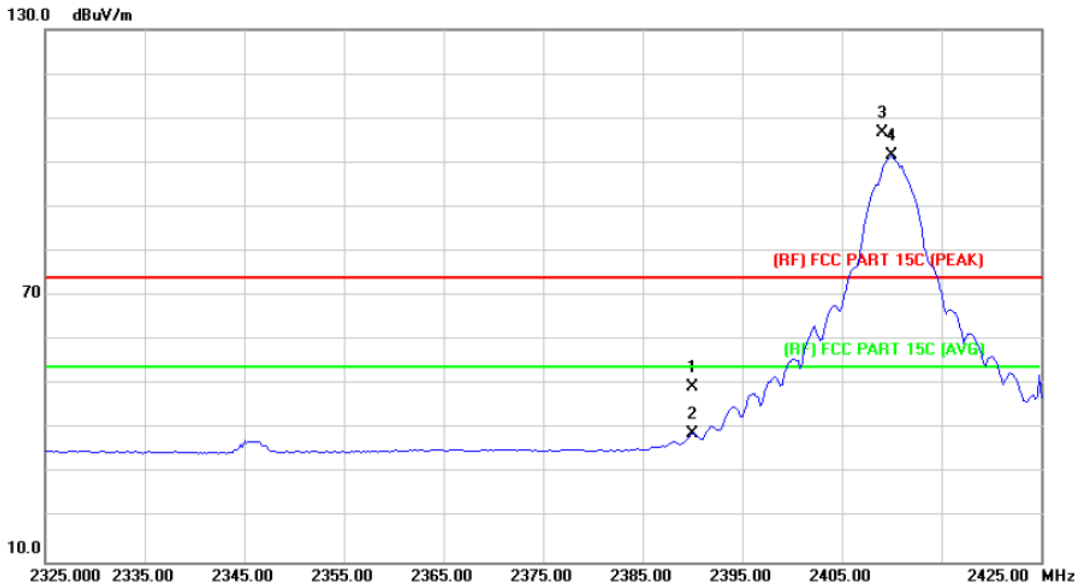

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		2390.000	48.17	1.28	49.45	74.00	-24.55	peak
2		2390.000	37.63	1.28	38.91	54.00	-15.09	AVG
3	X	2409.000	105.43	1.37	106.80	Fundamental Frequency		peak
4	*	2410.000	100.14	1.38	101.52	Fundamental Frequency		AVG

Emission Level= Read Level+ Correct Factor


Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX GFSK Mode 2410MHz		
Remark:	Only worse case is reported		

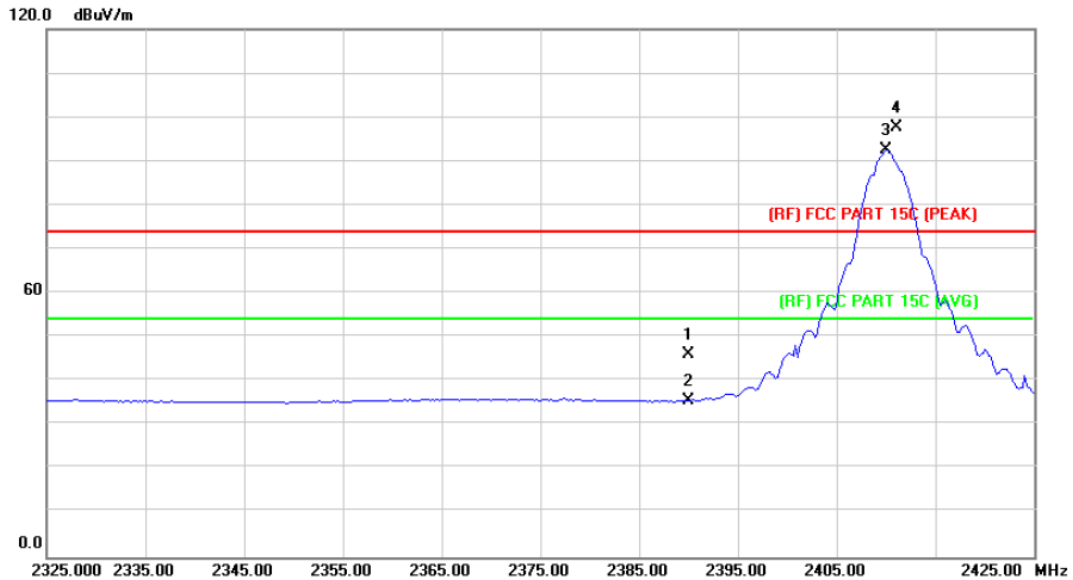

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		2390.000	44.89	1.28	46.17	74.00	-27.83	peak
2		2390.000	34.41	1.28	35.69	54.00	-18.31	AVG
3	*	2410.000	91.06	1.38	92.44	Fundamental Frequency		AVG
4	X	2411.000	96.19	1.38	97.57	Fundamental Frequency		peak

Emission Level= Read Level+ Correct Factor


Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Horizontal		
Test Mode:	TX GFSK Mode 2477 MHz		
Remark:	Only worse case is reported		

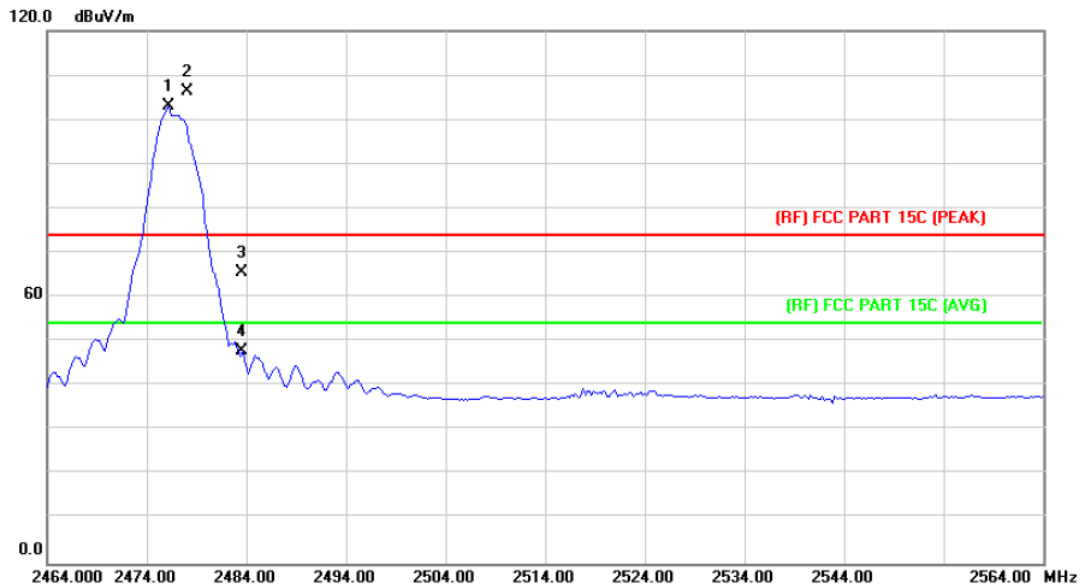

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	2476.200	101.08	1.83	102.91	Fundamental Frequency		AVG
2	X	2478.000	104.53	1.84	106.37	Fundamental Frequency		peak
3		2483.500	63.58	1.88	65.46	74.00	-8.54	peak
4		2483.500	45.94	1.88	47.82	54.00	-6.18	AVG

Emission Level= Read Level+ Correct Factor

Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Ant. Pol.	Vertical		
Test Mode:	TX GFSK Mode 2477 MHz		
Remark:	Only worse case is reported		


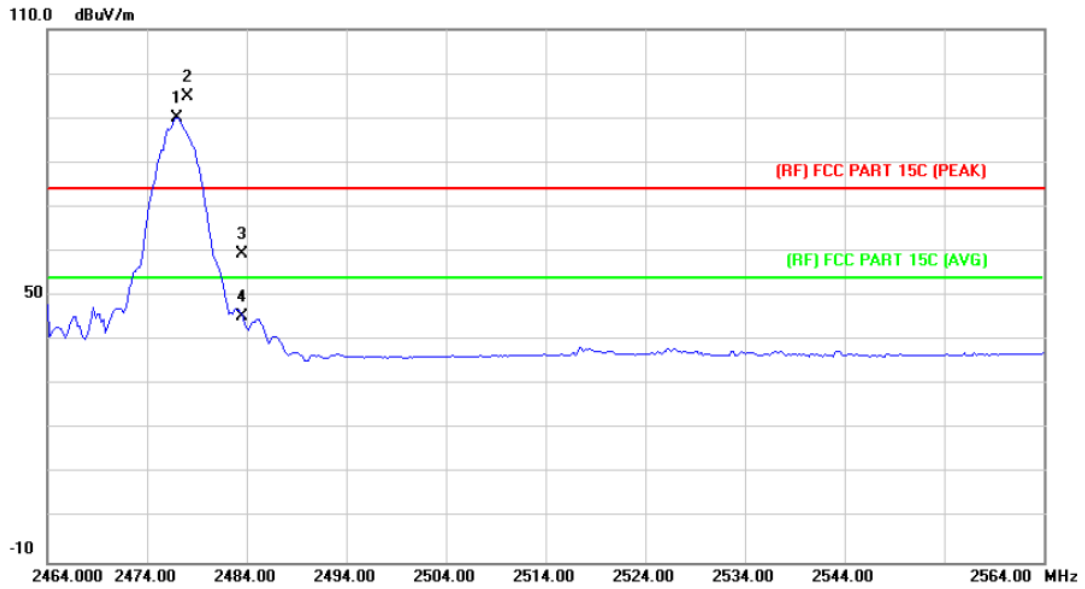


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	2477.000	88.23	1.83	90.06	Fundamental Frequency		AVG
2	X	2478.000	92.91	1.84	94.75	Fundamental Frequency		peak
3		2483.500	57.43	1.88	59.31	74.00	-14.69	peak
4		2483.500	43.35	1.88	45.23	54.00	-8.77	AVG



Emission Level= Read Level+ Correct Factor

(2) Conducted Band Edge Test

Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX GFSK Mode 2410MHz/2477 MHz		
Remark:	Only worse case is reported		

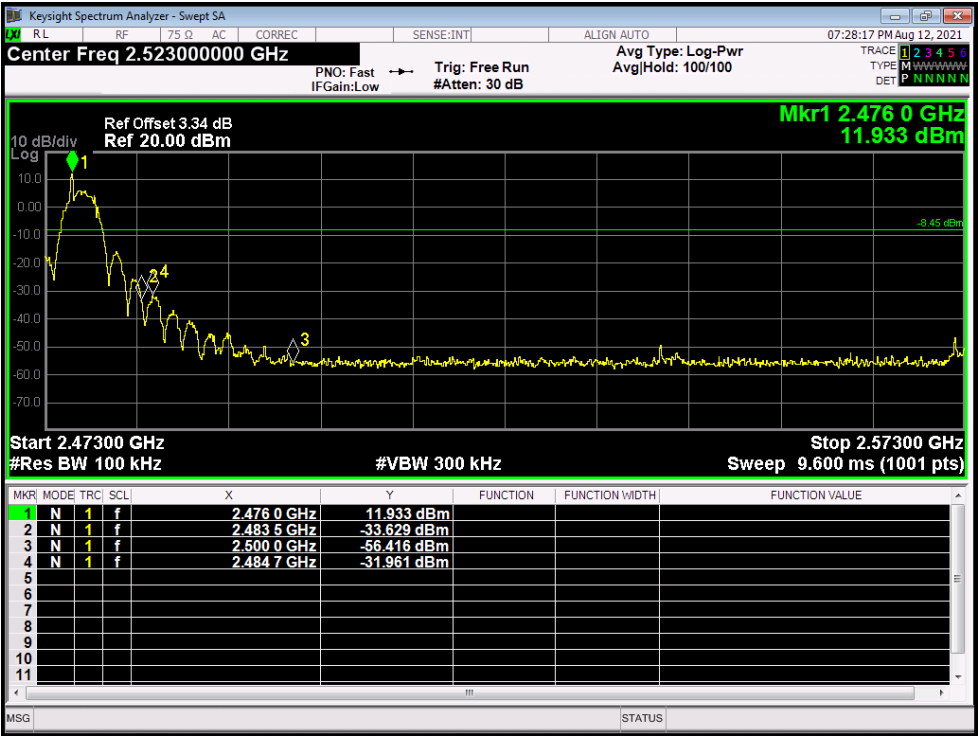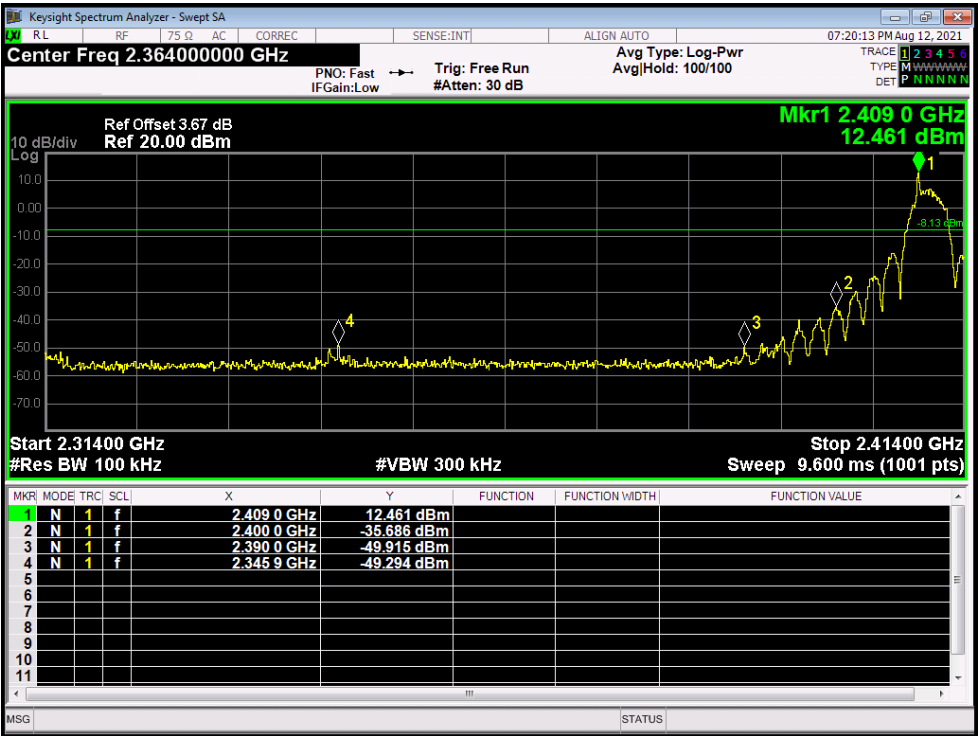


Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	GFSK Hopping Mode		
Remark:	Only worse case is reported		

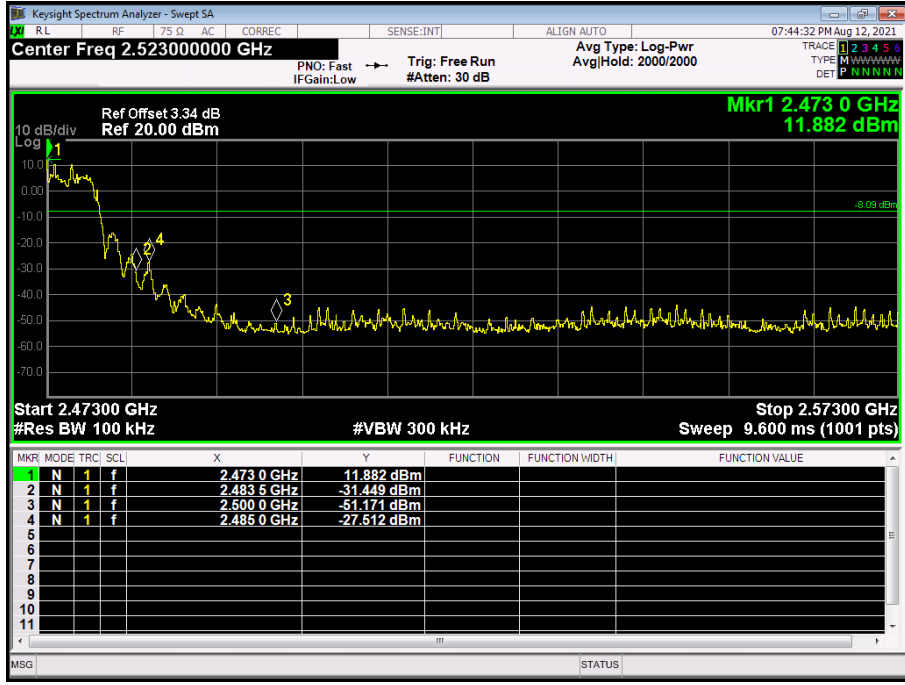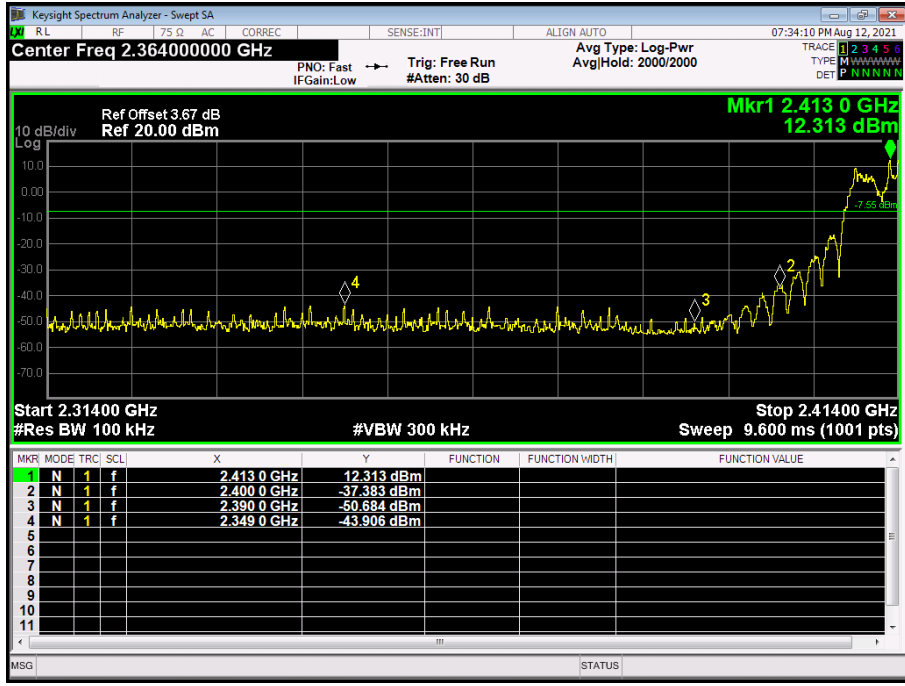

Attachment D-- Number of Hopping Channel Test Data

Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	Hopping Mode		
Frequency Range	Test Mode	Quantity of Hopping Channel	Limit
2410MHz~2477MHz	GFSK	23	>15

GFSK Mode

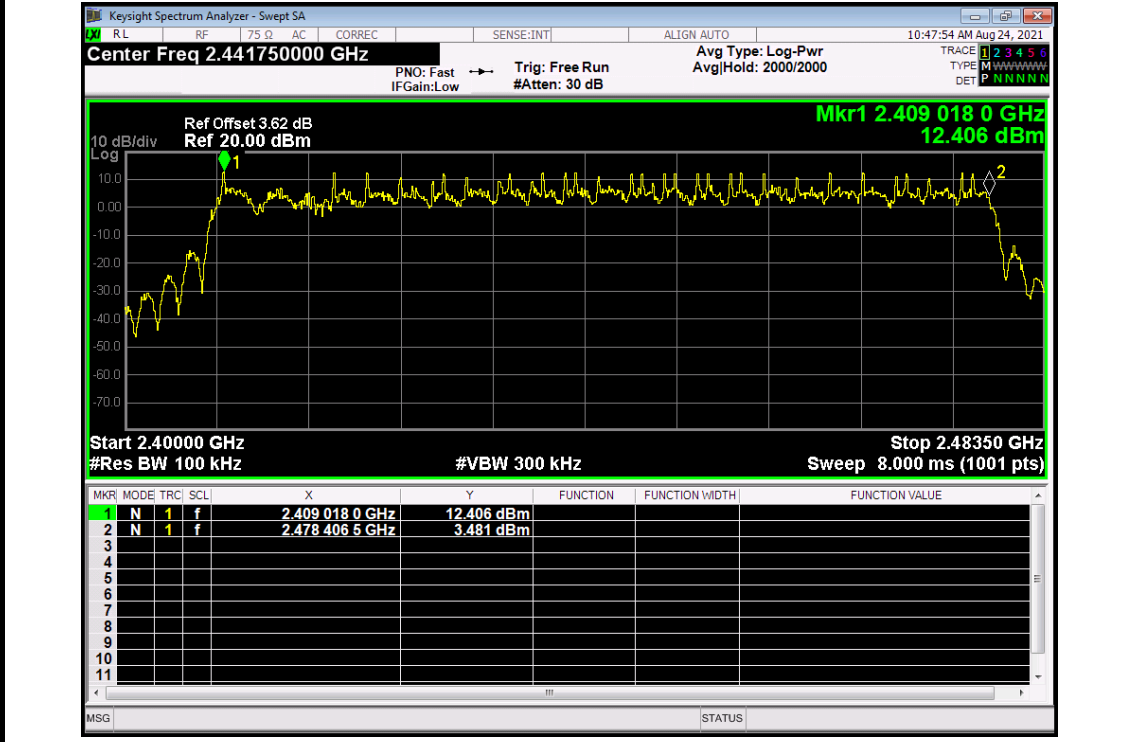


Attachment E-- Average Time of Occupancy Test Data

Temperature: 25°C		Relative Humidity: 55%				
Test Voltage: AC 120V/60Hz						
Test Mode: Hopping Mode (GFSK)						
Remark: The number of total hopping frequencies up to 24.						
Test Mode	Channel (MHz)	Reading Time (ms)	Total hops	Test Result (ms)	Limit (ms)	Result
GFSK	2410	3.280	89	291.92	400	PASS

The Dwell Time = Burst Width * Total Hops. The detailed calculations are showed as follows:
 The duration for dwell time calculation: 0.4 [s] * hopping number = 0.4 [s] * 23 [ch] =9.20[s*ch];
 The burst width, which is directly measured, refers to the duration on one channel hop.
 The maximum number of hopping channels in 9.2s is 89.
 Reading Time=3.280


GFSK Hopping Mode

2410 MHz

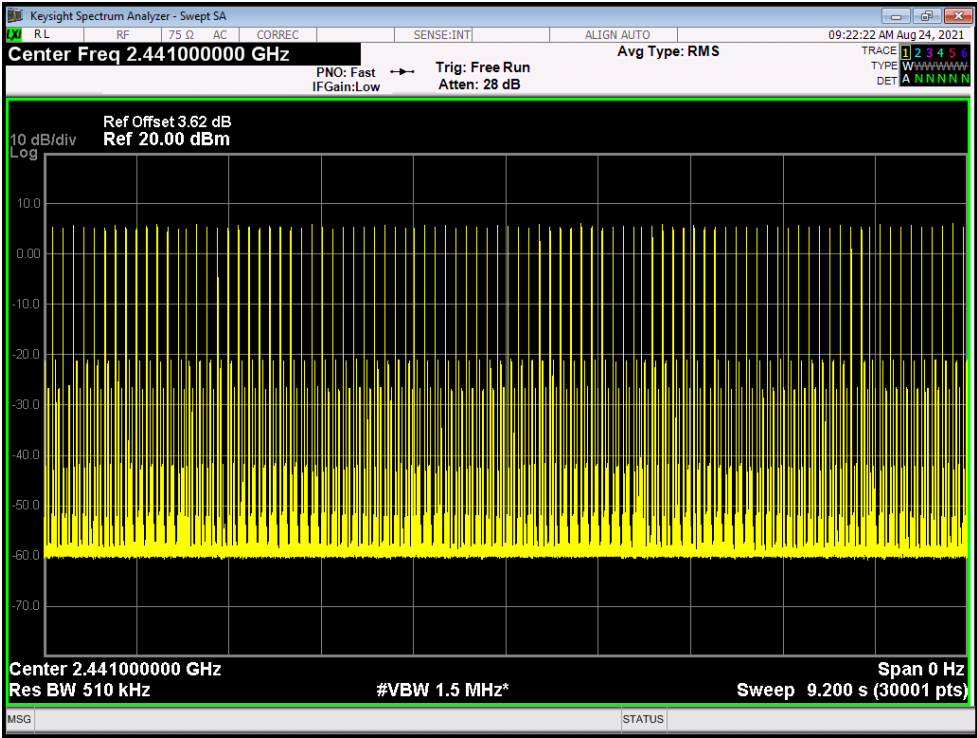

GFSK Hopping Mode

2410 MHz

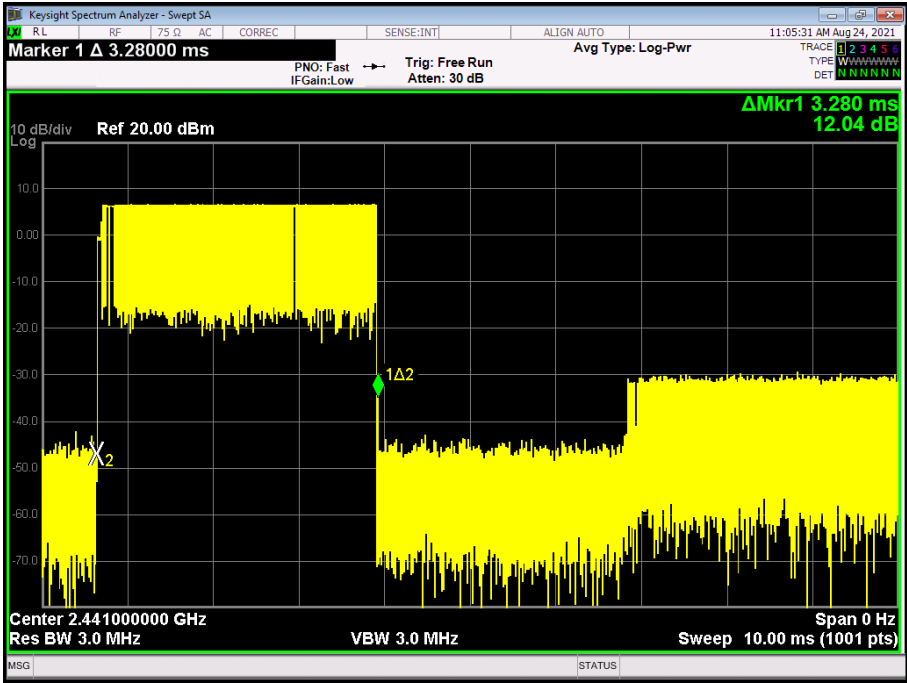


Attachment F-- Channel Separation and Bandwidth Test Data

Bandwidth Test Data:

Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX Mode (GFSK)		
Channel frequency (MHz)	99% OBW (kHz)	20dB Bandwidth (kHz)	20dB Bandwidth *2/3 (kHz)
2410	4356	4416	2944
2441	4415	4633	3088
2477	4402	4407	2938


GFSK TX Mode

2410 MHz

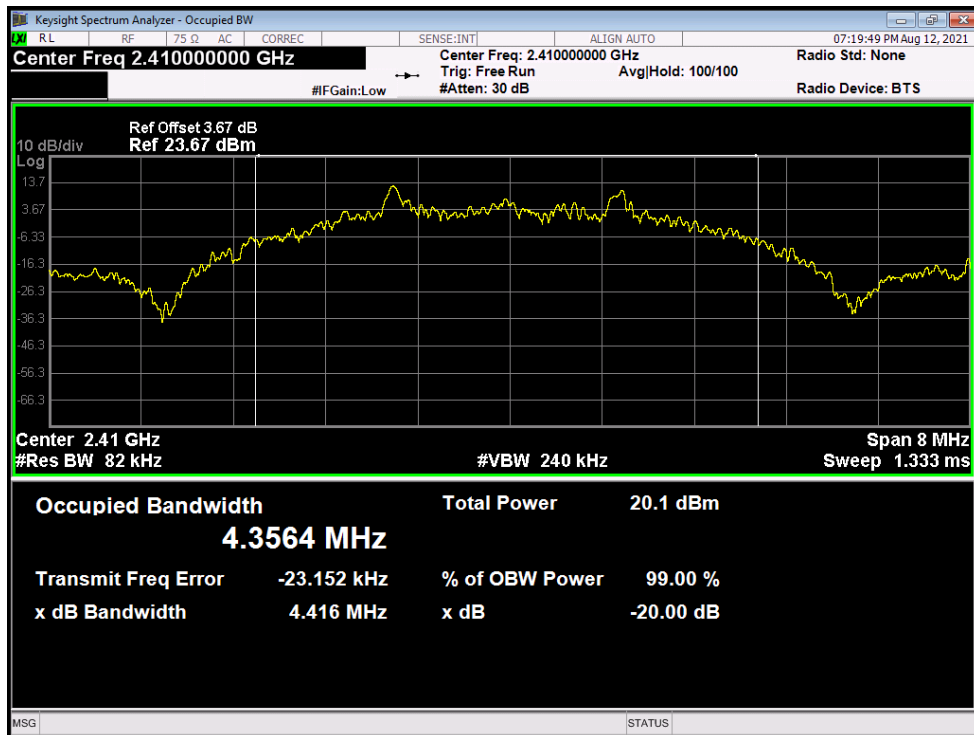


GFSK TX Mode

2441 MHz

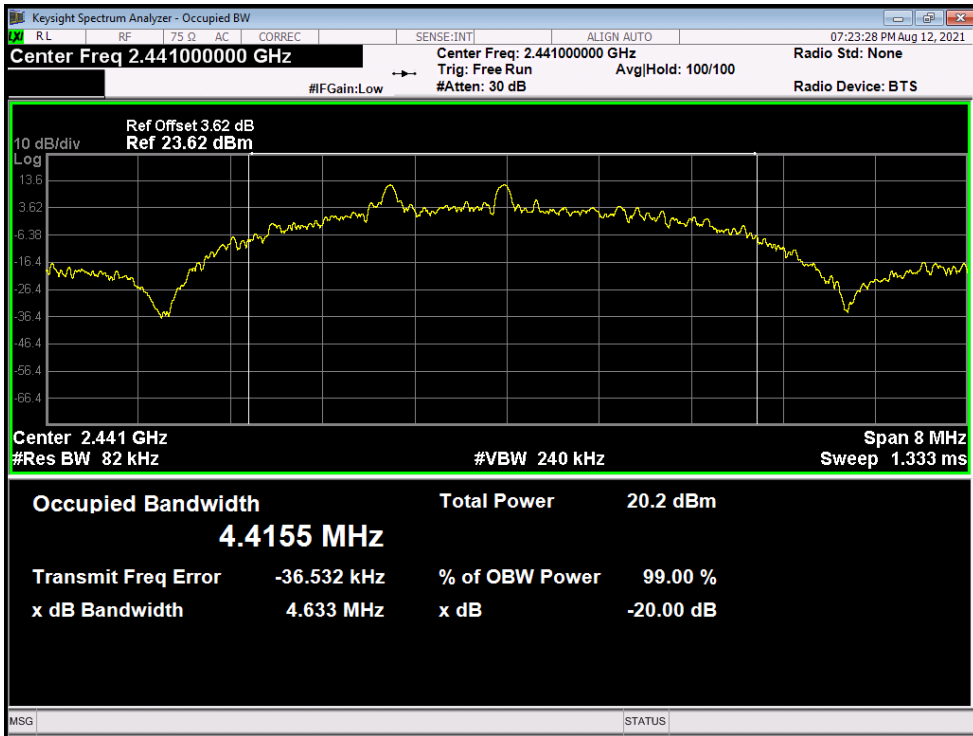


GFSK TX Mode

2477 MHz

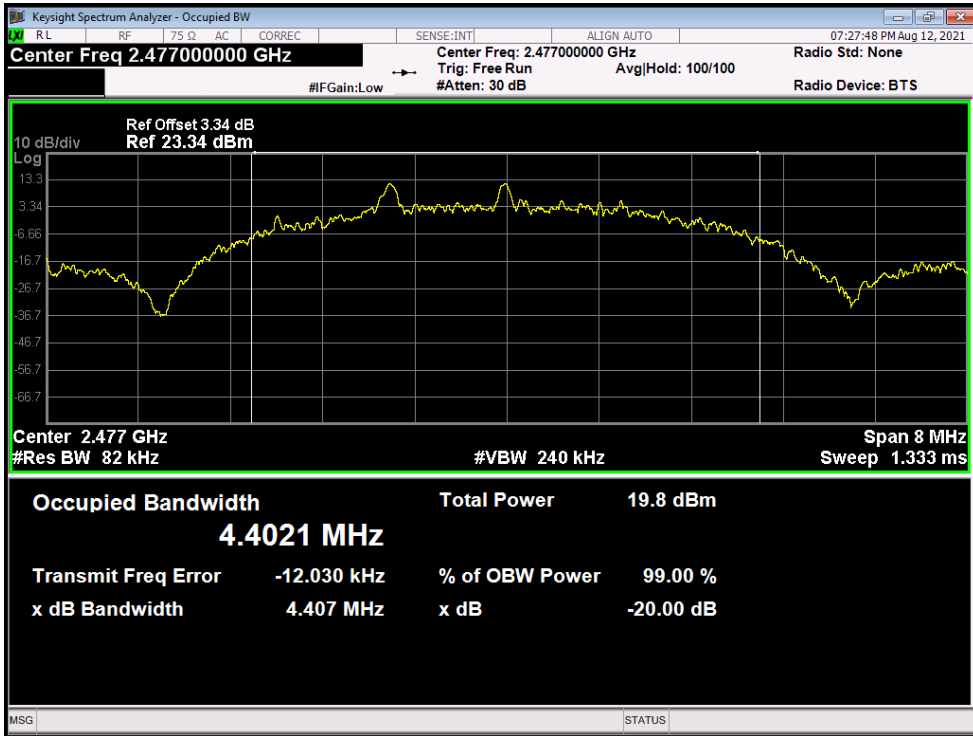


Channel Separation Test data:


Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	Hopping Mode (GFSK)		
Remark:	We test all channel and worse case recorded in the report.		
Channel frequency (MHz)	Separation Read Value (kHz)	Separation Limit (kHz)	
2410	4000	2944	
2441	3000	3088	
2477	3000	2938	
GFSK Hopping Mode			
2410 MHz			

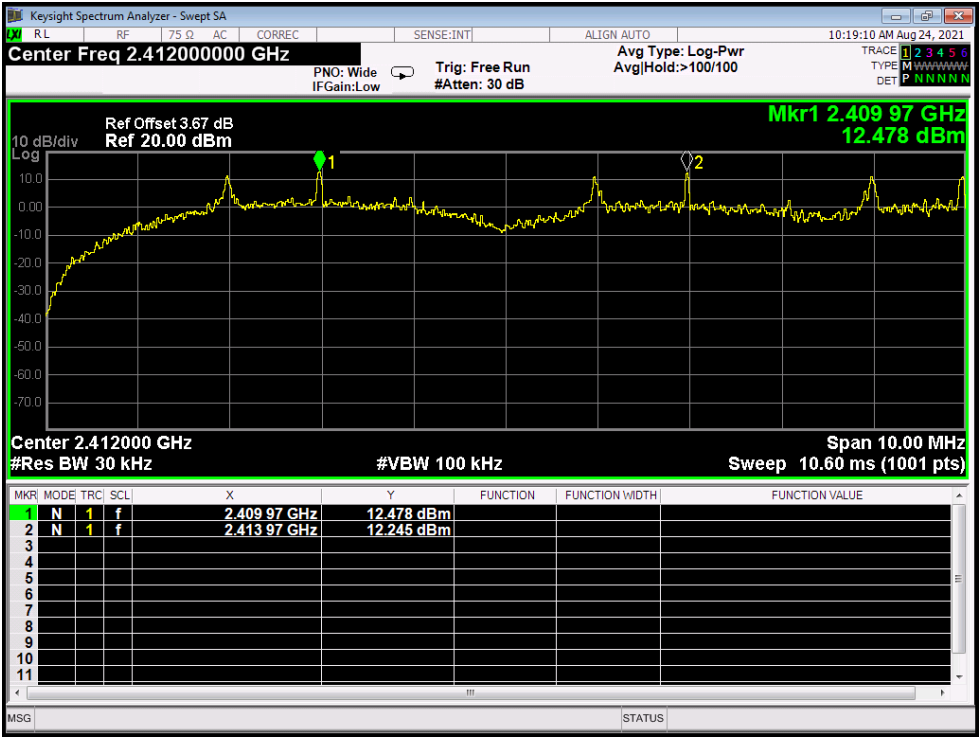

2441MHz

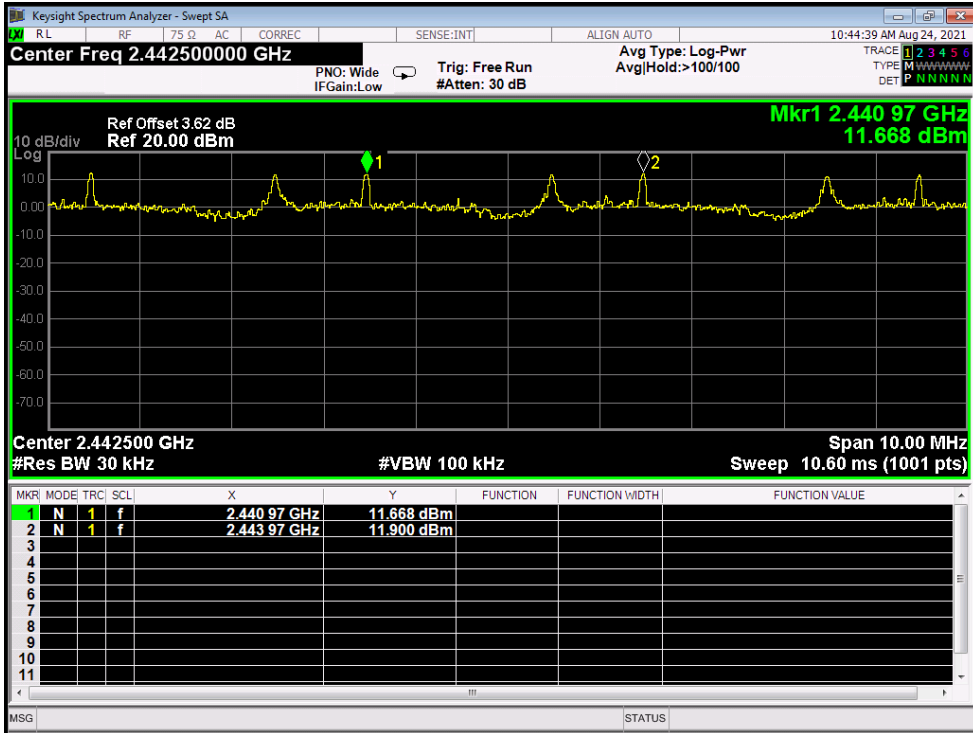


2477MHz

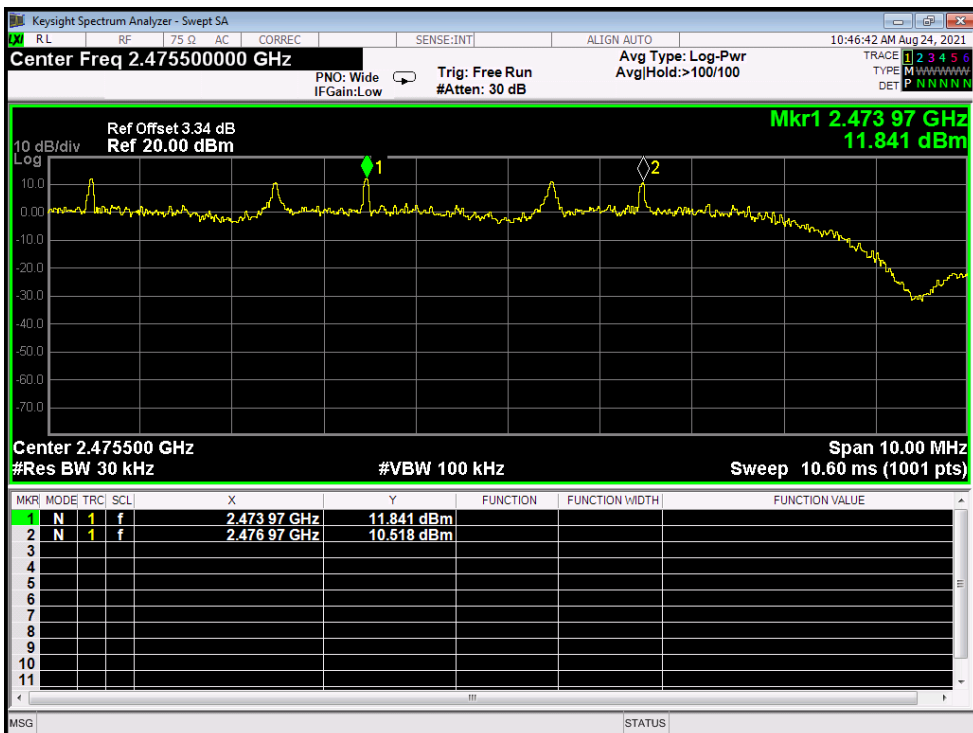

Attachment G-- Peak Output Power Test Data


Temperature:	25°C	Relative Humidity:	55%
Test Voltage:	AC 120V/60Hz		
Test Mode:	TX Mode (GFSK)		
Channel frequency (MHz)	Test Result (dBm)	Limit (dBm)	
2410	12.503	21	
2441	12.109		
2477	11.938		
GFSK TX Mode			

2410 MHz

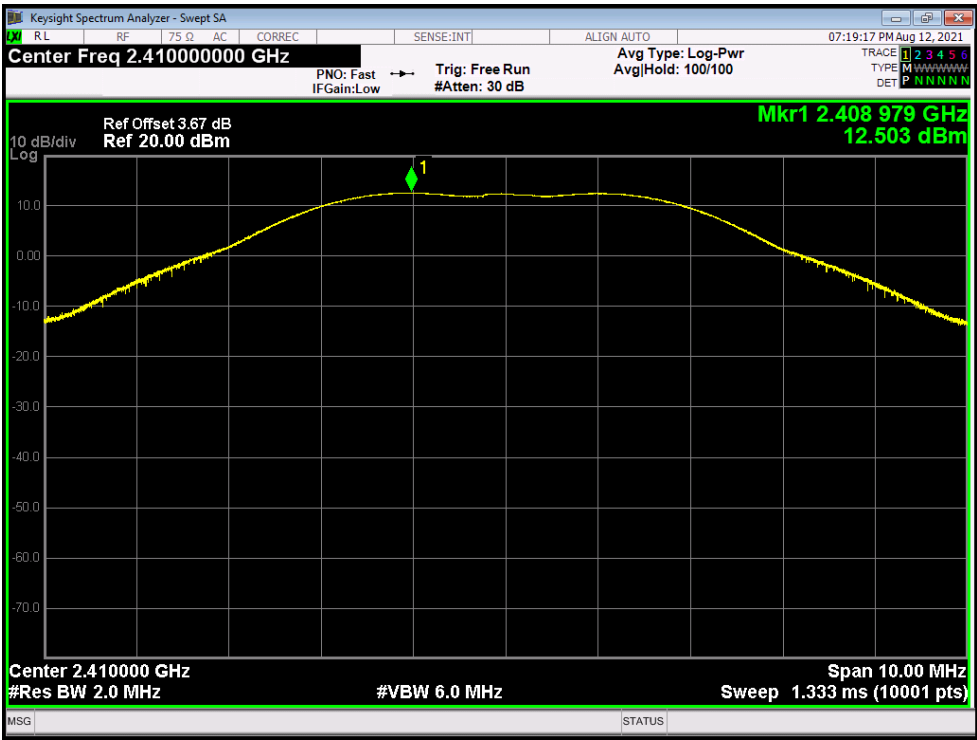


GFSK TX Mode

2441 MHz

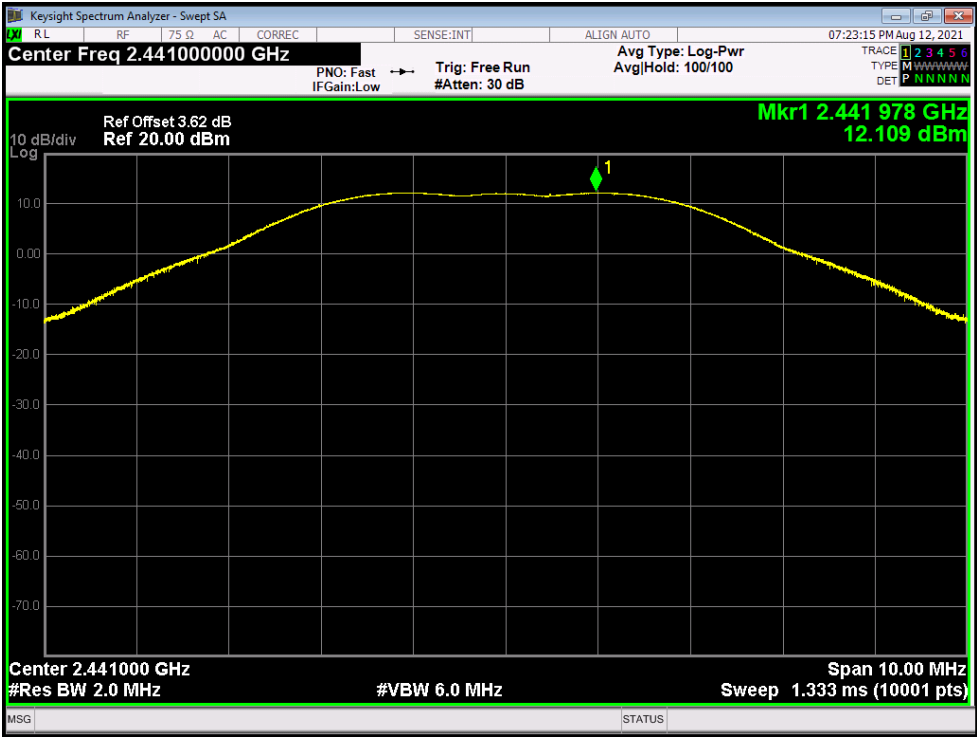

GFSK TX Mode

2477 MHz

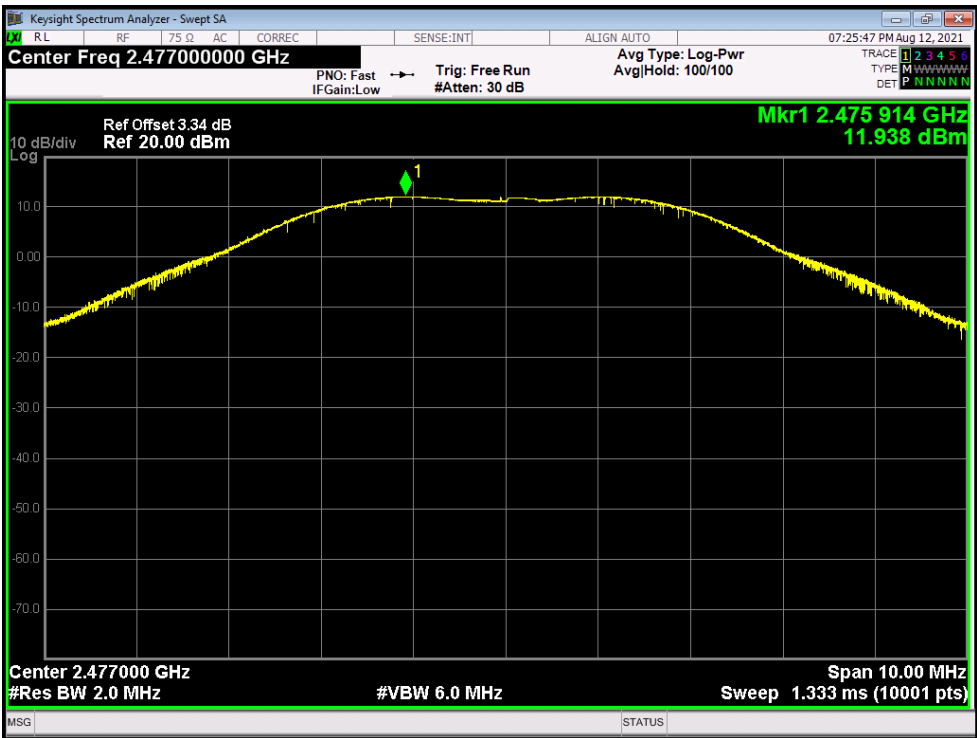

-----END OF REPORT-----