



ELECTRICAL TESTING  
0839.01

Hermon Laboratories Ltd.  
Harakevet Industrial Zone, Binyamina 30500,  
Israel  
Tel. +972-4-6288001  
Fax. +972-4-6288277  
E-mail: mail@hermonlabs.com

# TEST REPORT

ACCORDING TO: FCC 47CFR part 27

FOR:

**Corning Optical Communication Wireless  
HX5 Mid Power Remote Unit**

**Model: HX5**

**FCC ID:OJFHXP19S80A17L70**

This report is in conformity with ISO/ IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested.  
This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.

## Table of contents

1	Applicant information .....	3
2	Equipment under test attributes .....	3
3	Manufacturer information .....	3
4	Test details .....	3
5	Tests summary .....	4
6	EUT description .....	5
6.1	General information .....	5
6.2	Transmitter characteristics .....	5
7	Transmitter tests according to 47CFR part 27 .....	6
7.1	AGC Threshold level test .....	6
7.2	Occupied bandwidth test .....	10
7.3	Mean output power and booster gain test .....	15
7.4	Out-of-band rejection test .....	20
7.5	Out-of-band emissions at RF connector test .....	23
7.6	Spurious emissions at RF antenna connector test .....	37
7.7	Radiated spurious emission measurements .....	60
8	APPENDIX A Test equipment and ancillaries used for tests .....	72
8.1	Test equipment and ancillaries used for tests .....	73
9	APPENDIX B Measurement uncertainties .....	74
10	APPENDIX C Test facility description .....	75
11	APPENDIX D Specification references .....	75
12	APPENDIX E Test equipment correction factors .....	76
13	APPENDIX F Abbreviations and acronyms .....	86

## 1 Applicant information

**Client name:** Corning Optical Communication Wireless  
**Address:** 13221 Woodland Park Rd Suite 400, VA, USA  
**Telephone:** +001 (703) 714-7920  
**Fax:** +001 (703) 848-0280  
**E-mail:** riazih@corning.com  
**Contact name:** Mr. Habib Riazhi

## 2 Equipment under test attributes

**Product name:** HX5 remote unit  
**Product type:** Mid-Power Remote Unit  
**Model(s):** HX5  
**Part number:** RMA214035541281  
**Serial number:** RFUH14080563  
**Software release:** 7.4  
**Receipt date:** 12-Sep-16

## 3 Manufacturer information

**Manufacturer name:** Corning Optical Communication Wireless  
**Address:** 13221 Woodland Park Rd Suite 400, VA, USA  
**Telephone:** +001 (703) 714-7920  
**Fax:** +001 (703) 848-0280  
**E-Mail:** riazih@corning.com  
**Contact name:** Mr. Habib Riazhi

## 4 Test details




**Project ID:** 28707  
**Location:** Hermon Laboratories Ltd. Harakevet Industrial Zone, Binyamina 30500, Israel  
**Test started:** 15-Sep-16  
**Test completed:** 31-Oct-16  
**Test specification(s):** FCC 47CFR part 27

## 5 Tests summary

Test	Status
<b>Transmitter characteristics</b>	
Section 27.50, Automatic gain control (AGC) threshold	Pass
Section 2.1049, Occupied bandwidth	Pass
Section 27.50(d), Mean output power and booster gain	Pass
Section 2.1049, Out-of-band rejection	Pass
Section 27.53, Out-of-band emissions at RF connector	Pass
Section 27.53, Conducted spurious emissions	Pass
Section 27.53, Radiated spurious emissions	Pass
Section 27.52, RF exposure	Pass, exhibit provided in Application for certification

Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested.  
The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

This test report supersedes the previously issued test report identified by Doc ID:MOBRAD\_FCC28707\_HX5

	Name and Title	Date	Signature
<b>Tested by:</b>	Mr. S. Samokha, test engineer	October 31, 2016	
<b>Reviewed by:</b>	Mrs. M. Cherniavsky, certification engineer	December 8, 2016	
<b>Approved by:</b>	Mr. M. Nikishin, EMC and Radio group manager	December 8, 2016	

## 6 EUT description

### 6.1 General information

The EUT is a mid-power remote unit of industrial booster MA2000.

### 6.2 Transmitter characteristics

Type of equipment			
V	Stand-alone (Equipment with or without its own control provisions)		
	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)		
	Plug-in card (Equipment intended for a variety of host systems)		
Intended use		Condition of use	
V	fixed	Always at a distance more than 2 m from all people	
	mobile	Always at a distance more than 20 cm from all people	
	portable	May operate at a distance closer than 20 cm to human body	
Assigned frequency range		2110.0 – 2180.0 MHz	
Operating frequency		2110.0 – 2180.0 MHz DL 1710-1780 MHz UL	
Maximum rated output power		At maximum gain, Output port	33 dBm
Is transmitter output power variable?			
		No	
			continuous variable
V	Yes		stepped variable with stepsize 1 dB
			minimum RF power NA
			maximum RF power at antenna connector 33.46 dBm
Antenna connection			
unique coupling	V	standard connector	Integral
			with temporary RF connector without temporary RF connector
Antenna/s technical characteristics			
Type	Manufacturer	Model number	Gain
External	Any	Any	12.5 dBi
Transmitter aggregate data rate/s, MBps			
Transmitter 99% power bandwidth		Type of modulation	
		AWGN	GSM
		NA	NA
			WCDMA
			NA
Transmitter power source			
		Nominal rated voltage	Battery type
V	DC	48 VDC	
	AC mains		Frequency
Common power source for transmitter and receiver		V	yes no

<b>Test specification: Section 27.50, AGC threshold test</b>			
<b>Test procedure:</b> KDB 935210 D05 v01r01, section 3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 15-Sep-16			
<b>Temperature:</b> 27 °C	<b>Relative Humidity:</b> 47 %	<b>Air Pressure:</b> 1009 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

## 7 Transmitter tests according to 47CFR part 27

### 7.1 AGC Threshold level test

#### 7.1.1 General

This test was performed to measure the AGC threshold of the EUT

#### 7.1.2 Test procedure


7.1.2.1 The EUT was set up as shown in Figure 7.1.1, energized and its proper operation was checked.

7.1.2.2 The signal generator output was raised until 1 dB increase in the input signal power no longer caused a 1 dB increase in the output power.

7.1.2.3 The mean input and output power was measured with spectrum analyzer as provided in Table 7.1.2.

7.1.2.4 The test results are provided in the table below and associated plots.

**Figure 7.1.1 AGC Threshold level test setup**

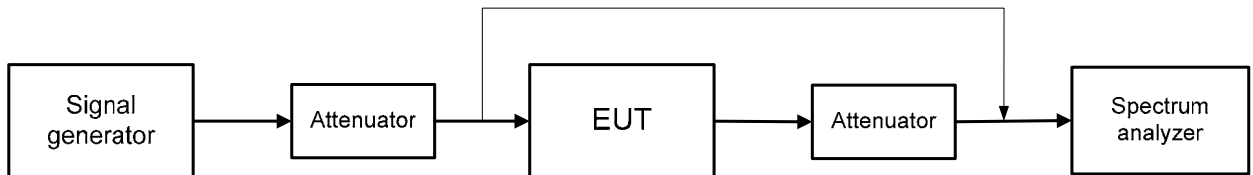



<b>Test specification: Section 27.50, AGC threshold test</b>			
<b>Test procedure:</b> KDB 935210 D05 v01r01, section 3			
<b>Test mode:</b> Compliance		<b>Verdict: PASS</b>	
<b>Date(s):</b> 15-Sep-16			
<b>Temperature:</b> 27 °C	<b>Relative Humidity:</b> 47 %	<b>Air Pressure:</b> 1009 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

Table 7.1.1 AGC Threshold level test results

ASSIGNED FREQUENCY RANGE: 2110 – 2180 MHz  
DETECTOR USED: Average  
MODULATING SIGNAL: PRBS  
MEASUREMENT METHOD: Spectrum Analyzer

CONFIGURATION: Downlink transmit mode

Frequency, MHz	Input level, dBm	SA reading, dBm	AGC threshold level, dBm	Margin*, dB	Verdict
<b>MODULATING SIGNAL: AWGN</b>					
2145.0	-20.00	32.89	-20.00	NA	Pass
<b>MODULATING SIGNAL: GSM</b>					
2145.0	-19.63	33.36	-19.63	NA	Pass
<b>MODULATING SIGNAL: WCDMA</b>					
2145.0	-19.65	33.40	-19.65	NA	Pass

## Reference numbers of test equipment used

HL 2909	HL 3767	HL 3780	HL 4278	HL 4354	N5172B*		
---------	---------	---------	---------	---------	---------	--	--

Full description is given in Appendix A.



\* - description is given in section 8.1 of Appendix A

<b>Test specification:</b> Section 27.50, AGC threshold test			
<b>Test procedure:</b> KDB 935210 D05 v01r01, section 3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 15-Sep-16			
<b>Temperature:</b> 27 °C	<b>Relative Humidity:</b> 47 %	<b>Air Pressure:</b> 1009 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

**Plot 7.1.1 AGC Threshold test results at mid frequency carrier**

FREQUENCY RANGE:  
OPERATIONAL MODE:  
CONFIGURATION:  
INPUT SIGNAL



2110.0 – 2180.0 MHz  
AWGN downlink transmit  
Single Channel  
OUTPUT SIGNAL

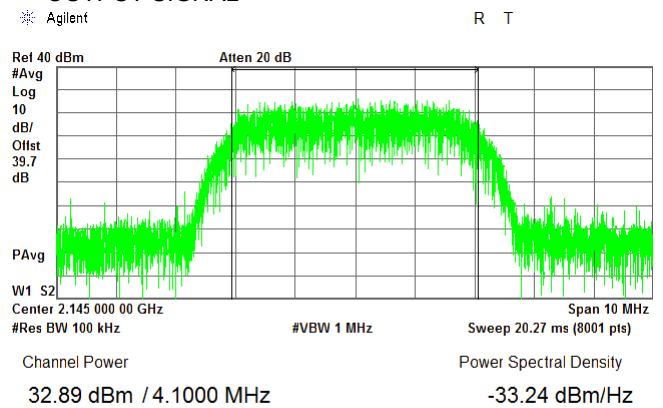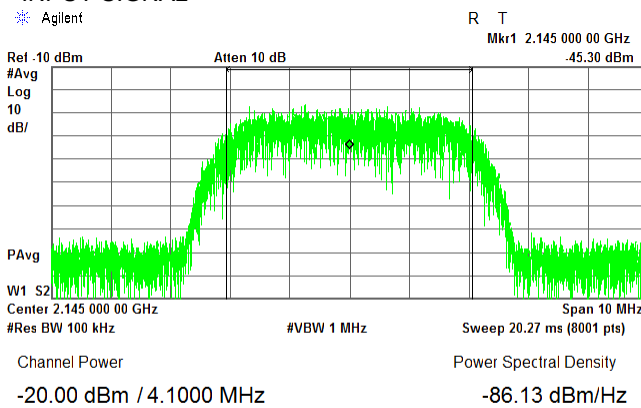

**Plot 7.1.2 RF output power measurements at mid frequency carrier**

FREQUENCY RANGE:  
OPERATIONAL MODE:  
CONFIGURATION:  
INPUT SIGNAL

2110.0 – 2180.0 MHz  
GSM downlink transmit  
Single Channel  
OUTPUT SIGNAL

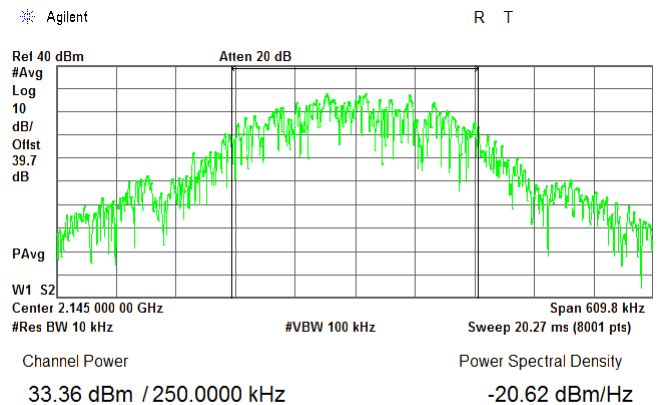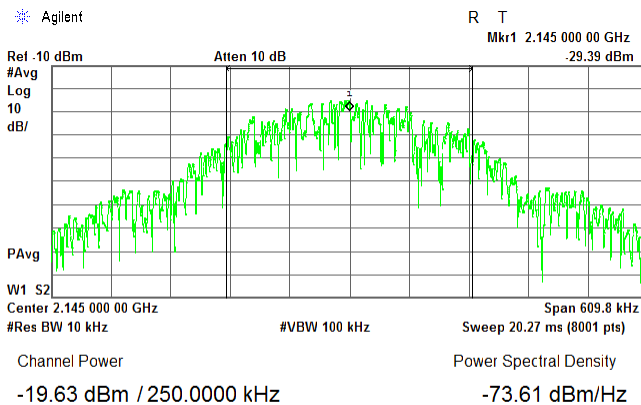





<b>Test specification:</b> Section 27.50, AGC threshold test			
<b>Test procedure:</b> KDB 935210 D05 v01r01, section 3			
<b>Test mode:</b> Compliance	<b>Verdict:</b> PASS		
<b>Date(s):</b> 15-Sep-16			
<b>Temperature:</b> 27 °C	<b>Relative Humidity:</b> 47 %	<b>Air Pressure:</b> 1009 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

**Plot 7.1.3 RF output power measurements at mid frequency carrier**

FREQUENCY RANGE:  
OPERATIONAL MODE:  
CONFIGURATION:  
INPUT SIGNAL

2110.0 – 2180.0 MHz  
WCDMA downlink transmit  
Single Channel  
OUTPUT SIGNAL

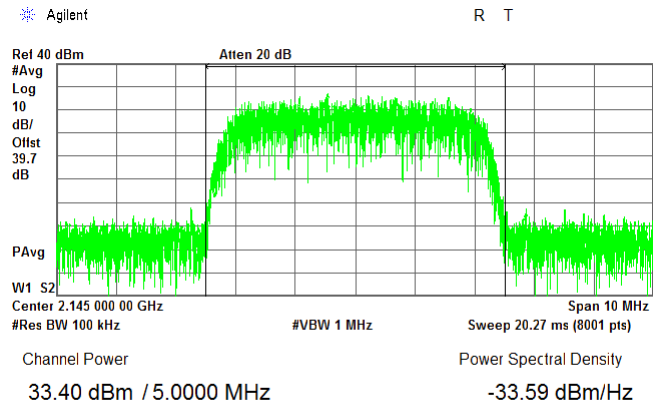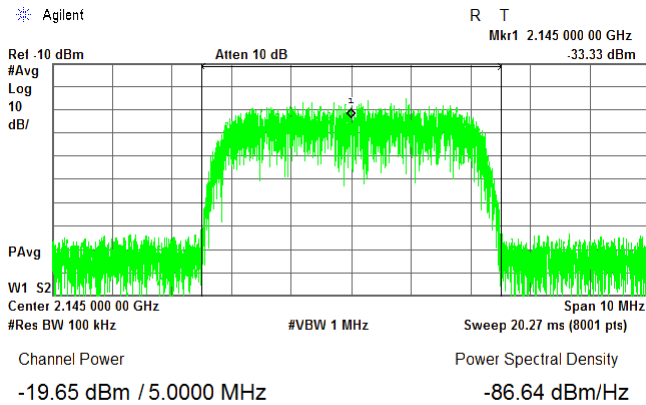

<b>Test specification: Section 2.1049, Occupied bandwidth</b>			
<b>Test procedure:</b> KDB 935210 D05 v01r01, section 3.4			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 27-Sep-16			
<b>Temperature:</b> 28 °C	<b>Relative Humidity:</b> 43 %	<b>Air Pressure:</b> 1012 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

## 7.2 Occupied bandwidth test

### 7.2.1 General

This test was performed to measure transmitter occupied bandwidth. Specification test limits are given in Table 7.2.1.

Table 7.2.1 Occupied bandwidth limits

Assigned frequency, MHz	Modulation envelope reference points, %	Maximum allowed bandwidth, kHz
2110.0 – 2180.0	99	NA

### 7.2.2 Test procedure

7.2.2.1 The EUT was set up as shown in Figure 7.2.1, energized and its proper operation was checked.

7.2.2.2 The EUT was set to transmit the normally modulated carrier.

7.2.2.3 The transmitter occupied bandwidth was measured with power bandwidth function of the spectrum analyzer as a frequency delta between the reference points on modulation envelope and provided in Table 7.2.2 and the associated plots.

Figure 7.2.1 Occupied bandwidth test setup





<b>Test specification: Section 2.1049, Occupied bandwidth</b>			
<b>Test procedure:</b> KDB 935210 D05 v01r01, section 3.4			
<b>Test mode:</b> Compliance		<b>Verdict: PASS</b>	
<b>Date(s):</b> 27-Sep-16			
<b>Temperature:</b> 28 °C	<b>Relative Humidity:</b> 43 %	<b>Air Pressure:</b> 1012 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

Table 7.2.2 Occupied bandwidth test results

DETECTOR USED: Peak hold  
MODULATION ENVELOPE REFERENCE POINTS: 99%

RESOLUTION BANDWIDTH: 100 kHz (0.5-2% of OBW)  
VIDEO BANDWIDTH: 1000 kHz

Carrier frequency, MHz	99% Occupied bandwidth, kHz		Limit, kHz	Margin, kHz	Verdict
	Below AGC	Above AGC			
<b>MODULATION: AWGN</b>					
2145.0	4164.4	4154.4	NA	NA	Pass
<b>MODULATION: WCDMA</b>					
2145.0	4187.6	4188.5	NA	NA	Pass

RESOLUTION BANDWIDTH: 3 kHz (0.5-2% of OBW)  
VIDEO BANDWIDTH: 30 kHz

Carrier frequency, MHz	Occupied bandwidth, kHz		Limit, kHz	Margin, kHz	Verdict
	Below AGC	Above AGC			
<b>MODULATION: GSM</b>					
2145.0	245.239	246.397	NA	NA	Pass

**Reference numbers of test equipment used**

HL 2909	HL 3433	HL 3787	HL 3788	HL 3901	HL 4354		
---------	---------	---------	---------	---------	---------	--	--



Full description is given in Appendix A.

<b>Test specification:</b> Section 2.1049, Occupied bandwidth			
<b>Test procedure:</b> KDB 935210 D05 v01r01, section 3.4			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 27-Sep-16			
<b>Temperature:</b> 28 °C	<b>Relative Humidity:</b> 43 %	<b>Air Pressure:</b> 1012 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

**Plot 7.2.1 Occupied bandwidth test result at mid frequency carrier**

FREQUENCY RANGE:  
OPERATIONAL MODE:  
CONFIGURATION:  
INPUT SIGNAL

2110.0 – 2180.0 MHz  
AWGN uplink transmit  
Below AGC threshold  
OUTPUT SIGNAL

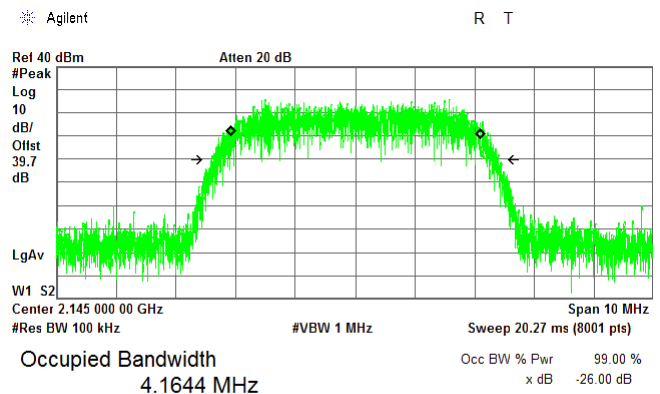
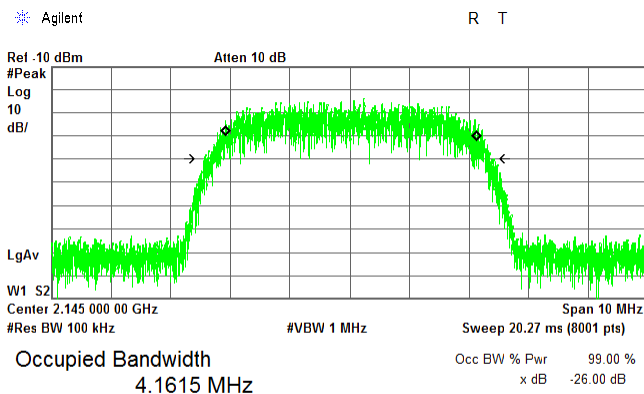


Transmit Freq Error 7.527 kHz  
Occupied Bandwidth 4.813 MHz\*

Transmit Freq Error -1.152 kHz  
Occupied Bandwidth 4.803 MHz\*

CONFIGURATION:  
INPUT SIGNAL

Above AGC threshold +3 dB  
OUTPUT SIGNAL

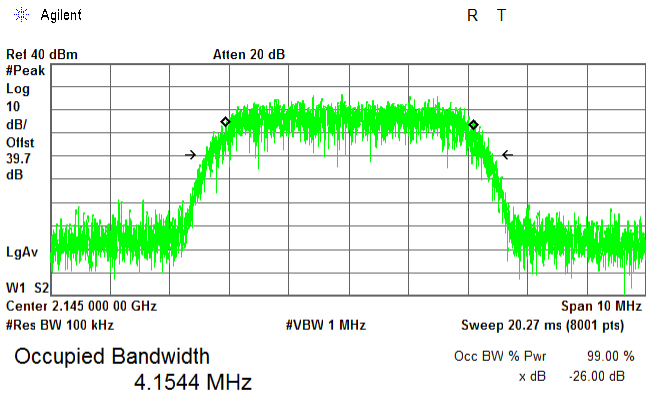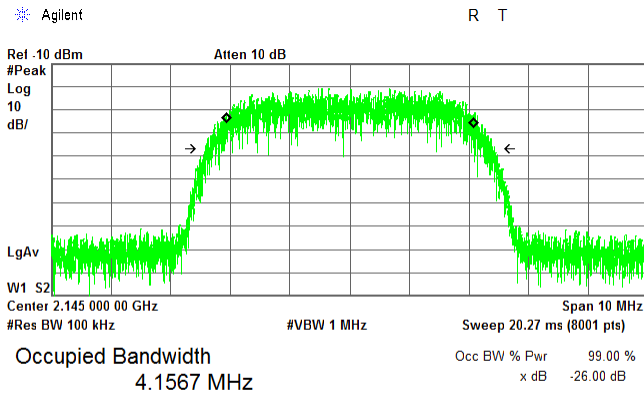

Transmit Freq Error -2.736 kHz  
Occupied Bandwidth 4.816 MHz\*



Transmit Freq Error -3.307 kHz  
Occupied Bandwidth 4.814 MHz\*

<b>Test specification: Section 2.1049, Occupied bandwidth</b>			
<b>Test procedure:</b> KDB 935210 D05 v01r01, section 3.4			
<b>Test mode:</b> Compliance		<b>Verdict: PASS</b>	
<b>Date(s):</b> 27-Sep-16			
<b>Temperature:</b> 28 °C	<b>Relative Humidity:</b> 43 %	<b>Air Pressure:</b> 1012 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

**Plot 7.2.2 Occupied bandwidth test result at mid frequency carrier**

FREQUENCY RANGE:  
OPERATIONAL MODE:  
CONFIGURATION:  
INPUT SIGNAL

2110.0 – 2180.0 MHz  
GSM uplink transmit  
Single Channel  
OUTPUT SIGNAL

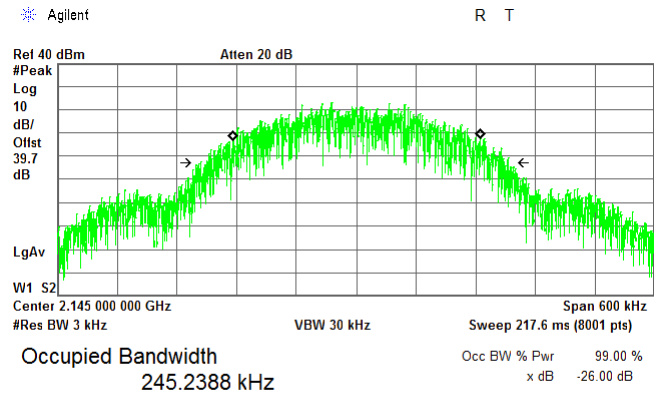
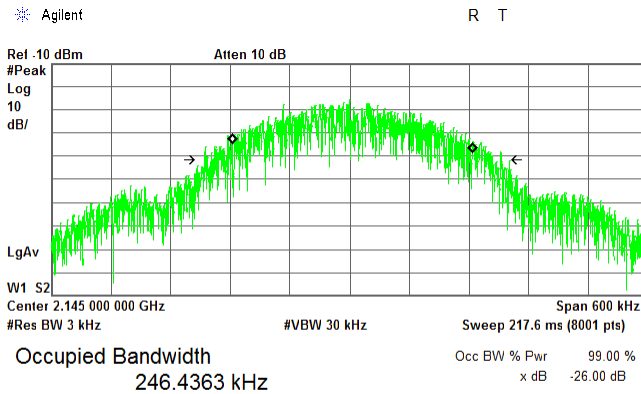


Transmit Freq Error 299.999 Hz  
Occupied Bandwidth 303.695 kHz\*

Transmit Freq Error -75.712 Hz  
Occupied Bandwidth 303.744 kHz\*

CONFIGURATION:  
INPUT SIGNAL

Single Channel  
OUTPUT SIGNAL

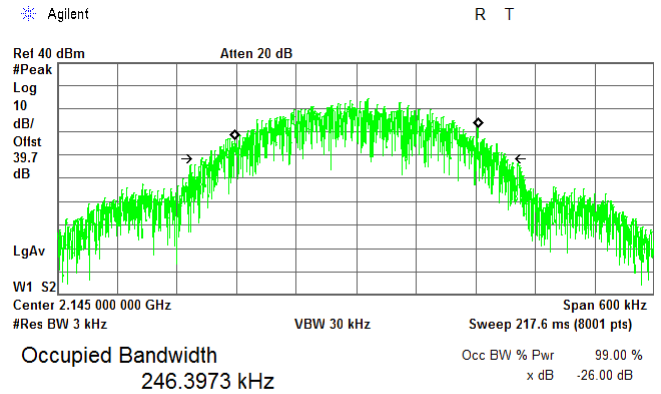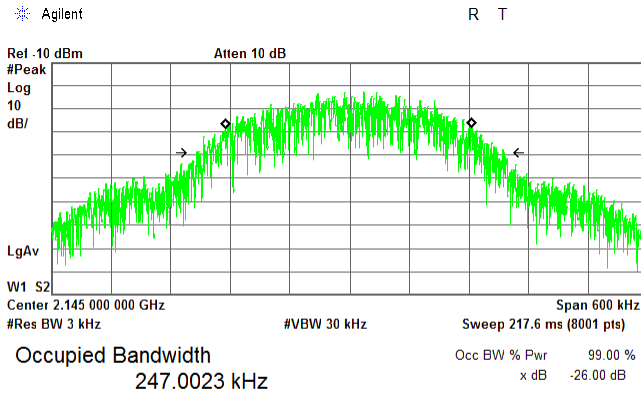

Transmit Freq Error -116.091 Hz  
Occupied Bandwidth 306.254 kHz\*



Transmit Freq Error -48.916 Hz  
Occupied Bandwidth 308.002 kHz\*

<b>Test specification:</b> Section 2.1049, Occupied bandwidth			
<b>Test procedure:</b> KDB 935210 D05 v01r01, section 3.4			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 27-Sep-16			
<b>Temperature:</b> 28 °C	<b>Relative Humidity:</b> 43 %	<b>Air Pressure:</b> 1012 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

**Plot 7.2.3 Occupied bandwidth test result at mid frequency carrier**

FREQUENCY RANGE:  
OPERATIONAL MODE:  
CONFIGURATION:  
INPUT SIGNAL

2110.0 – 2180.0 MHz  
WCDMA uplink transmit  
Below AGC threshold  
OUTPUT SIGNAL

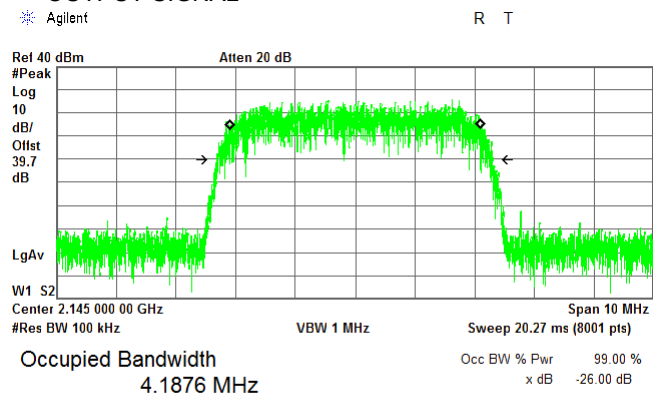
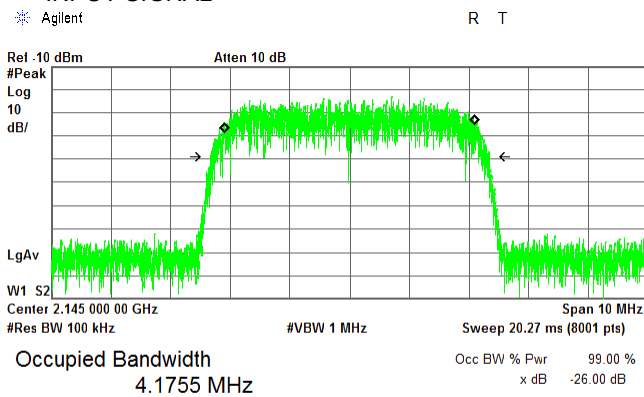


Transmit Freq Error 94.028 Hz  
Occupied Bandwidth 4.646 MHz\*

Transmit Freq Error -5.607 kHz  
Occupied Bandwidth 4.641 MHz\*

CONFIGURATION:  
INPUT SIGNAL

Above AGC threshold +3 dB  
OUTPUT SIGNAL

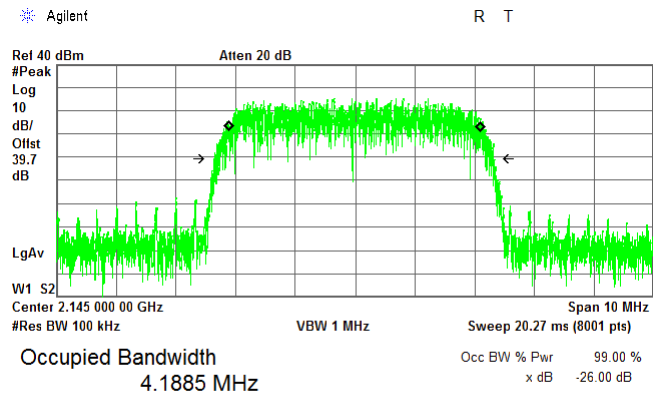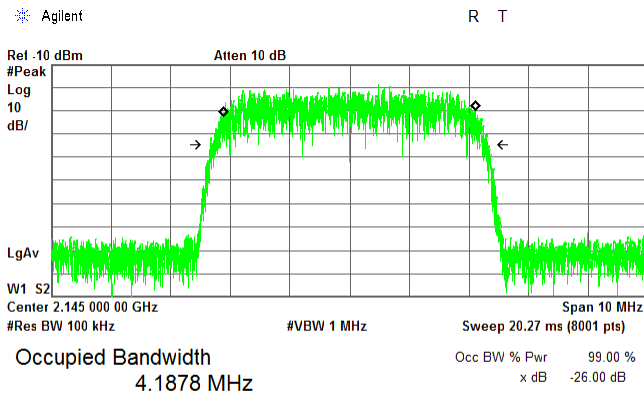

Transmit Freq Error -5.645 kHz  
Occupied Bandwidth 4.651 MHz\*

Transmit Freq Error -4.030 kHz  
Occupied Bandwidth 4.649 MHz\*

<b>Test specification: Section 27.50(d), Mean input and output power and booster gain test</b>			
Test procedure: KDB 935210 D05 v01r01, section 3.5			
Test mode: Compliance		Verdict: PASS	
Date(s): 26-Sep-16			
Temperature: 24 °C	Relative Humidity: 51 %	Air Pressure: 1010 hPa	Power: 48 VDC
Remarks:			

### 7.3 Mean input and output power and booster gain test

#### 7.3.1 General

This test was performed to measure the mean input and output power at RF antenna connector and to calculate corresponding EUT gain. Specification test limits are given in Table 7.3.1

Table 7.3.1 Mean output power and booster gain test limits

Transmitter type	Assigned frequency range, MHz	Maximum peak output power, ERP	
		W	dBm
Base and fixed stations	2110 – 2180	1640.0	62.4


  

Assigned frequency range, MHz	Tested frequency range	Maximum allowed Gain versus frequency response, dB
2110.0 – 2180.0	$F_0 \pm 250\% BW$	Output power (dBm) – input power (dBm)

#### 7.3.2 Test procedure

- 7.3.2.1 The EUT was set up as shown in Figure 7.3.1, energized and its proper operation was checked.
- 7.3.2.2 The signal generator power was adjusted to a level just below the AGC threshold but not more than 0.5 dB below.
- 7.3.2.3 The mean output power was measured with the spectrum analyzer as provided in Table 7.3.2 and the associated plots.
- 7.3.2.4 The corresponding input power was measured with the same settings of the spectrum analyzer.
- 7.3.2.5 The above measurements were repeated with input signal adjusted to be 3 dB above the AGC threshold.
- 7.3.2.6 The EUT gain was calculated as a difference between output and input signal levels.

Figure 7.3.1 Mean output power and booster gain test test setup

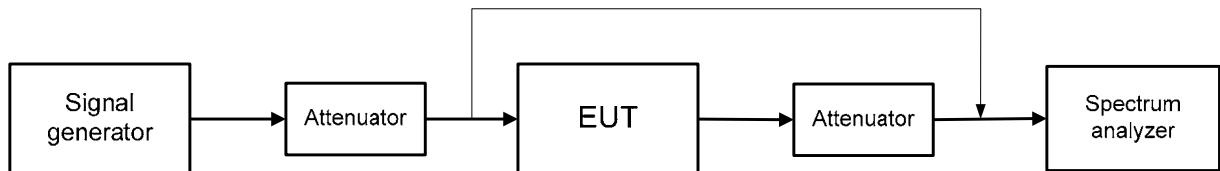



HERMON LABORATORIES

<b>Test specification:</b> Section 27.50(d), Mean input and output power and booster gain test			
<b>Test procedure:</b> KDB 935210 D05 v01r01, section 3.5			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 26-Sep-16			
<b>Temperature:</b> 24 °C	<b>Relative Humidity:</b> 51 %	<b>Air Pressure:</b> 1010 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

**Table 7.3.2 Mean output power and booster gain test test results**

ASSIGNED FREQUENCY RANGE: 2110.0 – 2180.0 MHz  
 DETECTOR USED: Average  
 MODULATING SIGNAL: PRBS  
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

Carrier frequency, MHz	Input signal	SA reading, dBm		Booster gain**, dB	Antenna gain, dBi	EIRP***, dBm	Limit, dBm	Margin*, dB	Verdict
		Input	Output						
MODULATION: AWGN									
2131.0	Below AGC	-16.76	33.48	50.24	12.5	45.98	62.4	-16.42	Pass
	Above AGC	-13.59	33.49	47.08	12.5	45.99	62.4	-16.41	Pass
MODULATION: GSM									
2131.0	Below AGC	-15.12	33.08	48.20	12.5	45.58	62.4	-16.82	Pass
	Above AGC	-10.39	33.04	43.43	12.5	45.54	62.4	-16.86	Pass
MODULATION: WCDMA									
2131.0	Below AGC	-17.21	33.46	50.67	12.5	45.96	62.4	-16.44	Pass
	Above AGC	-13.20	33.18	46.38	12.5	45.68	62.4	-16.72	Pass

\* - Margin, dB = Limit EIRP, dBm - RF output power EIRP\*, dBm  
 \*\* - Booster Gain = Output SA reading – Input SA reading  
 \*\*\* - EIRP, dBm = SA reading average, dBm + Antenna gain, dBi

**Reference numbers of test equipment used**

HL 2909	HL 3433	HL 3787	HL 3788	HL 3901	HL 4354		
---------	---------	---------	---------	---------	---------	--	--

Full description is given in Appendix A.





<b>Test specification:</b> Section 27.50(d), Mean input and output power and booster gain test			
<b>Test procedure:</b> KDB 935210 D05 v01r01, section 3.5			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 26-Sep-16			
<b>Temperature:</b> 24 °C	<b>Relative Humidity:</b> 51 %	<b>Air Pressure:</b> 1010 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

**Plot 7.3.1 Mean output power and booster gain test results at f0 frequency**



FRQUENCY RANGE:  
OPERATIONAL MODE:  
CONFIGURATION:  
INPUT SIGNAL

2110 – 2180 MHz  
AWGN downlink transmit  
Below AGC threshold  
OUTPUT SIGNAL

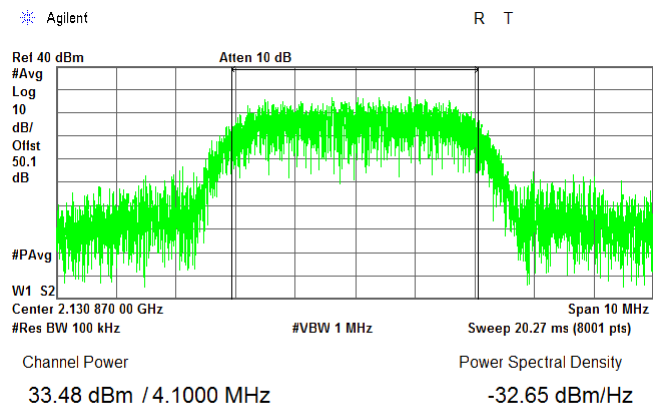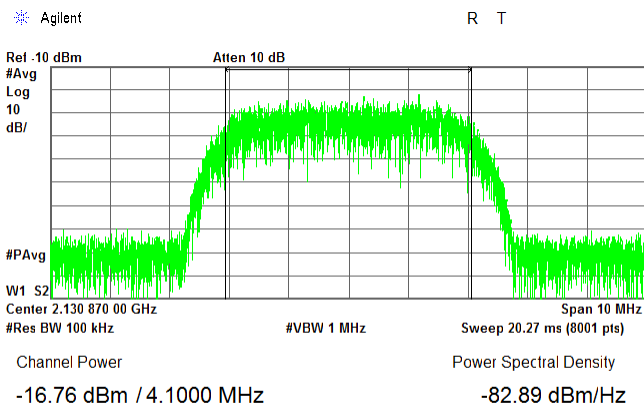

CONFIGURATION:  
INPUT SIGNAL

Above AGC threshold +3dB  
OUTPUT SIGNAL

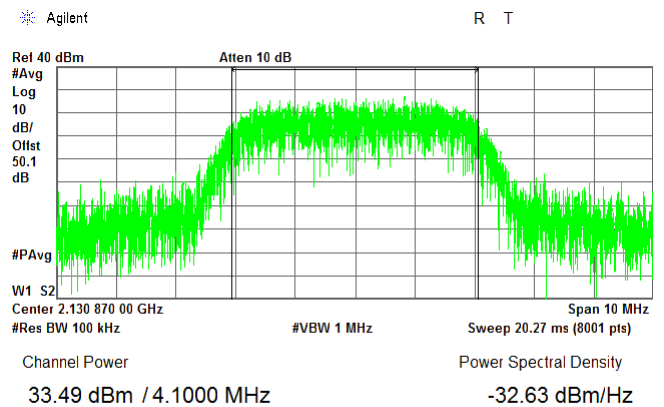
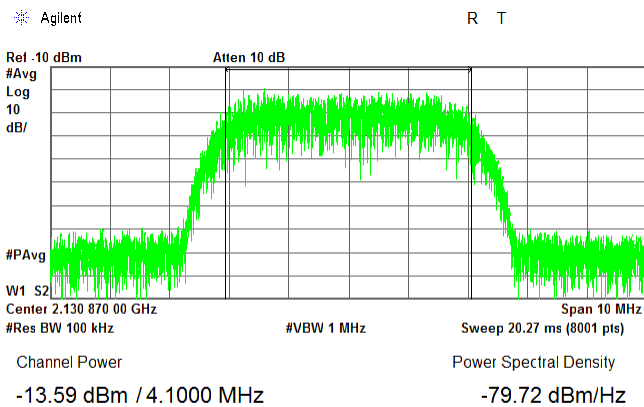


<b>Test specification: Section 27.50(d), Mean input and output power and booster gain test</b>			
<b>Test procedure:</b> KDB 935210 D05 v01r01, section 3.5			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 26-Sep-16			
<b>Temperature:</b> 24 °C	<b>Relative Humidity:</b> 51 %	<b>Air Pressure:</b> 1010 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

Plot 7.3.2 Mean output power and booster gain test results at f0 frequency



FRQUENCY RANGE:  
OPERATIONAL MODE:  
CONFIGURATION:  
INPUT SIGNAL

2110 – 2180 MHz  
GSM downlink transmit  
Below AGC threshold  
OUTPUT SIGNAL

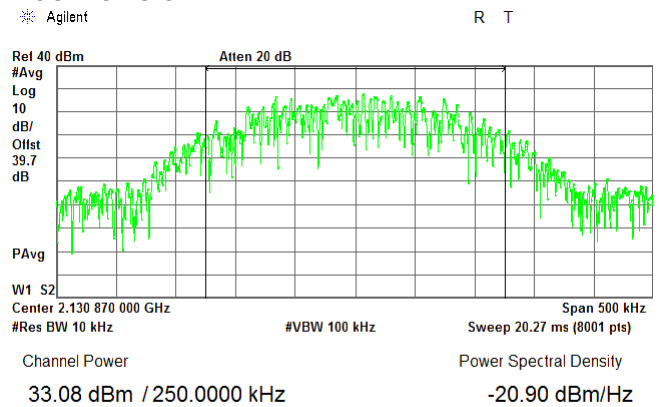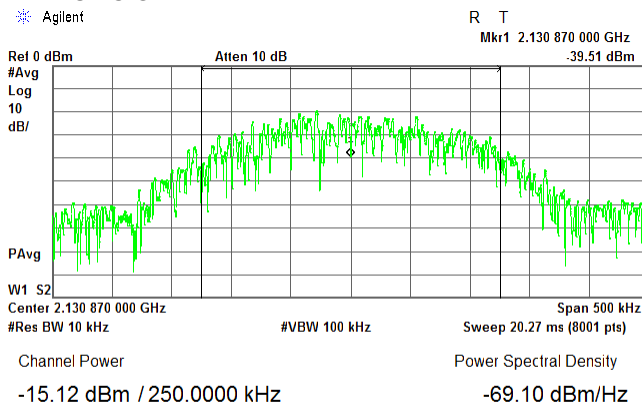

CONFIGURATION:  
INPUT SIGNAL

Above AGC threshold +3dB  
OUTPUT SIGNAL

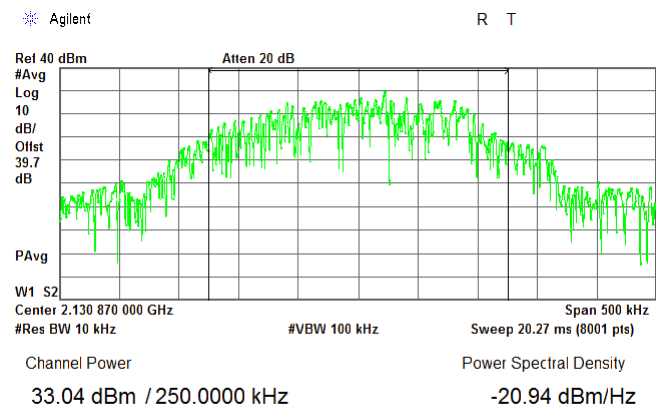
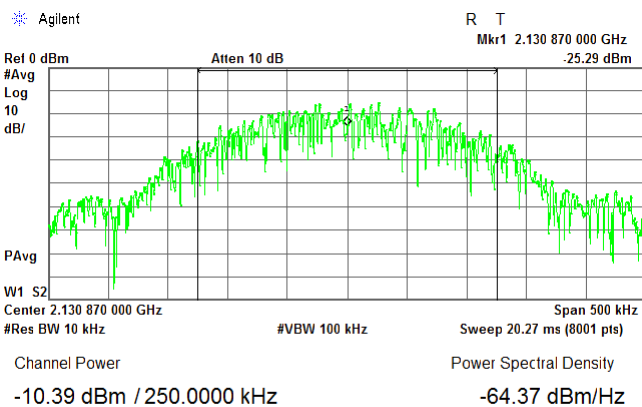


<b>Test specification:</b> Section 27.50(d), Mean input and output power and booster gain test			
<b>Test procedure:</b> KDB 935210 D05 v01r01, section 3.5			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 26-Sep-16			
<b>Temperature:</b> 24 °C	<b>Relative Humidity:</b> 51 %	<b>Air Pressure:</b> 1010 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

**Plot 7.3.3 Mean output power and booster gain test results at f0 frequency**



FRQUENCY RANGE:  
OPERATIONAL MODE:  
CONFIGURATION:  
INPUT SIGNAL

2110 – 2180 MHz  
W-CDMA downlink transmit  
Below AGC threshold  
OUTPUT SIGNAL

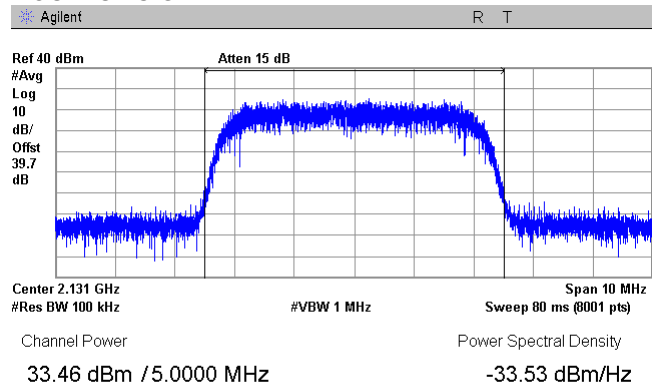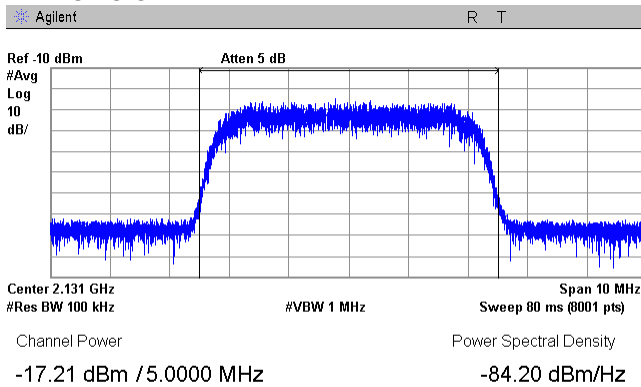

CONFIGURATION:  
INPUT SIGNAL

Above AGC threshold +3dB  
OUTPUT SIGNAL

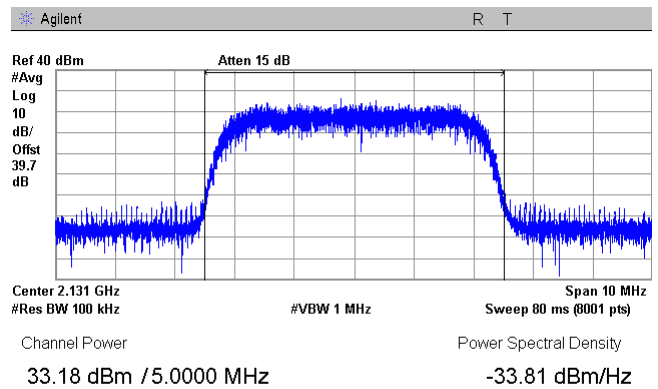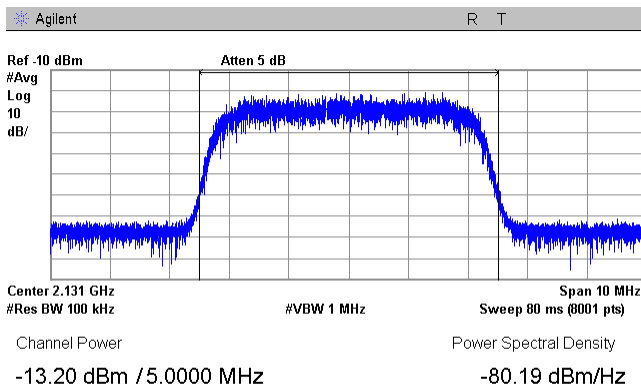

<b>Test specification: Section 2.1049, Out-of-band rejection test</b>			
<b>Test procedure:</b> KDB 935210 D05 v01r01, section 3.3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 18-Sep-16			
<b>Temperature:</b> 28 °C	<b>Relative Humidity:</b> 36 %	<b>Air Pressure:</b> 1011 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

## 7.4 Out-of-band rejection test

### 7.4.1 General

This test was performed to measure amplifier pass bandwidth. Specification test limits are given in Table 7.4.1.

**Table 7.4.1 Out-of-band rejection limits**

Assigned frequency range, MHz	Tested frequency range	Modulation envelope reference points*, dBc
2110.0 – 2180.0	$F_0 \pm 250\% BW$	20

\* - Modulation envelope reference points are provided in terms of attenuation below the unmodulated carrier.

### 7.4.2 Test procedure

7.4.2.1 The EUT was set up as shown in Figure 7.4.1, energized and its proper operation was checked.

7.4.2.2 The EUT was set to amplify the unmodulated carrier and the reference peak power level was measured.

7.4.2.3 The tested frequency range was swept with the signal generator and the amplifier 20 dB bandwidth was measured with spectrum analyzer as a frequency delta between the reference points on power envelope and provided in Table 7.4.2 and the associated plots.

**Figure 7.4.1 Out-of-band rejection test setup**





<b>Test specification: Section 2.1049, Out-of-band rejection test</b>			
<b>Test procedure:</b> KDB 935210 D05 v01r01, section 3.3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 18-Sep-16			
<b>Temperature:</b> 28 °C	<b>Relative Humidity:</b> 36 %	<b>Air Pressure:</b> 1011 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

**Table 7.4.2 Out-of-band rejection test results**

FRQUENCY RANGE: 2110.0 – 2180.0 MHz Downlink  
MIDBAND FREQUENCY: 2145.0 MHz  
SWEEP FREQUENCY RANGE: 1970.0 – 2320.0 MHz  
DETECTOR USED: Peak hold  
RESOLUTION BANDWIDTH: 1 MHz  
VIDEO BANDWIDTH: 3 MHz  
MODULATION ENVELOPE REFERENCE POINTS: 20 dBc

Input Power, dBm	Start Band frequency, MHz	Stop Band frequency, MHz	Occupied bandwidth, MHz	Limit, MHz	Verdict
-17.12	2094.06	2192.98	98.81	NA	Comply

**Reference numbers of test equipment used**

HL 2909	HL 3433	HL 3787	HL 3788	HL 3901	HL 4354		
---------	---------	---------	---------	---------	---------	--	--


Full description is given in Appendix A.



HERMON LABORATORIES

<b>Test specification: Section 2.1049, Out-of-band rejection test</b>			
Test procedure: KDB 935210 D05 v01r01, section 3.3			
Test mode: Compliance		Verdict: PASS	
Date(s): 18-Sep-16			
Temperature: 28 °C	Relative Humidity: 36 %	Air Pressure: 1011 hPa	Power: 48 VDC
Remarks:			

Plot 7.4.1 Out-of-band rejection test result

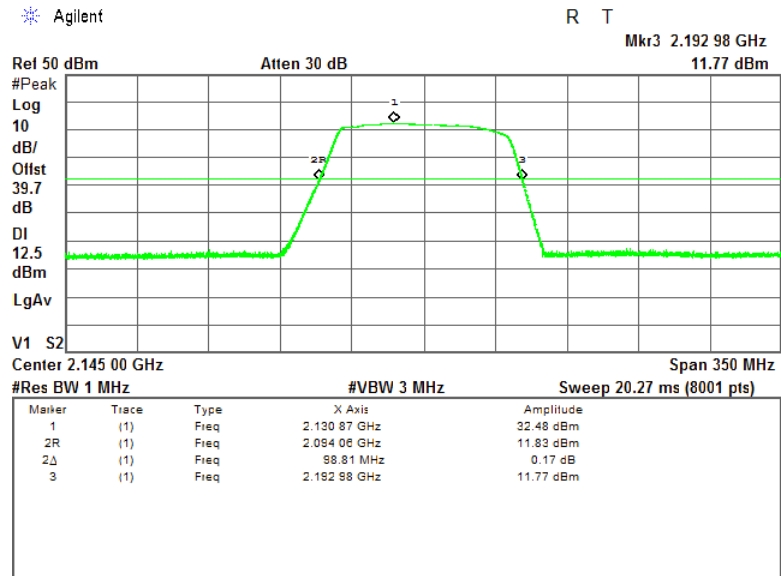

<b>Test specification: Section 27.53, Out-of-band emissions conducted measurements</b>			
<b>Test procedure:</b> 47 CFR, Sections 2.1051; KDB 935210 D05 v01r01, section 3.6.2			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 10-Oct-16			
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 44 %	<b>Air Pressure:</b> 1008 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

## 7.5 Out-of-band emissions at RF connector test

### 7.5.1 General

This test was performed to measure out-of-band spurious emissions at the channel edge at the RF antenna connector. Specification test limits are given in Table 7.5.1.

Table 7.5.1 Out-of-band spurious emission limits

Channel	Frequency range	Attenuation below carrier, dBc	RBW	Limit, dBm
<b>Modulation AWGN/WCDMA</b>				
Low	2109 - 2110	$43 + 10 \cdot \log(P^*)$	100 kHz	-13.0
	2107 - 2109	$43 + 10 \cdot \log(P^*)$	1 MHz	-13.0
High	2180 - 2181	$43 + 10 \cdot \log(P^*)$	100 kHz	-13.0
	2181 - 2183	$43 + 10 \cdot \log(P^*)$	1 MHz	-13.0
<b>Modulation GSM</b>				
Low	2109 - 2110	$43 + 10 \cdot \log(P^*)$	3 kHz	-13.0
	2107 - 2109	$43 + 10 \cdot \log(P^*)$	1 MHz	-13.0
High	2180 - 2181	$43 + 10 \cdot \log(P^*)$	3 kHz	-13.0
	2181 - 2183	$43 + 10 \cdot \log(P^*)$	1 MHz	-13.0


\* - P is transmitter output power in Watts

### 7.5.2 Test procedure

7.5.2.1 The EUT was set up as shown in Figure 7.5.1, energized and its proper operation was checked.

7.5.2.2 The spurious emission was measured with spectrum analyzer as provided in Table 7.5.2 and the associated plots.

Figure 7.5.1 Out-of-band spurious emission test setup

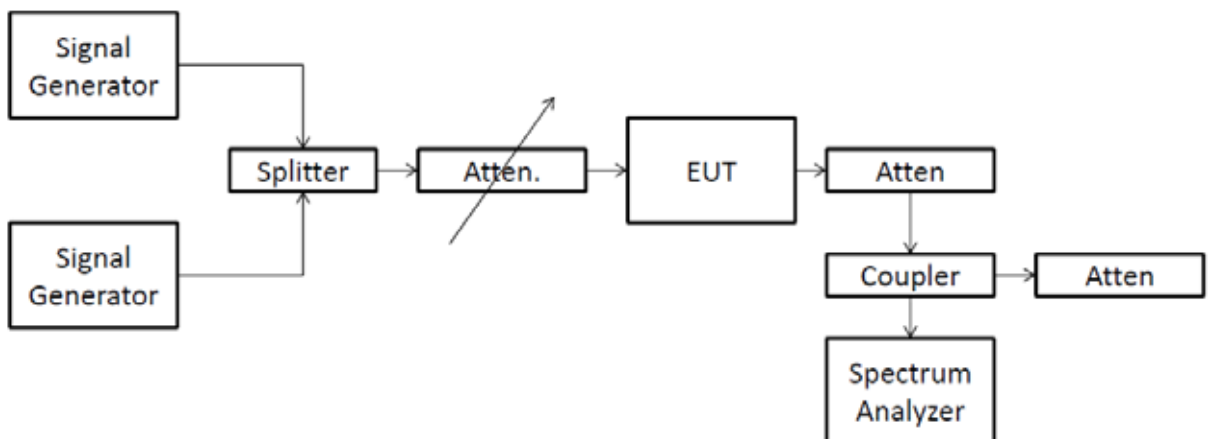



<b>Test specification:</b> Section 27.53, Out-of-band emissions conducted measurements			
<b>Test procedure:</b> 47 CFR, Sections 2.1051; KDB 935210 D05 v01r01, section 3.6.2			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 10-Oct-16			
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 44 %	<b>Air Pressure:</b> 1008 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

Table 7.5.2 Out-of-band spurious emission Modulation test results

ASSIGNED FREQUENCY RANGE: 2110 – 2180 MHz  
 DETECTOR USED: Average  
 VIDEO BANDWIDTH: ≥ Resolution bandwidth  
 MODULATING SIGNAL: PRBS  
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

Frequency, MHz	SA reading, dBm		RBW, kHz	Integrated over bandwidth, kHz	Spurious emission, dBm	Limit, dBm	Margin, dB*	Verdict
	Below AGC	Above AGC						
<b>Composite Test Signal</b>								
<b>Modulation AWGN</b>								
2108.50	-26.35	-26.98	100	1000	-26.35	-13.0	-13.35	Pass
2110.00	-15.46	-15.41	100	NA	-15.41	-13.0	-2.41	Pass
2180.00	-14.77	-15.09	100	NA	-14.77	-13.0	-1.77	Pass
2181.50	-26.56	-22.58	100	1000	-22.58	-13.0	-9.58	Pass
<b>Modulation GSM</b>								
2108.50	-26.86	-27.31	100	1000	-26.86	-13.0	-13.86	Pass
2110.00	-15.33	-15.23	3	NA	-15.23	-13.0	-2.23	Pass
2180.00	-15.94	-16.21	3	NA	-15.94	-13.0	-2.94	Pass
2181.50	-26.94	-27.35	100	1000	-26.94	-13.0	-13.94	Pass
<b>Modulation WCDMA</b>								
2109.500	-25.19	-25.12	100	1000	-25.12	-13.0	-12.12	Pass
2180.500	-23.08	-22.66	100	1000	-22.66	-13.0	-9.66	Pass
<b>Single Test Signal</b>								
<b>Modulation AWGN</b>								
2108.50	-25.19	-23.79	100	1000	-23.79	-13.0	-10.79	Pass
2110.00	-13.26	-13.39	100	NA	-13.36	-13.0	-0.36	Pass
2180.00	-14.24	-13.30	100	NA	-13.30	-13.0	-0.30	Pass
2181.50	-23.83	-22.78	100	1000	-22.78	-13.0	-9.78	Pass
<b>Modulation GSM</b>								
2108.50	-26.53	-27.09	100	1000	-26.53	-13.0	-13.53	Pass
2110.00	-14.73	-13.24	3	NA	-13.24	-13.0	-0.24	Pass
2180.00	-14.69	-13.63	3	NA	-13.63	-13.0	-0.63	Pass
2181.50	-26.71	-26.93	100	1000	-26.71	-13.0	-13.71	Pass
<b>Modulation WCDMA</b>								
2109.500	-23.89	-22.08	100	1000	-22.08	-13.0	-9.08	Pass
2180.500	-21.60	-20.89	100	1000	-20.89	-13.0	-7.89	Pass

\*Margin, dB = Spurious emission, dBm – Limit, dBm

Reference numbers of test equipment used

HL 2011	HL 2909	HL 3433	HL 3472	HL 3474	HL 3787	HL 3788	HL3901
HL 4354							

Full description is given in Appendix A.







<b>Test specification: Section 27.53, Out-of-band emissions conducted measurements</b>			
<b>Test procedure:</b> 47 CFR, Sections 2.1051; KDB 935210 D05 v01r01, section 3.6.2			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 10-Oct-16			
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 44 %	<b>Air Pressure:</b> 1008 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

**Plot 7.5.1 Out-of-band spurious emission test results at low carrier frequency, Lower band Edge**

OPERATING FREQUENCY RANGE:  
DETECTOR USED:  
CONFIGURATION:  
MODULATION:  
COMPOSITE INPUT SIGNAL  
CONFIGURATION: Below AGC threshold

2110 – 2180 MHz  
Average  
Downlink  
AWGN/AWGN

CONFIGURATION: Above AGC threshold +3dB

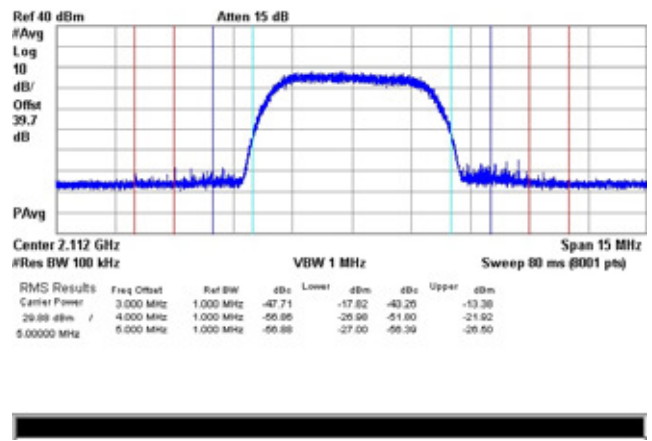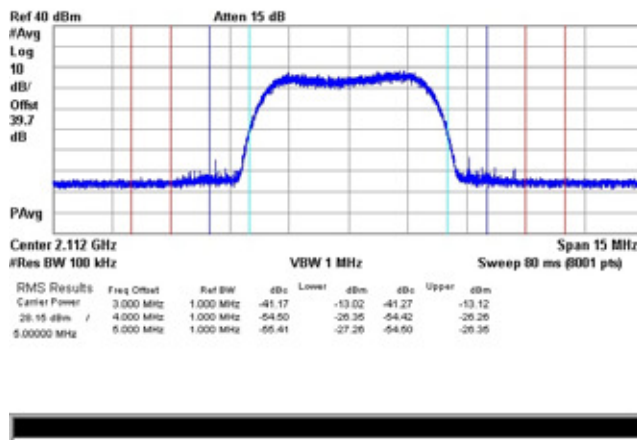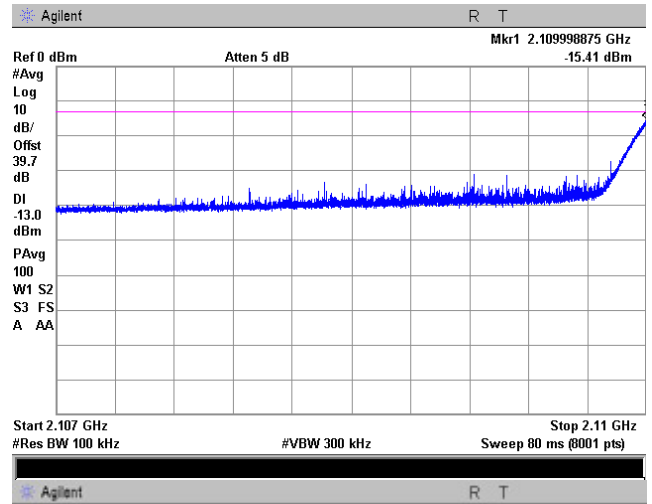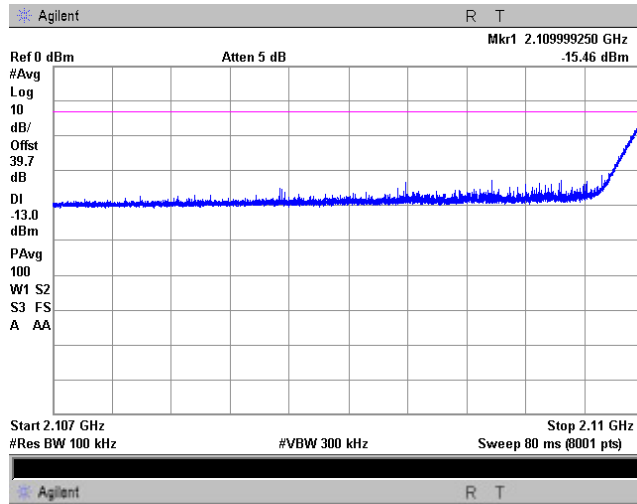





<b>Test specification: Section 27.53, Out-of-band emissions conducted measurements</b>			
<b>Test procedure:</b> 47 CFR, Sections 2.1051; KDB 935210 D05 v01r01, section 3.6.2			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 10-Oct-16			
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 44 %	<b>Air Pressure:</b> 1008 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

**Plot 7.5.2 Out-of-band spurious emission test results at low carrier frequency, Lower band Edge**

OPERATING FREQUENCY RANGE:  
DETECTOR USED:  
CONFIGURATION:  
MODULATION:  
SINGLE TEST SIGNAL INPUT  
CONFIGURATION: Below AGC threshold

2110 – 2180 MHz  
Average  
Downlink  
AWGN/AWGN

CONFIGURATION: Above AGC threshold +3dB

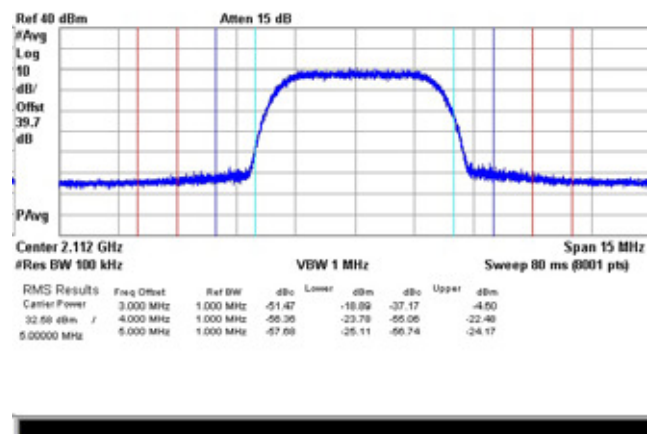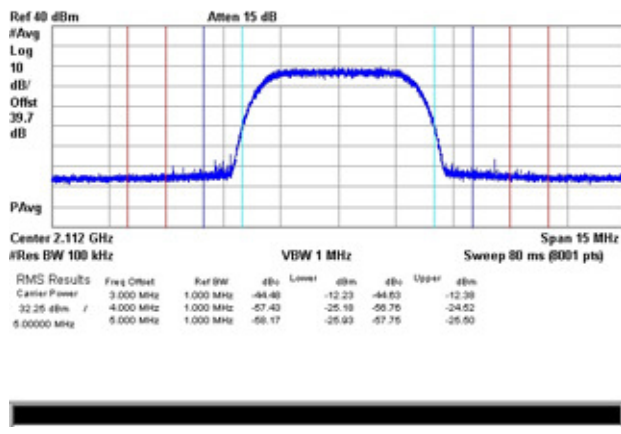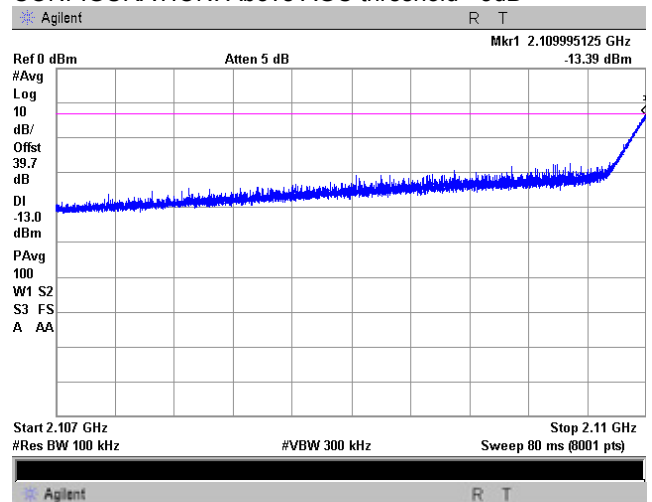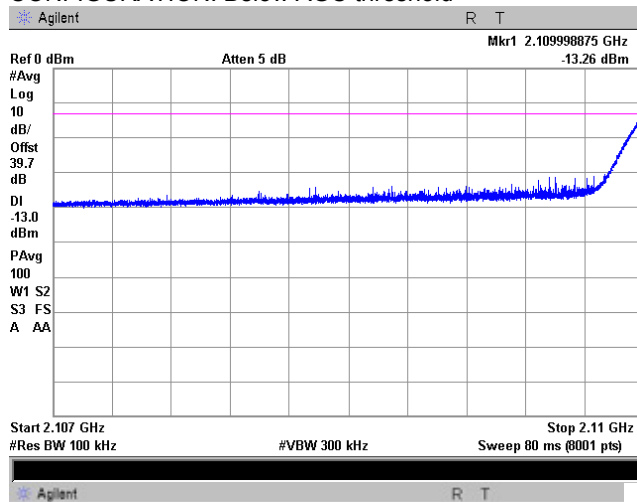





<b>Test specification: Section 27.53, Out-of-band emissions conducted measurements</b>			
<b>Test procedure:</b> 47 CFR, Sections 2.1051; KDB 935210 D05 v01r01, section 3.6.2			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 10-Oct-16			
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 44 %	<b>Air Pressure:</b> 1008 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

Plot 7.5.3 Out-of-band spurious emission test results at high carrier frequency, Upper band Edge

OPERATING FREQUENCY RANGE:  
DETECTOR USED:  
CONFIGURATION:  
MODULATION:  
COMPOSITE INPUT SIGNAL  
CONFIGURATION: Below AGC threshold

2110 – 2180 MHz  
Average  
Downlink  
AWGN/AWGN

CONFIGURATION: Above AGC threshold +3dB

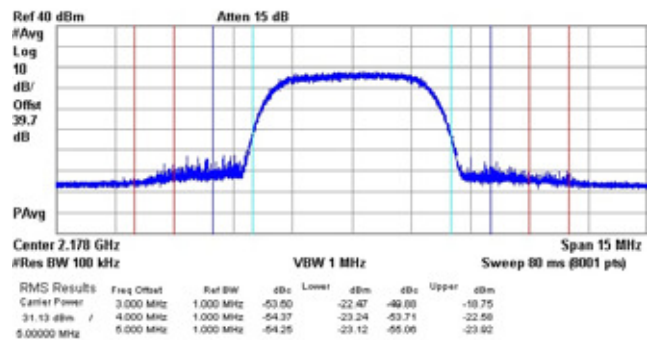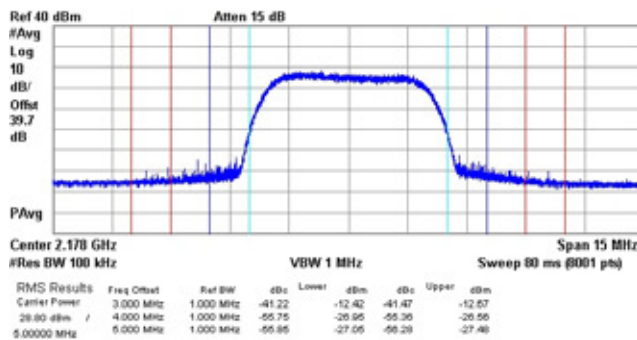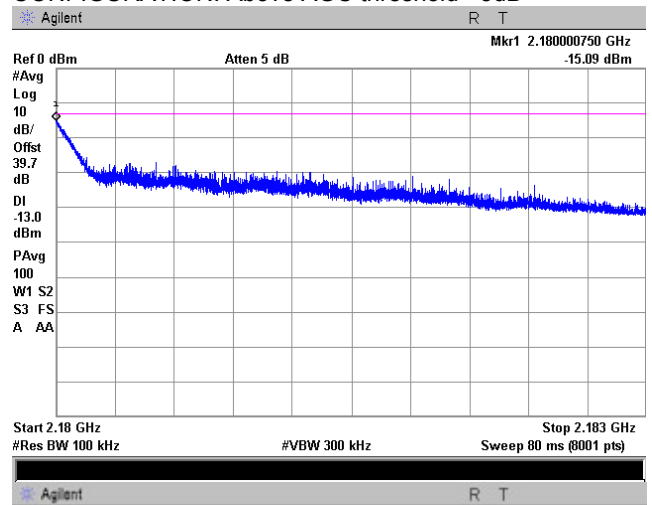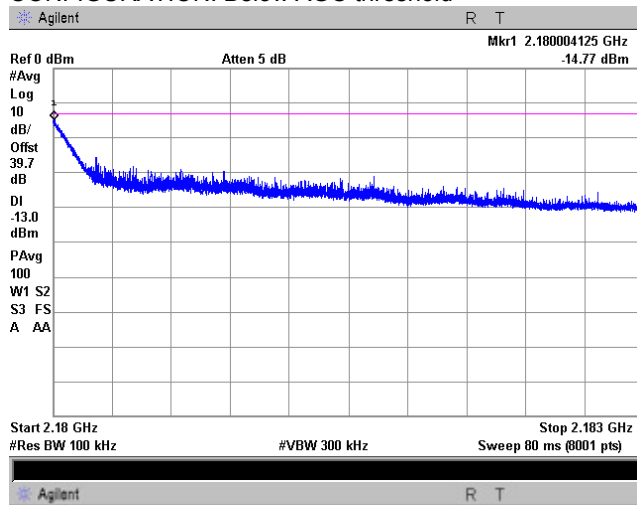

<b>Test specification: Section 27.53, Out-of-band emissions conducted measurements</b>			
<b>Test procedure:</b> 47 CFR, Sections 2.1051; KDB 935210 D05 v01r01, section 3.6.2			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 10-Oct-16			
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 44 %	<b>Air Pressure:</b> 1008 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

Plot 7.5.4 Out-of-band spurious emission test results at high carrier frequency, Upper band Edge

OPERATING FREQUENCY RANGE:

2110 – 2180 MHz

DETECTOR USED:

Average

CONFIGURATION:

Downlink





MODULATION:

AWGN/AWGN

SINGLE TEST SIGNAL INPUT

CONFIGURATION: Below AGC threshold

CONFIGURATION: Above AGC threshold +3dB

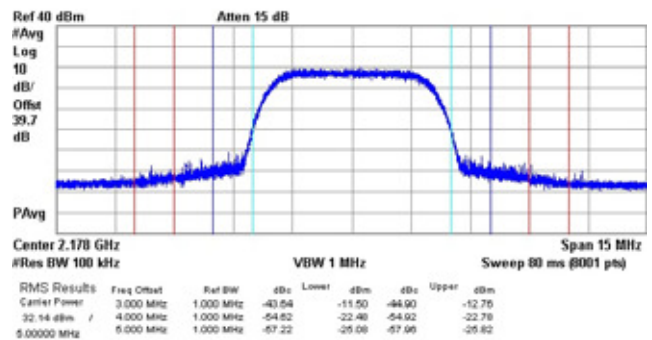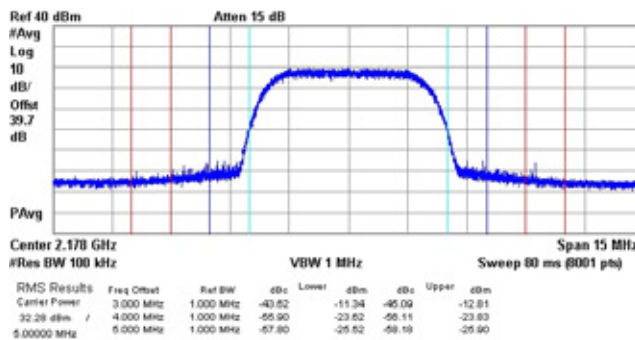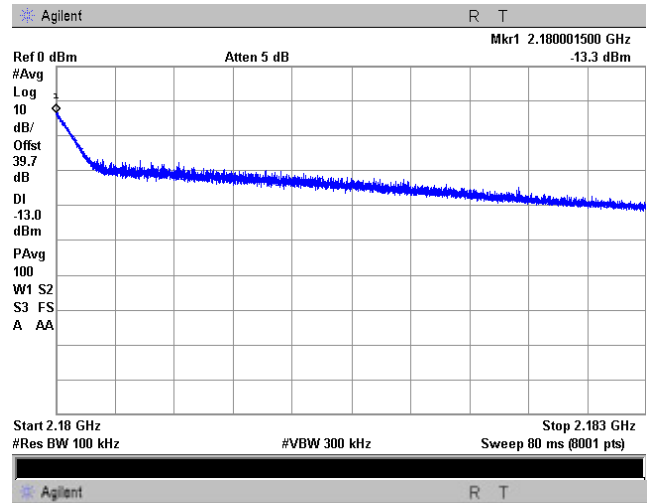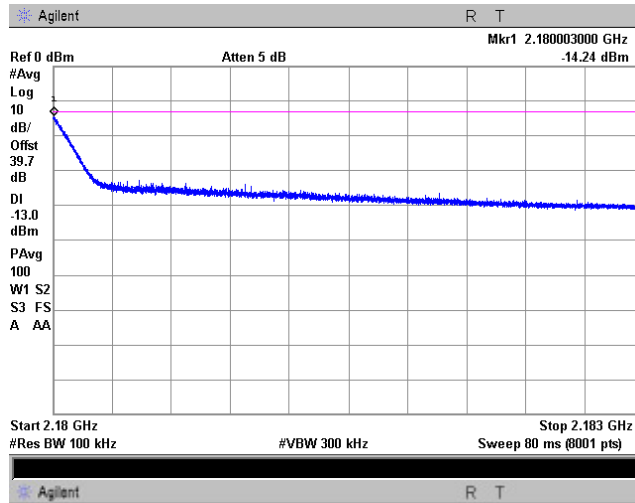



HERMON LABORATORIES



<b>Test specification: Section 27.53, Out-of-band emissions conducted measurements</b>			
<b>Test procedure:</b> 47 CFR, Sections 2.1051; KDB 935210 D05 v01r01, section 3.6.2			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 10-Oct-16			
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 44 %	<b>Air Pressure:</b> 1008 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

**Plot 7.5.5 Out-of-band spurious emission test results at low carrier frequency, Lower band Edge**

OPERATING FREQUENCY RANGE:  
DETECTOR USED:  
CONFIGURATION:  
MODULATION:  
COMPOSITE INPUT SIGNAL  
CONFIGURATION: Below AGC threshold

2110 – 2180 MHz  
Average  
Downlink  
GSM/GSM

CONFIGURATION: Above AGC threshold +3dB

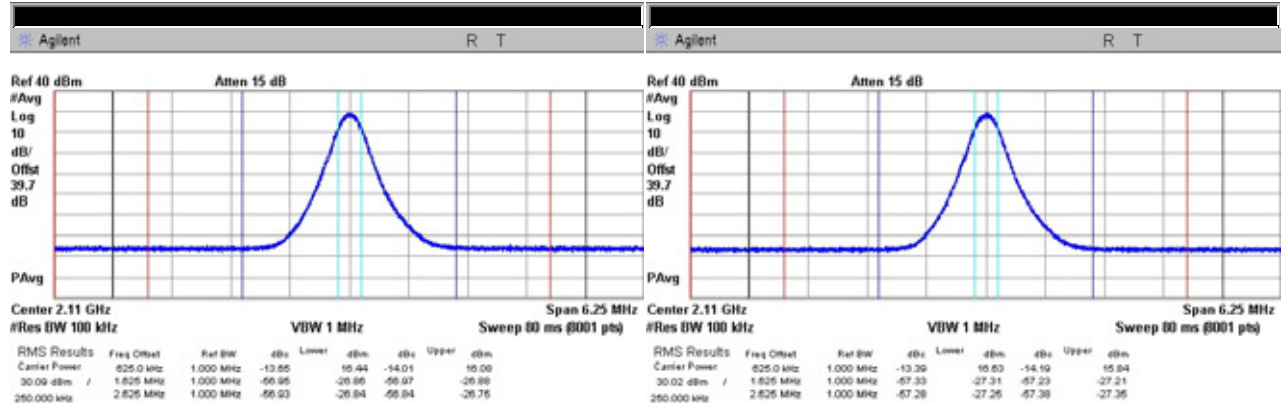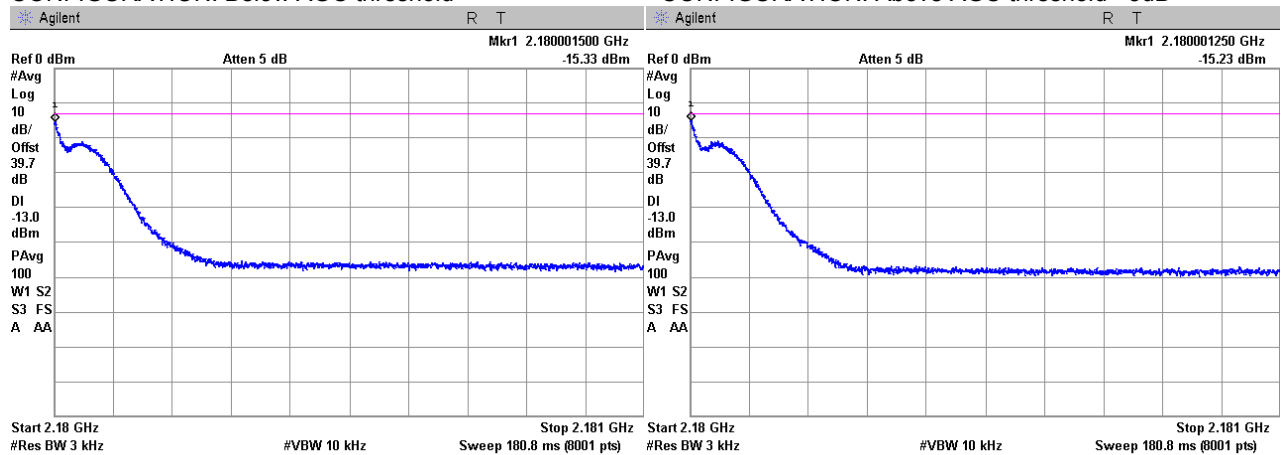





<b>Test specification: Section 27.53, Out-of-band emissions conducted measurements</b>			
<b>Test procedure:</b> 47 CFR, Sections 2.1051; KDB 935210 D05 v01r01, section 3.6.2			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 10-Oct-16			
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 44 %	<b>Air Pressure:</b> 1008 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

Plot 7.5.6 Out-of-band spurious emission test results at low carrier frequency, Lower band Edge

OPERATING FREQUENCY RANGE:  
DETECTOR USED:  
CONFIGURATION:  
MODULATION:  
SINGLE TEST SIGNAL INPUT  
CONFIGURATION: Below AGC threshold

2110 – 2180 MHz  
Average  
Downlink  
GSM/GSM

CONFIGURATION: Above AGC threshold +3dB

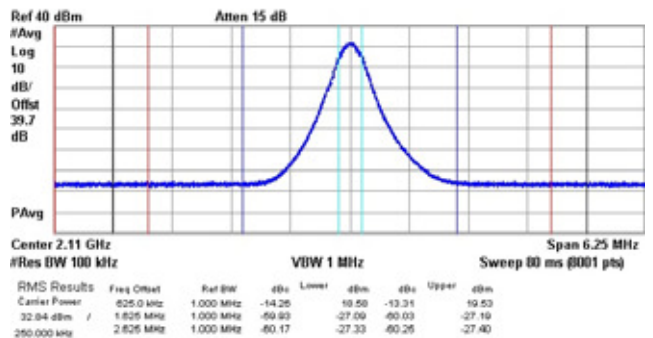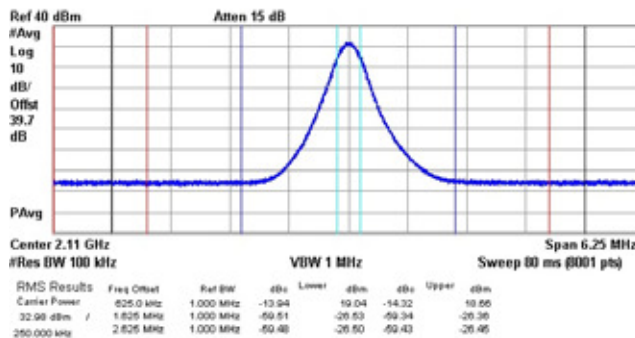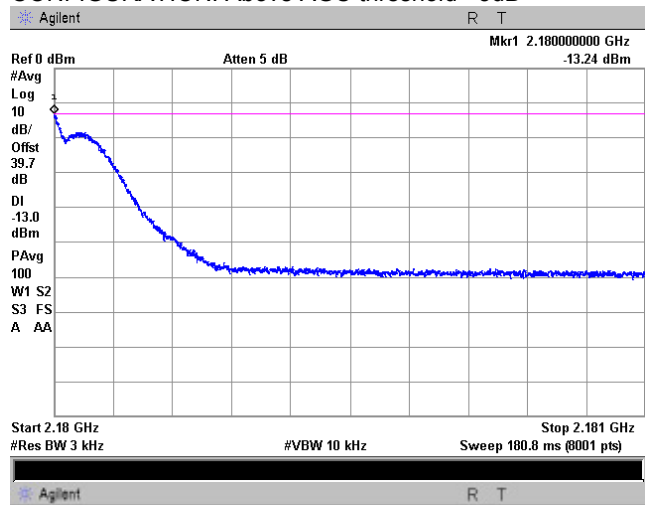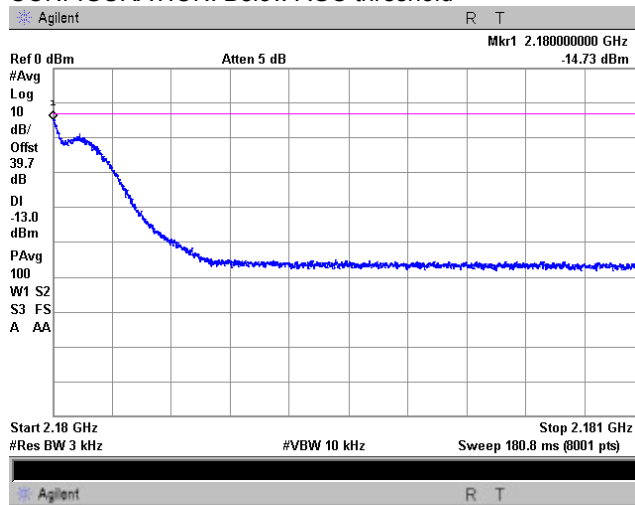





<b>Test specification: Section 27.53, Out-of-band emissions conducted measurements</b>			
<b>Test procedure:</b> 47 CFR, Sections 2.1051; KDB 935210 D05 v01r01, section 3.6.2			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 10-Oct-16			
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 44 %	<b>Air Pressure:</b> 1008 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

**Plot 7.5.7 Out-of-band spurious emission test results at high carrier frequency, Upper band Edge**

OPERATING FREQUENCY RANGE:  
DETECTOR USED:  
CONFIGURATION:  
MODULATION:  
COMPOSITE INPUT SIGNAL  
CONFIGURATION: Below AGC threshold

2110 – 2180 MHz  
Average  
Downlink  
GSM/GSM

CONFIGURATION: Above AGC threshold +3dB

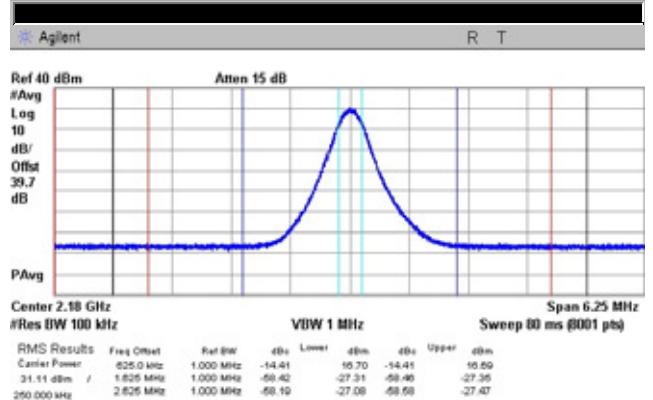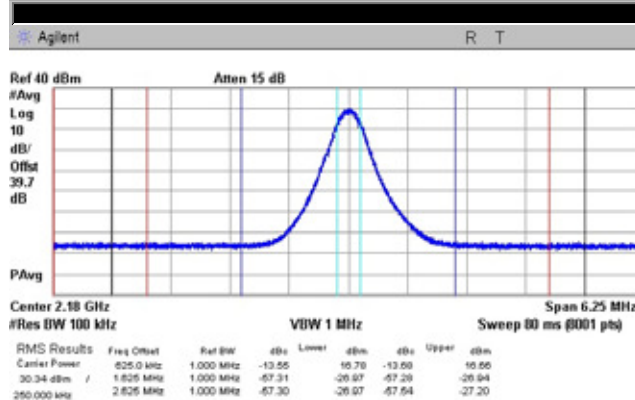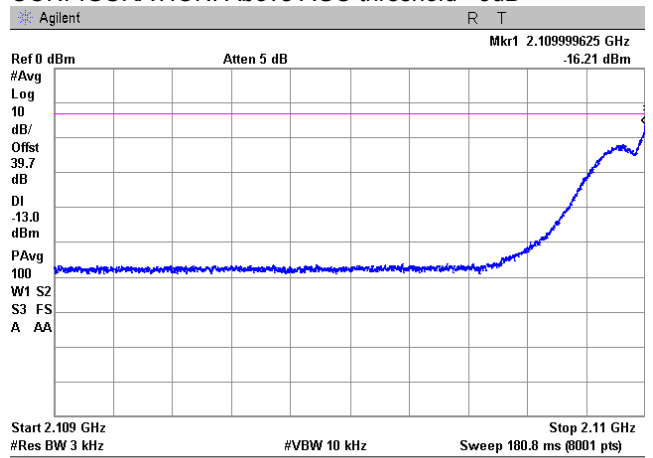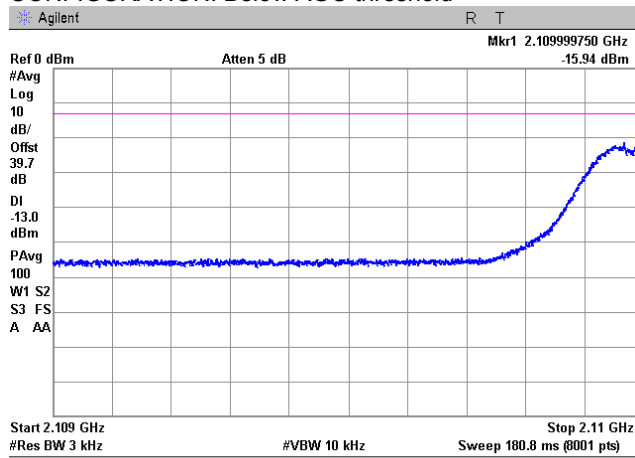


<b>Test specification: Section 27.53, Out-of-band emissions conducted measurements</b>			
<b>Test procedure:</b> 47 CFR, Sections 2.1051; KDB 935210 D05 v01r01, section 3.6.2			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 10-Oct-16			
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 44 %	<b>Air Pressure:</b> 1008 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			




**Plot 7.5.8 Out-of-band spurious emission test results at high carrier frequency, Upper band Edge**

OPERATING FREQUENCY RANGE: 2110 – 2180 MHz  
 DETECTOR USED: Average  
 CONFIGURATION: Downlink  
 MODULATION: GSM/GSM

SINGLE TEST SIGNAL INPUT  
 CONFIGURATION: Below AGC threshold

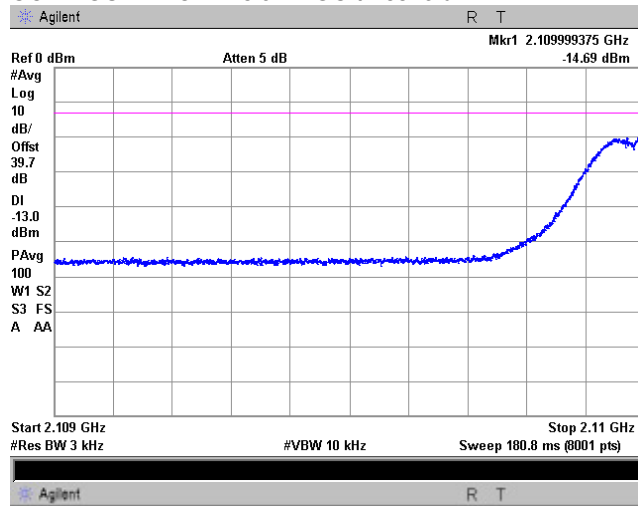

CONFIGURATION: Above AGC threshold +3dB

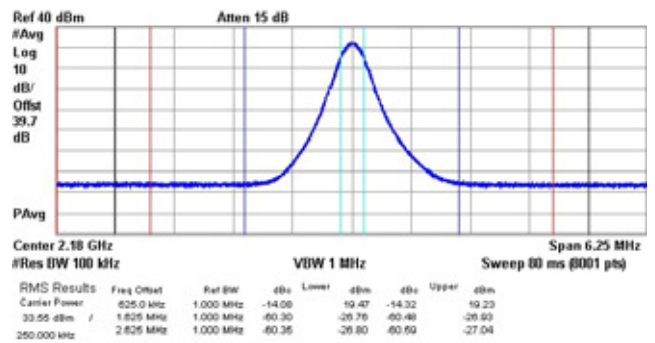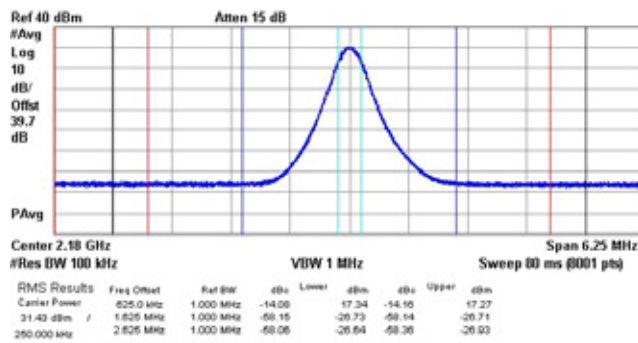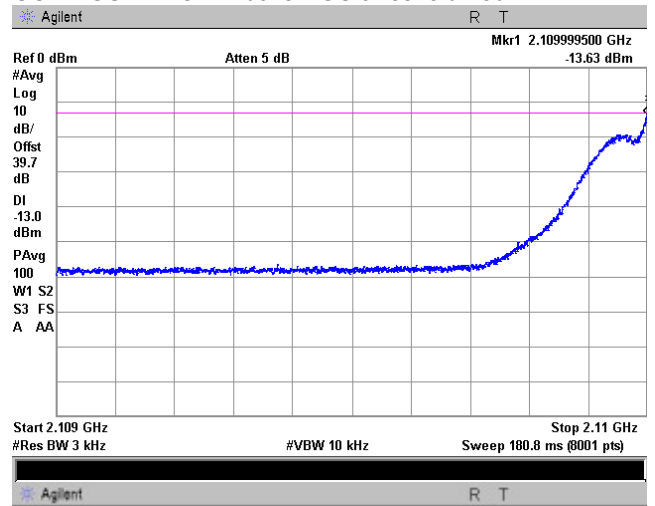







<b>Test specification: Section 27.53, Out-of-band emissions conducted measurements</b>			
<b>Test procedure:</b> 47 CFR, Sections 2.1051; KDB 935210 D05 v01r01, section 3.6.2			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 10-Oct-16			
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 44 %	<b>Air Pressure:</b> 1008 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

**Plot 7.5.9 Out-of-band spurious emission test results at low carrier frequency, Lower band Edge**

OPERATING FREQUENCY RANGE:  
DETECTOR USED:  
CONFIGURATION:  
MODULATION:  
COMPOSITE INPUT SIGNAL  
CONFIGURATION: Below AGC threshold

2110 – 2180 MHz  
Average  
Downlink  
WCDMA/WCDMA

CONFIGURATION: Above AGC threshold +3dB

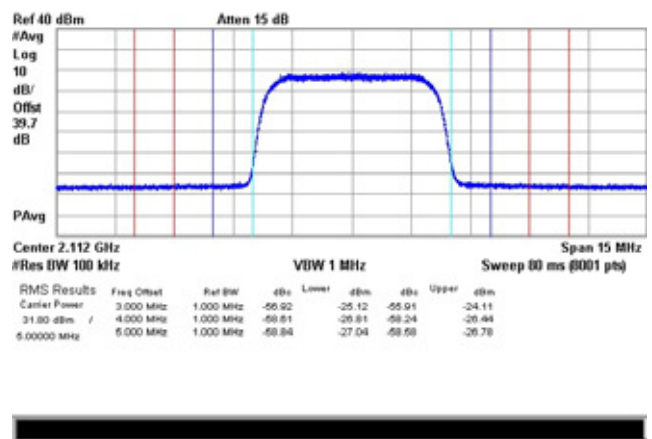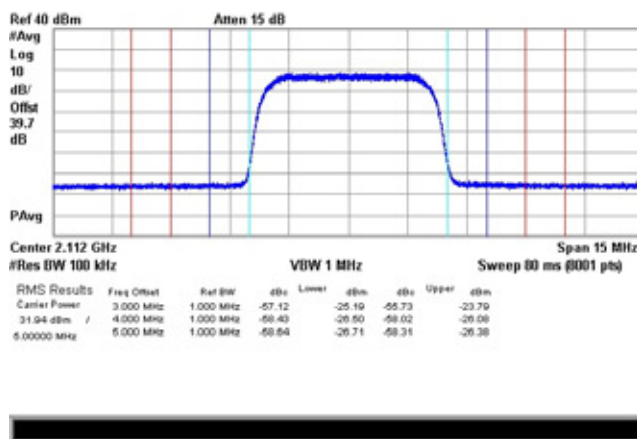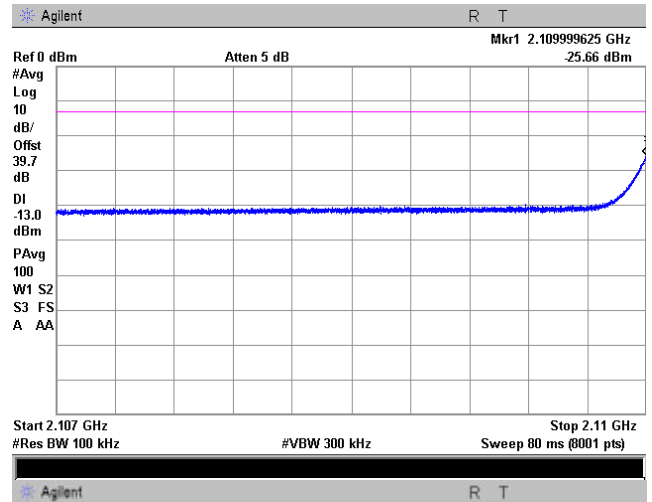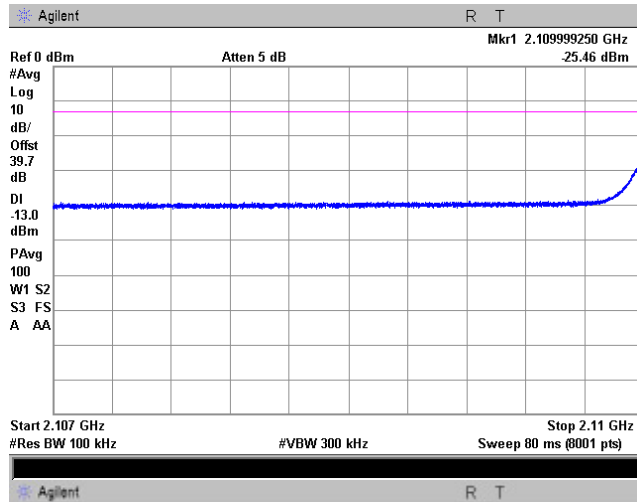





<b>Test specification: Section 27.53, Out-of-band emissions conducted measurements</b>			
<b>Test procedure:</b> 47 CFR, Sections 2.1051; KDB 935210 D05 v01r01, section 3.6.2			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 10-Oct-16			
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 44 %	<b>Air Pressure:</b> 1008 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

**Plot 7.5.10 Out-of-band spurious emission test results at low carrier frequency, Lower band Edge**

OPERATING FREQUENCY RANGE:  
DETECTOR USED:  
CONFIGURATION:  
MODULATION:  
SINGLE TEST SIGNAL INPUT  
CONFIGURATION: Below AGC threshold

2110 – 2180 MHz  
Average  
Downlink  
WCDMA/WCDMA

CONFIGURATION: Above AGC threshold +3dB

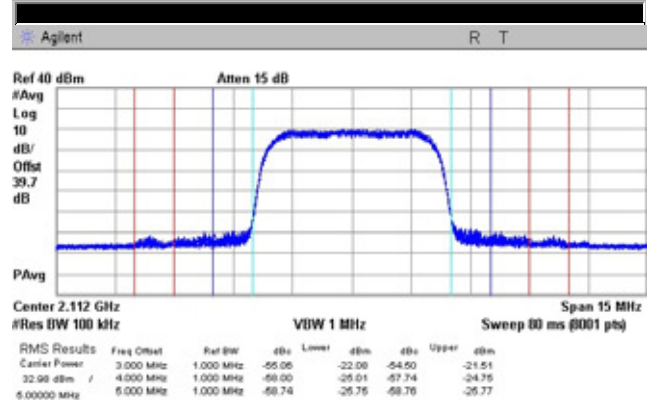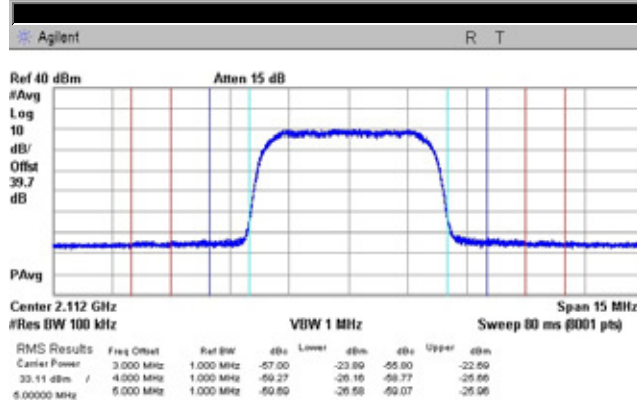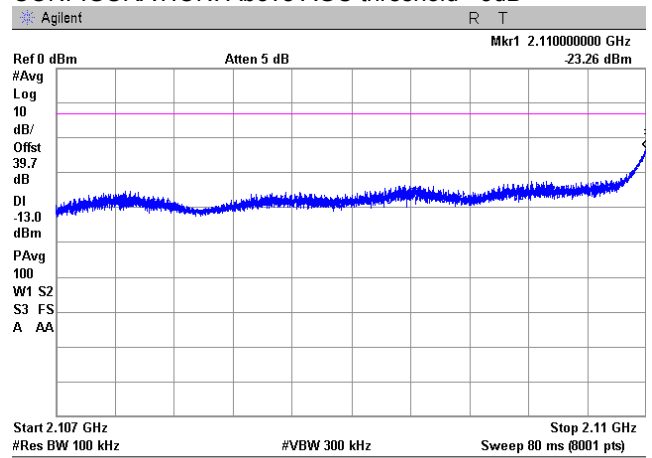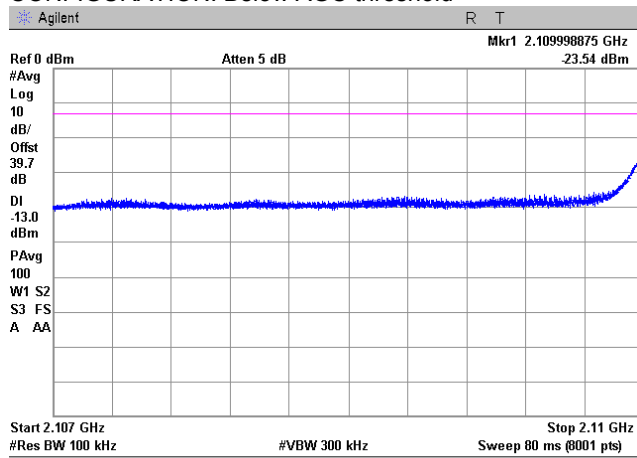





<b>Test specification: Section 27.53, Out-of-band emissions conducted measurements</b>			
<b>Test procedure:</b> 47 CFR, Sections 2.1051; KDB 935210 D05 v01r01, section 3.6.2			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 10-Oct-16			
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 44 %	<b>Air Pressure:</b> 1008 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

Plot 7.5.11 Intermodulation test results in the 2110.0 – 2180.0 MHz frequency range, Upper band Edge

OPERATING FREQUENCY RANGE:  
DETECTOR USED:  
CONFIGURATION:  
MODULATION:  
COMPOSITE INPUT SIGNAL  
CONFIGURATION: Below AGC threshold

2110 – 2180 MHz  
Average  
Downlink  
WCDMA/WCDMA

CONFIGURATION: Above AGC threshold +3dB

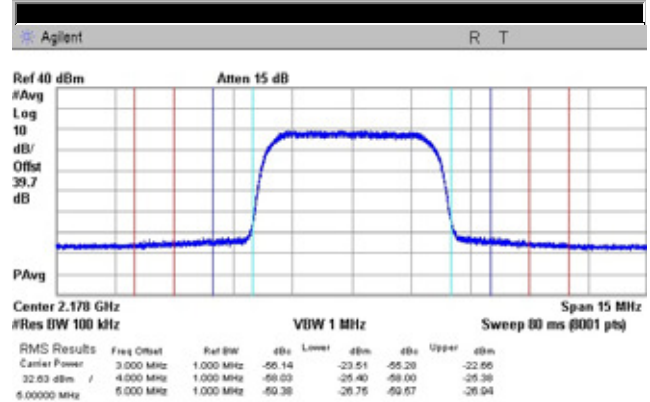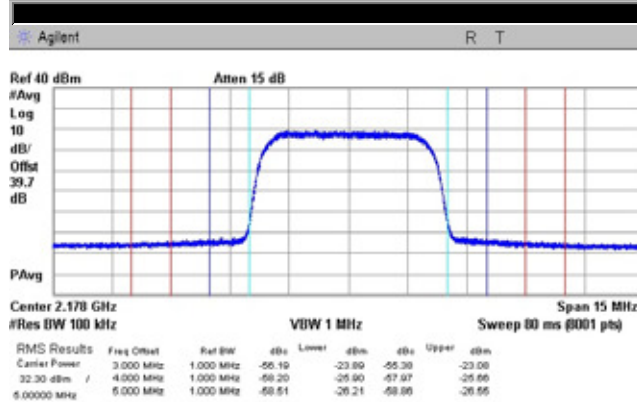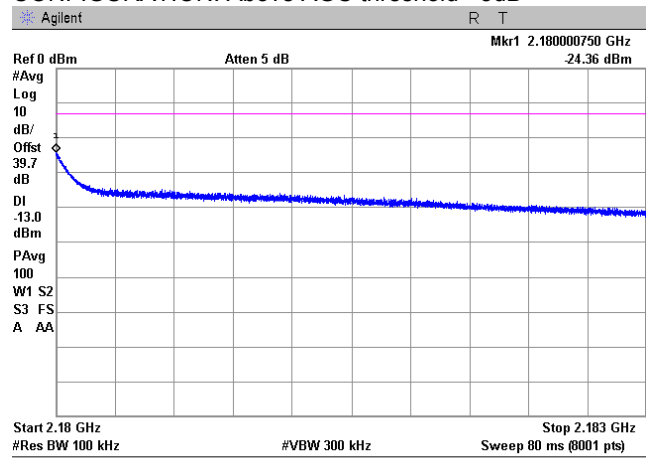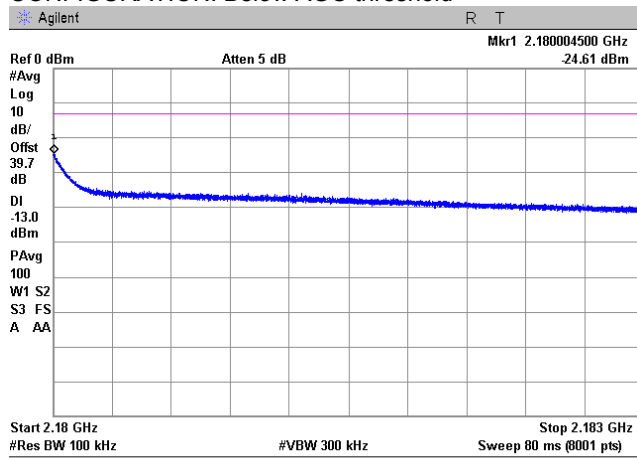


<b>Test specification: Section 27.53, Out-of-band emissions conducted measurements</b>			
<b>Test procedure:</b> 47 CFR, Sections 2.1051; KDB 935210 D05 v01r01, section 3.6.2			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 10-Oct-16			
<b>Temperature:</b> 23 °C	<b>Relative Humidity:</b> 44 %	<b>Air Pressure:</b> 1008 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			




Plot 7.5.12 Intermodulation test results in the 2110.0 – 2180.0 MHz frequency range, Upper band Edge

OPERATING FREQUENCY RANGE: 2110 – 2180 MHz  
 DETECTOR USED: Average  
 CONFIGURATION: Downlink  
 MODULATION: WCDMA/WCDMA

SINGLE TEST SIGNAL INPUT  
 CONFIGURATION: Below AGC threshold

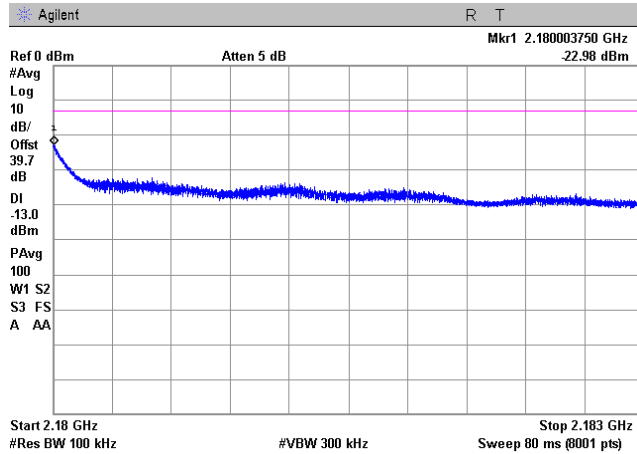

CONFIGURATION: Above AGC threshold

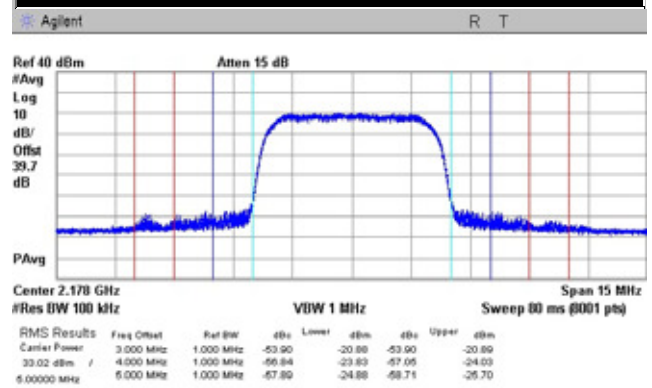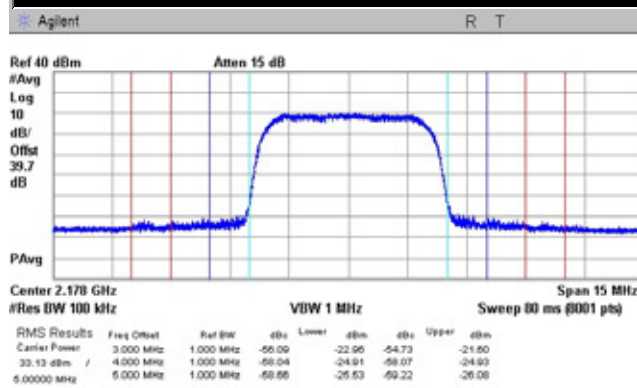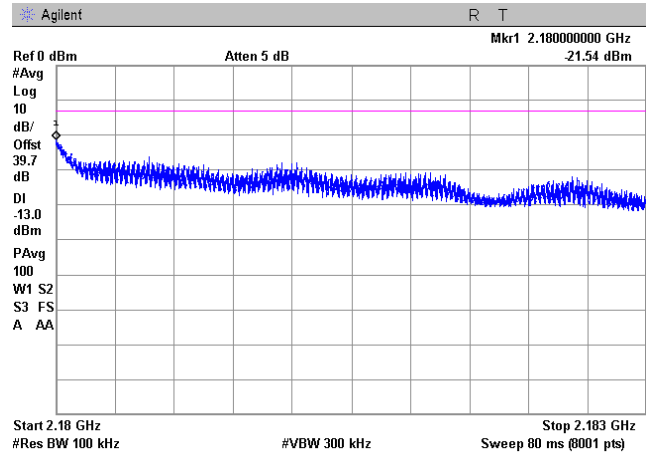

<b>Test specification:</b> Section 27.53, Spurious emissions at RF antenna connector			
<b>Test procedure:</b> 47 CFR, Section 2.1051; KDB 935210 D05 v01r01 section 3.6.3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 27-Sep-16			
<b>Temperature:</b> 28 °C	<b>Relative Humidity:</b> 43 %	<b>Air Pressure:</b> 1012 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

## 7.6 Spurious emissions at RF antenna connector test

### 7.6.1 General

This test was performed to measure spurious emissions at RF antenna connector. Specification test limits are given in Table 7.6.1.

Table 7.6.1 Spurious emission limits

Frequency, MHz	Attenuation below carrier, dBc	Spurious emissions, dBm
0.009 – 10th harmonic*	$43+10\log P^{**}$	-13.0

\* - spurious emission limits do not apply to the in band emission within  $\pm 250$  % of the authorized bandwidth from the carrier; investigated in course of emission mask testing

\*\* - P is a transmitter output power in watts.


### 7.6.2 Test procedure

7.6.2.1 The EUT was set up as shown in Figure 7.6.1, energized and its proper operation was checked.

7.6.2.2 The EUT was adjusted to produce maximum available for end user RF output power.

7.6.2.3 The spurious emission was measured with spectrum analyzer as provided in Table 7.6.2 and associated plots.

Figure 7.6.1 Spurious emission test setup, single output

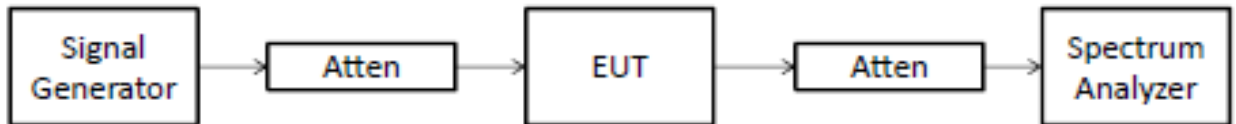



<b>Test specification:</b> Section 27.53, Spurious emissions at RF antenna connector			
<b>Test procedure:</b> 47 CFR, Section 2.1051; KDB 935210 D05 v01r01 section 3.6.3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 27-Sep-16			
<b>Temperature:</b> 28 °C	<b>Relative Humidity:</b> 43 %	<b>Air Pressure:</b> 1012 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

**Table 7.6.2 Spurious emission test results**

ASSIGNED FREQUENCY RANGE: 2110.0 – 2180.0 MHz  
 INVESTIGATED FREQUENCY RANGE: 0.009 – 22000 MHz  
 DETECTOR USED: Peak  
 VIDEO BANDWIDTH: ≥ Resolution bandwidth  
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

MODULATION: AWGN

Frequency, MHz	SA reading, dBm	Attenuation, dB	Cable loss, dB	RBW, kHz	Spurious emission, dBm	Limit, dBm	Margin, dB*	Verdict
<b>Low carrier frequency</b>								
2106.58	-15.30	Included	Included	1000	-15.30	-13.0	-2.30	Pass
2183.00	-22.96	Included	Included	1000	-22.96	-13.0	-9.96	Pass
<b>Mid carrier frequency</b>								
2105.62	-21.43	Included	Included	1000	-21.43	13.0	-8.43	Pass
2183.42	-22.23	Included	Included	1000	-22.23	-13.0	-9.23	Pass
<b>High carrier frequency</b>								
2107.00	-20.93	Included	Included	1000	-20.93	-13.0	-7.93	Pass
2183.00	-16.32	Included	Included	1000	-16.32	-13.0	-3.32	Pass

MODULATION: GSM

Frequency, MHz	SA reading, dBm	Attenuation, dB	Cable loss, dB	RBW, kHz	Spurious emission, dBm	Limit, dBm	Margin, dB*	Verdict
<b>Low carrier frequency</b>								
2106.17	-21.66	Included	Included	1000	-21.66	-13.0	-8.66	Pass
2183.51	-22.42	Included	Included	1000	-22.42	-13.0	-9.42	Pass
<b>Mid carrier frequency</b>								
2106.58	-21.56	Included	Included	1000	-21.56	-13.0	-8.56	Pass
2183.00	-23.09	Included	Included	1000	-23.09	-13.0	-10.09	Pass
<b>High carrier frequency</b>								
2105.34	-20.54	Included	Included	1000	-20.54	-13.0	-7.54	Pass
2184.53	-23.58	Included	Included	1000	-23.58	-13.0	-10.58	Pass

MODULATION: WCDMA

Frequency, MHz	SA reading, dBm	Attenuation, dB	Cable loss, dB	RBW, kHz	Spurious emission, dBm	Limit, dBm	Margin, dB*	Verdict
<b>Low carrier frequency</b>								
2107.00	-15.96	Included	Included	1000	-15.96	-13.0	-2.96	Pass
2183.31	-22.82	Included	Included	1000	-22.82	-13.0	-9.82	Pass
<b>Mid carrier frequency</b>								
2107.00	-21.92	Included	Included	1000	-21.92	-13.0	-8.92	Pass
2183.41	-23.71	Included	Included	1000	-23.71	-13.0	-10.71	Pass
<b>High carrier frequency</b>								
2106.03	-21.89	Included	Included	1000	-21.89	-13.0	-8.89	Pass
2183.10	-16.13	Included	Included	1000	-16.13	-13.0	-3.13	Pass

\*- Margin = Spurious emission – specification limit.

**Reference numbers of test equipment used**

HL 2909	HL 3433	HL 3787	HL 3788	HL 3901	HL 4354		
---------	---------	---------	---------	---------	---------	--	--


Full description is given in Appendix A.

<b>Test specification:</b> Section 27.53, Spurious emissions at RF antenna connector			
<b>Test procedure:</b> 47 CFR, Section 2.1051; KDB 935210 D05 v01r01 section 3.6.3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 27-Sep-16			
<b>Temperature:</b> 28 °C	<b>Relative Humidity:</b> 43 %	<b>Air Pressure:</b> 1012 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			


Plot 7.6.1 Spurious emission measurements in 9 - 150 kHz range at carrier frequency

FREQUENCY RANGE: 2110 – 2180 MHz  
OPERATIONAL MODE: AWGN downlink transmit  
CONFIGURATION: Below AGC level


CARRIER FREQUENCY: Low

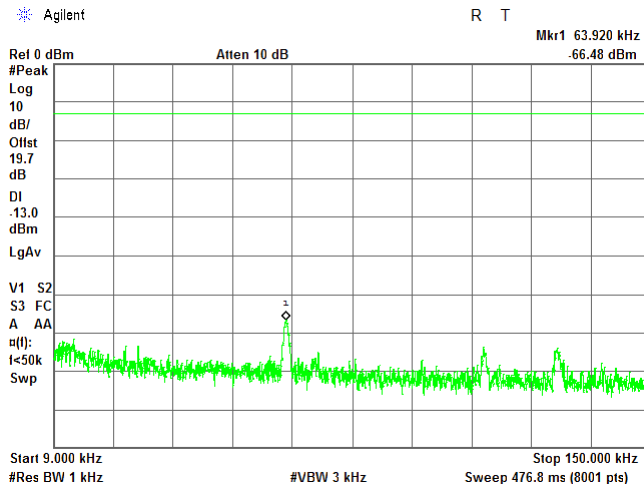

CARRIER FREQUENCY: Mid

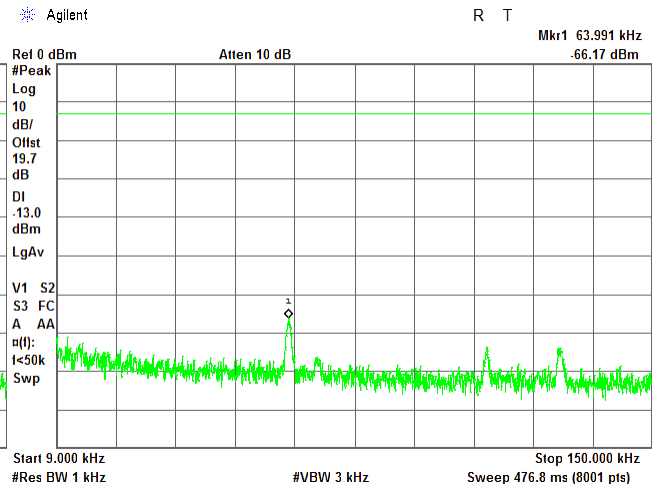

CARRIER FREQUENCY: High

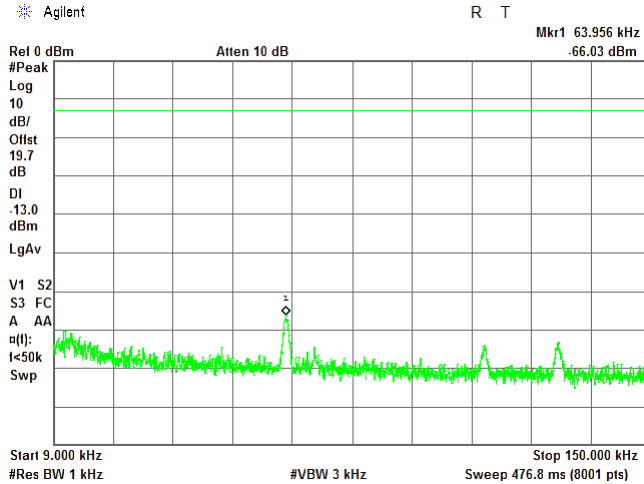




HERMON LABORATORIES

<b>Test specification:</b> Section 27.53, Spurious emissions at RF antenna connector			
<b>Test procedure:</b> 47 CFR, Section 2.1051; KDB 935210 D05 v01r01 section 3.6.3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 27-Sep-16			
<b>Temperature:</b> 28 °C	<b>Relative Humidity:</b> 43 %	<b>Air Pressure:</b> 1012 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			


**Plot 7.6.2 Spurious emission measurements in 0.15 - 30.0 MHz range at carrier frequency**

FREQUENCY RANGE: 2110 – 2180 MHz  
 OPERATIONAL MODE: AWGN downlink transmit  
 CONFIGURATION: Below AGC level


CARRIER FREQUENCY: Low

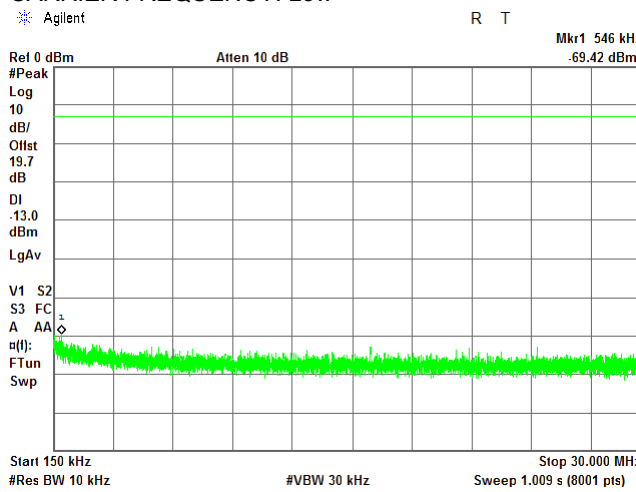

CARRIER FREQUENCY: Mid

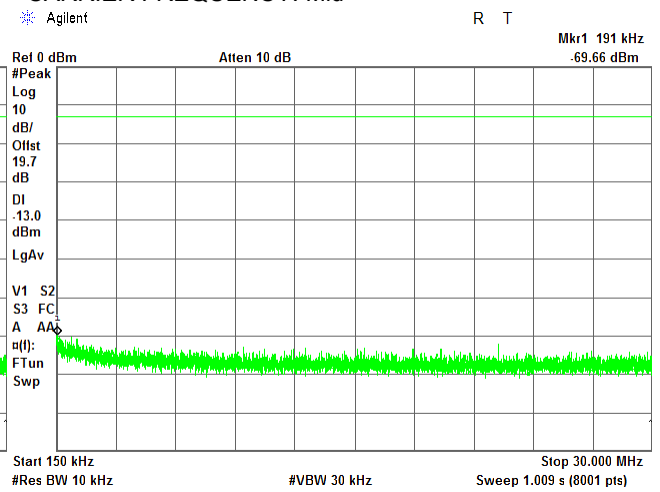

CARRIER FREQUENCY: High

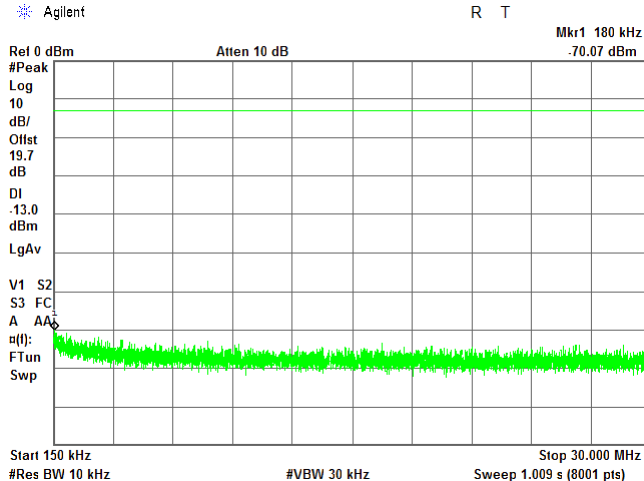




<b>Test specification:</b> Section 27.53, Spurious emissions at RF antenna connector			
<b>Test procedure:</b> 47 CFR, Section 2.1051; KDB 935210 D05 v01r01 section 3.6.3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 27-Sep-16			
<b>Temperature:</b> 28 °C	<b>Relative Humidity:</b> 43 %	<b>Air Pressure:</b> 1012 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			


**Plot 7.6.3 Spurious emission measurements in 30.0 - 1000 MHz range at carrier frequency**

FREQUENCY RANGE: 2110 – 2180 MHz  
 OPERATIONAL MODE: AWGN downlink transmit  
 CONFIGURATION: Below AGC level


CARRIER FREQUENCY: Low

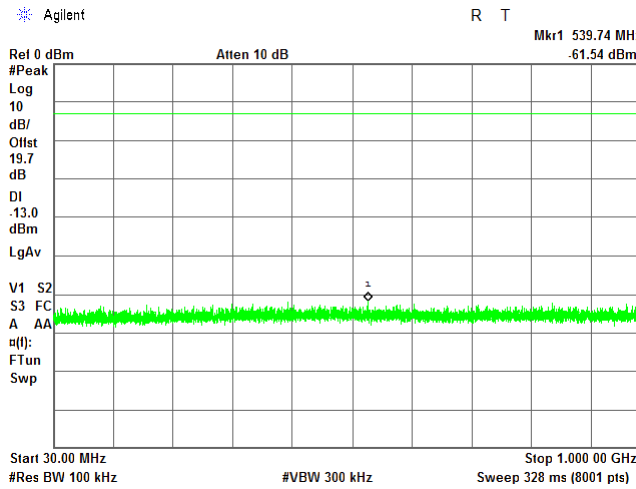

CARRIER FREQUENCY: Mid

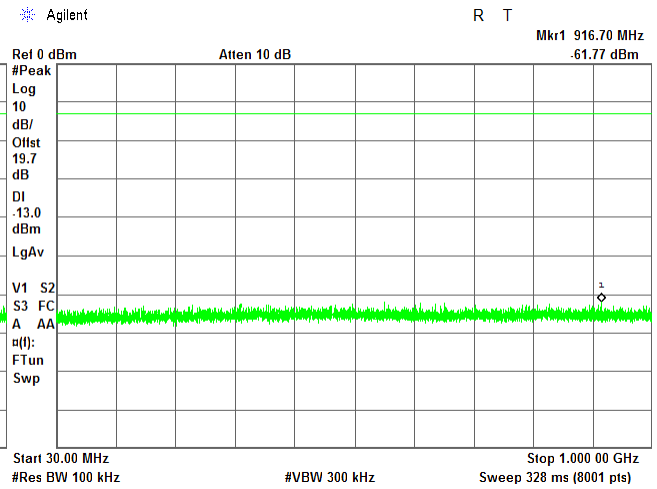

CARRIER FREQUENCY: High

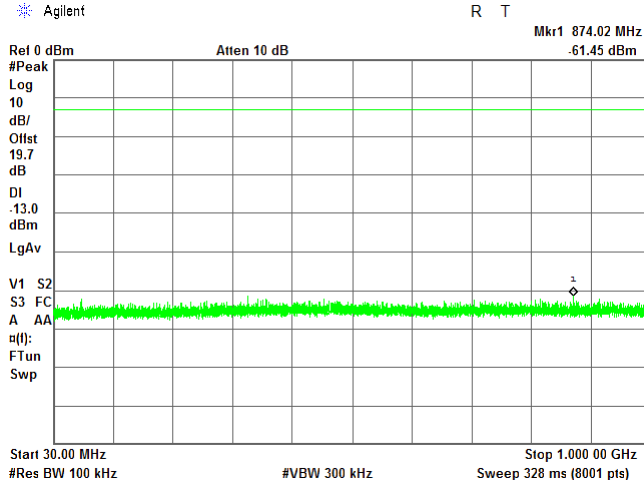



HERMON LABORATORIES

<b>Test specification:</b> Section 27.53, Spurious emissions at RF antenna connector			
<b>Test procedure:</b> 47 CFR, Section 2.1051; KDB 935210 D05 v01r01 section 3.6.3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 27-Sep-16			
<b>Temperature:</b> 28 °C	<b>Relative Humidity:</b> 43 %	<b>Air Pressure:</b> 1012 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			



**Plot 7.6.4 Spurious emission measurements in 1000 - 2107 MHz range at carrier frequency**

FREQUENCY RANGE:  
OPERATIONAL MODE:  
CONFIGURATION:


2110 – 2180 MHz  
AWGN downlink transmit  
Below AGC level

CARRIER FREQUENCY: Low

CARRIER FREQUENCY: Mid

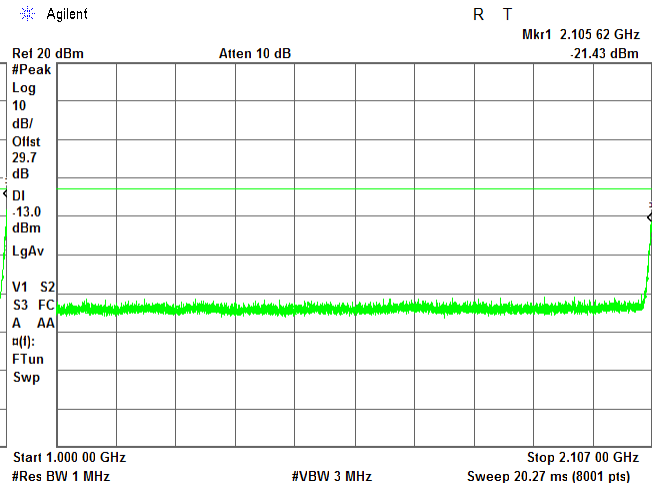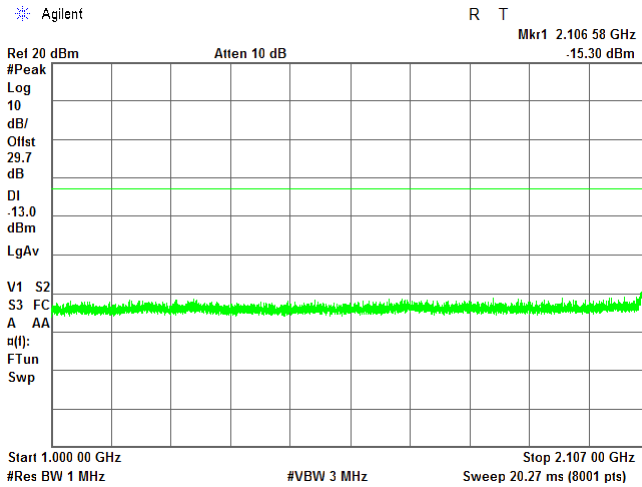

CARRIER FREQUENCY: High

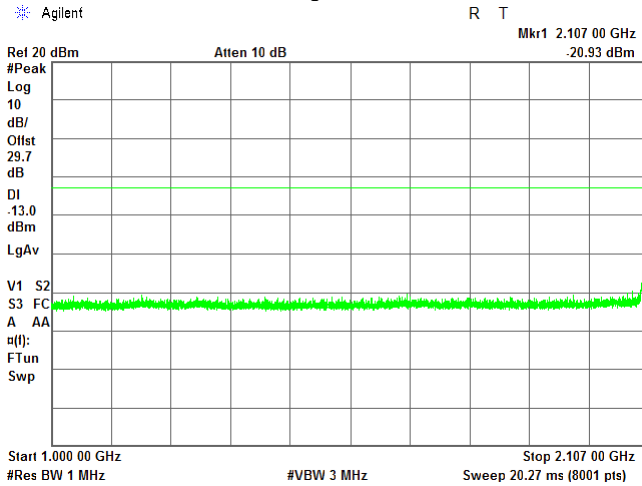



HERMON LABORATORIES

<b>Test specification:</b> Section 27.53, Spurious emissions at RF antenna connector			
<b>Test procedure:</b> 47 CFR, Section 2.1051; KDB 935210 D05 v01r01 section 3.6.3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 27-Sep-16			
<b>Temperature:</b> 28 °C	<b>Relative Humidity:</b> 43 %	<b>Air Pressure:</b> 1012 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			



**Plot 7.6.5 Spurious emission measurements in 2183 - 3000 MHz range at carrier frequency**

FREQUENCY RANGE:  
OPERATIONAL MODE:  
CONFIGURATION:


2110 – 2180 MHz  
AWGN downlink transmit  
Below AGC level

CARRIER FREQUENCY: Low

CARRIER FREQUENCY: Mid

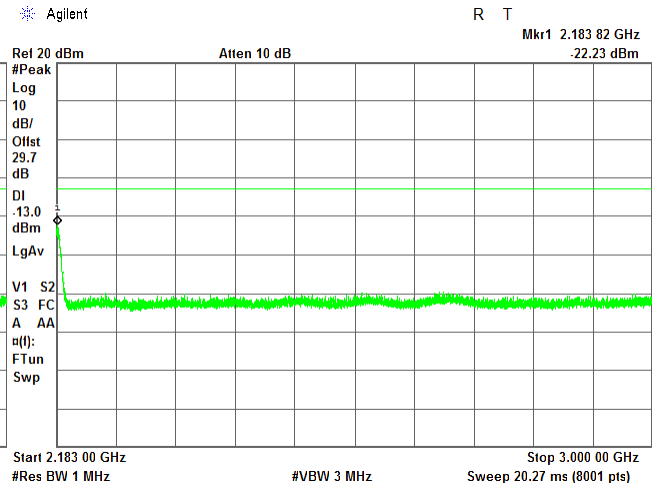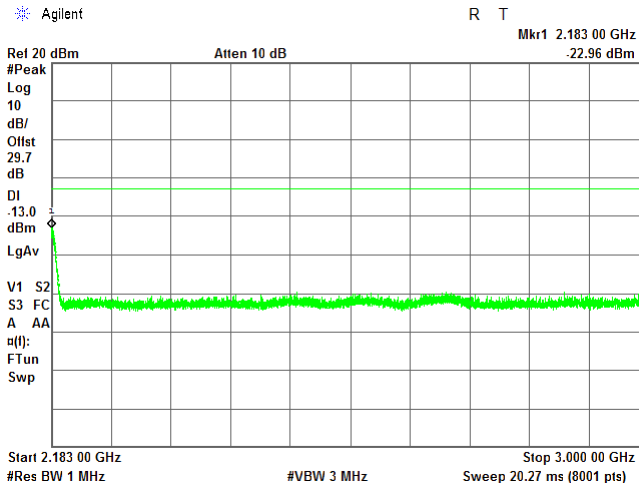

CARRIER FREQUENCY: High

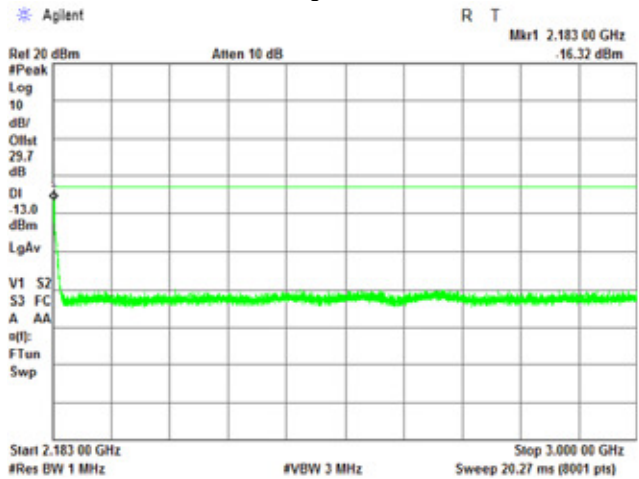

<b>Test specification:</b> Section 27.53, Spurious emissions at RF antenna connector			
<b>Test procedure:</b> 47 CFR, Section 2.1051; KDB 935210 D05 v01r01 section 3.6.3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 27-Sep-16			
<b>Temperature:</b> 28 °C	<b>Relative Humidity:</b> 43 %	<b>Air Pressure:</b> 1012 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			



Plot 7.6.6 Spurious emission measurements in 3000 - 10000 MHz range at carrier frequency

FREQUENCY RANGE:  
OPERATIONAL MODE:  
CONFIGURATION:


2110 – 2180 MHz  
AWGN downlink transmit  
Below AGC level

CARRIER FREQUENCY: Low

CARRIER FREQUENCY: Mid

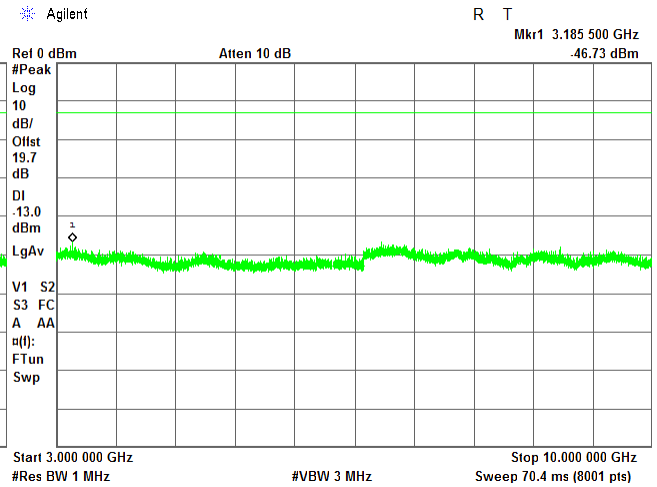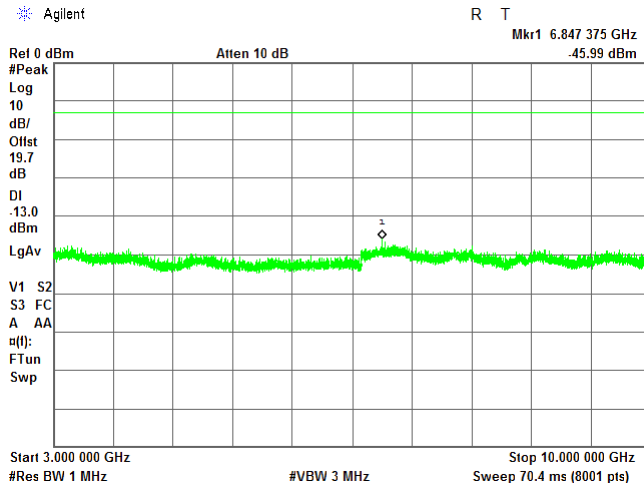

CARRIER FREQUENCY: High

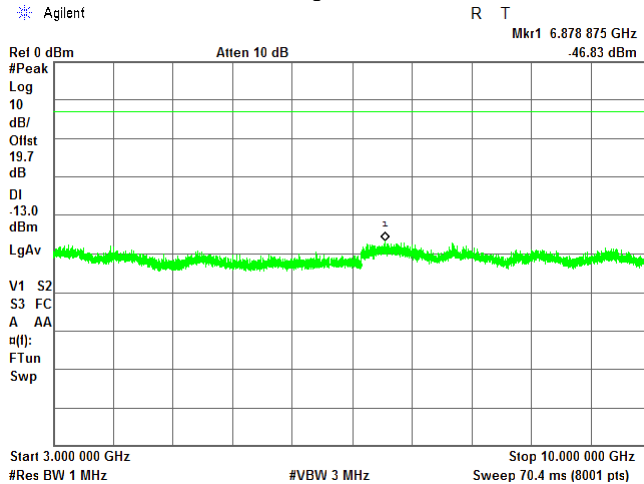


<b>Test specification:</b> Section 27.53, Spurious emissions at RF antenna connector			
<b>Test procedure:</b> 47 CFR, Section 2.1051; KDB 935210 D05 v01r01 section 3.6.3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 27-Sep-16			
<b>Temperature:</b> 28 °C	<b>Relative Humidity:</b> 43 %	<b>Air Pressure:</b> 1012 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			


Plot 7.6.7 Spurious emission measurements in 10000 - 22000 MHz range at carrier frequency

FREQUENCY RANGE: 2110 – 2180 MHz  
 OPERATIONAL MODE: AWGN downlink transmit  
 CONFIGURATION: Below AGC level


CARRIER FREQUENCY: Low

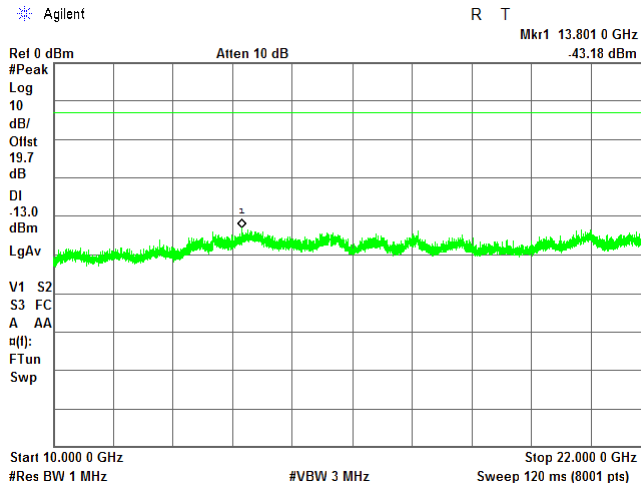

CARRIER FREQUENCY: Mid

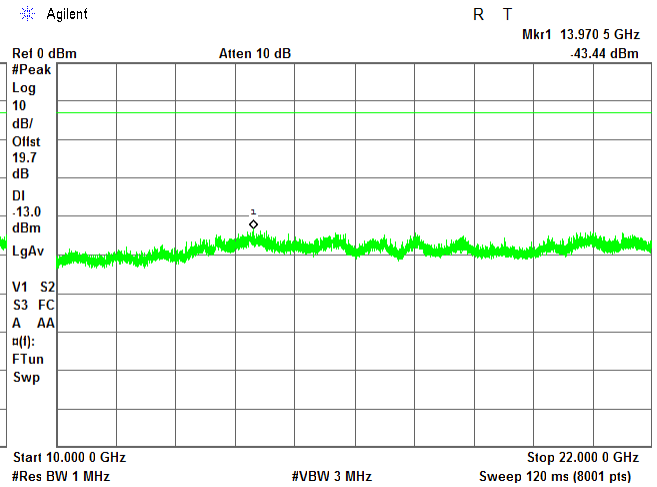

CARRIER FREQUENCY: High

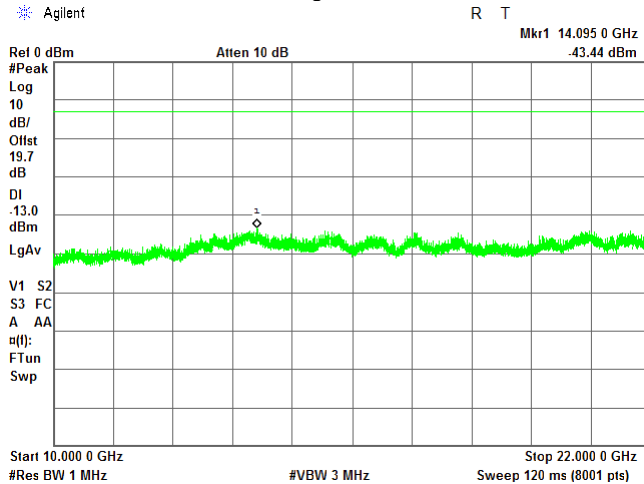

<b>Test specification:</b> Section 27.53, Spurious emissions at RF antenna connector			
<b>Test procedure:</b> 47 CFR, Section 2.1051; KDB 935210 D05 v01r01 section 3.6.3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 27-Sep-16			
<b>Temperature:</b> 28 °C	<b>Relative Humidity:</b> 43 %	<b>Air Pressure:</b> 1012 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			



Plot 7.6.8 Spurious emission measurements in 9 - 150 kHz range at carrier frequency

FREQUENCY RANGE:  
OPERATIONAL MODE:  
CONFIGURATION:


2110 – 2180 MHz  
GSM downlink transmit  
Below AGC level

CARRIER FREQUENCY: Low

CARRIER FREQUENCY: Mid

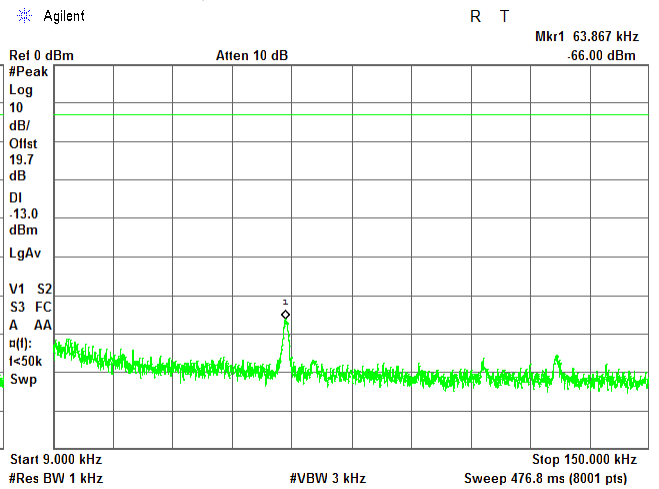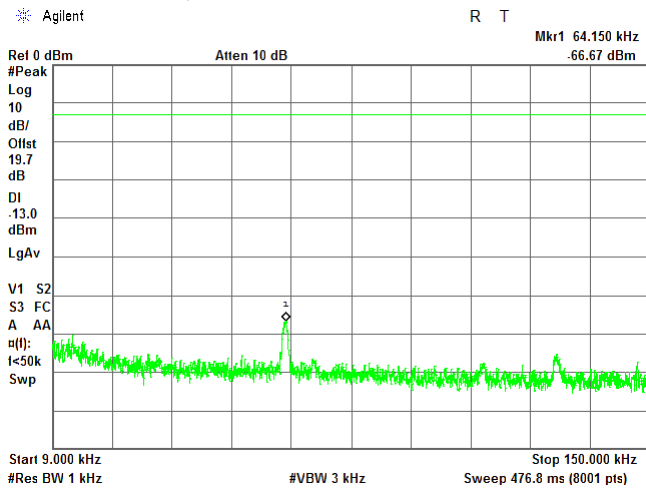

CARRIER FREQUENCY: High

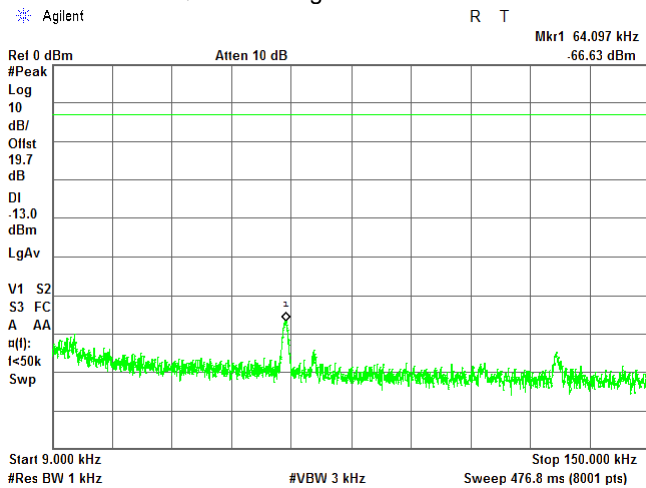

<b>Test specification:</b> Section 27.53, Spurious emissions at RF antenna connector			
<b>Test procedure:</b> 47 CFR, Section 2.1051; KDB 935210 D05 v01r01 section 3.6.3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 27-Sep-16			
<b>Temperature:</b> 28 °C	<b>Relative Humidity:</b> 43 %	<b>Air Pressure:</b> 1012 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			



**Plot 7.6.9 Spurious emission measurements in 0.15 - 30.0 MHz range at carrier frequency**

FREQUENCY RANGE:  
OPERATIONAL MODE:  
CONFIGURATION:


2110 – 2180 MHz  
GSM downlink transmit  
Below AGC level

CARRIER FREQUENCY: Low

CARRIER FREQUENCY: Mid

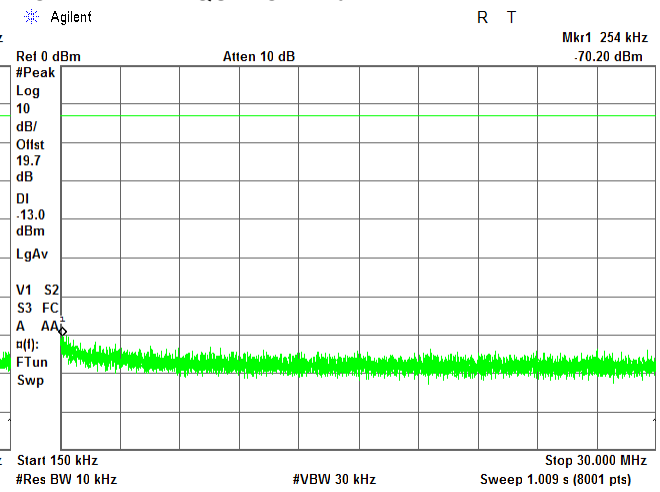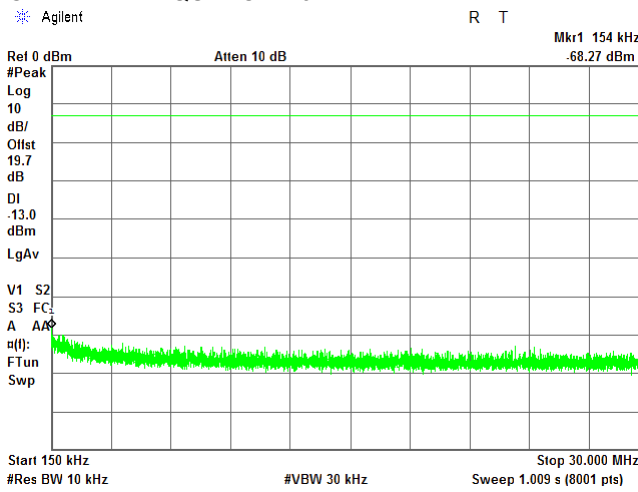

CARRIER FREQUENCY: High

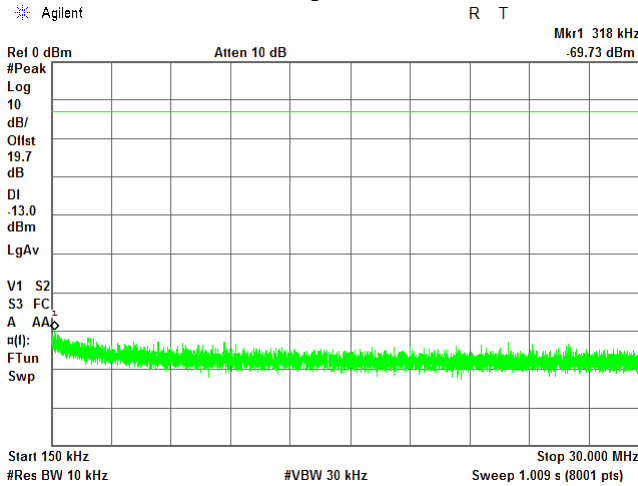

<b>Test specification:</b> Section 27.53, Spurious emissions at RF antenna connector			
<b>Test procedure:</b> 47 CFR, Section 2.1051; KDB 935210 D05 v01r01 section 3.6.3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 27-Sep-16			
<b>Temperature:</b> 28 °C	<b>Relative Humidity:</b> 43 %	<b>Air Pressure:</b> 1012 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			



**Plot 7.6.10 Spurious emission measurements in 30.0 - 1000 MHz range at carrier frequency**

FREQUENCY RANGE:  
OPERATIONAL MODE:  
CONFIGURATION:


2110 – 2180 MHz  
GSM downlink transmit  
Below AGC level

CARRIER FREQUENCY: Low

CARRIER FREQUENCY: Mid

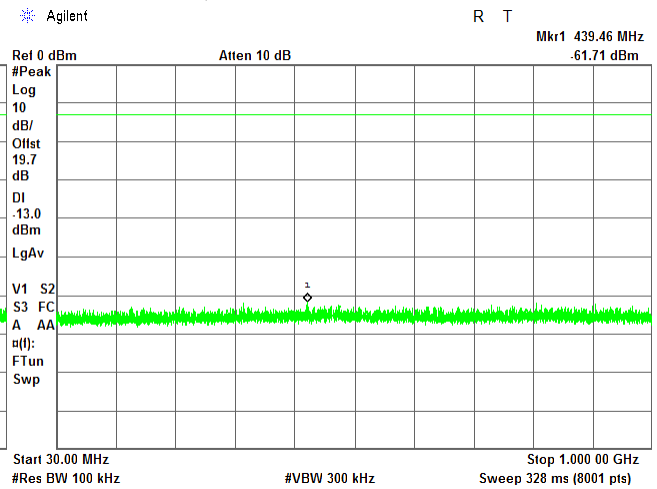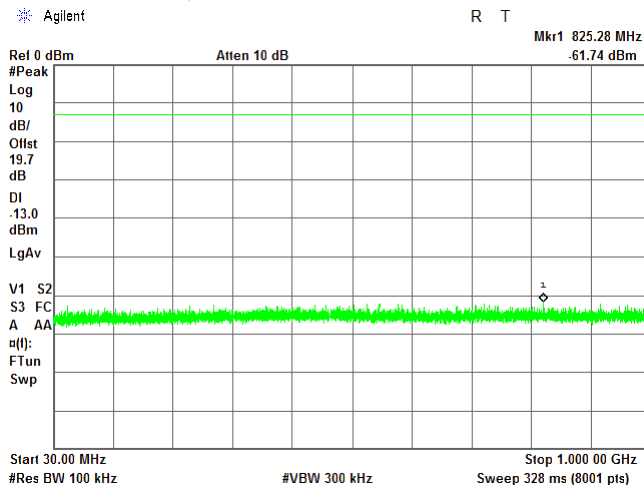

CARRIER FREQUENCY: High

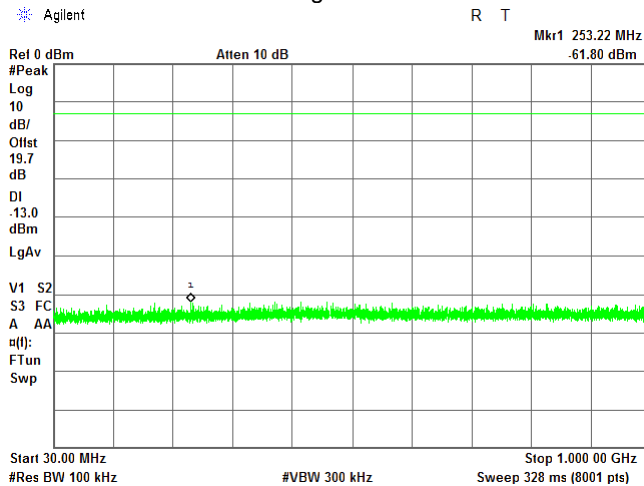





HERMON LABORATORIES

<b>Test specification:</b> Section 27.53, Spurious emissions at RF antenna connector			
<b>Test procedure:</b> 47 CFR, Section 2.1051; KDB 935210 D05 v01r01 section 3.6.3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 27-Sep-16			
<b>Temperature:</b> 28 °C	<b>Relative Humidity:</b> 43 %	<b>Air Pressure:</b> 1012 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			



Plot 7.6.11 Spurious emission measurements in 1000 - 2107 MHz range at carrier frequency

FREQUENCY RANGE:  
OPERATIONAL MODE:  
CONFIGURATION:


2110 – 2180 MHz  
GSM downlink transmit  
Below AGC level

CARRIER FREQUENCY: Low

CARRIER FREQUENCY: Mid

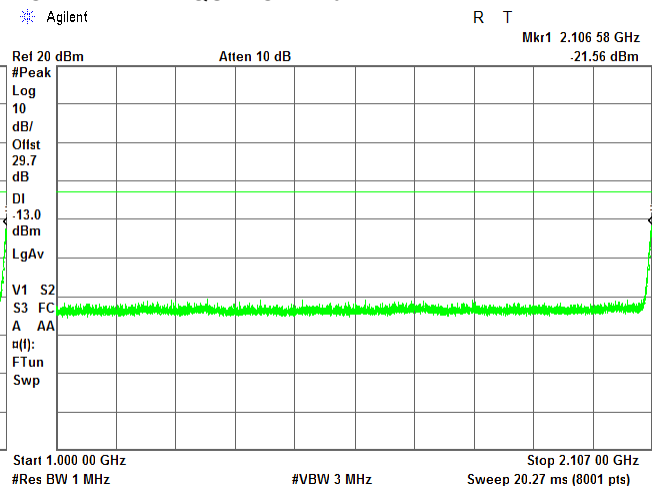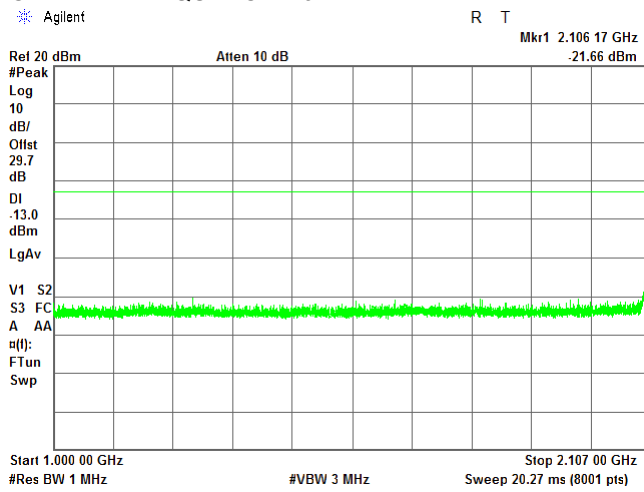

CARRIER FREQUENCY: High

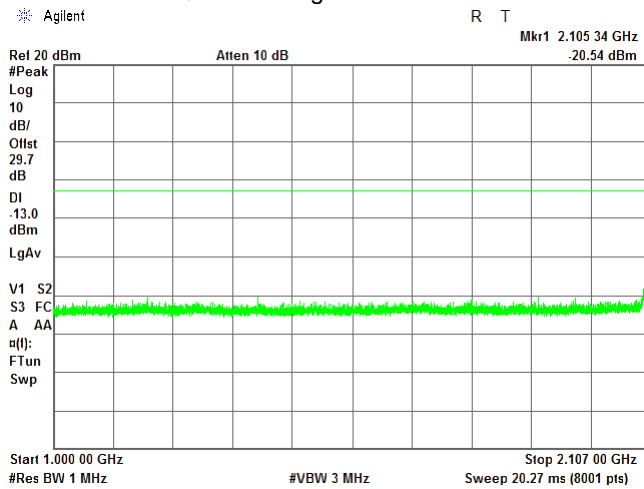


<b>Test specification:</b> Section 27.53, Spurious emissions at RF antenna connector			
<b>Test procedure:</b> 47 CFR, Section 2.1051; KDB 935210 D05 v01r01 section 3.6.3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 27-Sep-16			
<b>Temperature:</b> 28 °C	<b>Relative Humidity:</b> 43 %	<b>Air Pressure:</b> 1012 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			


Plot 7.6.12 Spurious emission measurements in 2183 - 3000 MHz range at carrier frequency

FREQUENCY RANGE: 2110 – 2180 MHz  
 OPERATIONAL MODE: GSM downlink transmit  
 CONFIGURATION: Below AGC level


CARRIER FREQUENCY: Low

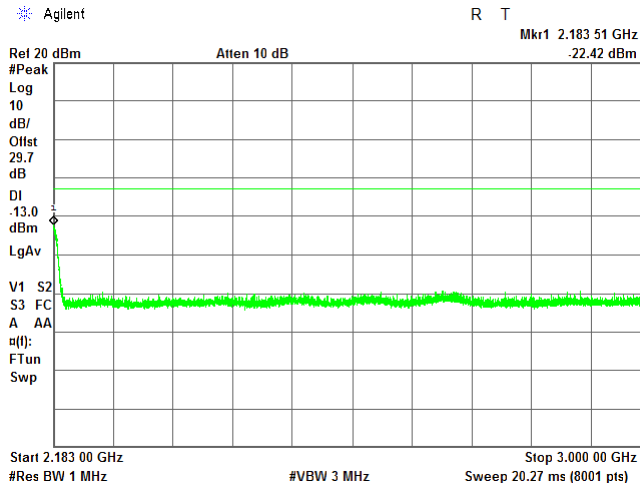

CARRIER FREQUENCY: Mid

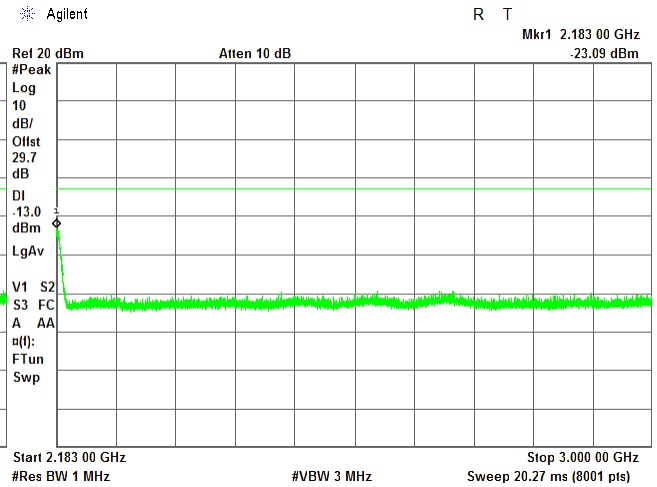

CARRIER FREQUENCY: High

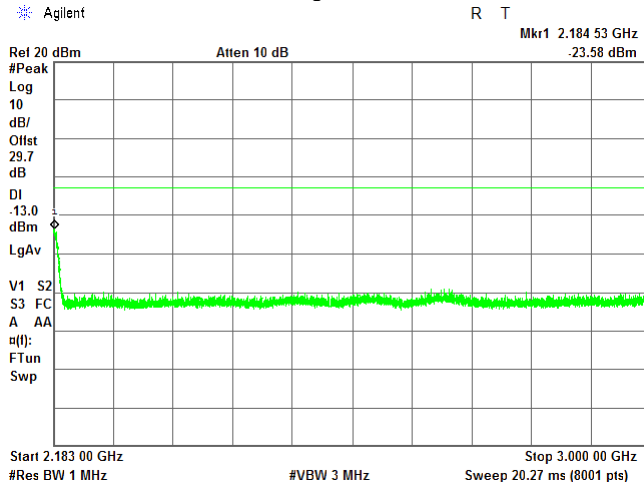

<b>Test specification:</b> Section 27.53, Spurious emissions at RF antenna connector			
<b>Test procedure:</b> 47 CFR, Section 2.1051; KDB 935210 D05 v01r01 section 3.6.3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 27-Sep-16			
<b>Temperature:</b> 28 °C	<b>Relative Humidity:</b> 43 %	<b>Air Pressure:</b> 1012 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			



Plot 7.6.13 Spurious emission measurements in 3000 - 10000 MHz range at carrier frequency

FREQUENCY RANGE:  
OPERATIONAL MODE:  
CONFIGURATION:


2110 – 2180 MHz  
GSM downlink transmit  
Below AGC level

CARRIER FREQUENCY: Low

CARRIER FREQUENCY: Mid

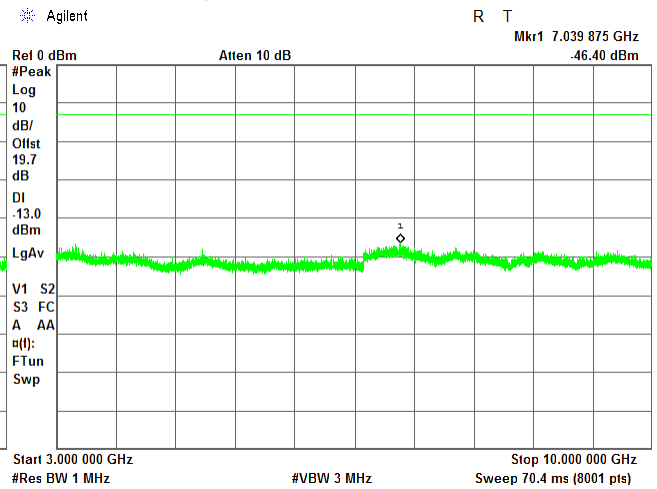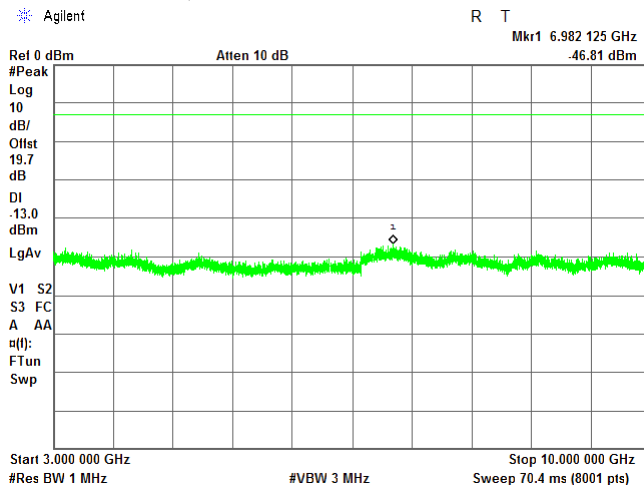

CARRIER FREQUENCY: High

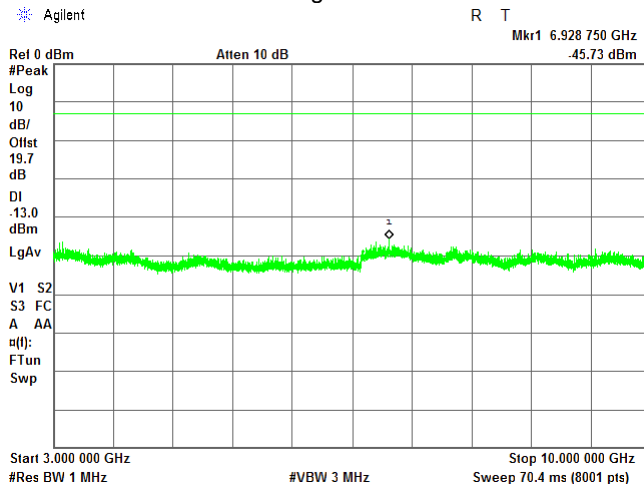

<b>Test specification:</b> Section 27.53, Spurious emissions at RF antenna connector			
<b>Test procedure:</b> 47 CFR, Section 2.1051; KDB 935210 D05 v01r01 section 3.6.3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 27-Sep-16			
<b>Temperature:</b> 28 °C	<b>Relative Humidity:</b> 43 %	<b>Air Pressure:</b> 1012 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			



Plot 7.6.14 Spurious emission measurements in 10000 - 22000 MHz range at carrier frequency

FREQUENCY RANGE:  
OPERATIONAL MODE:  
CONFIGURATION:


2110 – 2180 MHz  
GSM downlink transmit  
Below AGC level

CARRIER FREQUENCY: Low

CARRIER FREQUENCY: Mid

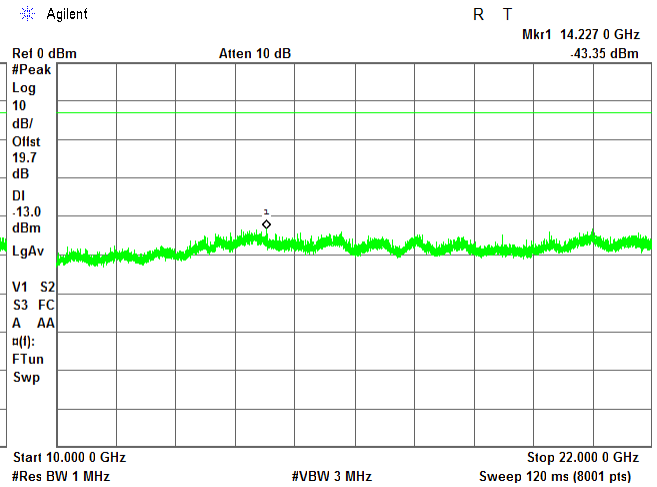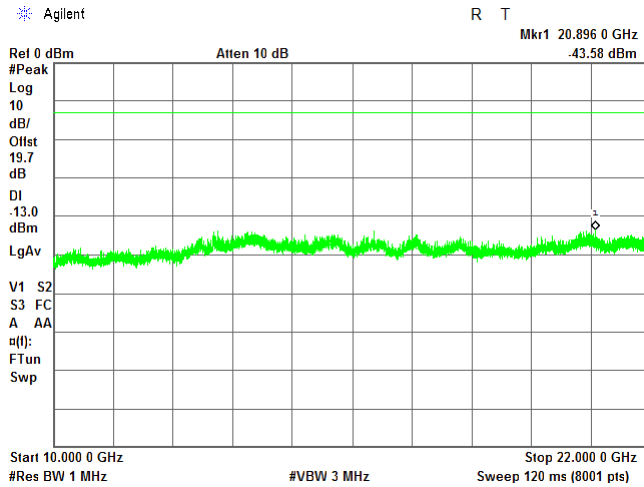

CARRIER FREQUENCY: High

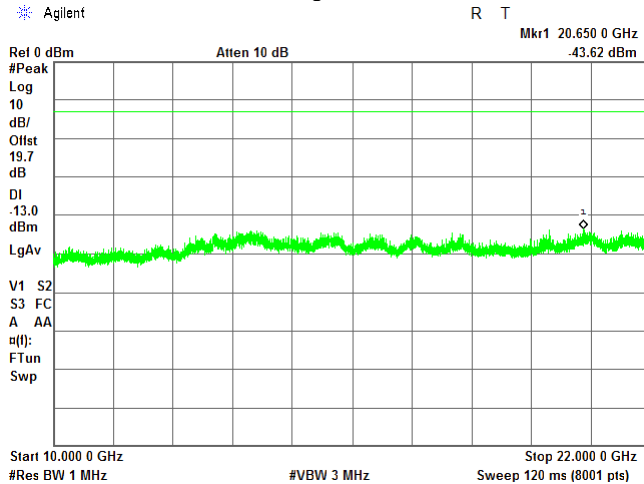

<b>Test specification:</b> Section 27.53, Spurious emissions at RF antenna connector			
<b>Test procedure:</b> 47 CFR, Section 2.1051; KDB 935210 D05 v01r01 section 3.6.3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 27-Sep-16			
<b>Temperature:</b> 28 °C	<b>Relative Humidity:</b> 43 %	<b>Air Pressure:</b> 1012 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			



Plot 7.6.15 Spurious emission measurements in 9 - 150 kHz range at carrier frequency

FREQUENCY RANGE:  
OPERATIONAL MODE:  
CONFIGURATION:


2110 – 2180 MHz  
WCDMA downlink transmit  
Below AGC level

CARRIER FREQUENCY: Low

CARRIER FREQUENCY: Mid

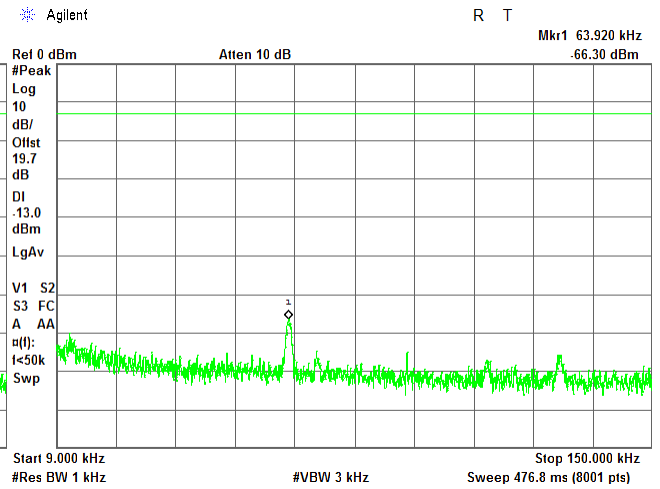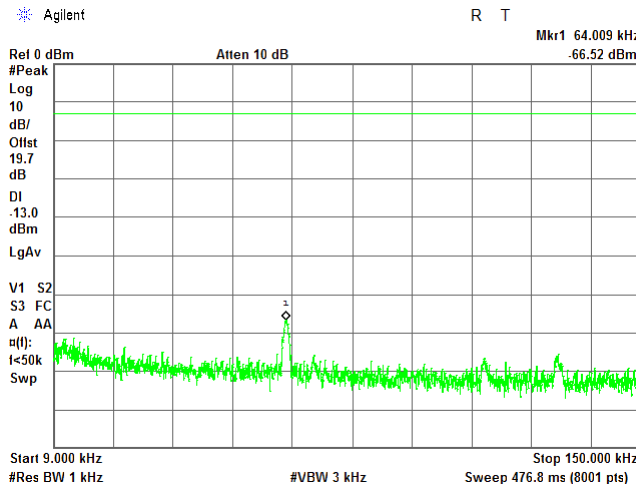

CARRIER FREQUENCY: High

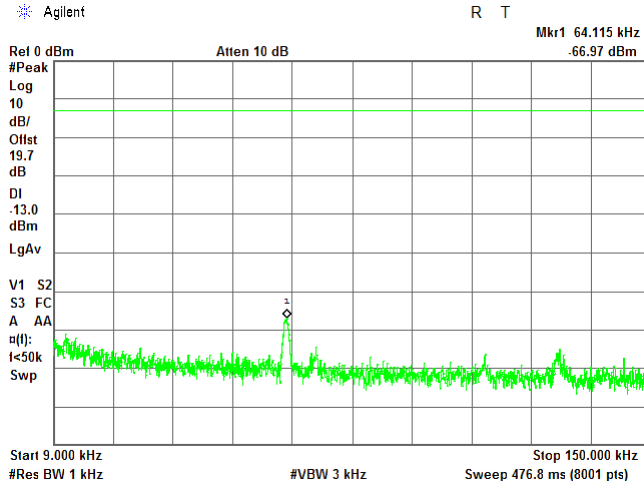



HERMON LABORATORIES

<b>Test specification:</b> Section 27.53, Spurious emissions at RF antenna connector			
<b>Test procedure:</b> 47 CFR, Section 2.1051; KDB 935210 D05 v01r01 section 3.6.3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 27-Sep-16			
<b>Temperature:</b> 28 °C	<b>Relative Humidity:</b> 43 %	<b>Air Pressure:</b> 1012 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			



Plot 7.6.16 Spurious emission measurements in 0.15 - 30.0 MHz range at carrier frequency

FREQUENCY RANGE:  
OPERATIONAL MODE:  
CONFIGURATION:


2110 – 2180 MHz  
WCDMA downlink transmit  
Below AGC level

CARRIER FREQUENCY: Low

CARRIER FREQUENCY: Mid

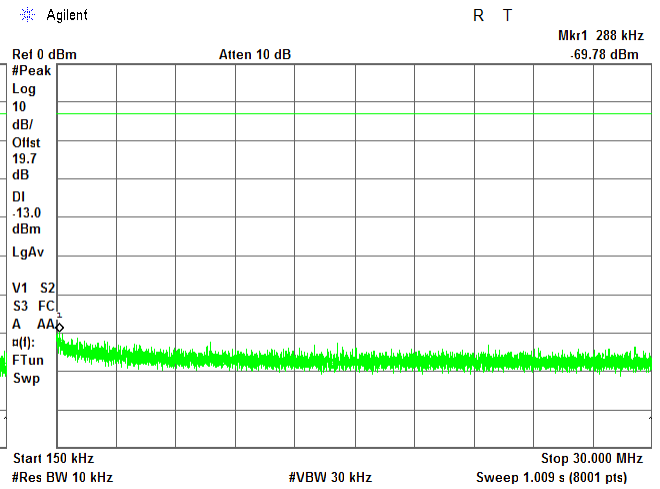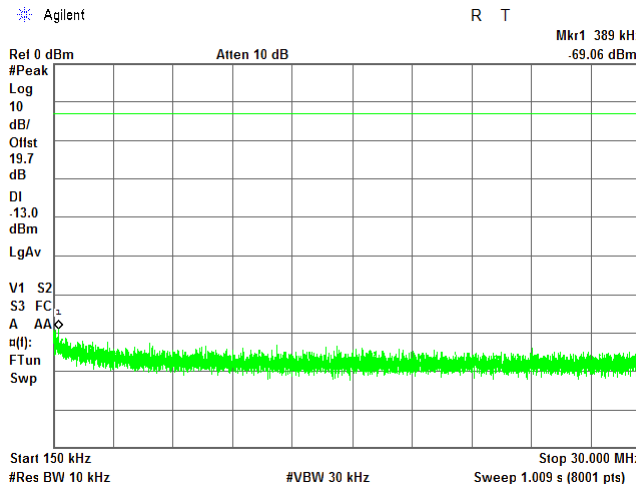

CARRIER FREQUENCY: High

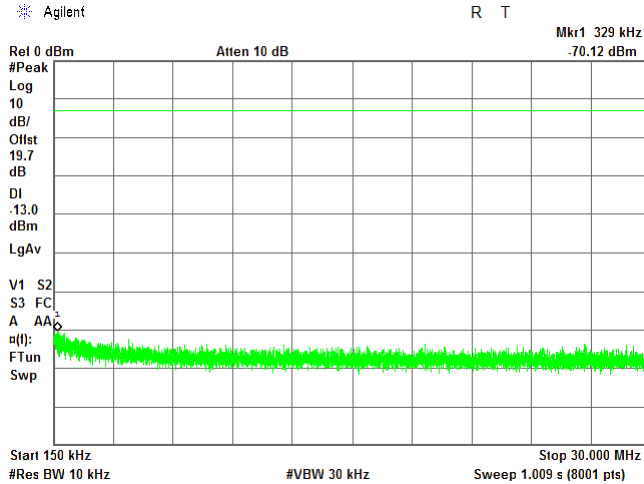




HERMON LABORATORIES

<b>Test specification:</b> Section 27.53, Spurious emissions at RF antenna connector			
<b>Test procedure:</b> 47 CFR, Section 2.1051; KDB 935210 D05 v01r01 section 3.6.3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 27-Sep-16			
<b>Temperature:</b> 28 °C	<b>Relative Humidity:</b> 43 %	<b>Air Pressure:</b> 1012 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			


Plot 7.6.17 Spurious emission measurements in 30.0 - 1000 MHz range at carrier frequency

FREQUENCY RANGE: 2110 – 2180 MHz  
 OPERATIONAL MODE: WCDMA downlink transmit  
 CONFIGURATION: Below AGC level


CARRIER FREQUENCY: Low

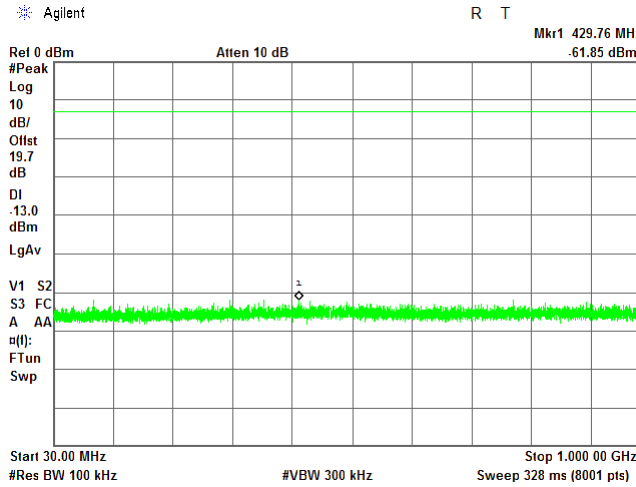

CARRIER FREQUENCY: Mid

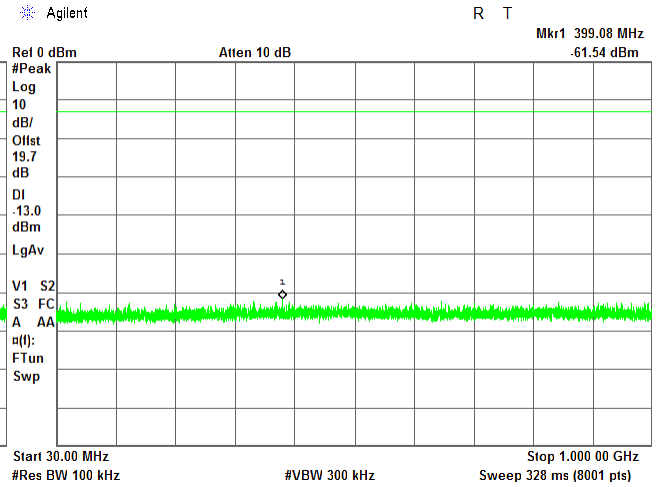

CARRIER FREQUENCY: High

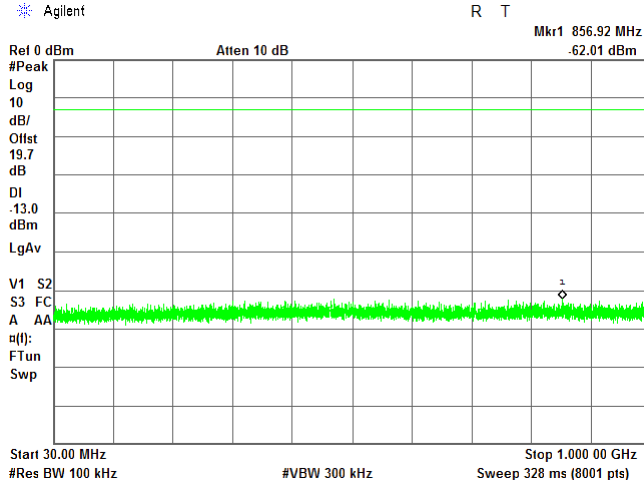


<b>Test specification:</b> Section 27.53, Spurious emissions at RF antenna connector			
<b>Test procedure:</b> 47 CFR, Section 2.1051; KDB 935210 D05 v01r01 section 3.6.3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 27-Sep-16			
<b>Temperature:</b> 28 °C	<b>Relative Humidity:</b> 43 %	<b>Air Pressure:</b> 1012 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			


Plot 7.6.18 Spurious emission measurements in 1000 - 2107 MHz range at carrier frequency

FREQUENCY RANGE: 2110 – 2180 MHz  
 OPERATIONAL MODE: WCDMA downlink transmit  
 CONFIGURATION: Below AGC level


CARRIER FREQUENCY: Low

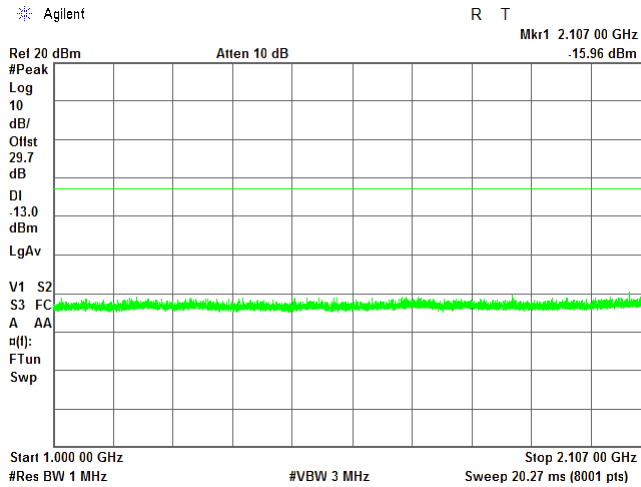

CARRIER FREQUENCY: Mid

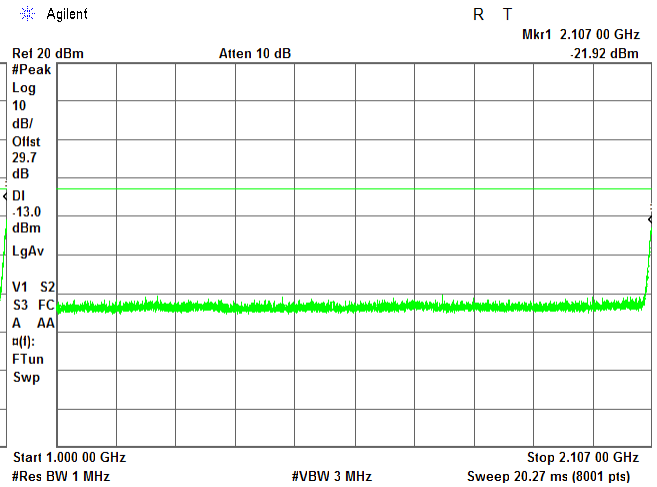

CARRIER FREQUENCY: High

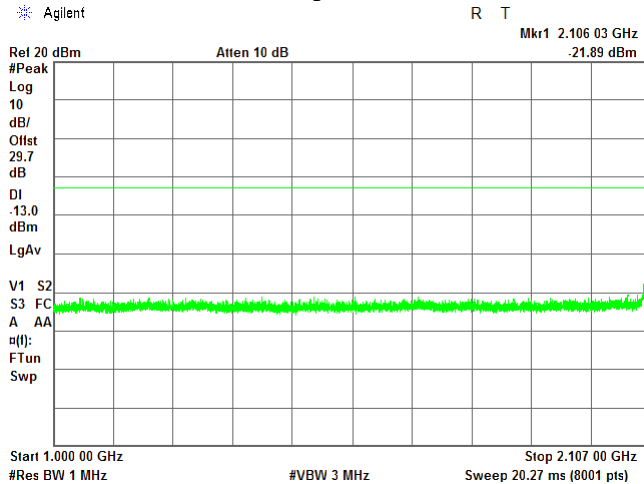





HERMON LABORATORIES

<b>Test specification:</b> Section 27.53, Spurious emissions at RF antenna connector			
<b>Test procedure:</b> 47 CFR, Section 2.1051; KDB 935210 D05 v01r01 section 3.6.3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 27-Sep-16			
<b>Temperature:</b> 28 °C	<b>Relative Humidity:</b> 43 %	<b>Air Pressure:</b> 1012 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			



Plot 7.6.19 Spurious emission measurements in 2183 - 3000 MHz range at carrier frequency

FREQUENCY RANGE:  
OPERATIONAL MODE:  
CONFIGURATION:


2110 – 2180 MHz  
WCDMA downlink transmit  
Below AGC level

CARRIER FREQUENCY: Low

CARRIER FREQUENCY: Mid

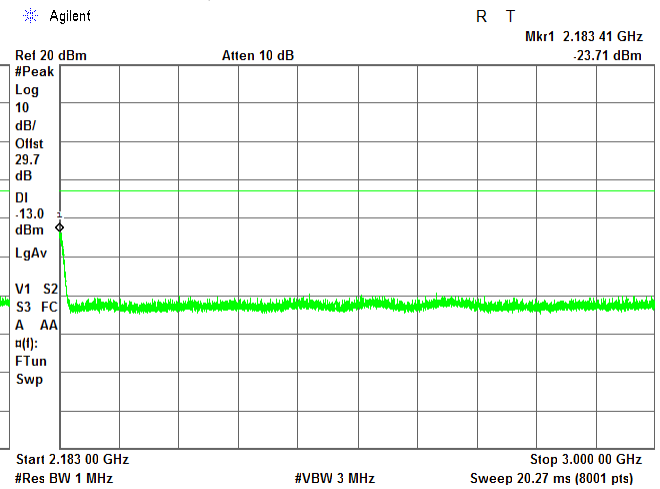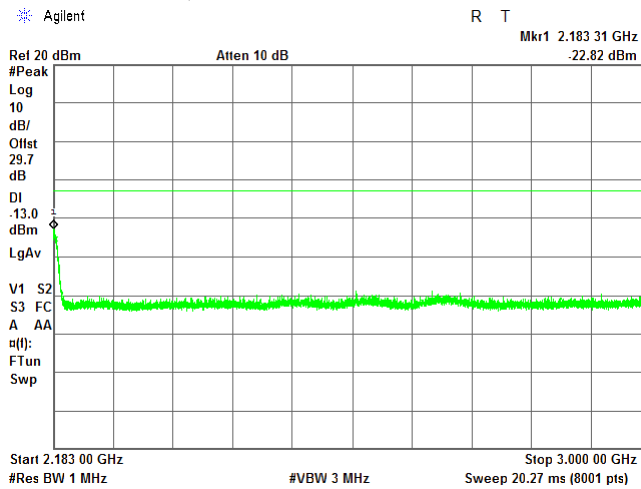

CARRIER FREQUENCY: High

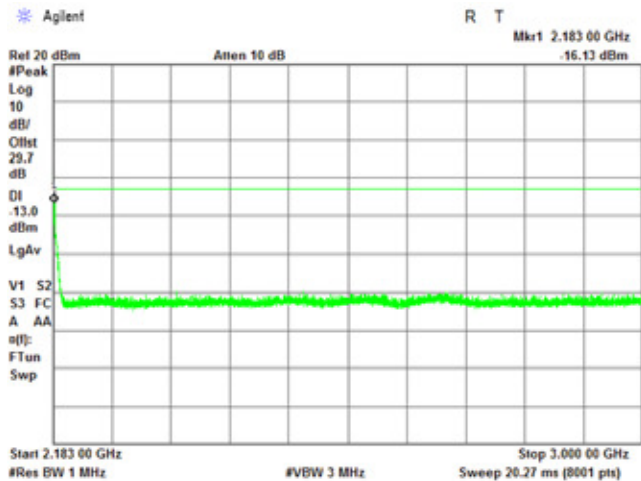


<b>Test specification:</b> Section 27.53, Spurious emissions at RF antenna connector			
<b>Test procedure:</b> 47 CFR, Section 2.1051; KDB 935210 D05 v01r01 section 3.6.3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 27-Sep-16			
<b>Temperature:</b> 28 °C	<b>Relative Humidity:</b> 43 %	<b>Air Pressure:</b> 1012 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			


**Plot 7.6.20 Spurious emission measurements in 3000 - 10000 MHz range at carrier frequency**

FREQUENCY RANGE: 2110 – 2180 MHz  
 OPERATIONAL MODE: WCDMA downlink transmit  
 CONFIGURATION: Below AGC level


CARRIER FREQUENCY: Low

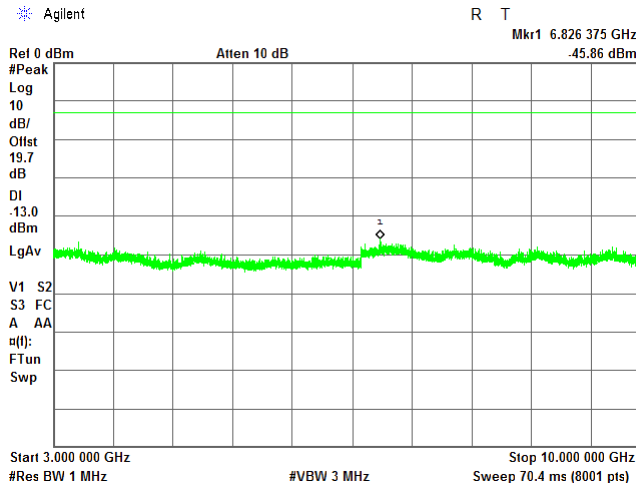

CARRIER FREQUENCY: Mid

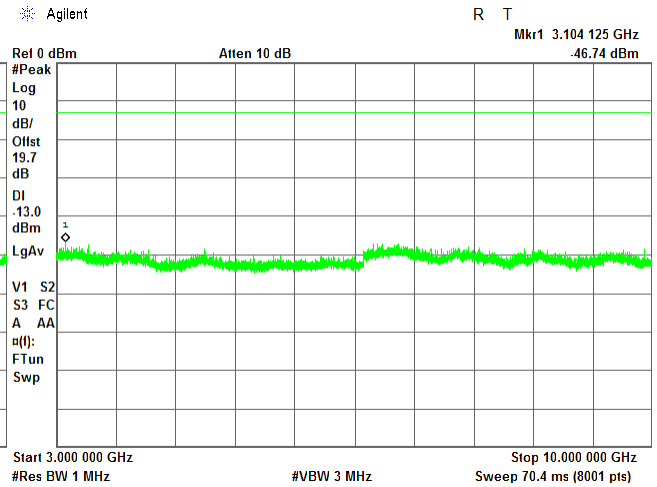

CARRIER FREQUENCY: High

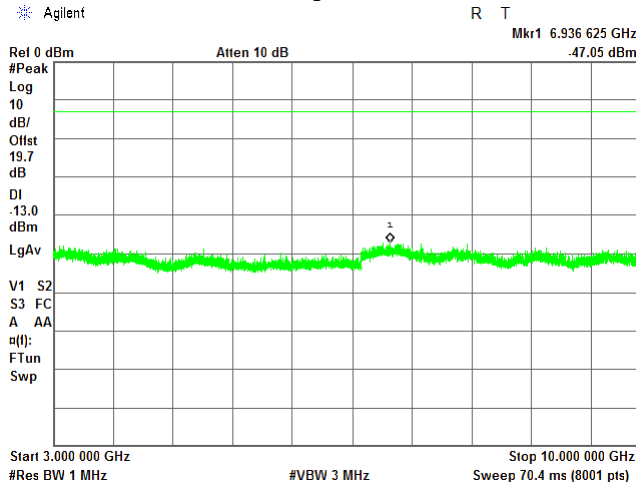

<b>Test specification:</b> Section 27.53, Spurious emissions at RF antenna connector			
<b>Test procedure:</b> 47 CFR, Section 2.1051; KDB 935210 D05 v01r01 section 3.6.3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 27-Sep-16			
<b>Temperature:</b> 28 °C	<b>Relative Humidity:</b> 43 %	<b>Air Pressure:</b> 1012 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			



**Plot 7.6.21 Spurious emission measurements in 10000 - 22000 MHz range at carrier frequency**

FREQUENCY RANGE:  
OPERATIONAL MODE:  
CONFIGURATION:


2110 – 2180 MHz  
WCDMA downlink transmit  
Below AGC level

CARRIER FREQUENCY: Low

CARRIER FREQUENCY: Mid

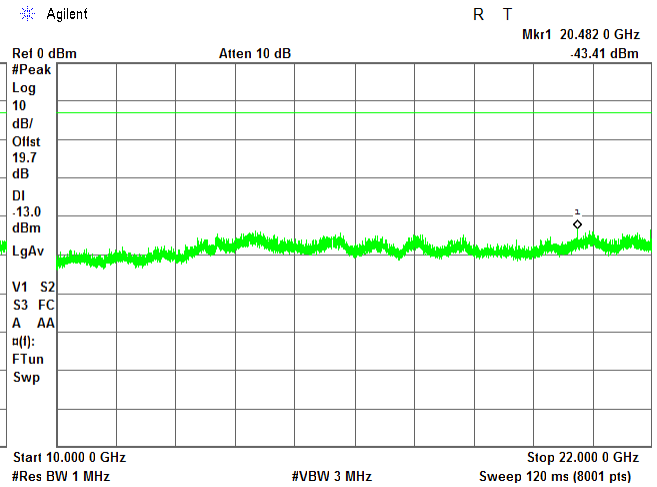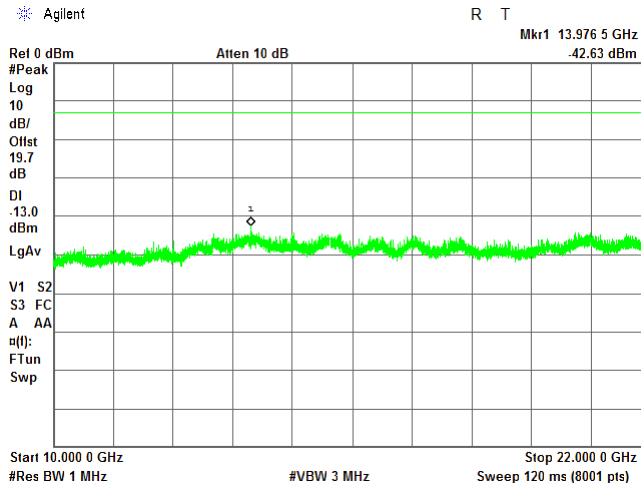

CARRIER FREQUENCY: High

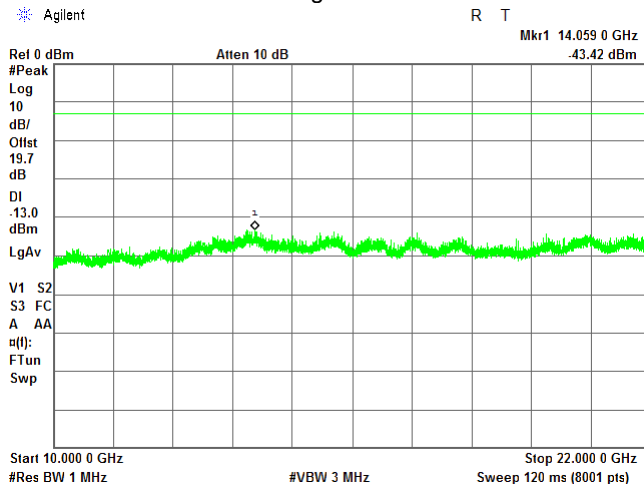

<b>Test specification: Section 27.53, Radiated spurious emissions</b>			
<b>Test procedure:</b> 47 CFR, Section 2.1053; KDB 935210 D05 v01r01 section 3.6.3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 19-Sep-16 - 21-Sep-16			
<b>Temperature:</b> 31 °C	<b>Relative Humidity:</b> 48 %	<b>Air Pressure:</b> 1009 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

## 7.7 Radiated spurious emission measurements

### 7.7.1 General

This test was performed to measure radiated spurious emissions from the EUT. Specification test limits are given in Table 7.7.1.

Table 7.7.1 Radiated spurious emission test limits

Frequency, MHz	Attenuation below carrier, dBc	ERP of spurious, dBm	Equivalent field strength limit @ 3m, dB(μV/m)***
0.009 – 10 <sup>th</sup> harmonic*	43+10logP**	-13	84.4

\* - Excluding the band emission

\*\* - P is transmitter output power in Watts

\*\*\* - Equivalent field strength limit was calculated from maximum allowed ERP of spurious as follows:  $E = \sqrt{30 \times P \times 1.64} / r$ , where P is ERP in Watts, 1.64 is numeric gain of ideal dipole and r is antenna to EUT distance in meters

### 7.7.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

7.7.2.1 The EUT was set up as shown in Figure 7.7.1, energized and the performance check was conducted.

7.7.2.2 The specified frequency range was investigated with antenna connected to spectrum analyzer. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.

7.7.2.3 The worst test results (the lowest margins) were recorded in Table 7.7.2 and shown in the associated plots.

### 7.7.3 Test procedure for spurious emission field strength measurements above 30 MHz

7.7.3.1 The EUT was set up as shown in Figure 7.7.2, energized and the performance check was conducted.

7.7.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer. To find maximum radiation the turntable was rotated 360° and the measuring antenna height was swept from 1 to 4 m in both, vertical and horizontal, polarizations.

7.7.3.3 The worst test results (the lowest margins) were recorded in Table 7.7.2 and shown in the associated plots.

<b>Test specification: Section 27.53, Radiated spurious emissions</b>			
<b>Test procedure:</b> 47 CFR, Section 2.1053; KDB 935210 D05 v01r01 section 3.6.3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 19-Sep-16 - 21-Sep-16			
<b>Temperature:</b> 31 °C	<b>Relative Humidity:</b> 48 %	<b>Air Pressure:</b> 1009 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

Figure 7.7.1 Setup for spurious emission field strength measurements in 9 kHz to 30 MHz band


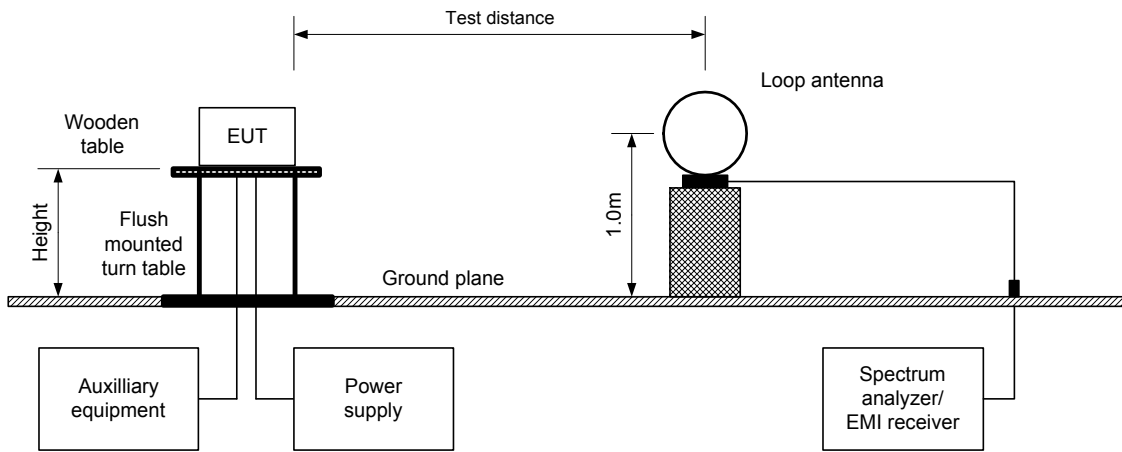


Figure 7.7.2 Setup for spurious emission field strength measurements above 30 MHz



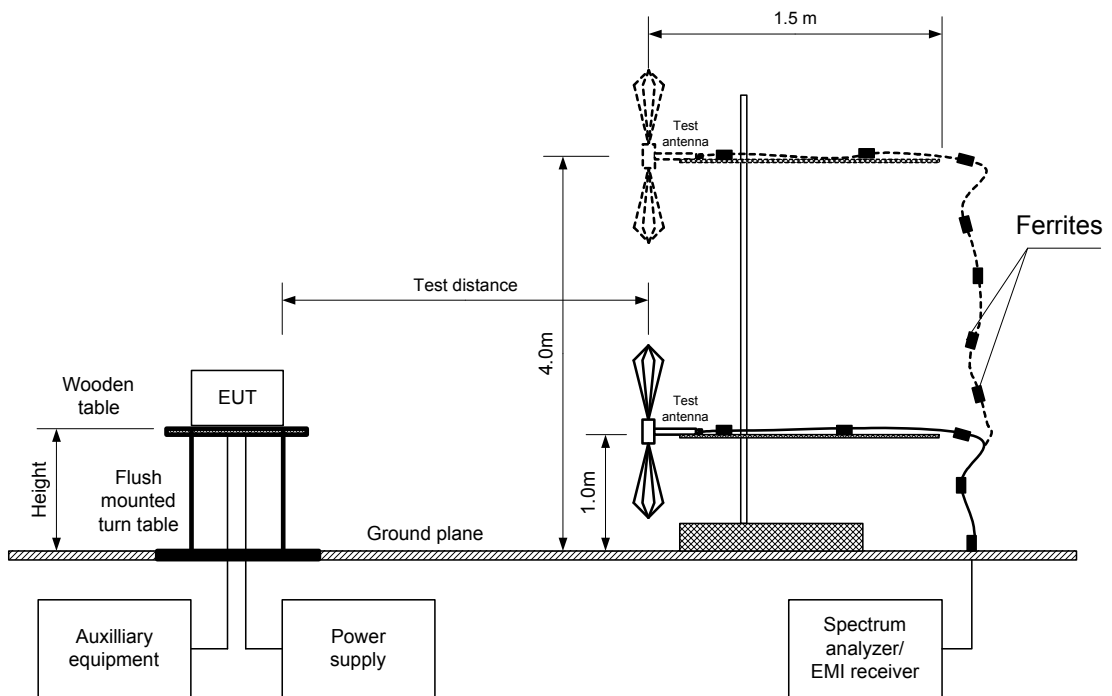

<b>Test specification: Section 27.53, Radiated spurious emissions</b>			
<b>Test procedure:</b> 47 CFR, Section 2.1053; KDB 935210 D05 v01r01 section 3.6.3			
<b>Test mode:</b> Compliance		<b>Verdict: PASS</b>	
<b>Date(s):</b> 19-Sep-16 - 21-Sep-16			
<b>Temperature:</b> 31 °C	<b>Relative Humidity:</b> 48 %	<b>Air Pressure:</b> 1009 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

**Table 7.7.2 Spurious emission field strength test results**

ASSIGNED FREQUENCY RANGE: 2110.0 – 2180 MHz  
 TEST DISTANCE: 3 m  
 TEST SITE: Semi anechoic chamber / OATS  
 EUT HEIGHT: 0.8 m  
 INVESTIGATED FREQUENCY RANGE: 0.009 – 22 000 MHz  
 DETECTOR USED: Peak  
 VIDEO BANDWIDTH: > Resolution bandwidth  
 TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)  
 Biconilog (30 MHz – 1000 MHz)  
 Horn (above 1000 MHz)  
 MODULATION: Unmodulated  
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

Frequency, MHz	Field strength, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*	RBW, kHz	Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
<b>Low carrier frequency</b>								
All emissions are at least 20 dB below carrier								Pass
<b>Mid carrier frequency</b>								
All emissions are at least 20 dB below carrier								Pass
<b>High carrier frequency</b>								
All emissions are 20 at least dB below carrier								Pass

\*- Margin = Field strength of spurious – calculated field strength limit.

\*\* - EUT front panel refers to 0 degrees position of turntable.

**Reference numbers of test equipment used**

HL 0446	HL 0521	HL 0604	HL 2909	HL 4222	HL 4278	HL 4353	HL 4372
HL 4933	HL 4956	HL 5112					

Full description is given in Appendix A.

<b>Test specification: Section 27.53, Radiated spurious emissions</b>			
<b>Test procedure:</b> 47 CFR, Section 2.1053; KDB 935210 D05 v01r01 section 3.6.3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 19-Sep-16 - 21-Sep-16			
<b>Temperature:</b> 31 °C	<b>Relative Humidity:</b> 48 %	<b>Air Pressure:</b> 1009 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			


Plot 7.7.1 Radiated emission measurements in 9 - 150 kHz range

TEST SITE:  
ANTENNA POLARIZATION:  
TEST DISTANCE:  
CARRIER FREQUENCY: Low


Semi anechoic chamber  
Vertical and Horizontal  
3 m  
CARRIER FREQUENCY: Mid



ACTV DET: PEAK  
MEAS DET: PEAK QP AVG  
MKR 9.2 kHz  
77.01 dBµV/m

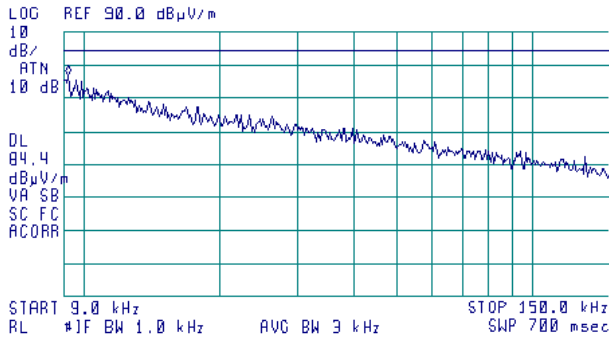


ACTV DET: PEAK  
MEAS DET: PEAK QP AVG  
MKR 10.6 kHz  
75.10 dBµV/m

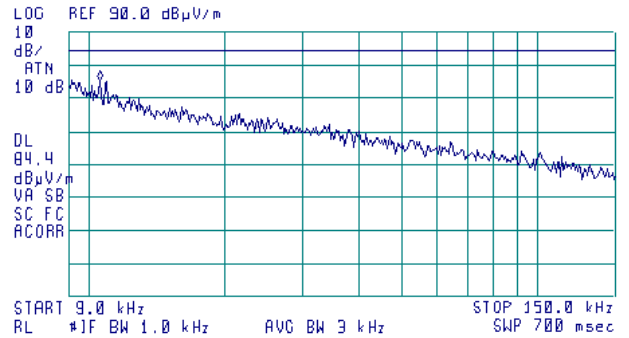

CARRIER FREQUENCY: High



ACTV DET: PEAK  
MEAS DET: PEAK QP AVG  
MKR 9.1 kHz  
75.03 dBµV/m

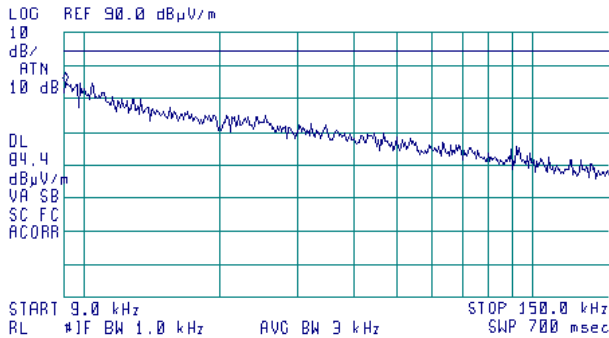

<b>Test specification: Section 27.53, Radiated spurious emissions</b>			
<b>Test procedure:</b> 47 CFR, Section 2.1053; KDB 935210 D05 v01r01 section 3.6.3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 19-Sep-16 - 21-Sep-16			
<b>Temperature:</b> 31 °C	<b>Relative Humidity:</b> 48 %	<b>Air Pressure:</b> 1009 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			


**Plot 7.7.2 Radiated emission measurements in 0.15 - 30 MHz range**

TEST SITE:  
ANTENNA POLARIZATION:  
TEST DISTANCE:  
CARRIER FREQUENCY: Low


Semi anechoic chamber  
Vertical and Horizontal  
3 m  
CARRIER FREQUENCY: Mid



ACTV DET: PEAK  
MEAS DET: PEAK QP AVG  
MKR 150 kHz  
60.01 dBµV/m

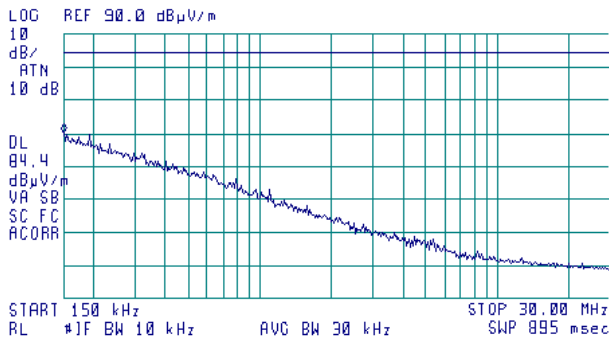


ACTV DET: PEAK  
MEAS DET: PEAK QP AVG  
MKR 160 kHz  
59.89 dBµV/m

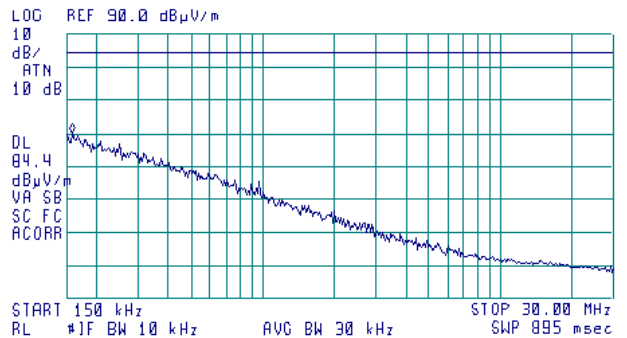

CARRIER FREQUENCY: High



ACTV DET: PEAK  
MEAS DET: PEAK QP AVG  
MKR 170 kHz  
59.57 dBµV/m

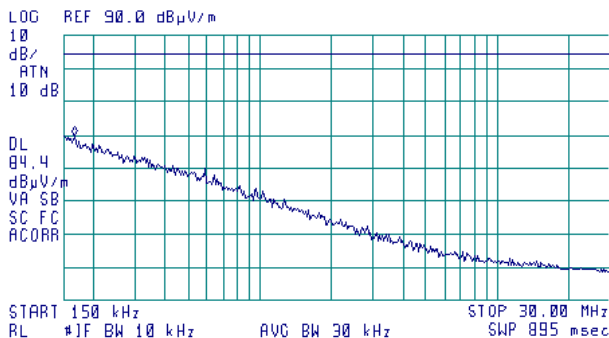





<b>Test specification: Section 27.53, Radiated spurious emissions</b>			
<b>Test procedure:</b> 47 CFR, Section 2.1053; KDB 935210 D05 v01r01 section 3.6.3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 19-Sep-16 - 21-Sep-16			
<b>Temperature:</b> 31 °C	<b>Relative Humidity:</b> 48 %	<b>Air Pressure:</b> 1009 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			


**Plot 7.7.3 Radiated emission measurements in 30 - 1000 MHz range**

TEST SITE:  
ANTENNA POLARIZATION:  
TEST DISTANCE:  
CARRIER FREQUENCY: Low

Semi anechoic chamber  
Vertical and Horizontal  
3 m  
CARRIER FREQUENCY: Mid

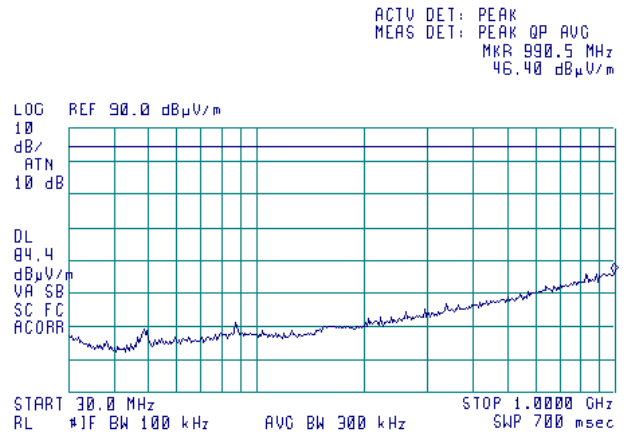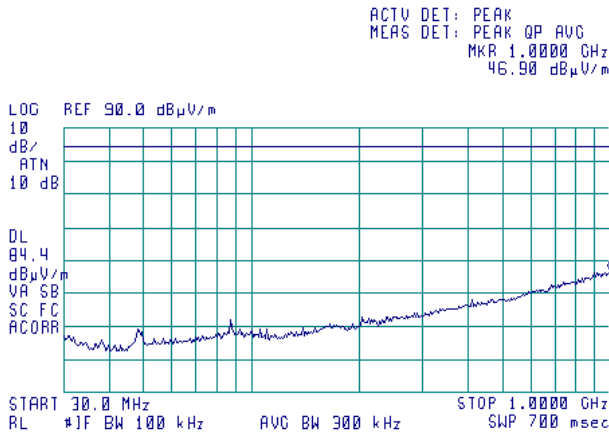

CARRIER FREQUENCY: High


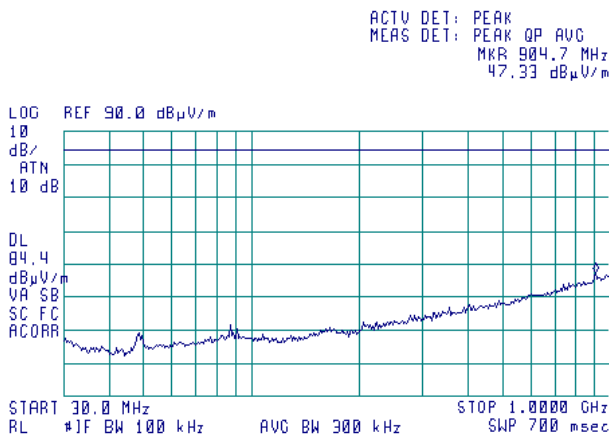


<b>Test specification: Section 27.53, Radiated spurious emissions</b>			
<b>Test procedure:</b> 47 CFR, Section 2.1053; KDB 935210 D05 v01r01 section 3.6.3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 19-Sep-16 - 21-Sep-16			
<b>Temperature:</b> 31 °C	<b>Relative Humidity:</b> 48 %	<b>Air Pressure:</b> 1009 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			


**Plot 7.7.4 Radiated emission measurements in 1000 – 3000 MHz range**

TEST SITE:  
ANTENNA POLARIZATION:  
TEST DISTANCE:  
CARRIER FREQUENCY: Low

Semi anechoic chamber  
Vertical and Horizontal  
3 m  
CARRIER FREQUENCY: Mid

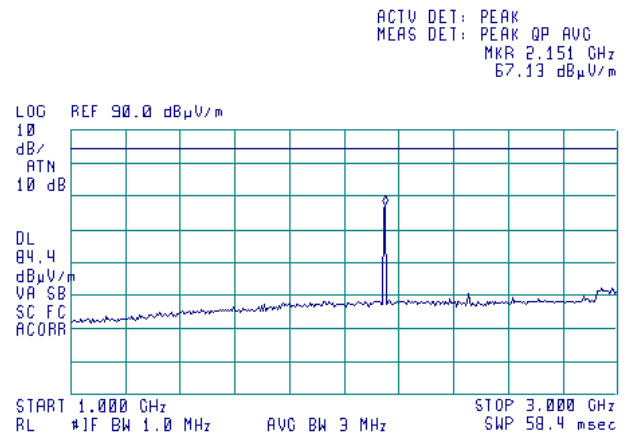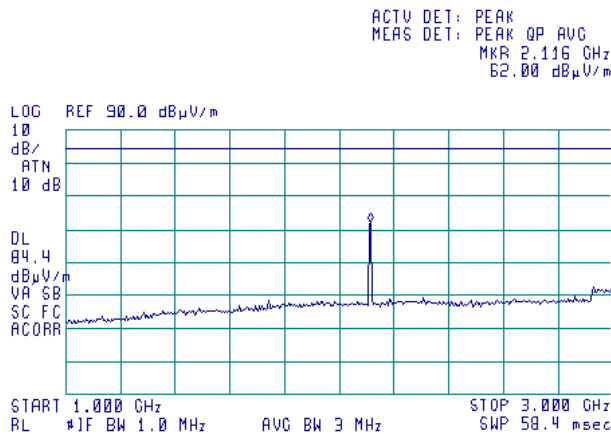

CARRIER FREQUENCY: High

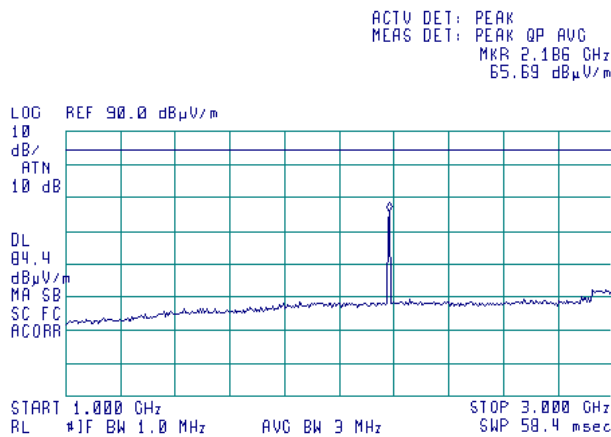



Note: 2116 MHz, 2151 MHz, 2186 MHz are the fundamental frequencies.

<b>Test specification: Section 27.53, Radiated spurious emissions</b>			
<b>Test procedure:</b> 47 CFR, Section 2.1053; KDB 935210 D05 v01r01 section 3.6.3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 19-Sep-16 - 21-Sep-16			
<b>Temperature:</b> 31 °C	<b>Relative Humidity:</b> 48 %	<b>Air Pressure:</b> 1009 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			


**Plot 7.7.5 Radiated emission measurements in 3000 – 6000 MHz range**

TEST SITE:  
ANTENNA POLARIZATION:  
TEST DISTANCE:  
CARRIER FREQUENCY: Low

Semi anechoic chamber  
Vertical and Horizontal  
3 m  
CARRIER FREQUENCY: Mid

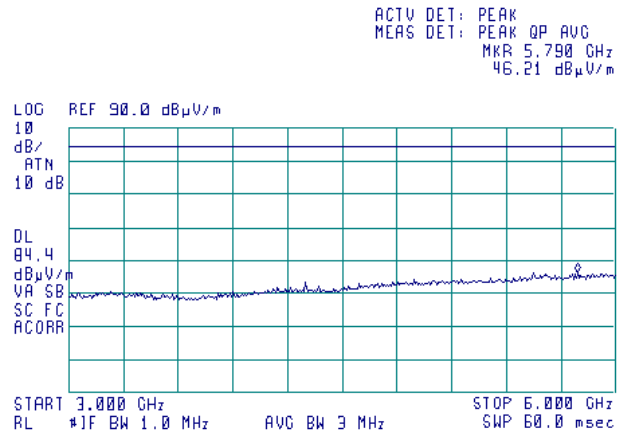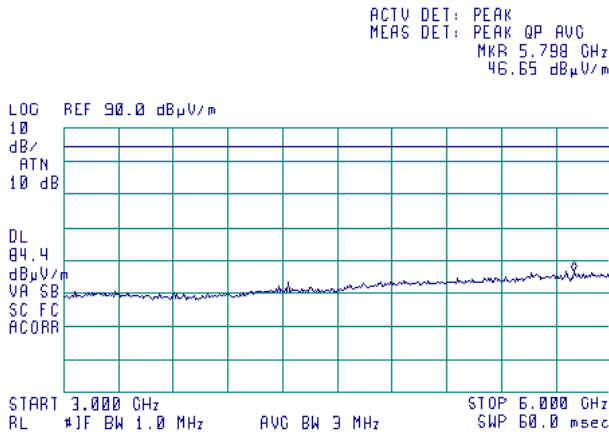

CARRIER FREQUENCY: High


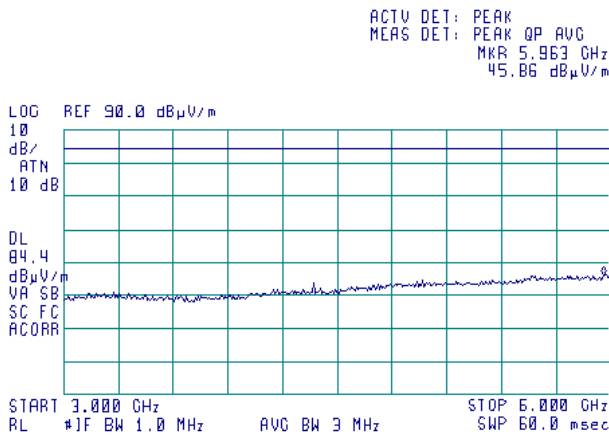


<b>Test specification: Section 27.53, Radiated spurious emissions</b>			
<b>Test procedure:</b> 47 CFR, Section 2.1053; KDB 935210 D05 v01r01 section 3.6.3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 19-Sep-16 - 21-Sep-16			
<b>Temperature:</b> 31 °C	<b>Relative Humidity:</b> 48 %	<b>Air Pressure:</b> 1009 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			


**Plot 7.7.6 Radiated emission measurements in 6000 – 18000 MHz range**

TEST SITE:  
ANTENNA POLARIZATION:  
TEST DISTANCE:  
CARRIER FREQUENCY: Low

Semi anechoic chamber  
Vertical and Horizontal  
3 m  
CARRIER FREQUENCY: Mid

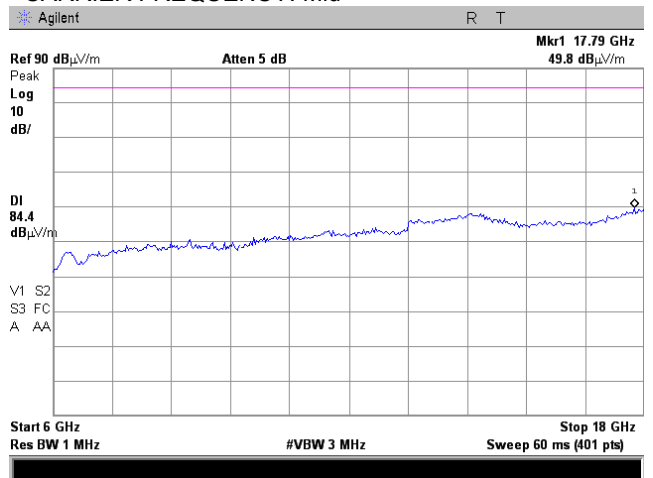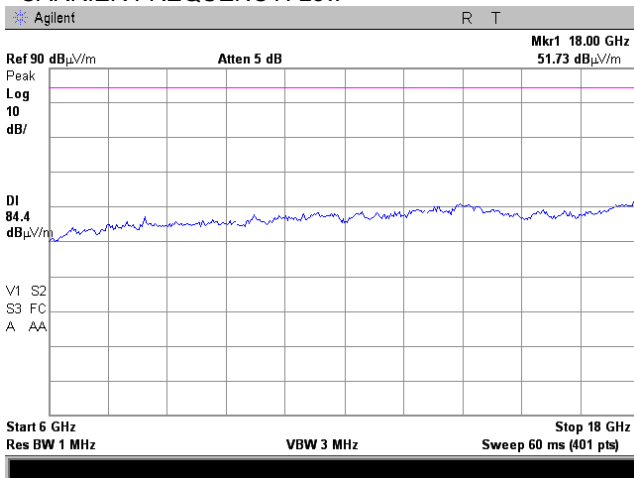

CARRIER FREQUENCY: High


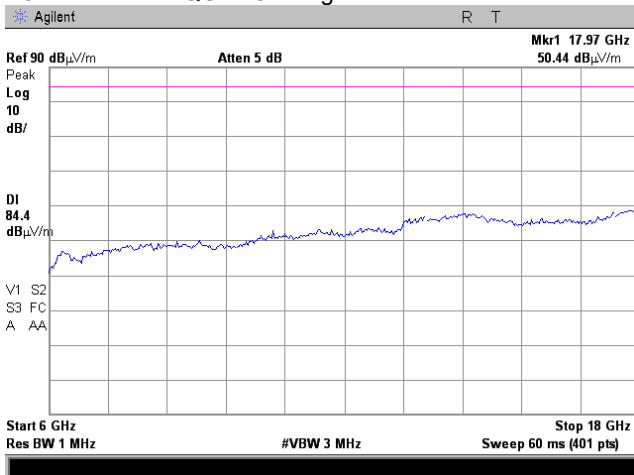


<b>Test specification: Section 27.53, Radiated spurious emissions</b>			
<b>Test procedure:</b> 47 CFR, Section 2.1053; KDB 935210 D05 v01r01 section 3.6.3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 19-Sep-16 - 21-Sep-16			
<b>Temperature:</b> 31 °C	<b>Relative Humidity:</b> 48 %	<b>Air Pressure:</b> 1009 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			


**Plot 7.7.7 Radiated emission measurements in 18000 – 22000 MHz range**

TEST SITE:  
ANTENNA POLARIZATION:  
TEST DISTANCE:  
CARRIER FREQUENCY: Low

Semi anechoic chamber  
Vertical and Horizontal  
3 m  
CARRIER FREQUENCY: Mid

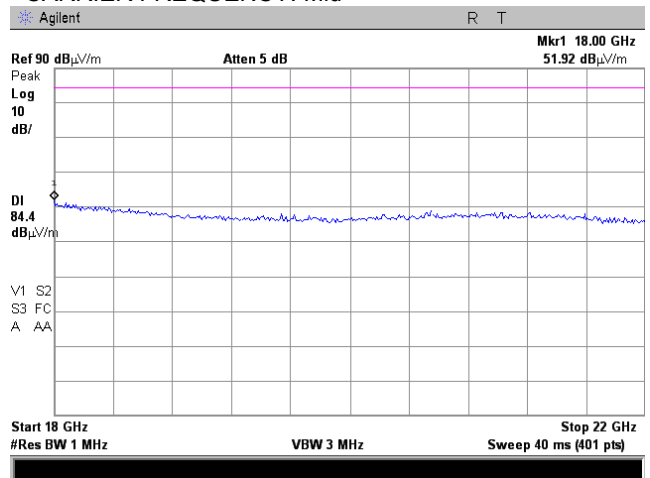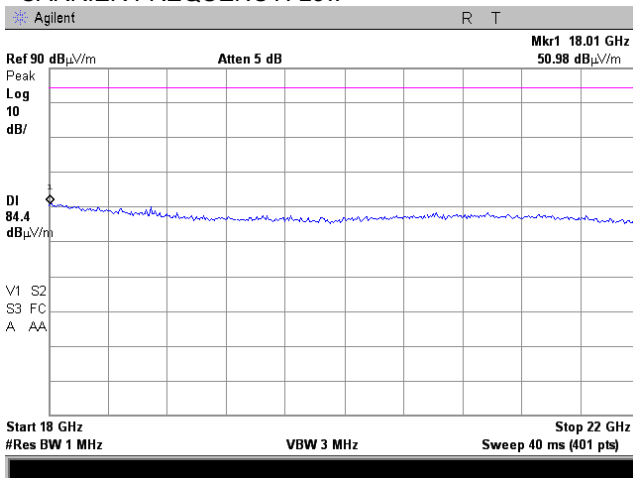

CARRIER FREQUENCY: High


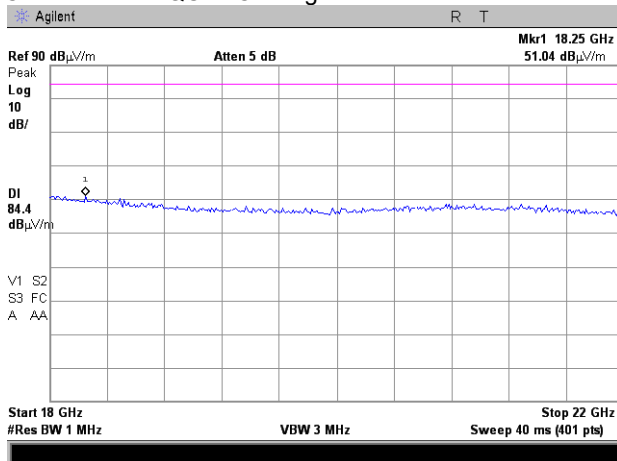


<b>Test specification: Section 27.53, Radiated spurious emissions</b>			
<b>Test procedure:</b> 47 CFR, Section 2.1053; KDB 935210 D05 v01r01 section 3.6.3			
<b>Test mode:</b> Compliance		<b>Verdict:</b> PASS	
<b>Date(s):</b> 19-Sep-16 - 21-Sep-16			
<b>Temperature:</b> 31 °C	<b>Relative Humidity:</b> 48 %	<b>Air Pressure:</b> 1009 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

**Plot 7.7.8 Radiated emission measurements at the 2<sup>nd</sup> harmonic**

TEST SITE:  
CARRIER FREQUENCY:  
TEST DISTANCE:  
ANTENNA POLARIZATION: Vertical



OATS  
Low  
3 m  
ANTENNA POLARIZATION: Horizontal

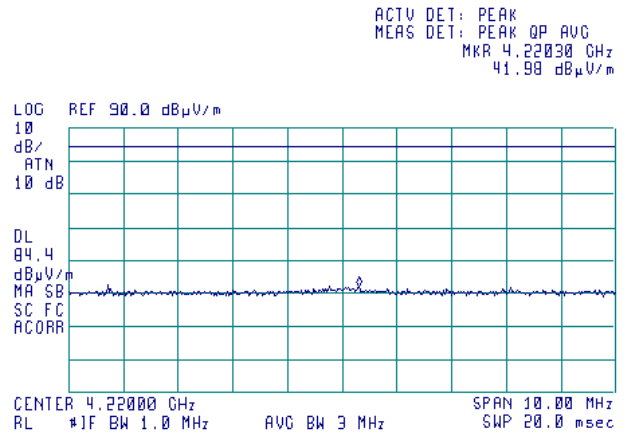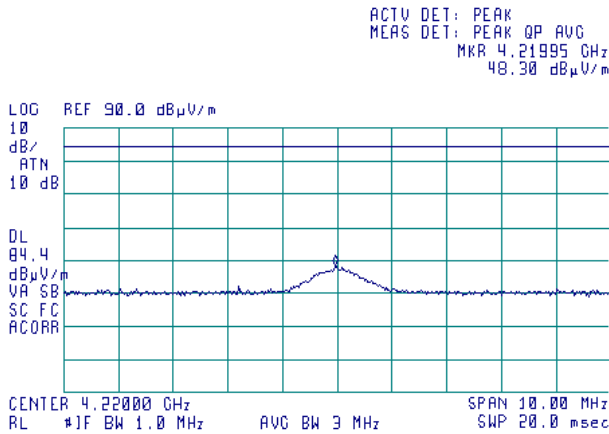

**Plot 7.7.9 Radiated emission measurements at the 2<sup>nd</sup> harmonic**

TEST SITE:  
CARRIER FREQUENCY:  
TEST DISTANCE:  
ANTENNA POLARIZATION: Vertical

OATS  
Mid  
3 m  
ANTENNA POLARIZATION: Horizontal

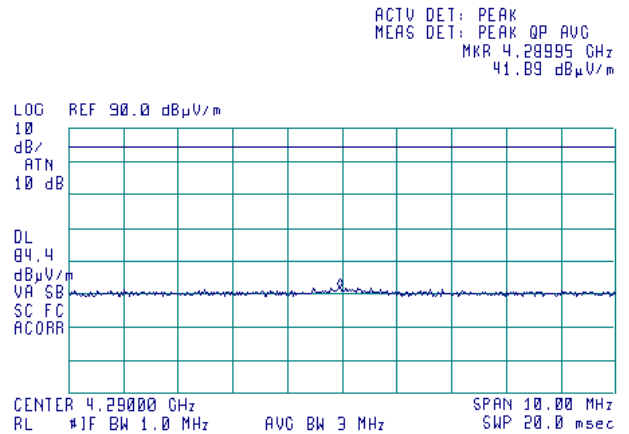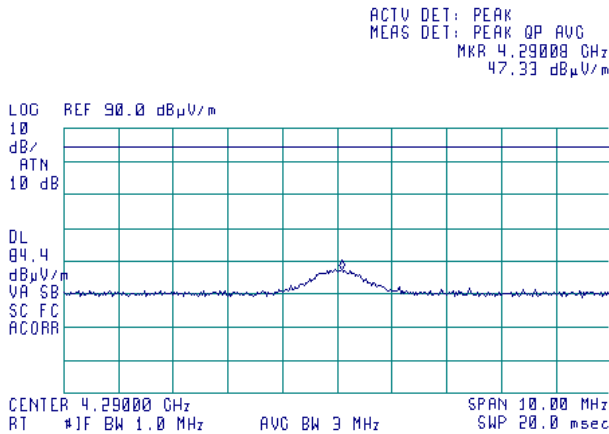





HERMON LABORATORIES

<b>Test specification: Section 27.53, Radiated spurious emissions</b>			
<b>Test procedure:</b> 47 CFR, Section 2.1053; KDB 935210 D05 v01r01 section 3.6.3			
<b>Test mode:</b> Compliance		<b>Verdict: PASS</b>	
<b>Date(s):</b> 19-Sep-16 - 21-Sep-16			
<b>Temperature:</b> 31 °C	<b>Relative Humidity:</b> 48 %	<b>Air Pressure:</b> 1009 hPa	<b>Power:</b> 48 VDC
<b>Remarks:</b>			

**Plot 7.7.10 Radiated emission measurements at the 2<sup>nd</sup> harmonic**

TEST SITE:  
CARRIER FREQUENCY:  
ANTENNA POLARIZATION:  
TEST DISTANCE:  
ANTENNA POLARIZATION: Vertical

OATS  
High  
Vertical  
3 m  
ANTENNA POLARIZATION: Horizontal

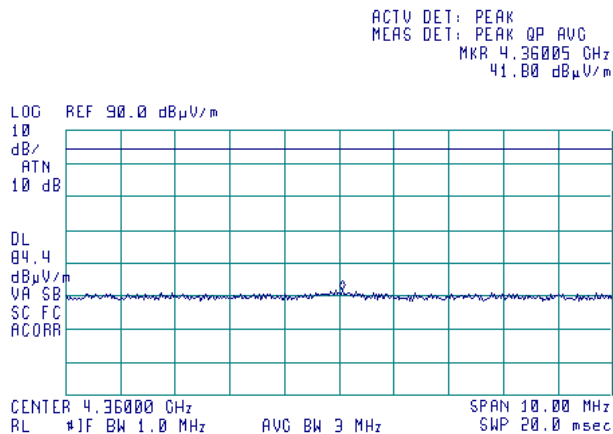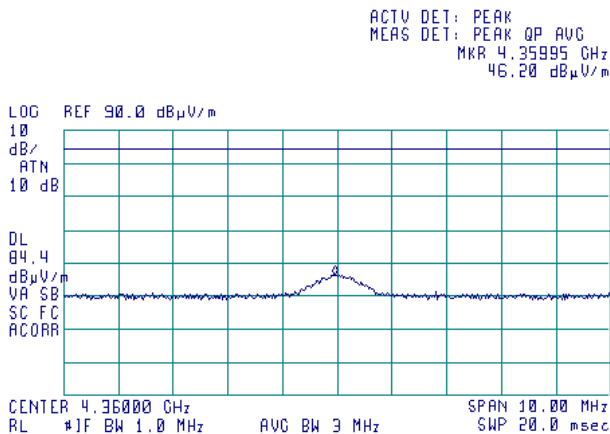

## 8 APPENDIX A Test equipment and ancillaries used for tests

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal./ Check	Due Cal./ Check
0446	Antenna, Loop, Active, 10 kHz - 30 MHz	EMCO	6502	2857	18-Jan-16	18-Jan-17
0521	EMI Receiver (Spectrum Analyzer) with RF filter section 9 kHz-6.5 GHz	Hewlett Packard	8546A	3617A 00319, 3448A002 53	27-Oct-16	27-Oct-17
0604	Antenna BiconiLog Log-Periodic/T Bow-TIE, 26 - 2000 MHz	EMCO	3141	9611-1011	10-May-16	10-May-17
2011	Power Divider, 0.5-18.0 GHz, 80 W	Omni Spectra	2090-6204-00	NA	01-Dec-14	01-Dec-16
2909	Spectrum analyzer, ESA-E, 100 Hz to 26.5 GHz	Agilent Technologies	E4407B	MY414447 62	21-Feb-16	21-Feb-17
3433	Test Cable , DC-18 GHz, 1.5 m, SMA - SMA	Mini-Circuits	CBL-5FT-SMSM+	25679	20-Mar-16	20-Mar-17
3472	Cable, Coax, Microwave, DC-18 GHz, SMA-SMA, 0.6 m	Gore	GORE 65474	1003478	30-May-16	30-May-17
3474	Cable, Coax, Microwave, DC-18 GHz, SMA-SMA, 0.6 m	Gore	GORE 65475	1640102	30-May-16	30-May-17
3767	Attenuator, N-type, 20 dB, DC to 18 GHz, 5 W	Mini-Circuits	BW-N20W5+	NA	25-Aug-16	25-Aug-17
3780	Attenuator, N-type, 10 dB, DC to 18 GHz, 5 W	Mini-Circuits	BW-N10W5+	NA	25-Aug-16	25-Aug-17
3787	Precision Fixed Attenuator, 50 Ohm, 5 W, 10 dB, DC to 18 GHz	Mini-Circuits	BW-S10W5+	NA	01-Dec-15	01-Dec-16
3788	Precision Fixed Attenuator, 50 Ohm, 5 W, 10 dB, DC to 18 GHz	Mini-Circuits	BW-S10W5+	NA	01-Dec-15	01-Dec-16
3901	Microwave Cable Assembly, 40.0 GHz, 3.5 m, SMA/SMA	Huber-Suhner	SUCOFLEX 102A	1225/2A	15-Feb-16	15-Feb-17
4222	High Pass Filter, 50 Ohm, 3150 to 6500 MHz	Mini-Circuits	VHF-2700+	NA	01-Oct-15	01-Oct-17
4278	Test Cable , DC-18 GHz, 4.6 m, N/M - N/M	Mini-Circuits	APC-15FT-NMNM+	0755A	26-Sep-16	26-Sep-17
4353	Low Loss Armored Test Cable, DC - 18 GHz, 6.2 m, N type-M/N type-M	MegaPhase	NC29-N1N1-244	12025101 003	15-Mar-16	15-Mar-17
4354	Vector Signal Generator, 100 kHz to 6.0 GHz	Rohde & Schwarz	SMJ 100A	1403.4507 K02- 101777-rc	27-Jun-14	27-Jun-17
4372	High Pass Filter, 50 Ohm, 8.0 to 18.0 GHz, SMA-FM / SMA-FM	Tiger Micro-Electronics Institute	TGF-A2118-001	r- JSFG308-001	08-May-16	08-May-17
4933	Active Horn Antenna, 1 GHz to 18 GHz	Com-Power Corporation	AHA-118	701046	14-Oct-16	14-Oct-17
4956	Active horn antenna, 18 to 40 GHz	Com-Power Corporation	AHA-840	105004	09-Nov-15	09-Nov-16



HL No	Description	Manufacturer	Model	Ser. No.	Last Cal./ Check	Due Cal./ Check
5112	RF cable, 40 GHz, 5.5 m, K-type	Huber-Suhner	SF102EA/ 11SK/11S K/5500M M	502494/2E A	26-Jul-16	26-Jul-17

### 8.1 Test equipment and ancillaries used for tests

HL No.	Description	Manufacturer	Model	Ser. No.	Last Cal./ Check	Due Cal./ Check
NA	EXG Vector Signal Generator	Agilent	N5172B	MY51350585	21-Jul-16	21-Jul-17

## 9 APPENDIX B Measurement uncertainties

### Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
<b>Transmitter tests</b>	
Carrier power conducted at antenna connector	± 1.7 dB
Carrier power radiated (substitution method)	± 4.5 dB
Occupied bandwidth	±8%
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: ± 2.6 dB 2.9 GHz to 6.46 GHz: ± 3.5 dB 6.46 GHz to 13.2 GHz: ± 4.3 dB 13.2 GHz to 22.0 GHz: ± 5.0 dB 22.0 GHz to 26.8 GHz: ± 5.5 dB 26.8 GHz to 40.0 GHz: ± 4.8 dB
Spurious emissions radiated 30 MHz – 40 GHz (substitution method)	± 4.5 dB
Frequency error	30 – 300 MHz: ± 50.5 Hz (1.68 ppm) 300 – 1000 MHz: ± 168 Hz (0.56 ppm)
Transient frequency behaviour	187 Hz ± 13.9 %
Duty cycle, timing (Tx ON / OFF) and average factor measurements	± 1.0 %

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.

## 10 APPENDIX C Test facility description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, safety, environmental and telecommunication testing facility.

Hermon Laboratories is recognized and accredited by the Federal Communications Commission (USA) for 1, 2, 15, 18 parts of Code of Federal Regulations 47 (CFR 47), Test Firm Registration Number is 927748, Designation Number is IL1001; registered by Industry Canada for electromagnetic emissions, file number IC 2186A-1 for OATS, certified by VCCI, Japan (the registration numbers are R-808 for OATS, R-1082 for anechoic chamber, G-869 for RE measurements above 1 GHz, C-845 for conducted emissions site, T-1606 for conducted emissions at telecommunication ports). The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing and environmental simulation (for exact scope please refer to Certificate No. 839.01).

Address: P.O. Box 23, Binyamina 30500, Israel.  
Telephone: +972 4628 8001  
Fax: +972 4628 8277  
e-mail: mail@hermonlabs.com  
website: www.hermonlabs.com

Person for contact: Mr. Alex Usoskin, CEO.

## 11 APPENDIX D Specification references

47CFR part 27: 2015	Private land mobile radio services
47CFR part 1: 2015	Practice and procedure
47CFR part 2: 2015	Frequency allocations and radio treaty matters; general rules and regulations
ANSI C63.2: 1996	American National Standard for Instrumentation-Electromagnetic Noise and Field Strength, 10 kHz to 40 GHz-Specifications.
ANSI/TIA/EIA-603-D:2010	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
KDB 935210 D05 v01r01:12.02.2016	Measurements Guidance for Industrial and Non-consumer Signal Booster, Repeater and Amplifier Devices

## 12 APPENDIX E Test equipment correction factors

Antenna factor  
 Active loop antenna  
 Model 6502, S/N 2857, HL 0446

Frequency, MHz	Magnetic antenna factor, dB	Electric antenna factor, dB
0.009	-32.8	18.7
0.010	-33.8	17.7
0.020	-38.3	13.2
0.050	-41.1	10.4
0.075	-41.3	10.2
0.100	-41.6	9.9
0.150	-41.7	9.8
0.250	-41.6	9.9
0.500	-41.8	9.8
0.750	-41.9	9.7
1.000	-41.4	10.1
2.000	-41.5	10.0
3.000	-41.4	10.2
4.000	-41.4	10.1
5.000	-41.5	10.1
10.000	-41.9	9.6
15.000	-41.9	9.6
20.000	-42.2	9.3
25.000	-42.8	8.7
30.000	-44.0	7.5

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB( $\mu$ V) to convert it into field strength in dB( $\mu$ V/m).

**Antenna factor**  
**Biconilog antenna EMCO Model 3141**  
**Ser.No.1011, HL 0604**

Frequency, MHz	Antenna factor, dB(1/m)	Frequency, MHz	Antenna factor, dB(1/m)	Frequency, MHz	Antenna factor, dB(1/m)
26	7.8	580	20.6	1320	27.8
28	7.8	600	21.3	1340	28.3
30	7.8	620	21.5	1360	28.2
40	7.2	640	21.2	1380	27.9
60	7.1	660	21.4	1400	27.9
70	8.5	680	21.9	1420	27.9
80	9.4	700	22.2	1440	27.8
90	9.8	720	22.2	1460	27.8
100	9.7	740	22.1	1480	28.0
110	9.3	760	22.3	1500	28.5
120	8.8	780	22.6	1520	28.9
130	8.7	800	22.7	1540	29.6
140	9.2	820	22.9	1560	29.8
150	9.8	840	23.1	1580	29.6
160	10.2	860	23.4	1600	29.5
170	10.4	880	23.8	1620	29.3
180	10.4	900	24.1	1640	29.2
190	10.3	920	24.1	1660	29.4
200	10.6	940	24.0	1680	29.6
220	11.6	960	24.1	1700	29.8
240	12.4	980	24.5	1720	30.3
260	12.8	1000	24.9	1740	30.8
280	13.7	1020	25.0	1760	31.1
300	14.7	1040	25.2	1780	31.0
320	15.2	1060	25.4	1800	30.9
340	15.4	1080	25.6	1820	30.7
360	16.1	1100	25.7	1840	30.6
380	16.4	1120	26.0	1860	30.6
400	16.6	1140	26.4	1880	30.6
420	16.7	1160	27.0	1900	30.6
440	17.0	1180	27.0	1920	30.7
460	17.7	1200	26.7	1940	30.9
480	18.1	1220	26.5	1960	31.2
500	18.5	1240	26.5	1980	31.6
520	19.1	1260	26.5	2000	32.0
540	19.5	1280	26.6		
560	19.8	1300	27.0		

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB( $\mu$ V) to convert it into field strength in dB( $\mu$ V/m).



Antenna factor, HL 4933



### Active Horn Antenna Factor Calibration

1 GHz to 18 GHz

<b>Equipment:</b>			<b>ACTIVE HORN ANTENNA</b>		
<b>Model:</b>			AHA-118		
<b>Serial Number:</b>			701046		
<b>Calibration Distance:</b>			3 Meter		
<b>Polarization:</b>			Horizontal		
<b>Calibration Date:</b>			11/12/2014		
Frequency (GHz)	Preamplifier Gain (dB)	Antenna Factor with pre-amp (dB/m)	Frequency (GHz)	Preamplifier Gain (dB)	Antenna Factor with pre-amp (dB/m)
1	40.96	-16.47	10	40.94	-1.97
1.5	41.21	-14.53	10.5	40.63	-1.06
2	41.44	-13.30	11	40.74	-1.50
2.5	41.71	-12.87	11.5	40.65	-0.52
3	41.96	-12.26	12	40.76	-0.15
3.5	42.14	-11.77	12.5	41.03	-0.85
4	42.13	-10.91	13	41.37	-0.81
4.5	41.79	-9.41	13.5	41.18	0.05
5	41.44	-7.54	14	40.98	0.36
5.5	40.91	-6.47	14.5	40.81	1.26
6	40.69	-5.48	15	40.65	0.25
6.5	40.64	-5.53	15.5	40.93	-1.05
7	40.76	-4.12	16	41.31	-1.44
7.5	40.94	-3.12	16.5	40.96	-0.80
8	40.68	-1.69	17	40.64	-0.02
8.5	40.08	-1.71	17.5	40.57	1.81
9	40.41	-1.86	18	40.08	3.63
9.5	41.21	-2.73			
Calibration according to ARP 958					
<b>Antenna Factor to be added to receiver reading:</b>					
Meter Reading (dBuV) + Antenna Factor (dB/m) = Corrected Reading (dBuV/m)					



Antenna factor, HL 4956



### Active Horn Antenna Calibration

18 GHz to 40 GHz

<b>Equipment:</b>			<b>ACTIVE HORN ANTENNA</b>		
<b>Model:</b>			<b>AHA-840</b>		
<b>Serial Number:</b>			<b>105004</b>		
<b>Calibration Distance:</b>			<b>3 meter</b>		
<b>Polarization:</b>			<b>Horizontal</b>		
<b>Calibration Date:</b>			<b>1/26/2015</b>		
Frequency (GHz)	Preamplifier Gain (dB)	Antenna Factor with pre-amp (dB/m)	Frequency (GHz)	Preamplifier Gain (dB)	Antenna Factor with pre-amp (dB/m)
18	38.83	-1.06	29.5	42.47	-5.33
18.5	39.34	-2.65	30	41.91	-4.86
19	39.71	-3.88	30.5	41.60	-4.64
19.5	39.87	-4.35	31	41.52	-4.60
20	39.98	-3.97	31.5	41.56	-4.79
20.5	40.42	-3.68	32	41.80	-5.21
21	41.12	-4.06	32.5	42.29	-5.54
21.5	41.74	-5.46	33	42.79	-5.63
22	42.14	-6.22	33.5	42.88	-5.38
22.5	42.35	-6.42	34	42.62	-4.76
23	42.50	-6.59	34.5	42.63	-4.84
23.5	42.65	-6.82	35	43.15	-5.13
24	42.81	-7.01	35.5	43.91	-5.83
24.5	42.86	-7.37	36	44.59	-6.39
25	42.73	-7.53	36.5	45.04	-6.64
25.5	42.77	-7.45	37	45.08	-6.40
26	42.85	-7.21	37.5	44.82	-5.75
26.5	42.98	-7.17	38	44.16	-4.58
27	43.14	-7.22	38.5	42.90	-2.66
27.5	43.18	-7.32	39	42.39	-1.71
28	43.04	-7.10	39.5	43.76	-2.49
28.5	43.01	-6.73	40	45.98	-5.21

Calibration per ANSI C63.5: 2006  
Standard Site Method, Equations 1-6 (3-antenna)

Corrected Reading (dBµV/m) = Meter Reading (dBµV) + AFE(dB/m)



**Cable loss**  
**Test Cable, Mini-Circuits, CBL-5FT-SMSM+, SMA-SMA, 18 GHz, 1.5 m, S/N 25679**  
**Mini-Circuits, HL 3433**

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10.0	0.06	9000	2.01
100	0.17	9500	2.06
500	0.41	10000	2.05
1000	0.58	10500	2.18
1500	0.72	11000	2.26
2000	0.86	11500	2.28
2500	0.96	12000	2.43
3000	1.04	12500	2.53
3500	1.13	13000	2.52
4000	1.23	13500	2.56
4500	1.31	14000	2.60
5000	1.41	14500	2.59
5500	1.49	15000	2.67
6000	1.55	15500	2.76
6500	1.63	16000	2.86
7000	1.71	16500	2.91
7500	1.78	17000	2.95
8000	1.86	17500	3.02
8500	1.92	18000	3.07





**Cable loss**  
**Cable coaxial, Microwave, SMA-SMA, 18 GHz, 1.0 m**  
**Gore, HL 3472**

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.01	5000	0.47	10200	0.72	15500	0.75
30	0.03	5100	0.47	10300	0.67	15600	0.89
50	0.04	5200	0.47	10400	0.77	15700	0.82
100	0.04	5300	0.47	10500	0.67	15800	0.89
200	0.08	5400	0.49	10600	0.74	15900	0.89
300	0.11	5500	0.48	10700	0.81	16000	0.93
400	0.11	5600	0.49	10800	0.77	16100	0.90
500	0.12	5700	0.49	10900	0.82	16200	0.92
600	0.14	5800	0.51	11000	0.86	16300	0.90
700	0.15	5900	0.50	11100	0.78	16400	0.94
800	0.16	6000	0.51	11200	0.82	16500	0.93
900	0.18	6100	0.53	11300	0.77	16600	0.95
1000	0.17	6200	0.52	11400	0.84	16700	0.98
1100	0.19	6300	0.53	11500	0.74	16800	1.00
1200	0.22	6400	0.54	11600	0.81	16900	0.94
1300	0.21	6500	0.55	11700	0.73	17000	1.00
1400	0.22	6600	0.54	11800	0.75	17100	0.93
1500	0.23	6700	0.57	11900	0.73	17200	1.00
1600	0.24	6800	0.54	12000	0.75	17300	0.93
1700	0.24	6900	0.58	12100	0.66	17400	0.93
1800	0.25	7000	0.58	12200	0.66	17500	0.96
1900	0.26	7100	0.58	12300	0.72	17600	0.94
2000	0.28	7200	0.61	12400	0.64	17700	0.99
2100	0.27	7300	0.59	12500	0.75	17800	0.97
2200	0.29	7400	0.55	12600	0.67	17900	0.90
2300	0.29	7500	0.63	12700	0.75	18000	0.78
2400	0.30	7600	0.60	12800	0.66		
2500	0.30	7700	0.61	12900	0.81		
2600	0.32	7800	0.64	13000	0.75		
2700	0.32	7900	0.60	13100	0.80		
2800	0.33	8000	0.58	13200	0.80		
2900	0.34	8100	0.61	13300	0.81		
3000	0.34	8200	0.62	13400	0.88		
3100	0.35	8300	0.62	13500	0.82		
3200	0.35	8400	0.68	13600	1.00		
3300	0.36	8500	0.63	13700	0.93		
3400	0.37	8600	0.61	13800	0.86		
3500	0.38	8700	0.63	13900	0.84		
3600	0.38	8800	0.62	14000	1.00		
3700	0.40	8900	0.64	14100	0.86		
3800	0.40	9000	0.62	14200	0.98		
3900	0.40	9100	0.64	14300	0.99		
4000	0.40	9200	0.62	14400	0.82		
4100	0.43	9300	0.62	14600	0.89		
4200	0.43	9400	0.62	14700	0.84		
4300	0.43	9500	0.63	14800	0.90		
4400	0.44	9600	0.64	14900	0.89		
4500	0.45	9700	0.60	15000	0.89		
4600	0.45	9800	0.65	15100	0.86		
4700	0.46	9900	0.60	15200	0.87		
4800	0.46	10000	0.67	15300	0.86		
4900	0.46	10100	0.69	15400	0.87		



**Cable loss**  
**Cable coaxial, Microwave, SMA-SMA, 18 GHz, 0.6 m**  
**Gore, HL 3474**

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.00	4800	0.43	9800	0.63	14900	0.89
30	0.02	4900	0.44	9900	0.58	15000	0.96
50	0.03	5000	0.44	10000	0.67	15100	0.90
100	0.03	5100	0.44	10100	0.69	15200	0.96
200	0.07	5200	0.44	10200	0.72	15300	0.90
300	0.10	5300	0.44	10300	0.68	15400	0.95
400	0.11	5400	0.46	10400	0.75	15500	0.84
500	0.12	5500	0.45	10500	0.64	15600	0.95
600	0.14	5600	0.46	10600	0.75	15700	0.82
700	0.14	5700	0.47	10700	0.80	15800	0.94
800	0.15	5800	0.48	10800	0.77	15900	0.91
900	0.18	5900	0.48	10900	0.80	16000	0.91
1000	0.17	6000	0.49	11000	0.79	16100	0.86
1100	0.18	6100	0.51	11100	0.70	16200	0.86
1200	0.21	6200	0.50	11200	0.76	16300	0.86
1300	0.20	6300	0.50	11300	0.70	16400	0.84
1400	0.21	6400	0.51	11400	0.73	16500	0.83
1500	0.22	6500	0.51	11500	0.67	16600	0.87
1600	0.23	6600	0.52	11600	0.74	16700	0.90
1700	0.23	6700	0.54	11700	0.64	16800	0.91
1800	0.24	6800	0.51	11800	0.68	16900	0.90
1900	0.25	6900	0.55	11900	0.67	17000	0.97
2000	0.27	7000	0.54	12000	0.71	17100	0.94
2100	0.26	7100	0.55	12100	0.64	17200	1.01
2200	0.28	7200	0.55	12200	0.64	17300	0.97
2300	0.28	7300	0.54	12300	0.71	17400	1.02
2400	0.28	7400	0.52	12400	0.62	17500	1.06
2500	0.29	7500	0.58	12500	0.80	17600	1.01
2600	0.30	7600	0.56	12600	0.69	17700	1.10
2700	0.31	7700	0.57	12700	0.85	17800	1.16
2800	0.32	7800	0.62	12800	0.67	17900	1.12
2900	0.32	7900	0.57	12900	0.84	18000	1.00
3000	0.32	8000	0.55	13000	0.76		
3100	0.33	8100	0.59	13100	0.85		
3200	0.33	8200	0.59	13200	0.77		
3300	0.35	8300	0.60	13300	0.82		
3400	0.35	8400	0.66	13400	0.79		
3500	0.36	8500	0.60	13500	0.82		
3600	0.36	8600	0.59	13600	0.91		
3700	0.37	8700	0.59	13700	0.81		
3800	0.38	8800	0.58	13800	0.76		
3900	0.38	8900	0.60	13900	0.75		
4000	0.38	9000	0.60	14000	0.81		
4100	0.41	9100	0.60	14100	0.77		
4200	0.40	9200	0.57	14200	0.89		
4300	0.41	9300	0.57	14300	0.92		
4400	0.42	9400	0.58	14400	0.78		
4500	0.43	9500	0.60	14600	0.85		
4600	0.42	9600	0.62	14700	0.83		
4700	0.44	9700	0.58	14800	0.95		



**Cable loss**  
**Test cable, Mini-Circuits, S/N 0755A, 18 GHz, 4.6 m, N/M - N/M**  
**APC-15FT-NMNM+, HL 4278**

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.24	4900	4.19	10000	6.47	15100	8.33
30	0.26	5000	4.25	10100	6.50	15200	8.35
50	0.34	5100	4.29	10200	6.52	15300	8.37
100	0.50	5200	4.32	10300	6.57	15400	8.40
200	0.72	5300	4.38	10400	6.59	15500	8.42
300	0.90	5400	4.41	10500	6.61	15600	8.46
400	1.06	5500	4.46	10600	6.64	15700	8.50
500	1.20	5600	4.51	10700	6.64	15800	8.52
600	1.32	5700	4.56	10800	6.65	15900	8.56
700	1.44	5800	4.59	10900	6.68	16000	8.61
800	1.54	5900	4.64	11000	6.68	16100	8.64
900	1.64	6000	4.69	11100	6.69	16200	8.66
1000	1.74	6100	4.72	11200	6.70	16300	8.70
1100	1.83	6200	4.77	11300	6.74	16400	8.73
1200	1.92	6300	4.80	11400	6.78	16500	8.74
1300	2.01	6400	4.83	11500	6.81	16600	8.75
1400	2.09	6500	4.89	11600	6.84	16700	8.78
1500	2.18	6600	4.90	11700	6.87	16800	8.79
1600	2.25	6700	4.95	11800	6.92	16900	8.81
1700	2.33	6800	5.01	11900	6.98	17000	8.85
1800	2.39	6900	4.99	12000	7.02	17100	8.90
1900	2.47	7000	5.04	12100	7.08	17200	8.95
2000	2.53	7100	5.11	12200	7.15	17300	8.99
2100	2.60	7200	5.14	12300	7.20	17400	9.03
2200	2.67	7300	5.21	12400	7.26	17500	9.07
2300	2.73	7400	5.29	12500	7.31	17600	9.11
2400	2.80	7500	5.33	12600	7.36	17700	9.15
2500	2.87	7600	5.38	12700	7.41	17800	9.19
2600	2.93	7700	5.46	12800	7.46	17900	9.24
2700	3.00	7800	5.52	12900	7.51	18000	9.28
2800	3.06	7900	5.58	13000	7.55		
2900	3.12	8000	5.64	13100	7.59		
3000	3.18	8100	5.69	13200	7.65		
3100	3.24	8200	5.75	13300	7.69		
3200	3.30	8300	5.80	13400	7.72		
3300	3.35	8400	5.84	13500	7.78		
3400	3.42	8500	5.90	13600	7.82		
3500	3.46	8600	5.97	13700	7.86		
3600	3.52	8700	5.99	13800	7.91		
3700	3.57	8800	6.04	13900	7.96		
3800	3.61	8900	6.10	14000	8.01		
3900	3.67	9000	6.13	14100	8.06		
4000	3.71	9100	6.17	14200	8.10		
4100	3.77	9200	6.23	14300	8.13		
4200	3.83	9300	6.27	14400	8.16		
4300	3.89	9400	6.30	14500	8.19		
4400	3.94	9500	6.35	14600	8.21		
4500	4.00	9600	6.37	14700	8.23		
4600	4.05	9700	6.40	14800	8.26		
4700	4.10	9800	6.44	14900	8.28		
4800	4.16	9900	6.45	15000	8.30		

**Cable loss**  
**Low Loss Armored Test Cable, MegaPhase, 18 GHz, 6.2 m, N type-M/N type-M,**  
**NC29-N1N1-244S/N 12025101 003,**  
**HL 4353**

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
50	0.20	9000	2.71
100	0.27	9500	2.81
300	0.47	10000	2.90
500	0.61	10500	2.97
1000	0.87	11000	3.06
1500	1.07	11500	3.13
2000	1.24	12000	3.20
2500	1.39	12500	3.26
3000	1.53	13000	3.34
3500	1.65	13500	3.39
4000	1.77	14000	3.47
4500	1.89	14500	3.54
5000	1.99	15000	3.62
5500	2.07	15500	3.69
6000	2.20	16000	3.76
6500	2.30	16500	3.83
7000	2.39	17000	3.86
7500	2.51	17500	3.94
8000	2.58	18000	4.02
8500	2.65		

**Cable loss**  
RF Cable, Huber-Suhner, 40 GHz, 5.5 m, K type,  
SF102EA/11SK/11SK/5500MM, S/N 502494/2EA  
HL 5112

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
100	0.69	20500	10.18
200	0.97	21000	10.32
300	1.18	21500	10.47
500	1.52	22000	10.60
1000	2.14	22500	10.75
1500	2.62	23000	10.87
2000	3.03	23500	11.00
2500	3.40	24000	11.12
3000	3.73	24500	11.23
3500	4.04	25000	11.35
4000	4.33	25500	11.52
4500	4.60	26000	11.64
5000	4.86	26500	11.73
5500	5.10	27000	11.84
6000	5.34	27500	11.93
6500	5.57	28000	12.05
7000	5.79	28500	12.19
7500	6.00	29000	12.33
8000	6.21	29500	12.44
8500	6.43	30000	12.53
9000	6.62	30500	12.58
9500	6.82	31000	12.71
10000	7.01	31500	12.86
10500	7.17	32000	13.00
11000	7.34	32500	13.11
11500	7.51	33000	13.24
12000	7.68	33500	13.33
12500	7.84	34000	13.44
13000	8.00	34500	13.58
13500	8.16	35000	13.69
14000	8.32	35500	13.81
14500	8.48	36000	13.93
15000	8.63	36500	14.05
15500	8.77	37000	14.24
16000	8.92	37500	14.28
16500	9.08	38000	14.38
17000	9.23	38500	14.50
17500	9.37	39000	14.61
18000	9.51	39500	14.70
18500	9.66	40000	14.83
19000	9.78		
19500	9.92		
20000	10.07		

## 13 APPENDIX F Abbreviations and acronyms

A	ampere
AC	alternating current
AM	amplitude modulation
AVRG	average (detector)
BB	broad band
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB( $\mu$ V)	decibel referred to one microvolt
dB( $\mu$ V/m)	decibel referred to one microvolt per meter
dB( $\mu$ A)	decibel referred to one microampere
DC	direct current
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
k	kilo
kHz	kilohertz
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
$\mu$ s	microsecond
NA	not applicable
NB	narrow band
OATS	open area test site
$\Omega$	Ohm
QP	quasi-peak
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt

END OF DOCUMENT