

**FCC PART 15 SUBPART B and C  
TEST REPORT**

*for*

**LONG-RANGE HANDHELD TRANSMITTER  
MODEL: CMD-HHLR-418-MD**

Prepared for

LINX TECHNOLOGIES  
159 ORT LANE  
MERLIN, OREGON 97532

Prepared by: 

KYLE FUJIMOTO

Approved by: 

JAMES ROSS

COMPATIBLE ELECTRONICS INC.  
114 OLINDA DRIVE  
BREA, CALIFORNIA 92823  
(714) 579-0500

DATE: JUNE 10, 2013

|       | REPORT<br>BODY | APPENDICES |   |   |    |    | TOTAL |
|-------|----------------|------------|---|---|----|----|-------|
|       |                | A          | B | C | D  | E  |       |
| PAGES | 17             | 2          | 2 | 2 | 12 | 11 | 46    |

This report shall not be reproduced except in full, without the written approval of Compatible Electronics.

Brea Division  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

Agoura Division  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

Silverado Division  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

Lake Forest Division  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400

## TABLE OF CONTENTS

| Section / Title                                        | PAGE      |
|--------------------------------------------------------|-----------|
| <b>GENERAL REPORT SUMMARY</b>                          | <b>4</b>  |
| <b>SUMMARY OF TEST RESULTS</b>                         | <b>4</b>  |
| <b>1. PURPOSE</b>                                      | <b>5</b>  |
| <b>2. ADMINISTRATIVE DATA</b>                          | <b>6</b>  |
| 2.1 Location of Testing                                | 6         |
| 2.2 Traceability Statement                             | 6         |
| 2.3 Cognizant Personnel                                | 6         |
| 2.4 Date Test Sample was Received                      | 6         |
| 2.5 Disposition of the Test Sample                     | 6         |
| 2.6 Abbreviations and Acronyms                         | 6         |
| <b>3. APPLICABLE DOCUMENTS</b>                         | <b>7</b>  |
| <b>4. DESCRIPTION OF TEST CONFIGURATION</b>            | <b>8</b>  |
| 4.1 Description of Test Configuration – Emissions      | 8         |
| 4.1.1 Cable Construction and Termination               | 8         |
| <b>5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT</b> | <b>9</b>  |
| 5.1 EUT and Accessory List                             | 9         |
| 5.2 Emissions Test Equipment                           | 10        |
| <b>6. TEST SITE DESCRIPTION</b>                        | <b>11</b> |
| 6.1 Test Facility Description                          | 11        |
| 6.2 EUT Mounting, Bonding and Grounding                | 11        |
| 6.3 Facility Environmental Characteristics             | 11        |
| <b>7. TEST PROCEDURES</b>                              | <b>12</b> |
| 7.1 RF Emissions                                       | 12        |
| 7.1.1 Conducted Emissions Test                         | 12        |
| 7.1.2 Radiated Emissions (Spurious and Harmonics) Test | 13        |
| 7.1.3 RF Emissions Test Results                        | 15        |
| 7.2 Bandwidth of the Fundamental                       | 16        |
| <b>8. CONCLUSIONS</b>                                  | <b>17</b> |

## LIST OF APPENDICES

| APPENDIX | TITLE                                                                                                                                                                            |
|----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| A        | Laboratory Accreditations and Recognitions                                                                                                                                       |
| B        | Modifications to the EUT                                                                                                                                                         |
| C        | Additional Models Covered Under This Report                                                                                                                                      |
| D        | Diagram, Charts, and Photos <ul style="list-style-type: none"> <li>• Test Setup Diagram</li> <li>• Antenna and Amplifier Factors</li> <li>• Radiated Emissions Photos</li> </ul> |
| E        | Data Sheets                                                                                                                                                                      |

## LIST OF FIGURES

| FIGURE | TITLE                                                |
|--------|------------------------------------------------------|
| 1      | Conducted Emissions Test Setup                       |
| 2      | Plot Map And Layout of Radiated Test Site – 3 Meters |

## GENERAL REPORT SUMMARY

Compatible Electronics Inc. generates this electromagnetic emission test report, which is an independent testing and consulting firm. The test report is based on testing performed by Compatible Electronics personnel according to the measurement procedures described in the test specifications given below and in the "Test Procedures" section of this report.

The measurement data and conclusions appearing herein relate only to the sample tested and this report may not be reproduced without the written permission of Compatible Electronics, unless done so in full.

This report must not be used to claim product endorsement by NVLAP, NIST or any other agency of the U.S. Government.

Device Tested:                    Long-Range Handheld Transmitter  
 Model: CMD-HHLR-418-MD

Product Description:            See Expository Statement

Modifications:                   The EUT was modified during the testing. Please see the list located in Appendix B.

Customer:                        Linx Technologies  
 159 Ort Lane  
 Merlin, Oregon 97532

Test Date(s):                    June 4 and 5, 2013

Test Specifications:            Emissions requirements  
 CFR Title 47, Part 15, Subpart B and Subpart C, Sections 15.205, 15.209, and 15.231

Test Procedure:                 ANSI C63.4

Test Deviations:                The test procedure was not deviated from during the testing.

## SUMMARY OF TEST RESULTS

| TEST | DESCRIPTION                                                                      | RESULTS                                                                                                                          |
|------|----------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|
| 1    | Conducted RF Emissions<br>150 kHz to 30 MHz                                      | This test was not performed because the EUT cannot directly or indirectly connect to the AC public mains.                        |
| 2    | Radiated RF Emissions<br>10 kHz to 4180 MHz<br>(Transmitter and Digital Portion) | Complies with the <b>Class B</b> limits of CFR Title 47, Part 15, Subpart B; and Subpart C, sections 15.205, 15.209, and 15.231. |

## 1. PURPOSE

This document is a qualification test report based on the Electromagnetic Interference (EMI) tests performed on the Long-Range Handheld Transmitter, Model: CMD-HHLR-418-MD. The Emissions measurements were performed according to the measurement procedure described in ANSI C63.4. The tests were performed in order to determine whether the electromagnetic emissions from the equipment under test, referred to as EUT hereafter, are within the Class B specification limits defined by CFR Title 47, Part 15, Subpart B for the digital portion; and the limits defined in Subpart C, sections 15.205, 15.209, and 15.231 for the transmitter portion.



## 2. ADMINISTRATIVE DATA

### 2.1 Location of Testing

The Emissions tests described herein were performed at the test facility of Compatible Electronics, 114 Olinda Drive, Brea, California.

### 2.2 Traceability Statement

The calibration certificates of all test equipment used during the test are on file at the location of the test. The calibration is traceable to the National Institute of Standards and Technology (NIST).

### 2.3 Cognizant Personnel

Linx Technologies

Shawn Hogan Director of Engineering

Compatible Electronics Inc.

Kyle Fujimoto Test Engineer  
James Ross Test Engineer

### 2.4 Date Test Sample was Received

The test sample was received prior to the date of testing.

### 2.5 Disposition of the Test Sample

The test sample has not yet been returned as of the date of this report.

### 2.6 Abbreviations and Acronyms

The following abbreviations and acronyms may be used in this document.

|       |                                                     |
|-------|-----------------------------------------------------|
| FCC   | Federal Communications Commission                   |
| RF    | Radio Frequency                                     |
| EMI   | Electromagnetic Interference                        |
| EUT   | Equipment Under Test                                |
| P/N   | Part Number                                         |
| S/N   | Serial Number                                       |
| ITE   | Information Technology Equipment                    |
| LISN  | Line Impedance Stabilization Network                |
| NVLAP | National Voluntary Laboratory Accreditation Program |
| CFR   | Code of Federal Regulations                         |
| N/A   | Not Applicable                                      |
| Ltd.  | Limited                                             |
| Inc.  | Incorporated                                        |
| NCR   | No Calibration Required                             |
| R&D   | Research and Development                            |
| Rx    | Receive / Receiver                                  |
| Tx    | Transmit / Transmitter                              |

### 3. APPLICABLE DOCUMENTS

The following documents are referenced or used in the preparation of this Emissions Test Report.

| SPEC                     | TITLE                                                                                                                                                                     |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CFR Title 47,<br>Part 15 | FCC Rules – Radio frequency devices (including digital devices)                                                                                                           |
| ANSI C63.4:<br>2009      | American National Standard for Methods of Measurement of Radio-Noise<br>Emissions from Low-Voltage Electrical and Electronic Equipment in the Range<br>of 9 kHz to 40 GHz |

---

## 4. DESCRIPTION OF TEST CONFIGURATION

### 4.1 Description of Test Configuration – Emissions

The Long-Range Handheld Transmitter, Model: CMD-HHLR-418-MD (EUT) was tested as a stand alone unit and tested in three orthogonal axis. The EUT was continuously transmitting.

The EUT was investigated for duty cycle correction factor using both the Holtek and serial encoding. The serial encoding was used because this produces the worst case duty cycle.

The EUT immediately shuts off during normal operation after the button is released.

The antenna is connected directly to the PCB of the EUT via a phillips screw.

It was determined that the emissions were at their highest level when the EUT was operating in the above configuration. The final emissions data was taken in this mode of operation and any cables were maximized. All initial investigations were performed with the measurement receiver in manual mode scanning the frequency range continuously. Photographs of the test setup are in Appendix D of this report.

#### 4.1.1 Cable Construction and Termination

The EUT has no external cables.

## 5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT

### 5.1 EUT and Accessory List

| EQUIPMENT                             | MANUFACTURER      | MODEL NUMBER    | SERIAL NUMBER | FCC ID            |
|---------------------------------------|-------------------|-----------------|---------------|-------------------|
| LONG-RANGE HANDHELD TRANSMITTER (EUT) | LINX TECHNOLOGIES | CMD-HHLR-418-MD | N/A           | OJM-CMD-HHLR-XXXB |



## 5.2                    Emissions Test Equipment

| EQUIPMENT TYPE                                                | MANUFACTURER           | MODEL NUMBER | SERIAL NUMBER | CALIBRATION DATE  | CALIBRATION CYCLE |
|---------------------------------------------------------------|------------------------|--------------|---------------|-------------------|-------------------|
| <b>GENERAL TEST EQUIPMENT USED FOR ALL RF EMISSIONS TESTS</b> |                        |              |               |                   |                   |
| Radiated Emissions Data Capture Program                       | Compatible Electronics | 2.0          | N/A           | N/A               | N/A               |
| EMI Receiver                                                  | Rohde & Schwarz        | ESIB40       | 100194        | November 19, 2012 | 2 Year            |
| Loop Antenna                                                  | Com-Power              | AL-130       | 17089         | January 29, 2013  | 2 Year            |
| CombiLog Antenna                                              | Com-Power              | AC-220       | 61060         | May 29, 2013      | 1 Year            |
| Horn Antenna                                                  | Com-Power              | AH-118       | 10085         | February 29, 2012 | 2 Year            |
| Preamplifier                                                  | Com-Power              | PA-103       | 1582          | December 28, 2012 | 1 Year            |
| HF Preamplifier                                               | Com-Power              | PAM-6000     | 461017        | December 27, 2012 | 1 Year            |
| Turntable                                                     | Com-Power              | TT-100       | N/A           | N/A               | N/A               |
| Antenna-Mast                                                  | Com-Power              | AM-100       | N/A           | N/A               | N/A               |
| Monitor                                                       | Hewlett Packard        | D5258A       | TW74500641    | N/A               | N/A               |
| Computer                                                      | Hewlett Packard        | 4530         | US91912319    | N/A               | N/A               |

## 6. TEST SITE DESCRIPTION

### 6.1 Test Facility Description

Please refer to section 2.1 and 7.1.2 of this report for Emissions test location.

### 6.2 EUT Mounting, Bonding and Grounding

The EUT was mounted on a 1.0 by 1.5 meter non-conductive table 0.8 meters above the ground plane.

The EUT was not grounded.

### 6.3 Facility Environmental Characteristics

When applicable refer to the data sheets in Appendix E for the relative humidity, air temperature, and barometric pressure.

## 7. TEST PROCEDURES

The following sections describe the test methods and the specifications for the tests. Test results are also included in this section.

### 7.1 RF Emissions

#### 7.1.1 Conducted Emissions Test

The measurement receiver was used as a measuring meter. The data was collected with the measurement receiver in the peak detect mode with the "Max Hold" feature activated. The quasi-peak was used only where indicated in the data sheets. A transient limiter was used for the protection of the measurement receiver's input stage, and the offset was adjusted accordingly to read the actual data measured. The LISN output was measured using the measurement receiver. The output of the second LISN was terminated by a 50-ohm termination. The effective measurement bandwidth used for this test was 9 kHz.

Please see section 6.2 of this report for mounting, bonding and grounding of the EUT. The EUT was powered through the LISN, which was bonded to the ground plane. The LISN power was filtered and the filter was bonded to the ground plane. The EUT was set up with the minimum distances from any conductive surfaces as specified in ANSI C63.4. The excess power cord was wrapped in a figure eight pattern to form a bundle not exceeding 0.4 meters in length.

The conducted emissions from the EUT were maximized for operating mode as well as cable placement. The final data was collected under program control by the Compatible Electronics conducted emissions software in several overlapping sweeps by running the spectrum analyzer at a minimum scan rate of 10 seconds per octave. The final qualification data is located in Appendix E.

#### Test Results:

This test was not performed because the EUT cannot directly or indirectly connect to the AC public mains.

## 7.1.2 Radiated Emissions (Spurious and Harmonics) Test

The spectrum analyzer, along with the quasi-peak adapter, and EMI Receiver were used as a measuring meter. Amplifiers were used to increase the sensitivity of the instrument. The Com-Power Preamplifier Model: PA-103 was used for frequencies from 30 MHz to 1 GHz and the Com-Power Microwave Preamplifier Model: PAM-6000 was used for frequencies above 1 GHz. The spectrum analyzer and EMI Receiver were used in the peak detect mode with the "Max Hold" feature activated. In this mode, the spectrum analyzer and EMI receiver records the highest measured reading over the sweeps.

For the peak readings below 1000 MHz that were within 3 dB of the spec limit or higher, the quasi-peak adapter was used to quasi-peak the readings.

The fundamental, 2<sup>nd</sup> harmonic, and frequencies above 1 GHz were adjusted by a "duty cycle correction factor", derived from  $20 \log (\text{dwell time} / \text{pulse train})$ .

The measurement bandwidths and transducers used for the radiated emissions test were:

| FREQUENCY RANGE    | EFFECTIVE MEASUREMENT BANDWIDTH | TRANSDUCER          |
|--------------------|---------------------------------|---------------------|
| 10 kHz to 150 kHz  | 200 Hz                          | Active Loop Antenna |
| 150 kHz to 30 MHz  | 9 kHz                           | Active Loop Antenna |
| 30 MHz to 1000 MHz | 120 kHz                         | Combilog Antenna    |
| 1 GHz to 4.18 GHz  | 1 MHz                           | Horn Antennas       |


The open field test site of Compatible Electronics, Inc. was used for radiated emission testing. This test site is set up according to ANSI C63.4. Please see section 6.2 of this report for mounting, bonding and grounding of the EUT. The turntable supporting the EUT is remote controlled using a motor. The turntable permits EUT rotation of 360 degrees in order to maximize emissions. Also, the antenna mast allows height variation of the antenna from 1 meter to 4 meters. Data was collected in the worst case (highest emission) configuration of the EUT by the Radiated Emission Manual Test software. At each reading, the EUT was rotated 360 degrees and the antenna height was varied from 1 to 4 meters (for E field radiated field strength). The gun sight method was used when measuring with the horn antenna in order to ensure accurate results. The loop antenna was also rotated in the horizontal and vertical axis in order to ensure accurate results.

### Radiated Emissions (Spurious and Harmonics) Test (continued)

The presence of ambient signals was verified by turning the EUT off. In case an ambient signal was detected, the measurement bandwidth was reduced temporarily and verification was made that an additional adjacent peak did not exist. This ensures that the ambient signal does not hide any emissions from the EUT. The EUT was tested at a 3-meter test to obtain the final test data.

#### Test Results:

The EUT complies with the **Class B** limits of CFR Title 47, Part 15, Subpart B; and the limits of CFR Title 47, Part 15, Subpart C, Sections 15.205, 15.209 and 15.231.

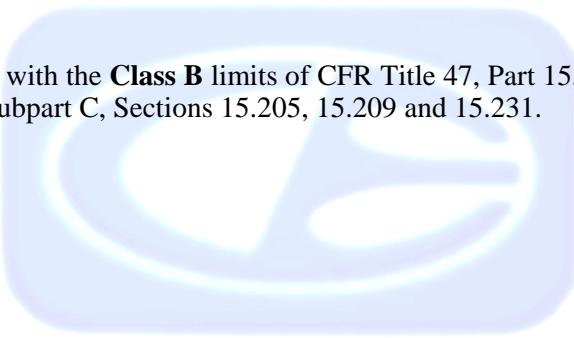

### 7.1.3 RF Emissions Test Results

Table 1.0 RADIATED EMISSION RESULTS  
 Long-Range Handheld Transmitter, Model: CMD-HHLR-418-MD

| Frequency<br>MHz  | Corrected Reading*<br>dBuV | Specification Limit<br>dBuV | Delta<br>(Cor. Reading – Spec. Limit)<br>dB |
|-------------------|----------------------------|-----------------------------|---------------------------------------------|
| 418 (H) (X-Axis)  | 79.86 (A)                  | 80.28                       | -0.42                                       |
| 418 (H) (Z-Axis)  | 78.46 (A)                  | 80.28                       | -1.82                                       |
| 418 (V) (Y-Axis)  | 76.16 (A)                  | 80.28                       | -4.12                                       |
| 418 (H) (Y-Axis)  | 66.86 (A)                  | 80.28                       | -13.42                                      |
| 418 (V) (X-Axis)  | 65.86 (A)                  | 80.28                       | -14.42                                      |
| 3762 (V) (Z-Axis) | 37.75 (A)                  | 54.00                       | -16.25                                      |

Notes:


- \* The complete emissions data is given in Appendix E of this report.
- A Average Reading
- V Vertical
- H Horizontal

## 7.2 Bandwidth of the Fundamental

The -20 dB bandwidth was checked to see that it was within 0.25% of the fundamental frequency for the EUT. Plots of the -20 dB bandwidth are located in Appendix E.

### Test Results:

The EUT complies with the requirements of CFR Title 47, Part 15, Subpart C, section 15.231 (c) for the -20 dB bandwidth of the fundamental. The EUT has a -20 dB bandwidth that is less than 0.25% of frequency of the fundamental.

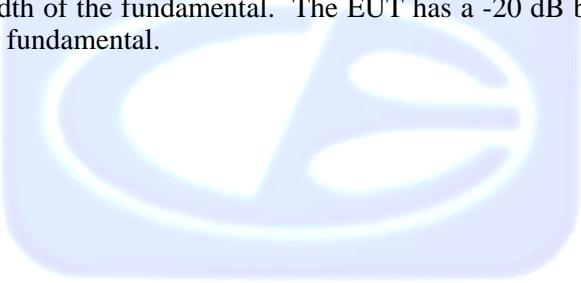

## 8. CONCLUSIONS

The Long-Range Handheld Transmitter, Model: CMD-HHLR-418-MD (EUT), as tested, meets all of the Class B specification limits defined in CFR Title 47, Part 15, Subpart B for the digital portion; and the limits defined in Subpart C, sections 15.205, 15.209, and 15.231 for the transmitter portion.



## APPENDIX A

### **LABORATORY ACCREDITATIONS AND RECOGNITIONS**

---

Brea Division  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

Agoura Division  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

Silverado Division  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

Lake Forest Division  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400

## LABORATORY ACCREDITATIONS AND RECOGNITIONS



NVLAP LAB CODES 200063-0,  
 200528-0, 200527-0

For US, Canada, Australia/New Zealand, Japan, Taiwan, Korea, and the European Union, Compatible Electronics is currently accredited by NVLAP to ISO/IEC 17025. Please follow the link to the NIST/NVLAP site for each of our facilities' NVLAP certificate and scope of accreditation  
[NVLAP listing links](#)

[Agoura Division](#) / [Brea Division](#) / [Silverado/Lake Forest Division](#)

.Quote from ISO-ILAC-IAF Communiqué on 17025:

"A laboratory's fulfillment of the requirements of ISO/IEC 17025:2005 means the laboratory meets both the technical competence requirements and management system requirements that are necessary for it to consistently deliver technically valid test results and calibrations. The management system requirements in ISO/IEC 17025:2005 (Section 4) are written in language relevant to laboratory operations and meet the principles of ISO 9001:2008 Quality Management Systems — Requirements."



ANSI listing [CETCB](#)



Compatible Electronics has been nominated as a Conformity Assessment Body (CAB) for EMC under the US/EU Mutual Recognition Agreement (MRA).

[US/EU MRA list](#) [NIST MRA site](#)



Compatible Electronics has been nominated as a Conformity Assessment Body (CAB) for Taiwan/BSMI under the US/APEC (Asia-Pacific Economic Cooperation) Mutual Recognition Agreement (MRA).

[APEC MRA list](#) [NIST MRA site](#)

We are also listed for IT products by the following country/agency:



VCCI Support member: Please visit [http://www.vcci.jp/vcci\\_e/](http://www.vcci.jp/vcci_e/)



FCC Listing, from FCC OET site  
[FCC test lab search](https://fjallfoss.fcc.gov/oetcf/eas/reports/TestFirmSearch.cfm) <https://fjallfoss.fcc.gov/oetcf/eas/reports/TestFirmSearch.cfm>



Compatible Electronics IC listing can be found at:  
<http://www.ic.gc.ca/eic/site/ic1.nsf/eng/home>

## APPENDIX B

### ***MODIFICATIONS TO THE EUT***

---

Brea Division  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

Agoura Division  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

Silverado Division  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

Lake Forest Division  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400

## MODIFICATIONS TO THE EUT

The modifications listed below were made to the EUT to pass FCC 15.231 and/or FCC **Class B** specifications.

All the rework described below was implemented during the test in a method that could be reproduced in all the units by the manufacturer.

1. Change R3 to 1800 ohms.



## APPENDIX C

### ***ADDITIONAL MODELS COVERED UNDER THIS REPORT***

---

Brea Division  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

Agoura Division  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

Silverado Division  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

Lake Forest Division  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400

## **ADDITIONAL MODELS COVERED UNDER THIS REPORT**

USED FOR THE PRIMARY TEST

Long-Range Handheld Transmitter  
Model: CMD-HHLR-418-MD

The EUT had no additional models.



## APPENDIX D

### ***DIAGRAMS, CHARTS, AND PHOTOS***

---


**Brea Division**  
**114 Olinda Drive**  
**Brea, CA 92823**  
**(714) 579-0500**

**Agoura Division**  
**2337 Troutdale Drive**  
**Agoura, CA 91301**  
**(818) 597-0600**

**Silverado Division**  
**19121 El Toro Road**  
**Silverado, CA 92676**  
**(949) 589-0700**


**Lake Forest Division**  
**20621 Pascal Way**  
**Lake Forest, CA 92630**  
**(949) 587-0400**

**FIGURE 1: CONDUCTED EMISSIONS TEST SETUP**

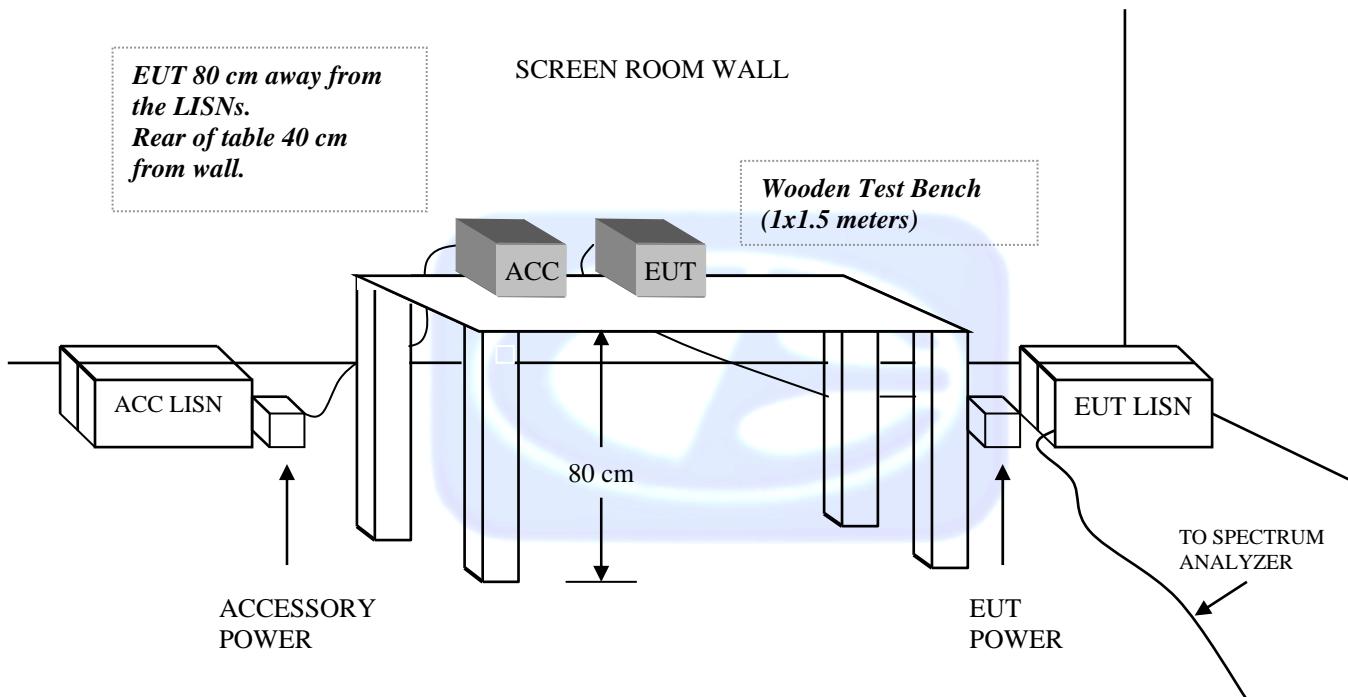

**FIGURE 2: PLOT MAP AND LAYOUT OF RADIATED SITE –  
3 METERS**

**OPEN LAND > 15 METERS**

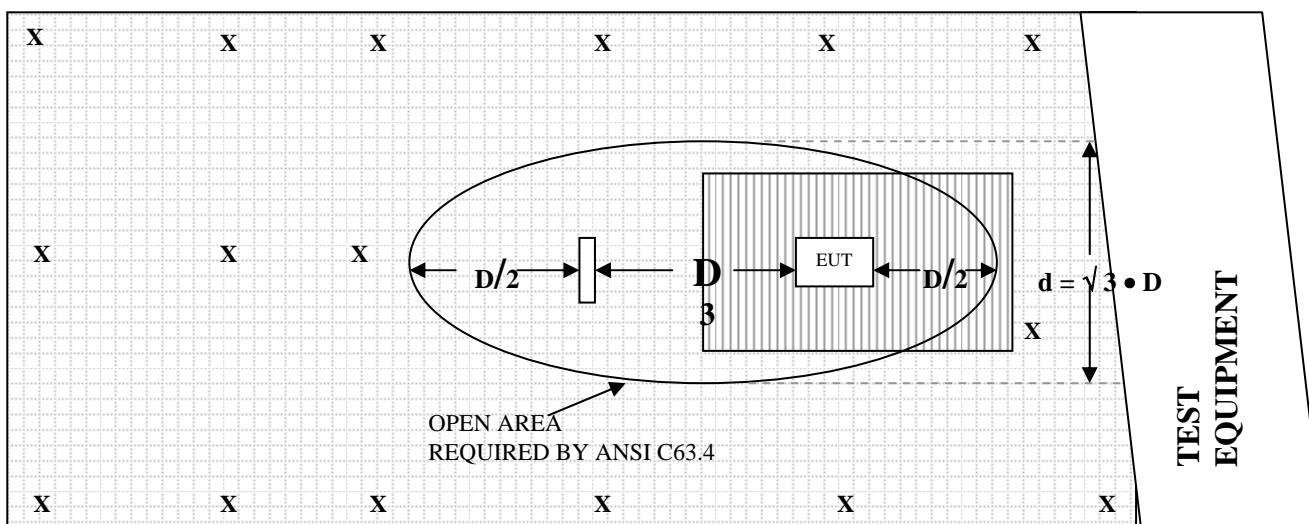

**OPEN LAND > 15 METERS**

- |                                                                                                              |                                                                                                     |
|--------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|
|  = GROUND RODS            |  = GROUND SCREEN |
|  = TEST DISTANCE (meters) |  = WOOD COVER    |

# COM-POWER AL-130

## LOOP ANTENNA

S/N: 17089

CALIBRATION DATE: JANUARY 29, 2013

| FREQUENCY<br>(MHz) | MAGNETIC<br>(dB/m) | ELECTRIC<br>(dB/m) |
|--------------------|--------------------|--------------------|
| 0.009              | -42.5              | 9                  |
| 0.01               | -42.3              | 9.2                |
| 0.02               | -42.1              | 9.4                |
| 0.03               | -41.4              | 10.1               |
| 0.04               | -41.8              | 9.7                |
| 0.05               | -42.4              | 9.1                |
| 0.06               | -42.3              | 9.2                |
| 0.07               | -42.5              | 9                  |
| 0.08               | -42.4              | 9.1                |
| 0.09               | -42.5              | 9                  |
| 0.1                | -42.5              | 9                  |
| 0.2                | -42.7              | 8.8                |
| 0.3                | -42.6              | 8.9                |
| 0.4                | -42.5              | 9                  |
| 0.5                | -42.7              | 8.8                |
| 0.6                | -42.7              | 8.8                |
| 0.7                | -42.5              | 9                  |
| 0.8                | -42.3              | 9.2                |
| 0.9                | -42.2              | 9.3                |
| 1                  | -42.2              | 9.3                |
| 2                  | -41.8              | 9.7                |
| 3                  | -41.7              | 9.8                |
| 4                  | -41.7              | 9.8                |
| 5                  | -41.5              | 10                 |
| 6                  | -41.6              | 9.9                |
| 7                  | -41.4              | 10.1               |
| 8                  | -41                | 10.5               |
| 9                  | -40.8              | 10.7               |
| 10                 | -41.3              | 10.2               |
| 15                 | -41.4              | 10.1               |
| 20                 | -41.2              | 10.3               |
| 25                 | -42.6              | 8.9                |
| 30                 | -41.7              | 9.8                |

**COM-POWER AC-220**
**COMBILOG ANTENNA**
**S/N: 61060**
**CALIBRATION DATE: MAY 29, 2013**

| <b>FREQUENCY<br/>(MHz)</b> | <b>FACTOR<br/>(dB)</b> | <b>FREQUENCY<br/>(MHz)</b> | <b>FACTOR<br/>(dB)</b> |
|----------------------------|------------------------|----------------------------|------------------------|
| 30                         | 19.40                  | 200                        | 9.10                   |
| 35                         | 19.10                  | 250                        | 11.40                  |
| 40                         | 19.70                  | 300                        | 11.90                  |
| 45                         | 18.00                  | 350                        | 14.20                  |
| 50                         | 16.80                  | 400                        | 15.20                  |
| 60                         | 12.50                  | 450                        | 16.50                  |
| 70                         | 7.30                   | 500                        | 17.10                  |
| 80                         | 4.40                   | 550                        | 16.20                  |
| 90                         | 8.00                   | 600                        | 17.70                  |
| 100                        | 8.80                   | 650                        | 19.10                  |
| 120                        | 10.50                  | 700                        | 20.00                  |
| 125                        | 10.60                  | 750                        | 21.50                  |
| 140                        | 8.60                   | 800                        | 21.50                  |
| 150                        | 11.20                  | 850                        | 21.70                  |
| 160                        | 8.90                   | 900                        | 22.70                  |
| 175                        | 9.60                   | 950                        | 22.10                  |
| 180                        | 8.50                   | 1000                       | 22.90                  |
|                            |                        |                            |                        |

# COM-POWER PA-103

## PREAMPLIFIER

S/N: 1582

CALIBRATION DATE: DECEMBER 28, 2012

| FREQUENCY<br>(MHz) | FACTOR<br>(dB) | FREQUENCY<br>(MHz) | FACTOR<br>(dB) |
|--------------------|----------------|--------------------|----------------|
| 30                 | 32.80          | 300                | 32.26          |
| 40                 | 33.10          | 350                | 32.23          |
| 50                 | 33.10          | 400                | 32.17          |
| 60                 | 33.10          | 450                | 32.16          |
| 70                 | 33.00          | 500                | 32.11          |
| 80                 | 33.00          | 550                | 32.07          |
| 90                 | 33.10          | 600                | 32.02          |
| 100                | 33.00          | 650                | 31.97          |
| 125                | 33.00          | 700                | 31.87          |
| 150                | 33.00          | 750                | 31.81          |
| 175                | 32.90          | 800                | 31.73          |
| 200                | 32.80          | 850                | 31.57          |
| 225                | 32.34          | 900                | 31.43          |
| 250                | 32.32          | 950                | 31.29          |
| 275                | 32.28          | 1000               | 31.14          |

## COM-POWER AH-118

### HORN ANTENNA

S/N: 10085

CALIBRATION DATE: FEBRUARY 29, 2012

| FREQUENCY<br>(GHz) | FACTOR<br>(dB) |
|--------------------|----------------|
| 1.0                | 25.0           |
| 1.5                | 25.4           |
| 2.0                | 31.4           |
| 2.5                | 31.2           |
| 3.0                | 31.4           |
| 3.5                | 30.6           |
| 4.0                | 31.8           |
| 4.5                | 33.4           |
| 5.0                | 34.3           |
| 5.5                | 35.3           |
| 6.0                | 35.0           |
| 6.5                | 39.2           |
| 7.5                | 40.9           |
| 8.0                | 38.5           |
| 8.5                | 41.2           |
| 9.0                | 41.4           |
| 9.5                | 38.8           |
| 10.0               | 39.3           |

## COM-POWER PAM-6000

### PREAMPLIFIER (1 – 6 GHz)

S/N: 461017

CALIBRATION DATE: DECEMBER 27, 2012

| FREQUENCY<br>(GHz) | FACTOR<br>(dB) |
|--------------------|----------------|
| 1000               | 30.82          |
| 1100               | 30.97          |
| 1200               | 31.01          |
| 1300               | 30.94          |
| 1400               | 30.76          |
| 1500               | 30.43          |
| 1600               | 29.91          |
| 1700               | 29.38          |
| 1800               | 28.85          |
| 1900               | 28.55          |
| 2000               | 28.52          |
| 2500               | 29.32          |
| 3000               | 30.70          |
| 3500               | 30.13          |
| 4000               | 31.08          |
| 4500               | 30.81          |
| 5000               | 31.12          |
| 5500               | 28.79          |
| 6000               | 30.20          |



**FRONT VIEW**

**LINX TECHNOLOGIES  
LONG-RANGE HANDHELD TRANSMITTER  
MODEL: CMD-HHLR-418-MD**

**FCC SUBPART B AND C – RADIATED EMISSIONS – BELOW 1 GHz**

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**

---

**Brea Division**  
**114 Olinda Drive**  
**Brea, CA 92823**  
**(714) 579-0500**

**Agoura Division**  
**2337 Troutdale Drive**  
**Agoura, CA 91301**  
**(818) 597-0600**

**Silverado Division**  
**19121 El Toro Road**  
**Silverado, CA 92676**  
**(949) 589-0700**

**Lake Forest Division**  
**20621 Pascal Way**  
**Lake Forest, CA 92630**  
**(949) 587-0400**



**REAR VIEW**

LINX TECHNOLOGIES  
LONG-RANGE HANDHELD TRANSMITTER  
MODEL: CMD-HHLR-418-MD  
FCC SUBPART B AND C – RADIATED EMISSIONS – BELOW 1 GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**

---

Brea Division  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

Agoura Division  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

Silverado Division  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

Lake Forest Division  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400



**FRONT VIEW**

LINX TECHNOLOGIES  
LONG-RANGE HANDHELD TRANSMITTER  
MODEL: CMD-HHLR-418-MD  
FCC SUBPART B AND C – RADIATED EMISSIONS – ABOVE 1 GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**

---

Brea Division  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

Agoura Division  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

Silverado Division  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

Lake Forest Division  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400



**REAR VIEW**

LINX TECHNOLOGIES  
LONG-RANGE HANDHELD TRANSMITTER  
MODEL: CMD-HHLR-418-MD  
FCC SUBPART B AND C – RADIATED EMISSIONS – ABOVE 1 GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION  
FOR MAXIMUM EMISSIONS**

---

Brea Division  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

Agoura Division  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

Silverado Division  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

Lake Forest Division  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400

## APPENDIX E

### ***DATA SHEETS***

---

Brea Division  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

Agoura Division  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

Silverado Division  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

Lake Forest Division  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400

## ***RADIATED EMISSIONS***

### ***DATA SHEETS***

---

Brea Division  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

Agoura Division  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

Silverado Division  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

Lake Forest Division  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400

**FCC 15.231**

 Linx Technologies  
 Long-Range Handheld Transmiiter  
 Model: CMD-HHLR-418-MD

 Date: 06/04/2013  
 Lab: A  
 Tested By: Kyle Fujimoto

**X-Axis**
**Duty Cycle: 44.18%**

| Freq.<br>(MHz) | Level<br>(dBuV) | Pol<br>(v/h) | Limit  | Margin | Peak /<br>QP /<br>Avg | Ant.<br>Height<br>(m) | Table<br>Angle<br>(deg) | Comments |
|----------------|-----------------|--------------|--------|--------|-----------------------|-----------------------|-------------------------|----------|
| 418            | 72.95           | V            | 100.28 | -27.33 | Peak                  | 1.25                  | 0                       |          |
| 418            | 65.86           | V            | 80.28  | -14.42 | Avg                   | 1.25                  | 0                       |          |
|                |                 |              |        |        |                       |                       |                         |          |
| 836            | 31.65           | V            | 80.28  | -48.63 | Peak                  | 1                     | 270                     |          |
| 836            | 24.56           | V            | 60.28  | -35.72 | Avg                   | 1                     | 270                     |          |
|                |                 |              |        |        |                       |                       |                         |          |
| 1254           | 32.53           | V            | 74     | -41.47 | Peak                  | 1.25                  | 155                     |          |
| 1254           | 25.44           | V            | 54     | -28.56 | Avg                   | 1.25                  | 155                     |          |
|                |                 |              |        |        |                       |                       |                         |          |
| 1672           | 34.73           | V            | 74     | -39.27 | Peak                  | 1.25                  | 155                     |          |
| 1672           | 27.64           | V            | 54     | -26.36 | Avg                   | 1.25                  | 155                     |          |
|                |                 |              |        |        |                       |                       |                         |          |
| 2090           | 42.46           | V            | 80.28  | -37.82 | Peak                  | 1.25                  | 165                     |          |
| 2090           | 35.37           | V            | 60.28  | -24.91 | Avg                   | 1.25                  | 165                     |          |
|                |                 |              |        |        |                       |                       |                         |          |
| 2508           | 39.92           | V            | 80.28  | -40.36 | Peak                  | 1.35                  | 175                     |          |
| 2508           | 32.83           | V            | 60.28  | -27.45 | Avg                   | 1.35                  | 175                     |          |
|                |                 |              |        |        |                       |                       |                         |          |
| 2926           | 45.51           | V            | 80.28  | -34.77 | Peak                  | 1.25                  | 185                     |          |
| 2926           | 38.42           | V            | 60.28  | -21.86 | Avg                   | 1.25                  | 185                     |          |
|                |                 |              |        |        |                       |                       |                         |          |
| 3344           | 42.12           | V            | 80.28  | -38.16 | Peak                  | 1.35                  | 195                     |          |
| 3344           | 35.03           | V            | 60.28  | -25.25 | Avg                   | 1.35                  | 195                     |          |
|                |                 |              |        |        |                       |                       |                         |          |
| 3762           | 43.41           | V            | 74     | -30.59 | Peak                  | 1.25                  | 205                     |          |
| 3762           | 36.32           | V            | 54     | -17.68 | Avg                   | 1.25                  | 205                     |          |
|                |                 |              |        |        |                       |                       |                         |          |
| 4180           | 43.95           | V            | 74     | -30.05 | Peak                  | 1.35                  | 215                     |          |
| 4180           | 36.86           | V            | 54     | -17.14 | Avg                   | 1.35                  | 215                     |          |
|                |                 |              |        |        |                       |                       |                         |          |

**FCC 15.231**

 Linx Technologies  
 Long-Range Handheld Transmitter  
 Model: CMD-HHLR-418-MD

 Date: 06/04/2013  
 Lab: A  
 Tested By: Kyle Fujimoto

**X-Axis**
**Duty Cycle: 44.18%**

| Freq.<br>(MHz) | Level<br>(dBuV) | Pol<br>(v/h) | Limit  | Margin | Peak /<br>QP /<br>Avg | Ant.<br>Height<br>(m) | Table<br>Angle<br>(deg) | Comments |
|----------------|-----------------|--------------|--------|--------|-----------------------|-----------------------|-------------------------|----------|
| 418            | 86.95           | H            | 100.28 | -13.33 | Peak                  | 1                     | 90                      |          |
| 418            | 79.86           | H            | 80.28  | -0.42  | Avg                   | 1                     | 90                      |          |
|                |                 |              |        |        |                       |                       |                         |          |
| 836            | 43.45           | H            | 80.28  | -36.83 | Peak                  | 1.25                  | 135                     |          |
| 836            | 36.36           | H            | 60.28  | -23.92 | Avg                   | 1.25                  | 135                     |          |
|                |                 |              |        |        |                       |                       |                         |          |
| 1254           | 36.62           | H            | 74     | -37.38 | Peak                  | 1.25                  | 155                     |          |
| 1254           | 29.53           | H            | 54     | -24.47 | Avg                   | 1.25                  | 155                     |          |
|                |                 |              |        |        |                       |                       |                         |          |
| 1672           | 40.03           | H            | 74     | -33.97 | Peak                  | 1.85                  | 145                     |          |
| 1672           | 32.94           | H            | 54     | -21.06 | Avg                   | 1.85                  | 145                     |          |
|                |                 |              |        |        |                       |                       |                         |          |
| 2090           | 42.26           | H            | 80.28  | -38.02 | Peak                  | 1.25                  | 155                     |          |
| 2090           | 35.17           | H            | 60.28  | -25.11 | Avg                   | 1.25                  | 155                     |          |
|                |                 |              |        |        |                       |                       |                         |          |
| 2508           | 41.71           | H            | 80.28  | -38.57 | Peak                  | 1.65                  | 145                     |          |
| 2508           | 34.62           | H            | 60.28  | -25.66 | Avg                   | 1.65                  | 145                     |          |
|                |                 |              |        |        |                       |                       |                         |          |
| 2926           | 45.88           | H            | 80.28  | -34.4  | Peak                  | 1.25                  | 155                     |          |
| 2926           | 38.79           | H            | 60.28  | -21.49 | Avg                   | 1.25                  | 155                     |          |
|                |                 |              |        |        |                       |                       |                         |          |
| 3344           | 45.92           | H            | 80.28  | -34.36 | Peak                  | 1.65                  | 175                     |          |
| 3344           | 38.83           | H            | 60.28  | -21.45 | Avg                   | 1.65                  | 175                     |          |
|                |                 |              |        |        |                       |                       |                         |          |
| 3762           | 43.67           | H            | 74     | -30.33 | Peak                  | 1.25                  | 185                     |          |
| 3762           | 36.58           | H            | 54     | -17.42 | Avg                   | 1.25                  | 185                     |          |
|                |                 |              |        |        |                       |                       |                         |          |
| 4180           | 44.28           | H            | 74     | -29.72 | Peak                  | 1.35                  | 195                     |          |
| 4180           | 37.19           | H            | 54     | -16.81 | Avg                   | 1.35                  | 195                     |          |
|                |                 |              |        |        |                       |                       |                         |          |

**FCC 15.231**

 Linx Technologies  
 Long-Range Handheld Transmiiter  
 Model: CMD-HHLR-418-MD

 Date: 06/04/2013  
 Lab: A  
 Tested By: Kyle Fujimoto

**Y-Axis**

Duty Cycle: 44.18%

| Freq.<br>(MHz) | Level<br>(dBuV) | Pol<br>(v/h) | Limit  | Margin | Peak /<br>QP /<br>Avg | Ant.<br>Height<br>(m) | Table<br>Angle<br>(deg) | Comments |
|----------------|-----------------|--------------|--------|--------|-----------------------|-----------------------|-------------------------|----------|
| 418            | 83.25           | V            | 100.28 | -17.03 | Peak                  | 1                     | 90                      |          |
| 418            | 76.16           | V            | 80.28  | -4.12  | Avg                   | 1                     | 90                      |          |
|                |                 |              |        |        |                       |                       |                         |          |
| 836            | 41.45           | V            | 80.28  | -38.83 | Peak                  | 1.25                  | 155                     |          |
| 836            | 34.36           | V            | 60.28  | -25.92 | Avg                   | 1.25                  | 155                     |          |
|                |                 |              |        |        |                       |                       |                         |          |
| 1254           | 36.75           | V            | 74     | -37.25 | Peak                  | 1.25                  | 165                     |          |
| 1254           | 29.66           | V            | 54     | -24.34 | Avg                   | 1.25                  | 165                     |          |
|                |                 |              |        |        |                       |                       |                         |          |
| 1672           | 38.72           | V            | 74     | -35.28 | Peak                  | 1.25                  | 175                     |          |
| 1672           | 31.63           | V            | 54     | -22.37 | Avg                   | 1.25                  | 175                     |          |
|                |                 |              |        |        |                       |                       |                         |          |
| 2090           | 45.22           | V            | 80.28  | -35.06 | Peak                  | 1.35                  | 185                     |          |
| 2090           | 38.13           | V            | 60.28  | -22.15 | Avg                   | 1.35                  | 185                     |          |
|                |                 |              |        |        |                       |                       |                         |          |
| 2508           | 40.92           | V            | 80.28  | -39.36 | Peak                  | 1.25                  | 195                     |          |
| 2508           | 33.83           | V            | 60.28  | -26.45 | Avg                   | 1.25                  | 195                     |          |
|                |                 |              |        |        |                       |                       |                         |          |
| 2926           | 43.44           | V            | 80.28  | -36.84 | Peak                  | 1.35                  | 205                     |          |
| 2926           | 36.35           | V            | 60.28  | -23.93 | Avg                   | 1.35                  | 205                     |          |
|                |                 |              |        |        |                       |                       |                         |          |
| 3344           | 43.07           | V            | 80.28  | -37.21 | Peak                  | 1.25                  | 215                     |          |
| 3344           | 35.98           | V            | 60.28  | -24.3  | Avg                   | 1.25                  | 215                     |          |
|                |                 |              |        |        |                       |                       |                         |          |
| 3762           | 44.68           | V            | 74     | -29.32 | Peak                  | 1.25                  | 225                     |          |
| 3762           | 37.59           | V            | 54     | -16.41 | Avg                   | 1.25                  | 225                     |          |
|                |                 |              |        |        |                       |                       |                         |          |
| 4180           | 43.22           | V            | 74     | -30.78 | Peak                  | 1.35                  | 265                     |          |
| 4180           | 36.13           | V            | 54     | -17.87 | Avg                   | 1.35                  | 265                     |          |
|                |                 |              |        |        |                       |                       |                         |          |

**FCC 15.231**

 Linx Technologies  
 Long-Range Handheld Transmiiter  
 Model: CMD-HHLR-418-MD

 Date: 06/04/2013  
 Lab: A  
 Tested By: Kyle Fujimoto

**Y-Axis**

Duty Cycle: 44.18%

| Freq.<br>(MHz) | Level<br>(dBuV) | Pol<br>(v/h) | Limit  | Margin | Peak /<br>QP /<br>Avg | Ant.<br>Height<br>(m) | Table<br>Angle<br>(deg) | Comments |
|----------------|-----------------|--------------|--------|--------|-----------------------|-----------------------|-------------------------|----------|
| 418            | 73.95           | H            | 100.28 | -26.33 | Peak                  | 1.25                  | 155                     |          |
| 418            | 66.86           | H            | 80.28  | -13.42 | Avg                   | 1.25                  | 155                     |          |
|                |                 |              |        |        |                       |                       |                         |          |
| 836            | 31.15           | H            | 80.28  | -49.13 | Peak                  | 1                     | 90                      |          |
| 836            | 24.06           | H            | 60.28  | -36.22 | Avg                   | 1                     | 90                      |          |
|                |                 |              |        |        |                       |                       |                         |          |
| 1254           | 33.17           | H            | 74     | -40.83 | Peak                  | 1.25                  | 155                     |          |
| 1254           | 26.08           | H            | 54     | -27.92 | Avg                   | 1.25                  | 155                     |          |
|                |                 |              |        |        |                       |                       |                         |          |
| 1672           | 37.72           | H            | 74     | -36.28 | Peak                  | 1.55                  | 175                     |          |
| 1672           | 30.63           | H            | 54     | -23.37 | Avg                   | 1.55                  | 175                     |          |
|                |                 |              |        |        |                       |                       |                         |          |
| 2090           | 44.81           | H            | 80.28  | -35.47 | Peak                  | 1.25                  | 185                     |          |
| 2090           | 37.72           | H            | 60.28  | -22.56 | Avg                   | 1.25                  | 185                     |          |
|                |                 |              |        |        |                       |                       |                         |          |
| 2508           | 41.48           | H            | 80.28  | -38.8  | Peak                  | 1.55                  | 145                     |          |
| 2508           | 34.39           | H            | 60.28  | -25.89 | Avg                   | 1.55                  | 145                     |          |
|                |                 |              |        |        |                       |                       |                         |          |
| 2926           | 44.11           | H            | 80.28  | -36.17 | Peak                  | 1.25                  | 165                     |          |
| 2926           | 37.02           | H            | 60.28  | -23.26 | Avg                   | 1.25                  | 165                     |          |
|                |                 |              |        |        |                       |                       |                         |          |
| 3344           | 44.32           | H            | 80.28  | -35.96 | Peak                  | 1.35                  | 175                     |          |
| 3344           | 37.23           | H            | 60.28  | -23.05 | Avg                   | 1.35                  | 175                     |          |
|                |                 |              |        |        |                       |                       |                         |          |
| 3762           | 43.65           | H            | 74     | -30.35 | Peak                  | 1.25                  | 185                     |          |
| 3762           | 36.56           | H            | 54     | -17.44 | Avg                   | 1.25                  | 185                     |          |
|                |                 |              |        |        |                       |                       |                         |          |
| 4180           | 44.83           | H            | 74     | -29.17 | Peak                  | 1.55                  | 165                     |          |
| 4180           | 37.74           | H            | 54     | -16.26 | Avg                   | 1.55                  | 165                     |          |
|                |                 |              |        |        |                       |                       |                         |          |

**FCC 15.231**

 Linx Technologies  
 Long-Range Handheld Transmiiter  
 Model: CMD-HHLR-418-MD

 Date: 06/04/2013  
 Lab: A  
 Tested By: Kyle Fujimoto

**Z-Axis**
**Duty Cycle: 44.18%**

| Freq.<br>(MHz) | Level<br>(dBuV) | Pol<br>(v/h) | Limit  | Margin | Peak /<br>QP /<br>Avg | Ant.<br>Height<br>(m) | Table<br>Angle<br>(deg) | Comments |
|----------------|-----------------|--------------|--------|--------|-----------------------|-----------------------|-------------------------|----------|
| 418            | 70.85           | V            | 100.28 | -29.43 | Peak                  | 1.25                  | 155                     |          |
| 418            | 63.76           | V            | 80.28  | -16.52 | Avg                   | 1.25                  | 155                     |          |
|                |                 |              |        |        |                       |                       |                         |          |
| 836            | 32.15           | V            | 80.28  | -48.13 | Peak                  | 1.45                  | 165                     |          |
| 836            | 25.06           | V            | 60.28  | -35.22 | Avg                   | 1.45                  | 165                     |          |
|                |                 |              |        |        |                       |                       |                         |          |
| 1254           | 33.41           | V            | 74     | -40.59 | Peak                  | 1.25                  | 155                     |          |
| 1254           | 26.32           | V            | 54     | -27.68 | Avg                   | 1.25                  | 155                     |          |
|                |                 |              |        |        |                       |                       |                         |          |
| 1672           | 36.52           | V            | 74     | -37.48 | Peak                  | 1.55                  | 185                     |          |
| 1672           | 29.43           | V            | 54     | -24.57 | Avg                   | 1.55                  | 185                     |          |
|                |                 |              |        |        |                       |                       |                         |          |
| 2090           | 42.76           | V            | 80.28  | -37.52 | Peak                  | 1.85                  | 195                     |          |
| 2090           | 35.67           | V            | 60.28  | -24.61 | Avg                   | 1.85                  | 195                     |          |
|                |                 |              |        |        |                       |                       |                         |          |
| 2508           | 40.49           | V            | 80.28  | -39.79 | Peak                  | 1.25                  | 155                     |          |
| 2508           | 33.4            | V            | 60.28  | -26.88 | Avg                   | 1.25                  | 155                     |          |
|                |                 |              |        |        |                       |                       |                         |          |
| 2926           | 46.35           | V            | 80.28  | -33.93 | Peak                  | 1.35                  | 165                     |          |
| 2926           | 39.26           | V            | 60.28  | -21.02 | Avg                   | 1.35                  | 165                     |          |
|                |                 |              |        |        |                       |                       |                         |          |
| 3344           | 45.26           | V            | 80.28  | -35.02 | Peak                  | 1.25                  | 175                     |          |
| 3344           | 38.17           | V            | 60.28  | -22.11 | Avg                   | 1.25                  | 175                     |          |
|                |                 |              |        |        |                       |                       |                         |          |
| 3762           | 44.84           | V            | 74     | -29.16 | Peak                  | 1.35                  | 185                     |          |
| 3762           | 37.75           | V            | 54     | -16.25 | Avg                   | 1.35                  | 185                     |          |
|                |                 |              |        |        |                       |                       |                         |          |
| 4180           | 43.79           | V            | 74     | -30.21 | Peak                  | 1.25                  | 165                     |          |
| 4180           | 36.7            | V            | 54     | -17.3  | Avg                   | 1.25                  | 165                     |          |
|                |                 |              |        |        |                       |                       |                         |          |

**FCC 15.231**

 Linx Technologies  
 Long-Range Handheld Transmitter  
 Model: CMD-HHLR-418-MD

 Date: 06/04/2013  
 Lab: A  
 Tested By: Kyle Fujimoto

**Z-Axis**
**Duty Cycle: 44.18%**

| Freq.<br>(MHz) | Level<br>(dBuV) | Pol<br>(v/h) | Limit  | Margin | Peak /<br>QP /<br>Avg | Ant.<br>Height<br>(m) | Table<br>Angle<br>(deg) | Comments |
|----------------|-----------------|--------------|--------|--------|-----------------------|-----------------------|-------------------------|----------|
| 418            | 85.55           | H            | 100.28 | -14.73 | Peak                  | 1                     | 90                      |          |
| 418            | 78.46           | H            | 80.28  | -1.82  | Avg                   | 1                     | 90                      |          |
|                |                 |              |        |        |                       |                       |                         |          |
| 836            | 40.15           | H            | 80.28  | -40.13 | Peak                  | 1.25                  | 135                     |          |
| 836            | 33.06           | H            | 60.28  | -27.22 | Avg                   | 1.25                  | 135                     |          |
|                |                 |              |        |        |                       |                       |                         |          |
| 1254           | 37.38           | H            | 74     | -36.62 | Peak                  | 1.55                  | 165                     |          |
| 1254           | 30.29           | H            | 54     | -23.71 | Avg                   | 1.55                  | 165                     |          |
|                |                 |              |        |        |                       |                       |                         |          |
| 1672           | 39.91           | H            | 74     | -34.09 | Peak                  | 1.25                  | 175                     |          |
| 1672           | 32.82           | H            | 54     | -21.18 | Avg                   | 1.25                  | 175                     |          |
|                |                 |              |        |        |                       |                       |                         |          |
| 2090           | 45.17           | H            | 80.28  | -35.11 | Peak                  | 1.65                  | 185                     |          |
| 2090           | 38.08           | H            | 60.28  | -22.2  | Avg                   | 1.65                  | 185                     |          |
|                |                 |              |        |        |                       |                       |                         |          |
| 2508           | 42.93           | H            | 80.28  | -37.35 | Peak                  | 1.75                  | 195                     |          |
| 2508           | 35.84           | H            | 60.28  | -24.44 | Avg                   | 1.75                  | 195                     |          |
|                |                 |              |        |        |                       |                       |                         |          |
| 2926           | 43.64           | H            | 80.28  | -36.64 | Peak                  | 1.85                  | 175                     |          |
| 2926           | 36.55           | H            | 60.28  | -23.73 | Avg                   | 1.85                  | 175                     |          |
|                |                 |              |        |        |                       |                       |                         |          |
| 3344           | 43.05           | H            | 80.28  | -37.23 | Peak                  | 1.25                  | 195                     |          |
| 3344           | 35.96           | H            | 60.28  | -24.32 | Avg                   | 1.25                  | 195                     |          |
|                |                 |              |        |        |                       |                       |                         |          |
| 3762           | 43.58           | H            | 74     | -30.42 | Peak                  | 1.35                  | 205                     |          |
| 3762           | 36.49           | H            | 54     | -17.51 | Avg                   | 1.35                  | 205                     |          |
|                |                 |              |        |        |                       |                       |                         |          |
| 4180           | 44.36           | H            | 74     | -29.64 | Peak                  | 1.25                  | 215                     |          |
| 4180           | 37.27           | H            | 54     | -16.73 | Avg                   | 1.25                  | 215                     |          |
|                |                 |              |        |        |                       |                       |                         |          |

FCC 15.231 and FCC Class B

Linx Technologies  
Long-Range Handheld Transmitter  
Model: CMD-HHLR-418-MD

Date: 06/04/2013

## Lab: A

Tested By: Kyle Fujimoto

### X-Axis (Worst Case)

## Digital Portion and Non-Harmonic Emissions from the Transmitter

## Vertical and Horizontal Polarizations

***-20 dB BANDWIDTH***

***DATA SHEETS***


---

Brea Division  
114 Olinda Drive  
Brea, CA 92823  
(714) 579-0500

Agoura Division  
2337 Troutdale Drive  
Agoura, CA 91301  
(818) 597-0600

Silverado Division  
19121 El Toro Road  
Silverado, CA 92676  
(949) 589-0700

Lake Forest Division  
20621 Pascal Way  
Lake Forest, CA 92630  
(949) 587-0400

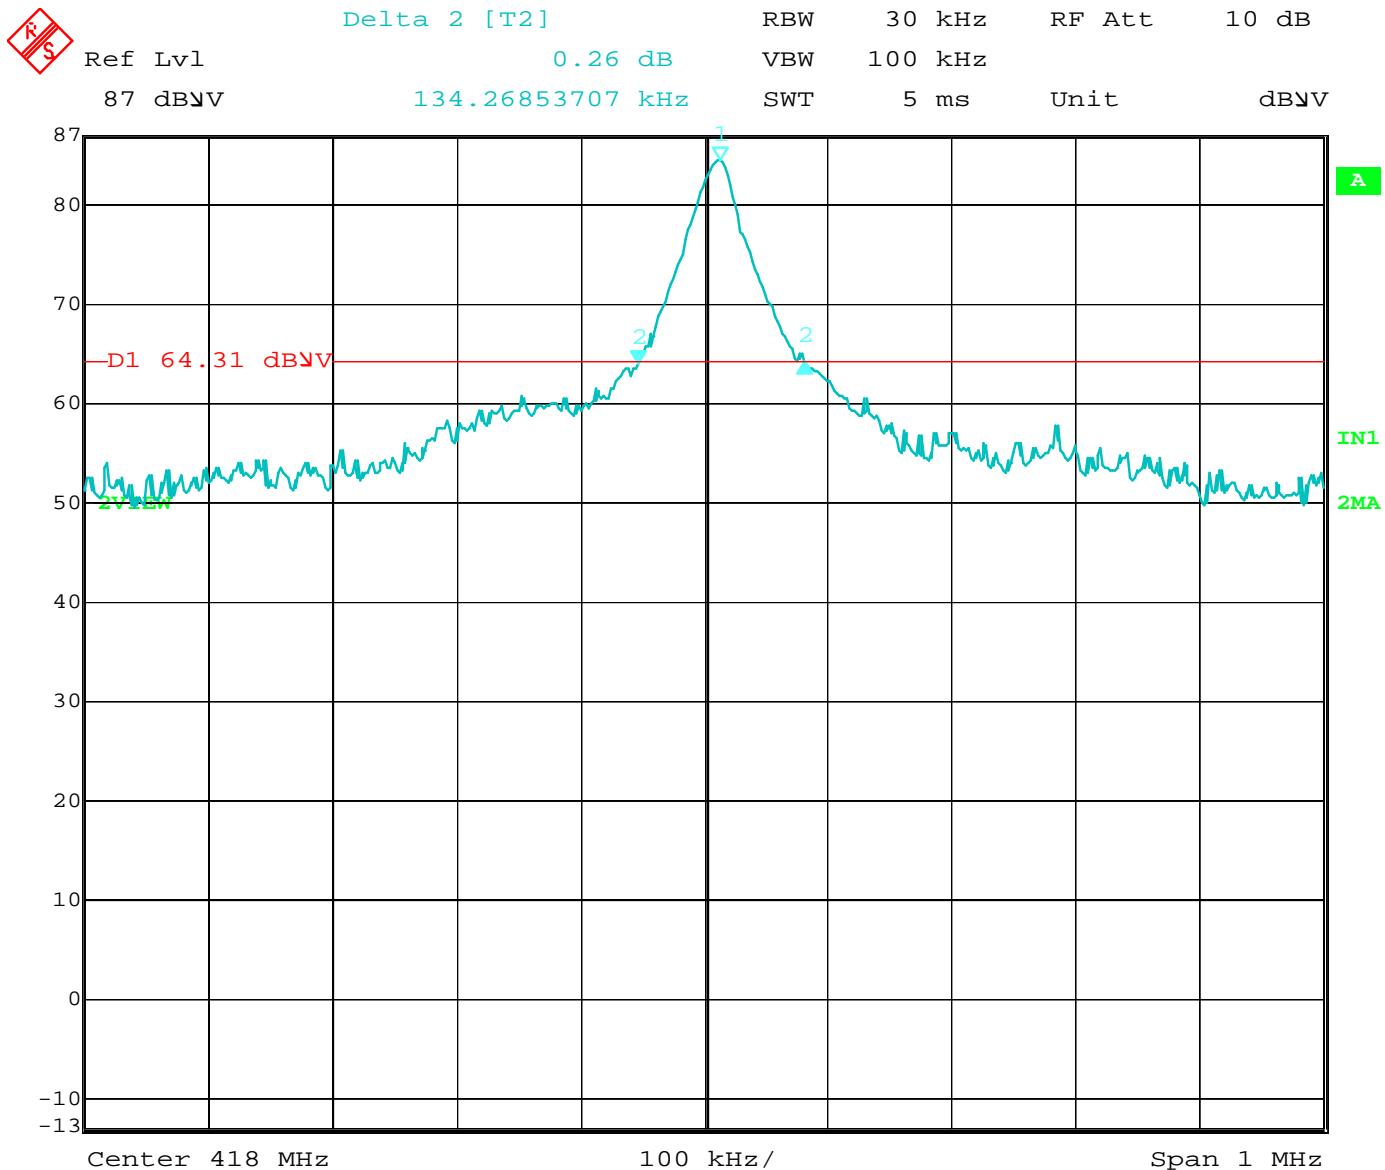

Date: 6.JUN.2013 13:14:10

### -20 dB Bandwidth Plot