

TABLE OF CONTENTS

<u>RULE</u>	<u>DESCRIPTION</u>	<u>PAGE</u>
	Test Report	1
2.1033(c)	General Information Required	2
2.1033(c) (14)	Rule Summary	5
	Standard Test Conditions and Engineering Practices	6
2.1046(a)	Carrier Output Power (Conducted)	7
2.1051	Unwanted Emissions (Transmitter Conducted)	9
2.1053(a)	Field Strength of Spurious Radiation	13
2.1049(c) (1)	Emission Masks (Occupied Bandwidth)	17
90.214	Transient Frequency Behavior	30
2.1047(a)	Audio Low Pass Filter (Voice Input)	40
2.1047(a)	Audio Frequency Response	43
2.1047(b)	Modulation Limiting	45
2.1055(a) (1)	Frequency Stability (Temperature Variation)	48
2.1055(b) (1)	Frequency Stability (Voltage Variation)	51
2.202(g)	Necessary Bandwidth and Emission Bandwidth	52


PAGE NO.

1 of 52.

Required information per ISO/IEC Guide 25-1990, paragraph 13.2:

a)

TEST REPORT

- b) Laboratory: M. Flom Associates, Inc.
(FCC: 31040/SIT) 3356 N. San Marcos Place, Suite 107
(Canada: IC 2044) Chandler, AZ 85225
- c) Report Number: d9960010
- d) Client: Racal Communications, Inc.
5 Research Place
Rockville, MD 20850
- e) Identification: PRC6894
FCC ID: OKC4101256
Description: VHF-FM Handheld Portable Transceiver
- f) EUT Condition: Not required unless specified in individual tests.
- g) Report Date: June 14, 1999
EUT Received: May 3, 1999
- h, j, k): As indicated in individual tests.
- i) Sampling method: No sampling procedure used.
- l) Uncertainty: In accordance with MFA internal quality manual.
- m) Supervised by:
- 
Morton Flom, P. Eng.
- n) Results: The results presented in this report relate only to the item tested.
- o) Reproduction: This report must not be reproduced, except in full, without written permission from this laboratory.

PAGE NO. 2 of 52.

LIST OF GENERAL INFORMATION REQUIRED FOR CERTIFICATION

IN ACCORDANCE WITH FCC RULES AND REGULATIONS,
VOLUME II, PART 2 AND TO

22, 74, 90, Confidentiality

Sub-part 2.1033

(c) (1): NAME AND ADDRESS OF APPLICANT:

Racal Communications, Inc.
5 Research Place
Rockville, MD 20850

MANUFACTURER:

Applicant

(c) (2): FCC ID: OKC4101256

MODEL NO: PRC6894

(c) (3): INSTRUCTION MANUAL(S):

PLEASE SEE ATTACHED EXHIBITS

(c) (4): TYPE OF EMISSION: 16K0F3E, 11K0F3E, 20K0F1E,
14K0F1E

(c) (5): FREQUENCY RANGE, MHz: 136 to 174


(c) (6): POWER RATING, Watts: 0.1 to 5
x Switchable Variable N/A

(c) (7): MAXIMUM POWER RATING, Watts: 300

PAGE NO.

3 of 52.

M. Flom Associates, Inc. is accredited by the American Association for Laboratory Association (A2LA) as shown in the scope below.



**THE AMERICAN
ASSOCIATION
FOR LABORATORY
ACCREDITATION**

ACCREDITED LABORATORY

A2LA has accredited


M. FLOM ASSOCIATES, INC.
Chandler, AZ

for technical competence in the field of

Electrical (EMC) Testing


The accreditation covers the specific tests and types of tests listed on the agreed scope of accreditation. This laboratory meets the requirements of ISO/IEC Guide 25-1990 "General Requirements for the Competence of Calibration and Testing Laboratories" (equivalent to relevant requirements of the ISO 9000 series of standards) and any additional program requirements in the identified field of testing.

Presented this 24th day of November, 1998.



Peter R. Hays
President
For the Accreditation Council
Certificate Number 1008.01
Valid to December 31, 2000

For tests or types of tests to which this accreditation applies, please refer to the laboratory's Electrical (EMC) Scope of Accreditation



American Association for Laboratory Accreditation

SCOPE OF ACCREDITATION TO ISO/IEC GUIDE 25-1990 AND EN 45001

M. FLOM ASSOCIATES, INC.
Electronic Testing Laboratory
3156 North San Marcos Place, Suite 107
Chandler, AZ 85224-1571
Morton Flom Phone: 602 934 3180

ELECTRICAL (EMC)

Valid to: December 31, 2000 Certificate Number: 1008-01

In recognition of the successful completion of the A2LA evaluation process, accreditation is granted to this laboratory to perform the following electromagnetic compatibility tests:

Tests	Standards
RF Emissions	FCC Part 15 (Subparts B and C) using ANSI C63.4-1992; CISPR 11; CISPR 13; CISPR 14; CISPR 22; EN 55011; EN 55013; EN 55014; EN 55022; EN 50081-1; EN 50081-2; FCC Part 18; ICES-003; AS/NZS 1044; AS/NZS 1633; AS/NZS 3548; AS/NZS 4251.1
RF Immunity	EN 50082-1; EN 50082-2; AS/NZS 4251.1
Radiated Susceptibility	EN 61000-4-3; ENV 50140; ENV 50204; IEC 1000-4-3; IEC 801-3
RSD	EN 61000-4-2; IEC 1000-4-2; IEC 801-2
EFT	EN 61000-4-4; IEC 1000-4-4; IEC 801-4
Surge	EN 61000-4-5; ENV 50142; IEC 1000-4-5; IEC 801-5
47 CFR (FCC)	2, 21, 22, 23, 24, 74, 80, 87, 98, 95, 97

Peter R. Hays

5301 Rockysdown Pike, Suite 350 • Frederick, MD 21704-8307 • Phone: 301 644 3288 • Fax: 301 642 2974

"This laboratory is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this report have been determined in accordance with the laboratory's terms of accreditation unless stated otherwise in the report."

Should this report contain any data for tests for which we are not accredited, or which have been undertaken by a subcontractor that is not A2LA accredited, such data would not be covered by this laboratory's A2LA accreditation.

PAGE NO.

4 of 52.

Subpart 2.1033 (continued)

(c) (8): VOLTAGES & CURRENTS IN ALL ELEMENTS IN FINAL R. F. STAGE,
INCLUDING FINAL TRANSISTOR OR SOLID STATE DEVICE:

COLLECTOR CURRENT, A = per manual
COLLECTOR VOLTAGE, Vdc = per manual
SUPPLY VOLTAGE, Vdc = 10.5

(c) (9): TUNE-UP PROCEDURE:

PLEASE SEE ATTACHED EXHIBITS

(c) (10): CIRCUIT DIAGRAM/CIRCUIT DESCRIPTION:

Including description of circuitry & devices provided for
determining and stabilizing frequency, for suppression of
spurious radiation, for limiting modulation and limiting
power.

PLEASE SEE ATTACHED EXHIBITS

(c) (11): LABEL INFORMATION:

PLEASE SEE ATTACHED EXHIBITS

(c) (12): PHOTOGRAPHS:

PLEASE SEE ATTACHED EXHIBITS

(c) (13): DIGITAL MODULATION DESCRIPTION:

ATTACHED EXHIBITS
x N/A

(c) (14): TEST AND MEASUREMENT DATA:

FOLLOWS

PAGE NO.

5 of 52.

Sub-part

2.1033(c) (14):TEST AND MEASUREMENT DATA

All tests and measurement data shown were performed in accordance with FCC Rules and Regulations, Volume II; Part 2, Sub-part J, Sections 2.947, 2.1033(c), 2.1041, 2.1046, 2.1047, 2.1079, 2.1051, 2.1053, 2.1055, 2.1057 and the following individual Parts:

- _____ 21 - Domestic Public Fixed Radio Services
- x _____ 22 - Public Mobile Services
- _____ 22 Subpart H - Cellular Radiotelephone Service
- _____ 22.901(d) - Alternative technologies and auxiliary services
- _____ 23 - International Fixed Public Radiocommunication services
- _____ 24 - Personal Communications Services
- x _____ 74 Subpart H - Low Power Auxiliary Stations
- _____ 80 - Stations in the Maritime Services
- _____ 80 Subpart E - General Technical Standards
- _____ 80 Subpart F - Equipment Authorization for Compulsory Ships
- _____ 80 Subpart K - Private Coast Stations and Marine Utility Stations
- _____ 80 Subpart S - Compulsory Radiotelephone Installations for Small Passenger Boats
- _____ 80 Subpart T - Radiotelephone Installation Required for Vessels on the Great Lakes
- _____ 80 Subpart U - Radiotelephone Installations Required by the Bridge-to-Bridge Act
- _____ 80 Subpart V - Emergency Position Indicating Radiobeacons (EPIRB'S)
- _____ 80 Subpart W - Global Maritime Distress and Safety System (GMDSS)
- _____ 80 Subpart X - Voluntary Radio Installations
- _____ 87 - Aviation Services
- x _____ 90 - Private Land Mobile Radio Services
- _____ 94 - Private Operational-Fixed Microwave Service
- _____ 95 Subpart A - General Mobile Radio Service (GMRS)
- _____ 95 Subpart C - Radio Control (R/C) Radio Service
- _____ 95 Subpart D - Citizens Band (CB) Radio Service
- _____ 95 Subpart E - Family Radio Service
- _____ 95 Subpart F - Interactive Video and Data Service (IVDS)
- _____ 101 - Fixed Microwave Services

PAGE NO.

6 of 52.

STANDARD TEST CONDITIONS
and
ENGINEERING PRACTICES

Except as noted herein, the following conditions and procedures were observed during the testing:

In accordance with ANSI C63.4-1992, section 6.1.9, and unless otherwise indicated in the specific measurement results, the ambient temperature of the actual EUT was maintained within the range of 10° to 40°C (50° to 104 °F) unless the particular equipment requirements specify testing over a different temperature range. Also, unless otherwise indicated, the humidity levels were in the range of 10% to 90% relative humidity.

Prior to testing, the EUT was tuned up in accordance with the manufacturer's alignment procedures. All external gain controls were maintained at the position of maximum and/or optimum gain throughout the testing.

Measurement results, unless otherwise noted, are worst case measurements.

PAGE NO. 7 of 52.
NAME OF TEST: Carrier Output Power (Conducted)
SPECIFICATION: 47 CFR 2.1046(a)
GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.1
TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE

1. The EUT was connected to a resistive coaxial attenuator of normal load impedance, and the unmodulated output power was measured by means of an R. F. Power Meter.
2. Measurement accuracy is $\pm 3\%$.

MEASUREMENT RESULTS
(Worst case)

FREQUENCY OF CARRIER, MHz = 155.2, 136.1, 173.9

POWER SETTING	R. F. POWER, WATTS
Low	0.1
High	5

SUPERVISED BY:



Morton Flom, P. Eng.

PAGE NO.

8 of 52.

TRANSMITTER POWER CONDUCTED MEASUREMENTS

TEST 1: R. F. POWER OUTPUT
 TEST 2: FREQUENCY STABILITY

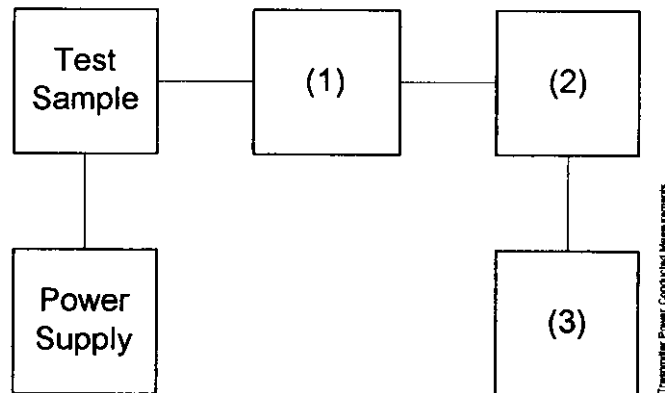

Asset	Description	s/n
(1)	<u>COAXIAL ATTENUATOR</u>	
_____	i00122 Narda 766-10	7802
_____	i00123 Narda 766-10	7802A
_____	i00069 Bird 8329 (30 dB)	1006
<u>x</u>	i00113 Sierra 661A-3D	1059
(2)	<u>POWER METERS</u>	
_____	i00014 HP 435A	1733A05836
<u>x</u>	i00039 HP 436A	2709A26776
<u>x</u>	i00020 HP 8901A POWER MODE	2105A01087
(3)	<u>FREQUENCY COUNTER</u>	
_____	i00042 HP 5383A	1628A00959
<u>x</u>	i00019 HP 5334B	2704A00347
<u>x</u>	i00020 HP 8901A FREQUENCY MODE	2105A01087

PAGE NO. 9 of 52.
NAME OF TEST: Unwanted Emissions (Transmitter Conducted)
SPECIFICATION: 47 CFR 2.1051
GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.13
TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE

1. The emissions were measured for the worst case as follows:
 - (a): within a band of frequencies defined by the carrier frequency plus and minus one channel.
 - (b): from the lowest frequency generated in the EUT and to at least the 10th harmonic of the carrier frequency, or 40 GHz, whichever is lower.
2. The magnitude of spurious emissions that are attenuated more than 20 dB below the permissible value need not be specified.

3. MEASUREMENT RESULTS: ATTACHED FOR WORST CASE

FREQUENCY OF CARRIER, MHz = 155.2, 136.1, 173.9

SPECTRUM SEARCHED, GHz = 0 to 10 x F_c

MAXIMUM RESPONSE, Hz = 2820

ALL OTHER EMISSIONS = ≥ 20 dB BELOW LIMIT

LIMIT(S), dBc

- (50+10xLOG P) = -40 (0.1 Watt)

- (50+10xLOG P) = -57 (5 Watts)

- (43+10xLOG P) = -33 (0.1 Watt)

- (43+10xLOG P) = -50 (5 Watts)

SUPERVISED BY:




Morton Flom, P. Eng.

PAGE NO.

10 of 52.

TRANSMITTER SPURIOUS EMISSION

TEST A. OCCUPIED BANDWIDTH (IN-BAND SPURIOUS)
 TEST B. OUT-OF-BAND SPURIOUS

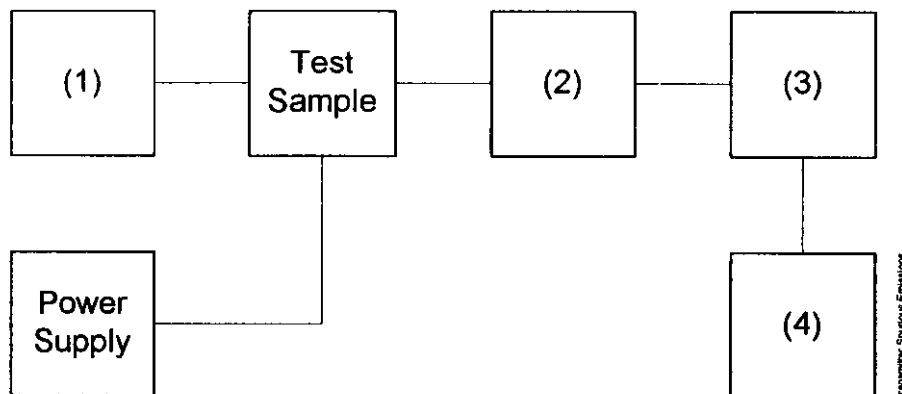

Asset	Description	s/n
(1) <u>AUDIO OSCILLATOR/GENERATOR</u>		
_____	i00010 HP 204D	1105A04683
_____	i00017 HP 8903A	2216A01753
<u>x</u>	i00012 HP 3312A	1432A11250
(2) <u>COAXIAL ATTENUATOR</u>		
_____	i00122 Narda 766-10	7802
_____	i00123 Narda 766-10	7802A
<u>x</u>	i00069 Bird 8329 (30 dB)	1006
<u>x</u>	i00113 Sierra 661A-3D	1059
(3) <u>FILTERS; NOTCH, HP, LP, BP</u>		
<u>x</u>	i00126 Eagle TNF-1	100-250
<u>x</u>	i00125 Eagle TNF-1	50-60
<u>x</u>	i00124 Eagle TNF-1	250-850
(4) <u>SPECTRUM ANALYZER</u>		
<u>x</u>	i00048 HP 8566B	2511A01467
_____	i00029 HP 8563E	3213A00104

PAGE NO. 11 of 52.

NAME OF TEST: Unwanted Emissions (Transmitter Conducted)

STATE: 1:Low Power F1E & F3E g9960065: 1999-Jun-10 Thu 12:22:00

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	LEVEL, dBm	LEVEL, dBc	MARGIN, dB
155.200000	310.406000	-32.1	-55.9	-19.1
155.200000	465.988000	-57.6	-81.4	-44.6
155.200000	621.168000	-56.4	-80.2	-43.4
155.200000	776.221000	-57.7	-81.5	-44.7
155.200000	931.121000	-57.2	-81	-44.2
155.200000	1085.944000	-57.8	-81.6	-44.8
155.200000	1242.045000	-57.2	-81	-44.2
155.200000	1396.563000	-57.1	-80.9	-44.1
155.200000	1552.085000	-57.8	-81.6	-44.8
155.200000	1707.280000	-56.5	-80.3	-43.5
155.200000	1862.837000	-56.2	-80	-43.2
155.200000	2017.717000	-56	-79.8	-43
155.200000	2172.522000	-55.7	-79.5	-42.7
155.200000	2328.294000	-56.6	-80.4	-43.6

NAME OF TEST: Unwanted Emissions (Transmitter Conducted)

STATE: 1:Low Power F1E & F3E g9960069: 1999-Jun-10 Thu 13:35:00

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	LEVEL, dBm	LEVEL, dBc	MARGIN, dB
173.900000	348.210000	-34.5	-58.3	-21.5
173.900000	521.235000	-57.4	-81.2	-44.4
173.900000	695.919000	-57.4	-81.2	-44.4
173.900000	869.948000	-57	-80.8	-44
173.900000	1043.504000	-57.3	-81.1	-44.3
173.900000	1217.493000	-56.7	-80.5	-43.7
173.900000	1391.035000	-57.4	-81.2	-44.4
173.900000	1565.366000	-55.5	-79.3	-42.5
173.900000	1739.049000	-57.3	-81.1	-44.3
173.900000	1913.262000	-56.7	-80.5	-43.7
173.900000	2086.932000	-56.8	-80.6	-43.8
173.900000	2260.304000	-56.6	-80.4	-43.6
173.900000	2434.346000	-56.3	-80.1	-43.3
173.900000	2608.453000	-58.4	-82.2	-45.4

NAME OF TEST: Unwanted Emissions (Transmitter Conducted)

STATE: 1:Low Power F1E & F3E g9960067: 1999-Jun-10 Thu 12:29:00

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	LEVEL, dBm	LEVEL, dBc	MARGIN, dB
136.100000	272.360000	-33.6	-57.4	-13.6
136.100000	408.300000	-47.5	-71.3	-27.5
136.100000	544.006000	-58.1	-81.9	-38.1
136.100000	680.167000	-57.2	-81	-37.2
136.100000	817.013000	-57.3	-81.1	-37.3
136.100000	952.677000	-58.2	-82	-38.2
136.100000	1088.728000	-57.7	-81.5	-37.7
136.100000	1225.348000	-58	-81.8	-38
136.100000	1361.246000	-57	-80.8	-37
136.100000	1497.275000	-57.9	-81.7	-37.9
136.100000	1633.003000	-56.9	-80.7	-36.9
136.100000	1769.329000	-56.4	-80.2	-36.4
136.100000	1904.931000	-56.4	-80.2	-36.4
136.100000	2041.739000	-56	-79.8	-36

PAGE NO. 12 of 52.

NAME OF TEST: Unwanted Emissions (Transmitter Conducted)

STATE: 2:High Power F1E & F3E g9960064: 1999-Jun-10 Thu 12:16:00

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	LEVEL, dBm	LEVEL, dBc	MARGIN, dB
155.200000	310.407000	-30.3	-67.2	-17.3
155.200000	465.602000	-42.9	-79.8	-29.9
155.200000	620.832000	-47.6	-84.5	-34.6
155.200000	775.692000	-47.3	-84.2	-34.3
155.200000	930.860000	-47.9	-84.8	-34.9
155.200000	1086.660000	-47	-83.9	-34
155.200000	1241.778000	-47.5	-84.4	-34.5
155.200000	1397.130000	-47	-83.9	-34
155.200000	1551.702000	-47.8	-84.7	-34.8
155.200000	1707.025000	-46.6	-83.5	-33.6
155.200000	1862.834000	-45.8	-82.7	-32.8
155.200000	2017.734000	-46.8	-83.7	-33.8
155.200000	2172.871000	-47.1	-84	-34.1
155.200000	2327.562000	-47	-83.9	-34

NAME OF TEST: Unwanted Emissions (Transmitter Conducted)

STATE: 2:High Power F1E & F3E g9960068: 1999-Jun-10 Thu 13:32:00

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	LEVEL, dBm	LEVEL, dBc	MARGIN, dB
173.900000	347.792000	-25.6	-62.5	-12.6
173.900000	522.132000	-48.3	-85.2	-35.3
173.900000	695.588000	-48	-84.9	-35
173.900000	869.000000	-46.5	-83.4	-33.5
173.900000	1043.545000	-47.3	-84.2	-34.3
173.900000	1217.355000	-47	-83.9	-34
173.900000	1390.738000	-47.3	-84.2	-34.3
173.900000	1565.403000	-47.6	-84.5	-34.6
173.900000	1738.706000	-47.1	-84	-34.1
173.900000	1912.957000	-46.3	-83.2	-33.3
173.900000	2086.601000	-47	-83.9	-34
173.900000	2260.257000	-45.3	-82.2	-32.3
173.900000	2434.211000	-45.9	-82.8	-32.9
173.900000	2608.759000	-48.6	-85.5	-35.6

NAME OF TEST: Unwanted Emissions (Transmitter Conducted)

STATE: 2:High Power F1E & F3E g9960066: 1999-Jun-10 Thu 12:27:00

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	LEVEL, dBm	LEVEL, dBc	MARGIN, dB
136.100000	272.420000	-30.4	-67.3	-10.4
136.100000	408.298000	-23.2	-60.1	-3.2
136.100000	544.179000	-48.5	-85.4	-28.5
136.100000	680.507000	-47.3	-84.2	-27.3
136.100000	816.889000	-47.8	-84.7	-27.8
136.100000	952.545000	-48.4	-85.3	-28.4
136.100000	1088.452000	-47.5	-84.4	-27.5
136.100000	1225.270000	-47.7	-84.6	-27.7
136.100000	1360.872000	-47.4	-84.3	-27.4
136.100000	1497.288000	-47.6	-84.5	-27.6
136.100000	1632.744000	-46.8	-83.7	-26.8
136.100000	1768.950000	-46.9	-83.8	-26.9
136.100000	1905.670000	-45.1	-82	-25.1
136.100000	2041.024000	-46.7	-83.6	-26.7

PAGE NO. 13 of 52.
NAME OF TEST: Field Strength of Spurious Radiation
SPECIFICATION: 47 CFR 2.1053(a)
GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.12
TEST EQUIPMENT: As per attached page


MEASUREMENT PROCEDURE

1. A description of the measurement facilities was filed with the FCC and was found to be in compliance with the requirements of Section 2.948, by letter from the FCC dated March 3, 1997, FILE 31040/SIT. All pertinent changes will be reported to the Commission by up-date prior to March 2000.
2. At first, in order to locate all spurious frequencies and approximate amplitudes, and to determine proper equipment functioning, the test sample was set up at a distance of three meters from the test instrument. Valid spurious signals were determined by switching the power on and off.
3. In the field, the test sample was placed on a wooden turntable above ground at three (or thirty) meters away from the search antenna. Excess power leads were coiled near the power supply.

The cables were oriented in order to obtain the maximum response. At each emission frequency, the turntable was rotated and the search antennas were raised and lowered vertically.
4. The emission was observed with both a vertically polarized and a horizontally polarized search antenna and the worst case was used.
6. The field strength of each emission within 20 dB of the limit was recorded and corrected with the appropriate cable and transducer factors.
7. The worst case for all channels is shown.
8. Measurement results: ATTACHED FOR WORST CASE

PAGE NO.

14 of 52.

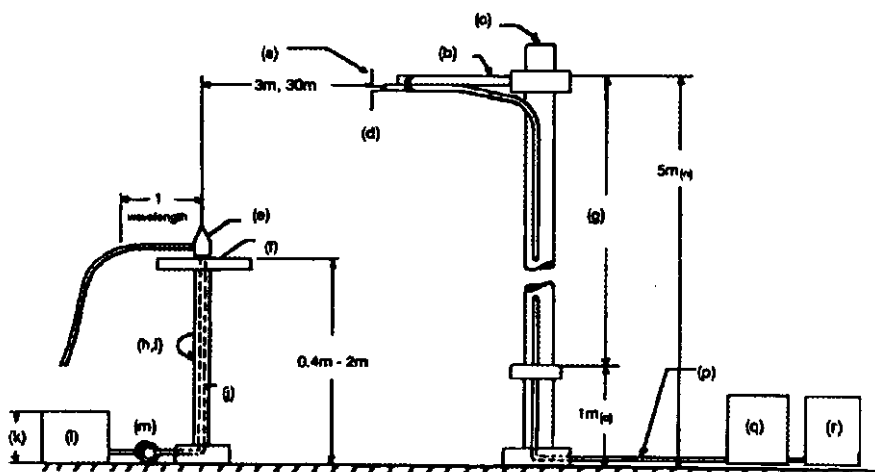RADIATED TEST SETUP

NOTES:

- (a) Search Antenna - Rotatable on boom
 (b) Non-metallic boom
 (c) Non-metallic mast
 (d) Adjustable horizontally
 (e) Equipment Under Test
 (f) Turntable
 (g) Boom adjustable in height.
 (h) External control cables routed horizontally at least one wavelength.
 (i) Rotatable
 (j) Cables routed through hollow turntable center
 (k) 30 cm or less
 (l) External power source
 (m) 10 cm diameter coil of excess cable
 (n) 25 cm (V), 1 m-7 m (V, H)
 (o) 25 cm from bottom end of 'V', 1m normally
 (p) Calibrated Cable at least 10m in length
 (q) Amplifier (optional)
 (r) Spectrum Analyzer

Asset	Description	s/n	Cycle	Last Cal
-------	-------------	-----	-------	----------

Per ANSI C63.4-1992, 10.1.4

TRANSDUCER

___	i00065	EMCO 3109B 100Hz-50MHz	2336	12 mo.	
___	i00033	Singer 94593-1 10kHz-32MHz	0219	12 mo.	
x	i00088	EMCO 3109-B 25MHz-300MHz	2336	12 mo.	Oct-98
x	i00089	Apriel 2001 200MHz-1GHz	001500	12 mo.	Oct-98
x	i00103	EMCO 3115 1GHz-18GHz	9208-3925	12 mo.	Oct-98
___	i00085	EMCO 3116 10GHz-40GHz	2076	12 mo.	

AMPLIFIER

___	i00028	HP 8449A	2749A00121	12 mo.	Mar-99
-----	--------	----------	------------	--------	--------

SPECTRUM ANALYZER

___	i00029	HP 8563E	3213A00104	12 mo.	Aug-98
x	i00033	HP 85462A	3625A00357	12 mo.	Dec-98
___	i00048	HP 8566B	2511AD1467	6 mo.	Dec-98

PAGE NO. 15 of 52.

NAME OF TEST: Field Strength of Spurious Radiation

ALL OTHER EMISSIONS = \geq 20 dB BELOW LIMIT

EMISSION, MHz/HARMONIC	SPURIOUS LEVEL, dBc	
	Low	High
2nd to 10th	<-55	<-60

SUPERVISED BY:

M. Flom P. Eng.

Morton Flom, P. Eng.

PAGE NO.

16 of 52.

NAME OF TEST: Field Strength of Spurious Radiation
 g9960081: 1999-Jun-12 Sat 07:00:00
 STATE: 2:High Power

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	METER, dBuV	CF, dB	ERP, dBm	MARGIN, dB
136.100000	272.200050	29.58	17.91	-49.85	-29.9
155.200000	310.399900	31.79	18.87	-46.75	-26.7
173.900000	347.799800	36.06	21.1	-40.25	-20.2
136.100000	408.299900	40.97	23.8	-32.65	-12.6
155.200000	465.599850	29.57	23.76	-44.05	-24.1
173.900000	521.699850	28.88	24.56	-43.95	-24
136.100000	544.399750	36.33	25.41	-35.65	-15.7
155.200000	620.799900	13.75	27.48	-56.15	-36.2
136.100000	680.499700	17.08	28.2	-52.05	-32.1
173.900000	695.599950	15.61	28.35	-53.45	-33.4
155.200000	775.999950	15.95	29.5	-51.95	-32
136.100000	816.599500	17.72	29.95	-49.75	-29.7
173.900000	869.499350	15.02	30.11	-52.25	-32.3
155.200000	931.199850	21.01	33.18	-43.15	-23.2
136.100000	952.699500	13.77	35.18	-48.45	-28.5
173.900000	1043.399550	8.55	33.48	-55.35	-35.4
155.200000	1086.399950	7.46	33.94	-55.95	-36
136.100000	1088.799650	14.66	33.97	-48.75	-28.8
173.900000	1217.299500	6.76	35.23	-55.35	-35.4
136.100000	1224.899150	-2.02	35.31	-64.05	-44.1
155.200000	1241.599600	10.79	35.47	-51.15	-31.1
136.100000	1360.999050	2.29	36.55	-58.55	-38.6
173.900000	1391.199300	9.34	36.81	-51.25	-31.3
155.200000	1396.799500	6.75	36.86	-53.75	-33.8
155.200000	1551.999250	8.75	38.25	-50.35	-30.4
173.900000	1565.099850	-4.47	38.39	-63.45	-43.5
173.900000	1738.999550	-10.01	40.1	-67.25	-47.3

PAGE NO. 17 of 52.
NAME OF TEST: Emission Masks (Occupied Bandwidth)
SPECIFICATION: 47 CFR 2.1049(c) (1)
GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.11
TEST EQUIPMENT: As per previous page


MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up as shown on the following page, with the Spectrum Analyzer connected.
2. For EUTs supporting audio modulation, the audio signal generator was adjusted to the frequency of maximum response and with output level set for ± 2.5 kHz deviation (or 50% modulation). With level constant, the signal level was increased 16 dB.
3. For EUTs supporting digital modulation, the digital modulation mode was operated to its maximum extent.
4. The Occupied Bandwidth was measured with the Spectrum Analyzer controls set as shown on the test results.
5. MEASUREMENT RESULTS: ATTACHED

PAGE NO.

18 of 52.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g9950438: 1999-May-04 Tue 07:43:00
STATE: 1:Low Power

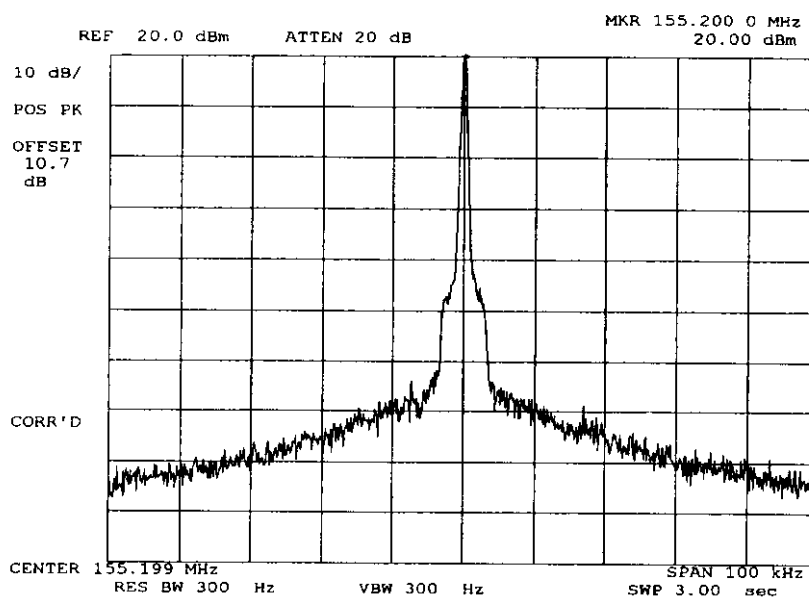

POWER:
MODULATION:

LOW
NONE


SUPERVISED BY:

Morton Flom P. Eng.
Morton Flom, P. Eng.

PAGE NO.

19 of 52.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g9950440: 1999-May-04 Tue 07:48:00
STATE: 1:Low Power

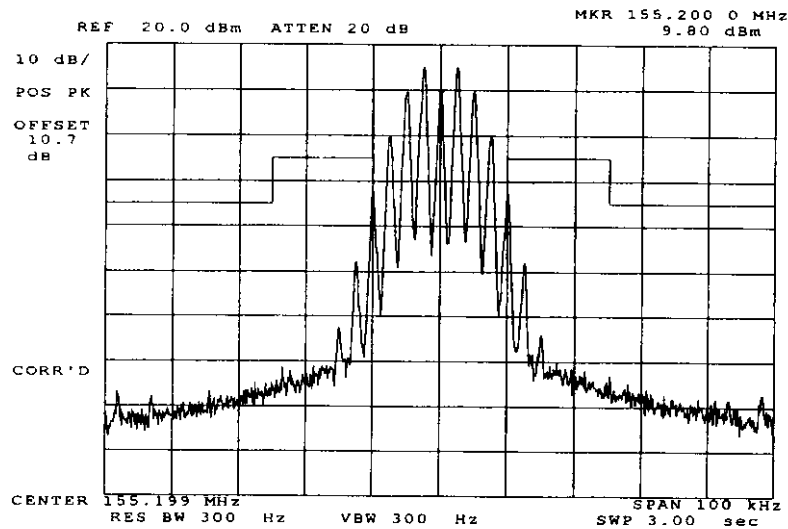

POWER:
MODULATION:

LOW
VOICE: 2500 Hz SINE WAVE
MASK: B, VHF/UHF 25kHz,
w/LPF


SUPERVISED BY:

Morton Flom, P. Eng.

PAGE NO.

20 of 52.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g9950442: 1999-May-04 Tue 07:57:00
STATE: 1:Low Power

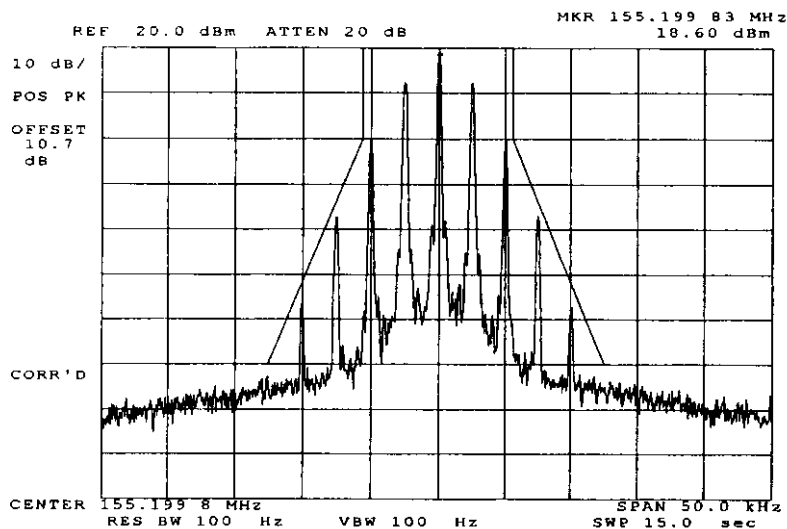

POWER:
MODULATION:


LOW
VOICE: 2500 Hz SINE WAVE
MASK: D, VHF/UHF 12.5kHz BW

SUPERVISED BY:

Morton Flom, P. Eng.

PAGE NO. 21 of 52.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g9960099: 1999-Jun-16 Wed 09:28:00
STATE: 1:Low Power

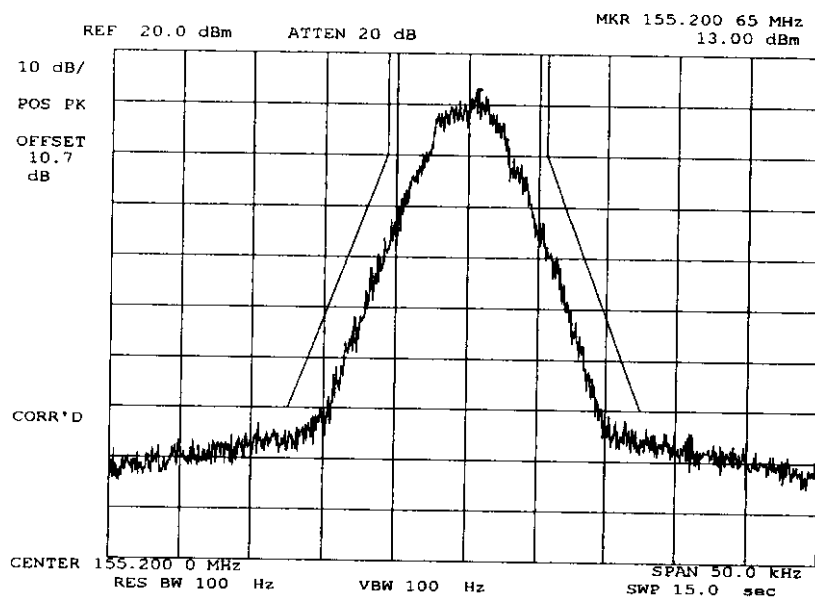

POWER:
MODULATION:

LOW
APCO PROJECT 25 DIGITIZED
VOICE
MASK: D, VHF/UHF 12.5kHz BW


SUPERVISED BY:

Morton Flom P. Eng.
Morton Flom, P. Eng.

PAGE NO.

22 of 52.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g9950459: 1999-May-04 Tue 13:54:00
STATE: 1:Low Power

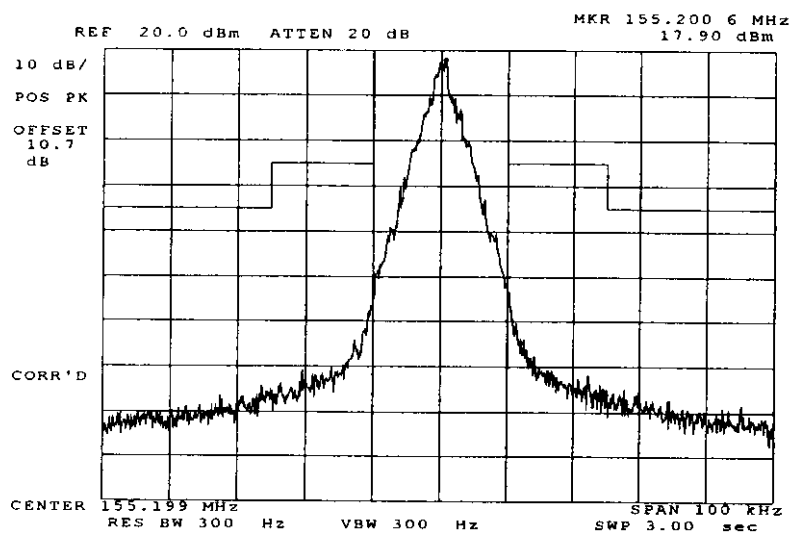

POWER:
MODULATION:

LOW
CVSD FSK VOICE 19200 BITS
PER SECOND
MASK: B, VHF/UHF 25kHz,
w/LPF


SUPERVISED BY:

Morton Flom P. Eng.
Morton Flom, P. Eng.

PAGE NO.

23 of 52.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g9960060: 1999-Jun-10 Thu 11:15:00
STATE: 1:Low Power

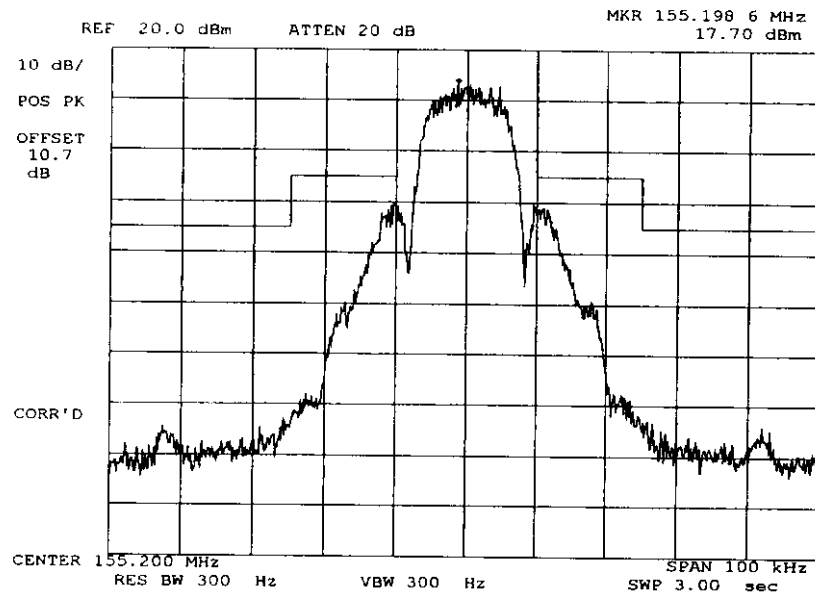

POWER:
MODULATION:

LOW
CVSD FSK DIGITIZED VOICE
MASK: B, VHF/UHF 25kHz,
w/LPF


SUPERVISED BY:

Morton Flom, P. Eng.

PAGE NO.

24 of 52.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g9950437: 1999-May-04 Tue 07:40:00
STATE: 2:High Power

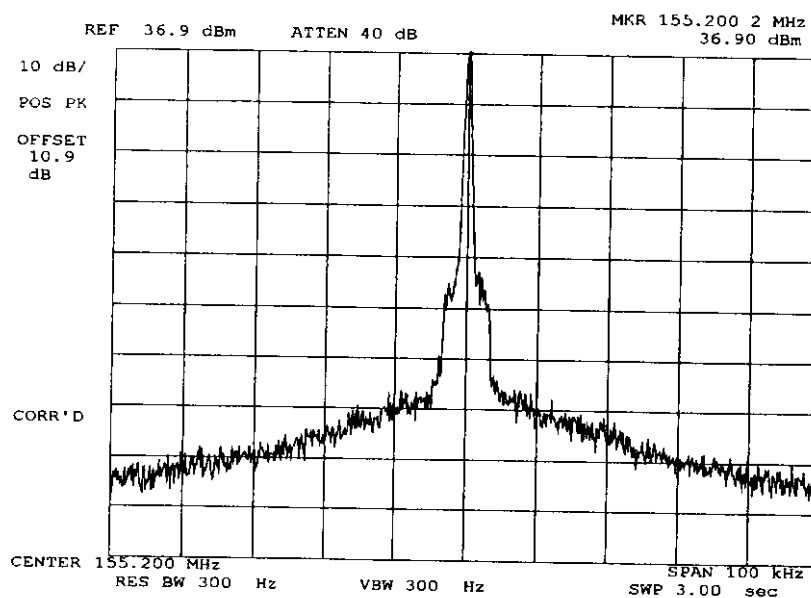

POWER:
MODULATION:

HIGH
NONE


SUPERVISED BY:

M. Flom P. Eng.
Morton Flom, P. Eng.

PAGE NO.

25 of 52.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g9950439: 1999-May-04 Tue 07:47:00
STATE: 2:High Power

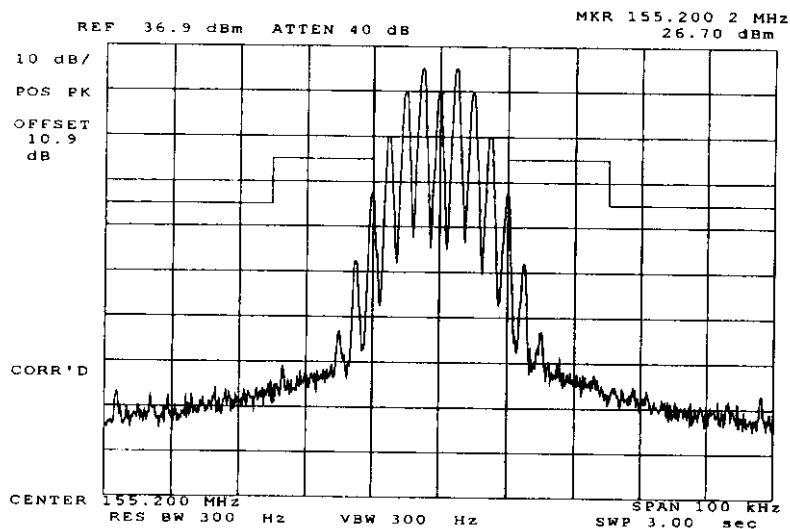

POWER:
MODULATION:

HIGH
VOICE: 2500 Hz SINE WAVE
MASK: B, VHF/UHF 25kHz,
w/LPF

SUPERVISED BY:


Morton Flom P. Eng.

Morton Flom, P. Eng.

PAGE NO.

26 of 52.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g9950441: 1999-May-04 Tue 07:55:00
STATE: 2:High Power

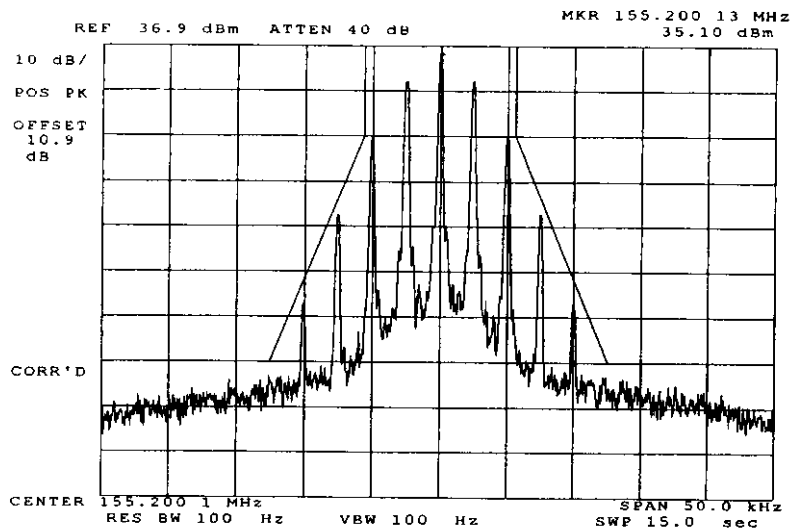

POWER:
MODULATION:

HIGH
VOICE: 2500 Hz SINE WAVE
MASK: D, VHF/UHF 12.5kHz BW


SUPERVISED BY:

Morton Flom P. Eng.
Morton Flom, P. Eng.

PAGE NO.

27 of 52.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g9960056: 1999-Jun-10 Thu 09:39:00
STATE: 2:High Power

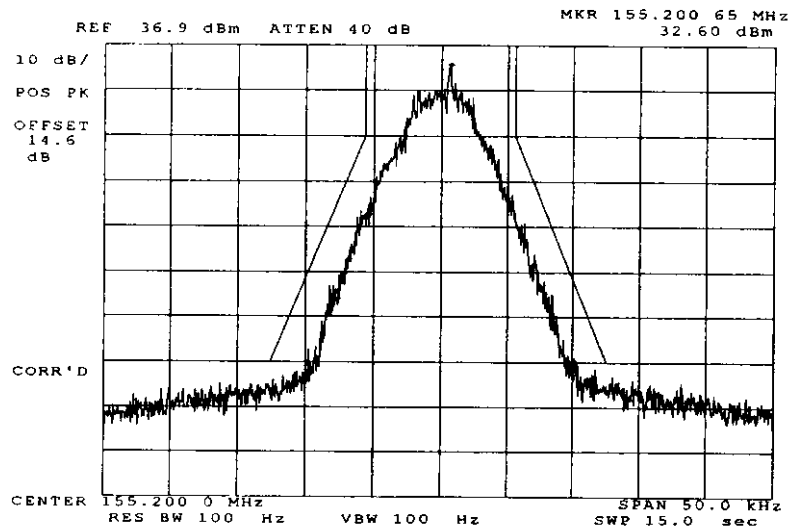

POWER:
MODULATION:

HIGH
APCO PROJECT 25 DIGITIZED
VOICE
MASK: D, VHF/UHF 12.5kHz BW


SUPERVISED BY:

M. Flom P. Eng
Morton Flom, P. Eng.

PAGE NO.

28 of 52.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g9960061: 1999-Jun-10 Thu 11:26:00
STATE: 2:High Power

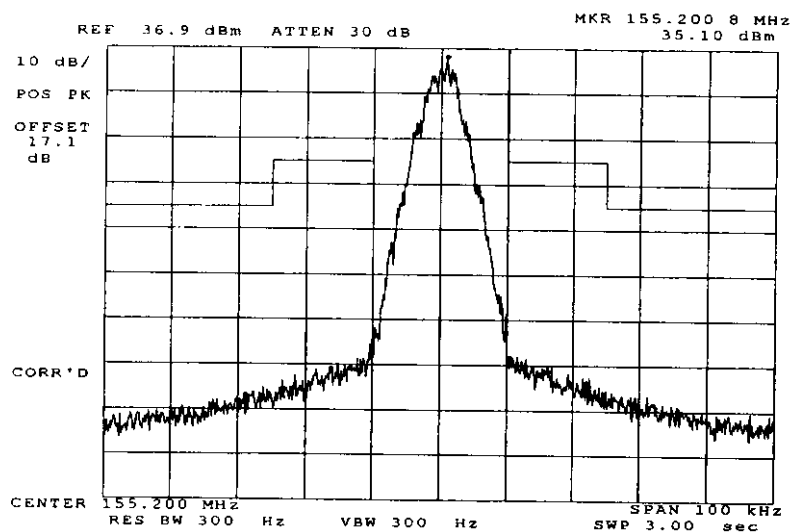

POWER:
MODULATION:


HIGH
CVSD APCO PROJECT 25
DIGITIZED VOICE
MASK: B, VHF/UHF 25kHz,
w/LPF

SUPERVISED BY:

Morton Flom P. Eng.
Morton Flom, P. Eng.

PAGE NO. 29 of 52.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g9950449: 1999-May-04 Tue 09:20:00
 STATE: 2:High Power

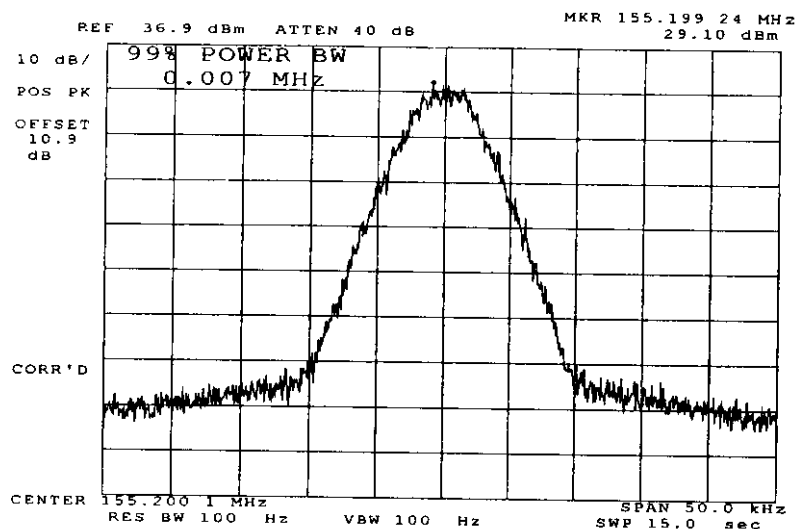

POWER:
 MODULATION:

HIGH
 CVSD FSK VOICE 9600 BITS
 PER SECOND
 99% POWER BANDWIDTH

SUPERVISED BY:

Morton Flom P. Eng.
 Morton Flom, P. Eng.

PAGE NO. 30 of 52.
NAME OF TEST: Transient Frequency Behavior
SPECIFICATION: 47 CFR 90.214
GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.19
TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE

1. The EUT was setup as shown on the attached page, following TIA/EIA-603 steps a, b, and c as a guide.
2. The transmitter was turned on.
3. Sufficient attenuation was provided so that the transmitter carrier level measured at the output of the combiner was 40 dB below the maximum input level of the test receiver. This level was recorded as step f.
4. The transmitter was turned off.
5. An RF signal generator (1) modulated with a 1 kHz tone at either 25, 12.5, or 6.25 kHz deviation, and set to the same frequency as the assigned transmitter frequency, (2) was adjusted to a level -20 dB below the level recorded for step f, as measured at the output of the combiner. This level was then fixed for the remainder of the test and is recorded at step h.
6. The oscilloscope was setup using TIA/EIA-603 steps j and k as a guide, and to either 10 ms/div (UHF) or 5 ms/div (VHF).
7. The 30 dB attenuator was removed, the transmitter was turned on, and the level of the carrier at the output of the combiner was recorded as step l.
8. The carrier on-time as referenced in TIA/EIA-603 steps m, n, and o was captured and plotted. The carrier off-time as referenced in TIA/EIA-603 steps p, q, r, and s was captured and plotted.

LEVELS MEASURED:

step f, dBm	= -20.4
step h, dBm	= -37.8
step l, dBm	= 12.8


SUPERVISED BY:



Morton Flom, P. Eng.

PAGE NO.

31 of 52.

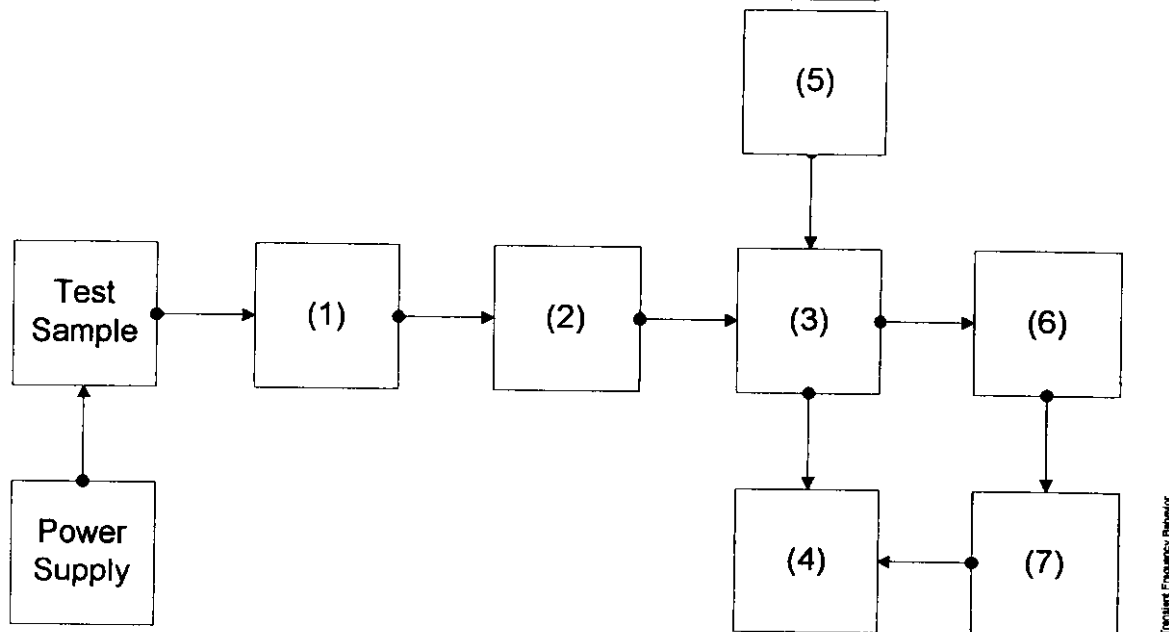
TRANSIENT FREQUENCY BEHAVIOR

Asset	Description	s/n
(1)	ATTENUATOR (Removed after 1st step)	
x	i00112 Philco 30 dB	989
(2)	ATTENUATOR	
	i00112 Philco 30 dB	989
	i00172 Bird 30 dB	989
x	i00122 Narda 10 dB	7802
	i00123 Narda 10 dB	7802A
	i00110 Kay Variable	145-387
(3)	COMBINER	
x	i00154 4 x 25 Ω COMBINER	154
(4)	CRYSTAL DETECTOR	
x	i00159 HP 8470B	1822A10054
(5)	RF SIGNAL GENERATOR	
	i00018 HP 8656A	2228A03472
	i00031 HP 8656A	2402A06180
x	i00067 HP 8920A	3345U01242
(6)	MODULATION ANALYZER	
x	i00020 HP 8901A	2105A01087
(7)	SCOPE	
x	i00030 HP 54502A	2927A00209

PAGE NO.

32 of 52.

NAME OF TEST: Transient Frequency Behavior
 g9960075: 1999-Jun-10 Thu 14:51:00
 STATE: 0:General

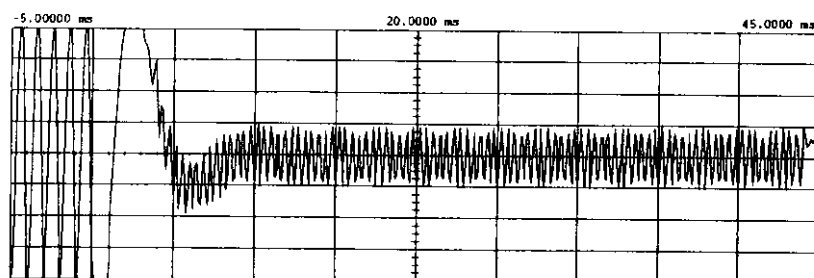

Main	Timebase 5.00 ms/div	Delay/Pos 20.0000 ms	Reference Center	Mode Repetitive
Channel 1	Sensitivity 275 mV/div	Offset 0.0000 V	Probe 1.000 :1	Coupling dc (1M Ohm)

Trigger mode : Edge
 On Negative Edge Of Chan2
 Trigger Level
 Chan2 = -4.000 mV (noise reject ON)
 Holdoff = 40.000 ns

POWER:
 MODULATION:
 DESCRIPTION:

n/a
 Ref Gen=12.5 kHz Deviation
 CARRIER ON TIME


SUPERVISED BY:

M. Flom P. Eng
 Morton Flom, P. Eng.

PAGE NO.

33 of 52.

NAME OF TEST: Transient Frequency Behavior
 g9960076: 1999-Jun-10 Thu 15:06:00
 STATE: 0:General

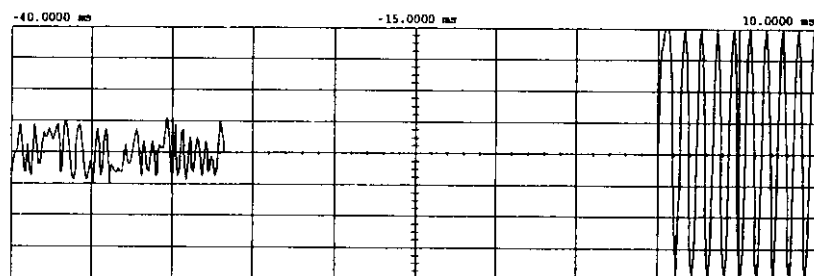

Main Timebase 5.00 ms/div Delay/Pos -15.0000 ms Reference Center Mode Repetitive
 Channel 1 Sensitivity 300 mV/div Offset 0.00000 V Probe 1.000 :1 Coupling dc (1M ohm)
 Trigger mode : Edge
 On Positive Edge Of Chan2
 Trigger Level
 Chan2 = -900.000 mV (noise reject ON)
 Holdoff = 40.000 ns

POWER:
 MODULATION:
 DESCRIPTION:

n/a
 Ref Gen=12.5 kHz Deviation
 CARRIER OFF TIME


SUPERVISED BY:

Morton Flom P. Eng
 Morton Flom, P. Eng.

PAGE NO.

34 of 52.

NAME OF TEST: Transient Frequency Behavior
 g9960073: 1999-Jun-10 Thu 14:13:00
 STATE: 0:General

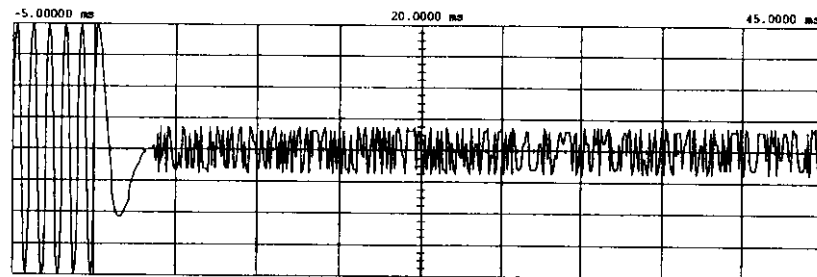

Main Timebase 5.00 ns/div Delay/Pos 20.0000 ns Reference Center Mode Repetitive
 Channel 1 Sensitivity 550 mV/div Offset 0.00000 V Probe 1.000 :1 Coupling dc (1M ohm)
 Trigger mode : Edge
 On Negative Edge Of Chan2
 Trigger Level
 Chan2 = -12.500 mV (noise reject ON)
 Holdoff = 40.000 ns

POWER:
 MODULATION:
 DESCRIPTION:

n/a
 Ref Gen=25 kHz Deviation
 CARRIER ON TIME


SUPERVISED BY:

Morton Flom P. Eng.
 Morton Flom, P. Eng.

PAGE NO.

35 of 52.

NAME OF TEST: Transient Frequency Behavior
g9960074: 1999-Jun-10 Thu 14:23:00
STATE: 0:General

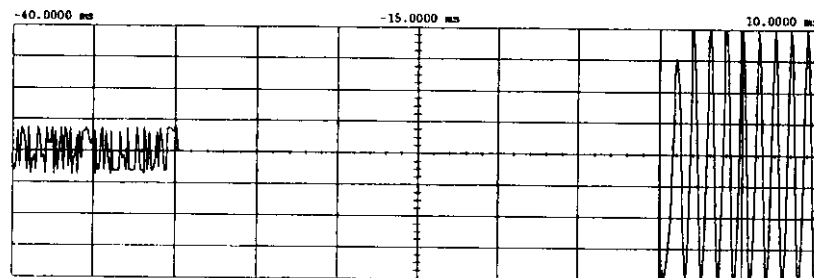

Main Timebase 5.00 ms/div Delay/Pos -15.0000 ms Reference Center Mode Repetitive
Channel 1 Sensitivity 550 mV/div Offset 0.00000 V Probe 1.000 :1 Coupling dc (1M ohm)
Trigger mode : Edge
On Positive Edge Of Chan2
Trigger Level
Chan2 = -1.07125 V (noise reject ON)
Holdoff = 40.000 ns

POWER:
MODULATION:
DESCRIPTION:

n/a
Ref Gen=25 kHz Deviation
CARRIER OFF TIME


SUPERVISED BY:

Morton Flom P. Eng.
Morton Flom, P. Eng.

PAGE NO.

36 of 52.

NAME OF TEST: Transient Frequency Behavior
 g9950452: 1999-May-04 Tue 10:34:00
 STATE: 0:General

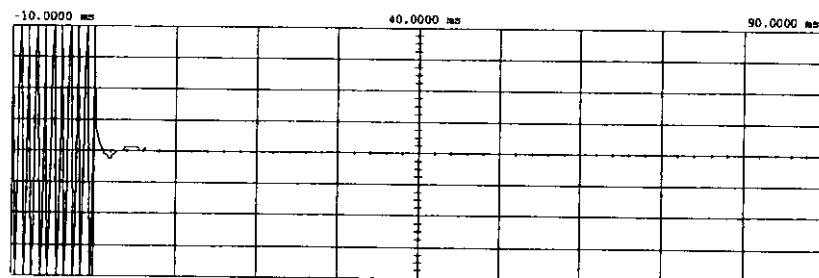

Main Timebase 10.0 ns/div Delay/Pcs 40.0000 ns Reference Center Mode Repetitive
 Channel 1 Sensitivity 275 mV/div Offset 0.00000 V Probe 1.000 :1 Coupling dc (1M ohm)
 Trigger mode : Edge
 On Negative Edge Of Chan2
 Trigger Level
 Chan2 = -3.500 mV (noise reject ON)
 Holdoff = 40.000 ns

12.5

-12.5

POWER:
 MODULATION:
 DESCRIPTION:

n/a
 Ref Gen=12.5 kHz Deviation
 CARRIER ON TIME

SUPERVISED BY:


Morton Flom, P. Eng.
 Morton Flom, P. Eng.

PAGE NO.

37 of 52.

NAME OF TEST: Transient Frequency Behavior
 g9950453: 1999-May-04 Tue 10:36:00
 STATE: 0:General

0

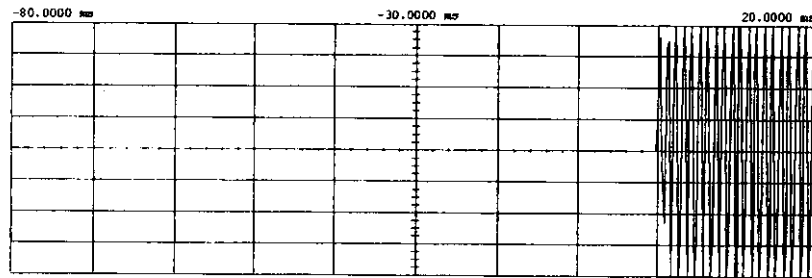

Main Timebase 10.0 ms/div Delay/Pos -30.0000 ms Reference Center Mode Repetitive
 Channel 1 Sensitivity 275 mV/div Offset 0.00000 V Probe 1.000 :1 Coupling dc (1M ohm)
 Trigger mode : Edge
 On Positive Edge Of Chan2
 Trigger Level
 Chan2 = -37.500 mV (noise reject ON)
 Holdoff = 40.000 ns

POWER:
 MODULATION:
 DESCRIPTION:

n/a
 Ref Gen=12.5 kHz Deviation
 CARRIER OFF TIME


SUPERVISED BY:

Morton Flom P. Eng.
 Morton Flom, P. Eng.

PAGE NO.

38 of 52.

NAME OF TEST: Transient Frequency Behavior
 g9950450: 1999-May-04 Tue 10:26:00
 STATE: 0:General

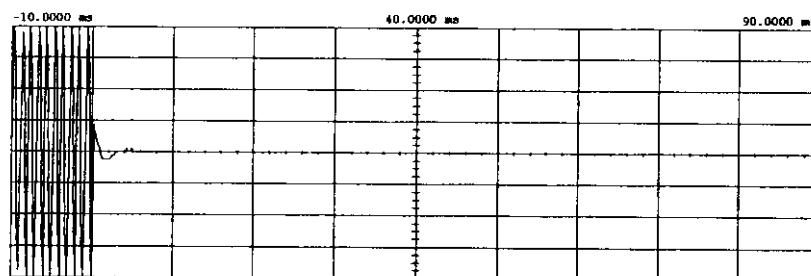

Main Timebase 10.0 ms/div Delay/Pos 40.0000 ms Reference Center Mode Repetitive
 Channel 1 Sensitivity 550 mV/div Offset 0.00000 V Probe 1.000 :1 Coupling dc (1M ohm)
 Trigger mode : Edge
 On Negative Edge Of Chan2
 Trigger Level
 Chan2 = -4.000 mV (noise reject ON)
 Holdoff = 40.000 ns

POWER:
 MODULATION:
 DESCRIPTION:

n/a
 Ref Gen=25 kHz Deviation
 CARRIER ON TIME


SUPERVISED BY:

Morton Flom P. Eng.
 Morton Flom, P. Eng.

PAGE NO.

39 of 52.

NAME OF TEST: Transient Frequency Behavior
g9950451: 1999-May-04 Tue 10:29:00
STATE: 0:General

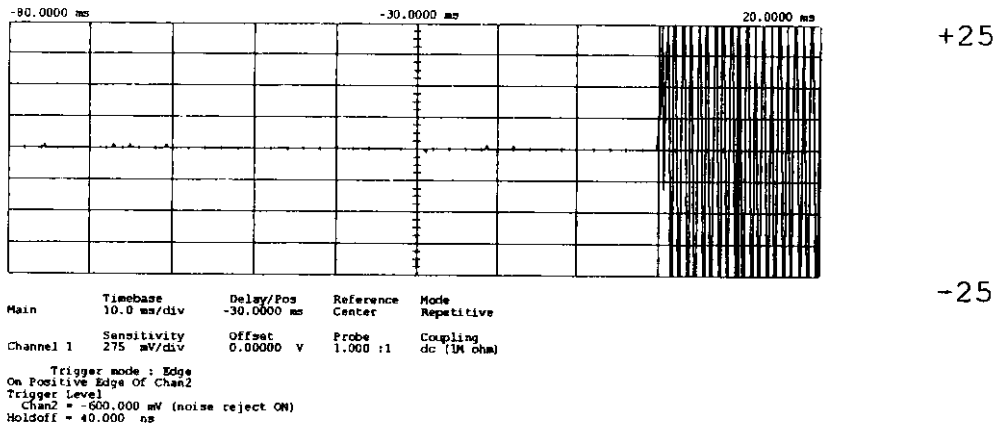

POWER:
MODULATION:
DESCRIPTION:

n/a
Ref Gen=25 kHz Deviation
CARRIER OFF TIME

SUPERVISED BY:

Morton Flom, P. Eng.

PAGE NO. 40 of 52.

NAME OF TEST: Audio Low Pass Filter (Voice Input)

SPECIFICATION: 47 CFR 2.1047(a)

GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.15

TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE


1. The EUT and test equipment were set up such that the audio input was connected at the input to the modulation limiter, and the modulated stage.
2. The audio output was connected at the output to the modulated stage.
3. MEASUREMENT RESULTS: ATTACHED

PAGE NO.

41 of 52.

TRANSMITTER TEST SET-UP

TEST A. MODULATION CAPABILITY/DISTORTION
 TEST B. AUDIO FREQUENCY RESPONSE
 TEST C. HUM AND NOISE LEVEL
 TEST D. RESPONSE OF LOW PASS FILTER
 TEST E. MODULATION LIMITING

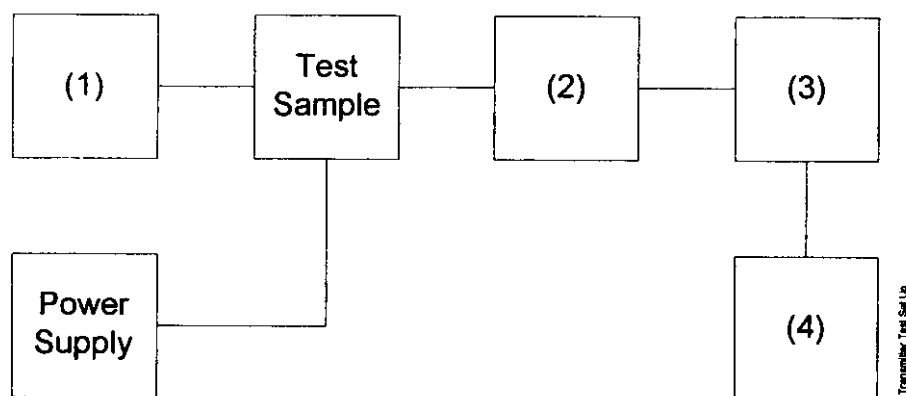


Asset	Description	s/n
(1)	<u>Audio Oscillator</u>	
	i00010 HP 204D	1105A04683
x	i00017 HP 8903A	2216A01753
x	i00118 HP 33120A	US36002064
(2)	<u>COAXIAL ATTENUATOR</u>	
	i00122 NARDA 766-10	7802
	i00123 NARDA 766-10	7802A
x	i00113 SIERRA 661A-3D	1059
	i00069 BIRD 8329 (30 dB)	10066
(3)	<u>MODULATION ANALYZER</u>	
x	i00020 HP 8901A	2105A01087
(4)	<u>AUDIO ANALYZER</u>	
x	i00017 HP 8903A	2216A01753

PAGE NO.

42 of 52.

NAME OF TEST: Audio Low Pass Filter (Voice Input)
g9950002: 1999-May-03 Mon 08:39:00
STATE: 0:General

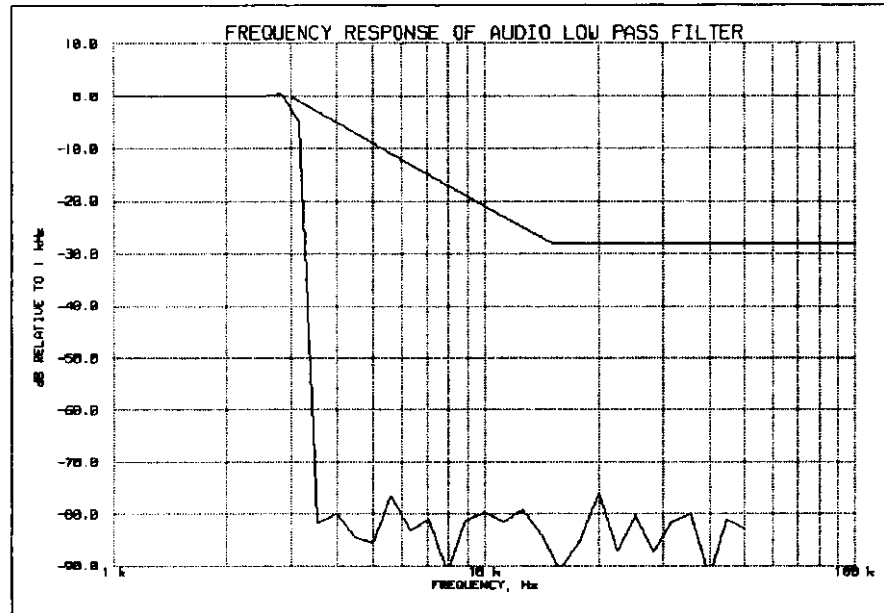

SUPERVISED BY:

Morton Flom P. Eng.
Morton Flom, P. Eng.

PAGE NO. 43 of 52.
NAME OF TEST: Audio Frequency Response
SPECIFICATION: 47 CFR 2.1047(a)
GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.6
TEST EQUIPMENT: As per previous page


MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up as shown on the following page.
2. The audio signal generator was connected to the audio input circuit/microphone of the EUT.
3. The audio signal input was adjusted to obtain 20% modulation at 1 kHz, and this point was taken as the 0 dB reference level.
4. With input levels held constant and below limiting at all frequencies, the audio signal generator was varied from 100 Hz to 50 kHz.
5. The response in dB relative to 1 kHz was then measured, using the HP 8901A Modulation Analyzer.
6. MEASUREMENT RESULTS: ATTACHED

PAGE NO.

44 of 52.

NAME OF TEST: Audio Frequency Response
 g9950004: 1999-May-03 Mon 08:51:00
 STATE: 0:General

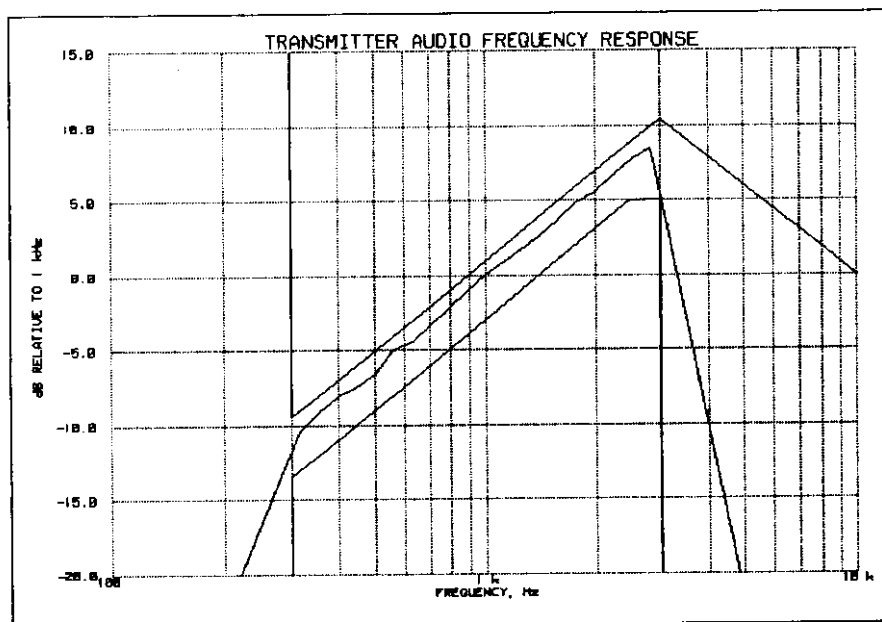

Additional points:

FREQUENCY, Hz	LEVEL, dB
300	-11.25
20000	-28.18
30000	-18.24
50000	-12.45

SUPERVISED BY:

Morton Flom, P. Eng.

PAGE NO. 45 of 52.
NAME OF TEST: Modulation Limiting
SPECIFICATION: 47 CFR 2.1047(b)
GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.3
TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE


1. The signal generator was connected to the input of the EUT as for "Frequency Response of the Modulating Circuit."
2. The modulation response was measured for each of three frequencies (one of which was the frequency of maximum response), and the input voltage was varied and was observed on an HP 8901A Modulation Analyzer.
3. The input level was varied from 30% modulation (± 1.5 kHz deviation) to at least 20 dB higher than the saturation point.
4. Measurements were performed for both negative and positive modulation and the respective results were recorded.
5. MEASUREMENT RESULTS: ATTACHED

PAGE NO.


46 of 52.

NAME OF TEST: Modulation Limiting
 g9950008: 1999-May-03 Mon 09:15:00
 STATE: 0:General

Positive
 Peaks:

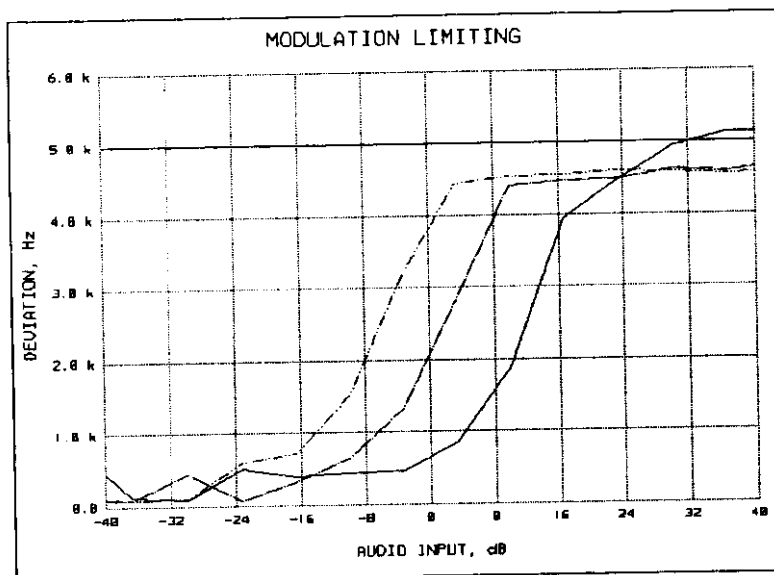

Negative
 Peaks:

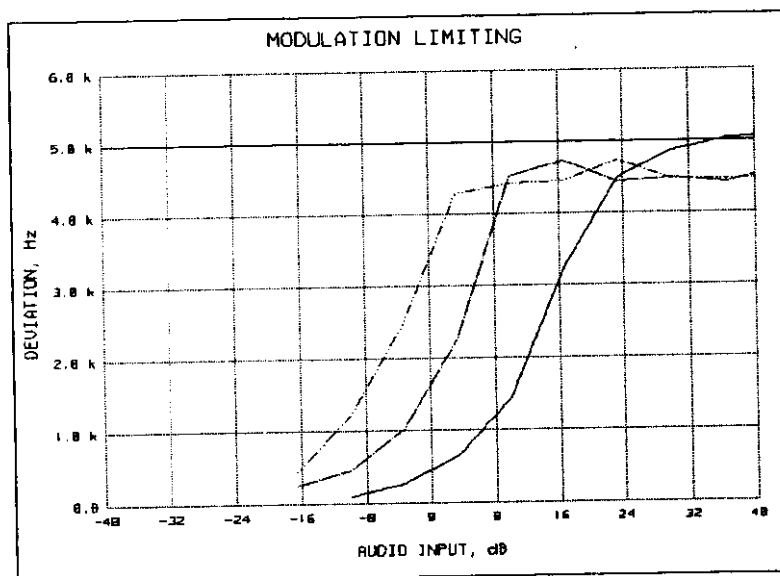

SUPERVISED BY:

Morton Flom, P. Eng.


Morton Flom, P. Eng.

PAGE NO.


47 of 52.

NAME OF TEST: Modulation Limiting
 g9950013: 1999-May-03 Mon 09:45:00
 STATE: 0:General

Positive
 Peaks:

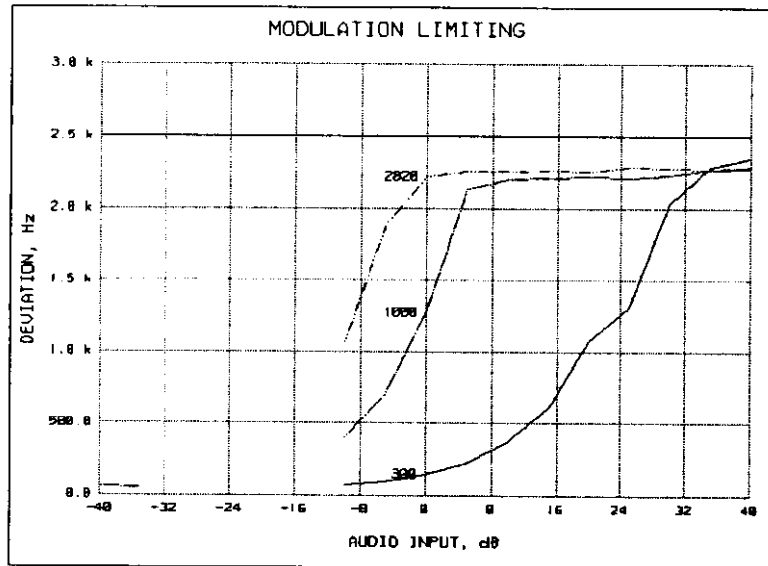

Negative
 Peaks:

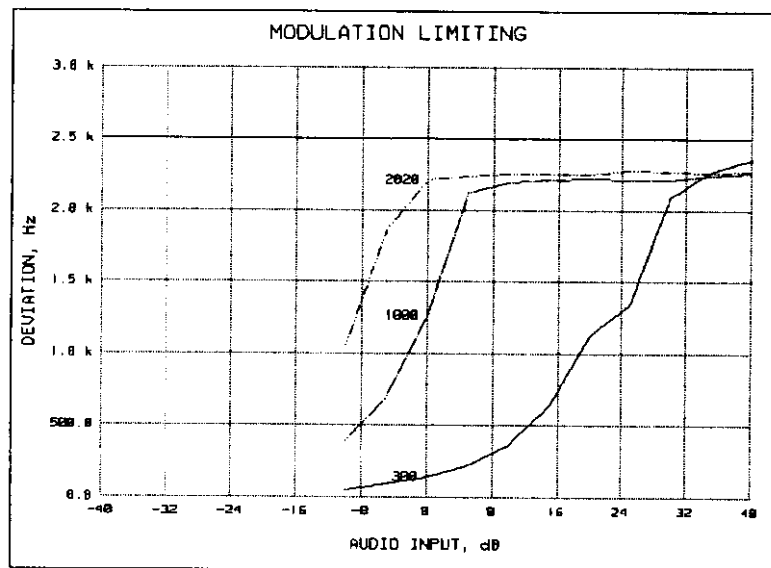

SUPERVISED BY:

Morton Flom P. Eng.

Morton Flom, P. Eng.

PAGE NO. 48 of 52.

NAME OF TEST: Frequency Stability (Temperature Variation)

SPECIFICATION: 47 CFR 2.1055(a)(1)

GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.2

TEST CONDITIONS: As Indicated

TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE


1. The EUT and test equipment were set up as shown on the following page.
2. With all power removed, the temperature was decreased to -30°C and permitted to stabilize for three hours. Power was applied and the maximum change in frequency was noted within one minute.
3. With power OFF, the temperature was raised in 10°C steps. The sample was permitted to stabilize at each step for at least one-half hour. Power was applied and the maximum frequency change was noted within one minute.
4. The temperature tests were performed for the worst case.
5. MEASUREMENT RESULTS: ATTACHED

PAGE NO.

49 of 52.

TRANSMITTER TEST SET-UP

TEST A. OPERATIONAL STABILITY
 TEST B. CARRIER FREQUENCY STABILITY
 TEST C. OPERATIONAL PERFORMANCE STABILITY
 TEST D. HUMIDITY
 TEST E. VIBRATION
 TEST F. ENVIRONMENTAL TEMPERATURE
 TEST G. FREQUENCY STABILITY: TEMPERATURE VARIATION
 TEST H. FREQUENCY STABILITY: VOLTAGE VARIATION

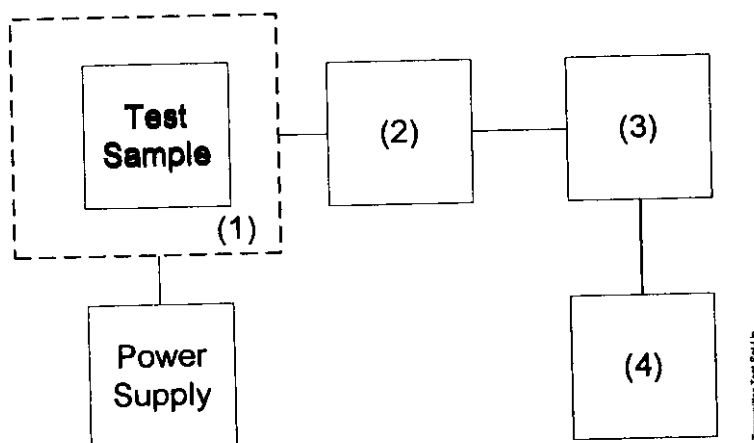


Asset	Description	s/n
(1)	<u>TEMPERATURE, HUMIDITY, VIBRATION</u>	
x	i00027 Tenny Temp. Chamber	9083-765-234
---	i00 Weber Humidity Chamber	
---	i00 L.A.B. RVH 18-100	
(2)	<u>COAXIAL ATTENUATOR</u>	
---	i00122 NARDA 766-10	7802
---	i00123 NARDA 766-10	7802A
x	i00113 SIERRA 661A-3D	1059
---	i00069 BIRD 8329 (30 dB)	10066
(3)	<u>R.F. POWER</u>	
---	i00014 HP 435A POWER METER	1733A05839
x	i00039 HP 436A POWER METER	2709A26776
x	i00020 HP 8901A POWER MODE	2105A01087
(4)	<u>FREQUENCY COUNTER</u>	
---	i00042 HP 5383A	1628A00959
x	i00019 HP 5334B	2704A00347
x	i00020 HP 8901A	2105A01087

PAGE NO.

50 of 52.

NAME OF TEST: Frequency Stability (Temperature Variation)
g9950014: 1999-May-04 Tue 16:19:00
STATE: 0:General

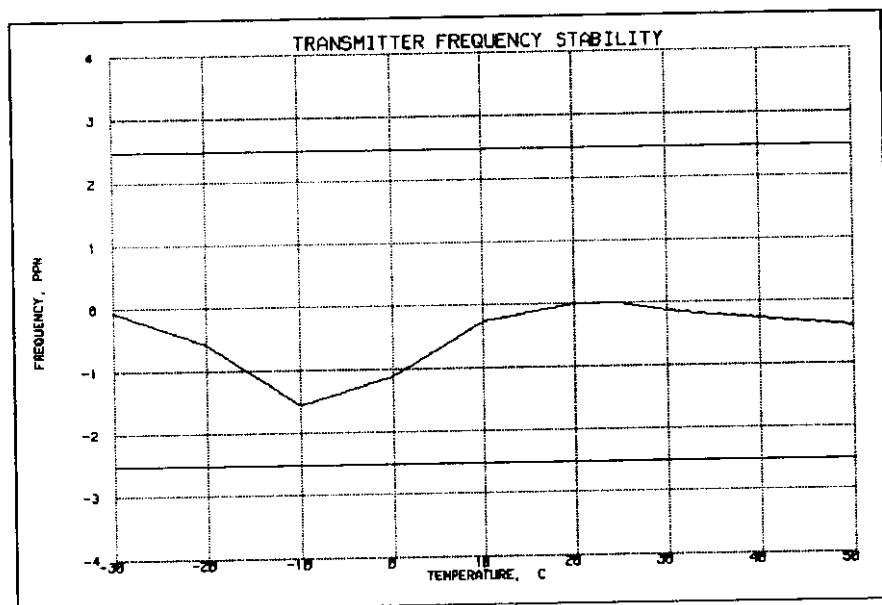

SUPERVISED BY:

M. Flor P. Eng.

Morton Flor, P. Eng.

PAGE NO. 51 of 52.

NAME OF TEST: Frequency Stability (Voltage Variation)

SPECIFICATION: 47 CFR 2.1055(b) (1)

GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.2

TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE

1. The EUT was placed in a temperature chamber at $25 \pm 5^\circ\text{C}$ and connected as for "Frequency Stability - Temperature Variation" test.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

RESULTS: Frequency Stability (Voltage Variation)
 g9950435: 1999-May-03 Mon 10:02:11
 STATE: 0:General

LIMIT, ppm = 2.5
 LIMIT, Hz = 388
 BATTERY END POINT (Voltage) = 7.5

% of STV	Voltage	Frequency, MHz	Change, Hz	Change, ppm
85	8.5	155.199980	-20	-0.13
100	10	155.200000	0	0.00
115	11.5	155.199980	-20	-0.13
75	7.5	155.199990	-10	-0.06

SUPERVISED BY:

Morton Flom P. Eng.
 Morton Flom, P. Eng.

PAGE NO. 52 of 52.

NAME OF TEST: Necessary Bandwidth and Emission Bandwidth

SPECIFICATION: 47 CFR 2.202(g)

MODULATION = 16K0F3E

NECESSARY BANDWIDTH CALCULATION:

MAXIMUM MODULATION (M), kHz	= 3
MAXIMUM DEVIATION (D), kHz	= 5
CONSTANT FACTOR (K)	= 1
NECESSARY BANDWIDTH (B _N), kHz	= (2 x M) + (2 x D x K)
	= 16.0

MODULATION = 11K0F3E

NECESSARY BANDWIDTH CALCULATION:

MAXIMUM MODULATION (M), kHz	= 3
MAXIMUM DEVIATION (D), kHz	= 2.5
CONSTANT FACTOR (K)	= 1
NECESSARY BANDWIDTH (B _N), kHz	= (2 x M) + (2 x D x K)
	= 11.0

MODULATION = 20K0F1E

NECESSARY BANDWIDTH:

NECESSARY BANDWIDTH (B _N), kHz	= 20
(measured at the 99.75% power bandwidth)	

MODULATION = 14K0F1E

NECESSARY BANDWIDTH:

NECESSARY BANDWIDTH (B _N), kHz	= 14
(measured at the 99.75% power bandwidth)	

SUPERVISED BY:

Morton Flom P. Eng.

Morton Flom, P. Eng.