



Valued Quality. Delivered.

TEST REPORT

Report No.: 16050394HKG-001

WowWee Group Limited

Application
For
Certification
(Original Grant)
(FCC ID: OKP0805D)

Transceiver

Prepared and Checked by:

Approved by:

Signed On File
Lok Chi Hang, Wil
Assistant Engineer

Wong Kwok Yeung, Kenneth
Senior Lead Engineer
Date: July 21, 2016

- Intertek's standard Terms and Conditions can be obtained at our website <http://www.intertek.com/terms/>.
- The test report only allows to be revised within the retention period unless further standard or the requirement was noticed.
- This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.
- © 2016 Intertek

Intertek Testing Services Hong Kong Ltd.

2/F., Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong.

Tel: (852) 2173 8888 Fax: (852) 2785 5487 Website: www.hk.intertek-ettsemko.com

INTERTEK TESTING SERVICES

GENERAL INFORMATION

Grantee:	WowWee Group Limited
Grantee Address:	Suite 301A-C, Energy Plaza, 92 Granville Road, Tsim Sha Tsui East, Kowloon, Hong Kong.
Contact Person:	Mr. Dennis Tsoi
Tel:	(852) 2739 5288
Fax:	(852) 2724 6931
e-mail:	dennistsoi@wowwee.com.hk
Manufacturer:	Everwin Toys (Dongguan) Co. Ltd.
Manufacturer Address:	Xie Keng Village, Qing Xi Town, Dongguan City, Guangdong Province, China.
Brand Name:	WowWee
Model:	0805
Type of EUT:	Transceiver
Description of EUT:	Chip - Charging Base
Serial Number:	N/A
FCC ID:	OKP0805D
Date of Sample Submitted:	May 05, 2016
Date of Test:	May 05, 2016 to May 31, 2016
Report No.:	16050394HKG-001
Report Date:	July 21, 2016
Environmental Conditions:	Temperature: +10 to 40°C Humidity: 10 to 90%

INTERTEK TESTING SERVICES

SUMMARY OF TEST RESULT

TEST SPECIFICATION	REFERENCE	RESULTS
Transmitter Power Line Conducted Emissions	15.207	Pass
Radiated Emission Radiated Emission on the Bandedge	15.249	Pass
Radiated Emission in Restricted Bands	15.205	Pass

The equipment under test is found to be complying with the following standards:
FCC Part 15, October 1, 2014 Edition

- Note: 1. The EUT uses a permanently attached antenna which, in accordance to section 15.203, is considered sufficient to comply with the provisions of this section.
2. Pursuant to FCC part 15 Section 15.215(c), the 20 dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over excepted variations in temperature and supply voltage were considered.

INTERTEK TESTING SERVICES

Table of Contents

1.0	<u>General Description</u>	1
1.1	Product Description.....	1
1.2	Related Submittal(s) Grants.....	1
1.3	Test Methodology	1
1.4	Test Facility.....	1
2.0	<u>System Test Configuration</u>	2
2.1	Justification	2
2.2	EUT Exercising Software	2
2.3	Special Accessories.....	2
2.4	Measurement Uncertainty.....	2
2.5	Support Equipment List and Description	2
3.0	<u>Emission Results</u>	3
3.1	Field Strength Calculation.....	3
3.2	Radiated Emission Configuration Photograph.....	4
3.3	Radiated Emission Data	4
3.4	Conducted Emission Configuration Photograph.....	4
3.5	Conducted Emission Data	4
4.0	<u>Equipment Photographs</u>	14
5.0	<u>Product Labelling</u>	14
6.0	<u>Technical Specifications</u>	14
7.0	<u>Instruction Manual</u>	14
8.0	<u>Miscellaneous Information</u>	15
8.1	Measured Bandwidth / Radiated Emission on the Bandedge.....	15
8.2	Discussion of Pulse Desensitization.....	18
8.3	Calculation of Average Factor.....	18
8.4	Emissions Test Procedures	20
9.0	<u>Equipment List</u>	24

INTERTEK TESTING SERVICES

1.0 General Description

1.1 Product Description

The Equipment Under Test (EUT) is a Bluetooth version 4.0 charging bed for a RC Dog (Chip) operating from 2402-2480MHz with 2MHz channel spacing. The EUT is powered by 100-120VAC~60Hz/12.0VDC Adaptor. After switch on the EUT and paired with RC Dog, the RC Dog can be charged with the RC Dog placed above the EUT.

Antenna Type: Internal, Integral

For electronic filing, the brief circuit description is saved with filename: descri.pdf.

1.2 Related Submittal(s) Grants

This is a single application for certification of a transceiver.

The Certification procedure of transceiver for this transceiver (with FCC ID: OKP0805A) is being processed as the same time of this application.

1.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). All radiated measurements were performed in an 3m Chamber. Preliminary scans were performed in the 3m Chamber only to determine worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the “**Justification Section**” of this Application.

1.4 Test Facility

The 3m Chamber and conducted measurement facility used to collect the radiated data is located at Workshop No. 3, G/F., World-Wide Industrial Centre, 43-47 Shan Mei Street, Fo Tan, Sha Tin, N.T., Hong Kong. This test facility and site measurement data have been placed on file with the FCC.

INTERTEK TESTING SERVICES

2.0 **System Test Configuration**

2.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.10 (2013).

The device was powered by a 100-120VAC~60Hz 1.4A/ Output: 12.0VDC 1.5A Adaptor (Model: RSS1006-180120-W2-B;).

For maximizing emissions, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. This step by step procedure for maximizing emissions led to the data reported in Exhibit 3.0.

The rear of unit shall be flushed with the rear of the table.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was mounted to a plastic stand if necessary and placed on the wooden turntable, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

For simultaneous transmission, both Bluetooth 4.0 (Charging Bed) and Bluetooth 4.0 (Chip-Dog) portions are also switched on when taking radiated emission for determining worst-case spurious emission under charging mode.

2.2 EUT Exercising Software

There was no special software to exercise the device. Once the unit is powered up, it transmits the RF signal continuously.

2.3 Special Accessories

There are no special accessories necessary for compliance of this product.

2.4 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test has been considered.

2.5 Support Equipment List and Description

AC Adaptor (Model: RSS1006-180120-W2-B; Input: 100-120VAC~60Hz 1.4A Output: 12.0V 1.5A) – Provided by Applicant
Chip-Dog (7.4VDC rechargeable battery) for charging mode – FCC ID: OKP0805A – Provided by Applicant

INTERTEK TESTING SERVICES

3.0 Emission Results

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

3.1 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any), Average Factor (optional) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG - AV$$

where

- FS = Field Strength in dB μ V/m
- RA = Receiver Amplitude (including preamplifier) in dB μ V
- CF = Cable Attenuation Factor in dB
- AF = Antenna Factor in dB
- AG = Amplifier Gain in dB
- AV = Average Factor in dB

In the following table(s), the reading shown on the data table reflects the preamplifier gain. An example for the calculations in the following table is as follows:

$$FS = RR + LF$$

where

- FS = Field Strength in dB μ V/m
- RR = RA - AG - AV in dB μ V
- LF = CF + AF in dB

Assume a receiver reading of 52.0 dB μ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB are added. The amplifier gain of 29 dB and average factor of 5 dB are subtracted, giving a field strength of 27 dB μ V/m. This value in dB μ V/m was converted to its corresponding level in μ V/m.

$$\begin{aligned} RA &= 52.0 \text{ dB}\mu\text{V/m} \\ AF &= 7.4 \text{ dB} & RR &= 18.0 \text{ dB}\mu\text{V} \\ CF &= 1.6 \text{ dB} & LF &= 9.0 \text{ dB} \\ AG &= 29.0 \text{ dB} \\ AV &= 5.0 \text{ dB} \\ FS &= RR + LF \\ FS &= 18 + 9 = 27 \text{ dB}\mu\text{V/m} \end{aligned}$$

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(27 \text{ dB}\mu\text{V/m})/20] = 22.4 \mu\text{V/m}$$

INTERTEK TESTING SERVICES

3.2 Radiated Emission Configuration Photograph

The worst case in radiated emission was found at 2402 MHz

For electronic filing, the worst case radiated emission configuration photographs are saved with filename: radiated photos.pdf.

3.3 Radiated Emission Data

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Judgment: Passed by 16.5 dB

3.4 Conducted Emission Configuration Photograph

The worst case in line-conducted emission was found at 0.42 MHz

For electronic filing, the worst case line-conducted configuration photographs are saved with filename: conducted photo.pdf.

3.5 Conducted Emission Data


For electronic filing, the graph and data table of conducted emission is saved with filename: conducted.pdf.

Judgment: Pass by 2.89 dB

INTERTEK TESTING SERVICES

Applicant: WowWee Group Limited
 Model: 0805
 Worst-Case Operating Mode: Charging to Chip (Dog)

Date of Test: May 31, 2016

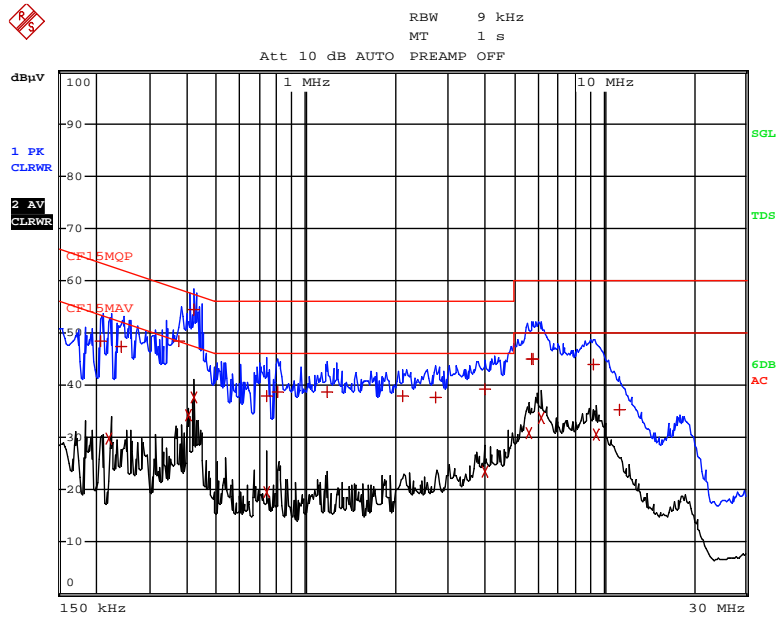

EDIT PEAK LIST (Final Measurement Results)

```
Trace1: CF15MQP
Trace2: CF15MAV
Trace3: ---
```

TRACE	FREQUENCY	LEVEL dBμV	DELTA LIMIT dB
1 Quasi Peak	208.5 kHz	48.44 N	-14.81
2 CISPR Average	222 kHz	29.81 L1	-22.93
1 Quasi Peak	244.5 kHz	47.32 N	-14.61
1 Quasi Peak	379.5 kHz	48.45 L1	-9.83
2 CISPR Average	402 kHz	34.29 N	-13.51
1 Quasi Peak	420 kHz	54.55 N	-2.89
2 CISPR Average	420 kHz	37.79 L1	-9.65
1 Quasi Peak	735 kHz	37.80 N	-18.19
2 CISPR Average	735 kHz	19.68 L1	-26.31
1 Quasi Peak	807 kHz	38.84 L1	-17.15
1 Quasi Peak	1.176 MHz	38.67 N	-17.32
1 Quasi Peak	2.112 MHz	37.93 N	-18.06
1 Quasi Peak	2.733 MHz	37.67 N	-18.32
1 Quasi Peak	4.02 MHz	39.15 N	-16.84
2 CISPR Average	4.02 MHz	23.40 L1	-22.59
2 CISPR Average	5.613 MHz	30.94 L1	-19.05
1 Quasi Peak	5.7255 MHz	45.06 L1	-14.93
1 Quasi Peak	5.7705 MHz	44.89 L1	-15.11
2 CISPR Average	6.153 MHz	33.67 L1	-16.32
1 Quasi Peak	9.2085 MHz	43.88 L1	-16.11

Note: Measurement Uncertainty is ± 4.2 dB at a level of confidence of 95%.

INTERTEK TESTING SERVICES

Applicant: WowWee Group Limited

Date of Test: May 31, 2016

Model: 0805

Worst-Case Operating Mode: Charging to Chip (Dog)

```
EDIT PEAK LIST (Final Measurement Results)
Trace1: CF15MQP
Trace2: CF15MAV
Trace3: ---

```


TRACE	FREQUENCY	LEVEL dBμV	DELTA LIMIT dB
2 CISPR Average	9.4065 MHz	30.59 L1	-19.40
1 Quasi Peak	11.364 MHz	35.17 N	-24.82

Note: Measurement Uncertainty is ± 4.2 dB at a level of confidence of 95%.

INTERTEK TESTING SERVICES

Applicant: WowWee Group Limited
 Model: 0805
 Worst-Case Operating Mode: Power On

Date of Test: May 31, 2016

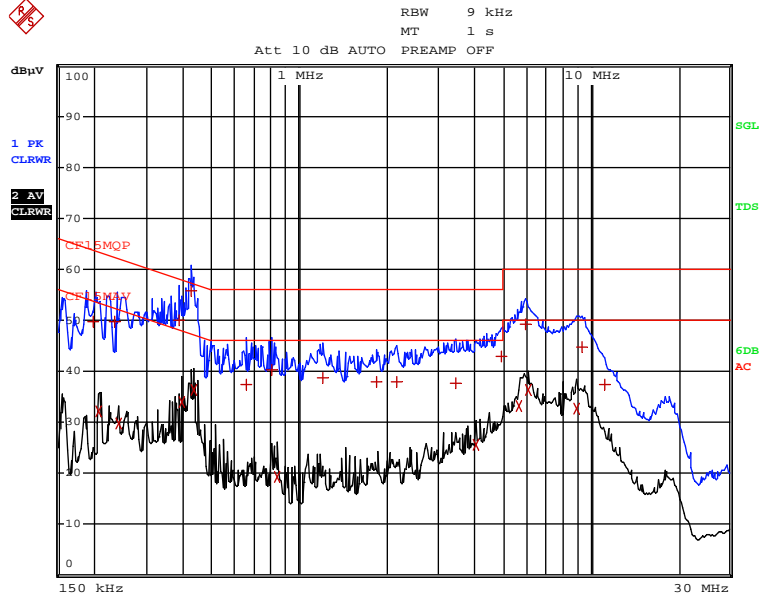

EDIT PEAK LIST (Final Measurement Results)				
Trace1:	CF15MQP			
Trace2:	CF15MAV			
Trace3:	---			
TRACE	FREQUENCY	LEVEL dBμV		DELTA LIMIT dB
1	Quasi Peak 199.5 kHz	49.63	L1	-13.99
2	CISPR Average 208.5 kHz	32.25	L1	-21.01
1	Quasi Peak 235.5 kHz	49.76	L1	-12.49
2	CISPR Average 240 kHz	29.85	N	-22.23
1	Quasi Peak 384 kHz	49.95	L1	-8.24
2	CISPR Average 393 kHz	34.03	L1	-13.96
1	Quasi Peak 424.5 kHz	55.81	N	-1.54
2	CISPR Average 433.5 kHz	36.22	L1	-10.96
1	Quasi Peak 654 kHz	37.46	L1	-18.53
1	Quasi Peak 802.5 kHz	40.17	L1	-15.82
2	CISPR Average 843 kHz	19.35	L1	-26.64
1	Quasi Peak 1.203 MHz	38.65	N	-17.34
1	Quasi Peak 1.8465 MHz	37.80	N	-18.20
1	Quasi Peak 2.1615 MHz	37.87	L1	-18.12
1	Quasi Peak 3.4395 MHz	37.65	N	-18.34
2	CISPR Average 4.065 MHz	25.61	L1	-20.38
1	Quasi Peak 4.9695 MHz	42.93	L1	-13.06
2	CISPR Average 5.685 MHz	33.18	L1	-16.81
1	Quasi Peak 5.9865 MHz	49.32	L1	-10.67
2	CISPR Average 6.0855 MHz	36.43	L1	-13.56

Note: Measurement Uncertainty is ± 4.2 dB at a level of confidence of 95%.

INTERTEK TESTING SERVICES

Applicant: WowWee Group Limited
Model: 0805
Worst-Case Operating Mode: Power On

Date of Test: May 31, 2016

EDIT PEAK LIST (Final Measurement Results)			
TRACE	FREQUENCY	LEVEL dBμV	DELTA LIMIT dB
Trace1:	CF15MQP		
Trace2:	CF15MAV		
Trace3:	---		
2 CISPR Average	8.9205 MHz	32.66 L1	-17.33
1 Quasi Peak	9.339 MHz	44.82 L1	-15.17
1 Quasi Peak	11.1705 MHz	37.31 N	-22.68

Note: Measurement Uncertainty is ± 4.2 dB at a level of confidence of 95%.

INTERTEK TESTING SERVICES

Applicant: WowWee Group Limited

Date of Test: May 31, 2016

Model: 0805

Worst-Case Operating Mode: Transmitting (Bluetooth 4.0 BLE)

Table 1
Radiated Emissions
Pursuant to FCC Part 15 Section 15.249 Requirement

Lowest Channel

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Average Factor (dB)	Calculated at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
H	2402.000	101.1	33	29.4	97.5	47.5	50.0	94.0	-44.0
H	4804.000	31.2	33	34.9	33.1	47.5	-14.4	54.0	-68.4
H	7206.000	44.1	33	37.9	49.0	47.5	1.5	54.0	-52.5
H	9608.000	37.6	33	40.4	45.0	47.5	-2.5	54.0	-56.5
H	12010.000	42.2	33	40.5	49.7	47.5	2.2	54.0	-51.8
H	14412.000	46.8	33	40.0	53.8	47.5	6.3	54.0	-47.7

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
H	2402.000	101.1	33	29.4	97.5	114.0	-16.5
H	4804.000	31.2	33	34.9	33.1	74.0	-40.9
H	7206.000	44.1	33	37.9	49.0	74.0	-25.0
H	9608.000	37.6	33	40.4	45.0	74.0	-29.0
H	12010.000	42.2	33	40.5	49.7	74.0	-24.3
H	14412.000	46.8	33	40.0	53.8	74.0	-20.2

NOTES: 1. Peak Detector Data unless otherwise stated.

2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative sign in the column shows value below limit.
4. Horn antenna is used for the emission over 1000MHz.
5. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205.
6. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

INTERTEK TESTING SERVICES

Applicant: WowWee Group Limited

Date of Test: May 31, 2016

Model: 0805

Worst-Case Operating Mode: Transmitting (Bluetooth 4.0 BLE)

Table 2
Radiated Emissions
Pursuant to FCC Part 15 Section 15.249 Requirement

Middle Channel

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Average Factor (dB)	Calculated at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
H	2440.000	99.8	33	29.4	96.2	47.5	48.7	94.0	-45.3
H	4880.000	31.8	33	34.9	33.7	47.5	-13.8	54.0	-67.8
H	7320.000	43.3	33	37.9	48.2	47.5	0.7	54.0	-53.3
H	9760.000	37.7	33	40.4	45.1	47.5	-2.4	54.0	-56.4
H	12200.000	41.8	33	40.5	49.3	47.5	1.8	54.0	-52.2
H	14640.000	47.6	33	38.4	53.0	47.5	5.5	54.0	-48.5

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
H	2440.000	99.8	33	29.4	96.2	114.0	-17.8
H	4880.000	31.8	33	34.9	33.7	74.0	-40.3
H	7320.000	43.3	33	37.9	48.2	74.0	-25.8
H	9760.000	37.7	33	40.4	45.1	74.0	-28.9
H	12200.000	41.8	33	40.5	49.3	74.0	-24.7
H	14640.000	47.6	33	38.4	53.0	74.0	-21.0

NOTES: 1. Peak Detector Data unless otherwise stated.

2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative sign in the column shows value below limit.
4. Horn antenna is used for the emission over 1000MHz.
5. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205.
6. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

INTERTEK TESTING SERVICES

Applicant: WowWee Group Limited

Date of Test: May 31, 2016

Model: 0805

Worst-Case Operating Mode: Transmitting (Bluetooth 4.0 BLE)

Table 3
Radiated Emissions
Pursuant to FCC Part 15 Section 15.249 Requirement

Highest Channel

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Average Factor (dB)	Calculated at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
H	2480.000	97.3	33	29.4	93.7	47.5	46.2	94.0	-47.8
H	4960.000	37.8	33	34.9	39.7	47.5	-7.8	54.0	-61.8
H	7440.000	43.1	33	37.9	48.0	47.5	0.5	54.0	-53.5
H	9920.000	37.9	33	40.4	45.3	47.5	-2.2	54.0	-56.2
H	12400.000	42.4	33	40.5	49.9	47.5	2.4	54.0	-51.6
H	14880.000	47.7	33	38.4	53.1	47.5	5.6	54.0	-48.4

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
H	2480.000	97.3	33	29.4	93.7	114.0	-20.3
H	4960.000	37.8	33	34.9	39.7	74.0	-34.3
H	7440.000	43.1	33	37.9	48.0	74.0	-26.0
H	9920.000	37.9	33	40.4	45.3	74.0	-28.7
H	12400.000	42.4	33	40.5	49.9	74.0	-24.1
H	14880.000	47.7	33	38.4	53.1	74.0	-20.9

NOTES: 1. Peak Detector Data unless otherwise stated.

2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative sign in the column shows value below limit.
4. Horn antenna is used for the emission over 1000MHz.
5. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205.
6. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

INTERTEK TESTING SERVICES

Applicant: WowWee Group Limited

Date of Test: May 31, 2016

Model: 0805

Worst-Case Operating Mode: Charging to Chip (Dog) (Bluetooth 4.0 BLE)

Table 4
Radiated Emissions
Pursuant to FCC Part 15 Section 15.209 Requirement

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-amp (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Limit at 3m (dB μ V/m)	Margin (dB)
V	37.797	38.9	16	10.0	32.9	40.0	-7.1
V	87.156	31.3	16	9.0	24.3	40.0	-15.7
H	133.834	15.1	16	14.0	13.1	43.5	-30.4
H	152.847	8.8	16	15.0	7.8	43.5	-35.7
V	165.644	9.9	16	17.0	10.9	43.5	-32.6

NOTES: 1. Peak Detector Data unless otherwise stated.

- All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
- Negative sign in the column shows value below limit.
- Horn antenna is used for the emission over 1000MHz.
- Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205.
- Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

INTERTEK TESTING SERVICES

Applicant: WowWee Group Limited

Date of Test: May 31, 2016

Model: 0805

Worst-Case Operating Mode: Power On (Bluetooth 4.0 BLE)

Table 4
Radiated Emissions
Pursuant to FCC Part 15 Section 15.209 Requirement

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-amp (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Limit at 3m (dB μ V/m)	Margin (dB)
V	38.180	36.0	16	10.0	30.0	40.0	-10.0
V	41.354	36.8	16	10.0	30.8	40.0	-9.2
V	47.192	37.7	16	11.0	32.7	40.0	-7.3
V	47.362	37.1	16	11.0	32.1	40.0	-7.9
V	52.461	34.5	16	11.0	29.5	40.0	-10.5
V	53.717	33.1	16	11.0	28.1	40.0	-11.9
V	93.696	24.0	16	11.0	19.0	43.5	-24.5
V	96.136	23.7	16	12.0	19.7	43.5	-23.8
V	109.336	21.4	16	14.0	19.4	43.5	-24.1

- NOTES: 1. Peak Detector Data unless otherwise stated.
2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative sign in the column shows value below limit.
4. Horn antenna is used for the emission over 1000MHz.
5. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205.
6. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

INTERTEK TESTING SERVICES

4.0 **Equipment Photographs**

For electronic filing, the photographs are saved with filename: external photos.pdf and internal photos.pdf.

5.0 **Product Labelling**

For electronics filing, the FCC ID label artwork and the label location are saved with filename: label.pdf.

6.0 **Technical Specifications**

For electronic filing, the block diagram and schematic of the tested EUT are saved with filename: block.pdf and circuit.pdf respectively.

7.0 **Instruction Manual**

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States.

INTERTEK TESTING SERVICES

8.0 **Miscellaneous Information**

The miscellaneous information includes details of the test procedure and measured bandwidth / calculation of factor such as pulse desensitization and averaging factor (calculation and timing diagram).



8.1 Radiated Emission on the Bandedge

From the following plots, they show that the fundamental emissions are confined in the specified band (2400MHz to 2483.5MHz). In case of the fundamental emissions are within two standard bandwidths from the bandedge, the delta measurement technique is used for determining bandedge compliance. Standard bandwidth is the bandwidth specified by ANSI C63.10 (2013) for frequency being measured.

Emissions radiated outside of the specified frequency bands, except harmonics, are attenuated by 50dB below the level of the fundamental or to the general radiated emissions limits in Section 15.209, whichever is the lesser attenuation, which meet the requirement of part 15.249(d).

INTERTEK TESTING SERVICES

Peak Measurement (Bluetooth 4.0 BLE)

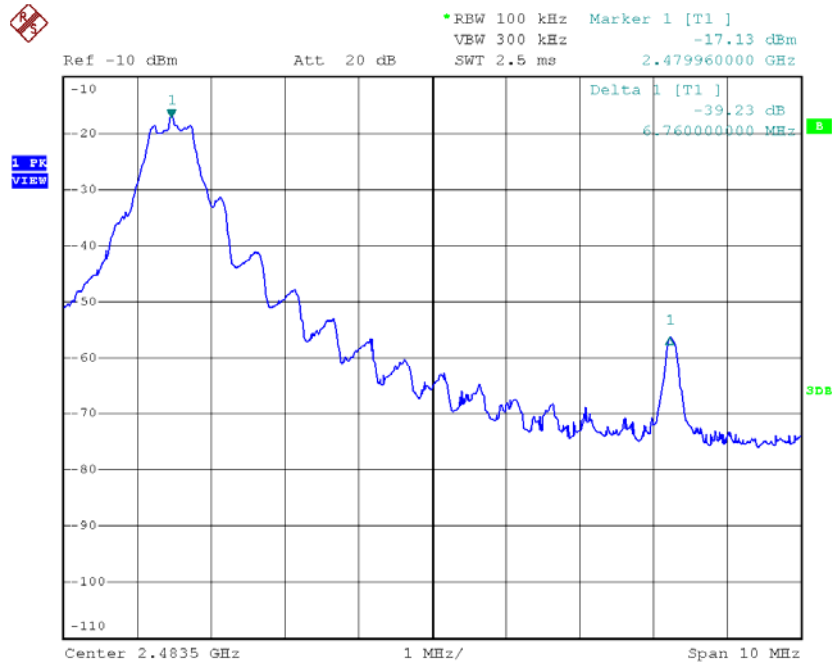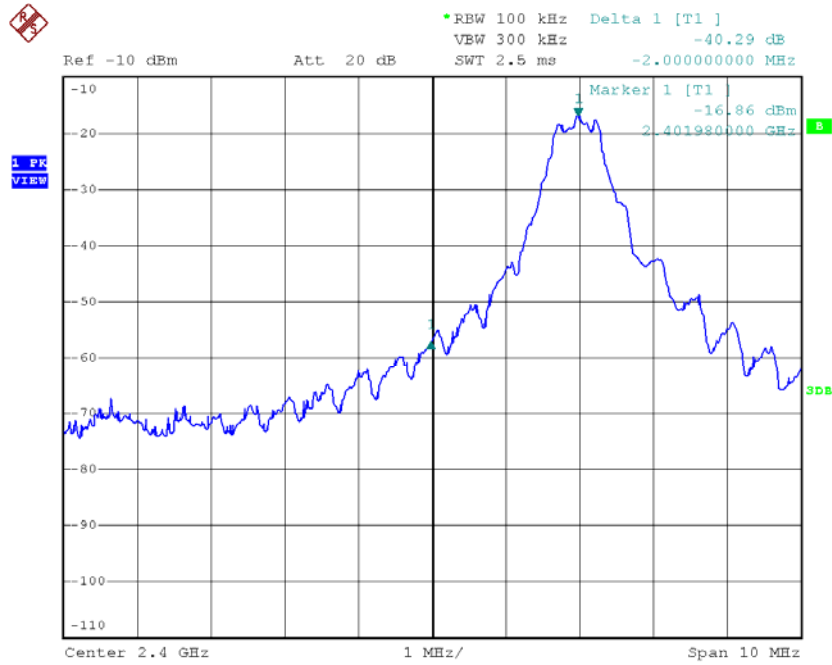

INTERTEK TESTING SERVICES

Peak Measurement (Bluetooth 4.0 BLE)

Bandedge compliance is determined by applying marker-delta method, i.e. (Bandedge Plot).

Lower bandedge

Peak Resultant field strength = Fundamental emissions (peak value) – delta from the plot

=97.5 dB μ V/m - 40.3 dB

=57.2 dB μ V/m

Average Resultant field strength = Fundamental emissions (average value) – delta from the plot

=50.0 dB μ V/m - 40.3 dB

=9.7 dB μ V/m

Upper bandedge

Peak Resultant field strength = Fundamental emissions (peak value) – delta from the plot

=93.7 dB μ V/m - 39.2 dB

=54.5 dB μ V/m

Average Resultant field strength = Fundamental emissions (average value) – delta from the plot

=46.2 dB μ V/m - 39.2 dB

=7.0 dB μ V/m

The resultant field strength meets the general radiated emission limit in Section 15.209, which does not exceed 74 dB μ V/m (Peak Limit) and 54 dB μ V/m (Average Limit).

INTERTEK TESTING SERVICES

8.2 Discussion of Pulse Desensitization

Pulse desensitivity is not applicable for this device. The effective period (T_{eff}) is approximately 0.42ms for a digital "1" bit which illustrated on technical specification, with a resolution bandwidth (3dB) of 1MHz, so the pulse desensitivity factor is 0dB.

8.3 Calculation of Average Factor

The duty cycle is simply the on-time divided by the period:

The duration of one cycle = 100ms



Effective period of the cycle = $0.42 \times 1 = 0.42\text{ms}$

DC = $0.42/100 = 0.0042$

Therefore, the averaging factor is found by $20\log 0.0042 = -47.5\text{dB}$.

INTERTEK TESTING SERVICES

Average Factor (Bluetooth 4.0 BLE)

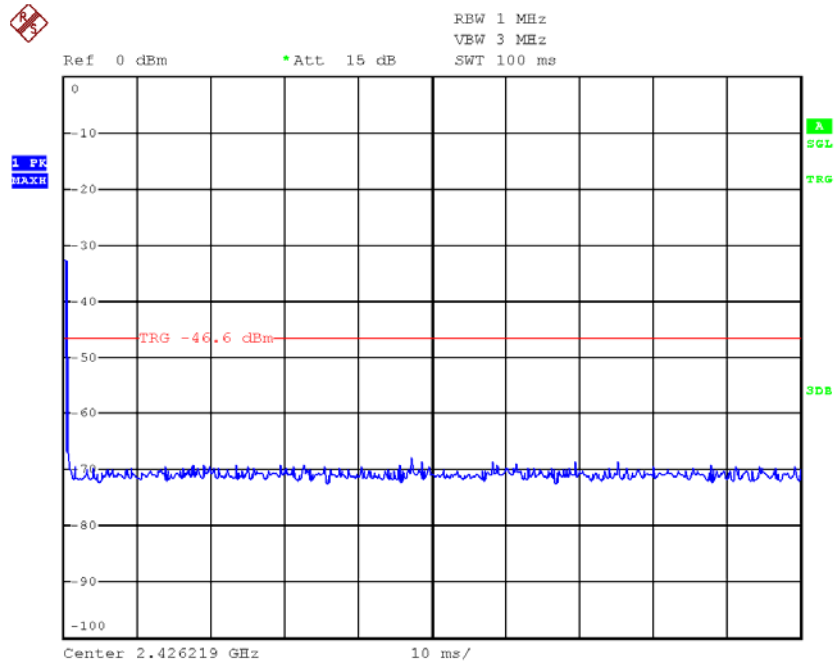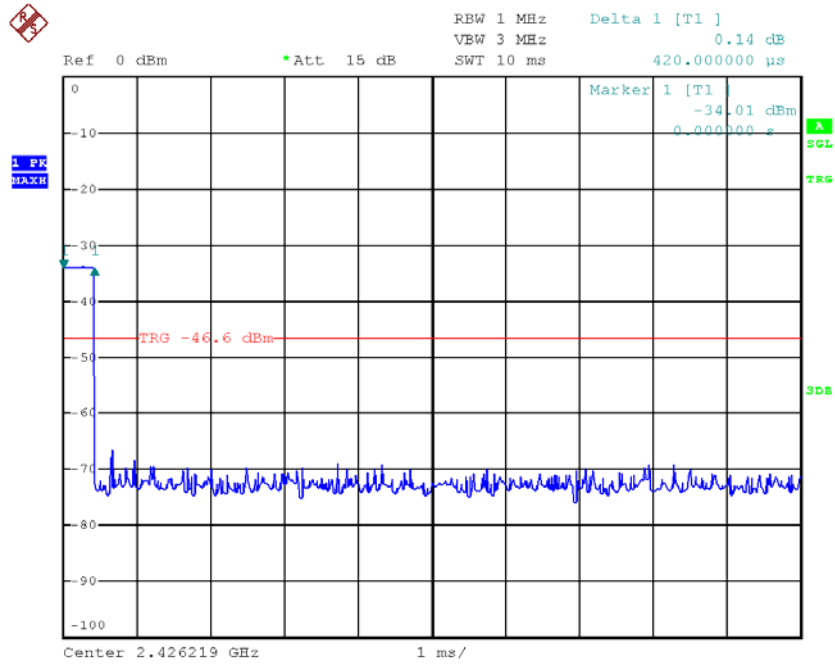

INTERTEK TESTING SERVICES

8.4 Emissions Test Procedures

The following is a description of the test procedure used by Intertek Testing Services Hong Kong Ltd. in the measurements of transmitter operating under the Part 15, Subpart C rules.

The transmitting equipment under test (EUT) is placed on a wooden turntable which is four feet in diameter and approximately 0.8m in height above the ground plane for emission measurement at or below 1GHz and 1.5m in height above the ground plane for emission measurement above 1GHz. During the radiated emissions test, the turntable is rotated and any cables leaving the EUT are manipulated to find the configuration resulting in maximum emissions. The EUT is adjusted through all three orthogonal axis to obtain maximum emission levels. The antenna height and polarization are also varied during the testing to search for maximum signal levels. The height of the antenna is varied from one to four meters.

Detector function for radiated emissions is in peak mode. Average readings, when required, are taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in Exhibit 8.3.

The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower. For line conducted emissions, the range scanned is 150 kHz to 30 MHz.

INTERTEK TESTING SERVICES

8.4 Emissions Test Procedures (cont'd)

The EUT is warmed up for 15 minutes prior to the test.

AC power to the unit is varied from 85% to 115% nominal and variation in the fundamental emission field strength is recorded. If battery powered, a new, fully charged battery is used.

Conducted measurements were made as described in ANSI C63.10 (2013).


The IF bandwidth used for measurement of radiated signal strength was 100 kHz or greater when frequency is below 1000 MHz. Where pulsed transmissions of short enough pulse duration warrant, a greater bandwidth is selected according to the recommendations of Hewlett Packard Application Note 150-2. A discussion of whether pulse desensitivity is applicable to this unit is included in this report (See Exhibit 8.1). Above 1000 MHz, a resolution bandwidth of 3 MHz is used.

Transmitter measurements are normally conducted at a measurement distance of three meters. However, to assure low enough noise floor in the forbidden bands and above 1 GHz, signals are acquired at a distance of one meter or less. All measurements are extrapolated to three meters using inverse scaling, unless otherwise reported. Measurements taken at a closer distance are so marked.


INTERTEK TESTING SERVICES

8.4.1 Radiated Emission Test Setup

The figure below shows the test setup, which is utilized to make these measurements.

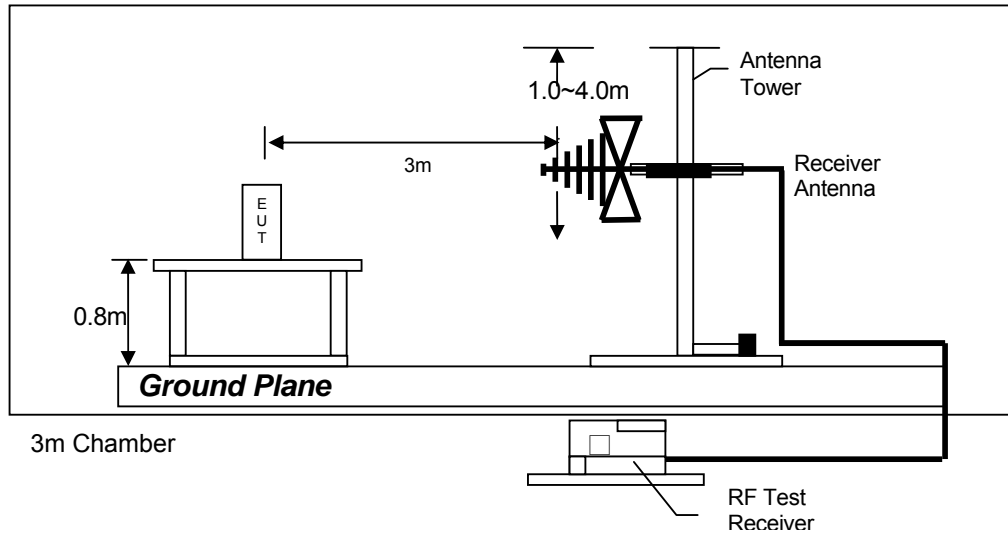

Test setup of radiated emissions up to 1GHz

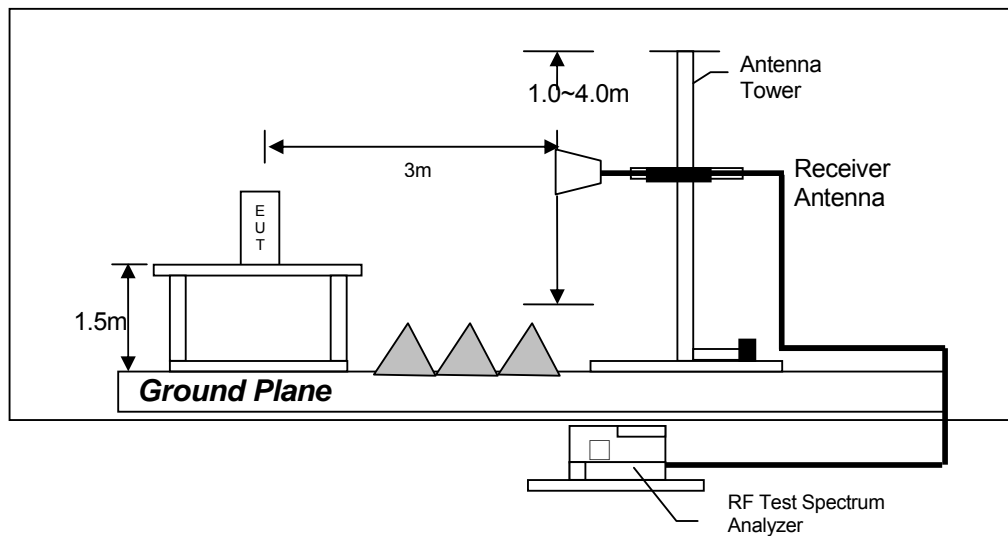

Test setup of radiated emissions above 1GHz


INTERTEK TESTING SERVICES

8.4.2 Conducted Emission Test Procedures

For tabletop equipment, the EUT along with its peripherals were placed on a 1.0m(W)×1.5m(L) and 0.8m in height wooden table. For floor-standing equipment, the EUT and all cables were insulated, if required, from the ground plane by up to 12 mm of insulating material. The EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN), which provided 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room. The excess power cable between the EUT and the LISN was bundled.

All connecting cables of EUT and peripherals were moved to find the maximum emission.

8.4.3 Conducted Emission Test Setup

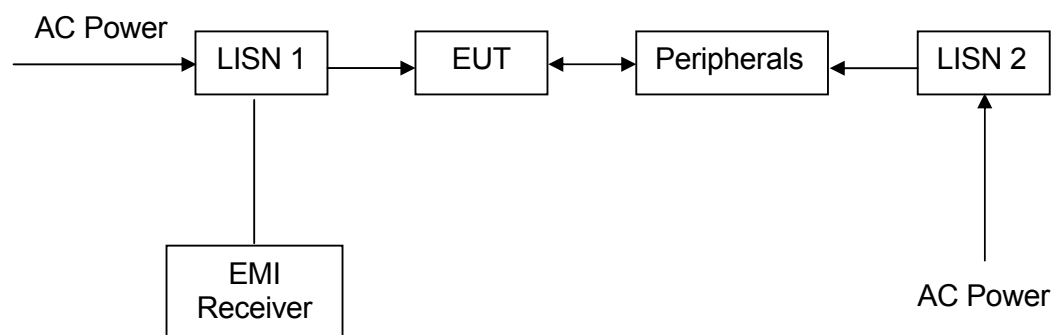

INTERTEK TESTING SERVICES

9.0 Equipment List

1) Radiated Emissions Test

Equipment	EMI Test Receiver	Biconical Antenna 20MHz to 200MHz
Registration No.	EW-3156	EW-0571
Manufacturer	R&S	EMCO
Model No.	ESR26	3104C
Calibration Date	Nov. 03, 2015	Jun 23, 2015
Calibration Due Date	Nov. 03, 2016	Dec 23, 2016

Equipment	Double Ridged Guide Antenna	Log Periodic Antenna 200MHz to 1000MHz
Registration No.	EW-1133	EW-0572
Manufacturer	EMCO	EMCO
Model No.	3115	3146
Calibration Date	Nov. 05, 2015	Jan 19, 2015
Calibration Due Date	May. 05, 2017	Jul 19, 2016

2) Conducted Emissions Test

Equipment	EMI Test Receiver	LISN
Registration No.	EW-3095	EW-2501
Manufacturer	R&S	R&S
Model No.	ESCI	ENV-216
Calibration Date	Nov. 05, 2015	Jan. 28, 2016
Calibration Due Date	Nov. 05, 2016	Jan. 28, 2017

3) Bandedge and Average Factor Measurement

Equipment	Spectrum Analyzer
Registration No.	EW-2466
Manufacturer	R&S
Model No.	FSP30
Calibration Date	Sep. 16, 2015
Calibration Due Date	Aug. 20, 2016

END OF TEST REPORT