

FCC REPORT

Applicant: Shenzhen Junlan Electronic Ltd

Address of Applicant: No.277 PingKui Road, Shijing Community, Pingshan Street, Pingshan New District, Shenzhen, China

Manufacturer/ Factory: Shenzhen Junlan Electronic Ltd

Address of Manufacturer/ Factory: No.277 PingKui Road, Shijing Community, Pingshan Street, Pingshan New District, Shenzhen, China

Equipment Under Test (EUT)

Product Name: 10 inch BLUETOOTH PDVD BUNDLE

Model No.: ONA17AV048, SDVD1055-ONN, TDV-31120

Trade Mark: ONN

FCC ID: OKUTDV31120

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.249:2016

Date of sample receipt: March 06, 2017

Date of Test: March 07, 2017

Date of report issued: March 07, 2017

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Robinson Lo

Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

2 Version

Version No.	Date	Description
00	March 07, 2017	Original

Prepared By:

Yang Liu

Date:

March 07, 2017

Project Engineer

Check By:

Andy Wu

Date:

March 07, 2017

Reviewer

3 Contents

	Page
1 COVER PAGE.....	1
2 VERSION.....	2
3 CONTENTS	3
4 TEST SUMMARY	4
4.1 MEASUREMENT UNCERTAINTY	4
5 GENERAL INFORMATION.....	5
5.1 GENERAL DESCRIPTION OF EUT	5
5.2 TEST MODE	7
5.3 DESCRIPTION OF SUPPORT UNITS	7
5.4 TEST FACILITY.....	7
5.5 TEST LOCATION	7
5.6 OTHER INFORMATION REQUESTED BY THE CUSTOMER	7
6 TEST INSTRUMENTS LIST	8
7 TEST RESULTS AND MEASUREMENT DATA.....	9
7.1 ANTENNA REQUIREMENT	9
7.2 CONDUCTED EMISSIONS	10
7.3 RADIATED EMISSION METHOD	13
7.3.1 <i>Field Strength of The Fundamental Signal</i>	15
7.3.2 <i>Spurious emissions</i>	16
8 TEST SETUP PHOTO	20
9 EUT CONSTRUCTIONAL DETAILS	22

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	Pass
AC Power Line Conducted Emission	15.207	Pass
Field strength of the fundamental signal	15.249 (a)	Pass
Spurious emissions	15.249 (a) (d)/15.209	Pass
Band edge	15.249 (d)/15.205	N/A
20dB Occupied Bandwidth	15.215 (c)	N/A

Pass: The EUT complies with the essential requirements in the standard.

N/A: not applicable

Remark : Test according to ANSI C63.4:2014 and ANSI C63.10:2013.

4.1 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9kHz ~ 30MHz	± 4.34dB	(1)
Radiated Emission	30MHz ~ 1000MHz	± 4.24dB	(1)
Radiated Emission	1GHz ~ 26.5GHz	± 4.68dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	± 3.45dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

5 General Information

5.1 General Description of EUT

Product Name:	10 inch BLUETOOTH PDVD BUNDLE
Model No.:	ONA17AV048, SDVD1055-ONN, TDV-31120
Test Model:	TDV-31120
<p>Remark: <i>All above models are identical in the same PCB layout, interior structure and electrical circuit. The only difference is the model name for commercial purpose.</i></p>	
Operation Frequency:	2402MHz~2480MHz
Channel numbers:	79
Channel separation:	1MHz
Modulation type:	GFSK, Pi/4QPSK, 8DPSK
Antenna Type:	PCB antenna
Antenna gain:	0 dBi(declare by Applicant)
Power supply:	<p>Adapter:</p> <p>Model No.: AY10BA-AF0901002-US Input: AC 100-240V, 50/60Hz, 0.5A Max Output: DC 9V, 1.0A</p> <p>Or</p> <p>Model No.: GKYPL0100090 US1 Input: AC 100-240V, 50/60Hz, 0.5A Output: DC 9V, 1.0A</p> <p>Or</p> <p>Model No.:GKYDC001Z Input: DC 12V, 2A Output: DC 12V, 2A</p> <p>Or</p> <p>DC 7.4V, 2000mAh, 14.8Wh Li-ion Battery</p>

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2441MHz
The Highest channel	2480MHz

5.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode
<p><i>Remark: During the test, the duty cycle >98%, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.</i></p>	

Pre-test mode.

We have verified the construction and function in typical operation, The EUT was placed on three different polar directions; i.e. X axis, Y axis, Z axis. which was shown in this test report and defined as follows:

Axis	X	Y	Z
Field Strength(dBuV/m)	96.64	97.37	96.12

Final Test Mode:

The EUT was tested in GFSK, $\pi/4$ QPSK, 8DPSK modulation, and found the GFSK modulation is the worst case.

According to ANSI C63.4 standards, the test results are both the "worst case" and "worst setup":

Y axis (see the test setup photo)

5.3 Description of Support Units

None.

5.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC —Registration No.: 600491**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 600491, June 22, 2016.

- **Industry Canada (IC) —Registration No.: 9079A-2**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, August 15, 2016

5.5 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

No. 301-309, 3/F., Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102

Tel: 0755-27798480

Fax: 0755-27798960

5.6 Other Information Requested by the Customer

None.

6 Test Instruments list


Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July 03 2015	July 02 2020
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	Spectrum Analyzer	Agilent	E4440A	GTS533	June 29 2016	June 28 2017
4	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June 29 2016	June 28 2017
5	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June 29 2016	June 28 2017
6	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	9120D-829	GTS208	June 29 2016	June 28 2017
7	Horn Antenna	ETS-LINDGREN	3160	GTS217	June 29 2016	June 28 2017
8	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
9	Coaxial Cable	GTS	N/A	GTS213	June 29 2016	June 28 2017
10	Coaxial Cable	GTS	N/A	GTS211	June 29 2016	June 28 2017
11	Coaxial cable	GTS	N/A	GTS210	June 29 2016	June 28 2017
12	Coaxial Cable	GTS	N/A	GTS212	June 29 2016	June 28 2017
13	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June 29 2016	June 28 2017
14	Amplifier(2GHz-20GHz)	HP	8349B	GTS206	June 29 2016	June 28 2017
15	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June 29 2016	June 28 2017
16	Band filter	Amindeon	82346	GTS219	June 29 2016	June 28 2017
17	Power Meter	Anritsu	ML2495A	GTS540	June 29 2016	June 28 2017
18	Power Sensor	Anritsu	MA2411B	GTS541	June 29 2016	June 28 2017

Conducted Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	May.16 2014	May.15 2019
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 29 2016	June. 28 2017
3	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	June. 29 2016	June. 28 2017
4	Artificial Mains Network	SCHWARZBECK MESS	NSLK8127	GTS226	June. 29 2016	June. 28 2017
5	Coaxial Cable	GTS	N/A	GTS227	N/A	N/A
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
7	Thermo meter	KTJ	TA328	GTS233	June. 29 2016	June. 28 2017

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Barometer	ChangChun	DYM3	GTS257	June 29 2016	June 28 2017

7 Test results and Measurement Data

7.1 Antenna requirement

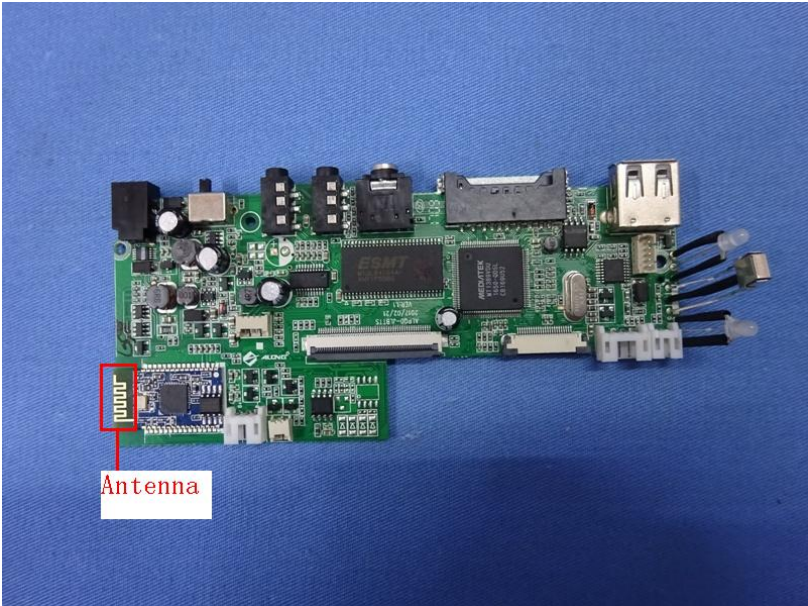
Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
EUT Antenna:	
<i>The antenna is PCB antenna, the best case gain of the antenna is 0dBi</i>	
	

7.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207														
Test Method:	ANSI C63.10:2013														
Test Frequency Range:	150KHz to 30MHz														
Class / Severity:	Class B														
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto														
Limit:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table> <p>* Decreases with the logarithm of the frequency.</p>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
Test setup:	<p><i>Remark</i> E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>														
Test procedure:	<ol style="list-style-type: none"> 1. The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement. 														
Test Instruments:	Refer to section 6.0 for details														
Test mode:	Refer to section 5.2 for details														
Test results:	Pass														


Measurement data

Line:

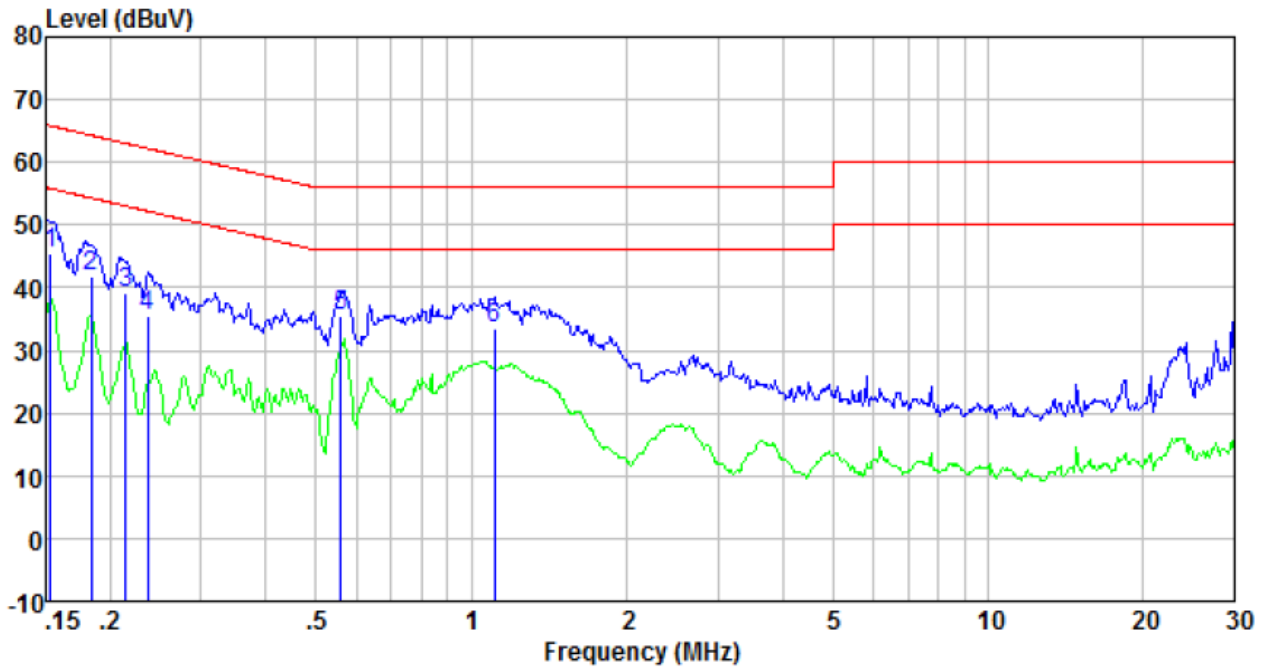

Freq MHz	Reading level dBUV	lISN/ISN factor dB	Cable loss dB	level dBUV	Limit level dBUV	Over limit dB	Remark
0.15	44.84	0.42	0.12	45.38	65.82	-20.44	QP
0.18	41.11	0.42	0.13	41.66	64.33	-22.67	QP
0.21	38.50	0.43	0.13	39.06	63.05	-23.99	QP
0.24	35.01	0.44	0.12	35.57	62.22	-26.65	QP
0.56	34.96	0.33	0.12	35.41	56.00	-20.59	QP
1.11	33.22	0.25	0.13	33.60	56.00	-22.40	QP

Neutral:

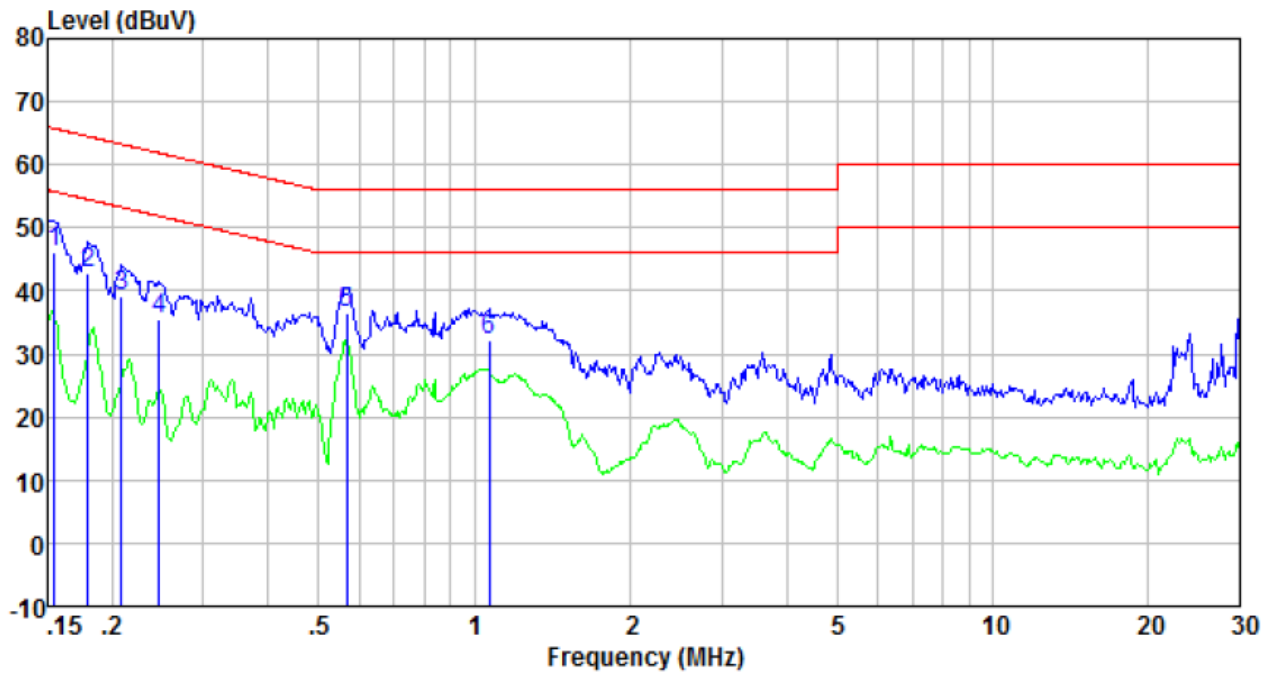

Freq MHz	Reading level dBuV	LISN/ISN factor dB	Cable loss dB	level dBuV	Limit level dBuV	Over limit dB	Remark
0.15	45.55	0.41	0.12	46.08	65.74	-19.66	QP
0.18	42.16	0.41	0.13	42.70	64.50	-21.80	QP
0.21	38.45	0.41	0.13	38.99	63.27	-24.28	QP
0.25	34.84	0.42	0.11	35.37	61.86	-26.49	QP
0.57	36.16	0.30	0.12	36.58	56.00	-19.42	QP
1.07	31.98	0.21	0.13	32.32	56.00	-23.68	QP

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss
4. *If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.*

7.3 Radiated Emission Method

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	30MHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		Peak	1MHz	10Hz	Average Value
Limit: (Field strength of the fundamental signal)	Frequency	Limit (dBuV/m @3m)		Remark	
	2400MHz-2483.5MHz	94.00		Average Value	
		114.00		Peak Value	
Limit: (Spurious Emissions)	Frequency	Limit (dBuV/m @3m)		Remark	
	30MHz-88MHz	40.00		Quasi-peak Value	
	88MHz-216MHz	43.50		Quasi-peak Value	
	216MHz-960MHz	46.00		Quasi-peak Value	
	960MHz-1GHz	54.00		Quasi-peak Value	
	Above 1GHz	54.00		Average Value	
		74.00		Peak Value	
Limit: (band edge)	Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.				
Test setup:	Below 1GHz				
	<p>The diagram illustrates the test setup for frequencies below 1GHz. It shows an Equipment Under Test (EUT) placed on a turn table, which is positioned 80cm from a ground plane. A test antenna is positioned 3m away from the EUT and at a height of 1m to 4m. The antenna is connected to a receiver and a preamplifier. The entire setup is enclosed in a shielded chamber.</p>				
	Above 1GHz				

<p>Test Procedure:</p>	<ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table (0.8m for below 1G and 1.5m for above 1G) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
<p>Test Instruments:</p>	<p>Refer to section 6.0 for details</p>
<p>Test mode:</p>	<p>Refer to section 5.2 for details</p>
<p>Test results:</p>	<p>Pass</p>

Measurement data:

7.3.1 Field Strength of The Fundamental Signal

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2402.00	93.09	27.58	5.39	30.18	95.88	114.00	-18.12	Vertical
2402.00	90.32	27.58	5.39	30.18	93.11	114.00	-20.89	Horizontal
2441.00	91.31	27.55	5.43	30.06	94.23	114.00	-19.77	Vertical
2441.00	89.30	27.55	5.43	30.06	92.22	114.00	-21.78	Horizontal
2480.00	94.31	27.52	5.47	29.93	97.37	114.00	-16.63	Vertical
2480.00	90.99	27.52	5.47	29.93	94.05	114.00	-19.95	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2402.00	82.65	27.58	5.39	30.18	85.44	94.00	-8.56	Vertical
2402.00	79.87	27.58	5.39	30.18	82.66	94.00	-11.34	Horizontal
2441.00	80.65	27.55	5.43	30.06	83.57	94.00	-10.43	Vertical
2441.00	78.35	27.55	5.43	30.06	81.27	94.00	-12.73	Horizontal
2480.00	84.09	27.52	5.47	29.93	87.15	94.00	-6.85	Vertical
2480.00	80.57	27.52	5.47	29.93	83.63	94.00	-10.37	Horizontal

7.3.2 Spurious emissions

■ Below 1GHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
30.11	44.24	14.33	0.55	30.10	29.02	40.00	-10.98	Vertical
74.14	49.41	9.93	0.98	29.83	30.49	40.00	-9.51	Vertical
148.44	54.60	10.25	1.56	29.41	37.00	43.50	-6.50	Vertical
202.81	50.94	12.64	1.86	29.23	36.21	43.50	-7.29	Vertical
278.07	50.21	14.63	2.26	29.85	37.25	46.00	-8.75	Vertical
444.85	44.71	17.57	3.07	29.41	35.94	46.00	-10.06	Vertical
48.33	43.43	15.35	0.75	30.01	29.52	40.00	-10.48	Horizontal
74.14	49.44	9.93	0.98	29.83	30.52	40.00	-9.48	Horizontal
92.79	46.77	14.41	1.13	29.73	32.58	43.50	-10.92	Horizontal
148.44	53.40	10.25	1.56	29.41	35.80	43.50	-7.70	Horizontal
185.14	52.06	12.16	1.77	29.25	36.74	43.50	-6.76	Horizontal
315.48	49.43	15.28	2.44	29.91	37.24	46.00	-8.76	Horizontal

■ Above 1GHz

Test channel:	Lowest channel
---------------	----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	36.68	31.78	8.60	32.09	44.97	74.00	-29.03	Vertical
7206.00	31.41	36.15	11.65	32.00	47.21	74.00	-26.79	Vertical
9608.00	31.10	37.95	14.14	31.62	51.57	74.00	-22.43	Vertical
12010.00	*					74.00		Vertical
14412.00	*					74.00		Vertical
4804.00	40.83	31.78	8.60	32.09	49.12	74.00	-24.88	Horizontal
7206.00	33.11	36.15	11.65	32.00	48.91	74.00	-25.09	Horizontal
9608.00	30.46	37.95	14.14	31.62	50.93	74.00	-23.07	Horizontal
12010.00	*					74.00		Horizontal
14412.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	25.61	31.78	8.60	32.09	33.90	54.00	-20.10	Vertical
7206.00	20.17	36.15	11.65	32.00	35.97	54.00	-18.03	Vertical
9608.00	19.29	37.95	14.14	31.62	39.76	54.00	-14.24	Vertical
12010.00	*					54.00		Vertical
14412.00	*					54.00		Vertical
4804.00	29.77	31.78	8.60	32.09	38.06	54.00	-15.94	Horizontal
7206.00	22.30	36.15	11.65	32.00	38.10	54.00	-15.90	Horizontal
9608.00	18.96	37.95	14.14	31.62	39.43	54.00	-14.57	Horizontal
12010.00	*					54.00		Horizontal
14412.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. “*”, means this data is the too weak instrument of signal is unable to test.

Test channel:	Middle channel
---------------	----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4882.00	36.62	31.85	8.67	32.12	45.02	74.00	-28.98	Vertical
7323.00	31.38	36.37	11.72	31.89	47.58	74.00	-26.42	Vertical
9764.00	31.07	38.35	14.25	31.62	52.05	74.00	-21.95	Vertical
12205.00	*					74.00		Vertical
14646.00	*					74.00		Vertical
4882.00	40.77	31.85	8.67	32.12	49.17	74.00	-24.83	Horizontal
7323.00	33.07	36.37	11.72	31.89	49.27	74.00	-24.73	Horizontal
9764.00	30.42	38.35	14.25	31.62	51.40	74.00	-22.60	Horizontal
12205.00	*					74.00		Horizontal
14646.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4882.00	25.58	31.85	8.67	32.12	33.98	54.00	-20.02	Vertical
7323.00	20.15	36.37	11.72	31.89	36.35	54.00	-17.65	Vertical
9764.00	19.27	38.35	14.25	31.62	40.25	54.00	-13.75	Vertical
12205.00	*					54.00		Vertical
14646.00	*					54.00		Vertical
4882.00	29.73	31.85	8.67	32.12	38.13	54.00	-15.87	Horizontal
7323.00	22.28	36.37	11.72	31.89	38.48	54.00	-15.52	Horizontal
9764.00	18.94	38.35	14.25	31.62	39.92	54.00	-14.08	Horizontal
12205.00	*					54.00		Horizontal
14646.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. “*”, means this data is the too weak instrument of signal is unable to test.

Test channel:	Highest channel
---------------	-----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	37.18	31.93	8.73	32.16	45.68	74.00	-28.32	Vertical
7440.00	31.75	36.59	11.79	31.78	48.35	74.00	-25.65	Vertical
9920.00	31.39	38.81	14.38	31.88	52.70	74.00	-21.30	Vertical
12400.00	*					74.00		Vertical
14880.00	*					74.00		Vertical
4960.00	41.44	31.93	8.73	32.16	49.94	74.00	-24.06	Horizontal
7440.00	33.49	36.59	11.79	31.78	50.09	74.00	-23.91	Horizontal
9920.00	30.80	38.81	14.38	31.88	52.11	74.00	-21.89	Horizontal
12400.00	*					74.00		Horizontal
14880.00	*					74.00		Horizontal

Average value:


Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	26.10	31.93	8.73	32.16	34.60	54.00	-19.40	Vertical
7440.00	20.50	36.59	11.79	31.78	37.10	54.00	-16.90	Vertical
9920.00	19.58	38.81	14.38	31.88	40.89	54.00	-13.11	Vertical
12400.00	*					54.00		Vertical
14880.00	*					54.00		Vertical
4960.00	30.33	31.93	8.73	32.16	38.83	54.00	-15.17	Horizontal
7440.00	22.68	36.59	11.79	31.78	39.28	54.00	-14.72	Horizontal
9920.00	19.31	38.81	14.38	31.88	40.62	54.00	-13.38	Horizontal
12400.00	*					54.00		Horizontal
14880.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. “*”, means this data is the too weak instrument of signal is unable to test.

8 Test Setup Photo

Radiated Emission

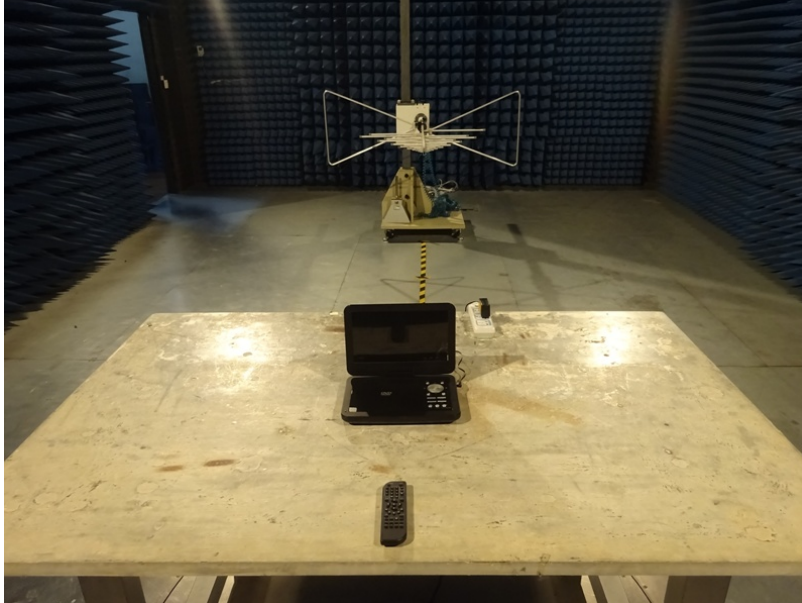

Conducted Emission




9 EUT Constructional Details















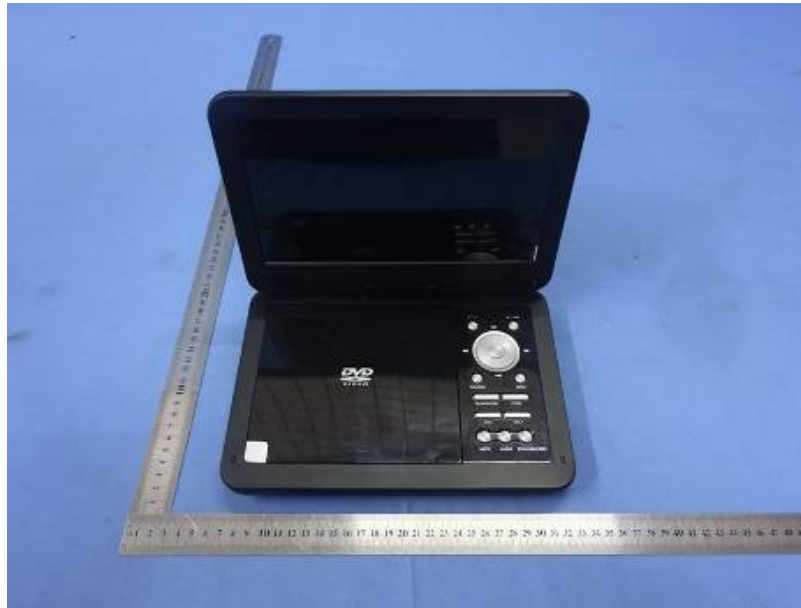

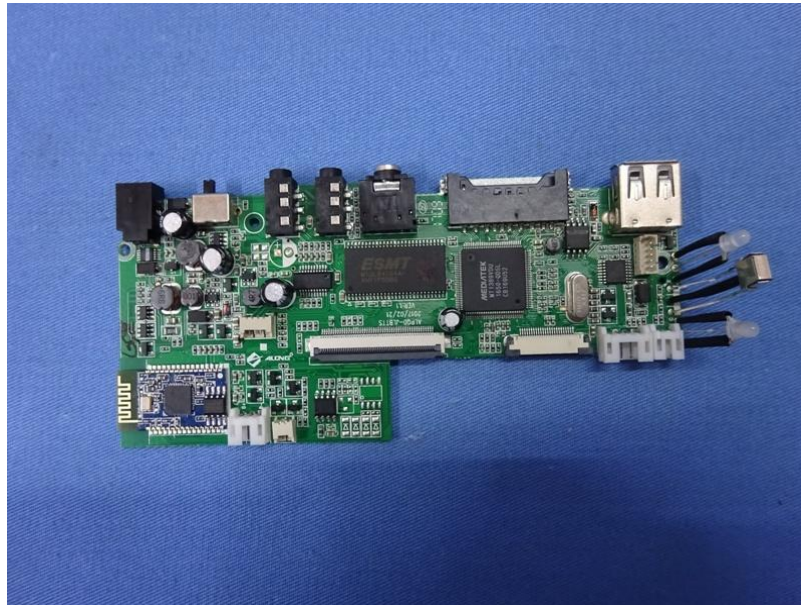

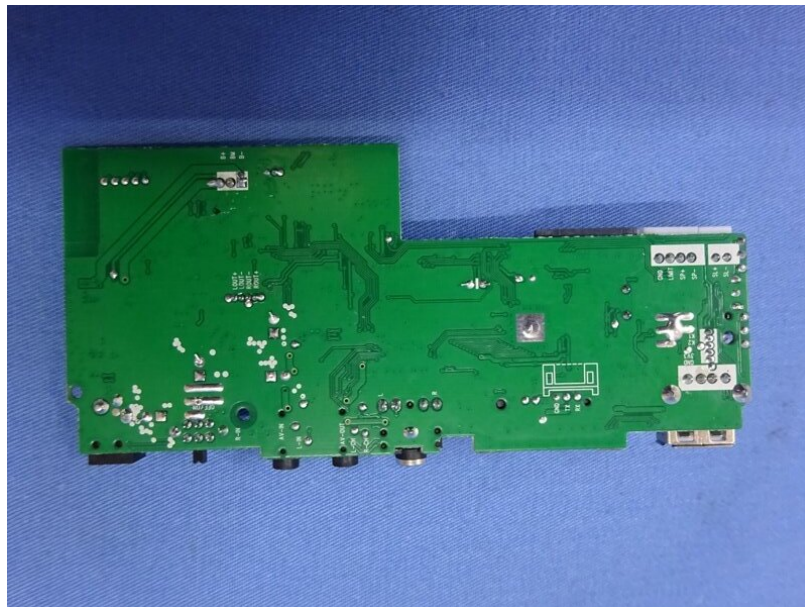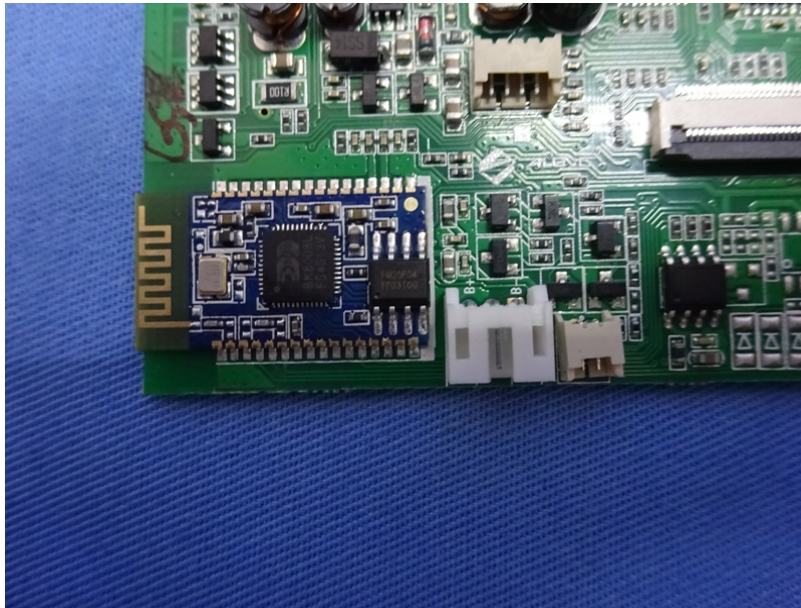

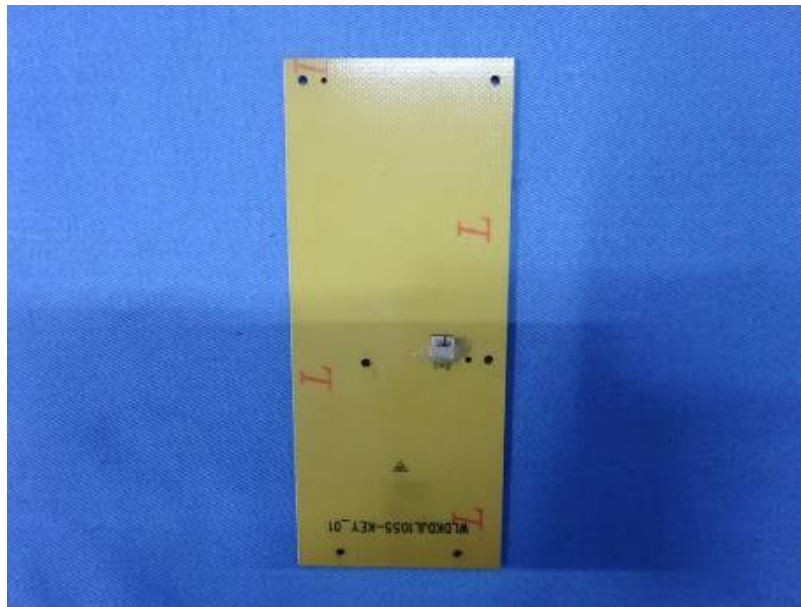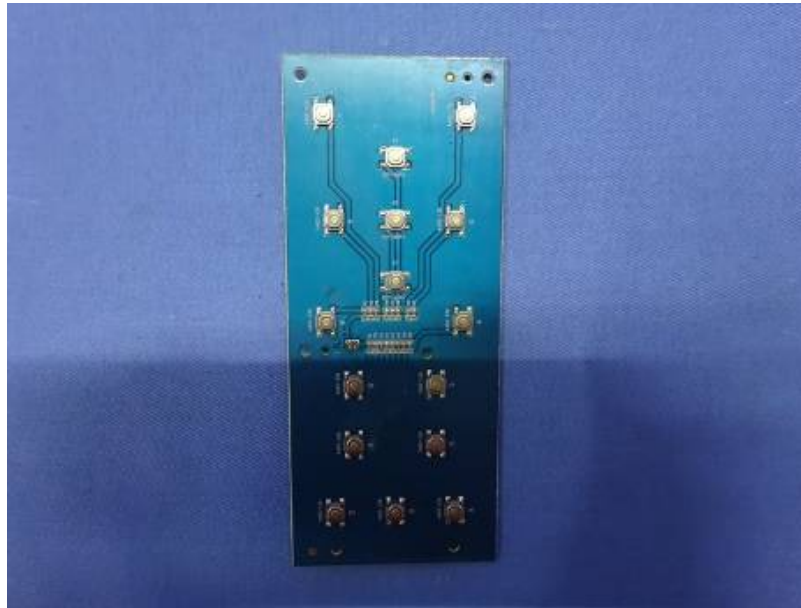

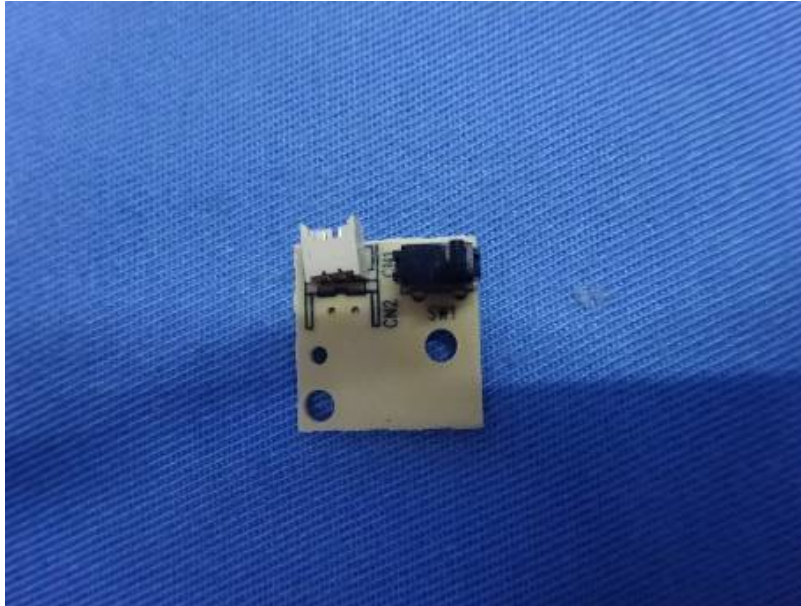











-----End-----