




TEST REPORT

Applicant Name : ALE International
Address : 32 Avenue Kleber Colombes 92700 France
Report Number : SZNS210910-47403E-RF
FCC ID: OL3ALE160

Test Standard (s)
FCC PART 15.247

Sample Description


Product Type: Bluetooth Handset
Model No.: ALE-160 WB Cordless Handset
Trade Mark: Alcatel-Lucent Enterprise 
Date Received: 2021-09-10
Date of Test: 2021-11-01 to 2021-11-02
Report Date: 2021-11-23

Test Result:

Pass*


* In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:



Ting Lü
EMC Engineer

Approved By:



Candy Li
RF Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “*”.

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk “*”. Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Shenzhen Accurate Technology Co., Ltd.

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China
Tel: +86 755-26503290 Fax: +86 755-26503396 Web: www.atc-lab.com

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE.....	4
TEST METHODOLOGY.....	4
MEASUREMENT UNCERTAINTY.....	5
TEST FACILITY.....	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION.....	6
EUT EXERCISE SOFTWARE.....	6
SPECIAL ACCESSORIES.....	6
EQUIPMENT MODIFICATIONS.....	6
SUPPORT EQUIPMENT LIST AND DETAILS.....	6
EXTERNAL I/O CABLE.....	6
BLOCK DIAGRAM OF TEST SETUP.....	7
SUMMARY OF TEST RESULTS.....	10
TEST EQUIPMENT LIST.....	11
FCC§15.247 (i), §1.1307 (b) (1) &§2.1093 – RF EXPOSURE.....	12
APPLICABLE STANDARD.....	12
TEST RESULT:.....	12
FCC §15.203 – ANTENNA REQUIREMENT.....	13
APPLICABLE STANDARD.....	13
ANTENNA CONNECTOR CONSTRUCTION.....	13
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS.....	14
APPLICABLE STANDARD.....	14
EUT SETUP.....	14
EMI TEST RECEIVER SETUP.....	14
TEST PROCEDURE.....	15
TRANSD FACTOR & MARGIN CALCULATION.....	15
TEST DATA.....	15
FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS.....	20
APPLICABLE STANDARD.....	20
EUT SETUP.....	20
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP.....	21
TEST PROCEDURE.....	21
FACTOR & MARGIN CALCULATION.....	21
TEST DATA.....	21
FCC §15.247(a) (1)-CHANNEL SEPARATION TEST.....	28
APPLICABLE STANDARD.....	28
TEST PROCEDURE.....	28
TEST DATA.....	28
FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH & 99% OCCUPIED BANDWIDTH.....	31
APPLICABLE STANDARD.....	31
TEST PROCEDURE.....	31
TEST DATA.....	32

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST43
 APPLICABLE STANDARD43
 TEST PROCEDURE43
 TEST DATA43

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....46
 APPLICABLE STANDARD46
 TEST PROCEDURE46
 TEST DATA46

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT56
 APPLICABLE STANDARD56
 TEST PROCEDURE56
 TEST DATA56

FCC §15.247(d) - BAND EDGES TESTING62
 APPLICABLE STANDARD62
 TEST PROCEDURE62
 TEST DATA62

GENERAL INFORMATION**Product Description for Equipment under Test (EUT)**

Product	Bluetooth Handset
Tested Model No.	ALE-160 WB Cordless Handset
Frequency Range	2402~2480MHz
Maximum conducted Peak output power	5.73dBm
Modulation Technique	GFSK, $\pi/4$ -DQPSK, 8DPSK
Antenna Specification*	PCB Antenna: 0dBi(provided by the applicant)
Voltage Range	DC 3.7V from battery or DC 5V from USB port.
Sample number	SZNS210910-47403E-RF-S1 (Assigned by ATC)
Sample/EUT Status	Good condition

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		5%
RF output power, conducted		0.73dB
Unwanted Emission, conducted		1.6dB
AC Power Lines Conducted Emissions		2.72dB
Emissions, Radiated	30MHz - 1GHz	4.28dB
	1GHz- 18GHz	4.98dB
	18GHz- 26.5GHz	5.06dB
Temperature		1°C
Humidity		6%
Supply voltages		0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189. Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 429 7.01.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0016. The Registration Number is 5077A.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode.

EUT Exercise Software

Software “bluetest3”* was used during testing and the power level was default*. The software and power level was provided by the applicant.

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Alcatal-Lucent	Enterprise DeskPhone	ALE-400	Unknown
Unknown	Adapter	KCHB0502000CN	Unknown


External I/O Cable

Cable Description	Length (m)	From Port	To
Unshielded Detachable USB Cable	1.47	Adapter	EUT / Enterprise DeskPhone


Block Diagram of Test Setup

For conducted emission:

Adapter Charging:

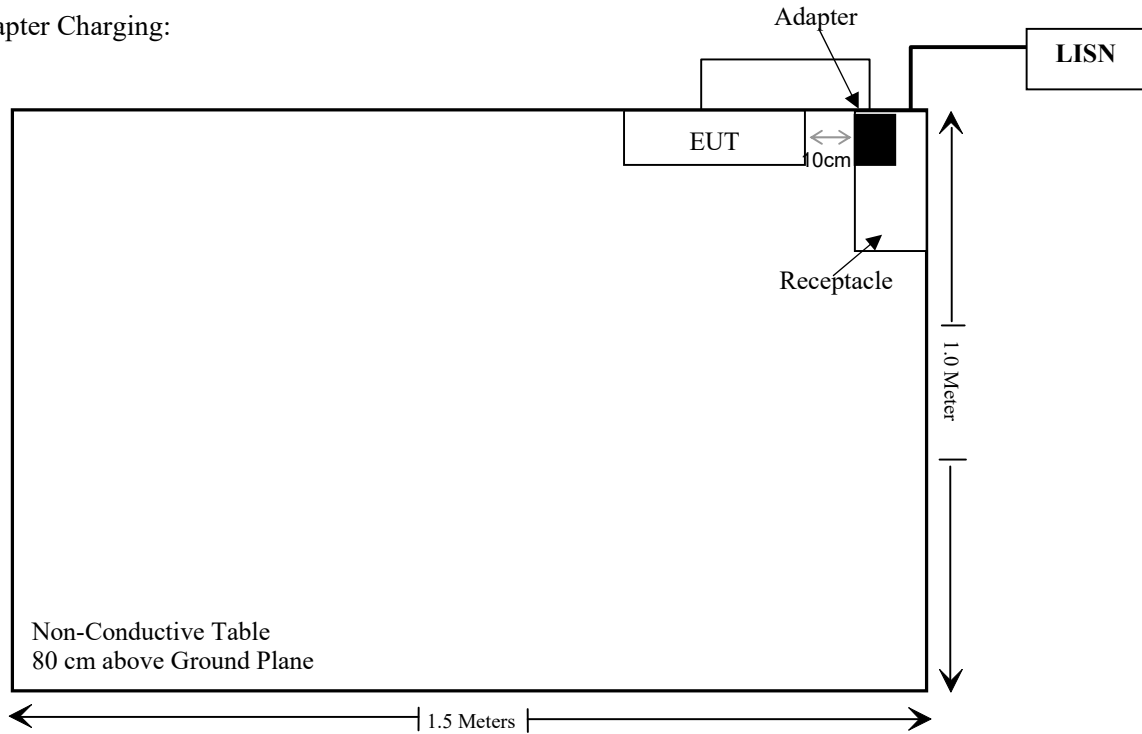


Telephone Base Charging:

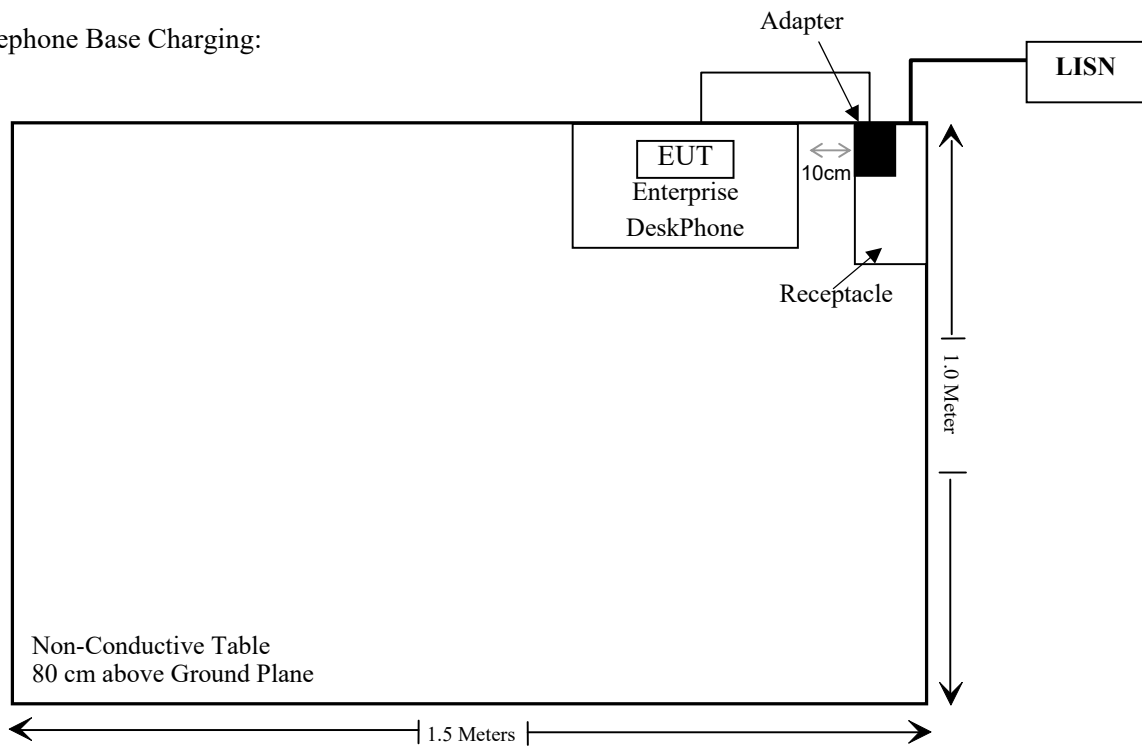


For radiated emission:
Below 1GHz:


Adapter Charging

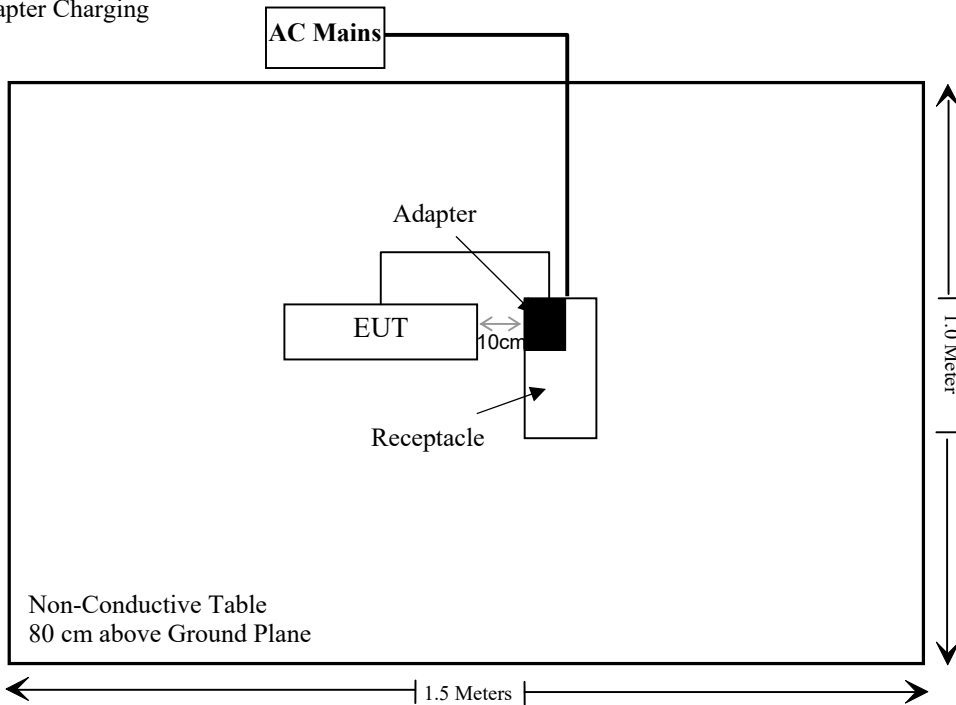

Telephone Base Charging:

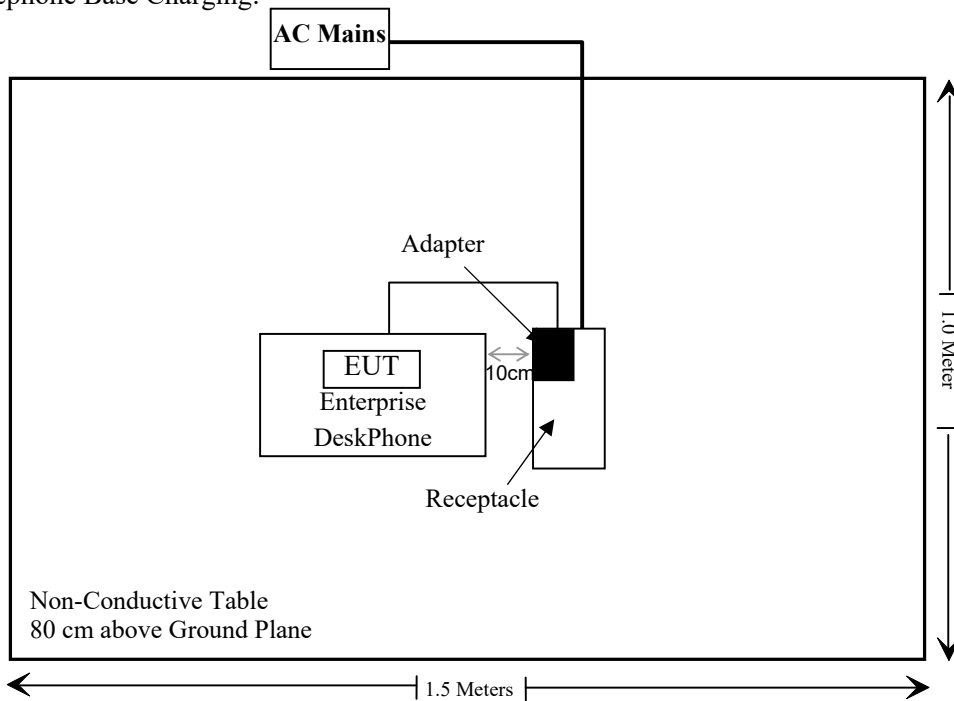

Above 1GHz:

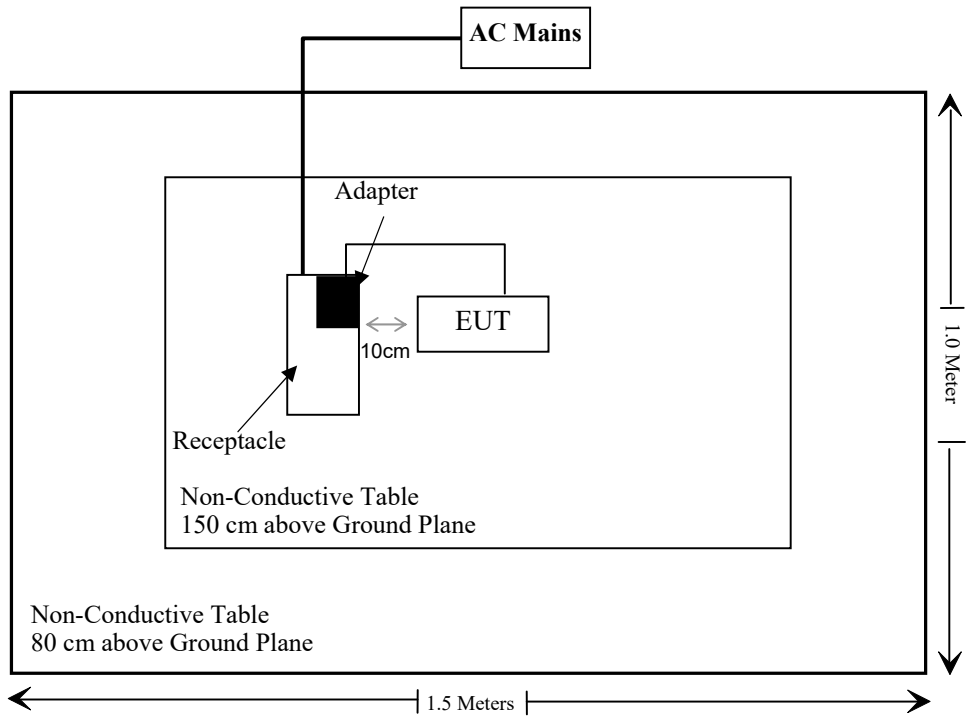

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC§15.247 (i), §1.1307 (b) (1) & §2.1093	RF Exposure	Compliant
§15.203	Antenna Requirement	Compliant
§15.207(a)	AC Line Conducted Emissions	Compliant
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliant
§15.247(a)(1)	20 dB Emission Bandwidth & 99% Occupied Bandwidth	Compliant
§15.247(a)(1)	Channel Separation Test	Compliant
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliant
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliant
§15.247(b)(1)	Peak Output Power Measurement	Compliant
§15.247(d)	Band edges	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde& Schwarz	EMI Test Receiver	ESCI	100784	2021/02/03	2022/02/02
R & S	L.I.S.N.	ENV216	101314	2020/12/25	2021/12/24
Anritsu Corp	50Ω Coaxial Switch	MP59B	6200506474	2020/12/25	2021/12/24
Unknown	RF Coaxial Cable	N-2m	No.2	2020/12/25	2021/12/24
Conducted Emission Test Software: e3 19821b (V9)					
Radiated Emissions Test					
Rohde&Schwarz	Test Receiver	ESR	101817	2020/12/24	2021/12/23
Rohde & Schwarz	Spectrum Analyzer	FSV-40	101495	2020/12/24	2021/12/23
A.H. Systems, inc.	Preamplifier	PAM-0118P	531	2021/07/08	2022/07/07
SONOMA INSTRUMENT	Amplifier	310 N	186131	2020/12/25	2021/12/24
Quinstar	Amplifier	QLW-184055 36-J0	15964001002	2020/11/28	2021/11/27
Anritsu Corp	50 Coaxial Switch	MP59B	6100237248	2020/12/25	2021/12/24
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2020/01/05	2023/01/04
Schwarzbeck	Horn Antenna	BBHA9120D	9120D-1067	2020/01/05	2023/01/04
Schwarzbeck	HORN ANTENNA	BBHA9170	9170-359	2020/01/05	2023/01/04
Wainwright	High Pass Filter	WHKX3.6/18 G-10SS	5	2020/12/25	2021/12/24
Unknown	RF Coaxial Cable	N-5m	No.3	2020/12/25	2021/12/24
Unknown	RF Coaxial Cable	N-5m	No.4	2020/12/25	2021/12/24
Unknown	RF Coaxial Cable	N-1m	No.5	2020/12/25	2021/12/24
Unknown	RF Coaxial Cable	N-1m	No.6	2020/12/25	2021/12/24
Radiated Emission Test Software: e3 19821b (V9)					
RF Conducted Test					
Rohde&Schwarz	Spectrum Analyzer	FSV40	101495	2020/12/24	2021/12/23
Rohde & Schwarz	Open Switch and Control Unit	OSP120 +OSP -B157	101244 + 100866	2020/12/24	2021/12/23
WEINSCHHEL	10dB Attenuator	5324	AU 3842	2020/12/14	2021/12/13

* **Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC§15.247 (i), §1.1307 (b) (1) &§2.1093 – RF EXPOSURE

Applicable Standard

According to FCC §2.1093 and §1.1307(b) (1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission’s guideline.

According to KDB 447498 D01 General RF Exposure Guidance

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

1. $f(\text{GHz})$ is the RF channel transmit frequency in GHz.
2. Power and distance are rounded to the nearest mW and mm before calculation.
3. The result is rounded to one decimal place for comparison.
4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

Test Result:

For worst case:

Mode	Frequency (MHz)	Maximum Tune-up power		Calculated Distance (mm)	Calculated Value	Threshold (1-g SAR)	SAR Test Exclusion
		(dBm)	(mW)				
Bluetooth	2480	5.8	3.8	5	1.2	3.0	Yes

Result: Compliant.

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has one internal Antenna arrangement, which was permanently attached and the antenna gain is 0 dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliant.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup

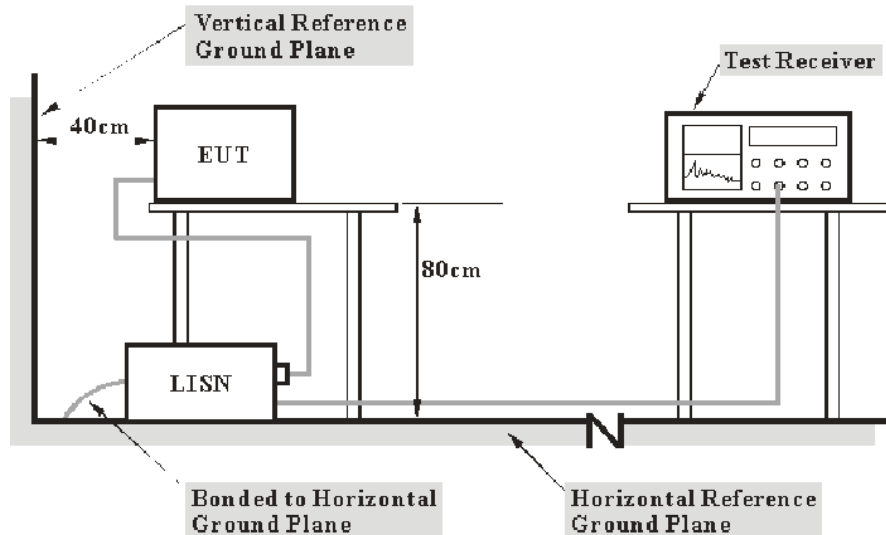

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Correct Factor & Margin Calculation

The Correct factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correct Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\begin{aligned} \text{Over Limit} &= \text{Result} - \text{Limit} \\ \text{Result} &= \text{Reading} + \text{Correct Factor} \end{aligned}$$


Test Data

Environmental Conditions

Temperature:	23 °C
Relative Humidity:	48 %
ATM Pressure:	101.0 kPa


The testing was performed by Ting Lü on 2021-11-02.

Test mode: Adapter Charging + BT
AC 120V/60 Hz, Line

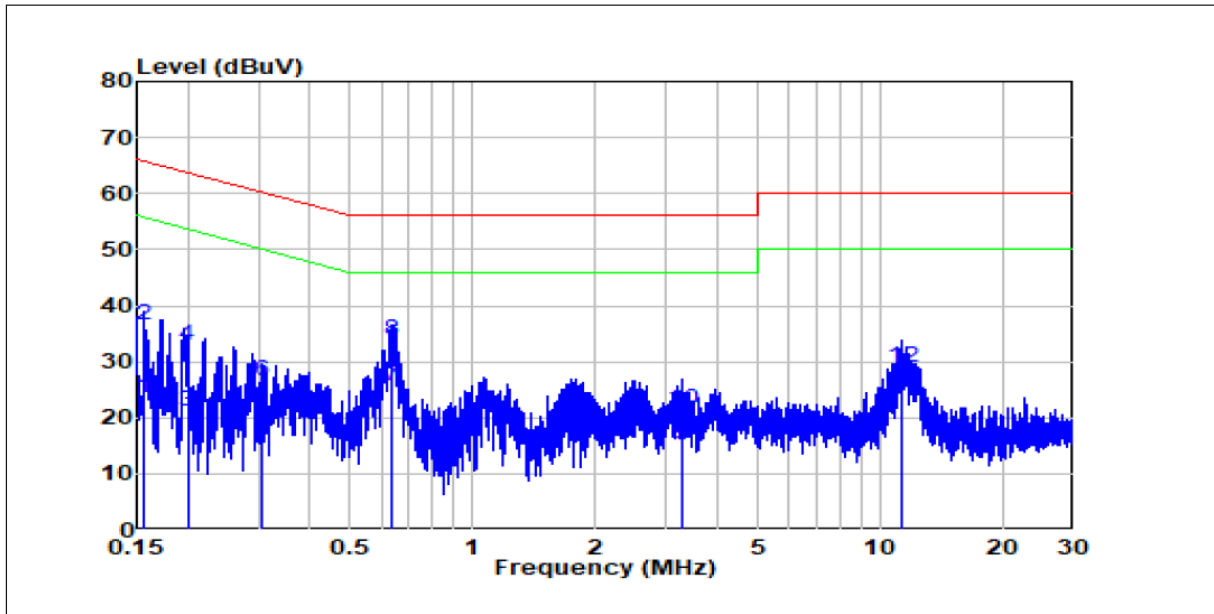


No.	Frequency	Reading	Correct	Result	Limit	Over Limit	Remark	Phase
	(MHz)	(dBuV)	Factor(dB)	(dBuV)	(dBuV)	(dB)		
1	0.156	13.78	9.89	23.67	55.68	-32.01	Average	Line
2	0.156	26.56	9.89	36.45	65.68	-29.23	QP	Line
3	0.200	11.30	9.80	21.10	53.61	-32.51	Average	Line
4	0.200	23.18	9.80	32.98	63.61	-30.63	QP	Line
5	0.306	7.88	9.80	17.68	50.08	-32.40	Average	Line
6	0.306	16.83	9.80	26.63	60.08	-33.45	QP	Line
7	0.636	15.96	9.81	25.77	46.00	-20.23	Average	Line
8	0.636	24.01	9.81	33.82	56.00	-22.18	QP	Line
9	3.276	5.23	9.93	15.16	46.00	-30.84	Average	Line
10	3.276	11.44	9.93	21.37	56.00	-34.63	QP	Line
11	11.355	13.97	10.08	24.05	50.00	-25.95	Average	Line
12	11.355	18.86	10.08	28.94	60.00	-31.06	QP	Line

AC 120V/60 Hz, Neutral

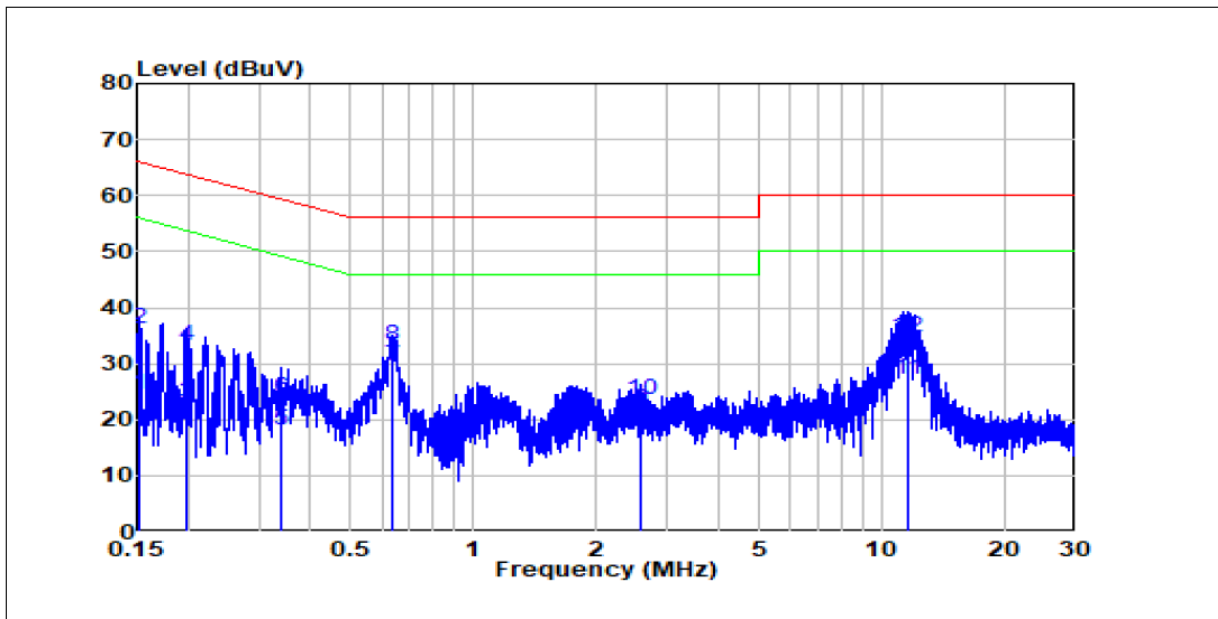


No.	Frequency	Reading	Correct	Result	Limit	Over Limit	Remark	Phase
	(MHz)	(dBuV)	Factor(dB)	(dBuV)	(dBuV)	(dB)		
1	0.151	14.62	9.90	24.52	55.92	-31.40	Average	Neutral
2	0.151	26.41	9.90	36.31	65.92	-29.61	QP	Neutral
3	0.200	13.05	10.00	23.05	53.62	-30.57	Average	Neutral
4	0.200	23.21	10.00	33.21	63.62	-30.41	QP	Neutral
5	0.337	8.08	9.95	18.03	49.28	-31.25	Average	Neutral
6	0.337	13.84	9.95	23.79	59.28	-35.49	QP	Neutral
7	0.633	19.56	9.91	29.47	46.00	-16.53	Average	Neutral
8	0.633	23.41	9.91	33.32	56.00	-22.68	QP	Neutral
9	2.560	11.71	9.96	21.67	46.00	-24.33	Average	Neutral
10	2.560	13.48	9.96	23.44	56.00	-32.56	QP	Neutral
11	11.559	17.08	10.08	27.16	50.00	-22.84	Average	Neutral
12	11.559	24.55	10.08	34.63	60.00	-25.37	QP	Neutral

Test mode: Telephone Base Charging + BT
AC 120V/60 Hz, Line

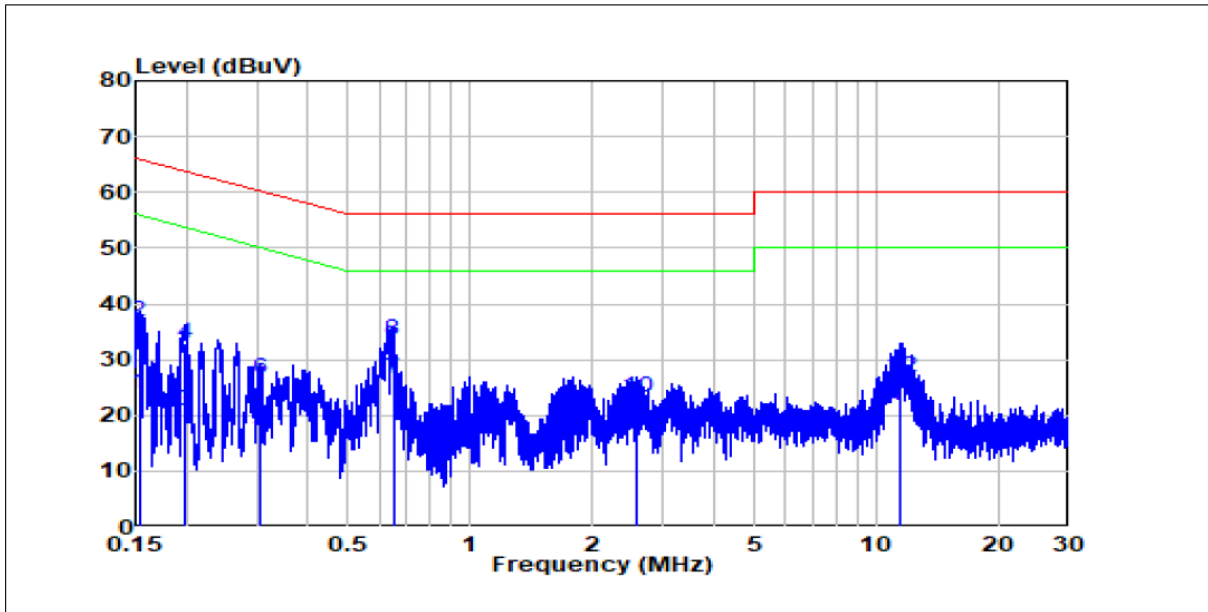

No.	Frequency	Reading	Correct	Result	Limit	Over Limit	Remark	Phase
	(MHz)	(dBuV)	Factor(dB)	(dBuV)	(dBuV)	(dB)		
1	0.153	14.09	9.89	23.98	55.83	-31.85	Average	Line
2	0.153	26.86	9.89	36.75	65.83	-29.08	QP	Line
3	0.200	11.02	9.80	20.82	53.62	-32.80	Average	Line
4	0.200	23.02	9.80	32.82	63.62	-30.80	QP	Line
5	0.306	7.49	9.80	17.29	50.09	-32.80	Average	Line
6	0.306	16.64	9.80	26.44	60.09	-33.65	QP	Line
7	0.647	16.67	9.81	26.48	46.00	-19.52	Average	Line
8	0.647	23.80	9.81	33.61	56.00	-22.39	QP	Line
9	2.582	7.63	9.93	17.56	46.00	-28.44	Average	Line
10	2.582	13.41	9.93	23.34	56.00	-32.66	QP	Line
11	11.514	11.73	10.08	21.81	50.00	-28.19	Average	Line
12	11.514	16.80	10.08	26.88	60.00	-33.12	QP	Line



AC 120V/60 Hz, Neutral

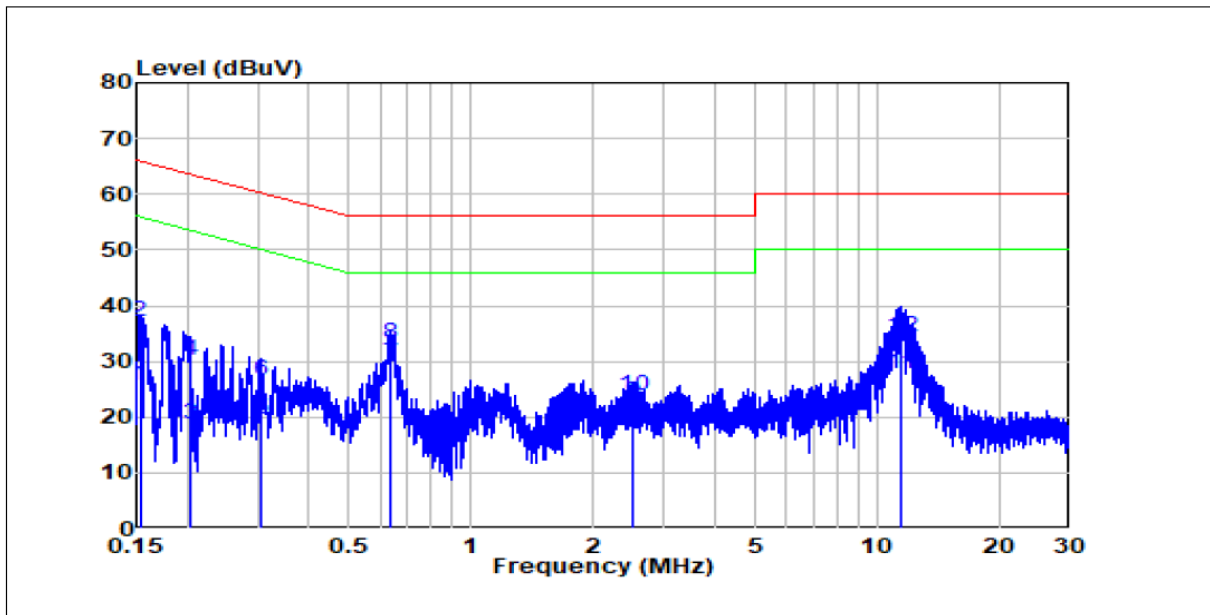

No.	Frequency	Reading	Correct	Result	Limit	Over	Remark	Phase
	(MHz)	(dBuV)	Factor(dB)	(dBuV)	(dBuV)	(dB)		
1	0.153	15.68	9.91	25.59	55.83	-30.24	Average	Neutral
2	0.153	27.09	9.91	37.00	65.83	-28.83	QP	Neutral
3	0.203	8.78	10.00	18.78	53.49	-34.71	Average	Neutral
4	0.203	20.13	10.00	30.13	63.49	-33.36	QP	Neutral
5	0.304	9.53	9.96	19.49	50.13	-30.64	Average	Neutral
6	0.304	16.70	9.96	26.66	60.13	-33.47	QP	Neutral
7	0.636	19.72	9.91	29.63	46.00	-16.37	Average	Neutral
8	0.636	23.24	9.91	33.15	56.00	-22.85	QP	Neutral
9	2.515	12.61	9.96	22.57	46.00	-23.43	Average	Neutral
10	2.515	13.99	9.96	23.95	56.00	-32.05	QP	Neutral
11	11.445	17.59	10.08	27.67	50.00	-22.33	Average	Neutral
12	11.445	24.39	10.08	34.47	60.00	-25.53	QP	Neutral

FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS**Applicable Standard**

FCC §15.205; §15.209; §15.247(d)

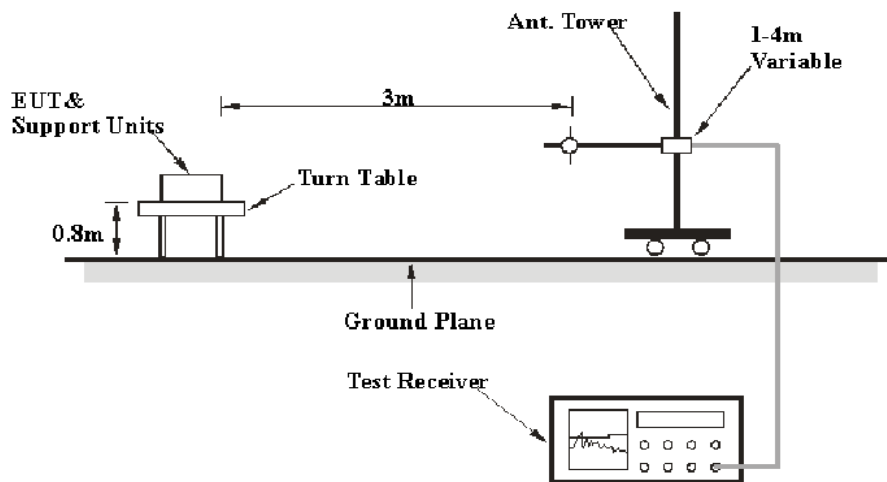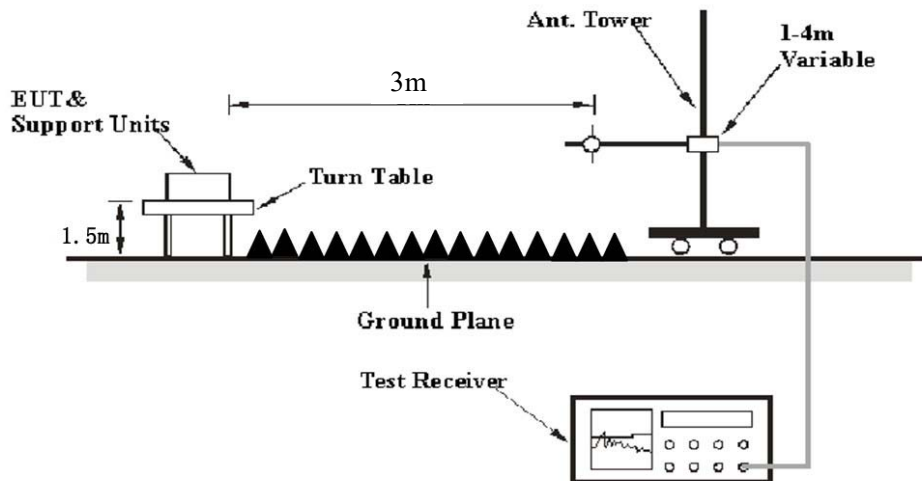EUT Setup**Below 1 GHz:****Above 1GHz:**

The radiated emission performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK
	1 MHz	10 Hz	/	Average

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Factor & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin/over limit of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned} \text{Over Limit/Margin} &= \text{Result} / \text{Absolute Level} - \text{Limit} \\ \text{Result} / \text{Absolute Level} &= \text{Reading} + \text{Factor} \end{aligned}$$

Test Data

Environmental Conditions


Temperature:	23-25 °C
Relative Humidity:	48-52 %
ATM Pressure:	101.0 kPa

The testing was performed by Ting Lü on 2021-11-02 for below 1GHz and 2021-11-01 for above 1GHz.

(Scan with GFSK, $\pi/4$ -DQPSK, 8DPSK mode at X axis, Y axis, Z axis, the worst case is $\pi/4$ -DQPSK Mode at Z axis)


**Below 1GHz: ($\pi/4$ -DQPSK Mode, Low Channel)
Test mode: Telephone Base Charging + BT**

Horizontal

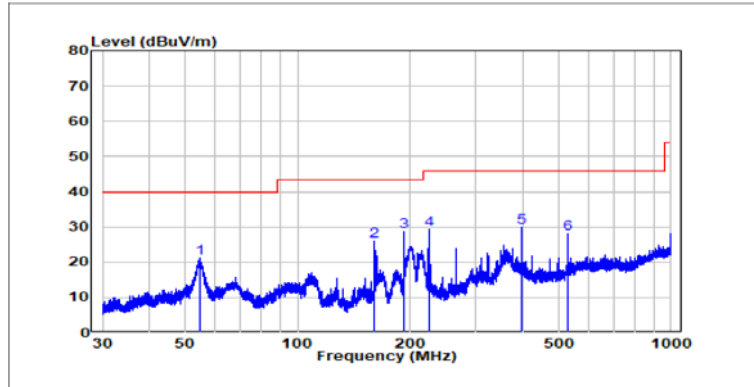

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Remark	Phase
1	54.83	39.34	-18.34	21.00	40.00	-19.00	Peak	HORIZONTAL
2	159.92	47.86	-21.77	26.09	43.50	-17.41	Peak	HORIZONTAL
3	192.08	48.75	-19.93	28.82	43.50	-14.68	Peak	HORIZONTAL
4	224.13	48.11	-18.95	29.16	46.00	-16.84	Peak	HORIZONTAL
5	397.98	45.57	-15.81	29.76	46.00	-16.24	Peak	HORIZONTAL
6	530.57	41.62	-13.55	28.07	46.00	-17.93	Peak	HORIZONTAL


Vertical

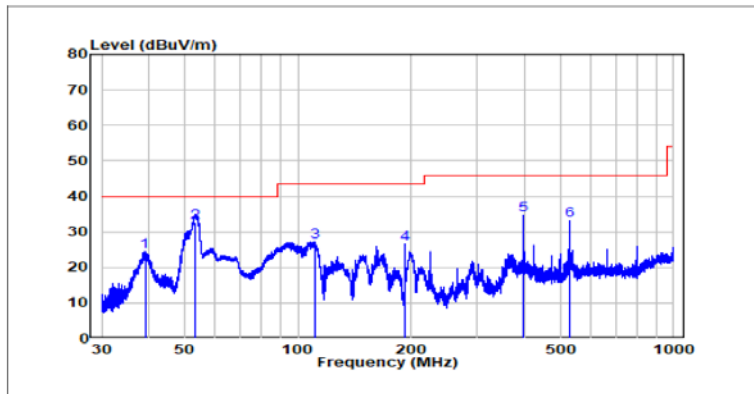

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Remark	Phase
1	39.11	43.21	-18.79	24.43	40.00	-15.57	Peak	VERTICAL
2	53.34	50.60	-18.00	32.60	40.00	-7.40	QP	VERTICAL
3	110.76	46.49	-19.28	27.21	43.50	-16.29	Peak	VERTICAL
4	192.00	46.65	-19.94	26.71	43.50	-16.79	Peak	VERTICAL
5	397.98	50.53	-15.81	34.72	46.00	-11.28	Peak	VERTICAL
6	530.57	46.75	-13.55	33.20	46.00	-12.80	Peak	VERTICAL

Test mode: Adapter Charging + BT


Horizontal

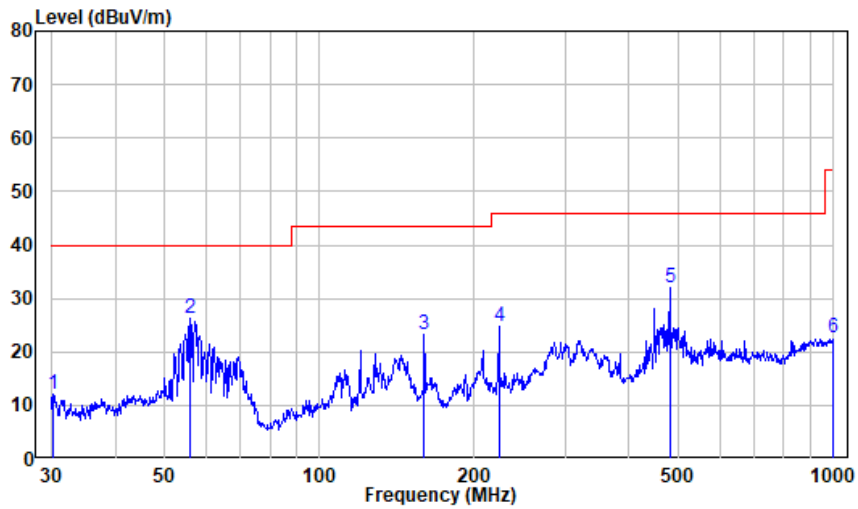

Site : chamber
 Condition: 3m Horizontal
 Test Mode: Adapter Charging + BT
 Model No.: ALE-160 WB Cordless Handset

	Freq	Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dB	
1	30.317	-20.48	32.42	11.94	40.00	-28.06 Peak
2	55.805	-18.57	44.82	26.25	40.00	-13.75 Peak
3	159.784	-21.78	45.02	23.24	43.50	-20.26 Peak
4	223.733	-18.95	43.66	24.71	46.00	-21.29 Peak
5	480.528	-14.42	46.42	32.00	46.00	-14.00 Peak
6	1000.000	-7.34	30.03	22.69	54.00	-31.31 Peak

Vertical

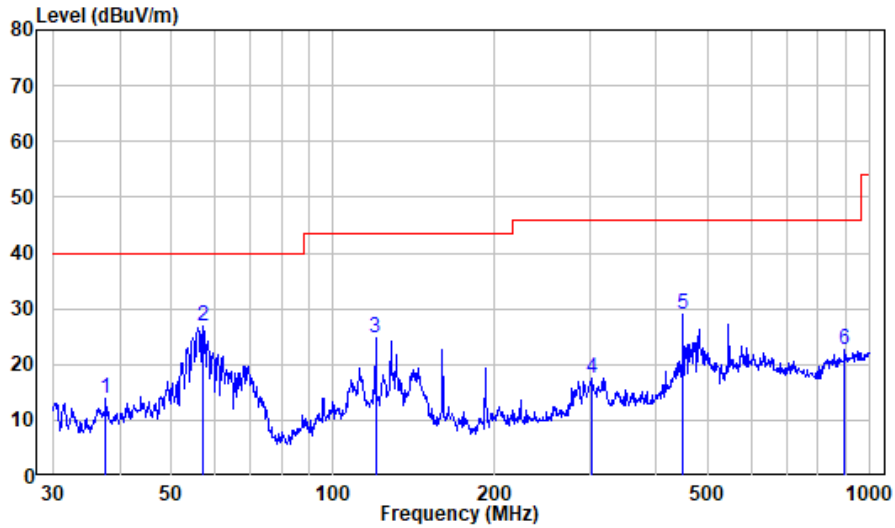

Site : chamber
 Condition: 3m VERTICAL
 Test Mode: Adapter Charging + BT
 Model No.: ALE-160 WB Cordless Handset

	Freq	Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	37.680	-19.02	33.01	13.99	40.00	-26.01	Peak
2	57.191	-18.87	45.67	26.80	40.00	-13.20	Peak
3	119.856	-20.39	45.03	24.64	43.50	-18.86	Peak
4	302.481	-16.61	34.16	17.55	46.00	-28.45	Peak
5	447.982	-14.29	43.40	29.11	46.00	-16.89	Peak
6	896.997	-8.24	30.77	22.53	46.00	-23.47	Peak

Note: The results which over 6dB below to the limit were not recorded Quasi-peak.

Above 1GHz : (π /4-DQPSK Mode, and power by adapter is worst case):

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
	Reading (dBuV)	PK/AV		Height (m)	Polar (H/V)				
			Low Channel						
2310	45.27	PK	137	1.1	H	-6.84	38.43	74	-35.57
2310	47.9	PK	44	1.7	V	-6.84	41.06	74	-32.94
2390	50.55	PK	80	1.3	H	-6.44	44.11	74	-29.89
2390	50.36	PK	165	1.8	V	-6.44	43.92	74	-30.08
4804	50.23	PK	297	1.7	H	2.81	53.04	74	-20.96
4804	51.88	PK	312	1.5	V	2.81	54.69	74	-19.31
4804	37.12	AV	137	1.5	V	2.81	39.93	54	-14.07
Middle Channel									
4882	49.38	PK	340	1.4	H	3.04	52.42	74	-21.58
4882	51.39	PK	63	1.9	V	3.04	54.43	74	-19.57
4882	36.62	AV	63	1.9	V	3.04	39.66	54	-14.34
High Channel									
2483.5	49.08	PK	242	1.9	H	-5.96	43.12	74	-30.88
2483.5	50.22	PK	53	1.7	V	-5.96	44.26	74	-29.74
2500	45.91	PK	194	1.1	H	-5.88	40.03	74	-33.97
2500	49.64	PK	357	1.5	V	-5.88	43.76	74	-30.24
4960	48.69	PK	127	1.1	H	3.29	51.98	74	-22.02
4960	50.8	PK	202	1.4	V	3.29	54.09	74	-19.91
4960	35.99	AV	202	1.4	V	3.29	39.28	54	-14.72

Note:

Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Absolute Level (Corrected Amplitude) = Factor + Reading

Margin = Absolute Level (Corrected Amplitude) – Limit


The other spurious emission which is in the noise floor level was not recorded.

The test result of peak was 20dB below to the limit of peak, which can be compliant to the average limit, so just peak value was recorded.


1 GHz - 18 GHz: (Pre-Scan plots)

Low Channel

Horizontal

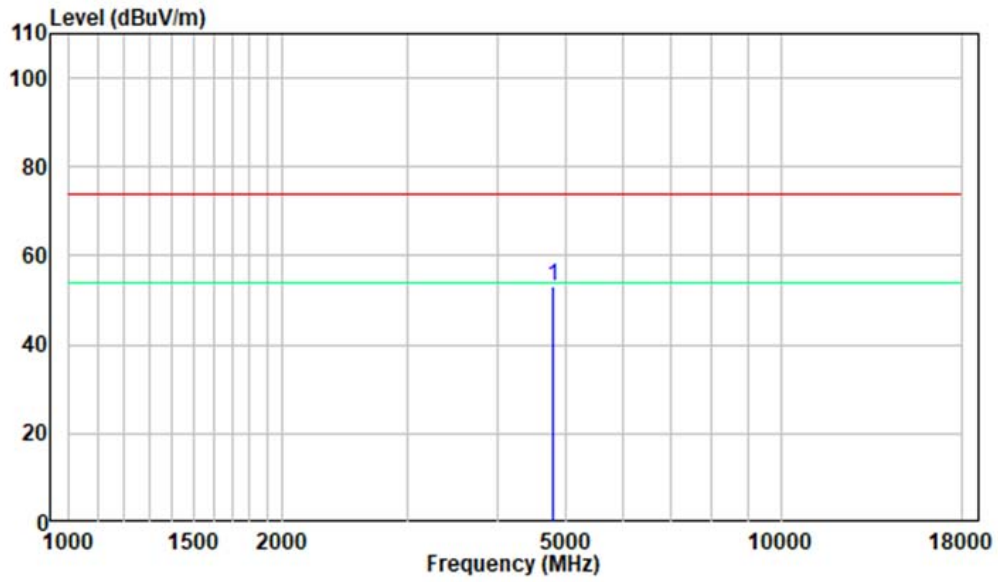


Vertical

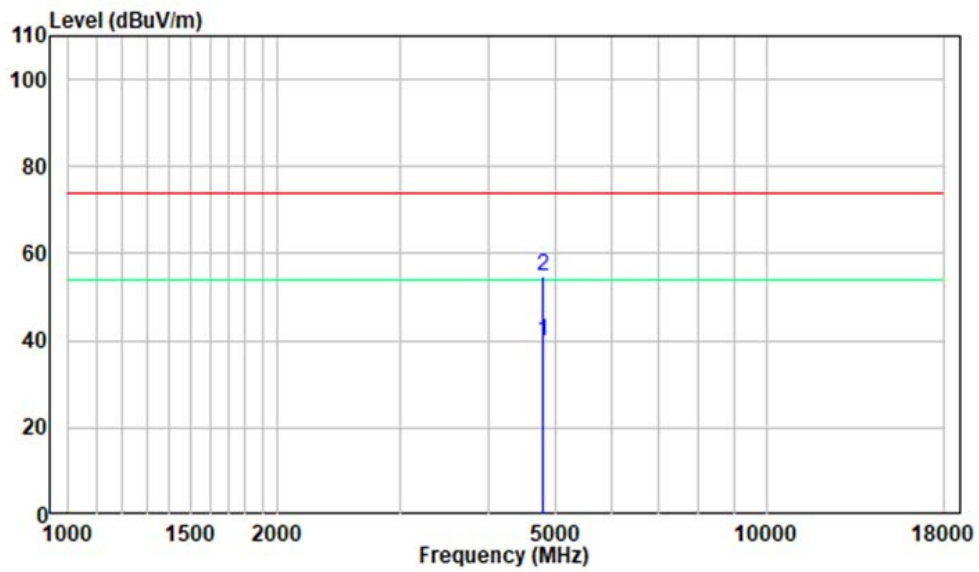


18-25GHz: (Pre-Scan plots)

Low Channel

Horizontal

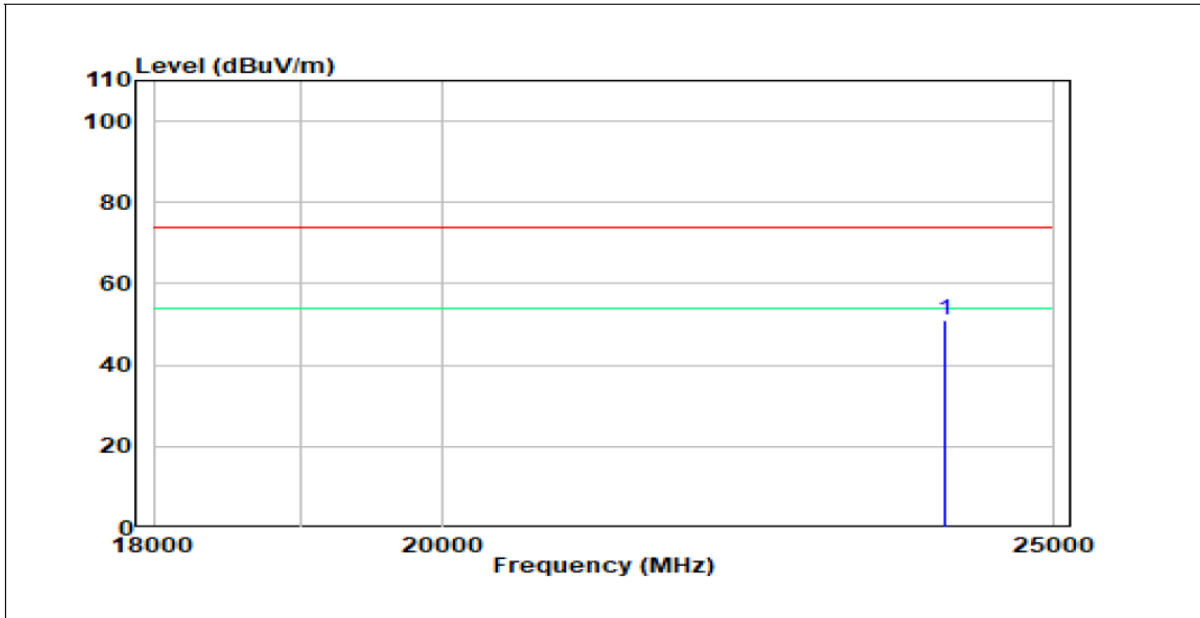

Vertical

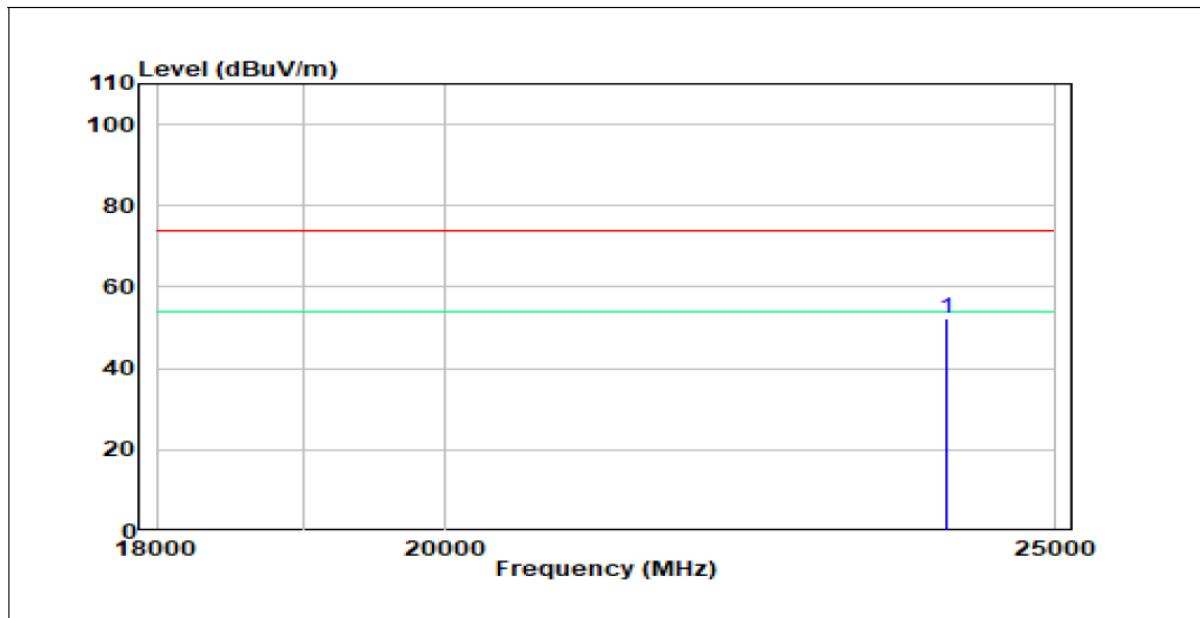

FCC §15.247(a) (1)-CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Test Procedure

1. Set the EUT in transmitting mode, maxhold the channel.
2. Set the adjacent channel of the EUT and maxhold another trace.
3. Measure the channel separation.

Test Data

Environmental Conditions

Temperature:	24 °C
Relative Humidity:	48 %
ATM Pressure:	101.0 kPa

The testing was performed by Ting Lü on 2021-11-01

EUT operation mode: Transmitting


Test Result: Compliant.

Test Mode	Antenna	Channel	Result[MHz]	Limit[MHz]	Verdict
DH1	Ant1	Hop	1.003	≥ 0.620	PASS
2DH1	Ant1	Hop	1.004	≥ 0.882	PASS
3DH1	Ant1	Hop	1	≥ 0.850	PASS

Note: the limit = $(2/3) * 20\text{dB bandwidth}$


Please refer to the below plots:

DH1_Ant1_Hop

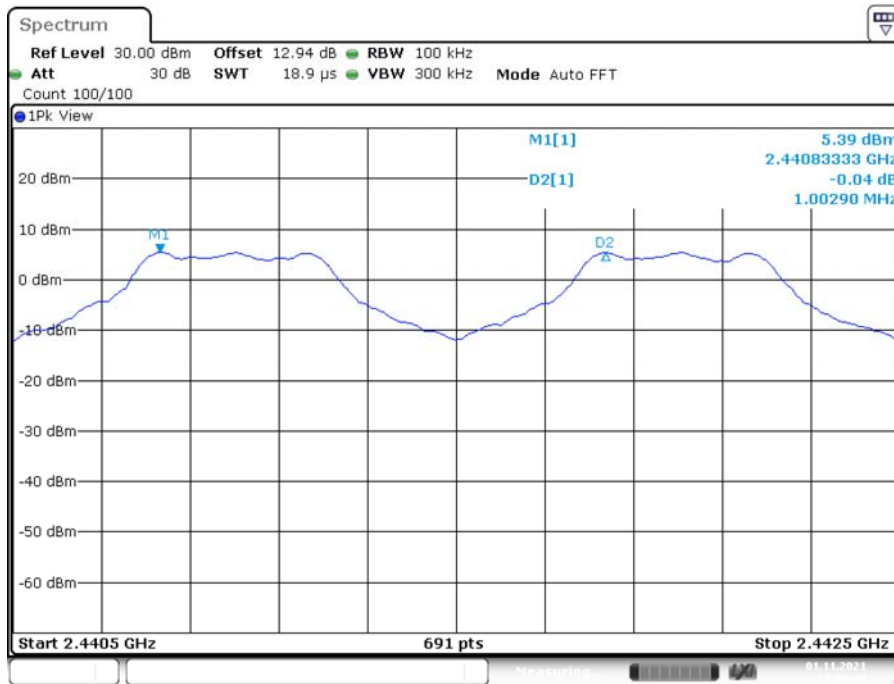


Date: 1.NOV.2021 11:04:45

2DH1_Ant1_Hop

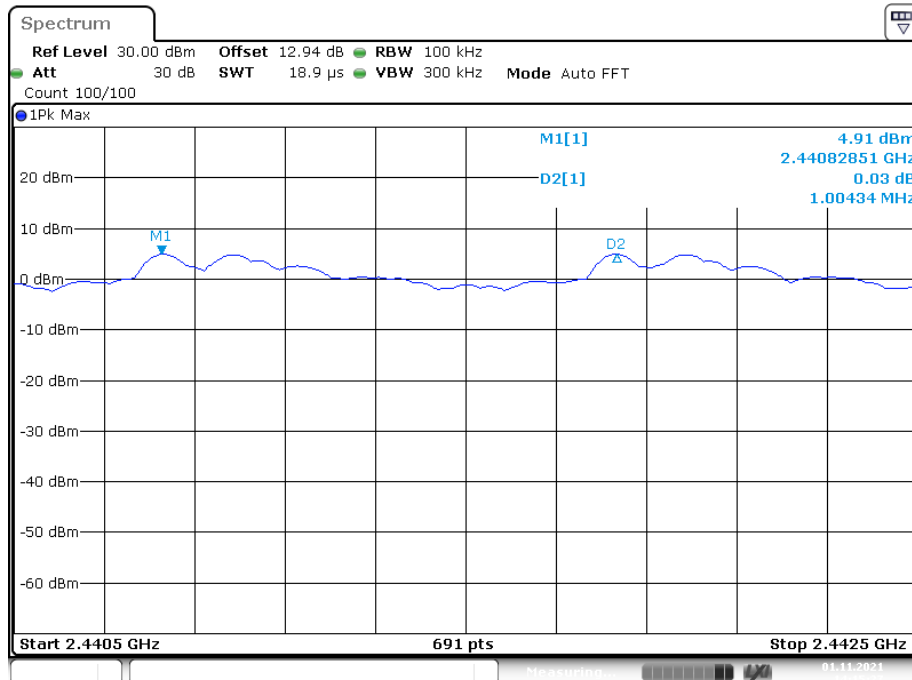

Date: 1.NOV.2021 14:15:27

3DH1_Ant1_Hop

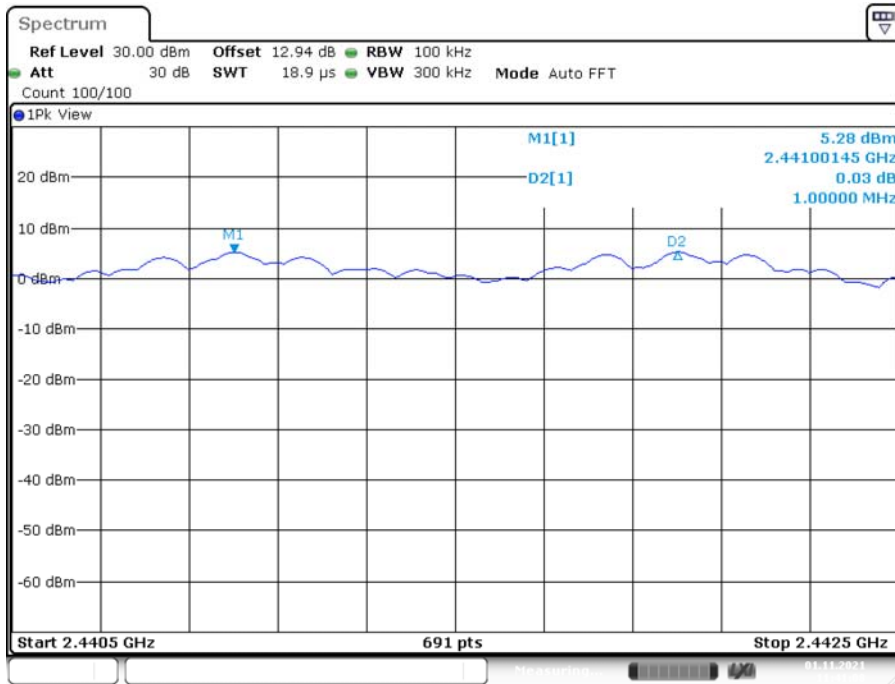

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH & 99% OCCUPIED BANDWIDTH

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.


Test Procedure

The following conditions shall be observed for measuring the occupied bandwidth and 20 dB bandwidth:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / 20 dB bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / 20 dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).



Test Data**Environmental Conditions**

Temperature:	24 °C
Relative Humidity:	48 %
ATM Pressure:	101.0 kPa

The testing was performed by Ting Lü on 2021-11-01.

EUT operation mode: Transmitting

Test Result: Compliant.


Test Mode	Antenna	Channel	20db EBW[MHz]	Limit[MHz]	Verdict
DH1	Ant1	2402	0.930	---	PASS
		2441	0.927	---	PASS
		2480	0.927	---	PASS
2DH1	Ant1	2402	1.317	---	PASS
		2441	1.323	---	PASS
		2480	1.323	---	PASS
3DH1	Ant1	2402	1.275	---	PASS
		2441	1.275	---	PASS
		2480	1.275	---	PASS

Test Mode	Antenna	Channel	99% Occupied Bandwidth [MHz]	Limit[MHz]	Verdict
DH1	Ant1	2402	0.857	---	PASS
		2441	0.857	---	PASS
		2480	0.854	---	PASS
2DH1	Ant1	2402	1.187	---	PASS
		2441	1.184	---	PASS
		2480	1.187	---	PASS
3DH1	Ant1	2402	1.172	---	PASS
		2441	1.172	---	PASS
		2480	1.172	---	PASS

Please refer to the below plots:


20 dB EMISSION BANDWIDTH

DH1_Ant1_2402MHz

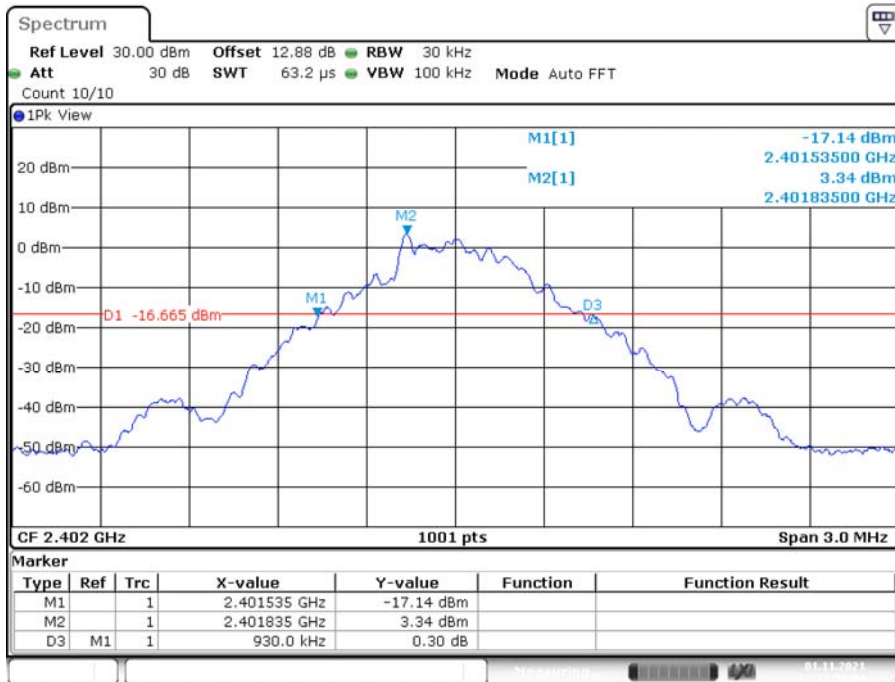


Date: 1.NOV.2021 11:55:04

DH1_Ant1_2441MHz

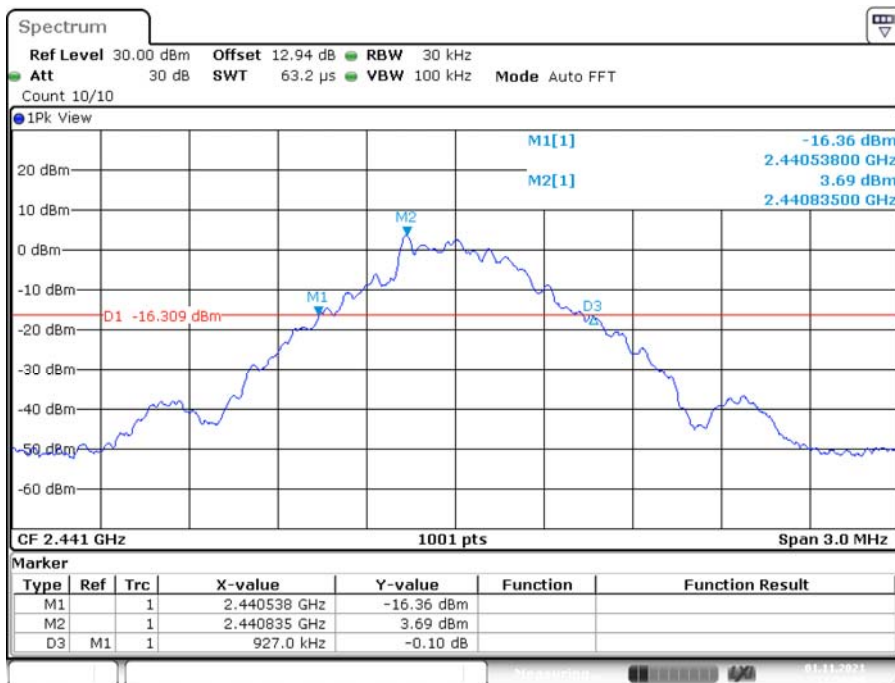


Date: 1.NOV.2021 11:56:09

DH1_Ant1_2480MHz

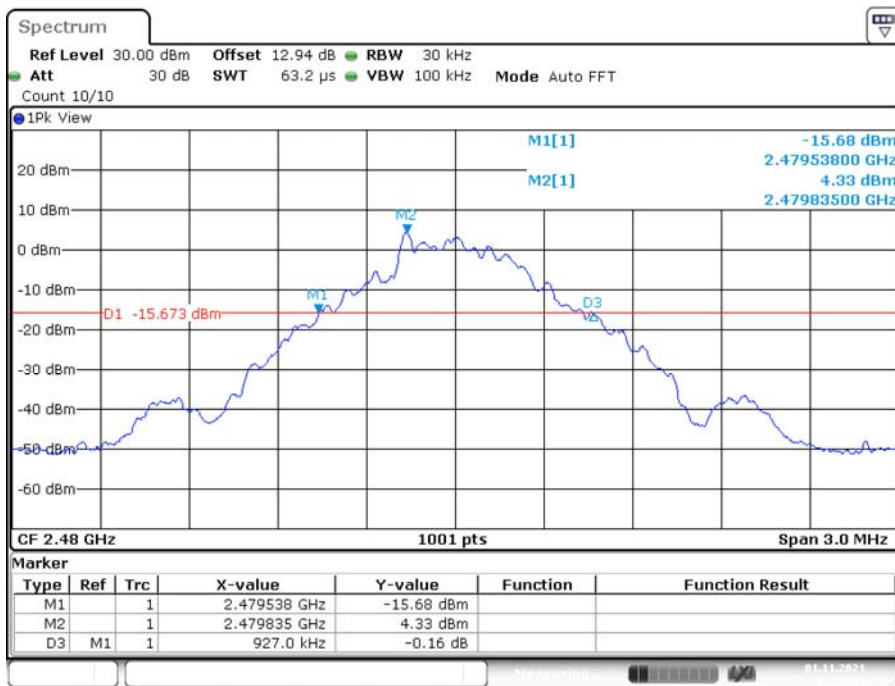


Date: 1.NOV.2021 11:57:13

2DH1_Ant1_2402MHz

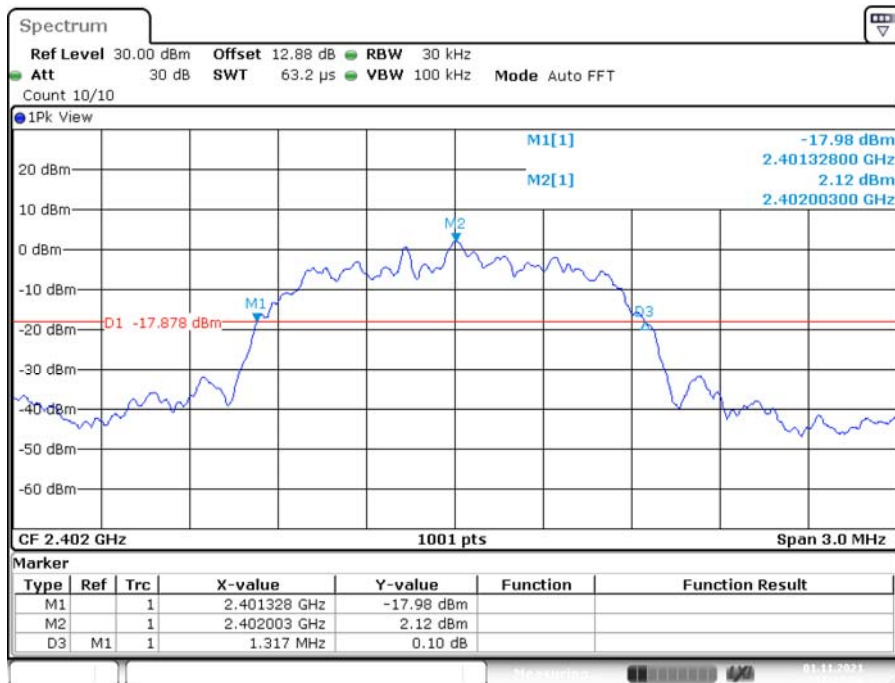


Date: 1.NOV.2021 11:13:32

2DH1_Ant1_2441MHz

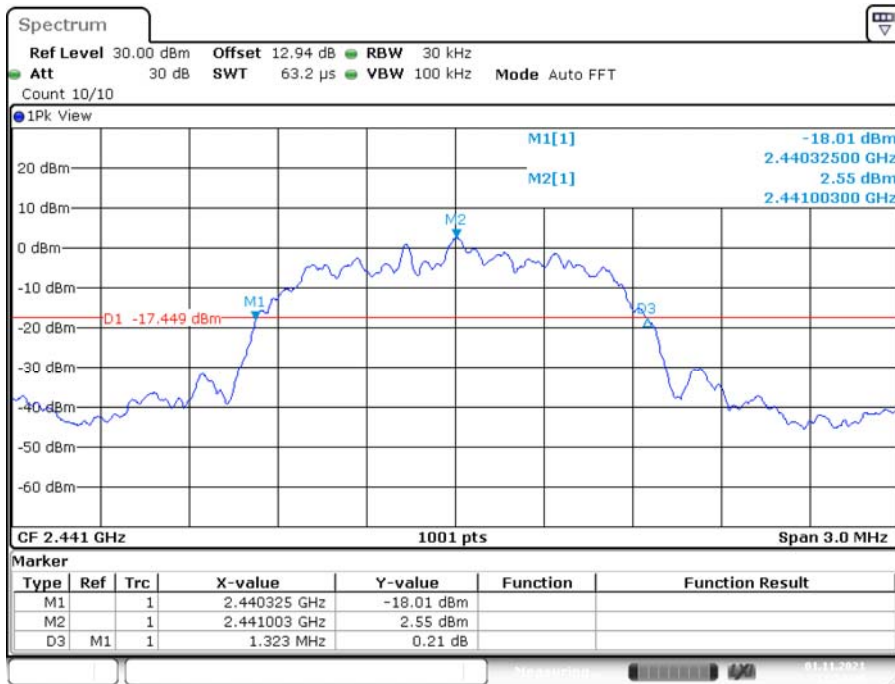


Date: 1.NOV.2021 11:14:41

2DH1_Ant1_2480MHz

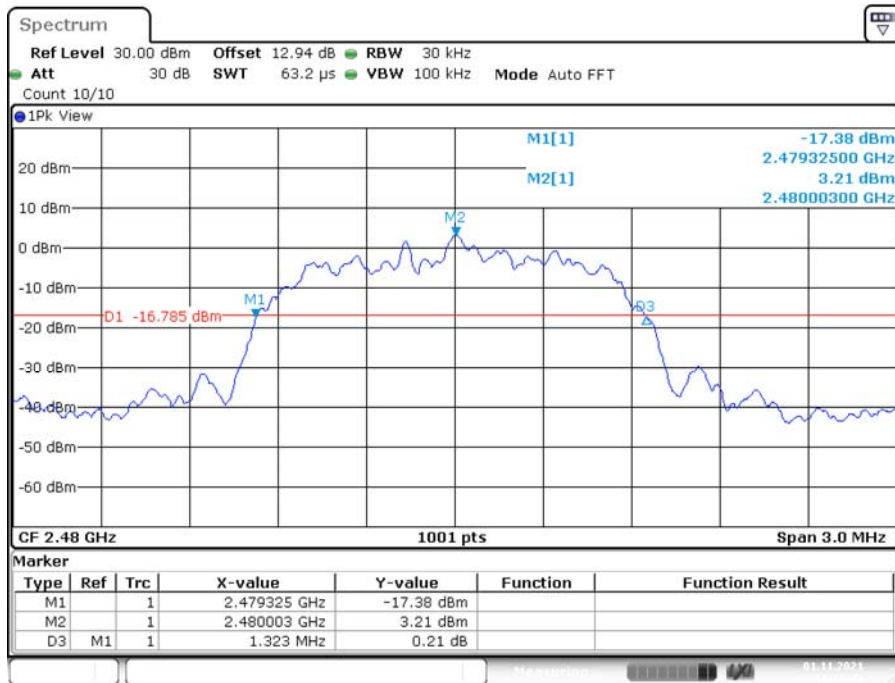


Date: 1.NOV.2021 11:15:43

3DH1_Ant1_2402MHz

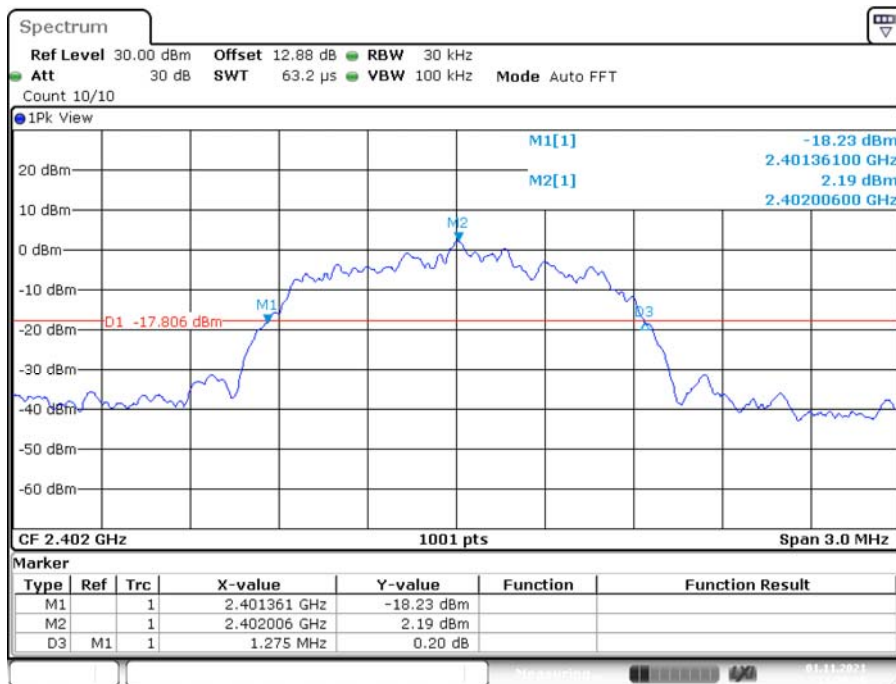


Date: 1.NOV.2021 11:00:17

3DH1_Ant1_2441MHz

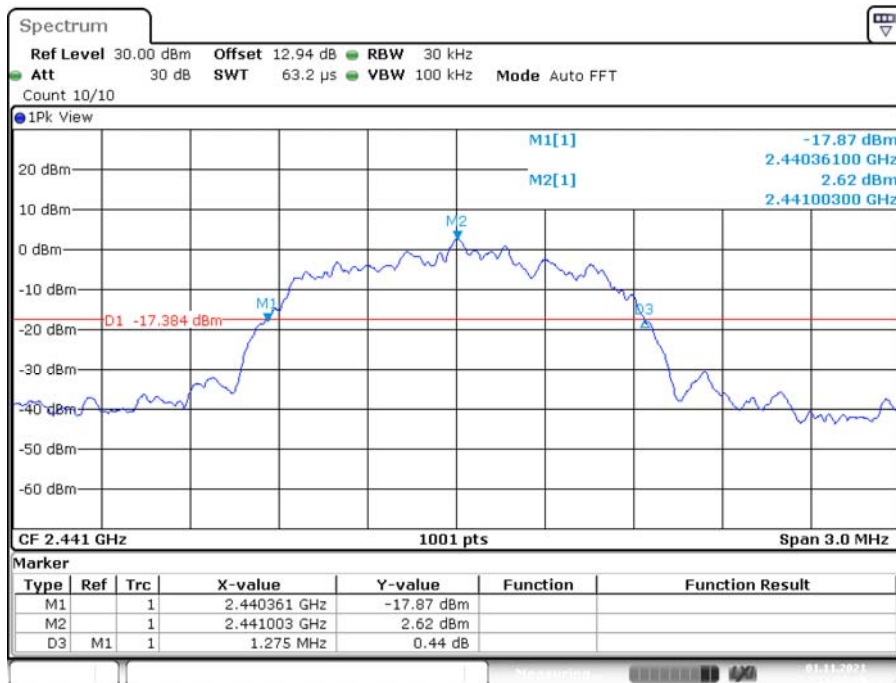

Date: 1.NOV.2021 11:01:19


3DH1_Ant1_2480MHz

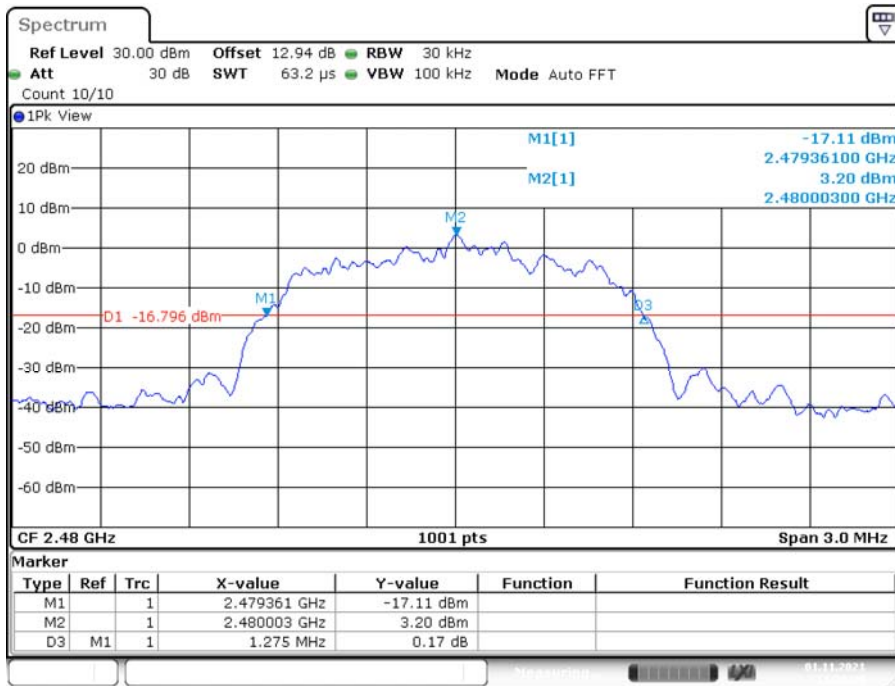

Date: 1.NOV.2021 11:02:21


99% OCCUPIED BANDWIDTH

DH1_Ant1_2402MHz

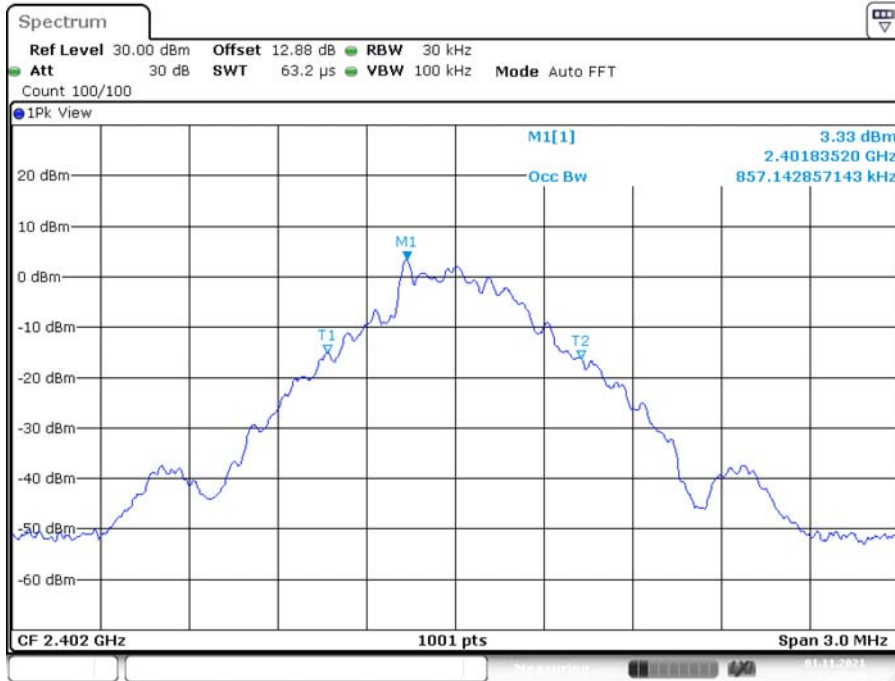


Date: 1.NOV.2021 11:55:21

DH1_Ant1_2441MHz

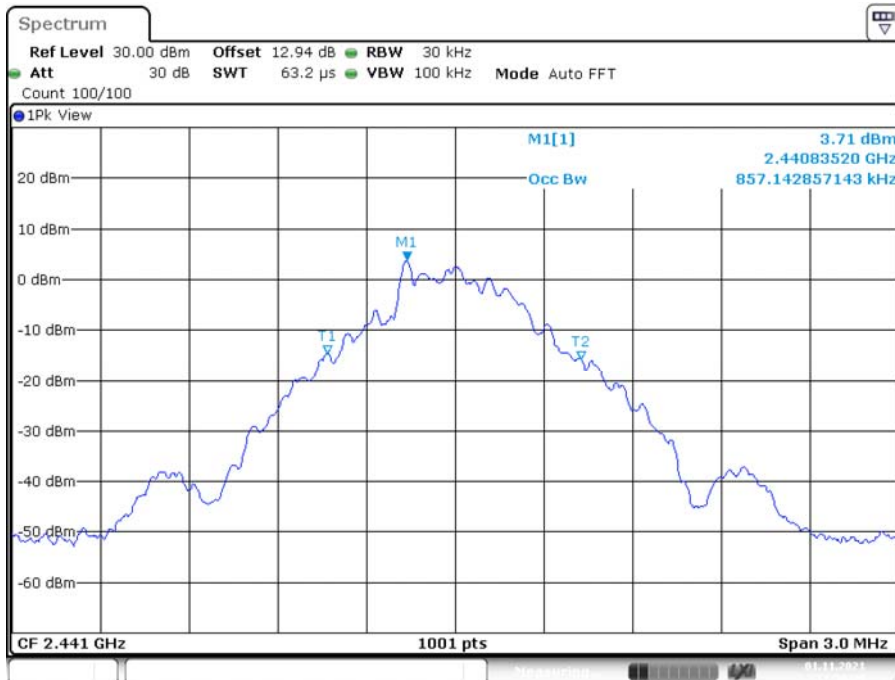


Date: 1.NOV.2021 11:56:26


DH1_Ant1_2480MHz

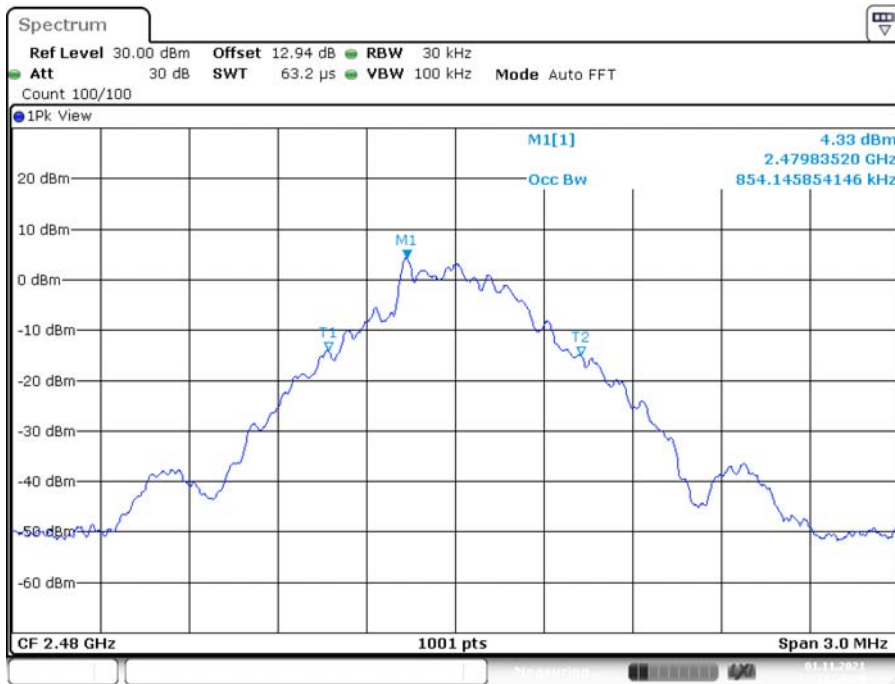

2DH1_Ant1_2402MHz

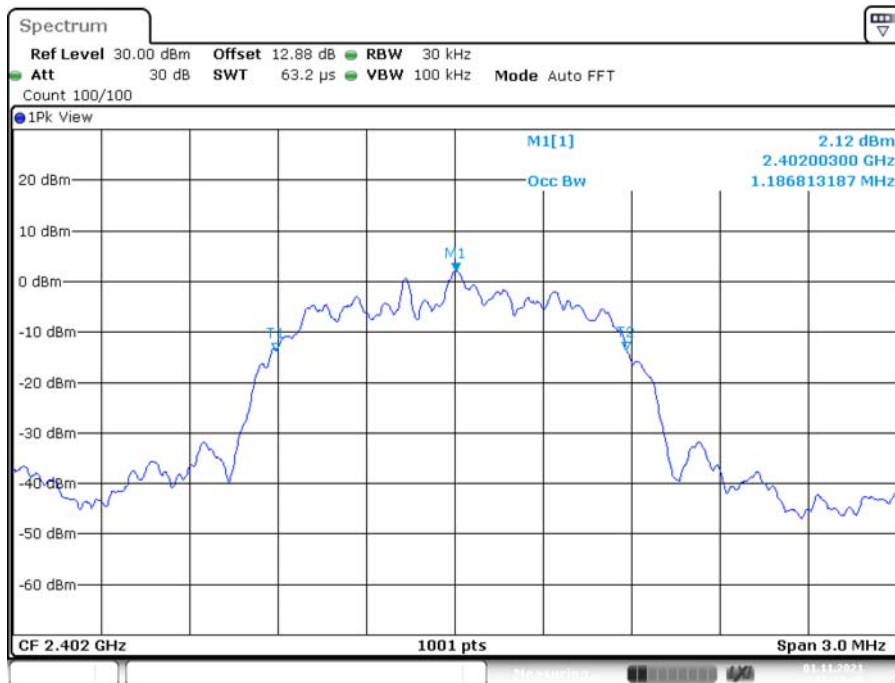


2DH1_Ant1_2441MHz

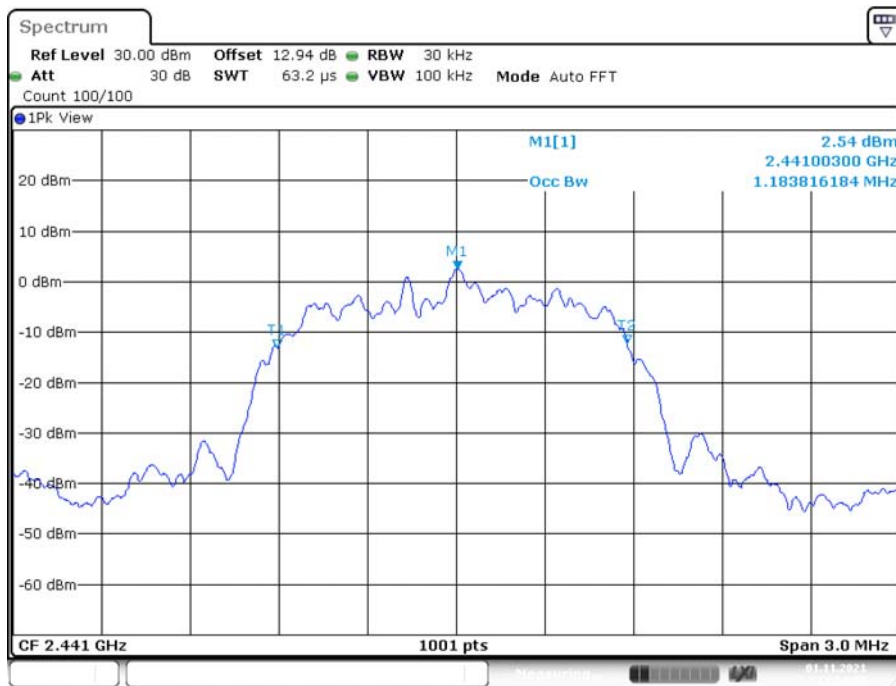


Date: 1.NOV.2021 11:14:57

2DH1_Ant1_2480MHz

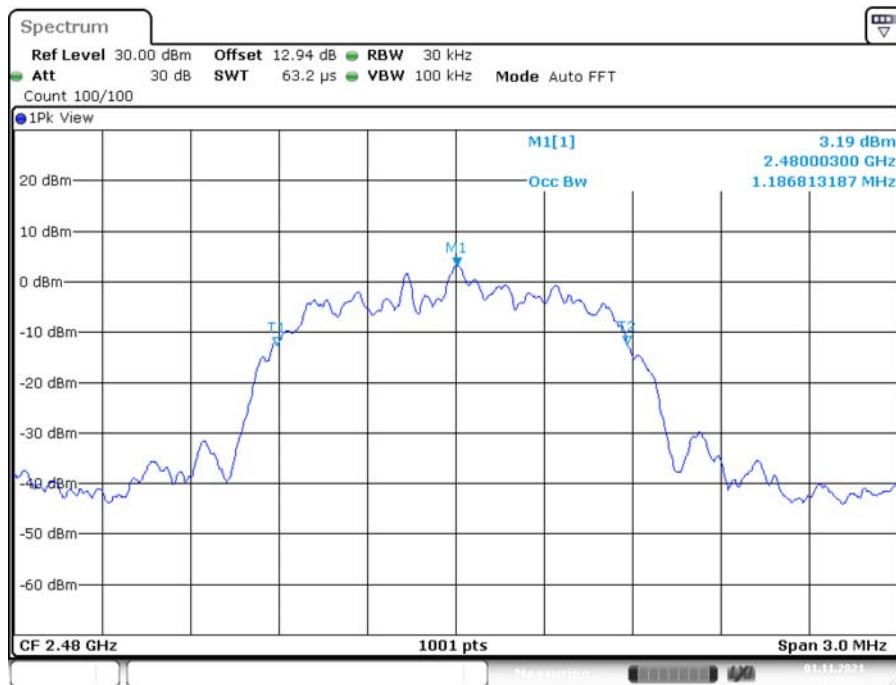


Date: 1.NOV.2021 11:16:00

3DH1_Ant1_2402MHz

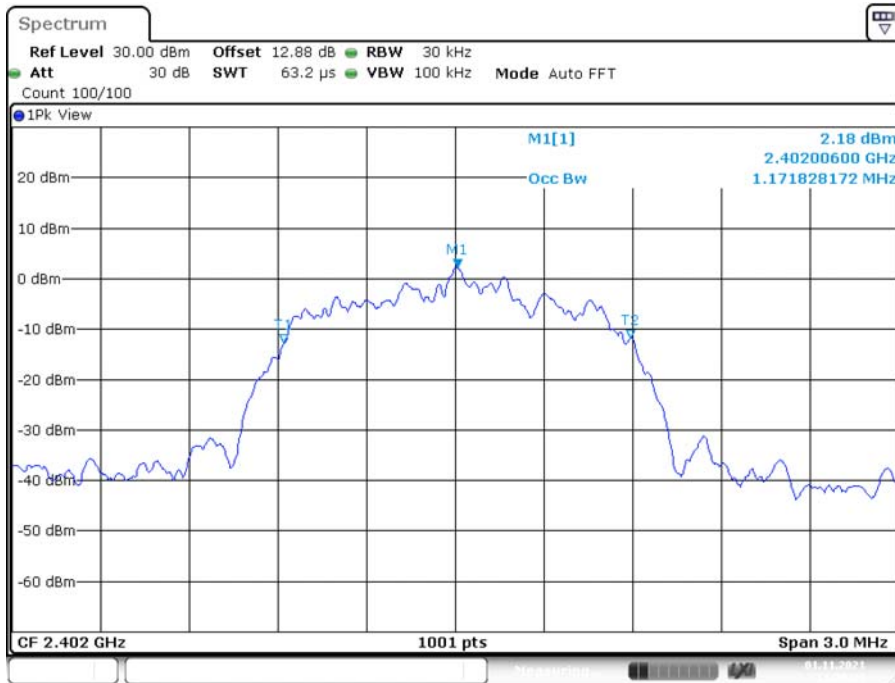


Date: 1.NOV.2021 11:00:34

3DH1_Ant1_2441MHz

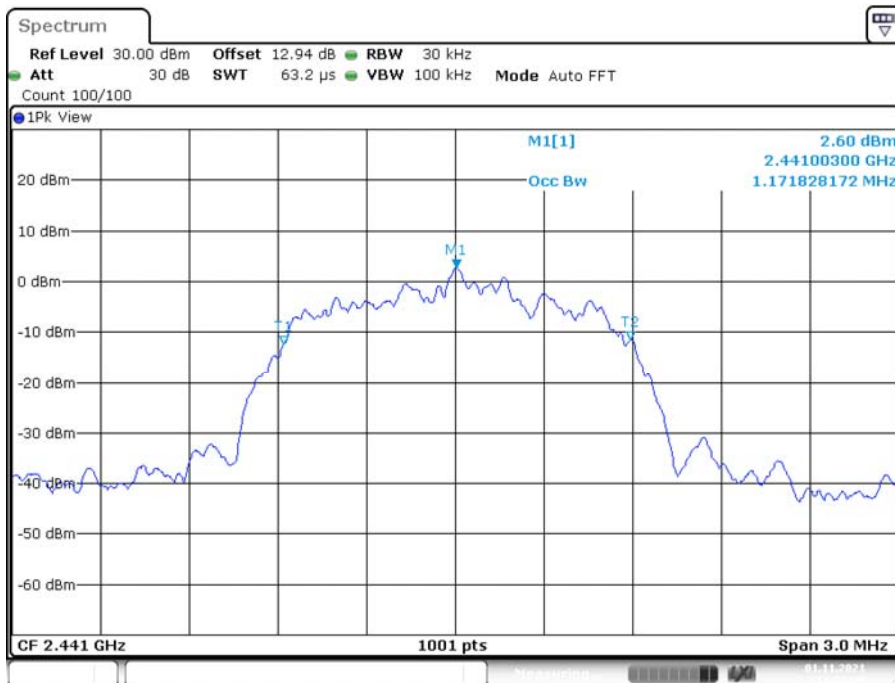

Date: 1.NOV.2021 11:01:36

3DH1_Ant1_2480MHz

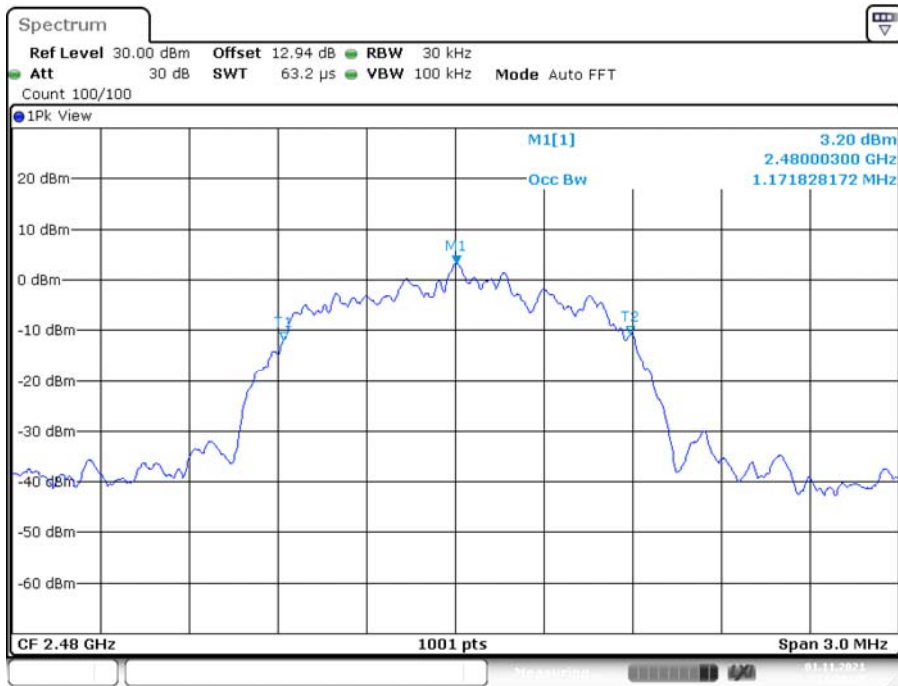

Date: 1.NOV.2021 11:02:38

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

Test Data

Environmental Conditions

Temperature:	24 °C
Relative Humidity:	48 %
ATM Pressure:	101.0 kPa


The testing was performed by Ting Lü on 2021-11-01.

EUT operation mode: Transmitting

Test Result: Compliant.


TestMode	Antenna	Channel	Result[Num]	Limit[Num]	Verdict
DH1	Ant1	Hop	79	>=15	PASS
2DH1	Ant1	Hop	79	>=15	PASS
3DH1	Ant1	Hop	79	>=15	PASS

DH1_Ant1_Hop

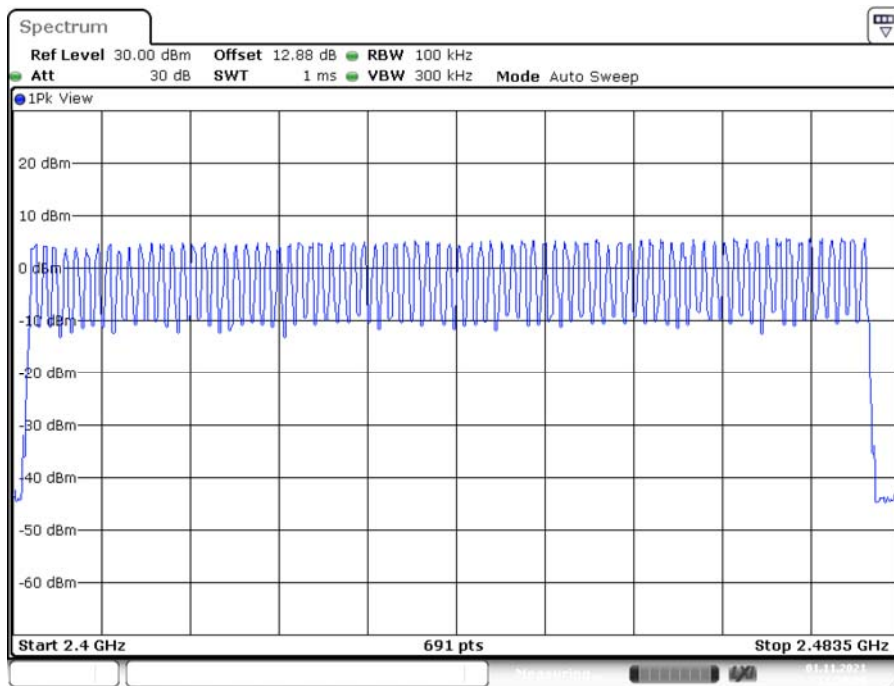


Date: 1.NOV.2021 11:58:08

2DH1_Ant1_Hop

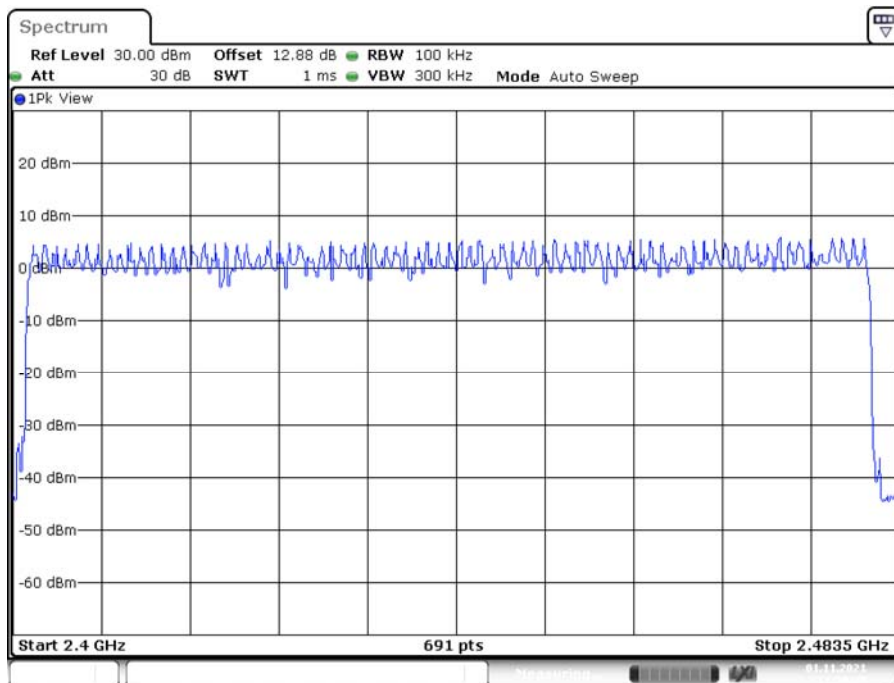

Date: 1.NOV.2021 11:59:37

3DH1_Ant1_Hop

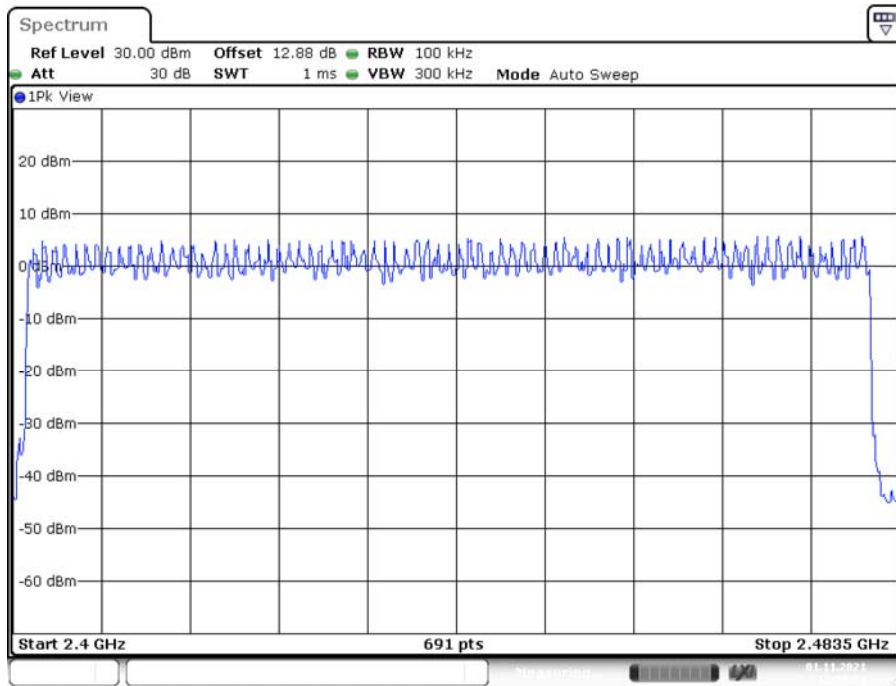

Date: 1.NOV.2021 12:00:15

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)

Applicable Standard

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. The EUT was worked in channel hopping.
2. Set the RBW to: 1MHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Set the span to 0Hz.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Recorded the time of single pulses

Test Data

Environmental Conditions

Temperature:	24 °C
Relative Humidity:	48 %
ATM Pressure:	101.0 kPa

The testing was performed by Ting Lü on 2021-11-01.

EUT operation mode: Transmitting

Test Result: Compliant.


Test Mode	Antenna	Channel	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.38	320	0.122	≤ 0.4	PASS
DH3	Ant1	Hop	1.63	160	0.261	≤ 0.4	PASS
DH5	Ant1	Hop	2.87	110	0.316	≤ 0.4	PASS
2DH1	Ant1	Hop	0.39	320	0.126	≤ 0.4	PASS
2DH3	Ant1	Hop	1.63	160	0.260	≤ 0.4	PASS
2DH5	Ant1	Hop	2.87	110	0.315	≤ 0.4	PASS
3DH1	Ant1	Hop	0.39	320	0.123	≤ 0.4	PASS
3DH3	Ant1	Hop	1.63	160	0.260	≤ 0.4	PASS
3DH5	Ant1	Hop	2.87	110	0.316	≤ 0.4	PASS

Note 1: A period time= $0.4 \times 79 = 31.6$ (S), Result=Burst Width*Total Hops


Note 2: Total Hops =Hopping Number in 3.16s*10

Note 3: Hoping Number in 3.16s=Total of highest signals in 3.16s (Second high signals were other channel)

DH1_Ant1_Hop

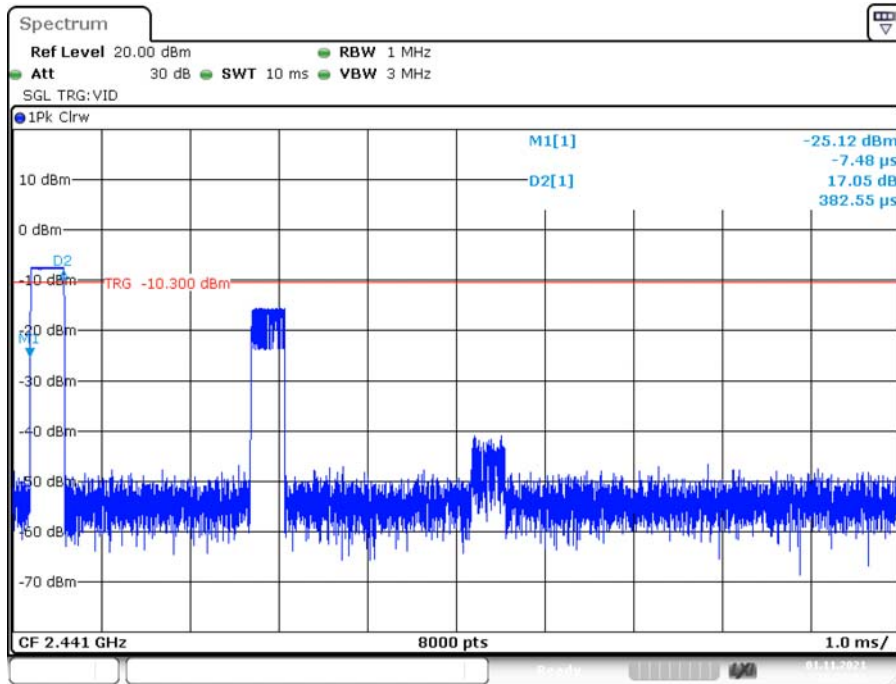


Date: 1.NOV.2021 10:27:53

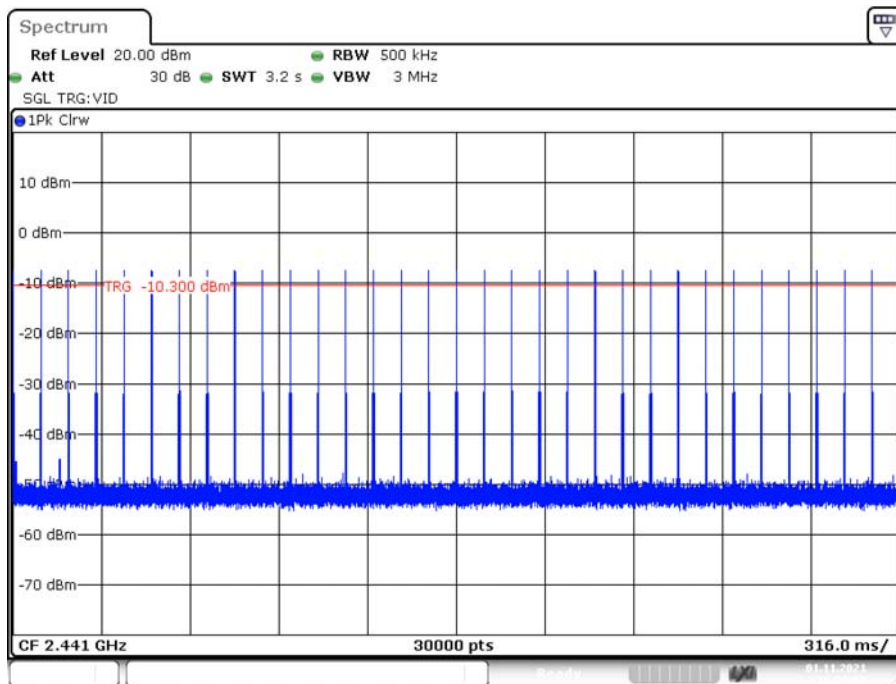


Date: 1.NOV.2021 10:27:58

DH3_Ant1_Hop

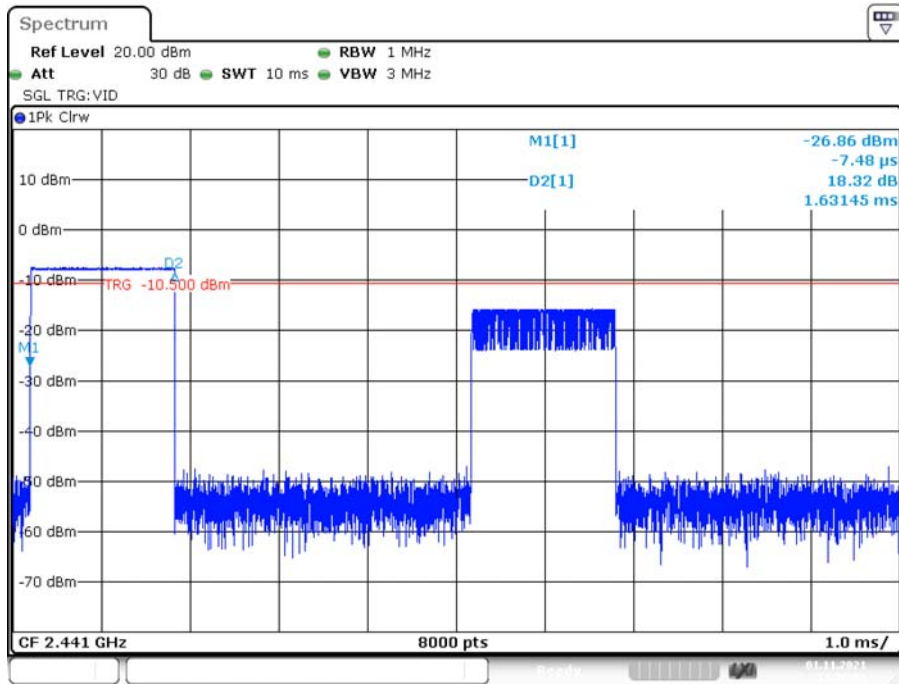


Date: 1.NOV.2021 11:05:52

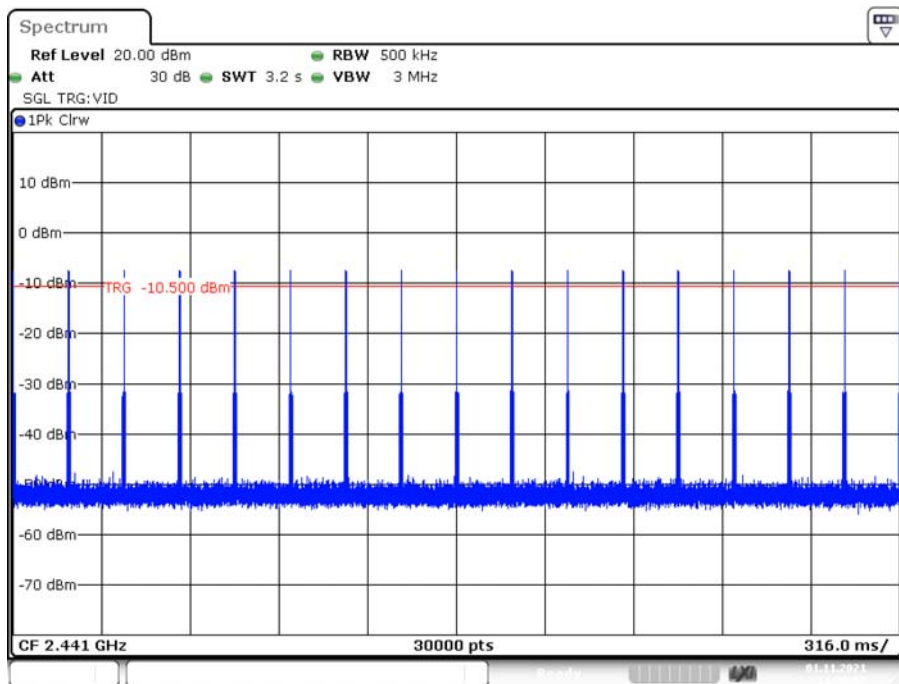


Date: 1.NOV.2021 11:05:58

DH5_Ant1_Hop

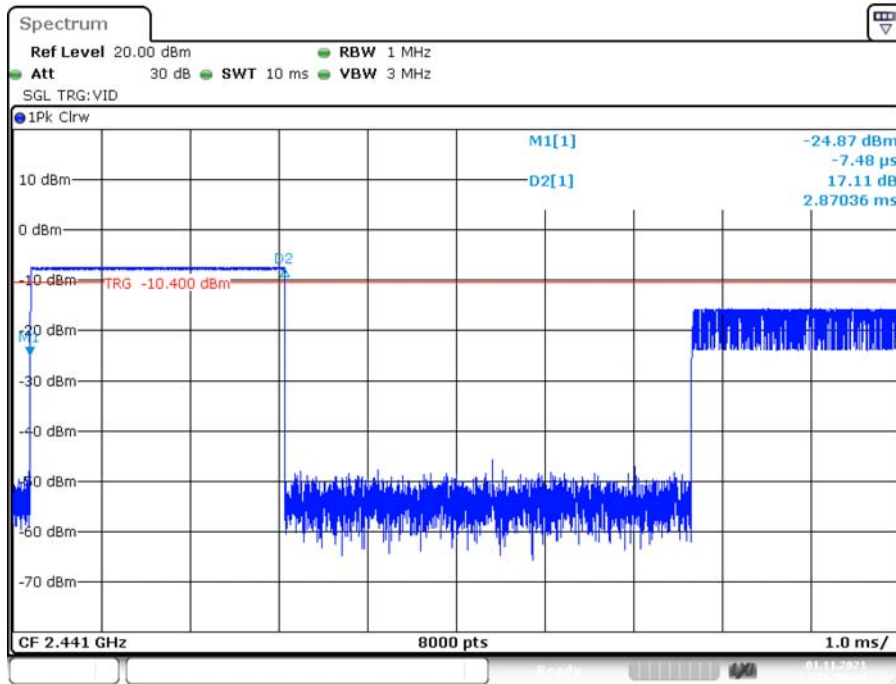


Date: 1.NOV.2021 10:38:21

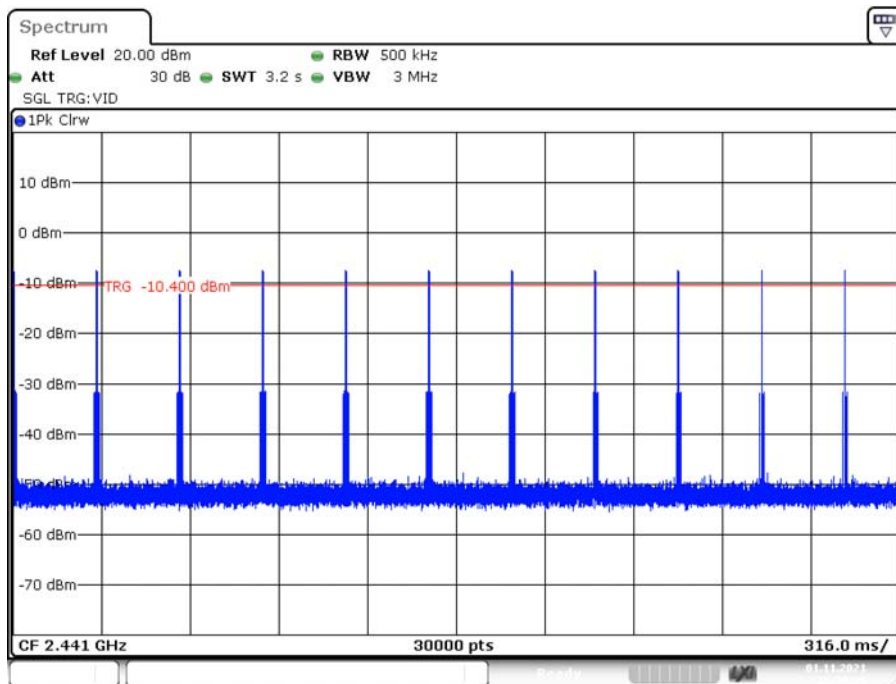


Date: 1.NOV.2021 10:38:26

2DH1_Ant1_Hop

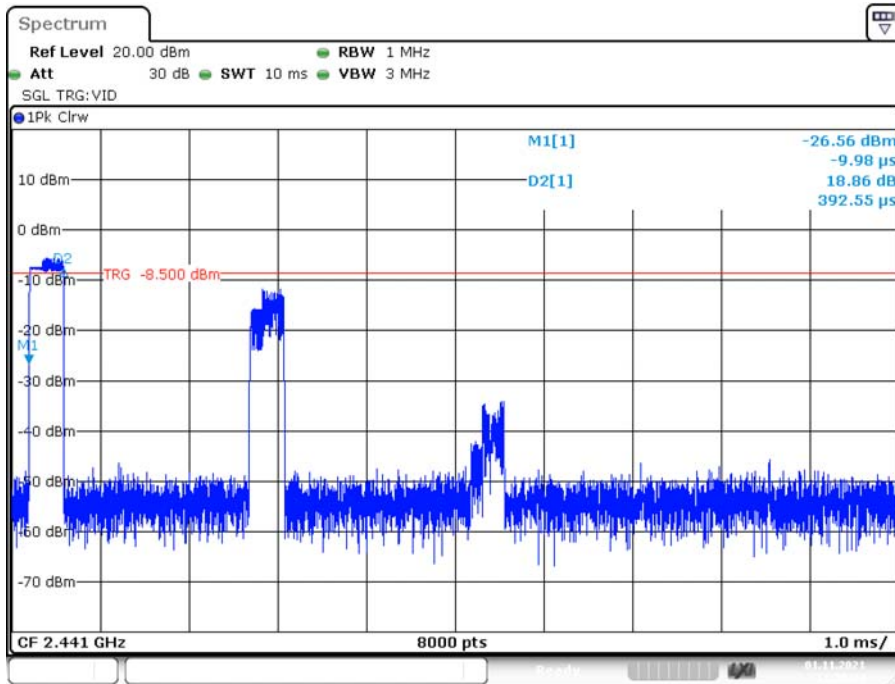


Date: 1.NOV.2021 11:18:25

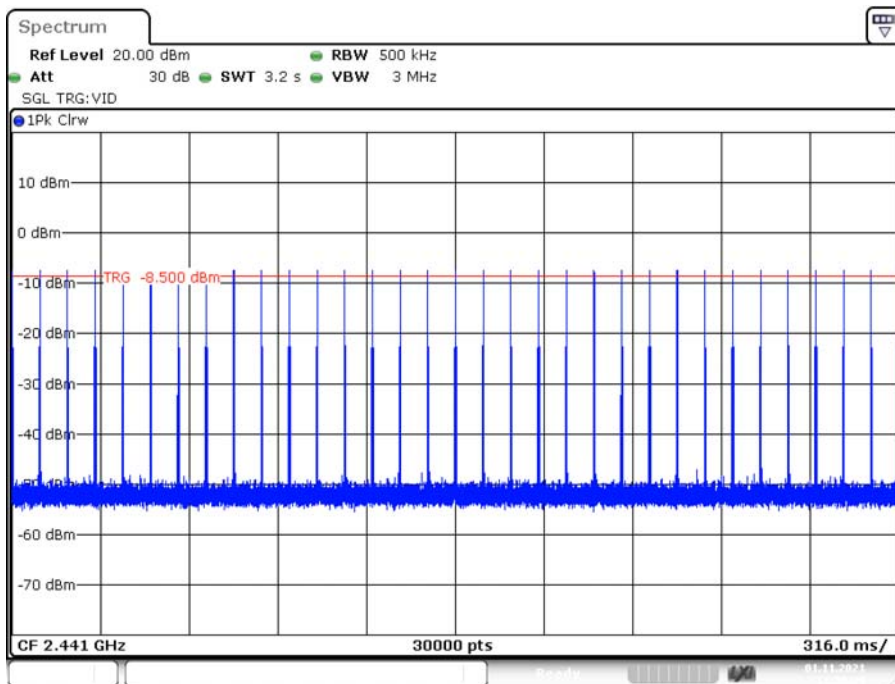


Date: 1.NOV.2021 11:18:30

2DH3_Ant1_Hop

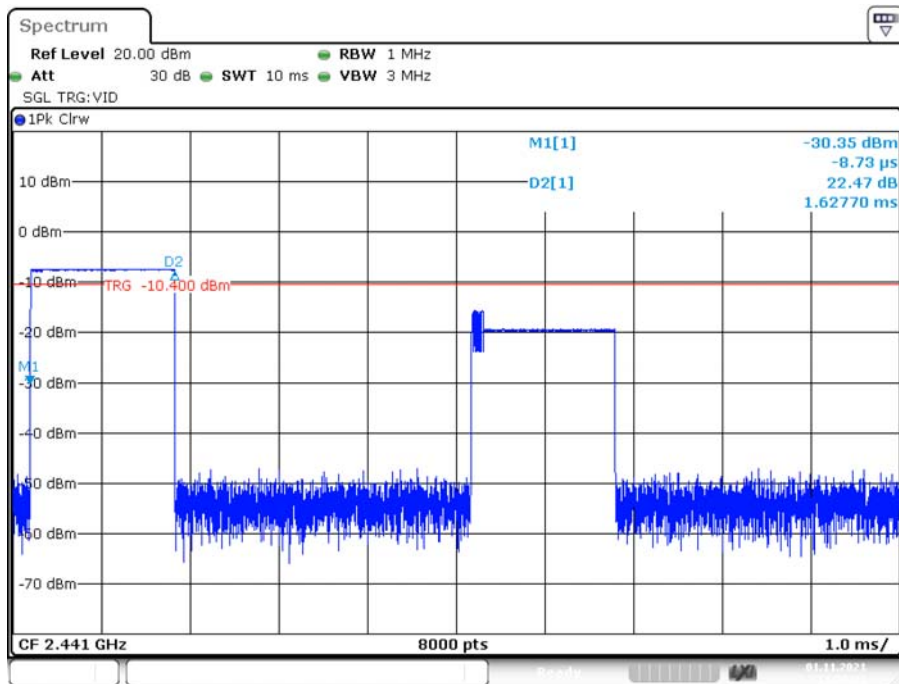


Date: 1.NOV.2021 11:07:32

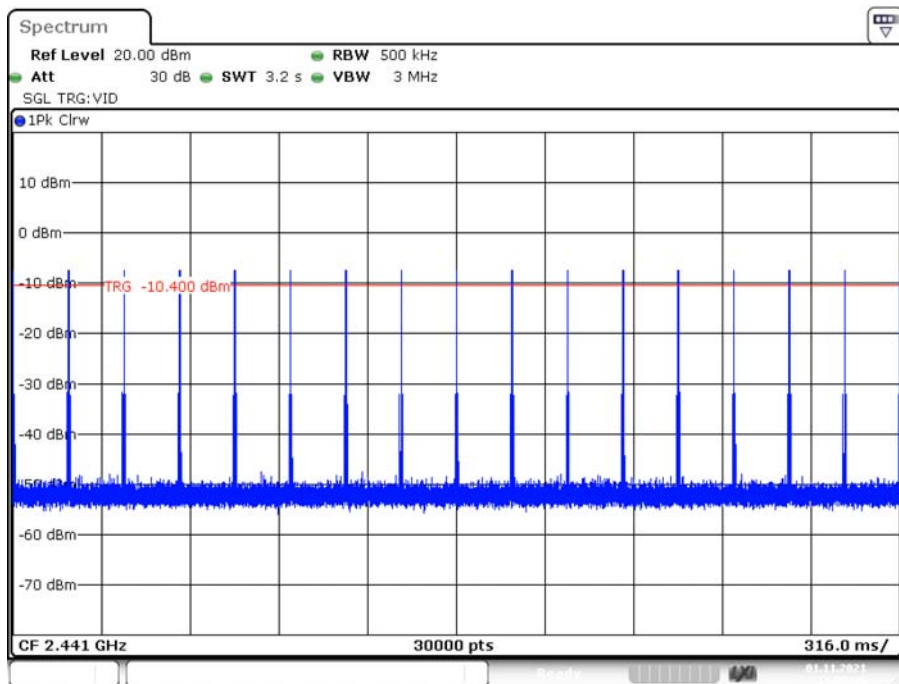


Date: 1.NOV.2021 11:07:37

2DH5_Ant1_Hop

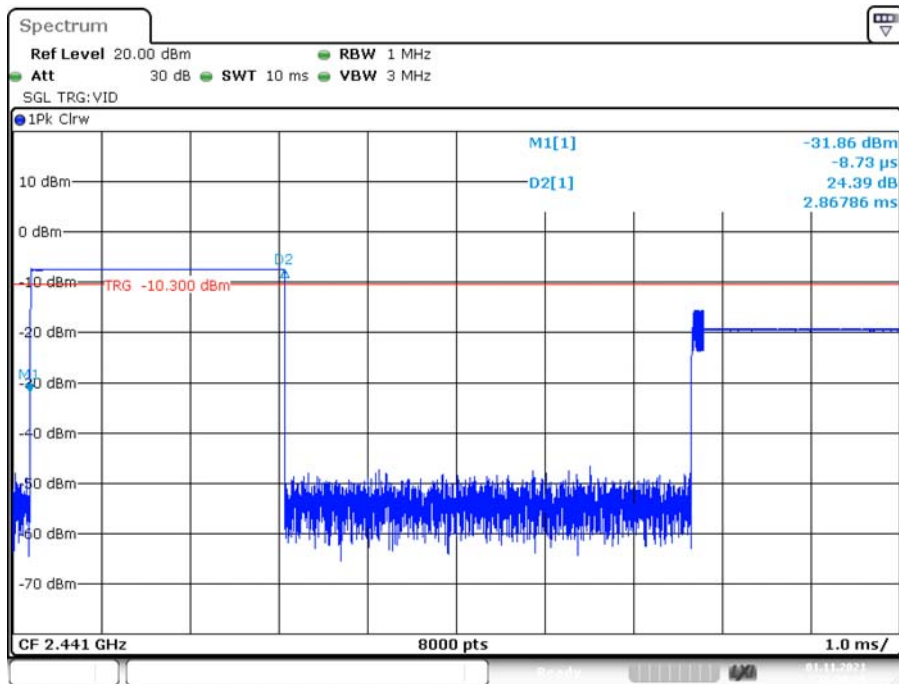


Date: 1.NOV.2021 10:39:16

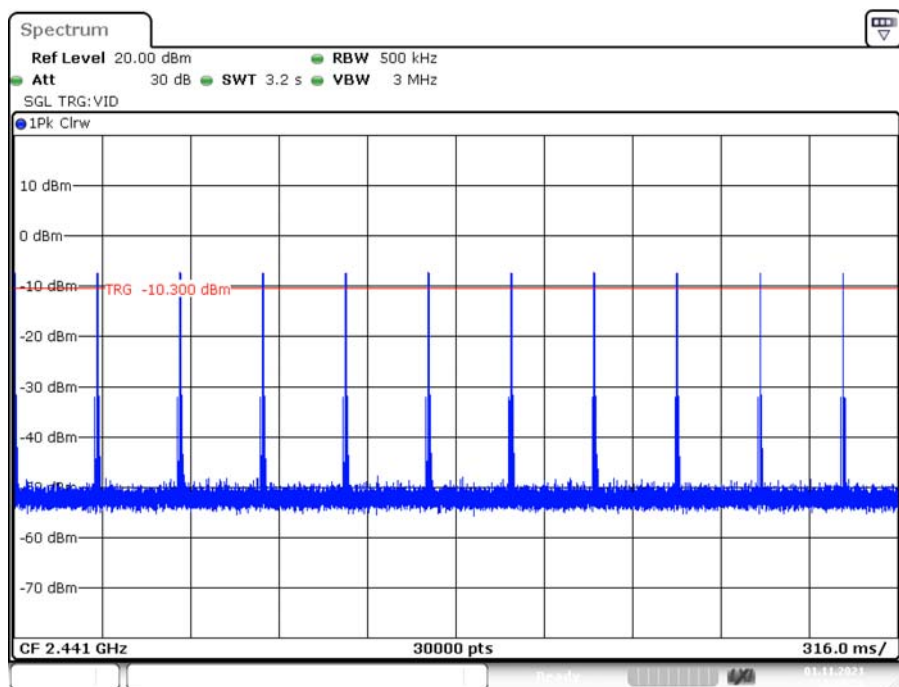


Date: 1.NOV.2021 10:39:21

3DH1_Ant1_Hop

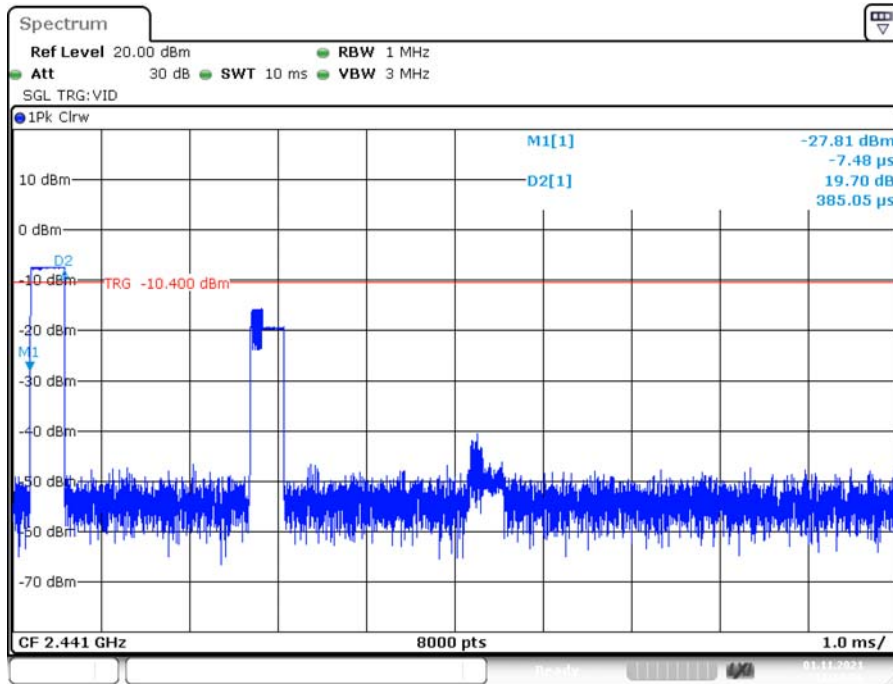


Date: 1.NOV.2021 11:19:07

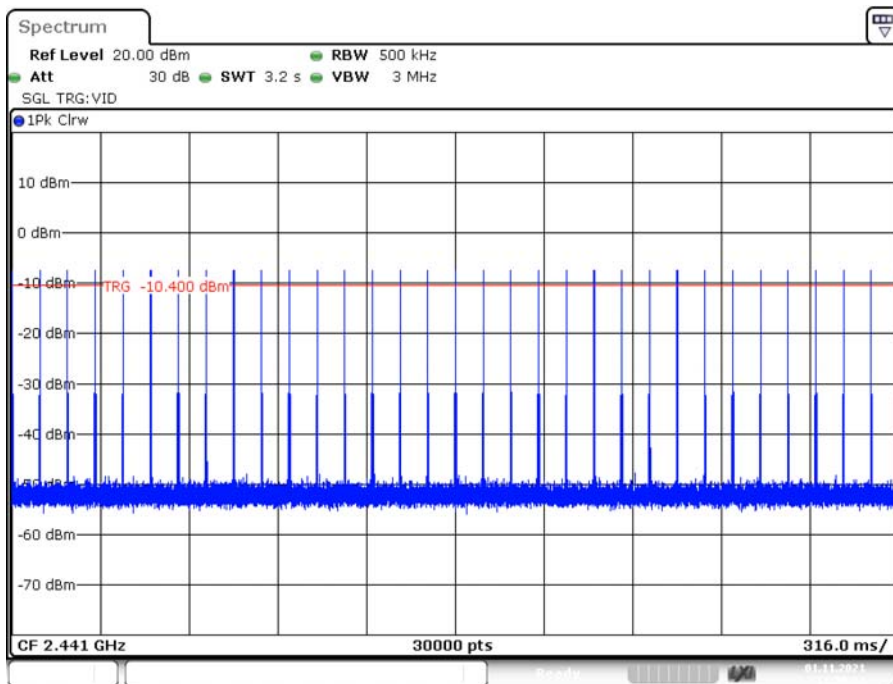


Date: 1.NOV.2021 11:19:12

3DH3_Ant1_Hop

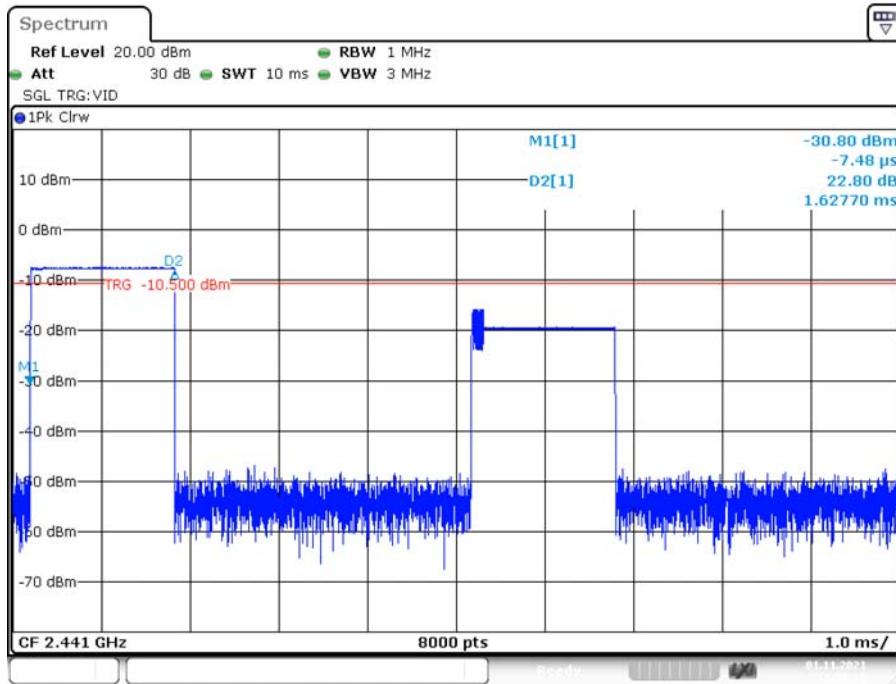


Date: 1.NOV.2021 11:09:17

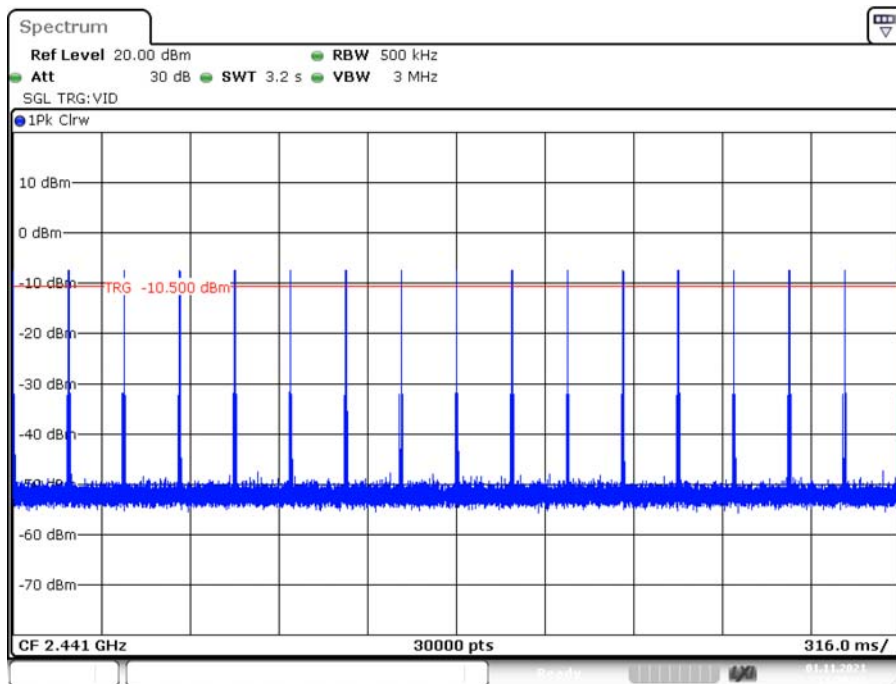


Date: 1.NOV.2021 11:09:22

3DH5_Ant1_Hop

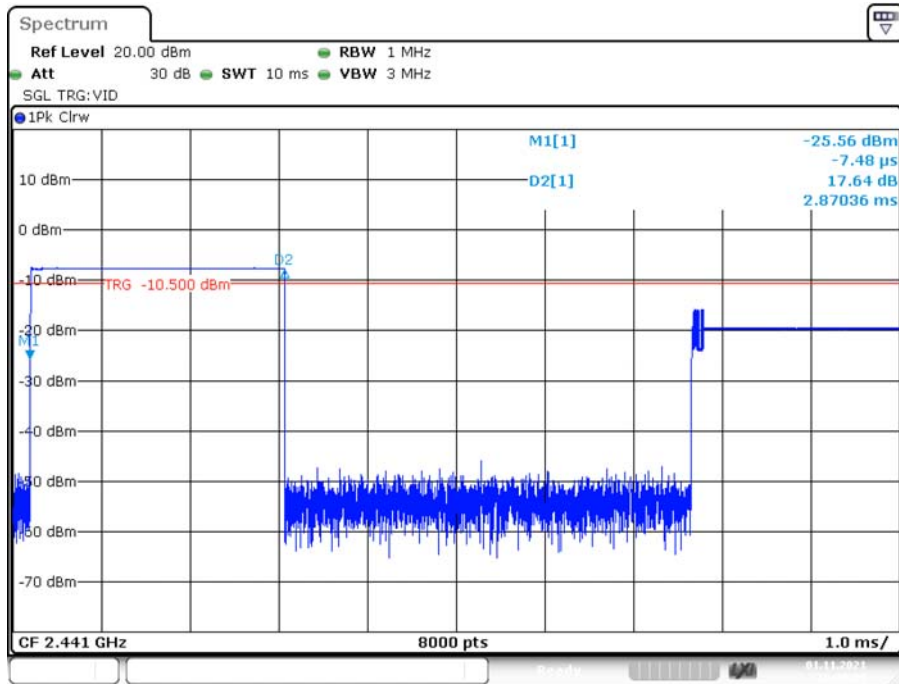

Date: 1.NOV.2021 10:40:05

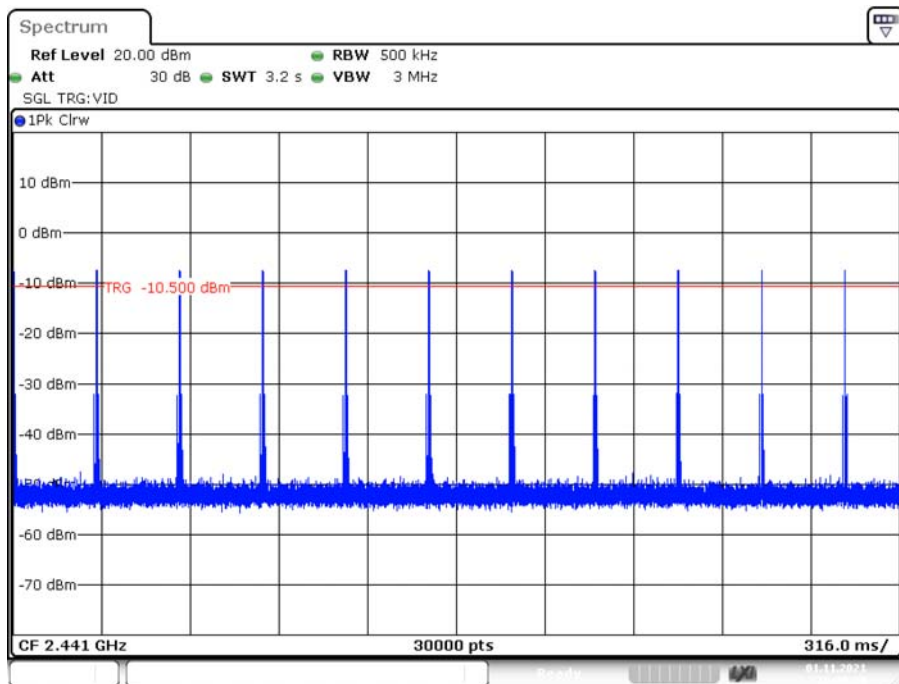

Date: 1.NOV.2021 10:40:11

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

Test Data

Environmental Conditions

Temperature:	24°C
Relative Humidity:	48 %
ATM Pressure:	101.0 kPa


The testing was performed by Ting Lü on 2021-11-01.

EUT operation mode: Transmitting

Test Result: Compliant.


Test Mode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
DH1	Ant1	2402	4.20	<=20.97	PASS
		2441	4.98	<=20.97	PASS
		2480	5.48	<=20.97	PASS
2DH1	Ant1	2402	4.79	<=20.97	PASS
		2441	5.73	<=20.97	PASS
		2480	5.56	<=20.97	PASS
3DH1	Ant1	2402	4.05	<=20.97	PASS
		2441	4.85	<=20.97	PASS
		2480	5.29	<=20.97	PASS

DH1_Ant1_2402MHz

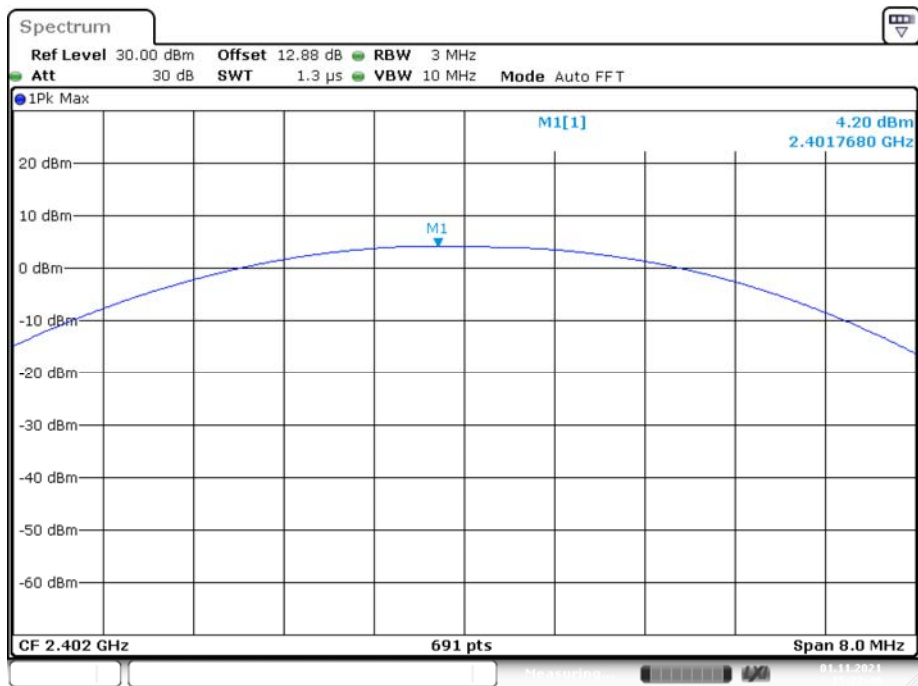


Date: 1.NOV.2021 15:22:40

DH1_Ant1_2441MHz

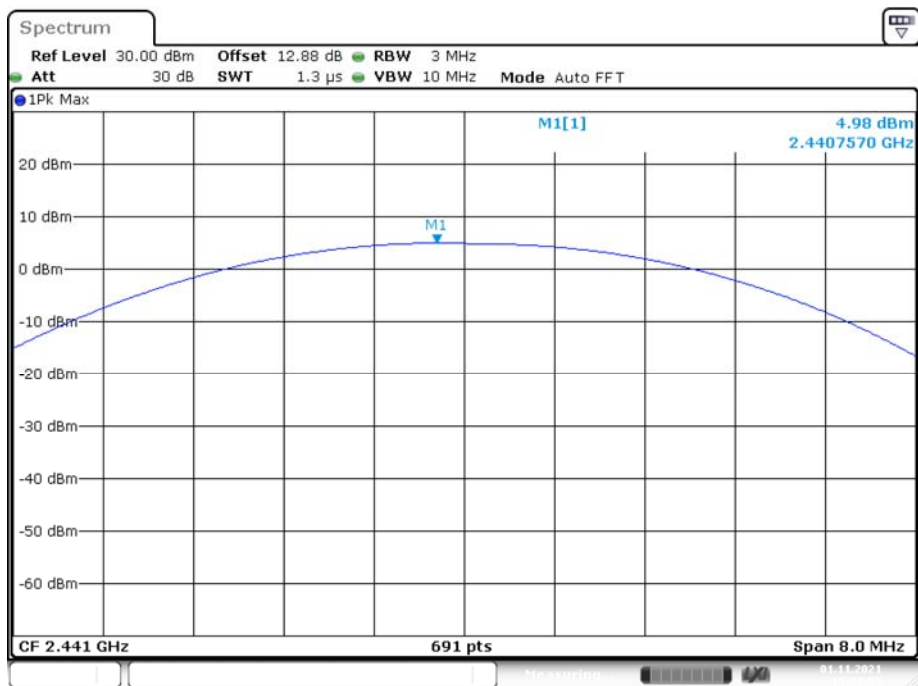


Date: 1.NOV.2021 15:23:56

DH1_Ant1_2480MHz

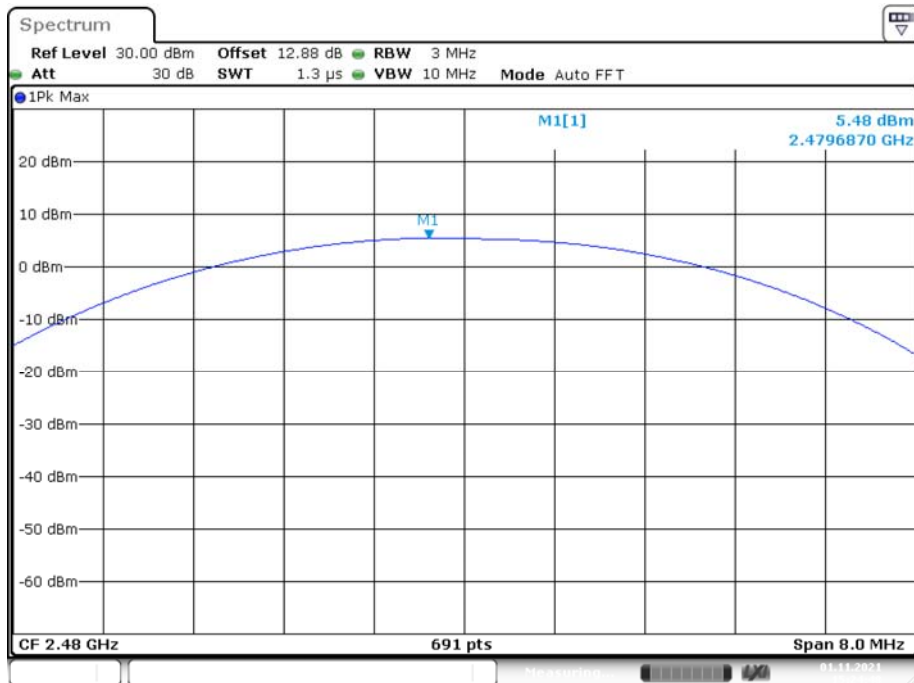


Date: 1.NOV.2021 15:24:49

2DH1_Ant1_2402MHz

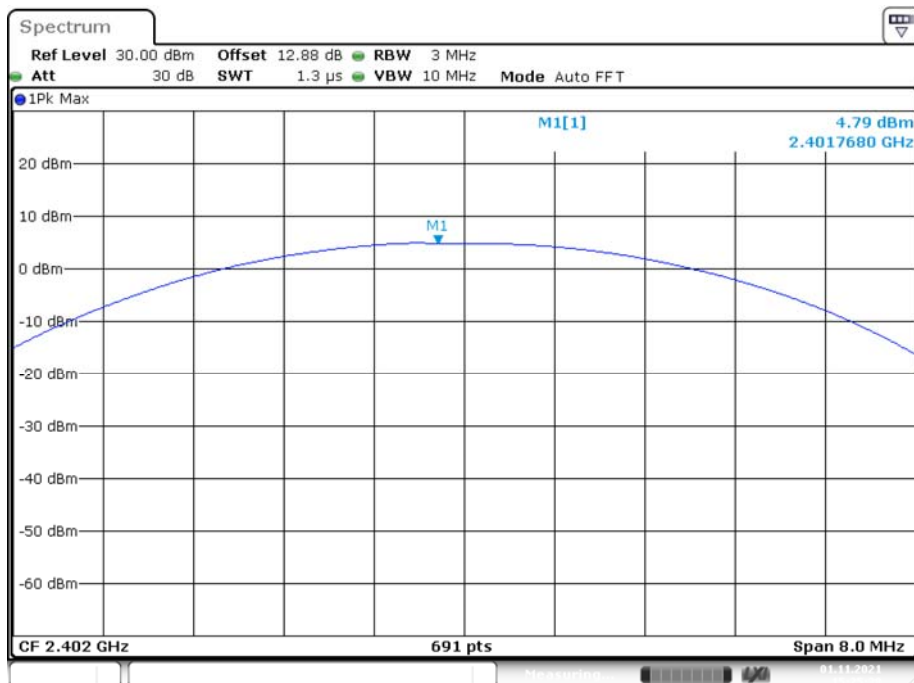


Date: 1.NOV.2021 15:25:39

2DH1_Ant1_2441MHz

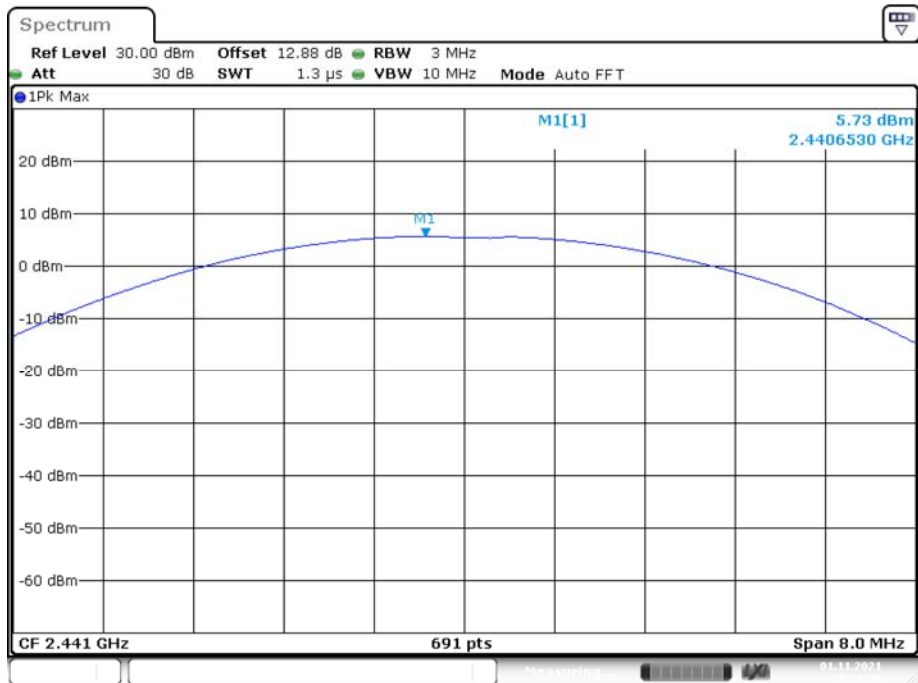


Date: 1.NOV.2021 15:26:39

2DH1_Ant1_2480MHz

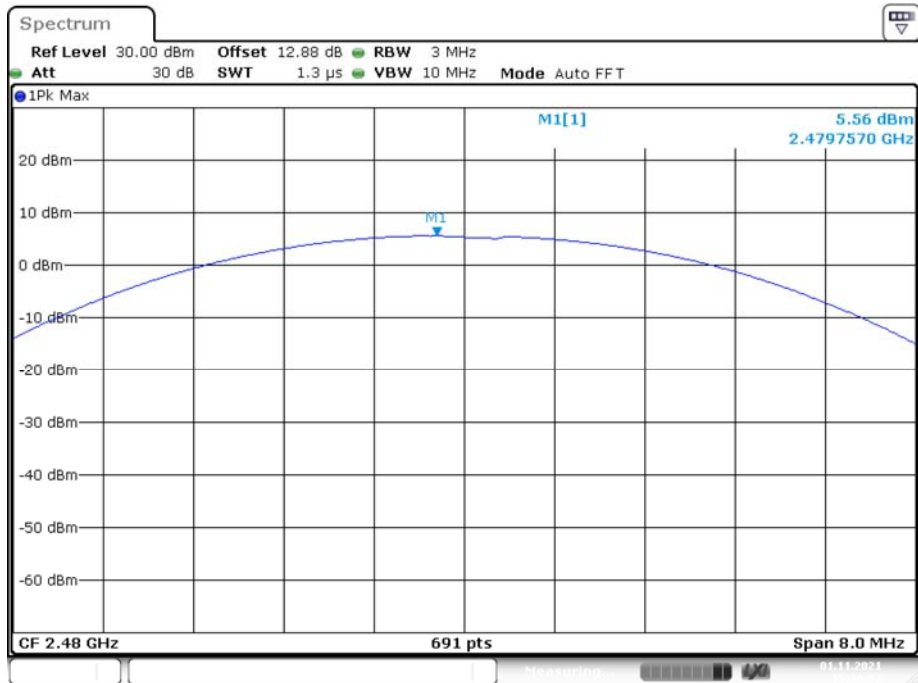


Date: 1.NOV.2021 15:30:03

3DH1_Ant1_2402MHz

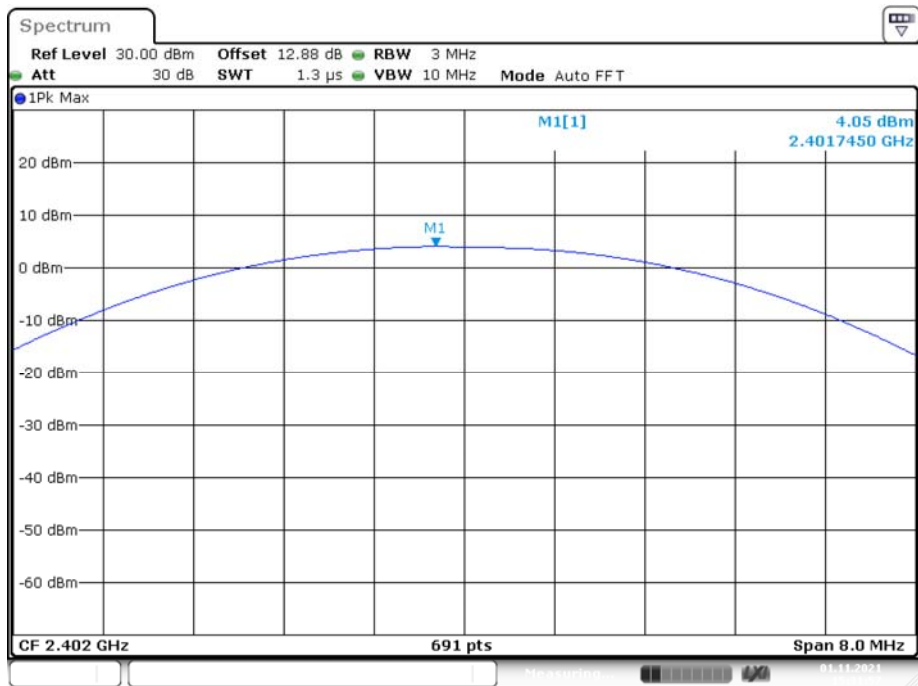


Date: 1.NOV.2021 15:31:58

3DH1_Ant1_2441MHz

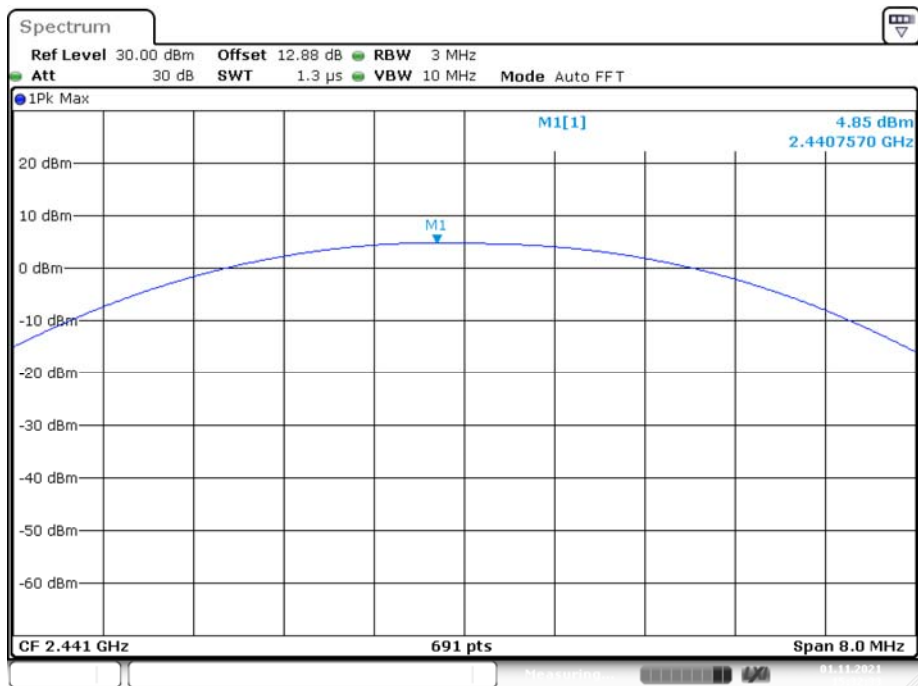

Date: 1.NOV.2021 15:32:33

3DH1_Ant1_2480MHz

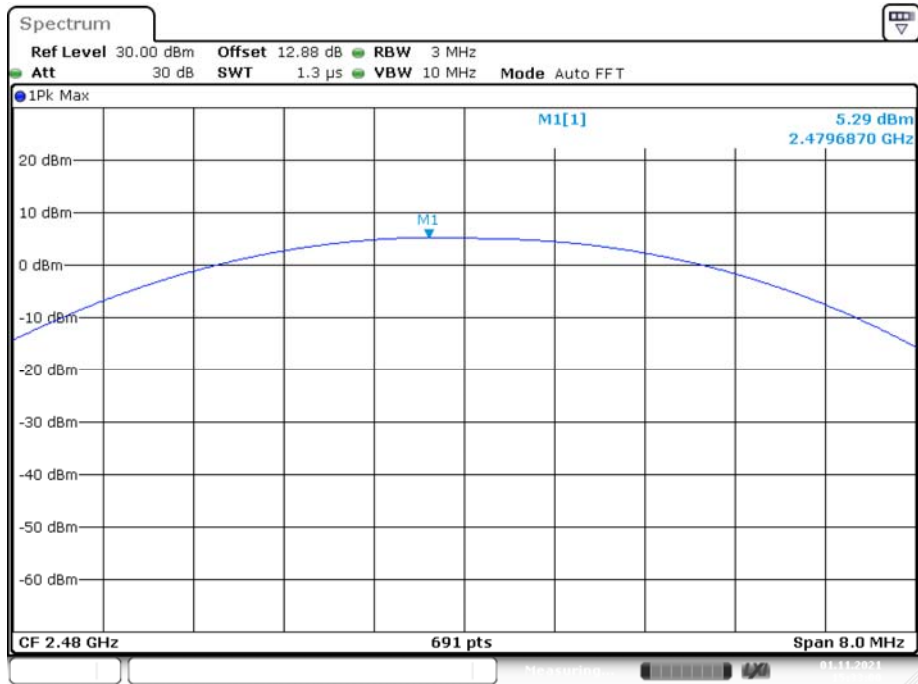

Date: 1.NOV.2021 15:33:01

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data

Environmental Conditions

Temperature:	24°C
Relative Humidity:	48 %
ATM Pressure:	101.0 kPa


The testing was performed by Ting Lü on 2021-11-01.

EUT operation mode: Transmitting

Test Result: Compliant.


Conducted Band Edge Result:

DH1_Ant1_Low_2402MHz

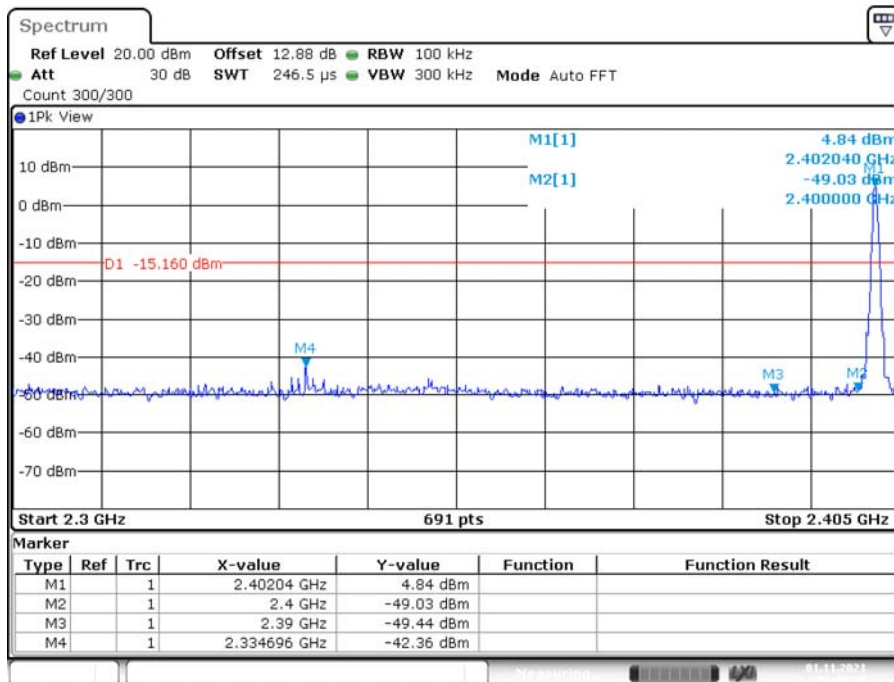


Date: 1.NOV.2021 09:43:20

DH1_Ant1_High_2480MHz

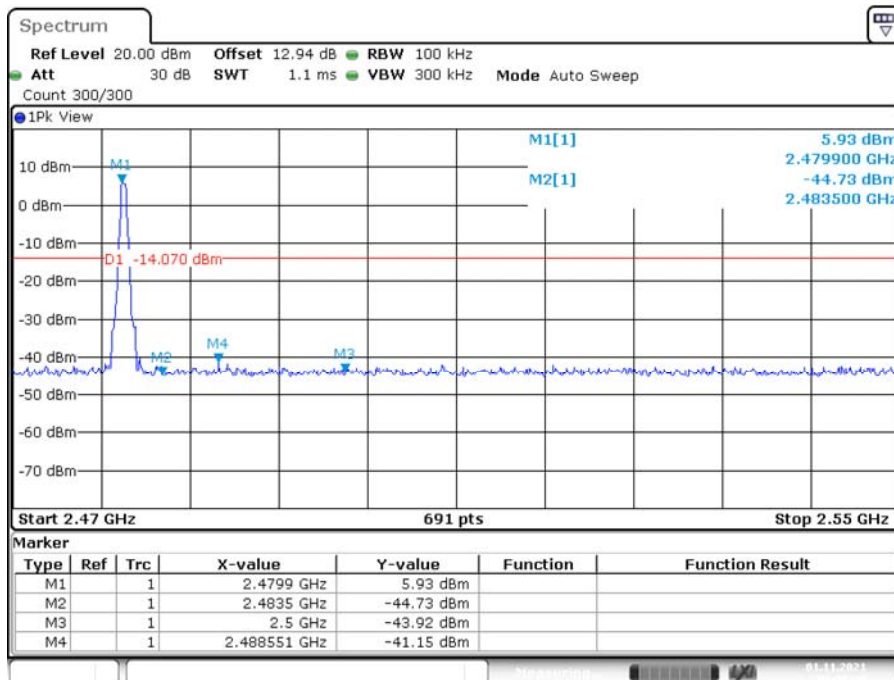


Date: 1.NOV.2021 09:45:35


DH1_Ant1_Low_Hop_2402MHz

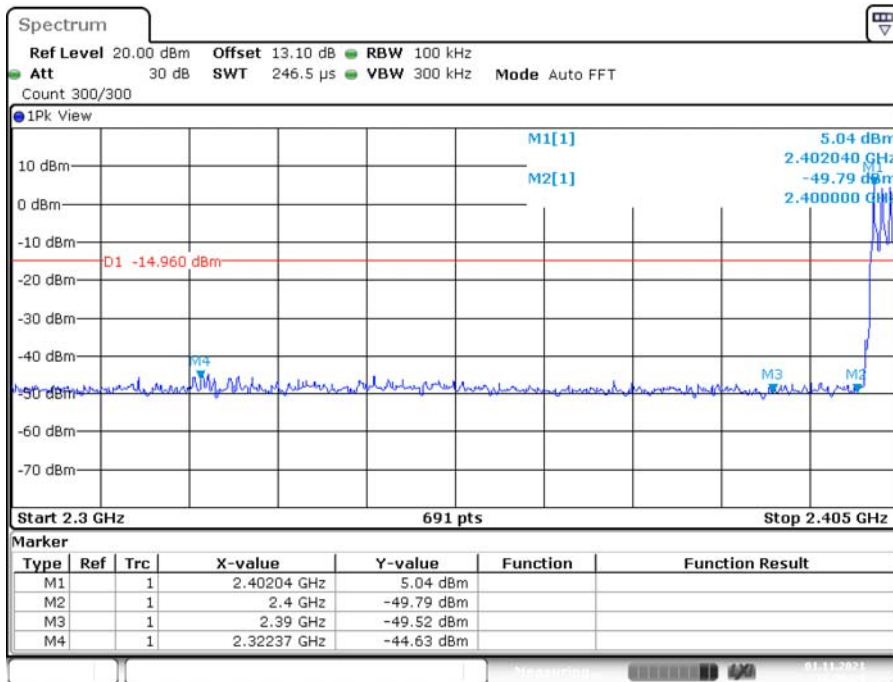


DH1_Ant1_High_Hop_2480MHz

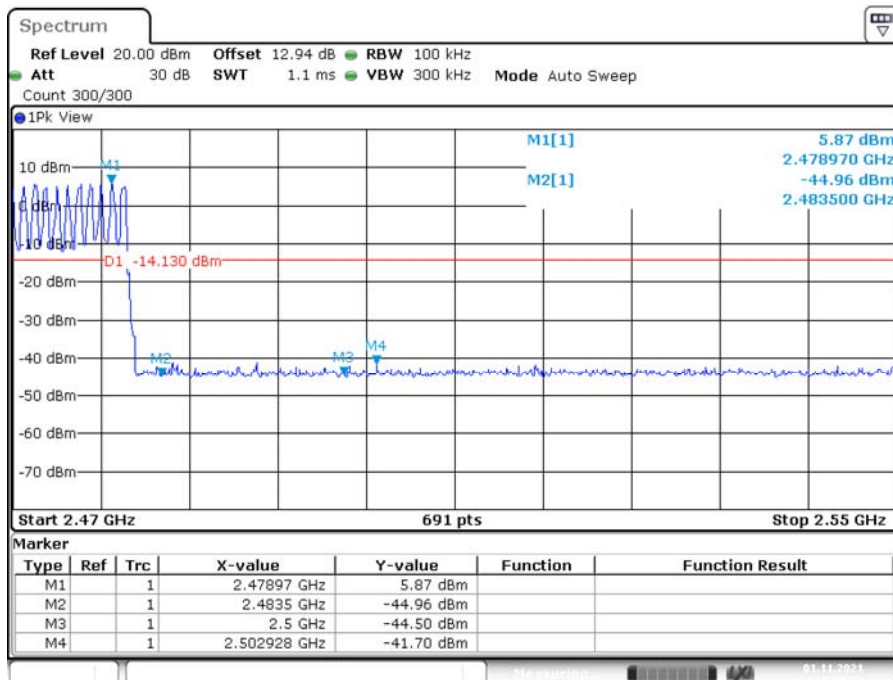


2DH1_Ant1_Low_2402MHz

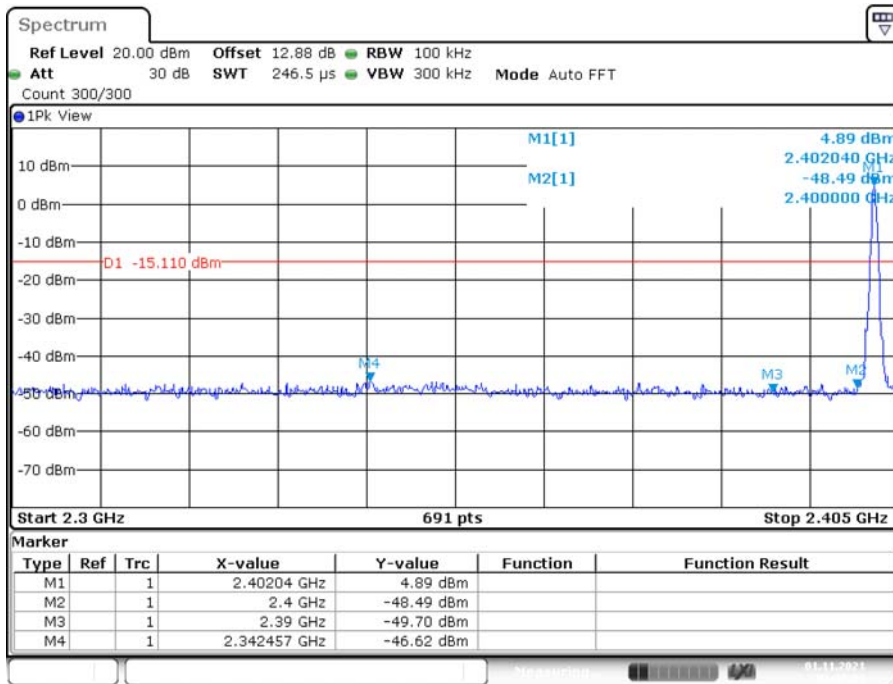

2DH1_Ant1_High_2480MHz

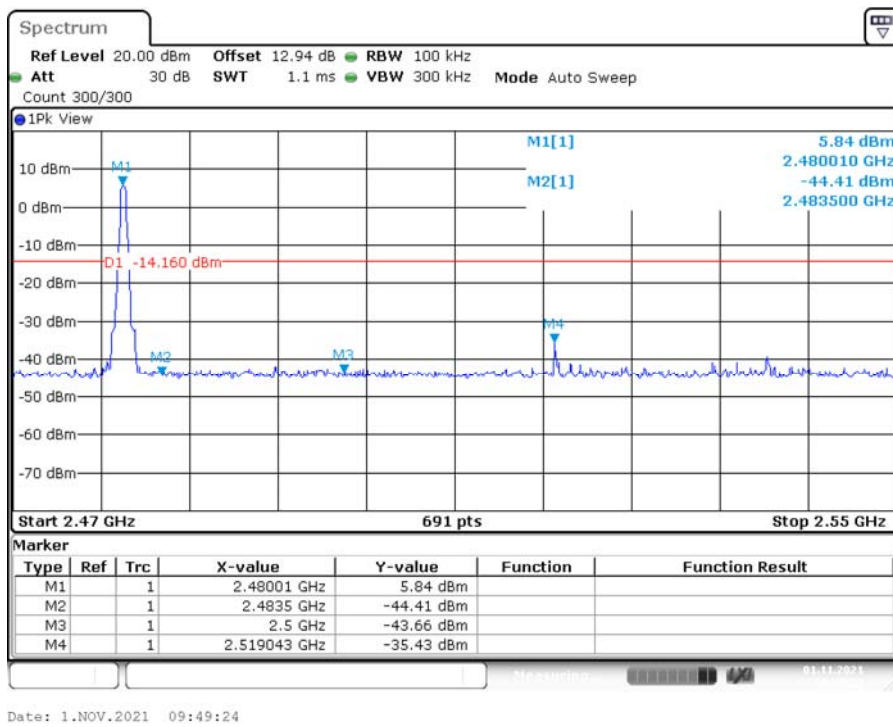


2DH1_Ant1_Low_Hop_2402MHz

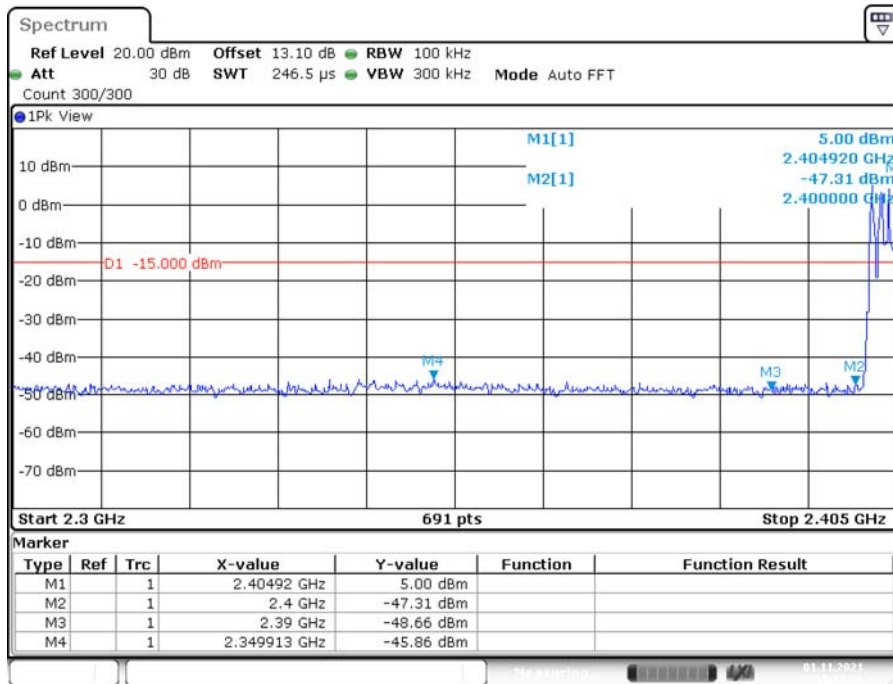


Date: 1.NOV.2021 10:10:51

2DH1_Ant1_High_Hop_2480MHz

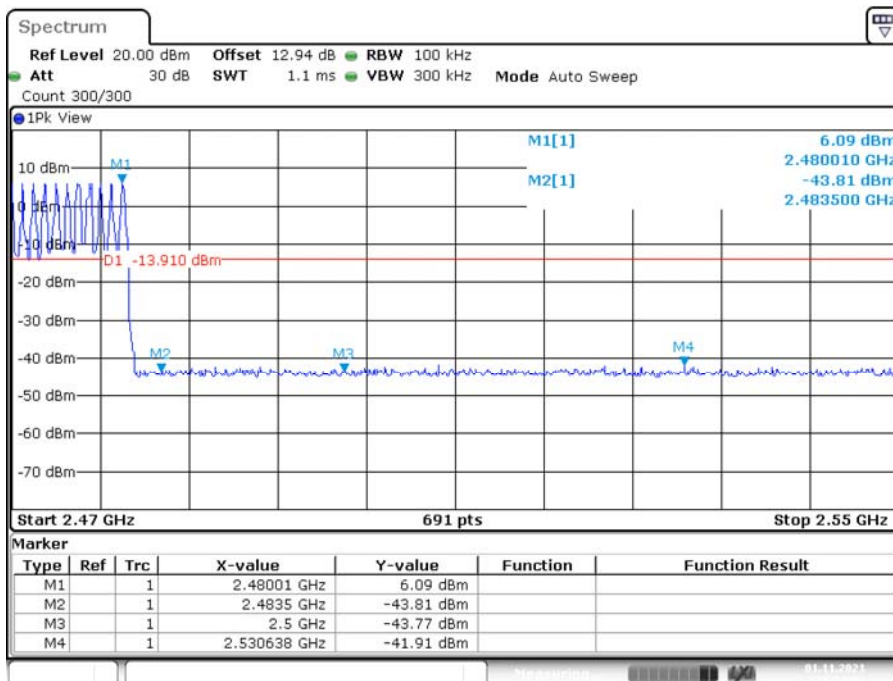


Date: 1.NOV.2021 10:14:03


3DH1_Ant1_Low_2402MHz

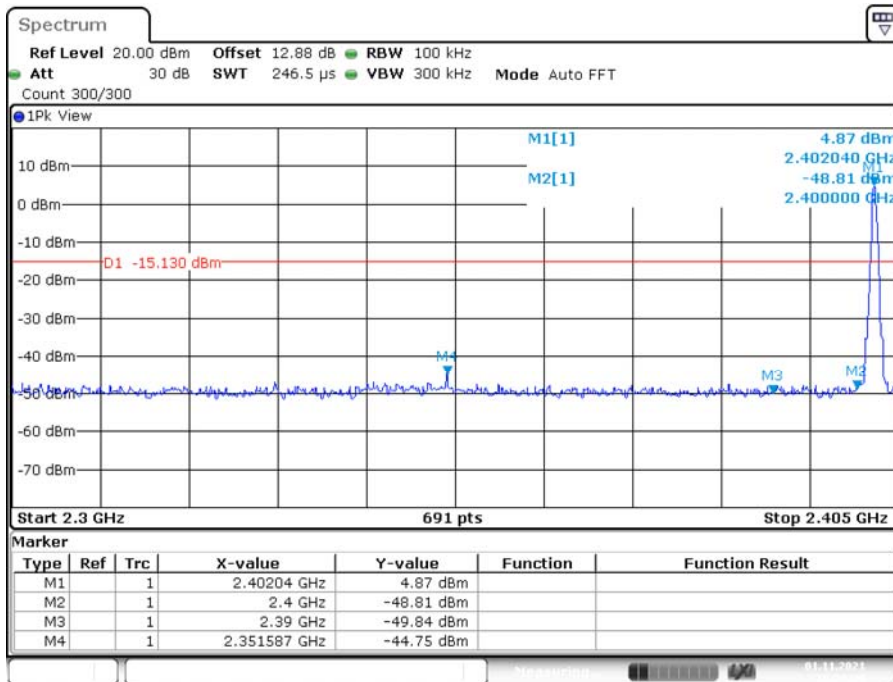


3DH1_Ant1_High_2480MHz

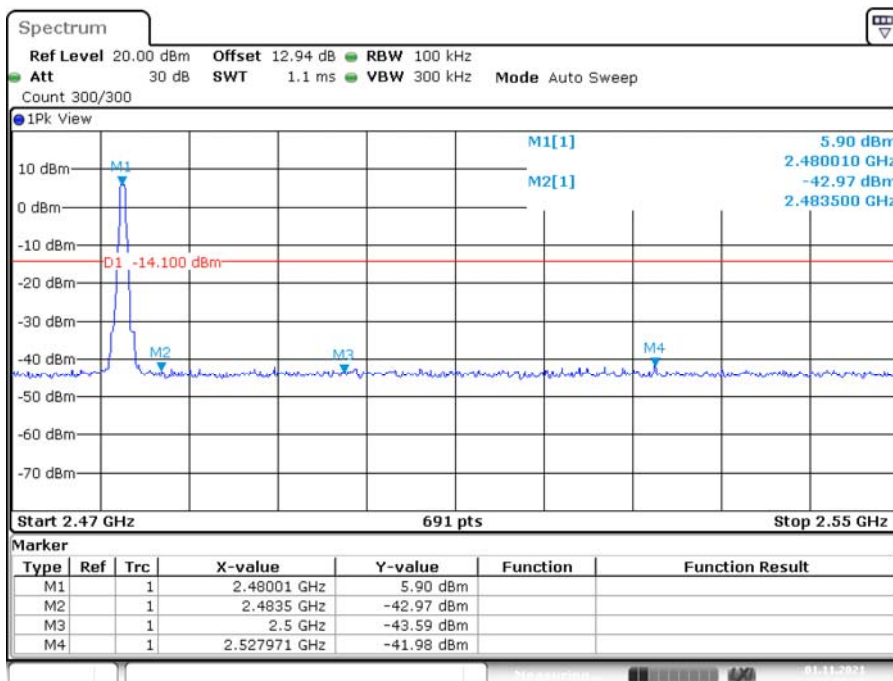

3DH1_Ant1_Low_Hop_2402MHz

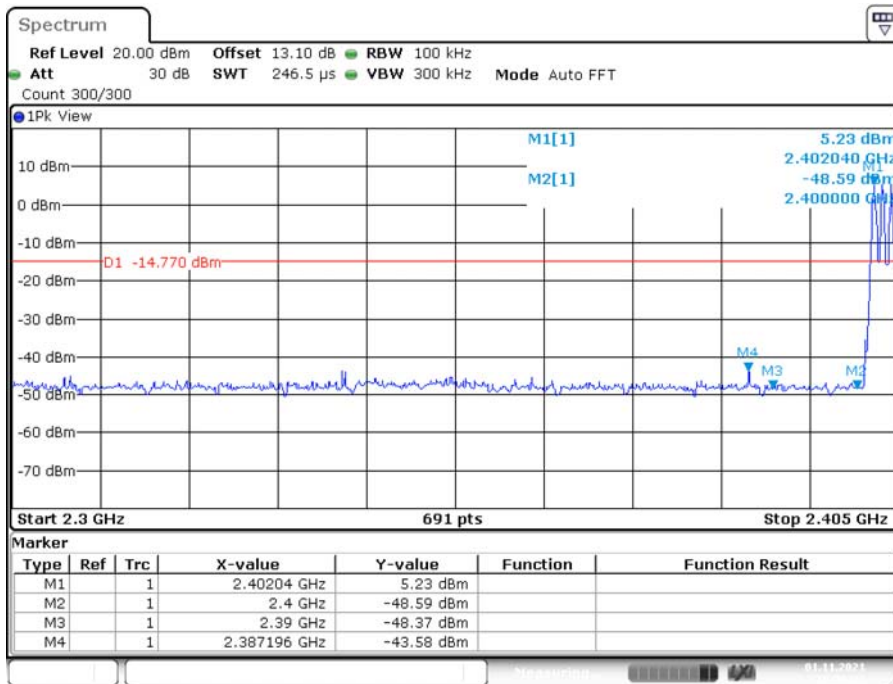

3DH1_Ant1_High_Hop_2480MHz

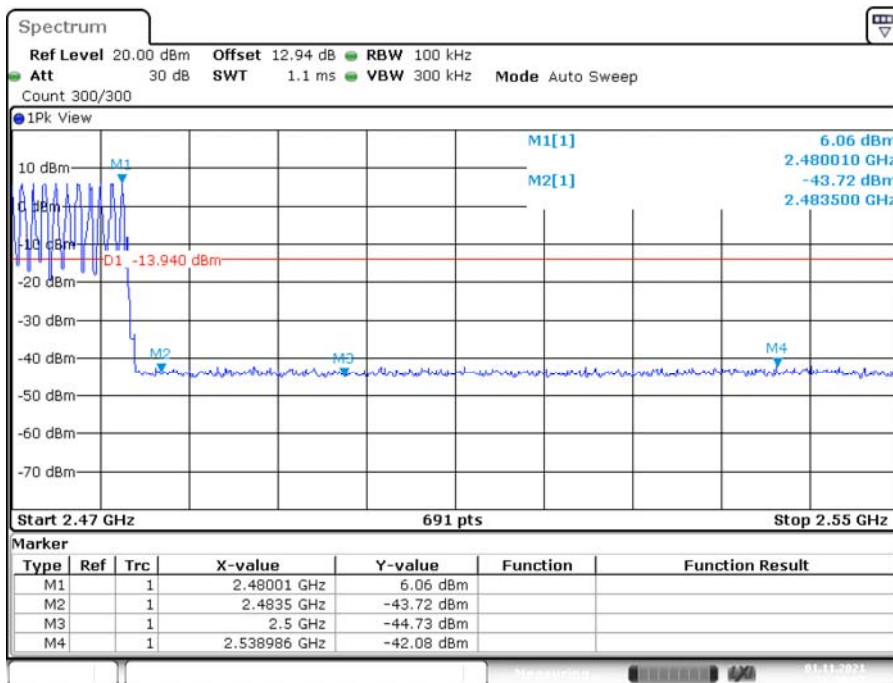

***** END OF REPORT *****