

FCC PART 15C REPORT FOR CERTIFICATION
On Behalf of

iFIT Health and Fitness, Inc.

Tablet

Model Number: MP22-NEON416

FCC ID: OMC447847

Applicant :	iFIT Health and Fitness, Inc.
Address:	1500 S 1000 W, Logan, Utah, United States
Prepared By:	EST Technology Co., Ltd.
	Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China
	Tel: 86-769-83081888-808

Report Number:	ESTE-R2209077
Date of Test:	Aug. 26~Sep. 16, 2022
Date of Report:	Sep. 20, 2022




TABLE OF CONTENTS

<u>Description</u>	<u>Page</u>
TEST REPORT VERIFICATION.....	3
1. GENERAL INFORMATION.....	5
1.1. Description of Device (EUT)	5
1.2. Antenna Information	6
1.3. Information of RF Cable	6
2. SUMMARY OF TEST	7
2.1. Summary of test result.....	7
2.2. Test Facilities	8
2.3. Measurement uncertainty	9
2.4. Assistant equipment used for test	9
2.5. Block Diagram	9
2.6. Test Mode.....	10
2.7. Power Setting of Test Software.....	11
2.8. Duty Cycle.....	11
2.9. Channel List	12
2.10. Test Equipment List	13
3. 6DB BANDWIDTH.....	15
3.1. Limit.....	15
3.2. Test Setup	15
3.3. Spectrum Analyzer Setting.....	15
3.4. Test Procedure.....	15
3.5. Test Result.....	15
4. MAXIMUM PEAK OUTPUT POWER.....	16
4.1. Limit.....	16
4.2. Test Setup	16
4.3. Spectrum Analyzer Setting.....	16
4.4. Test Procedure.....	16
4.5. Test Result.....	16
5. POWER SPECTRAL DENSITY.....	17
5.1. Limit.....	17
5.2. Test Setup	17
5.3. Spectrum Analyzer Setting.....	17
5.4. Test Procedure.....	17
5.5. Test Result.....	17
6. CONDUCTED BAND EDGE	18
6.1. Limit.....	18
6.2. Test Setup	18
6.3. Spectrum Analyzer Setting.....	18
6.4. Test Procedure.....	18
6.5. Test Result.....	18
7. CONDUCTED SPURIOUS EMISSIONS.....	19
7.1. Limit.....	19
7.2. Test Setup	19

7.3. Spectrum Analyzer Setting.....	19
7.4. Test Procedure.....	19
7.5. Test Result.....	19
8. RADIATED SPURIOUS EMISSIONS AND BAND EDGE	20
8.1. Limit.....	20
8.2. Test Setup	21
8.3. Spectrum Analyzer Setting.....	22
8.4. Test Procedure.....	23
8.5. Test Result.....	24
9. AC POWER LINE CONDUCTED EMISSIONS	38
9.1. Limit.....	38
9.2. Test Setup	38
9.3. Spectrum Analyzer Setting.....	38
9.4. Test Procedure.....	38
9.5. Test Result.....	39
10. ANTENNA REQUIREMENTS.....	43
10.1. Limit	43
10.2. Test Result.....	43
11. APPENDIX	44
12. TEST SETUP PHOTO	101
13. EUT PHOTO.....	103

EST Technology Co., Ltd.

Applicant:	iFIT Health and Fitness, Inc. 1500 S 1000 W, Logan, Utah, United States		
Manufacturer:	iFIT Health and Fitness, Inc. 1500 S 1000 W, Logan, Utah, United States		
Factory:	Zhangzhou Wanlida Technology Co., Ltd. Wanlida Industrial Zone, Jingcheng Town, Nanjing, Zhangzhou, Fujian, China		
E.U.T:	Tablet		
Model Number:	MP22-NEON416		
Power Supply:	DC 12V From Adapter Input AC 100-240V, 50/60Hz		
Trade Name:	-----	Serial No.:	-----
Date of Receipt:	Aug. 26, 2022	Date of Test:	Aug. 26~Sep. 16, 2022
Test Specification:	FCC Part 15 Subpart C (15.247) ANSI C63.10:2013 FCC KDB 558074 D01 15.247 Meas Guidance v05r02 FCC KDB 662911 D01 Multiple Transmitter Output v02r01		
Test Result:	The device described above is tested by EST Technology Co., Ltd. The measurement results were contained in this test report and EST Technology Co., Ltd. was assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliance with the FCC Rules and Regulations Part 15 Subpart C requirements.		
This report applies to above tested sample only and shall not be reproduced in part without written approval of EST Technology Co., Ltd.			
Prepared by:	Reviewed by:	Date: Sep 20, 2022	
 Ring Yang / Assistant	 Seven Wang / Engineer	 Approved by: Iceman Hu / Manager	
Other Aspects: None.			
Abbreviations: OK/P=passed fail/F=failed n.a/N=not applicable E.U.T=equipment under tested			
<i>This test report is based on a single evaluation of one sample of above mentioned products ,It is not permitted to be duplicated in extracts without written approval of EST Technology Co., Ltd.</i>			

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Product Name	:	Tablet
Model Number	:	MP22-NEON416
Software Version	:	MKN1
Hardware Version	:	A946C
Operation frequency	:	IEEE 802.11b/g/n HT20:2412MHz~2462MHz IEEE 802.11n HT40: 2422MHz~2452MHz
Number of channel	:	IEEE 802.11b/g/n HT20: 11 Channels IEEE 802.11n HT40: 7 Channels
Max Output Power (PEAK)	:	IEEE 802.11b: 16.70dBm IEEE 802.11g: 17.40dBm IEEE 802.11n HT20: 18.34dBm IEEE 802.11n HT40: 18.32dBm
Modulation Type	:	DSSS OFDM
Sample Type	:	Prototype production

Note: For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

1.2. Antenna Information

Ant No.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	-	-	Internal	-	3.28
2	-	-	Internal	-	3.34

Note:

1. The EUT has two antennas, the antennas can support SISO function in IEEE 802.11b and IEEE 802.11g, and can support MIMO function in IEEE 802.11n.
2. The EUT can work as CDD mode in IEEE 802.11n HT20 and IEEE 802.11n HT40, and can operate with one spatial stream.
3. Directional gain=6.32dBi>6dBi
4. After pre-test all antenna configurations, the worst case configuration as list below.
5. This information is provided by the applicant.

TX Mode \ ANT No.	SISO Configuration	MIMO Configuration
IEEE 802.11b	ANT 1 and Ant 2	/
IEEE 802.11g	ANT 1 and Ant 2	/
IEEE 802.11n HT20	/	ANT1+ANT2
IEEE 802.11n HT40	/	ANT1+ANT2

1.3. Information of RF Cable

Cable Loss(dB)	Provided by
1.0	iFIT Health and Fitness, Inc.

Note: 1. The customer declared the loss value of the RF Cable, and the test results of this report only apply to the sample as received.
 2. This information is provided by the applicant.

2. SUMMARY OF TEST

2.1. Summary of test result

No.	Description of Test Item	FCC Standard Section	Results
1	6dB Bandwidth	15.247(a)(2)	PASS
2	Maximum Peak Output Power	15.247(b)(3)	PASS
3	Power Spectral Density	15.247(e)	PASS
4	Conducted Band Edge	15.247(d)	PASS
5	Conducted Spurious Emissions	15.247(d)	PASS
6	Radiated Spurious Emissions and Band Edge	15.205 15.209 15.247(d)	PASS
7	AC Power Line Conducted Emissions	15.207	PASS
8	Antenna Requirement	15.203	PASS

Note: "N/A" denotes test is not applicable in this test report.

2.2. Test Facilities

- EMC Lab : Certificated by CNAS, CHINA
Registration No.: L5288
This Certificate is valid until: November 12, 2023
- Certificated by FCC, USA
Designation Number: CN1215
This Certificate is valid until: January 31, 2024
- Certificated by A2LA, USA
Registration No.: 4366.01
This Certificate is valid until: January 31, 2024
- Certificated by Industry Canada
CAB identifier No.: CN0035
This Certificate is valid until: January 31, 2024
- Certificated by VCCI, Japan
Registration No.: C-14103; T-20073; R-13663;
R-20103; G-20097
Date of registration: Apr. 20, 2020
This Certificate is valid until: Apr. 19, 2023
- Certificated by TUV Rheinland, Germany
Registration No.: UA 50413872 0001
Date of registration: July 31, 2018
- Certificated by Intertek
Registration No.: 2011-RTL-L2-64
Date of registration: November 08, 2018

- Name of Firm : EST Technology Co., Ltd.
- Site Location : Chilingxiang, Qishantou, Santun, Houjie, Dongguan,
Guangdong, China

2.3. Measurement uncertainty

Test Item	Uncertainty
Uncertainty for Conduction emission test	±3.48dB
Uncertainty for spurious emissions test (Below 30MHz)	±1.62 dB
Uncertainty for spurious emissions test (30MHz-1GHz)	±4.60 dB(Polarize: H)
	±4.68 dB(Polarize: V)
Uncertainty for spurious emissions test (1GHz to 25GHz)	±4.96dB
Uncertainty for radio frequency	7×10^{-8}
Uncertainty for conducted RF Power	1.08dB
Uncertainty for Power density test	0.26dB

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.


2.4. Assistant equipment used for test

Item	Equipment	Brand	Model Name/Type No.	FCC ID	Series No.
A	Adapter		ICP30-120-2500	-	-

Item	Shielded Type	Ferrite Core	Length	Note
1	NO	NO	1.2m	DC Cable

2.5. Block Diagram

For radiated emissions test: EUT was placed on a turn table, which is 0.8 (or 1.5) meter high above ground. EUT was set into 2.4G WIFI test mode by software before test.



(EUT: Tablet)

2.6. Test Mode

The test mode was selected for the final test as listed below.

Test Item	Mode	Date Rate	Test Channel
6dB Bandwidth	IEEE 802.11b	1Mbps	Low/Middle/High
	IEEE 802.11g	6Mbps	Low/Middle/High
	IEEE 802.11n HT20	MCS0	Low/Middle/High
	IEEE 802.11n HT40	MCS0	Low/Middle/High
Maximum Peak Output Power	IEEE 802.11b	1Mbps	Low/Middle/High
	IEEE 802.11g	6Mbps	Low/Middle/High
	IEEE 802.11n HT20	MCS0	Low/Middle/High
	IEEE 802.11n HT40	MCS0	Low/Middle/High
Power Spectral Density	IEEE 802.11b	1Mbps	Low/Middle/High
	IEEE 802.11g	6Mbps	Low/Middle/High
	IEEE 802.11n HT20	MCS0	Low/Middle/High
	IEEE 802.11n HT40	MCS0	Low/Middle/High
Conducted Band Edge	IEEE 802.11b	1Mbps	Low/ High
	IEEE 802.11g	6Mbps	Low/ High
	IEEE 802.11n HT20	MCS0	Low/ High
	IEEE 802.11n HT40	MCS0	Low/ High
Conducted Spurious Emissions	IEEE 802.11b	1Mbps	Low/Middle/High
	IEEE 802.11g	6Mbps	Low/Middle/High
	IEEE 802.11n HT20	MCS0	Low/Middle/High
	IEEE 802.11n HT40	MCS0	Low/Middle/High
Radiated Spurious Emissions(Below 1GHz)	IEEE 802.11b	1Mbps	Low/Middle/High
	IEEE 802.11g	6Mbps	Low/Middle/High
	IEEE 802.11n HT20	MCS0	Low/Middle/High
	IEEE 802.11n HT40	MCS0	Low/Middle/High
Radiated Spurious Emissions(Above 1GHz)	IEEE 802.11b	1Mbps	Low/Middle/High
	IEEE 802.11g	6Mbps	Low/Middle/High
	IEEE 802.11n HT20	MCS0	Low/Middle/High
	IEEE 802.11n HT40	MCS0	Low/Middle/High
Radiated Band Edge	IEEE 802.11b	1Mbps	Low/Middle/High
	IEEE 802.11g	6Mbps	Low/Middle/High
	IEEE 802.11n HT20	MCS0	Low/Middle/High
	IEEE 802.11n HT40	MCS0	Low/Middle/High
AC Power Line Conducted Emissions	IEEE 802.11b	1Mbps	Low/Middle/High
	IEEE 802.11g	6Mbps	Low/Middle/High
	IEEE 802.11n HT20	MCS0	Low/Middle/High
	IEEE 802.11n HT40	MCS0	Low/Middle/High

Note: In radiated measurement, the EUT had been pre-scan on the positioned of each 3 axis(X,Y,Z), the worst case was found when positioned on **X-plane**.

2.7. Power Setting of Test Software

Software Name	CMD		
Frequency(MHz)	2412	2437	2462
IEEE 802.11b Setting	12	12	12
IEEE 802.11g Setting	8	8	8
IEEE 802.11n HT20 Setting	7	7	7
Frequency(MHz)	2422	2437	2452
IEEE 802.11n HT40 Setting	7	7	7

Note: This information is provided by the applicant.

2.8. Duty Cycle

Refer to section 11: Appendix A

Note:

1. If duty cycle <98 %, the conducted average output power and average power spectral density should be add duty factor.
2. If duty cycle $\geq 98\%$, the EUT is consider to be transmitting continuously, the conducted average output power and average power spectral density no need to add duty factor (consider to be zero).
3. The conducted peak output power and peak power spectral density no need to consider duty factor.
4. The on-time time is transmission duration(T).

2.9. Channel List

IEEE 802.11b/802.11g/802.11n HT20					
Channel	Frequency	Channel	Frequency	Channel	Frequency
	(MHz)		(MHz)		(MHz)
1	2412	6	2437	11	2462
2	2417	7	2442		
3	2422	8	2447		
4	2427	9	2452		
5	2432	10	2457		

IEEE 802.11n HT40					
Channel	Frequency	Channel	Frequency	Channel	Frequency
	(MHz)		(MHz)		(MHz)
3	2422	6	2437	9	2452
4	2427	7	2442		
5	2432	8	2447		

2.10. Test Equipment List

For conducted emission test						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESHS30	EST-E001	LISAI	June 13,22	1 Year
Artificial Mains Network	Rohde & Schwarz	ENV216	EST-E002	LISAI	June 13,22	1 Year
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	EST-E078	LISAI	June 13,22	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A

For radiated emission test(9kHz-30MHz)						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESR7	EST-E047	LISAI	June 13,22	1 Year
Active Loop Antenna	SCHWAREB ECK	FMZB 1519B	EST-E054	LISAI	June 13,22	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A
9kHz-30MHz Cable	N/A	EST-001	N/A	N/A	N/A	N/A

For radiated emissions test (30MHz-1000MHz)						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESR7	EST-E047	LISAI	June 13,22	1 Year
Bilog Antenna	Teseq	CBL 6111D	EST-E034	LISAI	June 13,22	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A
30-1000MHz Cable	N/A	EST-002	N/A	N/A	N/A	N/A

For radiated emission test(Above 1000MHz)						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
Horn Antenna	SCHWARZB ECK	BBHA9120D	EST-E031	LISAI	June 13,22	1 Year
Horn Antenna	Com-Power	AHA-840	EST-E133	LISAI	June 13,22	1 Year
Signal Amplifier	SCHWARZB ECK	BBV9718	EST-E032	LISAI	June 13,22	1 Year
Spectrum Analyzer	Rohde & Schwarz	FSV40	EST-E069	LISAI	June 13,22	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A	N/A
Above 1GHz Cable	N/A	EST-003	N/A	N/A	N/A	N/A




For connect EUT antenna terminal test						
Equipment	Manufacturer	Model No.	Serial No.	Calibration Body	Last Cal.	Next Cal.
TS 1120	Tonscend	/	/	/	/	/
Test Software	Tonscend	TS1120-3	3.2.11	/	/	/
RF Control Unit	Tonscend	JS0806-2	EST-E134	LISAI	June 13,22	1 Year
Signal and Spectrum Analyzer	Rohde & Schwarz	FSV 40	EST-E136	LISAI	June 13,22	1 Year

3. 6dB BANDWIDTH

3.1. Limit

Systems using digital modulation techniques operate in the 2400-2483.5 MHz, the minimum 6 dB bandwidth shall be at least 500 kHz.

3.2. Test Setup

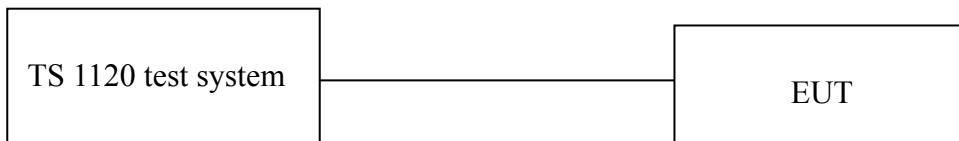

3.3. Spectrum Analyzer Setting

6dB Bandwidth

Spectrum Parameters	Setting
RBW	100KHz
VBW	300KHz
Span	40MHz(20MHz Bandwidth mode)/80MHz(40MHz Bandwidth mode)
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold

99% Occupied Bandwidth

Spectrum Parameters	Setting
RBW	300KHz(20MHz Bandwidth mode)/1MHz(40MHz Bandwidth mode)
VBW	1MHz(20MHz Bandwidth mode)/3MHz(40MHz Bandwidth mode)
Span	40MHz(20MHz Bandwidth mode)/80MHz(40MHz Bandwidth mode)
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold

3.4. Test Procedure

- Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- Spectrum analyzer setting parameters in accordance with section 3.3.
- Set the EUT transmit continuously with maximum output power.
- Allow trace to stabilize, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
- Repeat above procedures until all modes and channels were measured.
- Record the results in the test report.

3.5. Test Result

Refer to section 11: Appendix B

4. MAXIMUM PEAK OUTPUT POWER

4.1. Limit

For systems using digital modulation in 2400-2483.5MHz, the maximum peak output power is 1 Watt(30dBm).

4.2. Test Setup



4.3. Spectrum Analyzer Setting

Spectrum Parameters	Setting
RBW	1MHz
VBW	3MHz
Span	40MHz(20MHz Bandwidth mode)/80MHz(40MHz Bandwidth mode)
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold

4.4. Test Procedure

- Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- Spectrum analyzer setting parameters in accordance with section 4.3.
- Set the EUT transmit continuously with maximum output power.
- Use the channel power function to measure maximum peak output power, allow trace to stabilize, save test pictures.
- Repeat above procedures until all modes and channels were measured.
- Record the results in the test report.

4.5. Test Result


Refer to section 11: Appendix C

5. POWER SPECTRAL DENSITY

5.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

5.2. Test Setup

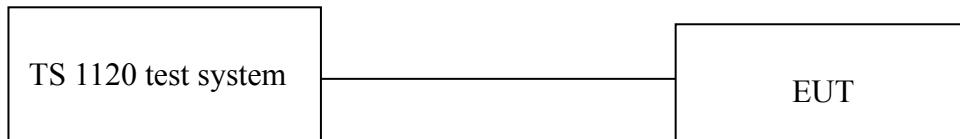

5.3. Spectrum Analyzer Setting

Spectrum Parameters	Setting
RBW	3KHz
VBW	10KHz
Span	30MHz(20MHz Bandwidth mode)/60MHz(40MHz Bandwidth mode)
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold

5.4. Test Procedure

- Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- Spectrum analyzer setting parameters in accordance with section 5.3.
- Set the EUT transmit continuously with maximum output power.
- Allow trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission.
- Repeat above procedures until all modes and channels were measured.
- Record the results in the test report.

5.5. Test Result


Refer to section 11: Appendix D

6. CONDUCTED BAND EDGE

6.1. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

6.2. Test Setup

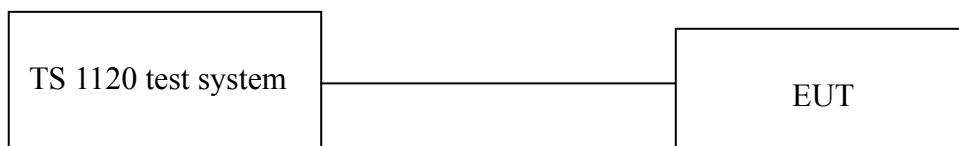

6.3. Spectrum Analyzer Setting

Spectrum Parameters	Setting
RBW	100KHz
VBW	300KHz
Span	100MHz(20MHz Bandwidth mode)/200MHz(40MHz Bandwidth mode)
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold

6.4. Test Procedure

- Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- Spectrum analyzer setting parameters in accordance with section 6.3.
- Set the EUT transmit continuously with maximum output power.
- Allow trace to stabilize, use the marker function to mark the highest emission level outside the authorized band.
- Repeat above procedures until all modes and channels were measured.
- Record the results in the test report

6.5. Test Result

Refer to section 11: Appendix E & F

7. CONDUCTED SPURIOUS EMISSIONS

7.1. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.2. Test Setup



7.3. Spectrum Analyzer Setting

Spectrum Parameters	Setting
RBW	100KHz
VBW	300KHz
Start frequency	30MHz
Stop frequency	26.5GHz
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold

7.4. Test Procedure

- Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- Spectrum analyzer setting parameters in accordance with section 7.3.
- Set the EUT transmit continuously with maximum output power.
- Allow trace to stabilize, use the marker function to mark the highest emission level outside the authorized band.
- Repeat above procedures until all modes and channels were measured.
- Record the results in the test report.

7.5. Test Result

Refer to section 11: Appendix E & G

8. RADIATED SPURIOUS EMISSIONS AND BAND EDGE

8.1. Limit

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)


15.209 Limit

Frequency (MHz)	Field Strength(μV/m)	Distance(m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

- (1) Emission level dB μ V = 20 log Emission level μ V/m.
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

8.2. Test Setup

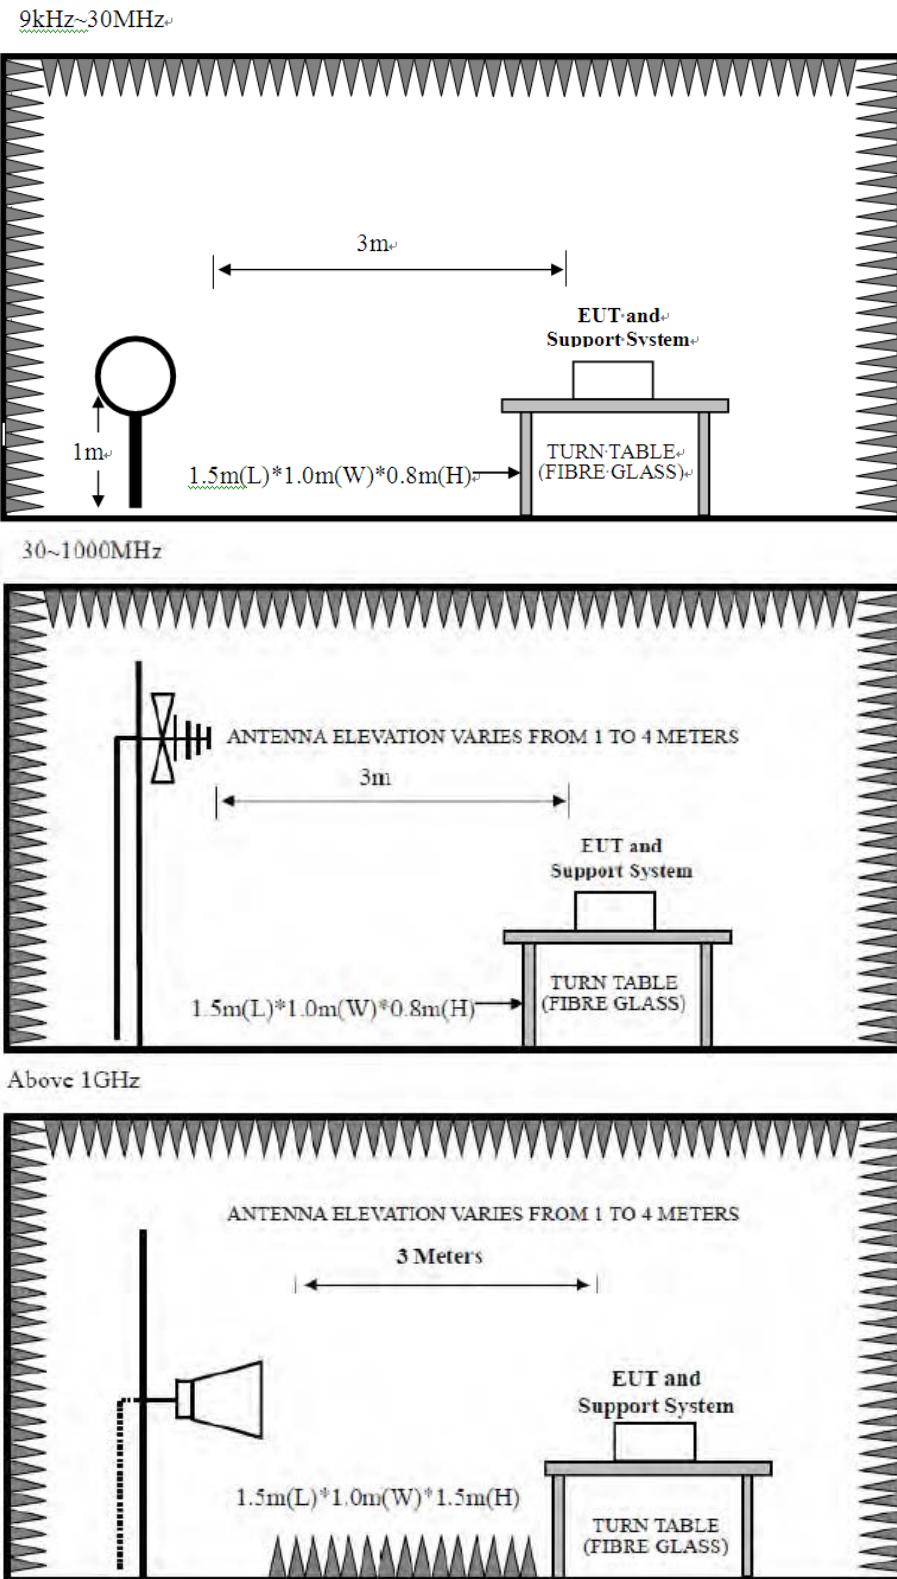

8.3. Spectrum Analyzer Setting

For 9KHz-150KHz

Spectrum Parameters	Setting
RBW	300Hz(for Peak&AVG)/CISPR 200Hz(for QP)
VBW	300Hz(for Peak&AVG)/CISPR 200Hz(for QP)
Start frequency	9KHz
Stop frequency	150KHz
Sweep Time	Auto
Detector	PEAK/QP/AVG
Trace Mode	Max Hold

For 150KHz-30MHz

Spectrum Parameters	Setting
RBW	9KHz
VBW	9KHz
Start frequency	150KHz
Stop frequency	30MHz
Sweep Time	Auto
Detector	QP
Trace Mode	Max Hold

For 30MHz-1GHz

Spectrum Parameters	Setting
RBW	120KHz
VBW	300KHz
Start frequency	30MHz
Stop frequency	1GHz
Sweep Time	Auto
Detector	QP
Trace Mode	Max Hold

For Above 1GHz

Spectrum Parameters	Setting	
RBW	1MHz	
VBW	PEAK Measurement	AVG Measurement
	3MHz	Duty cycle $\geq 98\%$, VBW=10Hz Duty cycle $< 98\%$, VBW $\geq 1/T$
Start frequency	1GHz	
Stop frequency	25GHz	
Sweep Time	Auto	
Detector	PEAK	
Trace Mode	Max Hold	

Note :T is the on-time time of the duty cycle,when EUT transmit continuously with maximum output power,unit is seconds. reference section 2.8 for the on-time time.



8.4. Test Procedure

- a. EUT was placed on a turn table, which is 0.8 meter high above ground for below 1GHz test, and which is 1.5 meter high above ground for above 1GHz test.
- b. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower.
- c. Set the EUT transmit continuously with maximum output power.
- d. The turn table can rotate 360 degrees to determine the position of the maximum emission level.
- e. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on test.
- f. Spectrum analyzer setting parameters in accordance with section 8.3.
- g. Repeat above procedures until all channels were measured.
- h. Record the results in the test report.

Note:


1. For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.
2. The frequency 2412MHz/2422MHz/2437MHz/2452MHz/2462MHz are fundamental frequency, which no limit, the limit on plots is automatically generated by the software, it's not fundamental limit, we can't remove it.
3. IEEE 802.11b, IEEE 802.11g, IEEE 802.11nH20, IEEE 802.11nH40 all have been tested, only worst case 802.11n HT20 is recorded. The antenna 2 test data is recorded in report.

8.5. Test Result

Radiated Emissions Below 1GHz

EST Technology

Chilingxiang, Qishantou, Santun,
 Houjie, Dongguan, Guangdong, China
 Tel: +86-769-83081888
 Fax: +86-769-83081878

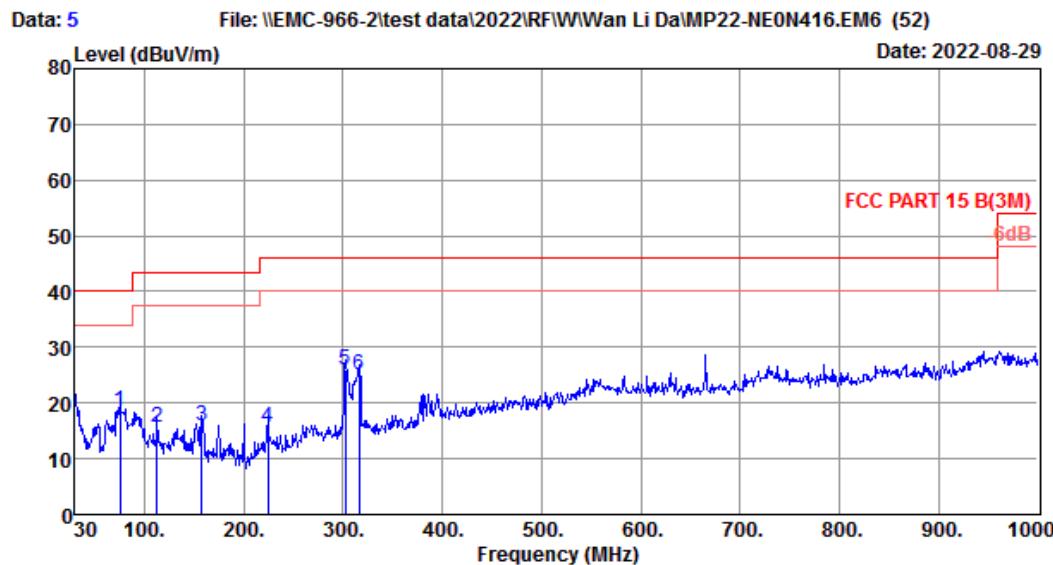

Site no. : 2# 966 chamber Data no. : 5
 Dis. / Ant. : 3m 47018 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:21°C;Humi:41%;Press:100.63kPa
 Engineer : LST
 EUT : Tablet
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : MP22-NEON416
 Test Mode : TX Mode
 Screen:G21520376811FA-LP6

Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Emission				Remark
			Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	
1 75.59	6.95	0.57	11.09	18.61	40.00	21.39	QP
2 112.45	11.30	0.84	3.40	15.54	43.50	27.96	QP
3 158.04	11.64	1.01	3.19	15.84	43.50	27.66	QP
4 224.00	10.62	1.28	3.86	15.76	46.00	30.24	QP
5 302.57	14.10	1.61	10.14	25.85	46.00	20.15	QP
6 316.15	14.46	1.64	8.87	24.97	46.00	21.03	QP


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 6 File: \EMC-966-2\test data\2022\RFW\Wan Li Da\MP22-NEON416.EM6 (52)

Date: 2022-08-29

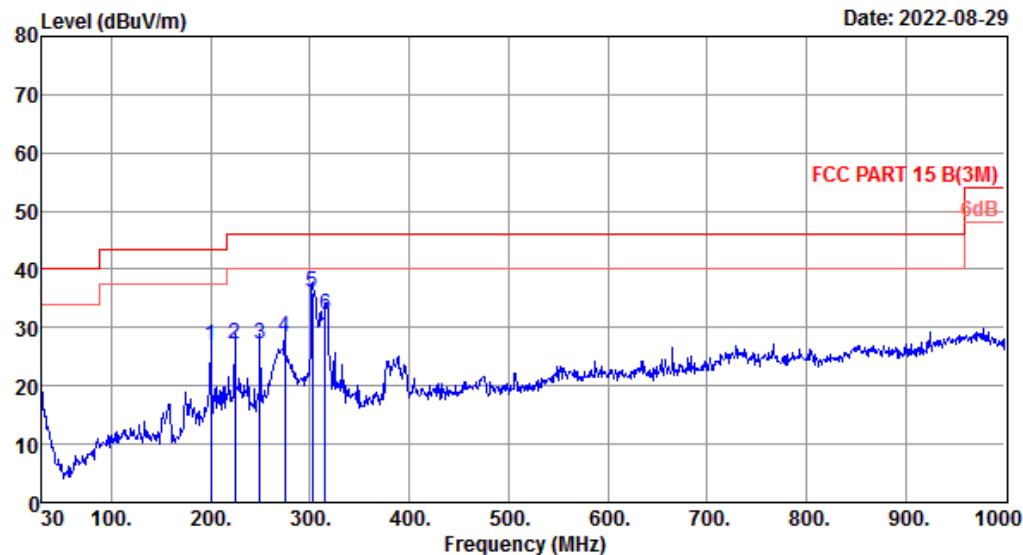

Site no. : 2# 966 chamber Data no. : 6
 Dis. / Ant. : 3m 47018 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:21°C;Humi:41%;Press:100.63kPa
 Engineer : LST
 EUT : Tablet
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : MP22-NEON416
 Test Mode : TX Mode
 Screen:G21520376811FA-LP6

Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission			
				Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1 199.75	8.80	1.11	16.92	26.83	43.50	16.67	QP
2 224.00	10.62	1.28	15.13	27.03	46.00	18.97	QP
3 249.22	12.64	1.42	12.95	27.01	46.00	18.99	QP
4 274.44	13.20	1.54	13.55	28.29	46.00	17.71	QP
5 302.57	14.10	1.61	20.19	35.90	46.00	10.10	QP
6 315.18	14.40	1.65	16.23	32.28	46.00	13.72	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
 Houjie, Dongguan, Guangdong, China
 Tel: +86-769-83081888
 Fax: +86-769-83081878

Data: 29

File: \EMC-966-2\test data\2022\RFW\Wan Li Da\MP22-NEON416.EM6 (52)

Date: 2022-08-29

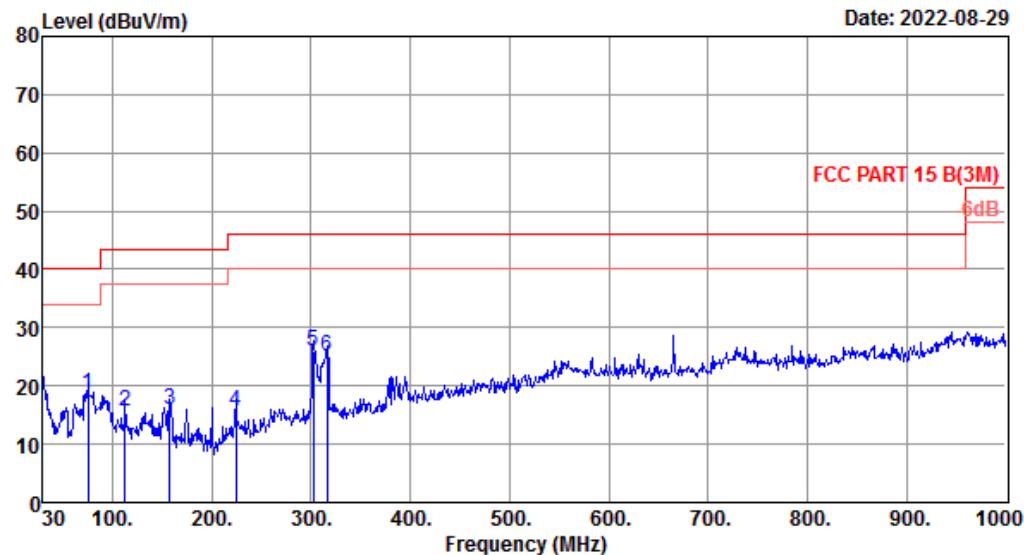

Site no. : 2# 966 chamber Data no. : 29
 Dis. / Ant. : 3m 47018 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:21°C;Humi:41%;Press:100.63kPa
 Engineer : LST
 EUT : Tablet
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : MP22-NEON416
 Test Mode : TX Mode
 Screen:G21520376811FA-LP9

Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission			
				Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1 75.59	6.85	0.57	11.19	18.61	40.00	21.39	QP
2 112.45	11.10	0.84	3.60	15.54	43.50	27.96	QP
3 158.04	11.44	1.01	3.39	15.84	43.50	27.66	QP
4 224.00	10.42	1.28	4.06	15.76	46.00	30.24	QP
5 302.57	13.90	1.61	10.34	25.85	46.00	20.15	QP
6 316.15	14.26	1.64	9.07	24.97	46.00	21.03	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 30

File: \EMC-966-2\test data\2022\RF\WWan Li Da\MP22-NEON416.EM6 (52)

Date: 2022-08-29

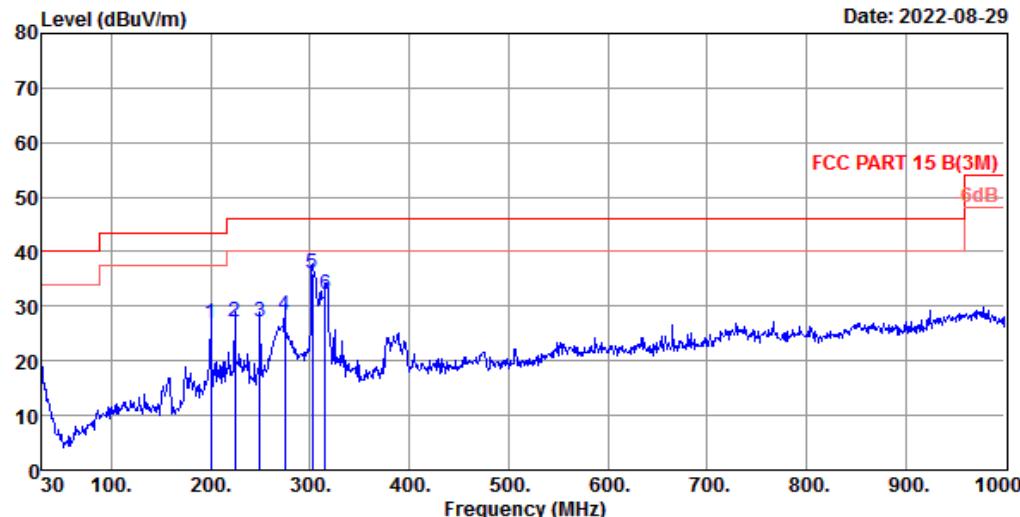

Site no. : 2# 966 chamber Data no. : 30
 Dis. / Ant. : 3m 47018 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:21°C;Hum:41%;Press:100.63kPa
 Engineer : LST
 EUT : Tablet
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : MP22-NEON416
 Test Mode : TX Mode
 Screen:G21520376811FA-LP9

Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Emission				Remark
			Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	
1 199.75	8.60	1.11	17.12	26.83	43.50	16.67	QP
2 224.00	10.42	1.28	15.33	27.03	46.00	18.97	QP
3 249.22	12.44	1.42	13.15	27.01	46.00	18.99	QP
4 274.44	13.00	1.54	13.75	28.29	46.00	17.71	QP
5 302.57	13.90	1.61	20.39	35.90	46.00	10.10	QP
6 315.18	14.20	1.65	16.43	32.28	46.00	13.72	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

Note:

1. The amplitude of 9KHz to 30MHz spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.
2. All channels had been pre-test, only the worst case was reported.




Radiated Emissions Above 1G**EST Technology**

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 21

File: \EMC-966-1\test data\2022\RF\W\Wang Li Da\MP22-NEON416 (FCC).EM6 (62)

Date: 2022-09-03

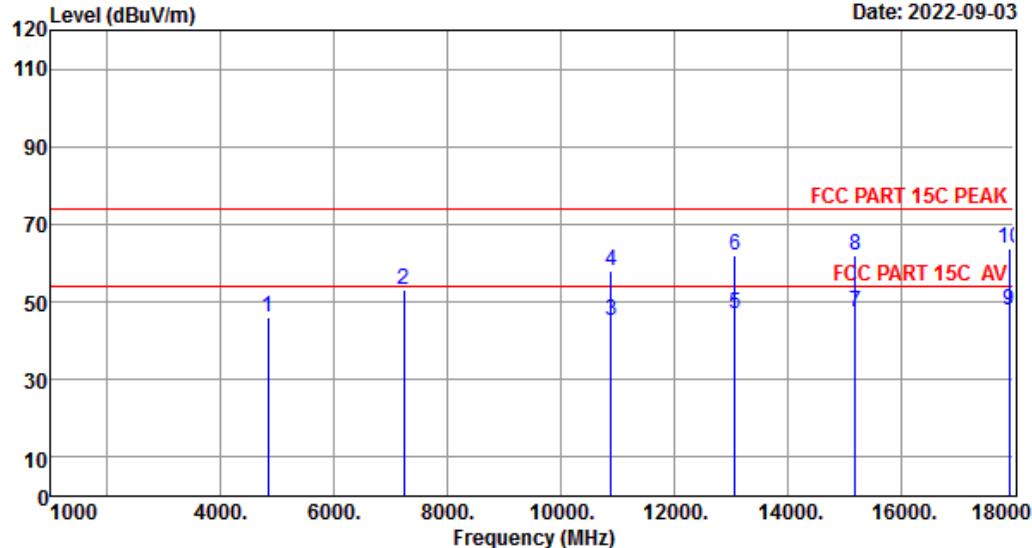

Site no. : 1# 966 Chamber Data no. : 21
 Dis. / Ant. : 3m BBHA9120D 1-18G 2208 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:20.8°C;Hum:53.6%;Press:101.52kPa
 Engineer : JBR
 EUT : Tablet
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : MP22-NEON416
 Test Mode : IEEE 802.11n HT20 TX 2412MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Emission Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.000	32.43	4.91	31.01	39.79	46.12	74.00	27.88	Peak
2	7236.000	36.19	6.27	28.51	39.00	52.95	74.00	21.05	Peak
3	10894.000	38.83	7.81	28.70	27.25	45.19	54.00	8.81	Average
4	10894.000	38.83	7.81	28.70	40.21	58.15	74.00	15.85	Peak
5	13070.000	39.72	8.64	26.70	25.25	46.91	54.00	7.09	Average
6	13070.000	39.72	8.64	26.70	40.38	62.04	74.00	11.96	Peak
7	15195.000	39.17	9.47	26.96	25.58	47.26	54.00	6.74	Average
8	15195.000	39.17	9.47	26.96	40.12	61.80	74.00	12.20	Peak
9	17915.000	41.32	10.67	26.90	22.70	47.79	54.00	6.21	Average
10	17915.000	41.32	10.67	26.90	38.56	63.65	74.00	10.35	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.




EST Technology

Chilingxiang, Qishantou, Santun,
 Houjie, Dongguan, Guangdong, China
 Tel: +86-769-83081888
 Fax: +86-769-83081878

Data: 22

File: \EMC-966-1\test data\2022\RFW\Wang Li Da\MP22-NEON416 (FCC).EM6 (62)

Date: 2022-09-03

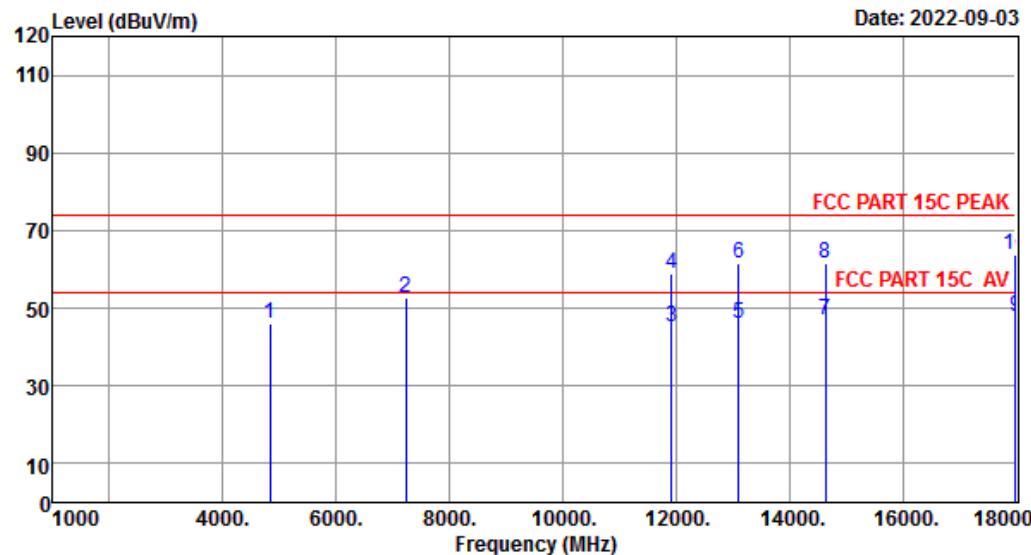

Site no. : 1# 966 Chamber Data no. : 22
 Dis. / Ant. : 3m BBHA9120D 1-18G 2208 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:20.8°C;Humi:53.6%;Press:101.52kPa
 Engineer : JBR
 EUT : Tablet
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : MP22-NEON416
 Test Mode : IEEE 802.11n HT20 TX 2412MHz

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1 4824.000	32.43	4.91	31.01	39.59	45.92	74.00	28.08	Peak
2 7236.000	36.19	6.27	28.51	38.77	52.72	74.00	21.28	Peak
3 11914.000	38.81	8.22	26.40	24.63	45.26	54.00	8.74	Average
4 11914.000	38.81	8.22	26.40	38.45	59.08	74.00	14.92	Peak
5 13104.000	39.73	8.63	26.76	24.59	46.19	54.00	7.81	Average
6 13104.000	39.73	8.63	26.76	39.77	61.37	74.00	12.63	Peak
7 14634.000	39.68	9.32	27.47	25.57	47.10	54.00	6.90	Average
8 14634.000	39.68	9.32	27.47	39.84	61.37	74.00	12.63	Peak
9 18000.000	41.60	10.71	26.90	22.57	47.98	54.00	6.02	Average
10 18000.000	41.60	10.71	26.90	38.23	63.64	74.00	10.36	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.




EST Technology

Chilingxiang, Qishantou, Santun,
 Houjie, Dongguan, Guangdong, China
 Tel: +86-769-83081888
 Fax: +86-769-83081878

Data: 23

File: \EMC-966-1\test data\2022\RFW\Wang Li Da\MP22-NEON416 (FCC).EM6 (62)

Date: 2022-09-03

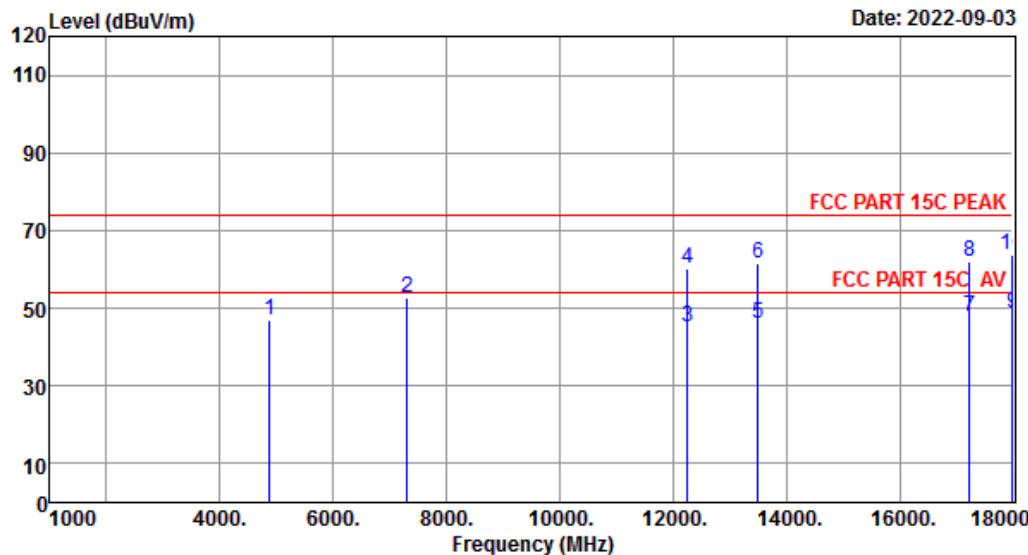

Site no. : 1# 966 Chamber Data no. : 23
 Dis. / Ant. : 3m BBHA9120D 1-18G 2208 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:20.8°C;Humi:53.6%;Press:101.52kPa
 Engineer : JBR
 EUT : Tablet
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : MP22-NEON416
 Test Mode : IEEE 802.11n HT20 TX 2437MHz

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1 4874.000	32.54	4.93	30.98	40.34	46.83	74.00	27.17	Peak
2 7311.000	36.25	6.33	28.58	38.84	52.84	74.00	21.16	Peak
3 12254.000	39.03	8.40	26.30	24.22	45.35	54.00	8.65	Average
4 12254.000	39.03	8.40	26.30	38.99	60.12	74.00	13.88	Peak
5 13495.000	39.85	8.57	27.34	25.14	46.22	54.00	7.78	Average
6 13495.000	39.85	8.57	27.34	40.59	61.67	74.00	12.33	Peak
7 17235.000	39.08	10.32	26.90	25.24	47.74	54.00	6.26	Average
8 17235.000	39.08	10.32	26.90	39.52	62.02	74.00	11.98	Peak
9 18000.000	41.60	10.71	26.90	23.25	48.66	54.00	5.34	Average
10 18000.000	41.60	10.71	26.90	38.27	63.68	74.00	10.32	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.




EST Technology

Chilingxiang, Qishantou, Santun,
 Houjie, Dongguan, Guangdong, China
 Tel: +86-769-83081888
 Fax: +86-769-83081878

Data: 24

File: \EMC-966-1\test data\2022\RFW\Wang Li Da\MP22-NEON416 (FCC).EM6 (62)

Date: 2022-09-03

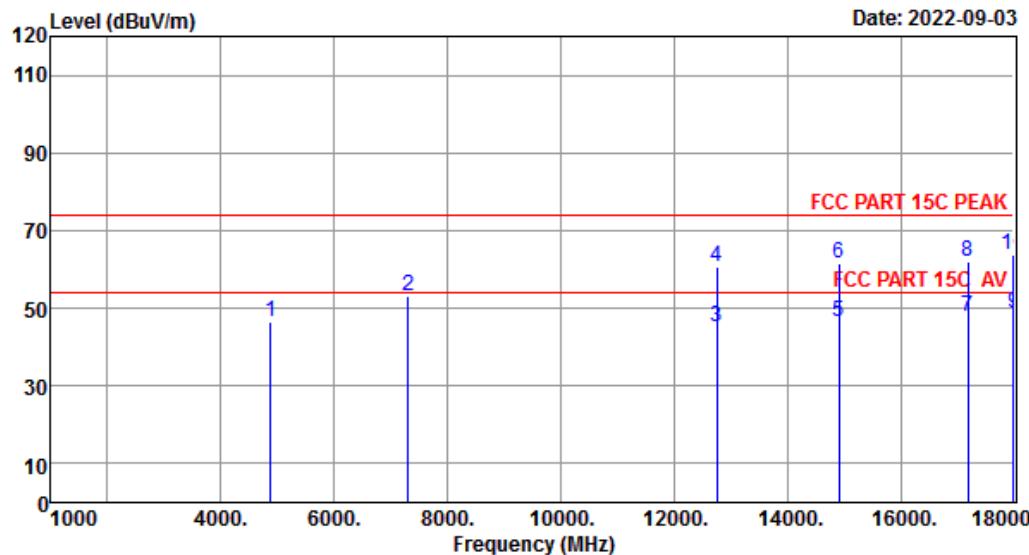

Site no. : 1# 966 Chamber Data no. : 24
 Dis. / Ant. : 3m BBHA9120D 1-18G 2208 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:20.8°C;Humi:53.6%;Press:101.52kPa
 Engineer : JBR
 EUT : Tablet
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : MP22-NEON416
 Test Mode : IEEE 802.11n HT20 TX 2437MHz

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1 4874.000	32.54	4.93	30.98	39.94	46.43	74.00	27.57	Peak
2 7311.000	36.25	6.33	28.58	39.24	53.24	74.00	20.76	Peak
3 12764.000	39.49	8.60	26.51	23.47	45.05	54.00	8.95	Average
4 12764.000	39.49	8.60	26.51	39.05	60.63	74.00	13.37	Peak
5 14906.000	39.55	9.40	27.19	24.67	46.43	54.00	7.57	Average
6 14906.000	39.55	9.40	27.19	39.72	61.48	74.00	12.52	Peak
7 17184.000	38.91	10.29	26.90	25.63	47.93	54.00	6.07	Average
8 17184.000	38.91	10.29	26.90	39.51	61.81	74.00	12.19	Peak
9 18000.000	41.60	10.71	26.90	23.47	48.88	54.00	5.12	Average
10 18000.000	41.60	10.71	26.90	38.34	63.75	74.00	10.25	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.




EST Technology

Chilingxiang, Qishantou, Santun,
 Houjie, Dongguan, Guangdong, China
 Tel: +86-769-83081888
 Fax: +86-769-83081878

Data: 25

File: \EMC-966-1\test data\2022\RFW\Wang Li Da\MP22-NEON416 (FCC).EM6 (62)

Date: 2022-09-03

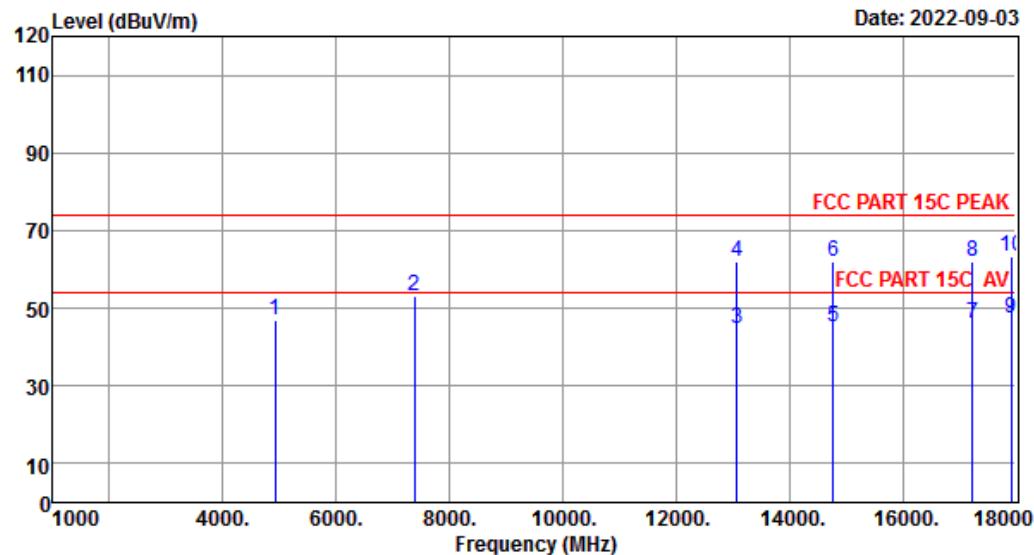

Site no. : 1# 966 Chamber Data no. : 25
 Dis. / Ant. : 3m BBHA9120D 1-18G 2208 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:20.8°C;Humi:53.6%;Press:101.52kPa
 Engineer : JBR
 EUT : Tablet
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : MP22-NEON416
 Test Mode : IEEE 802.11n HT20 TX 2462MHz

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1 4924.000	32.64	4.96	30.95	40.44	47.09	74.00	26.91	Peak
2 7386.000	36.31	6.39	28.65	39.23	53.28	74.00	20.72	Peak
3 13070.000	39.72	8.64	26.70	23.16	44.82	54.00	9.18	Average
4 13070.000	39.72	8.64	26.70	40.18	61.84	74.00	12.16	Peak
5 14770.000	39.62	9.36	27.33	23.55	45.20	54.00	8.80	Average
6 14770.000	39.62	9.36	27.33	40.39	62.04	74.00	11.96	Peak
7 17235.000	39.08	10.32	26.90	23.63	46.13	54.00	7.87	Average
8 17235.000	39.08	10.32	26.90	39.39	61.89	74.00	12.11	Peak
9 17915.000	41.32	10.67	26.90	22.14	47.23	54.00	6.77	Average
10 17915.000	41.32	10.67	26.90	38.40	63.49	74.00	10.51	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.



EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 26 File: \EMC-966-1\test data\2022\RF\W\Wang Li Da\MP22-NEON416 (FCC).EM6 (62)
Date: 2022-09-03

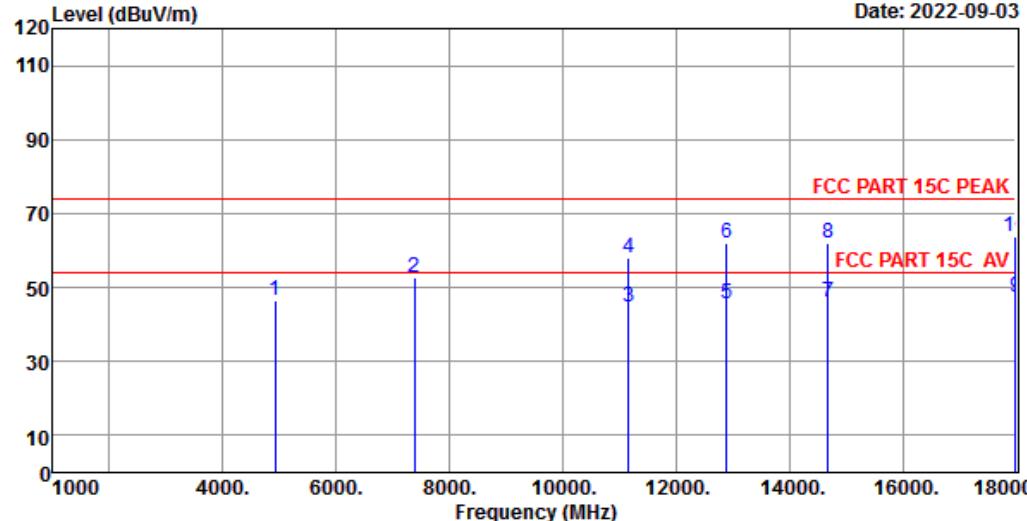

Site no. : 1# 966 Chamber Data no. : 26
Dis. / Ant. : 3m BBHA9120D 1-18G 2208 Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : Temp:20.8°C;Hum:53.6%;Press:101.52kPa
Engineer : JBR
EUT : Tablet
Power : DC 12V From Adapter Input AC 120V/60Hz
M/N : MP22-NEON416
Test Mode : IEEE 802.11n HT20 TX 2462MHz

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1 4924.000	32.64	4.96	30.95	39.84	46.49	74.00	27.51	Peak
2 7386.000	36.31	6.39	28.65	38.86	52.91	74.00	21.09	Peak
3 11166.000	38.88	7.92	28.12	25.88	44.56	54.00	9.44	Average
4 11166.000	38.88	7.92	28.12	39.43	58.11	74.00	15.89	Peak
5 12900.000	39.61	8.63	26.56	23.96	45.64	54.00	8.36	Average
6 12900.000	39.61	8.63	26.56	40.47	62.15	74.00	11.85	Peak
7 14685.000	39.66	9.33	27.42	24.47	46.04	54.00	7.96	Average
8 14685.000	39.66	9.33	27.42	40.21	61.78	74.00	12.22	Peak
9 18000.000	41.60	10.71	26.90	22.14	47.55	54.00	6.45	Average
10 18000.000	41.60	10.71	26.90	38.28	63.69	74.00	10.31	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
2. Margin= Limit - Emission Level.
3. The emission levels that are 20dB below the official limit are not reported.

Note:

- The amplitude of 18GHz to 25GHz spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.




Radiated Band Edge**EST Technology**

Chilingxiang, Qishantou, Santun,
 Houjie, Dongguan, Guangdong, China
 Tel: +86-769-83081888
 Fax: +86-769-83081878

Data: 27

File: \EMC-966-1\test data\2022\RF\W\Wang Li Da\MP22-NEON416 (FCC).EM6 (62)

Date: 2022-09-03

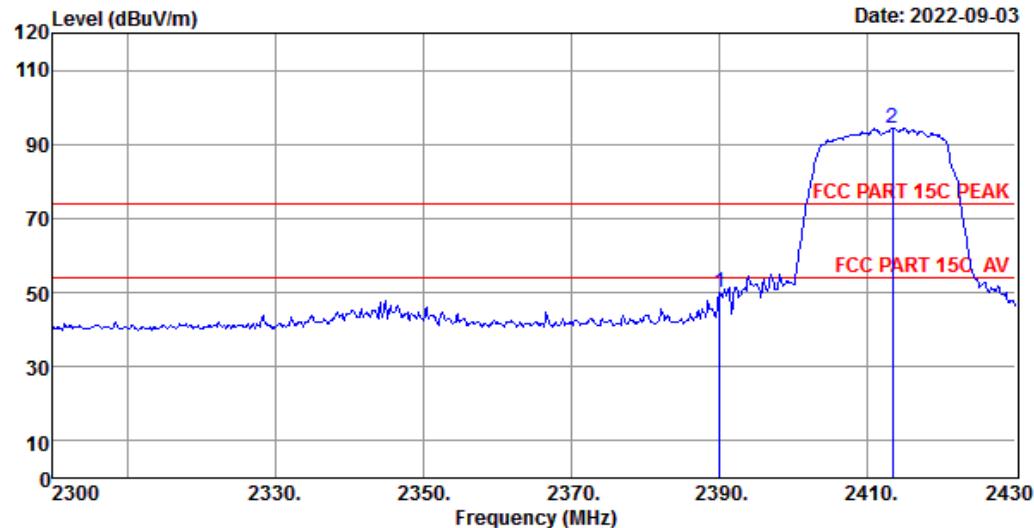

Site no. : 1# 966 Chamber Data no. : 27
 Dis. / Ant. : 3m BBHA9120D 1-18G 2208 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:20.8°C;Humi:53.6%;Press:101.52kPa
 Engineer : JBR
 EUT : Tablet
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : MP22-NEON416
 Test Mode : IEEE 802.11n HT20 TX 2412MHz

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission				Remark
					Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)		
1 2390.000	27.43	3.47	32.06	51.29	50.13	74.00	23.87		Peak
2 2413.360	27.50	3.48	32.10	95.63	94.51	74.00	-20.51		Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.


EST Technology

Chilingxiang, Qishantou, Santun,
 Houjie, Dongguan, Guangdong, China
 Tel: +86-769-83081888
 Fax: +86-769-83081878

Data: 28

File: \EMC-966-1\test data\2022\RFW\Wang Li Da\MP22-NEON416 (FCC).EM6 (62)

Date: 2022-09-03

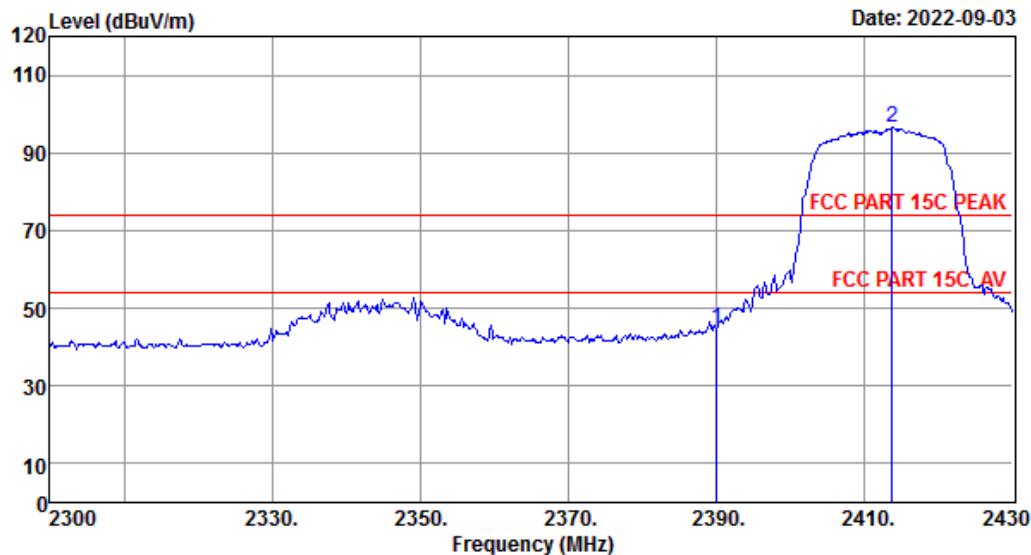


Site no. : 1# 966 Chamber Data no. : 28
 Dis. / Ant. : 3m BBHA9120D 1-18G 2208 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:20.8°C;Humi:53.6%;Press:101.52kPa
 Engineer : JBR
 EUT : Tablet
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : MP22-NEON416
 Test Mode : IEEE 802.11n HT20 TX 2412MHz

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1 2390.000	27.43	3.47	32.06	45.70	44.54	74.00	29.46	Peak
2 2413.750	27.50	3.48	32.10	97.52	96.40	74.00	-22.40	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
 Houjie, Dongguan, Guangdong, China
 Tel: +86-769-83081888
 Fax: +86-769-83081878

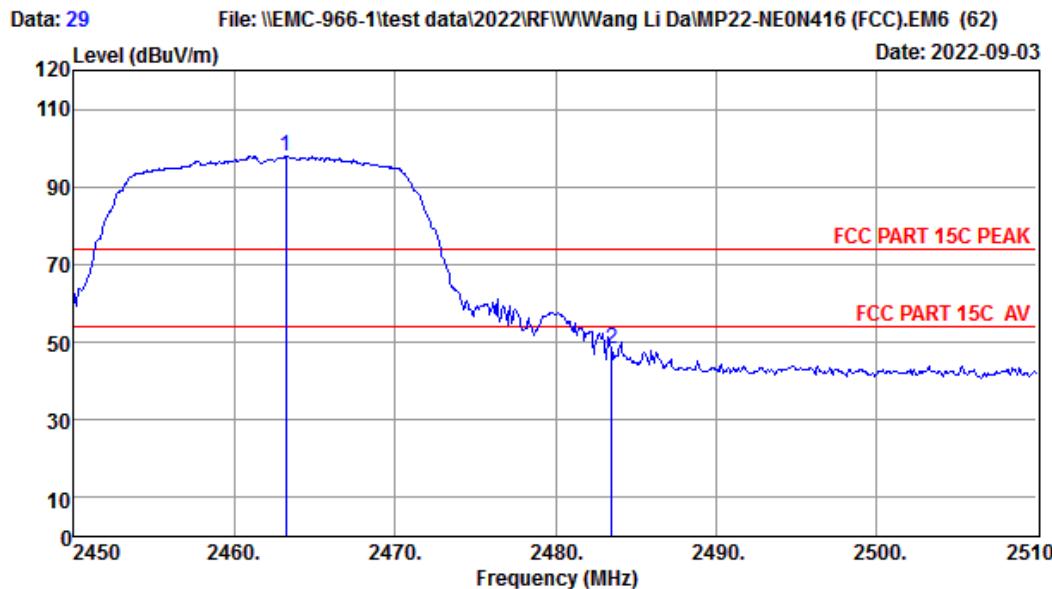


Site no. : 1# 966 Chamber Data no. : 29
 Dis. / Ant. : 3m BBHA9120D 1-18G 2208 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:20.8°C;Humi:53.6%;Press:101.52kPa
 Engineer : JBR
 EUT : Tablet
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : MP22-NEON416
 Test Mode : IEEE 802.11n HT20 TX 2462MHz

	Ant.	Cable	Amp	Emission					Remark
Freq. (MHz)	Factor (dB/m)	Loss (dB)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)		
1 2463.200	27.64	3.50	32.19	99.03	97.98	74.00	-23.98	Peak	
2 2483.500	27.70	3.51	32.22	49.49	48.48	74.00	25.52	Peak	

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

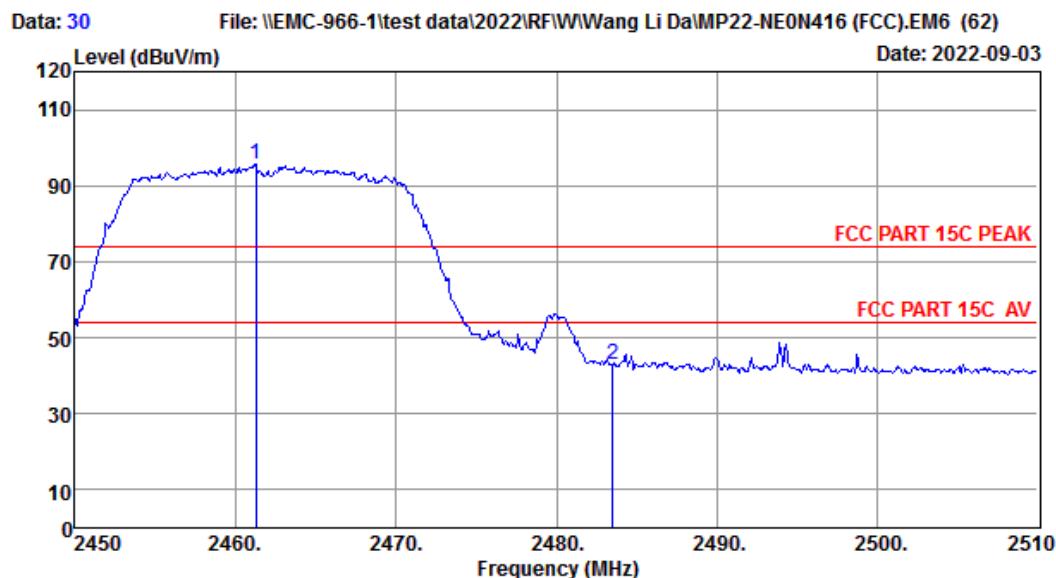

Site no. : 1# 966 Chamber Data no. : 30
 Dis. / Ant. : 3m BBHA9120D 1-18G 2208 Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:20.8°C;Hum:53.6%;Press:101.52kPa
 Engineer : JBR
 EUT : Tablet
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : MP22-NEON416
 Test Mode : IEEE 802.11n HT20 TX 2462MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2461.280	27.64	3.50	32.18	96.67	95.63	74.00	-21.63	Peak
2	2483.500	27.70	3.51	32.22	43.91	42.90	74.00	31.10	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

Note:

1. All channels had been pre-test, only of the worst case channels were reported.



9. AC POWER LINE CONDUCTED EMISSIONS


9.1. Limit

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Note:

1. * Decreasing linearly with logarithm of frequency.
2. The lower limit shall apply at the transition frequencies.

9.2. Test Setup

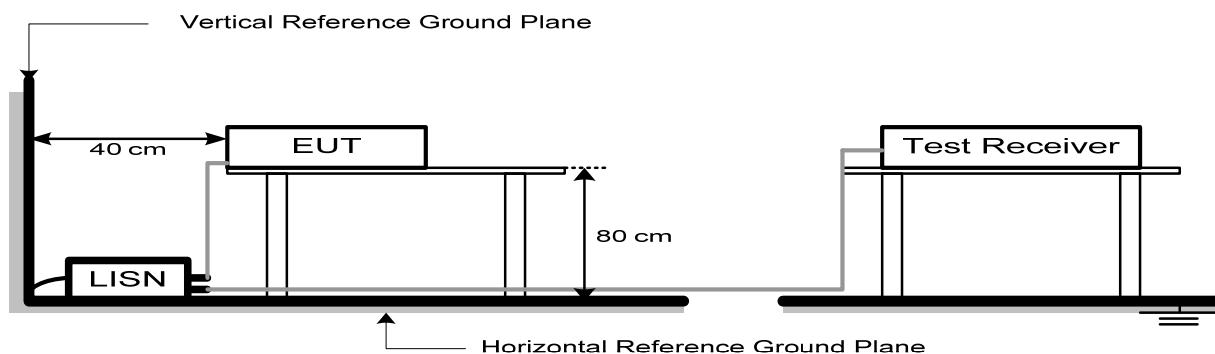

9.3. Spectrum Analyzer Setting

Spectrum Parameters	Setting
RBW	9KHz
VBW	9KHz
Start frequency	150KHz
Stop frequency	30MHz
Sweep Time	Auto
Detector	QP/AVG
Trace Mode	Max Hold


9.4. Test Procedure

- a. The EUT was placed on a non-metallic table, 80cm above the ground plane.
- b. The EUT Power connected to the power mains through a line impedance stabilization network.
- c. Provides a 50 ohm coupling impedance for the EUT (Please refer the block diagram of the test setup and photographs).
- d. Set the EUT transmit continuously with maximum output power.
- e. Spectrum analyzer setting parameters in accordance with section 9.3.
- f. The AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10: 2013 on Conducted Emission Test.
- g. Record the results in the test report.

9.5. Test Result

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

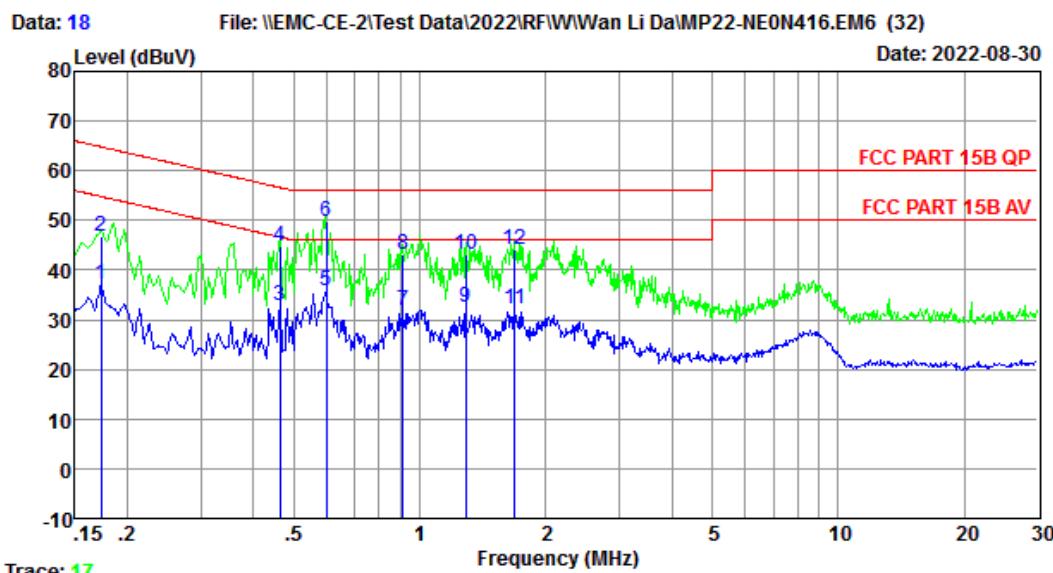

Site no : 2#CE Shield Room Data no. : 18
Env. / Ins. : Temp:21.9°C Humi:25% Press:101.50kPa LINE Phase : NEUTRAL
Limit : FCC PART 15B QP
Engineer : ZSX
EUT : Tablet
Power : DC 12V From Adapter Input AC 240V/60Hz
M/N : MP22-NEON416
Test Mode : TX Mode

Freq. (MHz)	LISN Factor (db)	Cable Loss (db)	Reading dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
	Factor (db)	Cable Loss (db)		Reading dBuV)			
1	0.173	9.71	9.69	17.85	37.25	54.81	17.56 Average
2	0.173	9.71	9.69	27.55	46.95	64.81	17.86 QP
3	0.464	9.60	9.92	13.39	32.91	46.63	13.72 Average
4	0.464	9.60	9.92	25.27	44.79	56.63	11.84 QP
5	0.598	9.84	9.92	16.19	35.95	46.00	10.05 Average
6	0.598	9.84	9.92	29.95	49.71	56.00	6.29 QP
7	0.914	9.67	9.94	12.40	32.01	46.00	13.99 Average
8	0.914	9.67	9.94	23.57	43.18	56.00	12.82 QP
9	1.289	9.67	9.94	12.75	32.36	46.00	13.64 Average
10	1.289	9.67	9.94	23.46	43.07	56.00	12.93 QP
11	1.689	9.65	9.95	12.64	32.24	46.00	13.76 Average
12	1.689	9.65	9.95	24.47	44.07	56.00	11.93 QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
2. Margin= Limit - Emission Level.
3. If the average limit is met when using a quasi-peak detector,
the EUT shall be deemed to meet both limits and measurement
with average detector is unnecessary.




EST Technology

Chilingxiang, Qishantou, Santun,
 Houjie, Dongguan, Guangdong, China
 Tel: +86-769-83081888
 Fax: +86-769-83081878

Data: 20

File: \EMC-CE-2\Test Data\2022\RFI\W\Wan Li Da\MP22-NEON416.EM6 (32)

Date: 2022-08-30

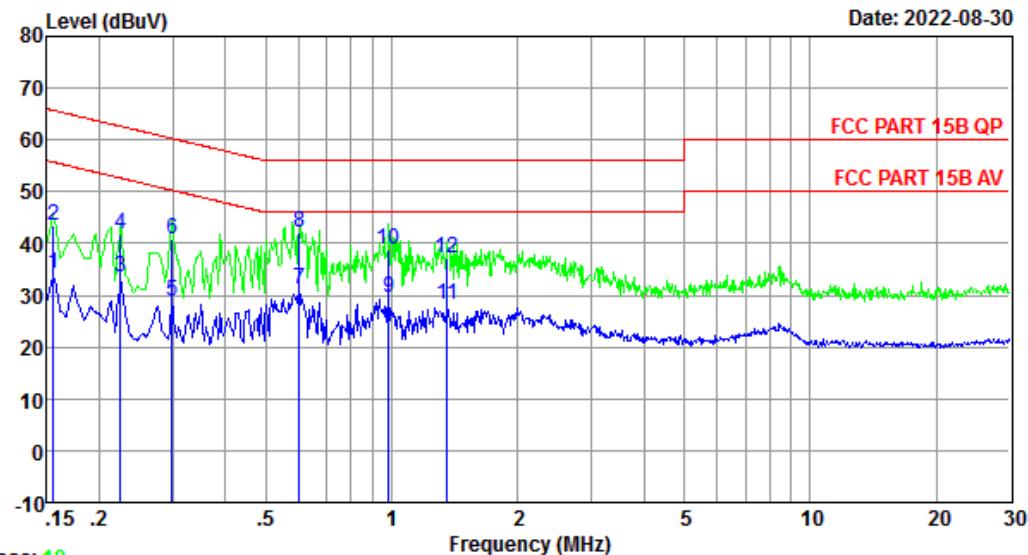

Trace: 19

Site no : 2#CE Shield Room Data no. : 20
 Env. / Ins. : Temp:21.9°C Humi:25% Press:101.50kPa LINE Phase : LINE
 Limit : FCC PART 15B QP
 Engineer : ZSX
 EUT : Tablet
 Power : DC 12V From Adapter Input AC 240V/60Hz
 M/N : MP22-NEON416
 Test Mode : TX Mode

	Freq. (MHz)	LISN Factor (db)	Cable Loss (db)	Reading dBuV)	Emission Level dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.156	9.66	9.69	14.66	34.01	55.69	21.68	Average
2	0.156	9.66	9.69	24.23	43.58	65.69	22.11	QP
3	0.224	9.66	9.84	13.96	33.46	52.66	19.20	Average
4	0.224	9.66	9.84	22.26	41.76	62.66	20.90	QP
5	0.299	9.64	9.92	9.43	28.99	50.28	21.29	Average
6	0.299	9.64	9.92	21.18	40.74	60.28	19.54	QP
7	0.601	9.76	9.92	11.53	31.21	46.00	14.79	Average
8	0.601	9.76	9.92	22.33	42.01	56.00	13.99	QP
9	0.984	9.72	9.94	9.72	29.38	46.00	16.62	Average
10	0.984	9.72	9.94	19.24	38.90	56.00	17.10	QP
11	1.359	9.72	9.95	8.54	28.21	46.00	17.79	Average
12	1.359	9.72	9.95	17.49	37.16	56.00	18.84	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.




EST Technology

Chilingxiang, Qishantou, Santun,
 Houjie, Dongguan, Guangdong, China
 Tel: +86-769-83081888
 Fax: +86-769-83081878

Data: 22

File: \EMC-CE-2\Test Data\2022\RFI\W\Wan Li Da\MP22-NEON416.EM6 (32)

Date: 2022-08-30

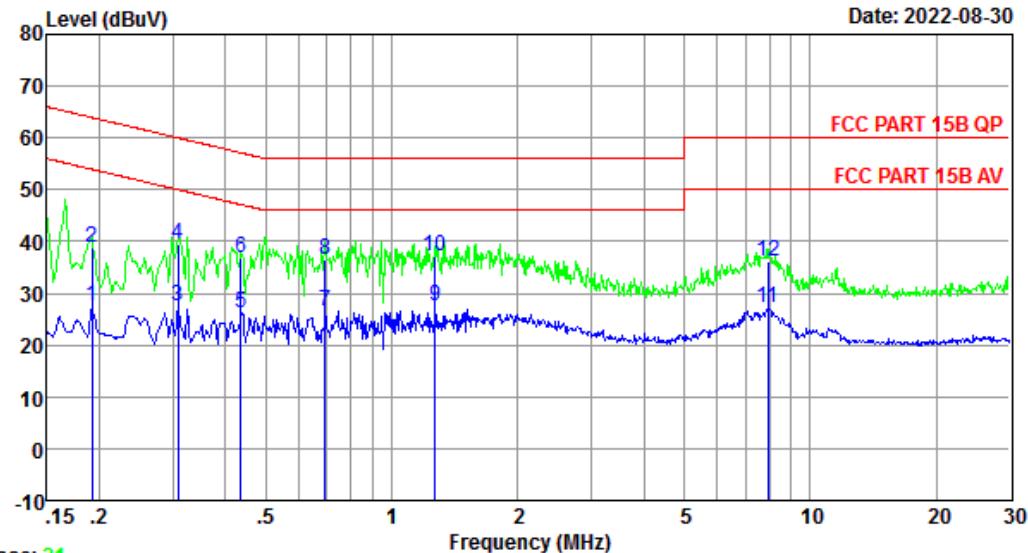

Trace: 21

Site no : 2#CE Shield Room Data no. : 22
 Env. / Ins. : Temp:21.9°C Humi:25% Press:101.50kPa LINE Phase : LINE
 Limit : FCC PART 15B QP
 Engineer : ZSX
 EUT : Tablet
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : MP22-NEON416
 Test Mode : TX Mode

	Freq. (MHz)	LISN Factor (db)	Cable Loss (db)	Reading dBuV)	Emission Level dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.192	9.67	9.77	8.14	27.58	53.93	26.35	Average
2	0.192	9.67	9.77	19.48	38.92	63.93	25.01	QP
3	0.308	9.64	9.92	7.90	27.46	50.02	22.56	Average
4	0.308	9.64	9.92	20.03	39.59	60.02	20.43	QP
5	0.435	9.70	9.92	6.64	26.26	47.15	20.89	Average
6	0.435	9.70	9.92	17.34	36.96	57.15	20.19	QP
7	0.694	9.74	9.93	6.87	26.54	46.00	19.46	Average
8	0.694	9.74	9.93	16.69	36.36	56.00	19.64	QP
9	1.269	9.72	9.94	7.86	27.52	46.00	18.48	Average
10	1.269	9.72	9.94	17.33	36.99	56.00	19.01	QP
11	7.935	9.75	10.04	7.42	27.21	50.00	22.79	Average
12	7.935	9.75	10.04	16.23	36.02	60.00	23.98	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.




EST Technology

Chilingxiang, Qishantou, Santun,
 Houjie, Dongguan, Guangdong, China
 Tel:+86-769-83081888
 Fax:+86-769-83081878

Data: 24

File: \EMC-CE-2\Test Data\2022\RFI\W\Wan Li Da\MP22-NEON416.EM6 (32)

Date: 2022-08-30

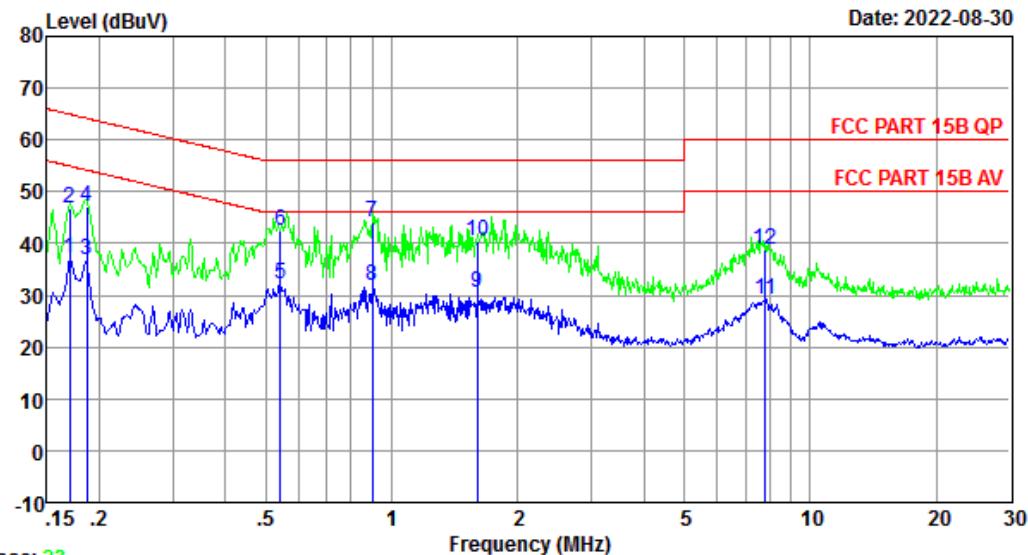

Trace: 23

Site no : 2#CE Shield Room Data no. : 24
 Env. / Ins. : Temp:21.9°C Humi:25% Press:101.50kPa LINE Phase : NEUTRAL
 Limit : FCC PART 15B QP
 Engineer : ZSX
 EUT : Tablet
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : MP22-NEON416
 Test Mode : TX Mode

	Freq. (MHz)	LISN Factor (db)	Cable Loss (db)	Reading dBuV	Emission Level dBuV	Limits dBuV	Margin (dB)	Remark
1	0.170	9.71	9.69	17.67	37.07	54.94	17.87	Average
2	0.170	9.71	9.69	27.32	46.72	64.94	18.22	QP
3	0.186	9.54	9.77	17.39	36.70	54.20	17.50	Average
4	0.186	9.54	9.77	27.95	47.26	64.20	16.94	QP
5	0.541	9.71	9.92	12.59	32.22	46.00	13.78	Average
6	0.541	9.71	9.92	22.90	42.53	56.00	13.47	QP
7	0.899	9.67	9.94	24.46	44.07	56.00	11.93	QP
8	0.899	9.67	9.94	12.21	31.82	46.00	14.18	Average
9	1.602	9.63	9.95	10.98	30.56	46.00	15.44	Average
10	1.602	9.63	9.95	20.75	40.33	56.00	15.67	QP
11	7.810	9.72	10.04	9.47	29.23	50.00	20.77	Average
12	7.810	9.72	10.04	19.07	38.83	60.00	21.17	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.



10. ANTENNA REQUIREMENTS

10.1. Limit

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

10.2. Test Result

The antennas used for this product is internal antenna, so compliance with antenna requirements.
(Please refer to the EUT photo for details)

11. APPENDIX


Appendix A: Duty Cycle Test Result

Test Mode	Antenna	Frequency [MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]
11B	Ant1	2437	8.40	8.44	99.53
	Ant2	2437	8.40	8.45	99.41
11G	Ant1	2437	1.39	1.44	96.53
	Ant2	2437	1.39	1.44	96.53
11N20MIMO	Ant1	2437	1.30	1.35	96.30
	Ant2	2437	1.30	1.36	95.59
11N40MIMO	Ant1	2437	0.65	0.70	92.86
	Ant2	2437	0.65	0.70	92.86

Test Graphs





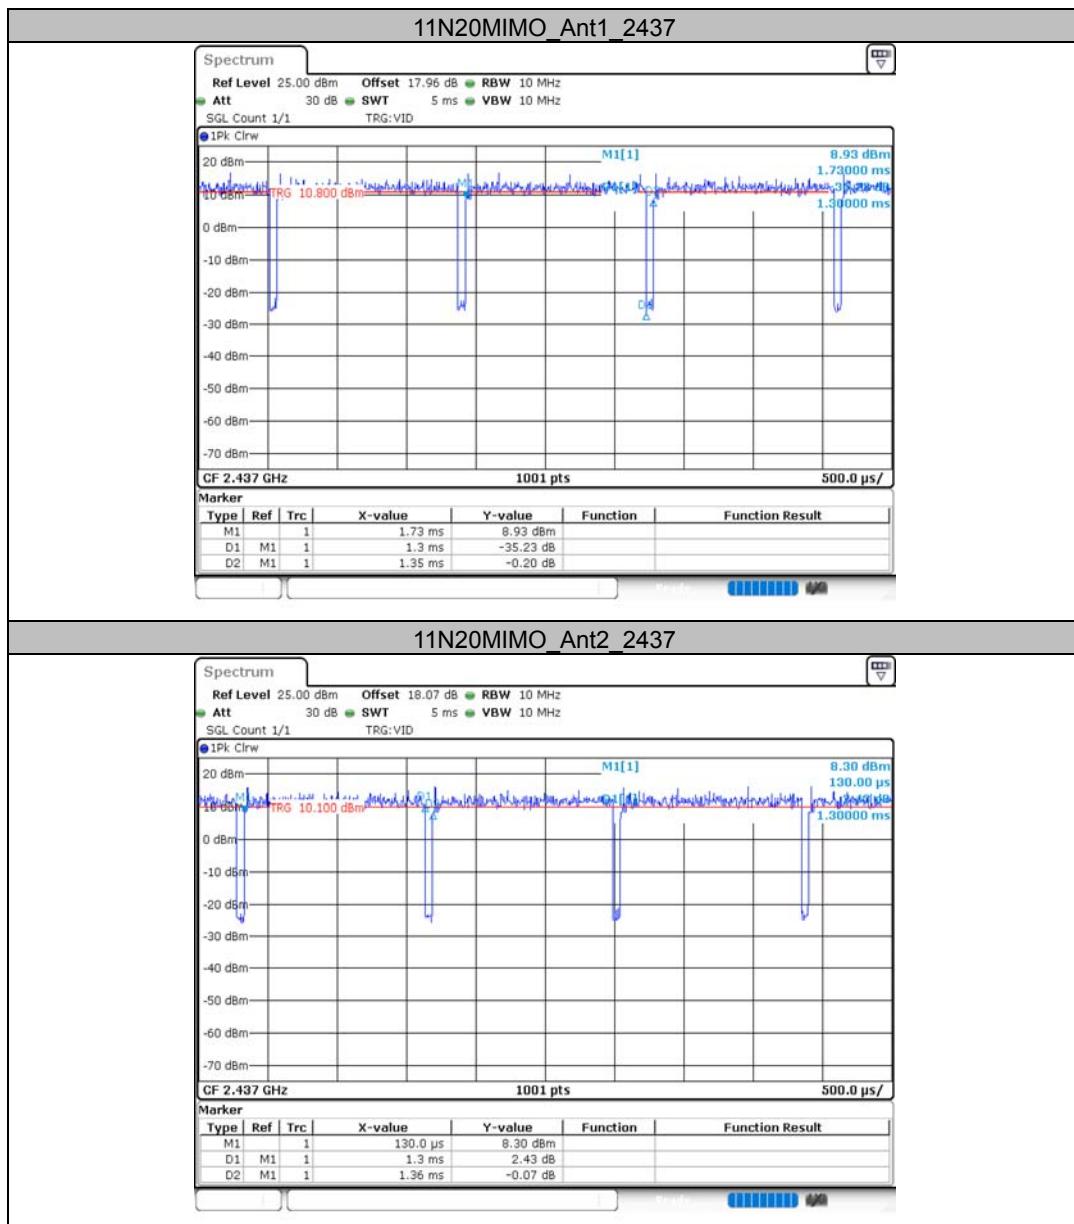






**Appendix B: DTS Bandwidth
Test Result**


Test Mode	Antenna	Frequency [MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	9.04	2407.48	2416.52	0.5	PASS
	Ant2	2412	9.04	2407.48	2416.52	0.5	PASS
	Ant1	2437	9.08	2432.48	2441.56	0.5	PASS
	Ant2	2437	9.04	2432.48	2441.52	0.5	PASS
	Ant1	2462	9.08	2457.48	2466.56	0.5	PASS
	Ant2	2462	9.04	2457.48	2466.52	0.5	PASS
11G	Ant1	2412	15.12	2404.44	2419.56	0.5	PASS
	Ant2	2412	15.12	2404.44	2419.56	0.5	PASS
	Ant1	2437	15.12	2429.44	2444.56	0.5	PASS
	Ant2	2437	15.08	2429.48	2444.56	0.5	PASS
	Ant1	2462	15.12	2454.44	2469.56	0.5	PASS
	Ant2	2462	15.12	2454.44	2469.56	0.5	PASS
11N20MIMO	Ant1	2412	16.08	2403.48	2419.56	0.5	PASS
	Ant2	2412	15.92	2403.84	2419.76	0.5	PASS
	Ant1	2437	15.12	2429.44	2444.56	0.5	PASS
	Ant2	2437	16.28	2428.88	2445.16	0.5	PASS
	Ant1	2462	15.08	2454.48	2469.56	0.5	PASS
	Ant2	2462	16.32	2453.84	2470.16	0.5	PASS
11N40MIMO	Ant1	2422	35.12	2404.48	2439.60	0.5	PASS
	Ant2	2422	35.12	2404.48	2439.60	0.5	PASS
	Ant1	2437	35.12	2419.48	2454.60	0.5	PASS
	Ant2	2437	35.12	2419.48	2454.60	0.5	PASS
	Ant1	2452	35.12	2434.48	2469.60	0.5	PASS
	Ant2	2452	35.12	2434.48	2469.60	0.5	PASS


Test Graphs

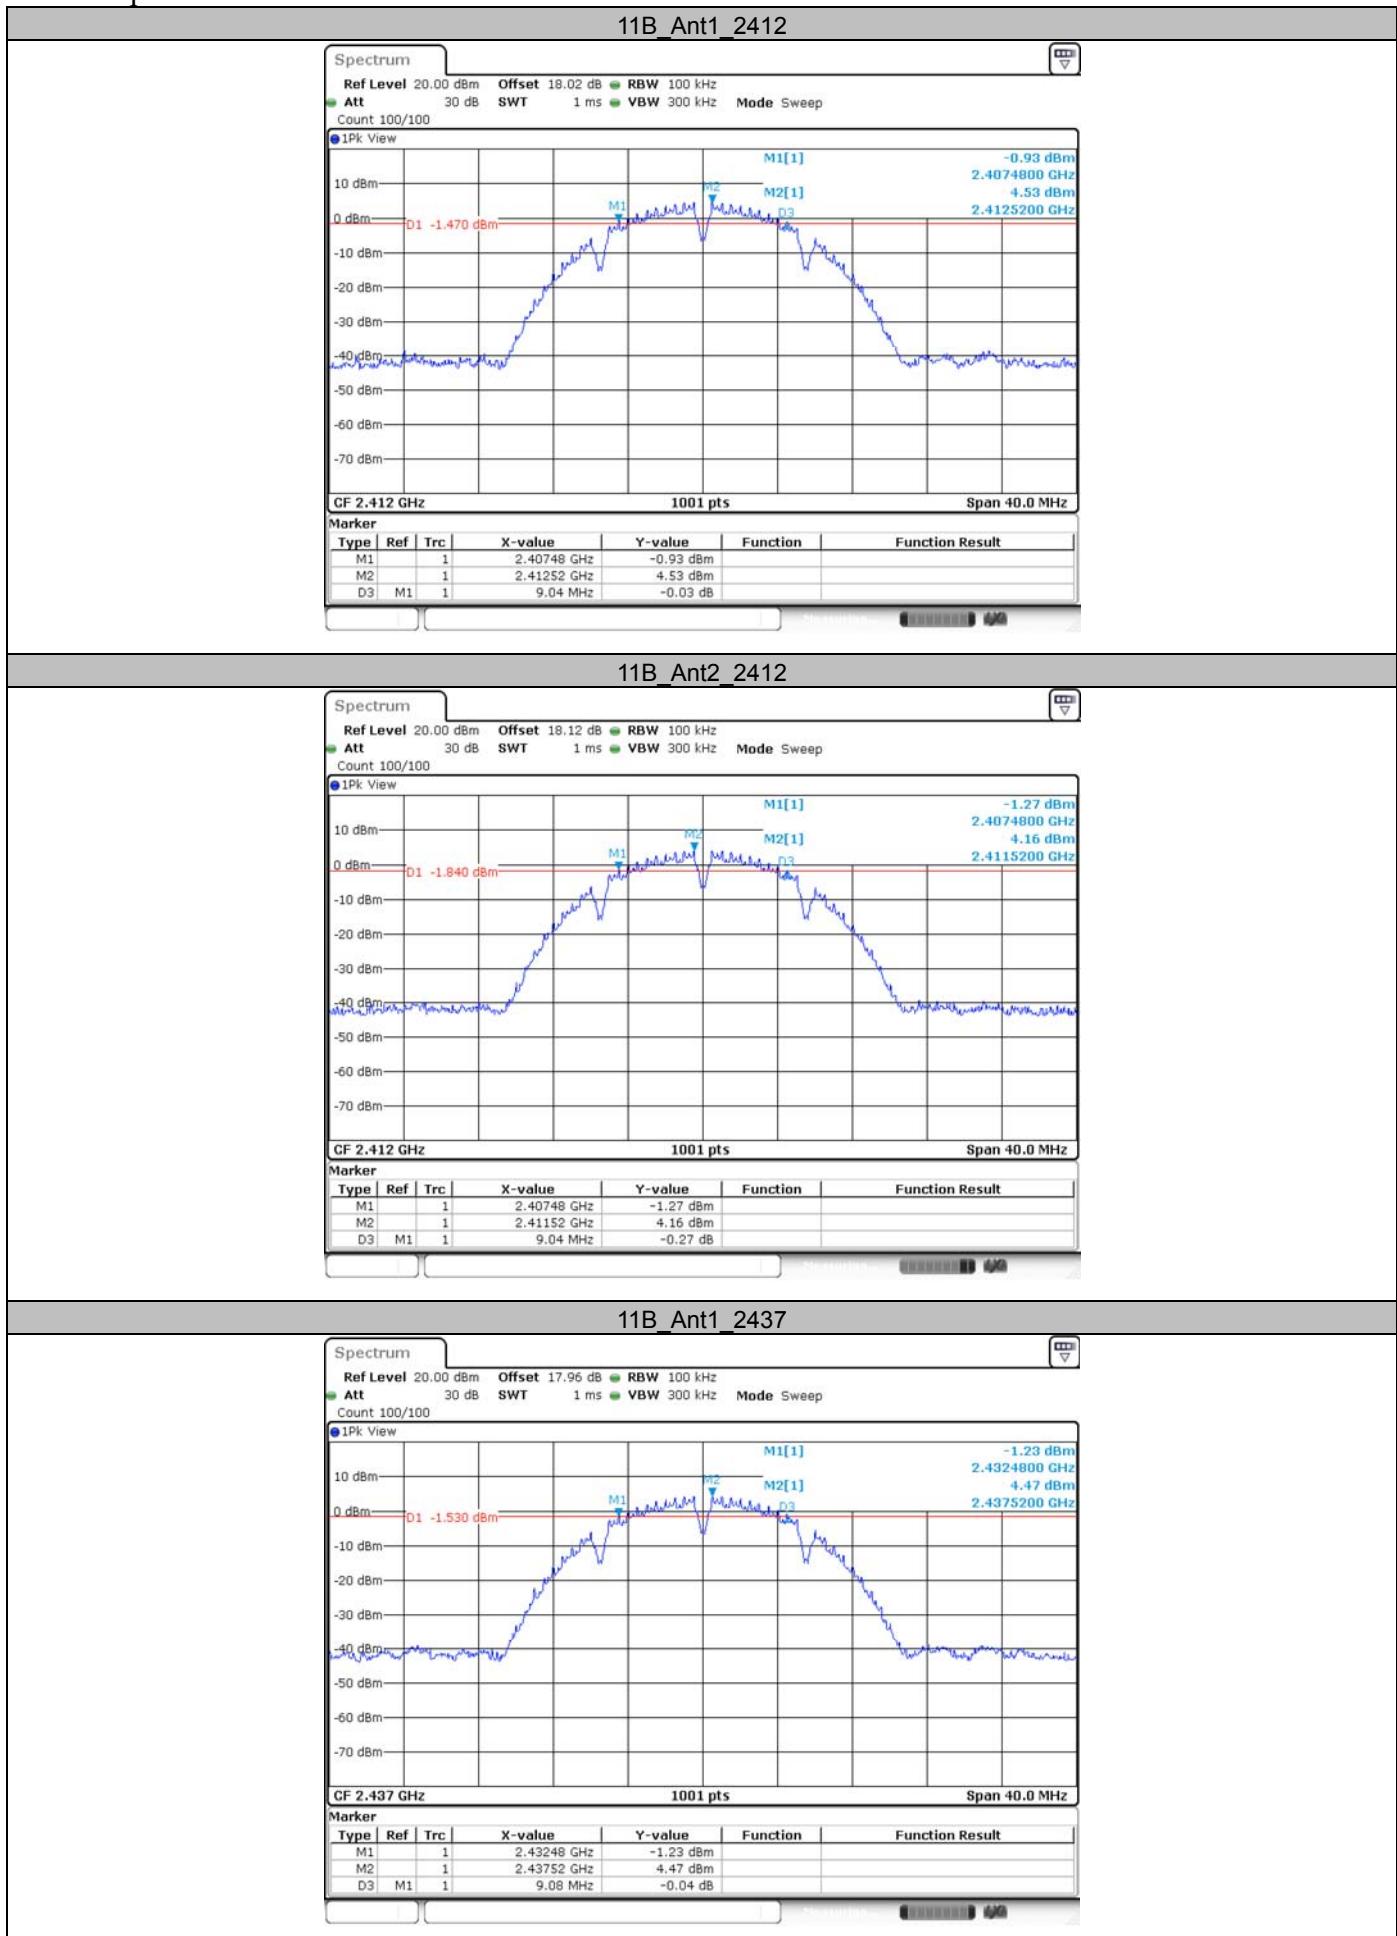


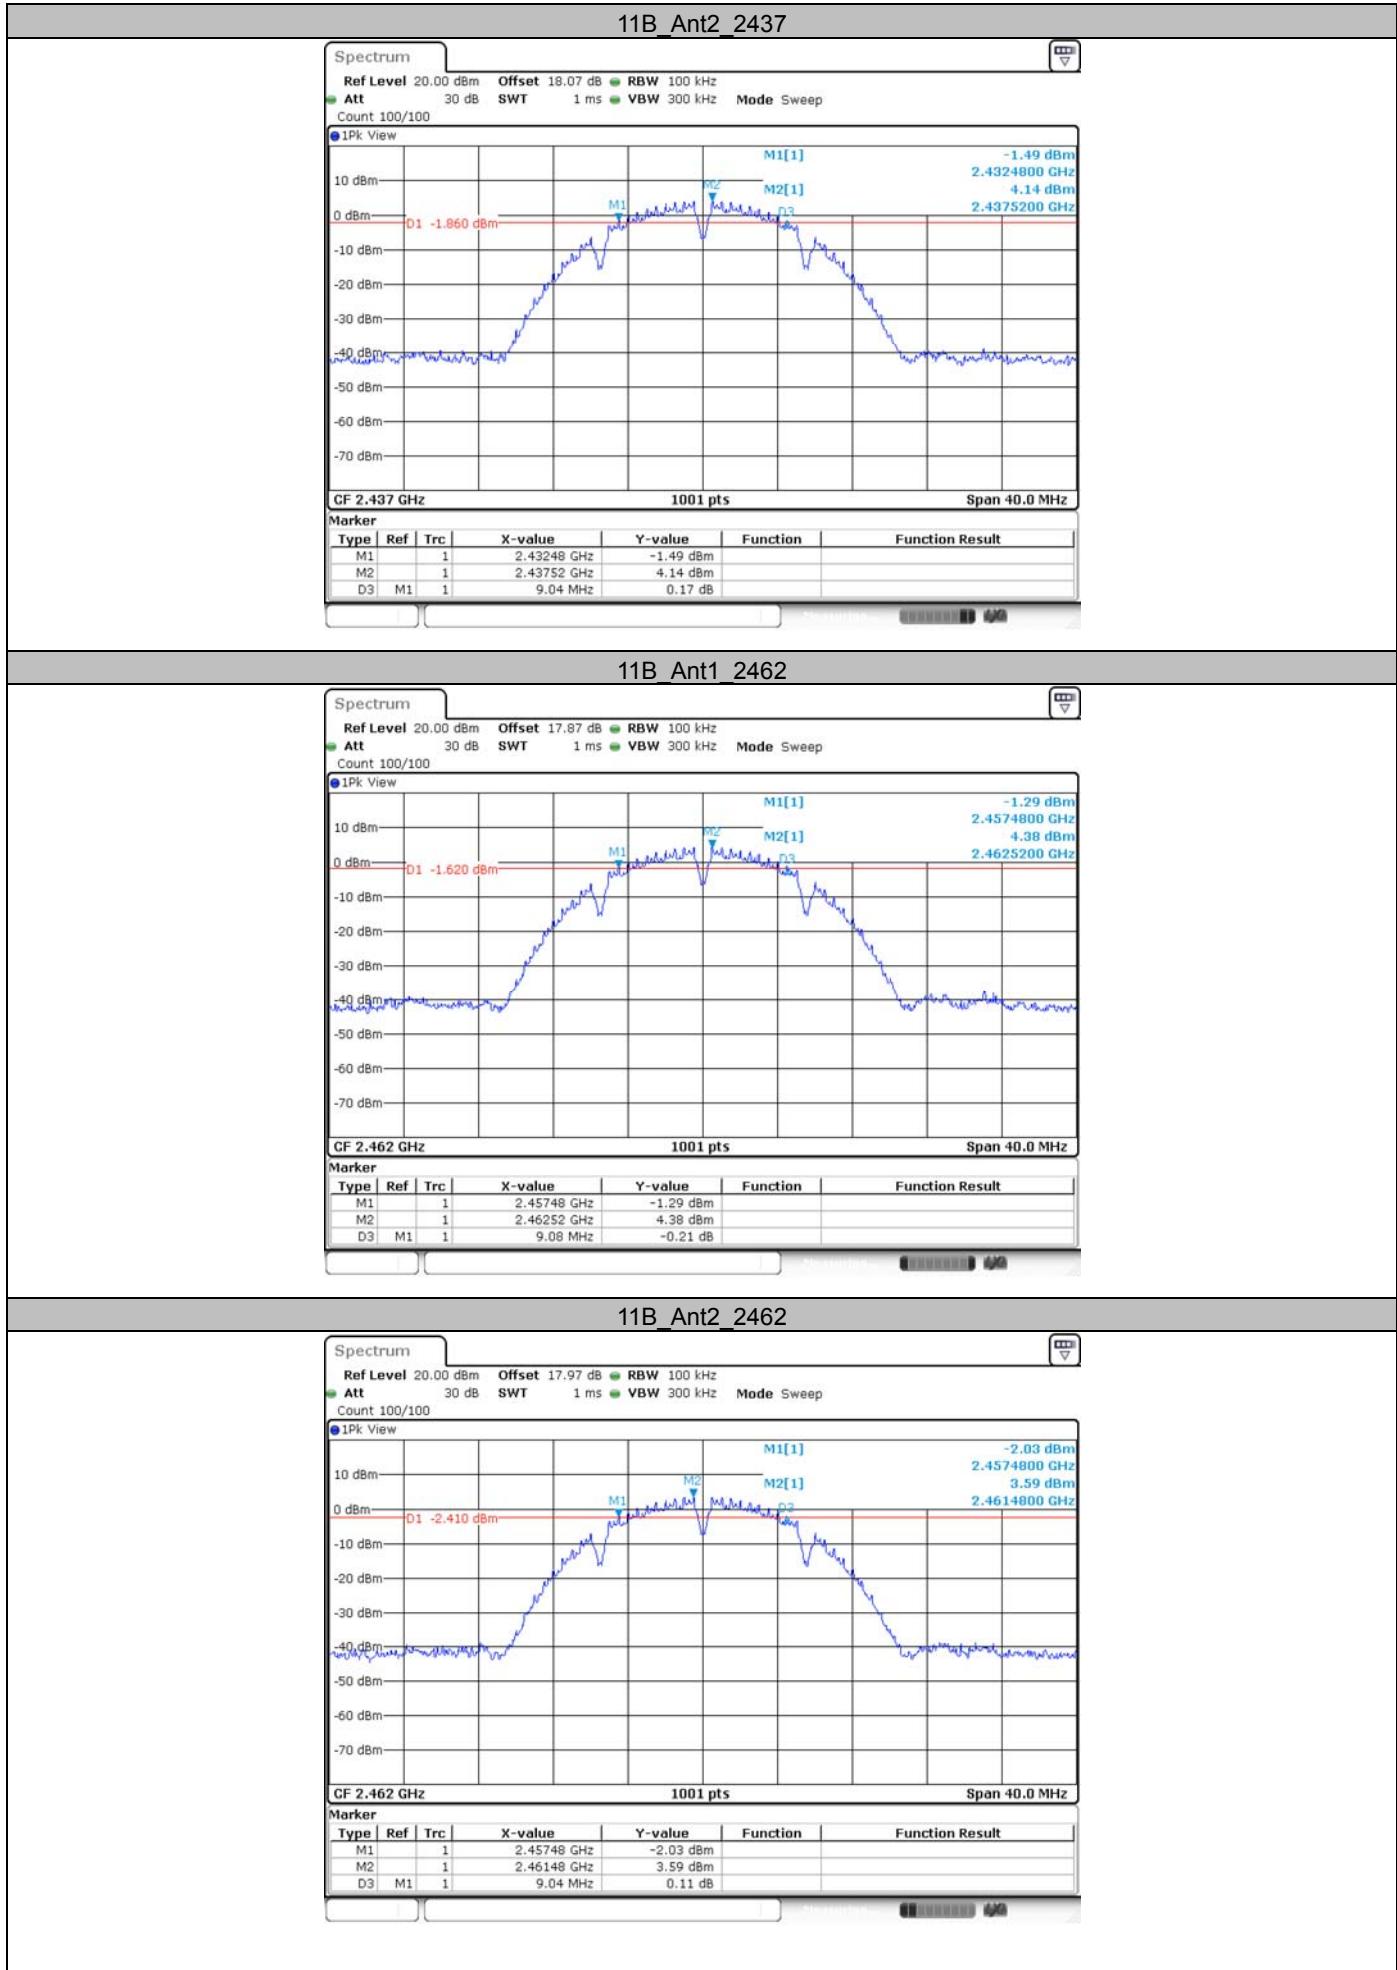


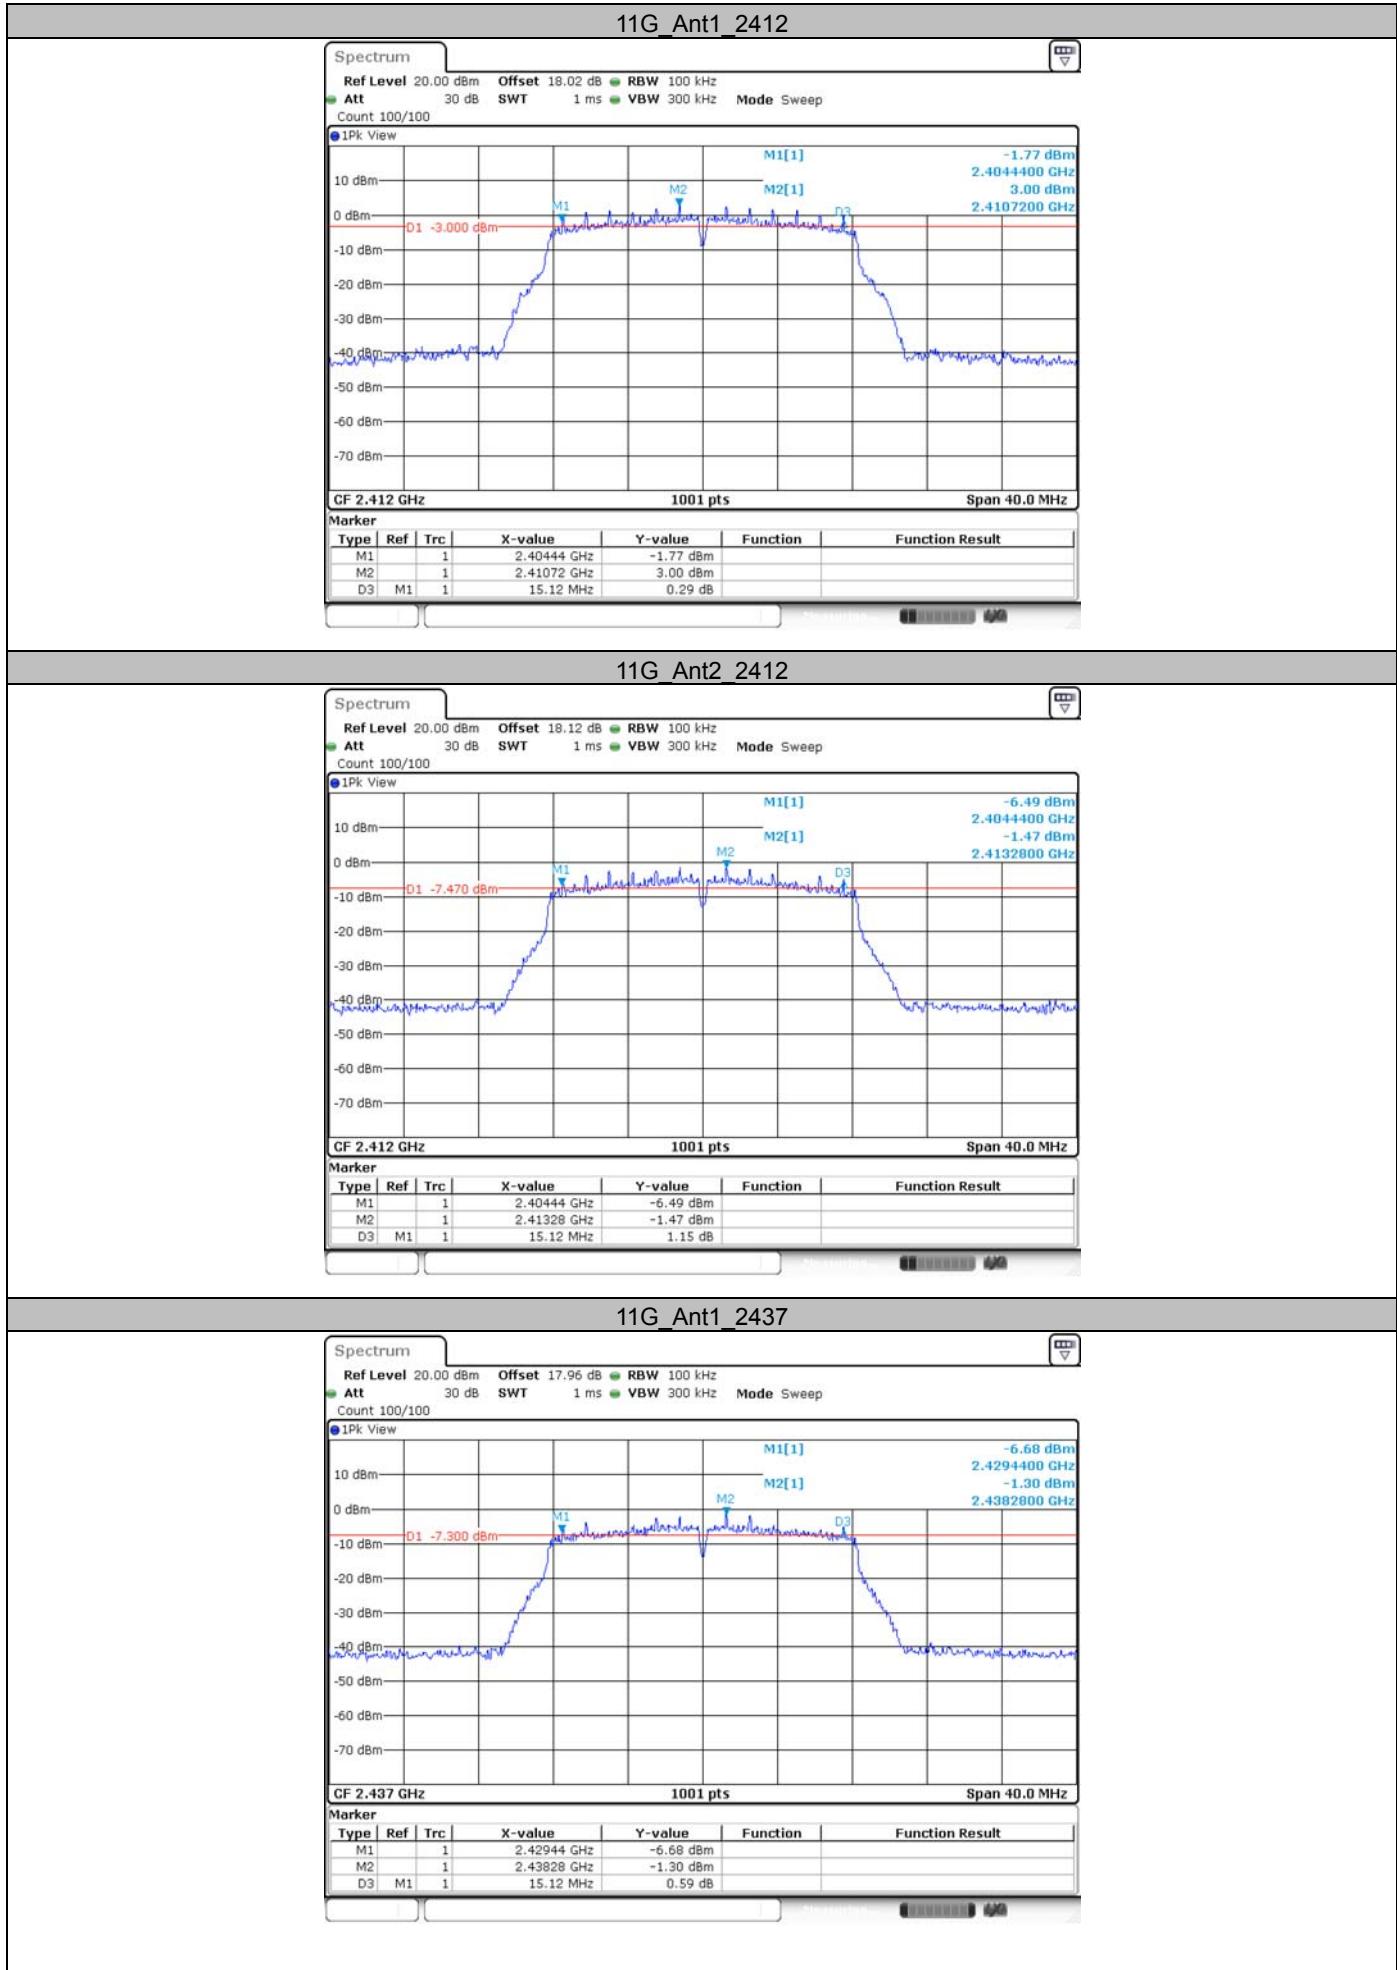


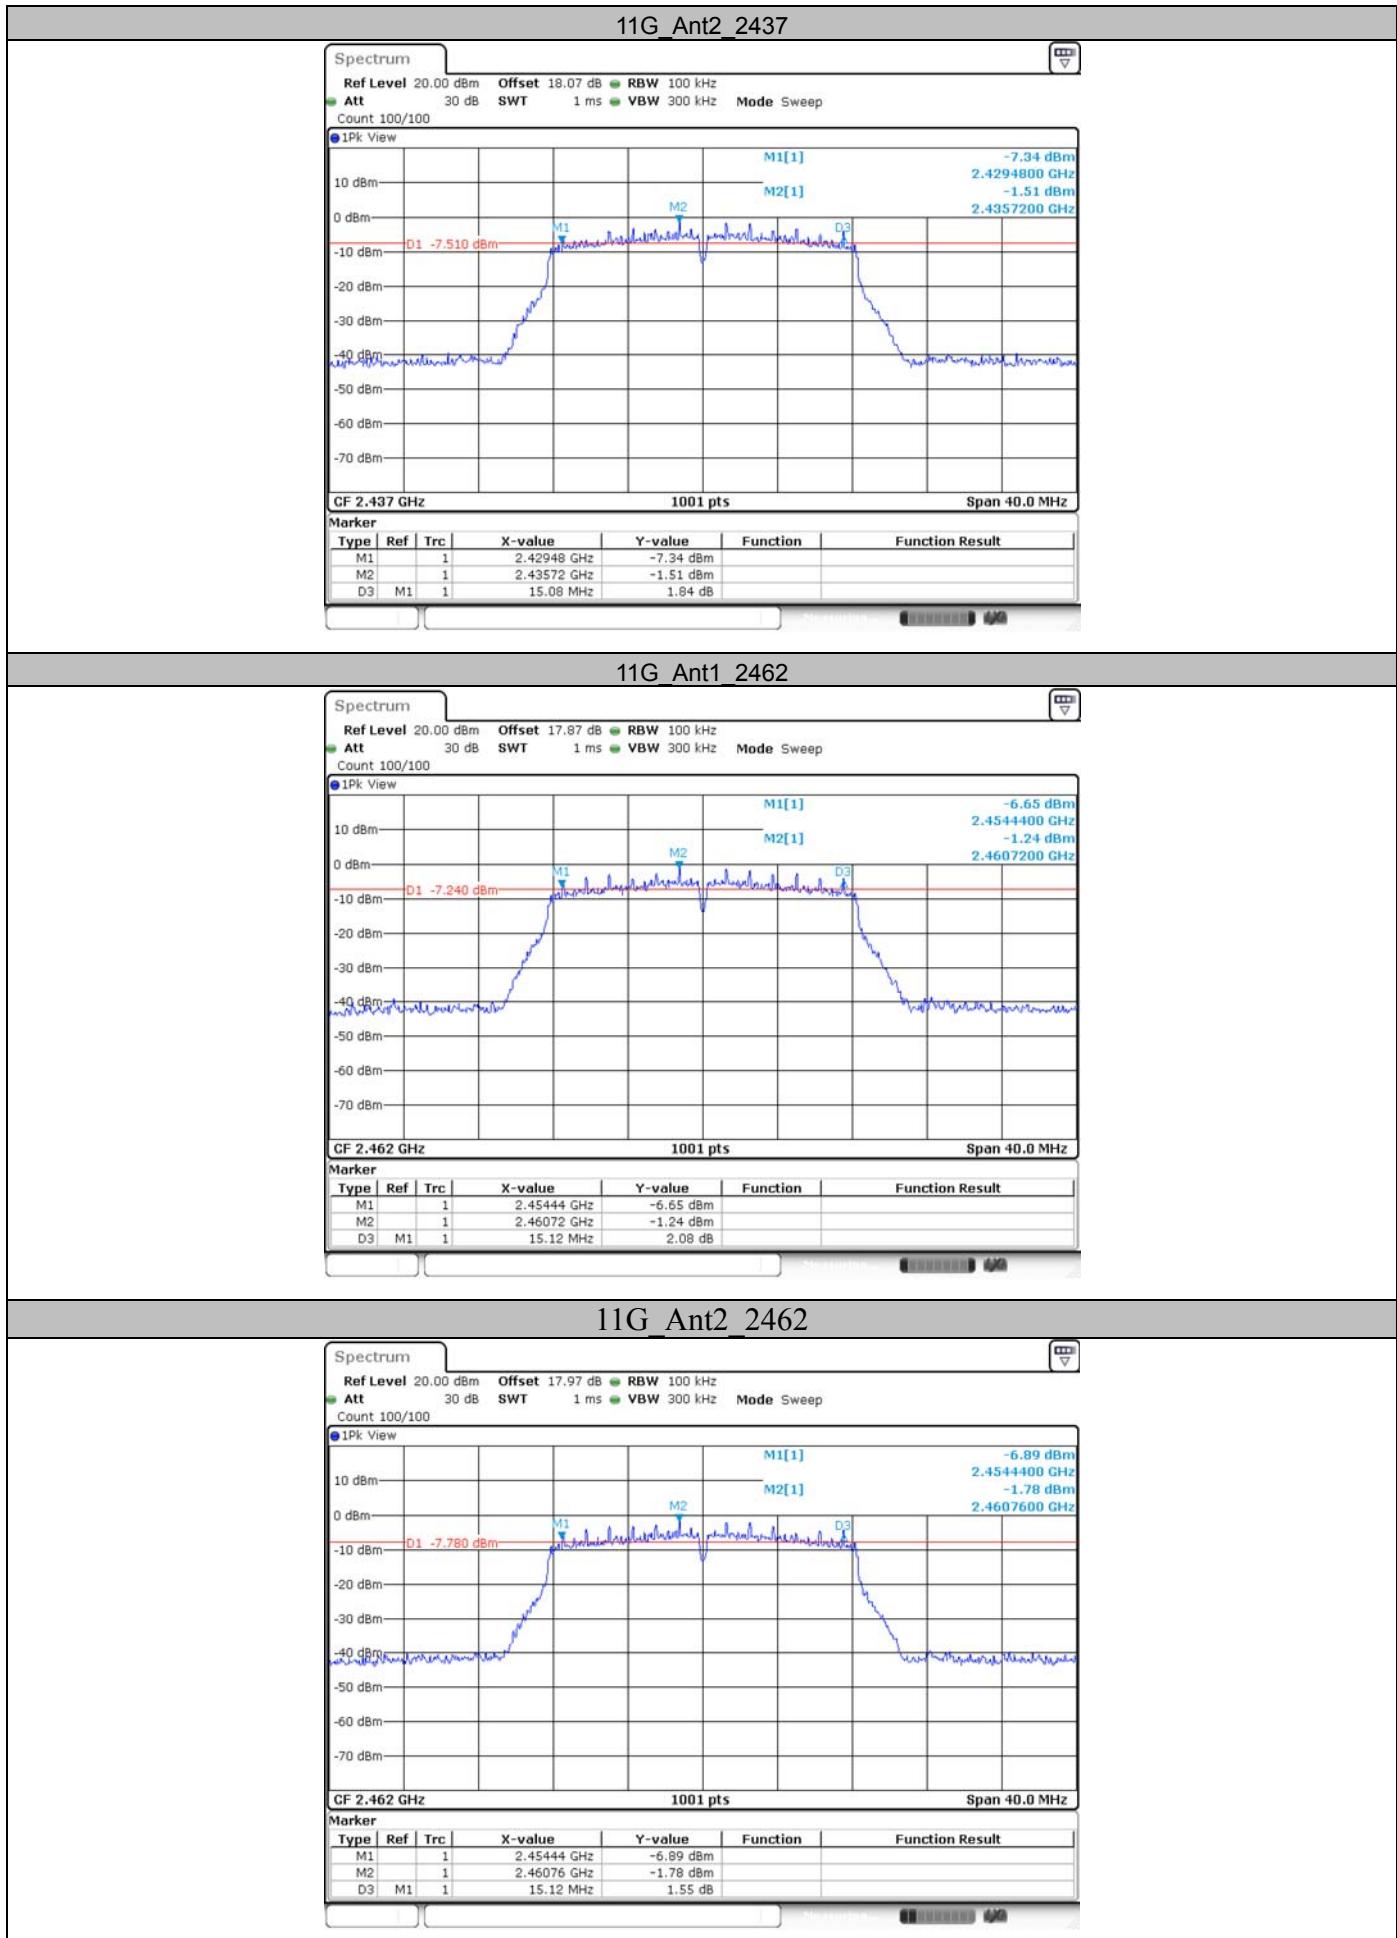

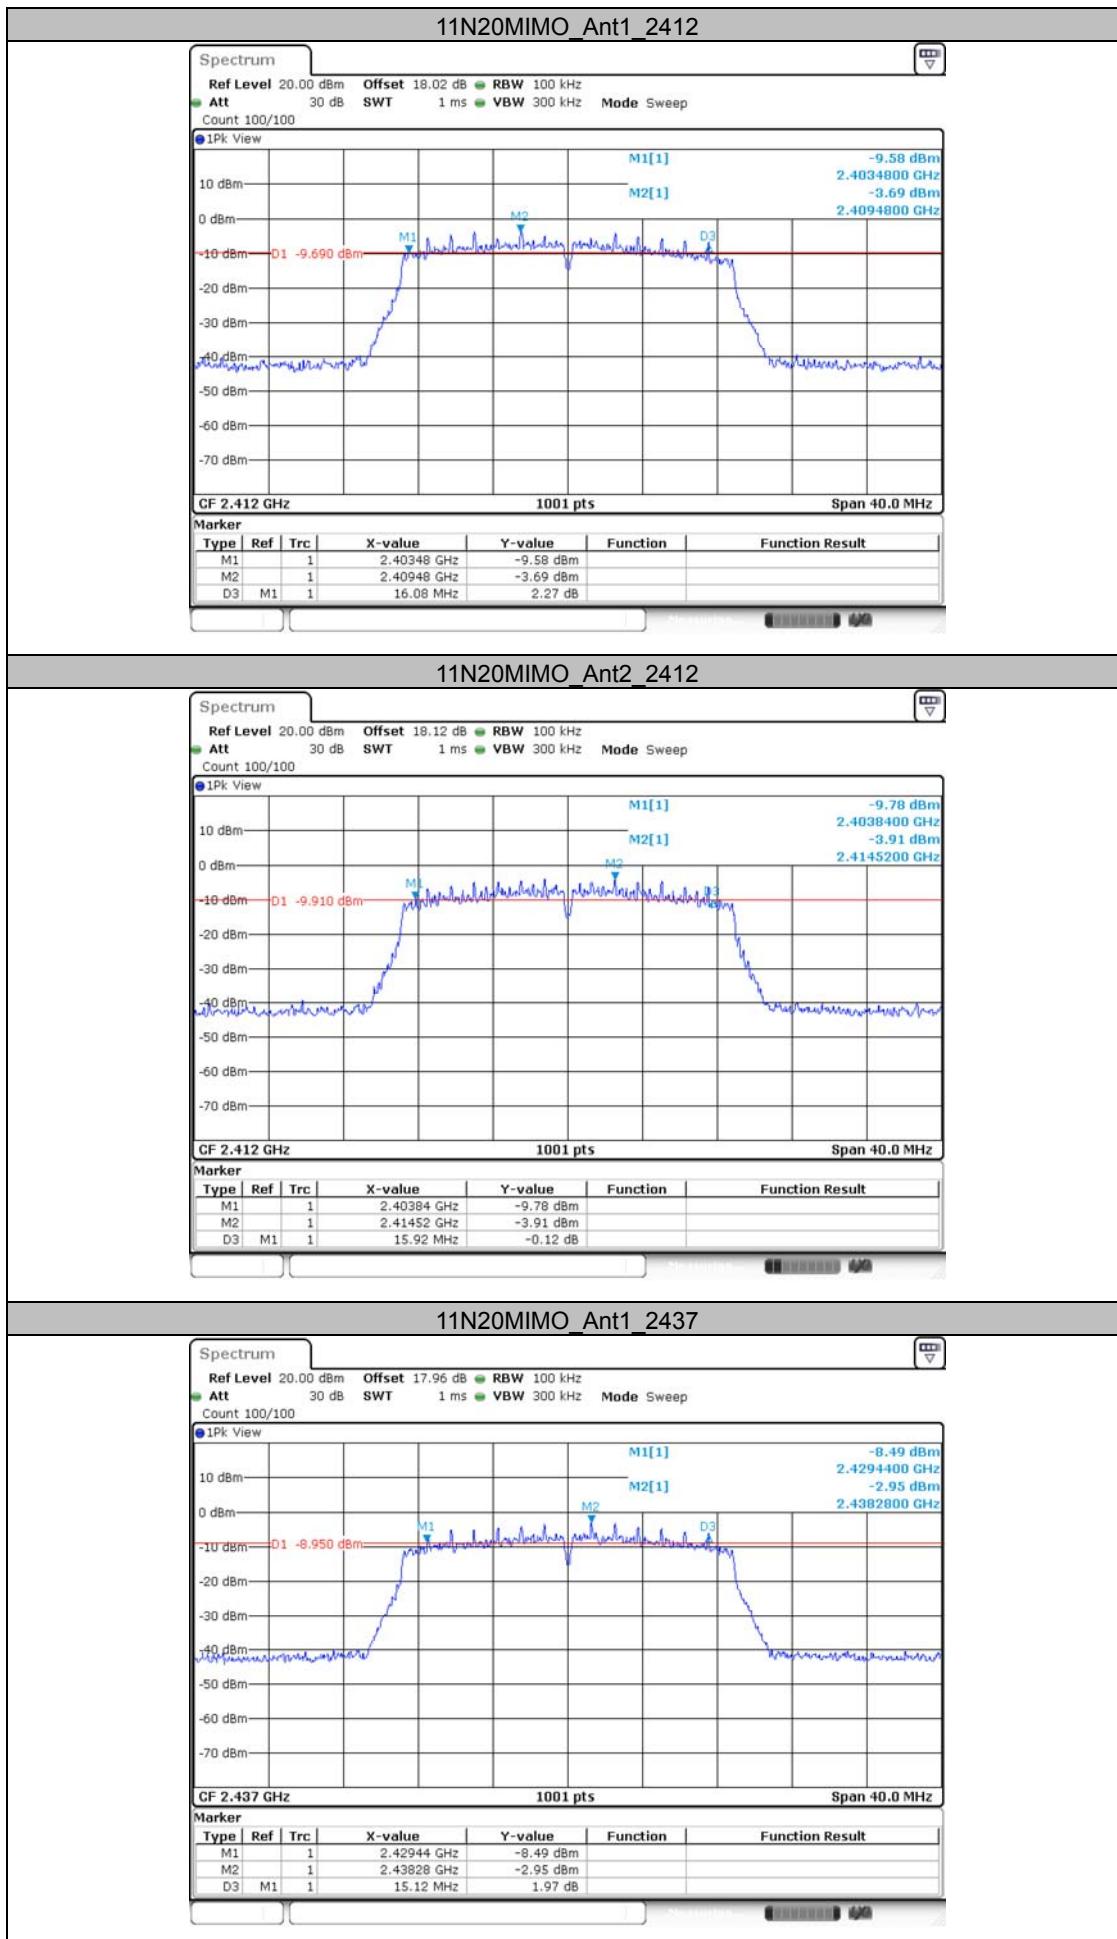

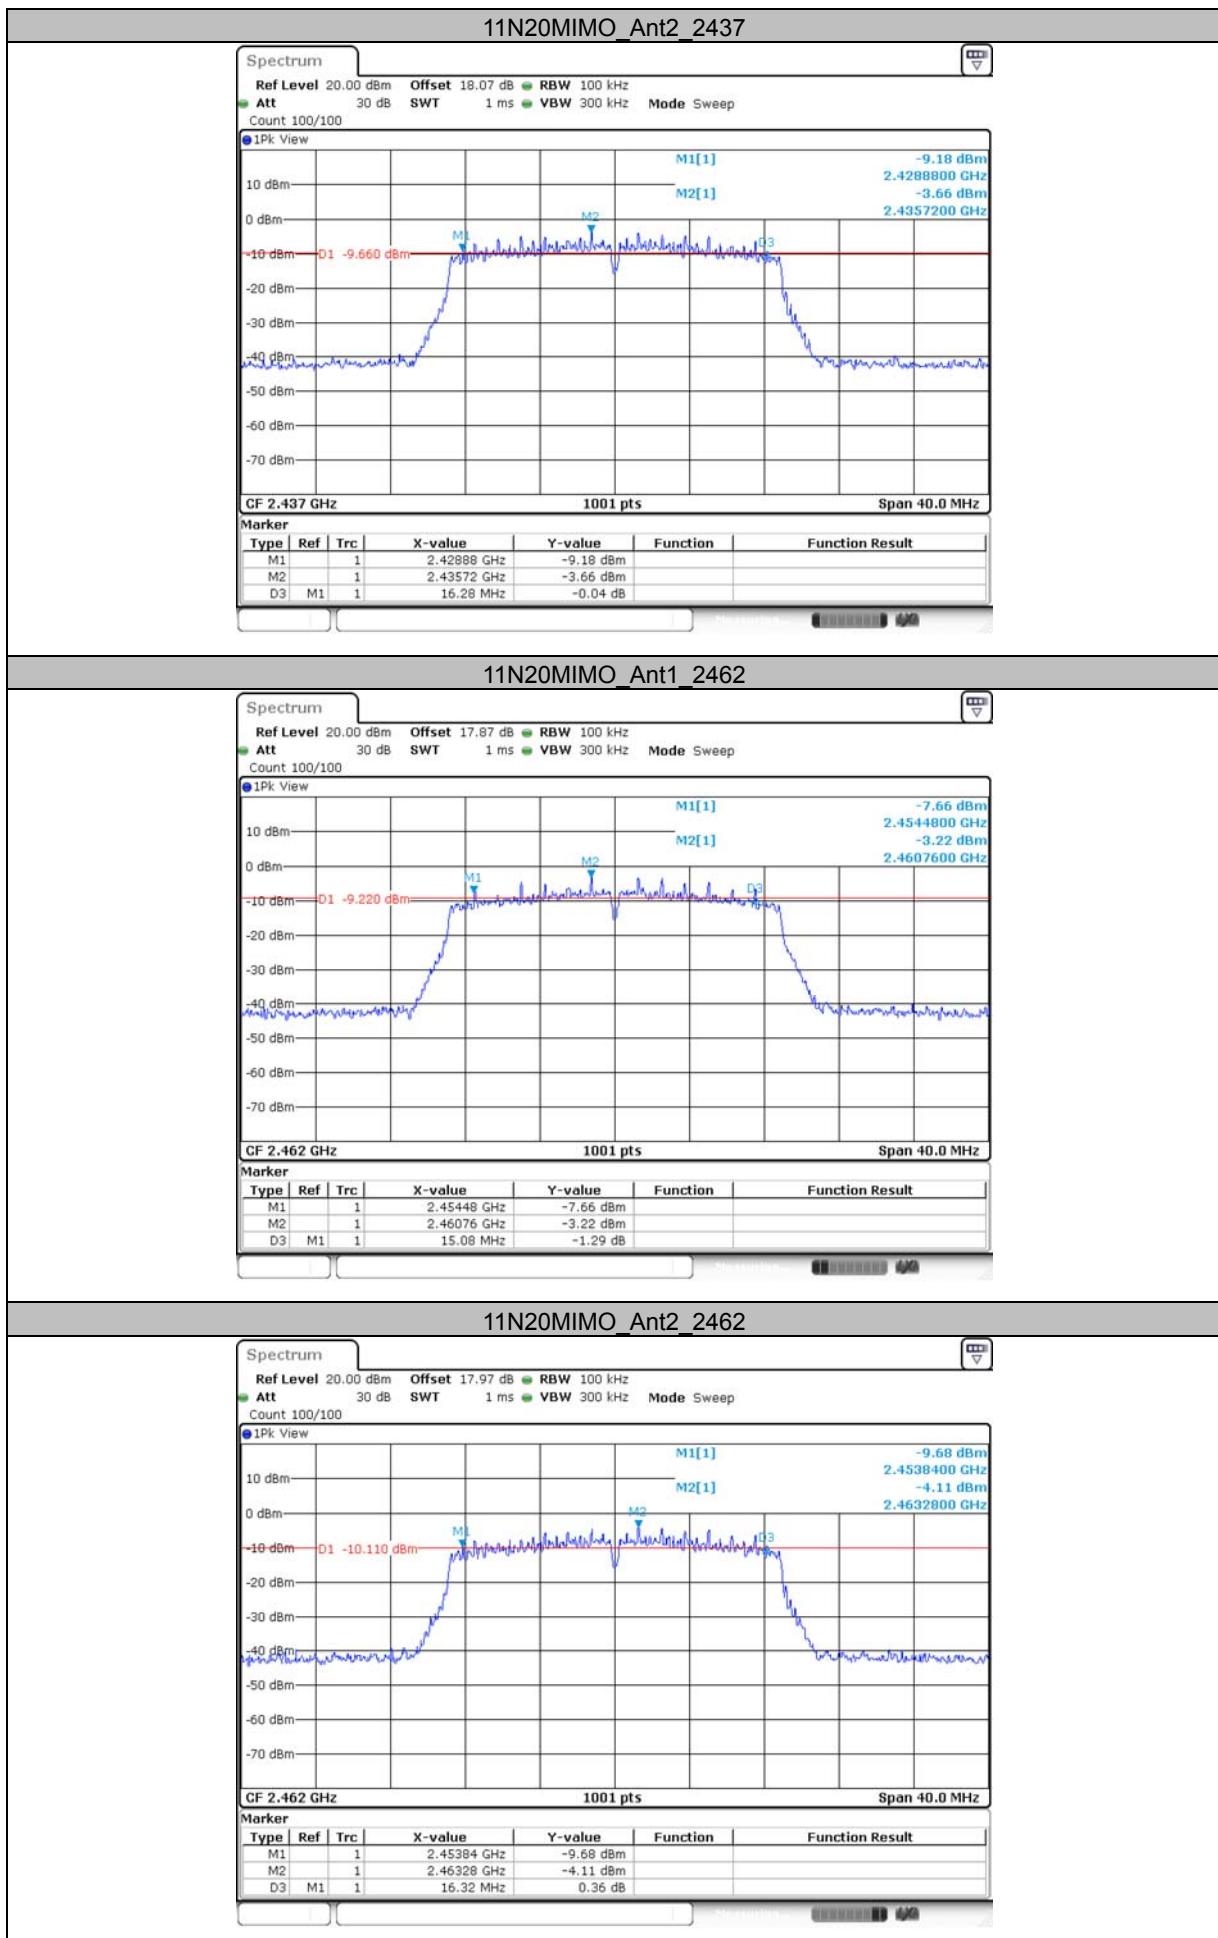

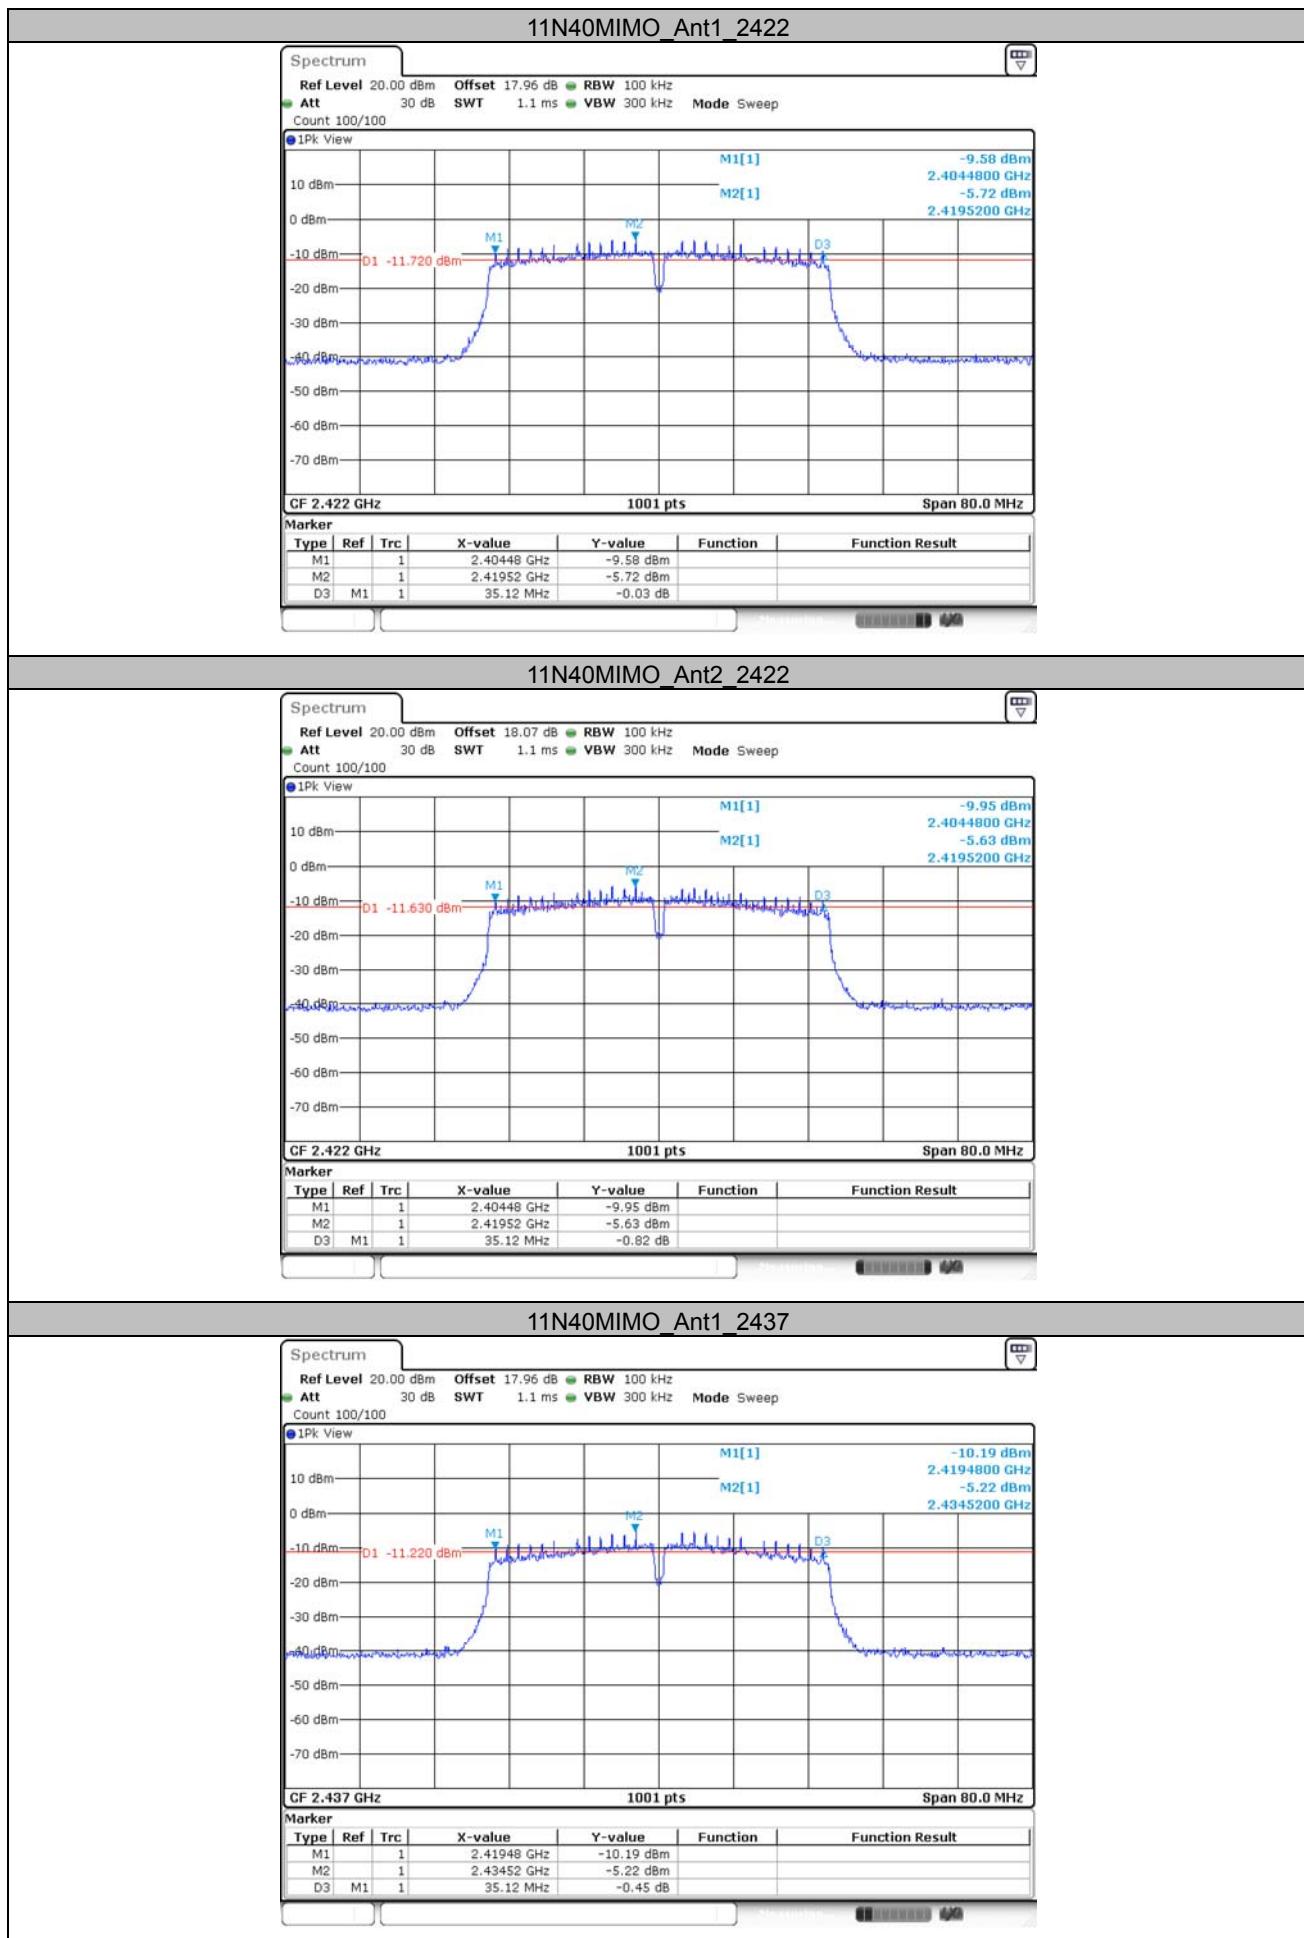


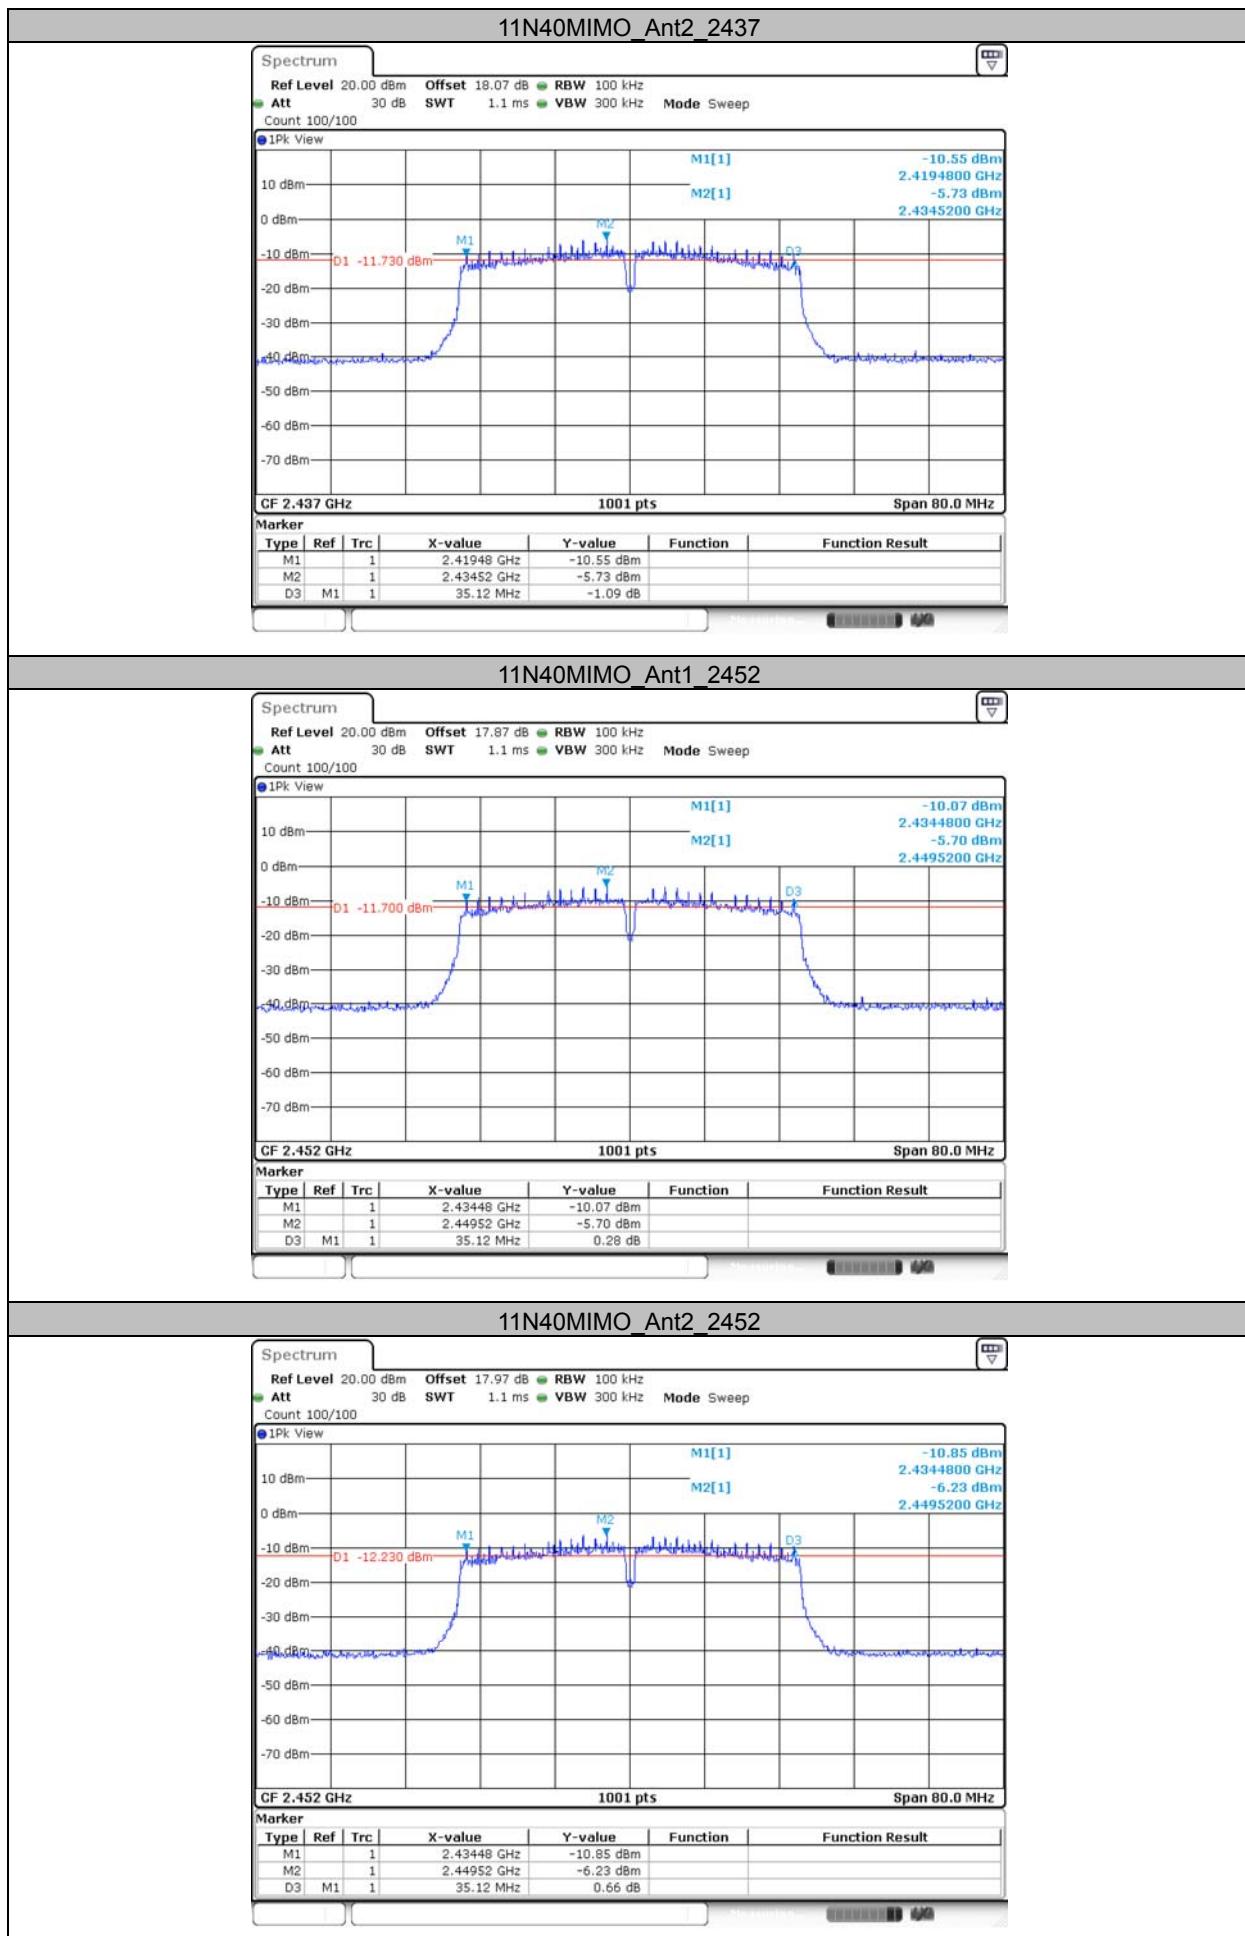



**Appendix C: Maximum conducted output power
Test Result Peak**


Test Mode	Antenna	Frequency [MHz]	Peak Power[dBm]	Conducted Limit[dBm]	Verdict
11B	Ant1	2412	16.70	≤30.00	PASS
	Ant2	2412	16.30	≤30.00	PASS
	Ant1	2437	16.69	≤30.00	PASS
	Ant2	2437	16.37	≤30.00	PASS
	Ant1	2462	16.55	≤30.00	PASS
	Ant2	2462	15.80	≤30.00	PASS
11G	Ant1	2412	17.40	≤30.00	PASS
	Ant2	2412	17.11	≤30.00	PASS
	Ant1	2437	17.19	≤30.00	PASS
	Ant2	2437	16.99	≤30.00	PASS
	Ant1	2462	17.07	≤30.00	PASS
	Ant2	2462	16.70	≤30.00	PASS
11N20MIMO	Ant1	2412	15.32	≤30.00	PASS
	Ant2	2412	15.33	≤30.00	PASS
	total	2412	18.34	29.68	PASS
	Ant1	2437	15.13	≤30.00	PASS
	Ant2	2437	15.23	≤30.00	PASS
	total	2437	18.19	29.68	PASS
	Ant1	2462	14.82	≤30.00	PASS
	Ant2	2462	14.85	≤30.00	PASS
	total	2462	17.85	29.68	PASS
11N40MIMO	Ant1	2422	15.26	≤30.00	PASS
	Ant2	2422	15.35	≤30.00	PASS
	total	2422	18.32	29.68	PASS
	Ant1	2437	15.35	≤30.00	PASS
	Ant2	2437	15.18	≤30.00	PASS
	total	2437	18.28	29.68	PASS
	Ant1	2452	15.16	≤30.00	PASS
	Ant2	2452	14.92	≤30.00	PASS
	total	2452	18.05	29.68	PASS


Test Graphs Peak

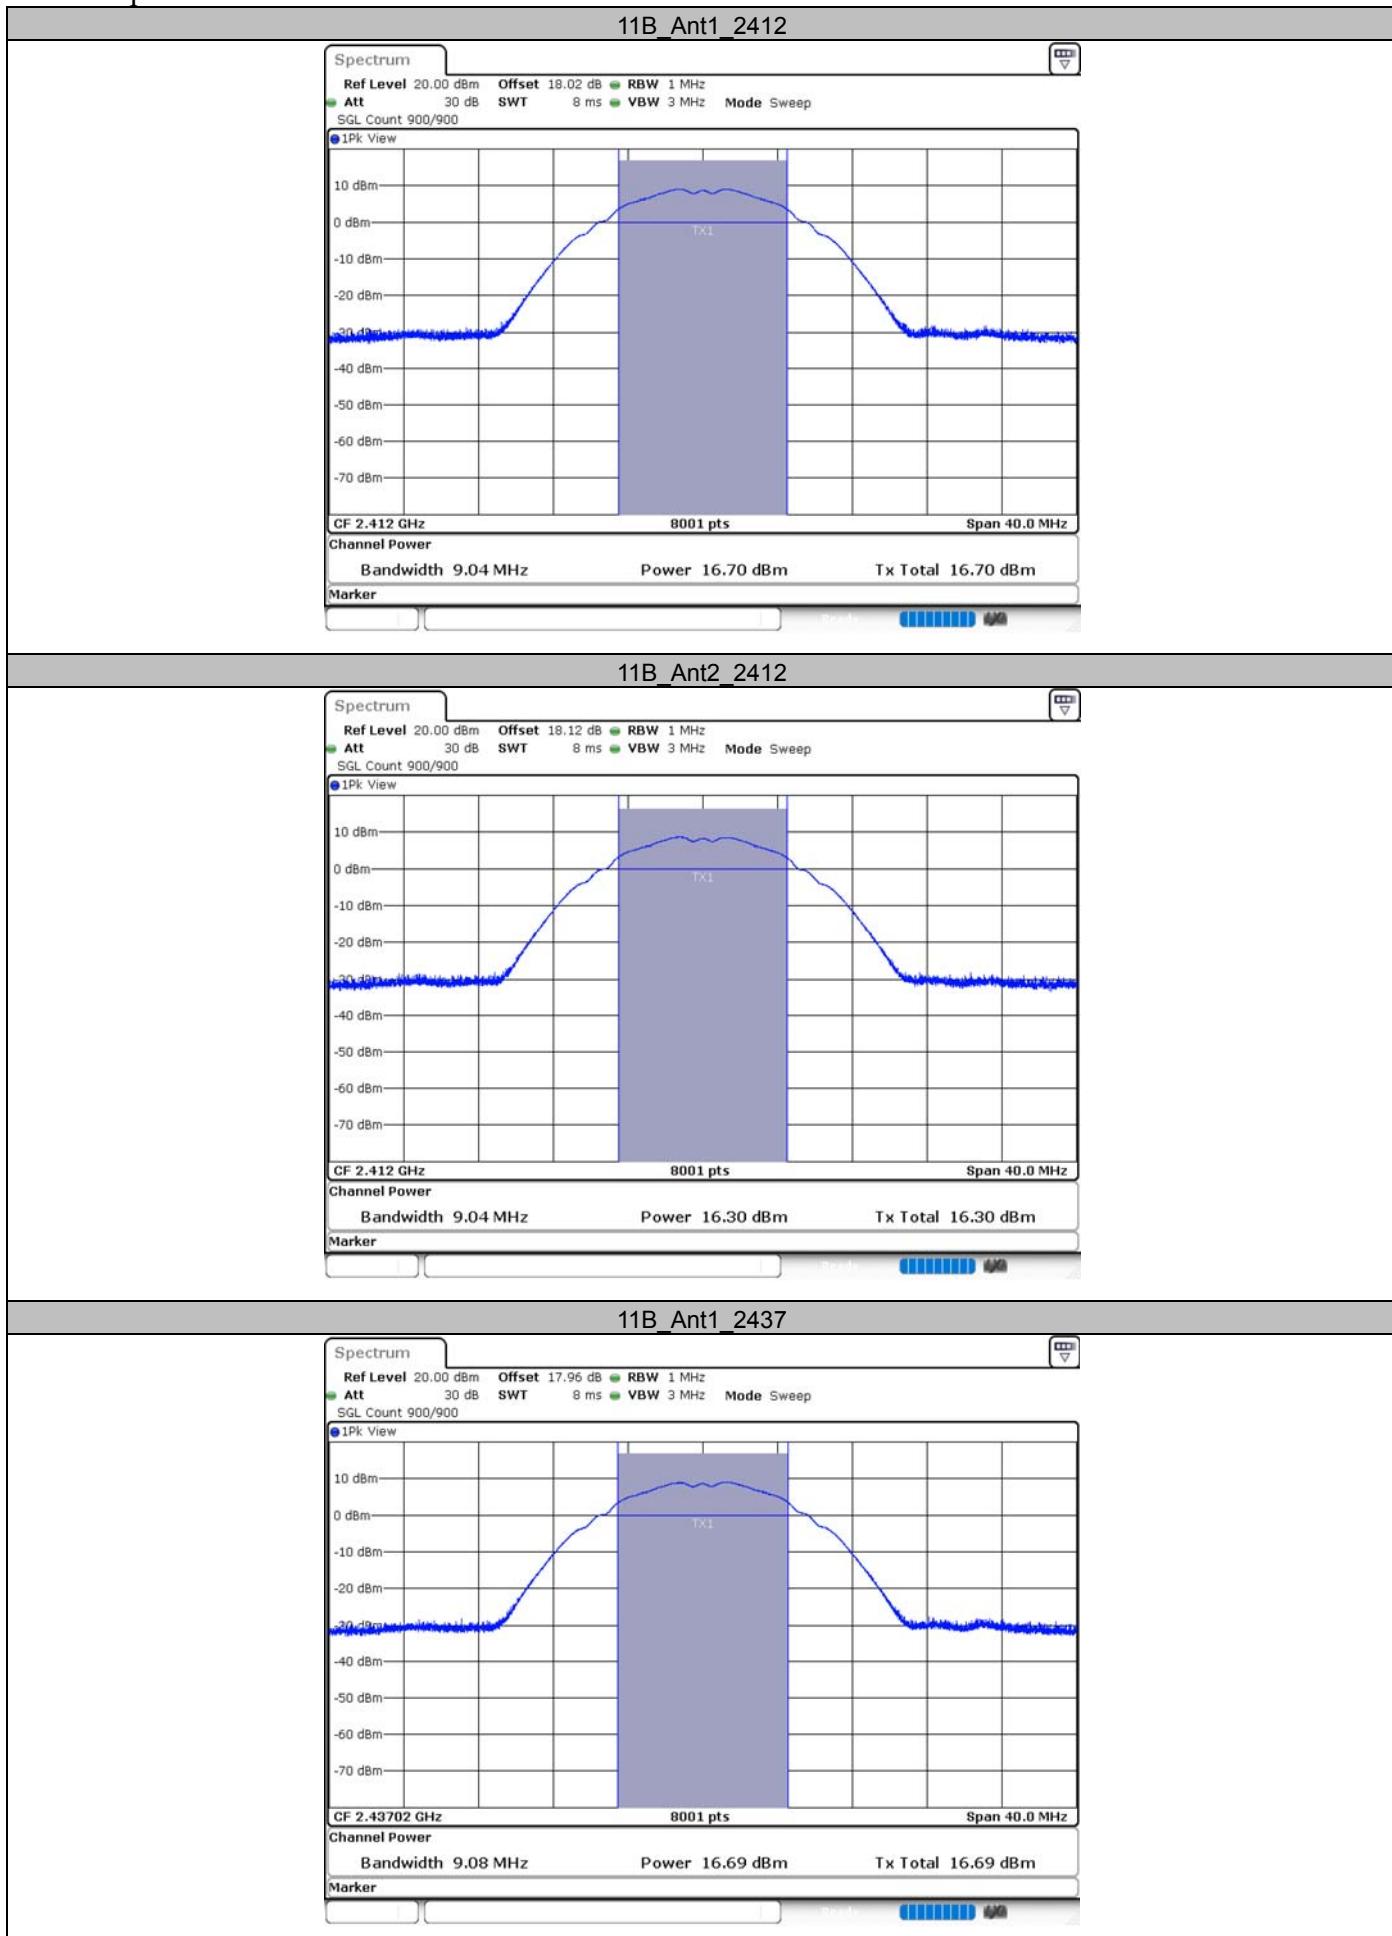


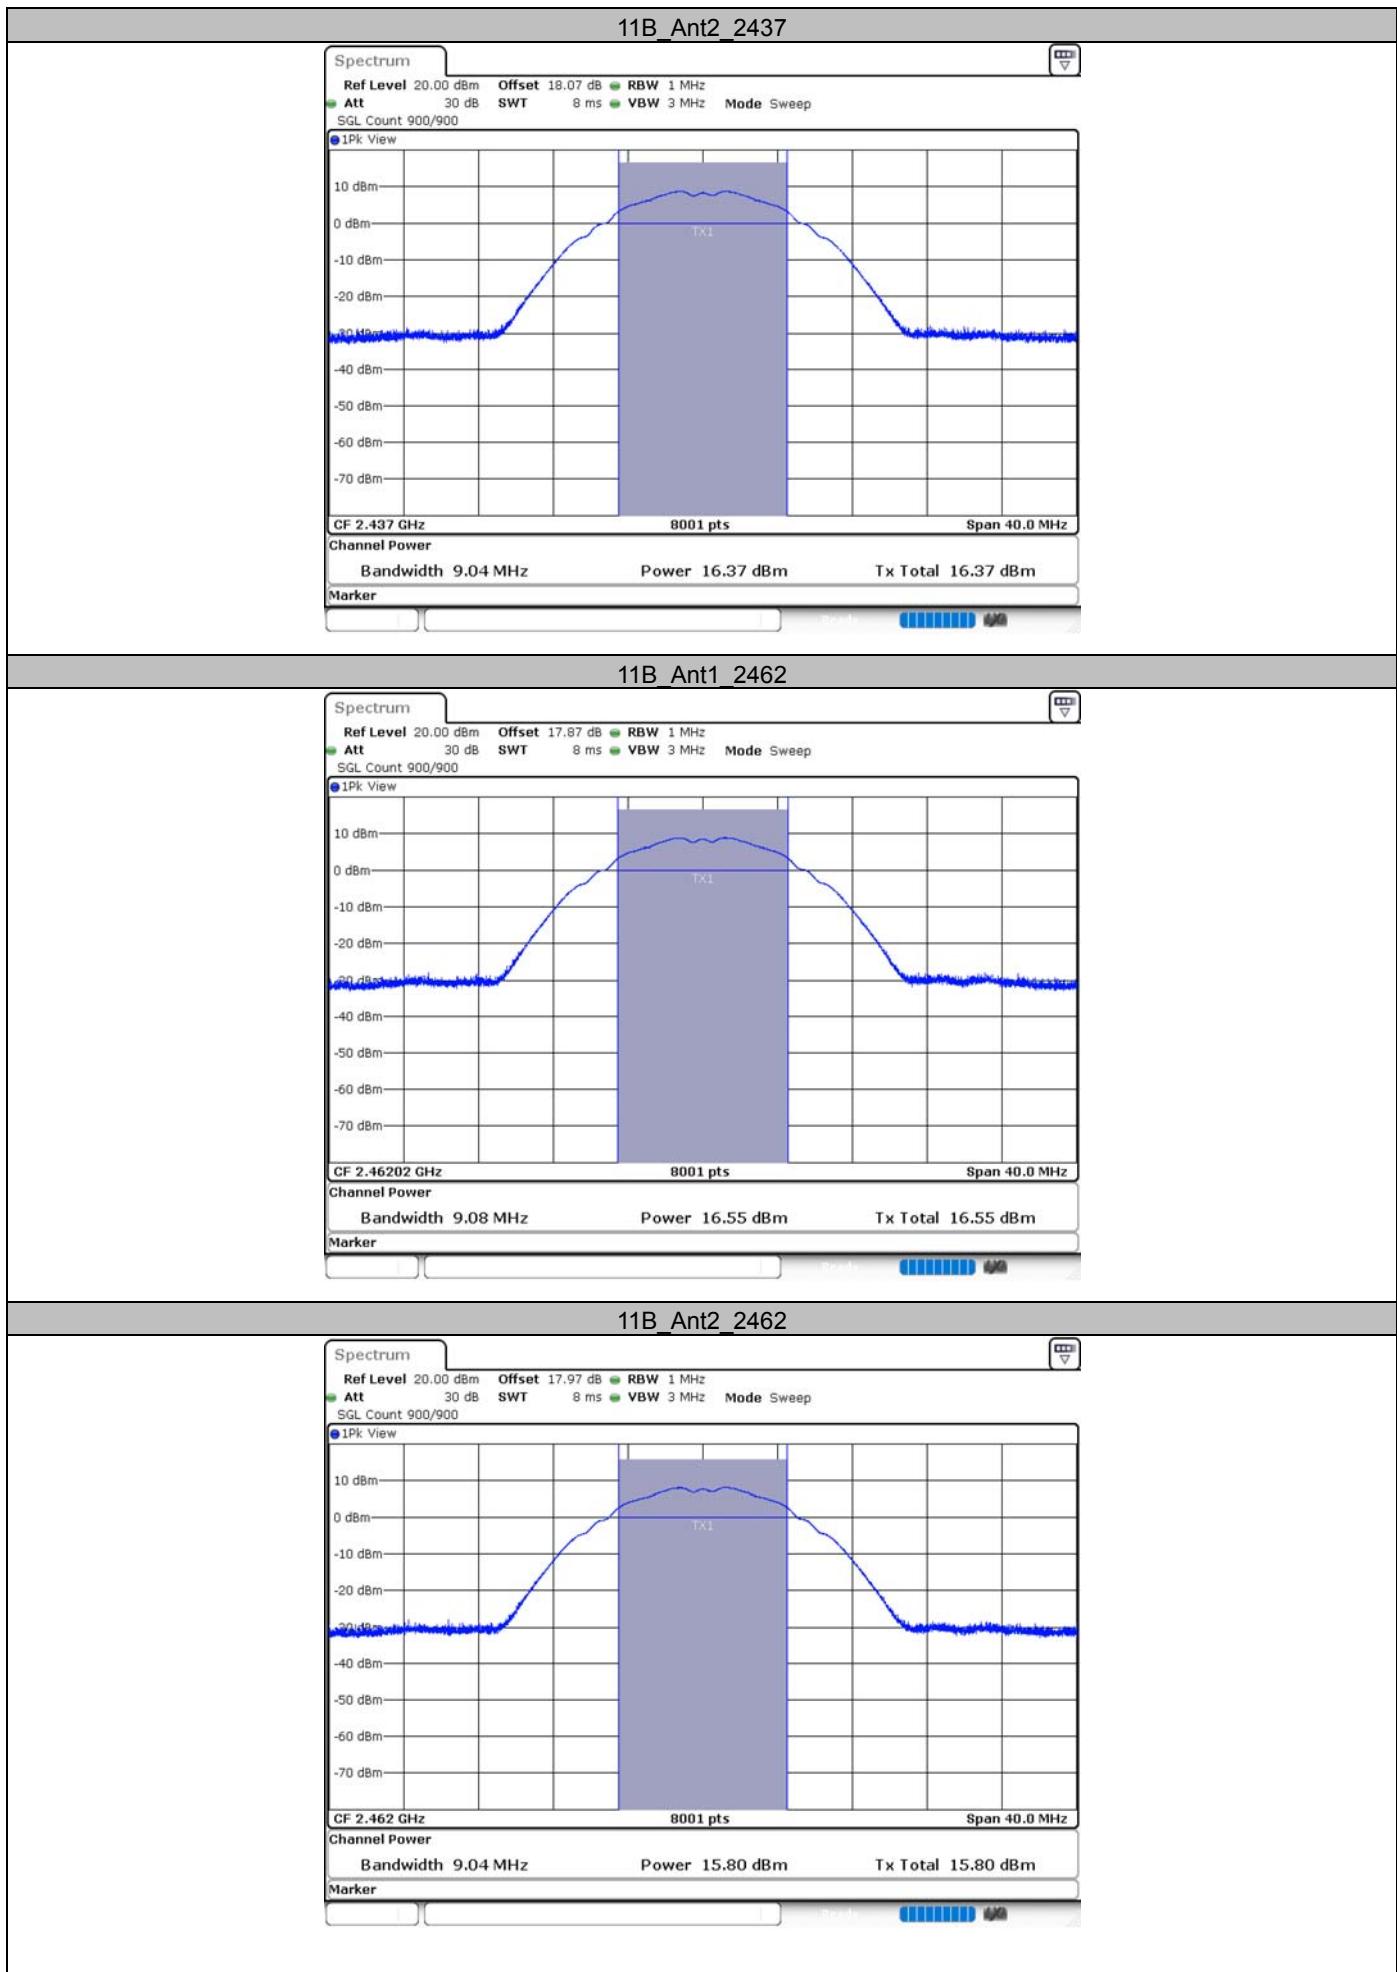


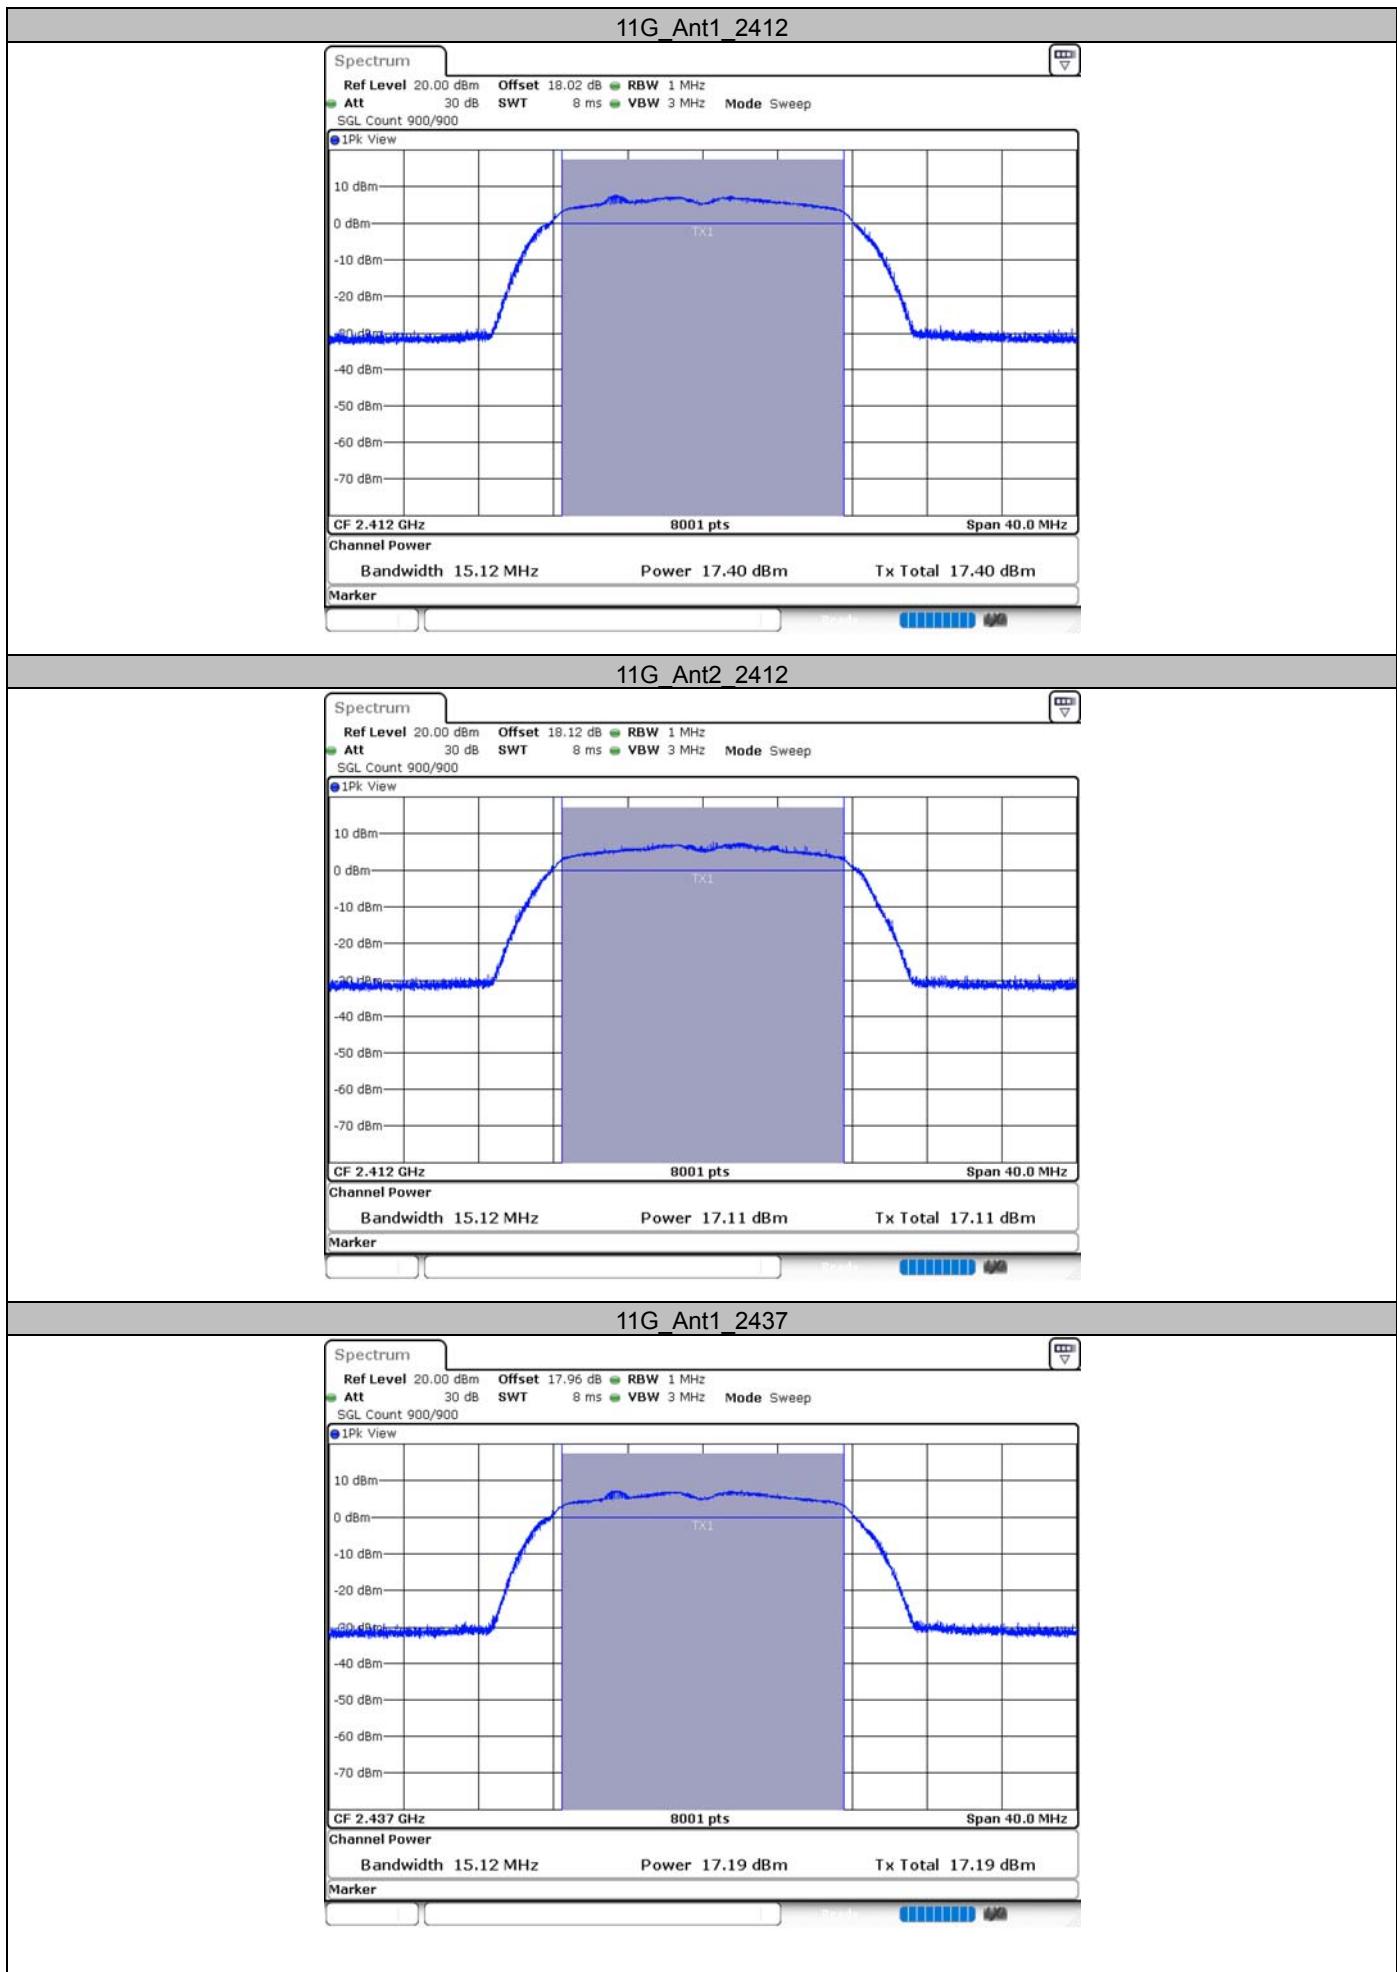


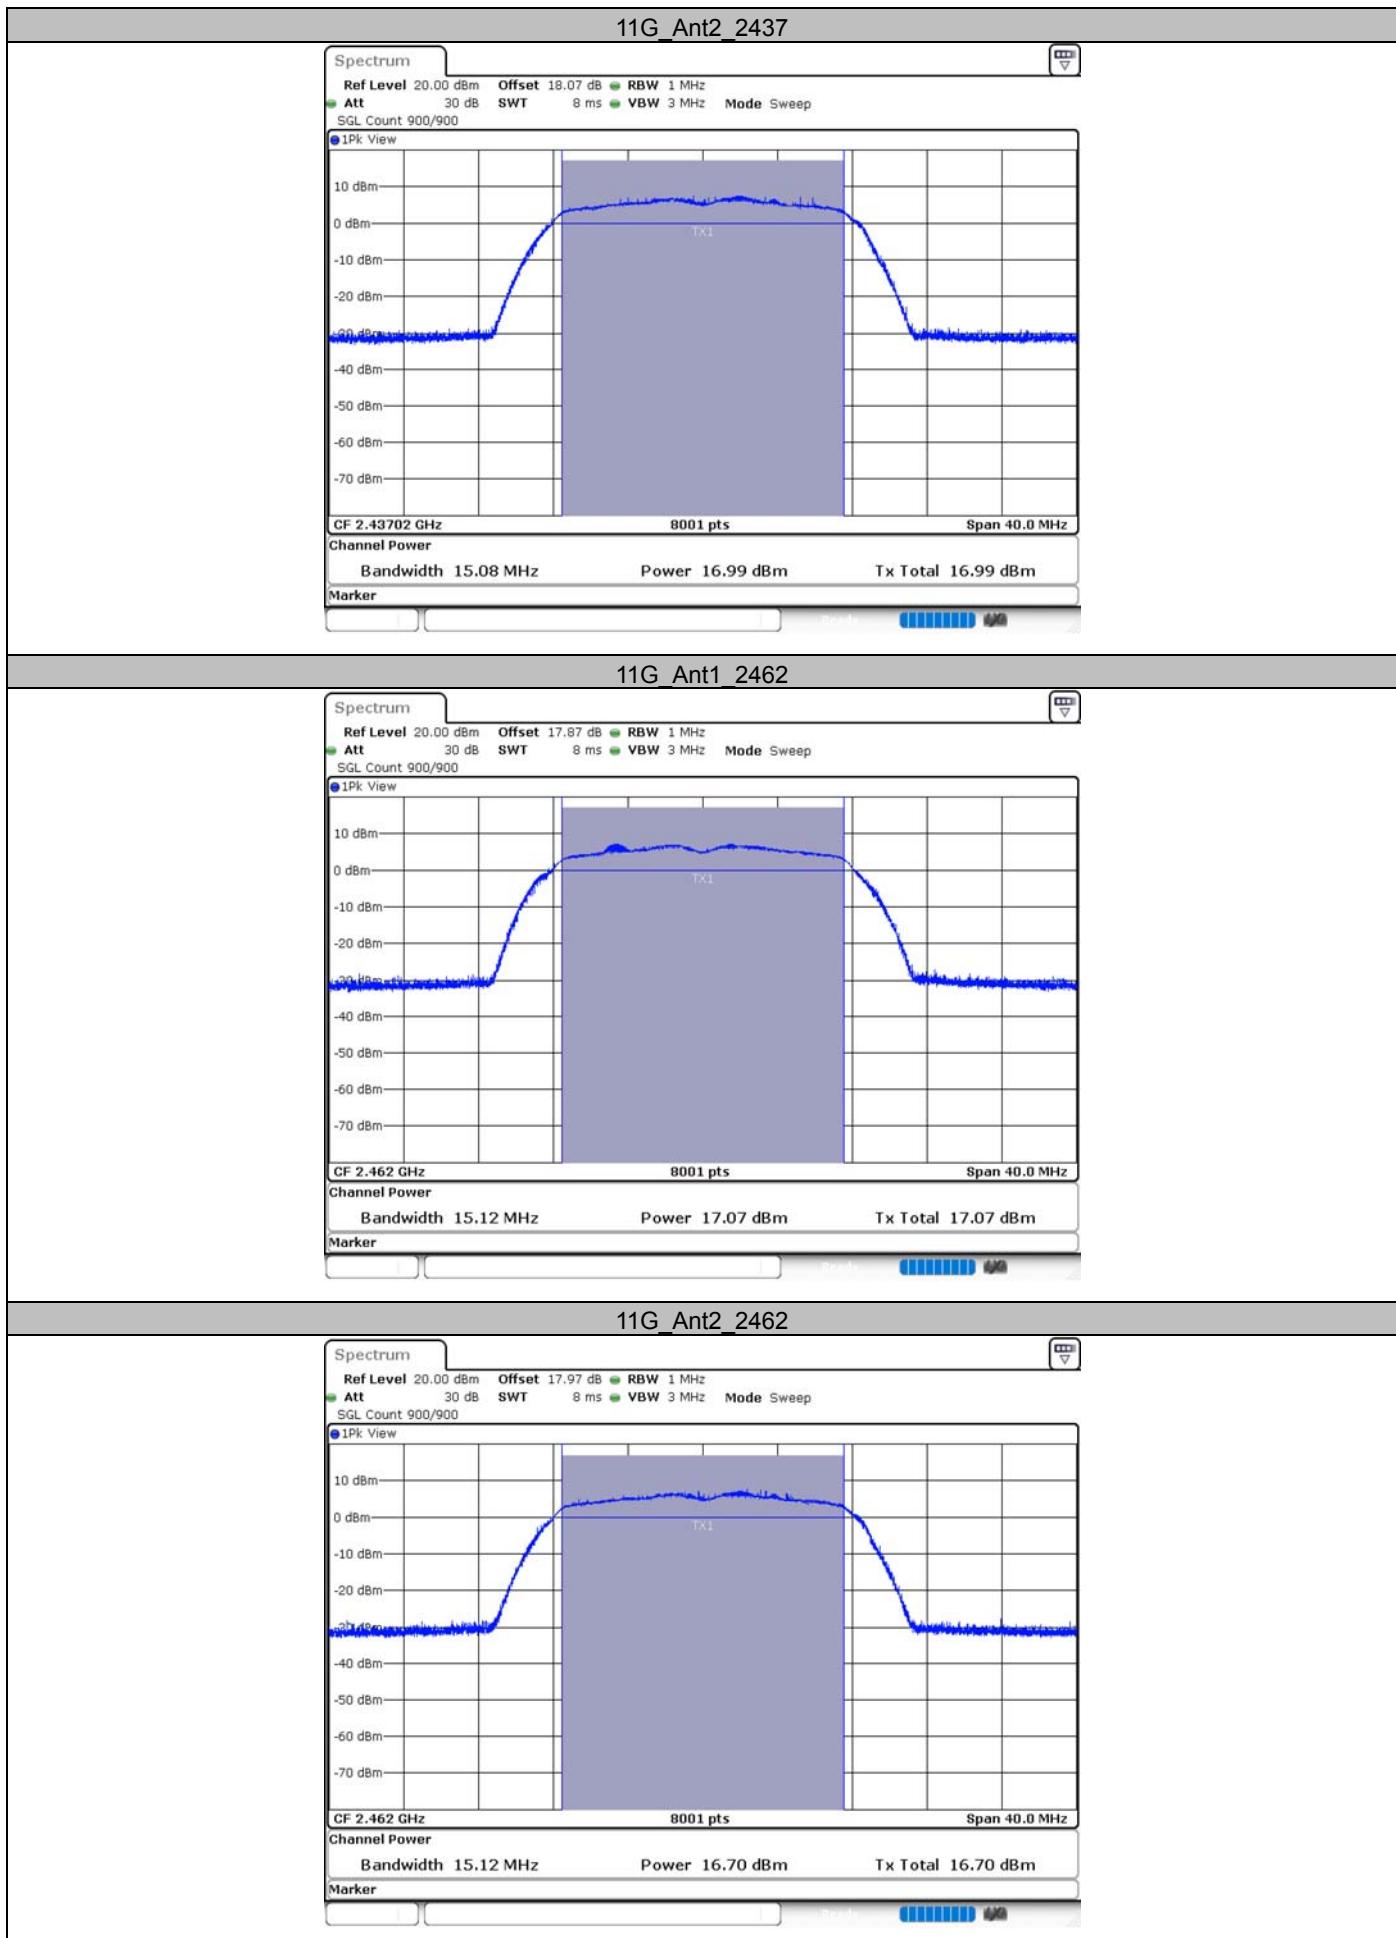

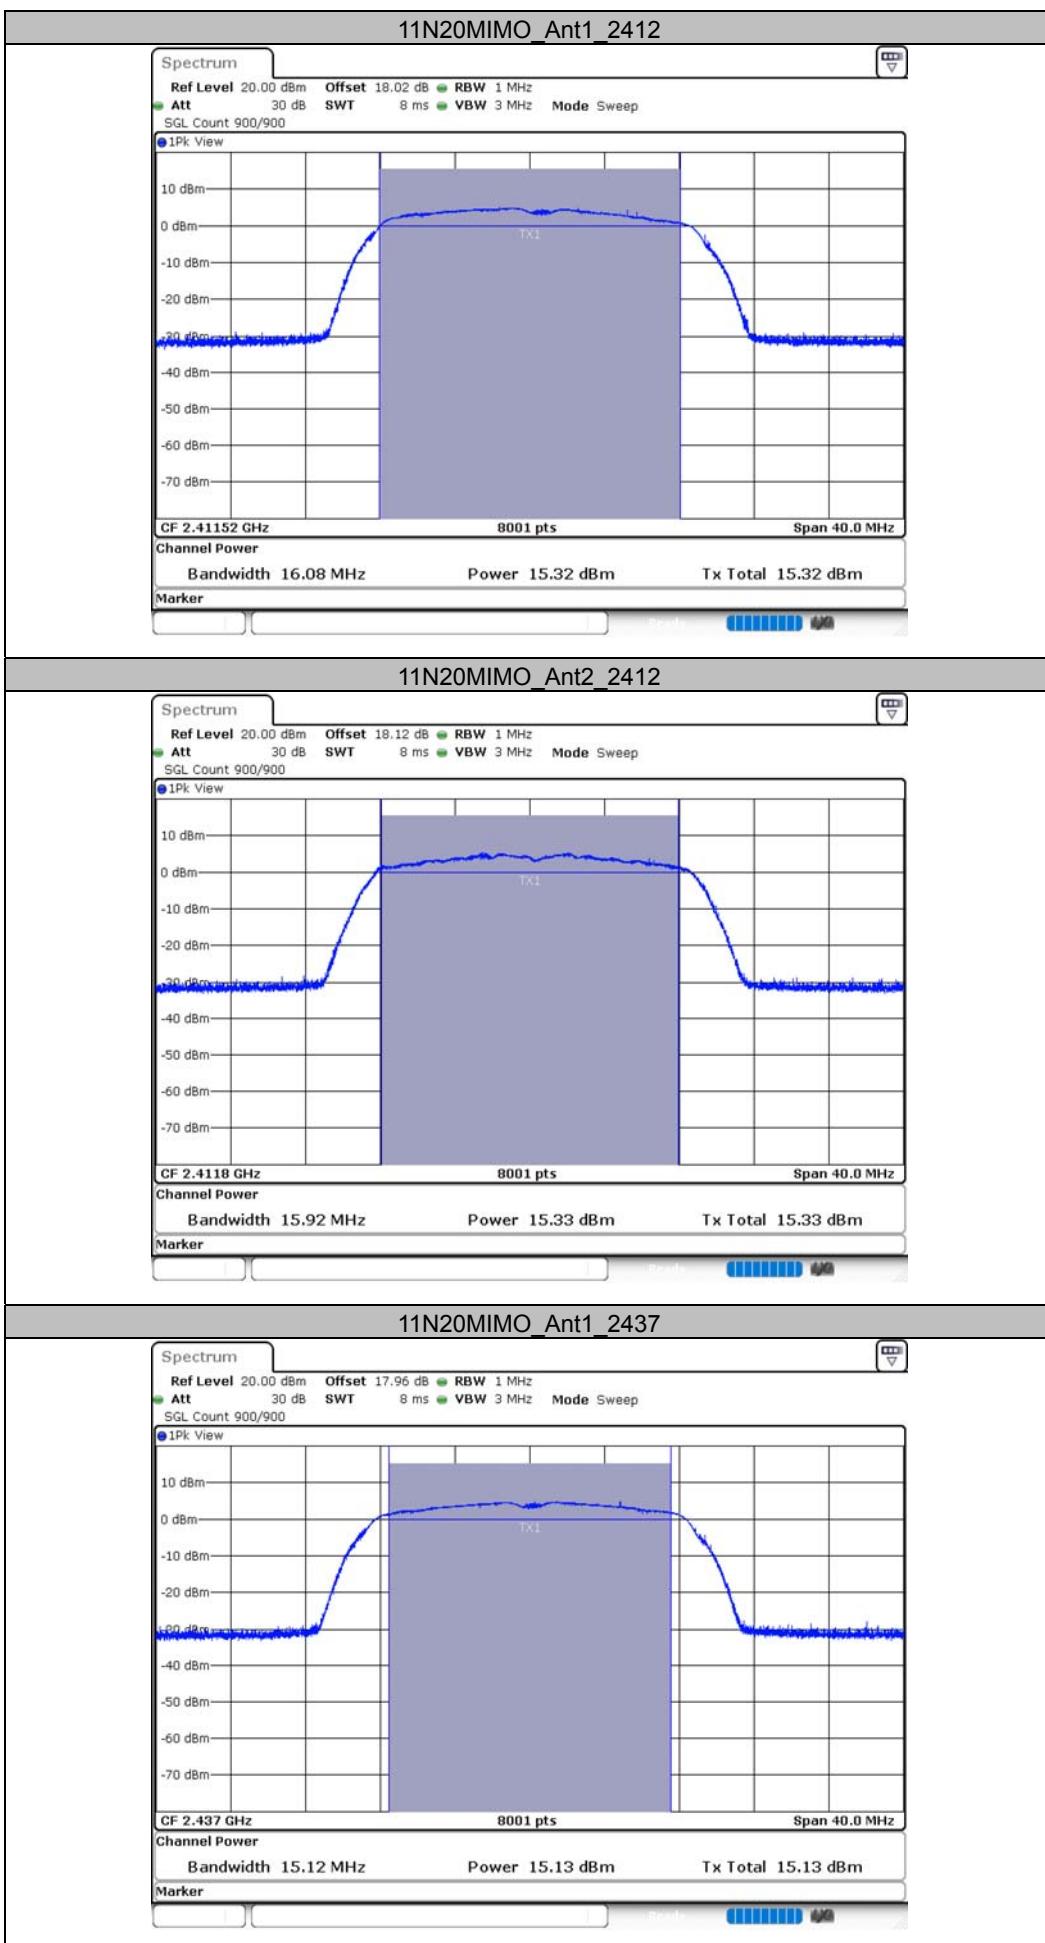

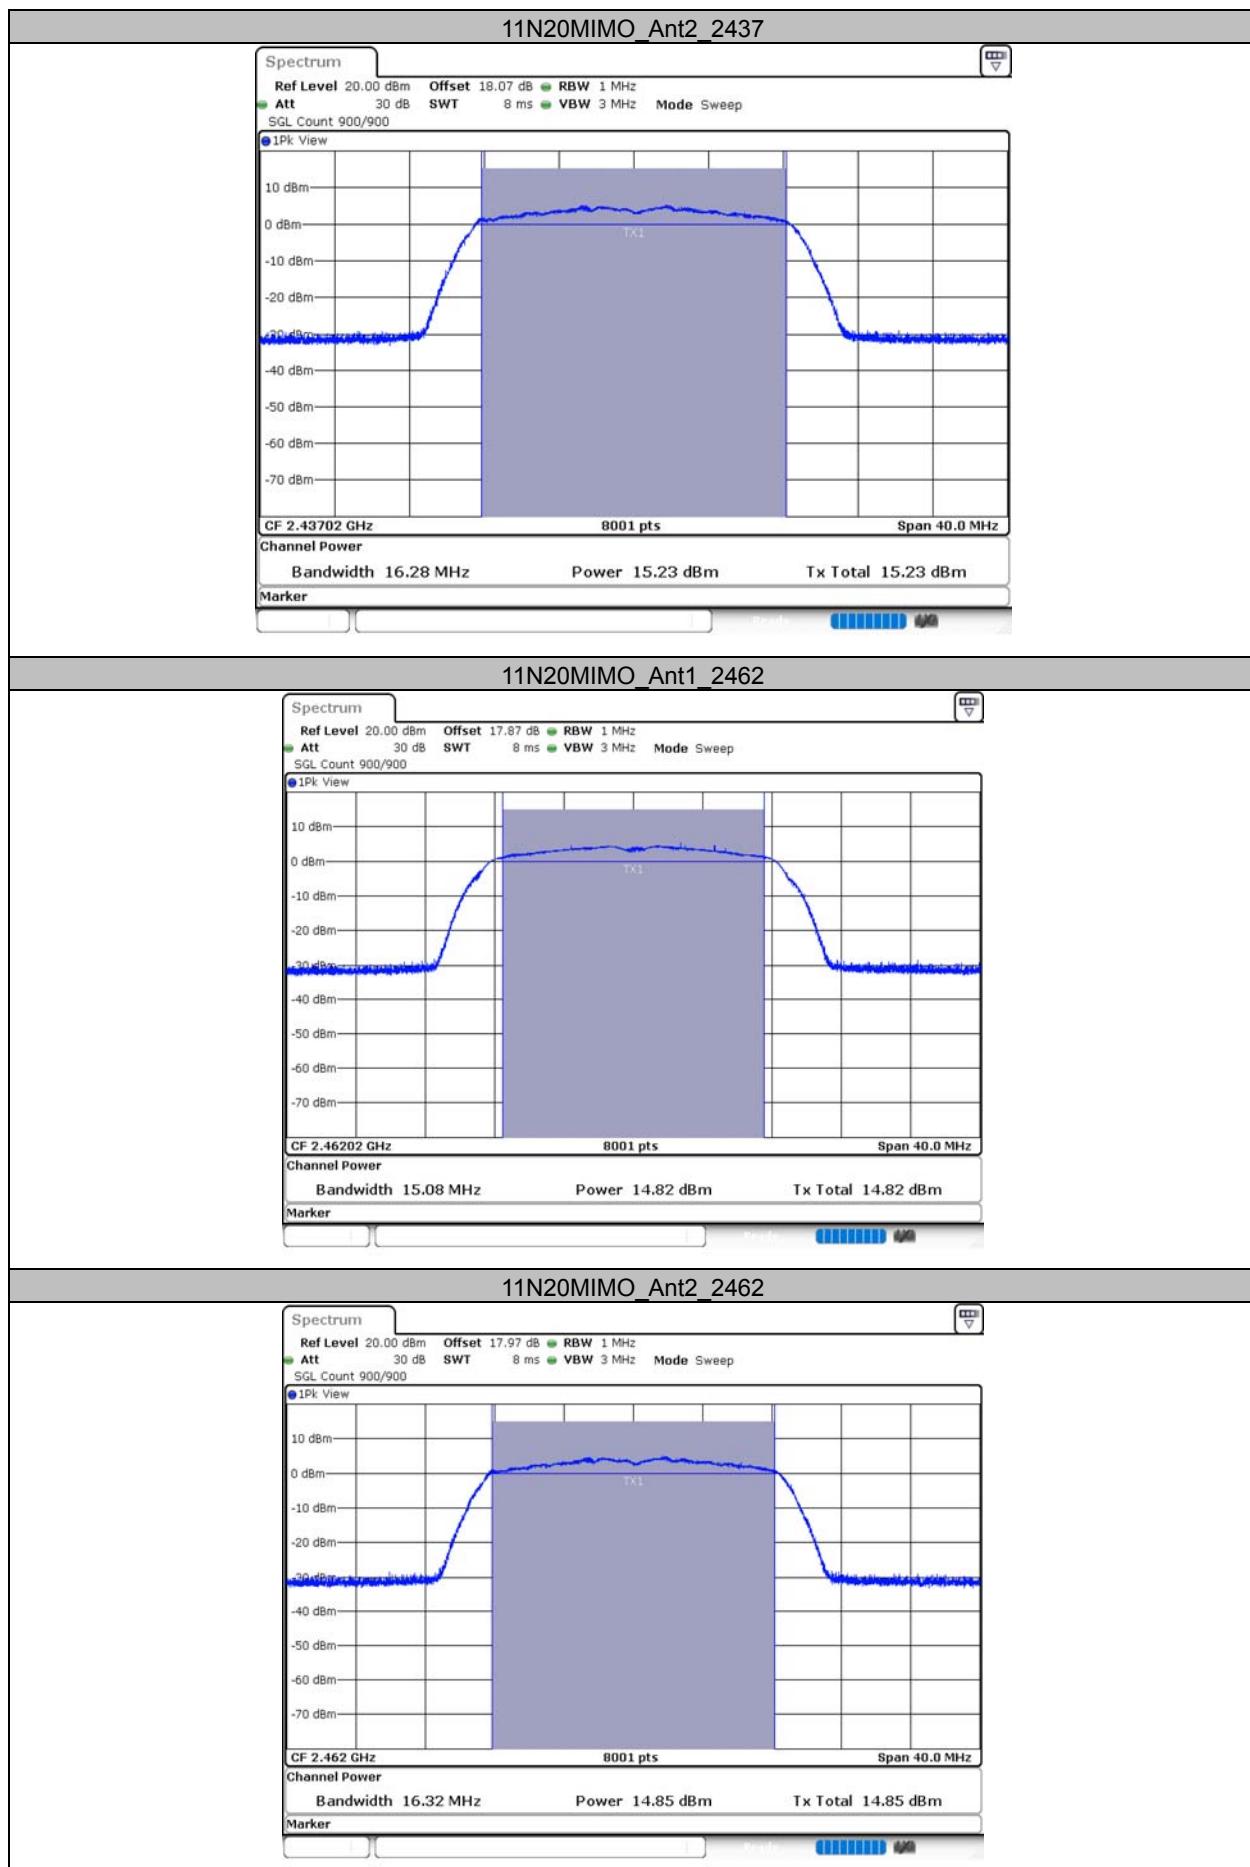

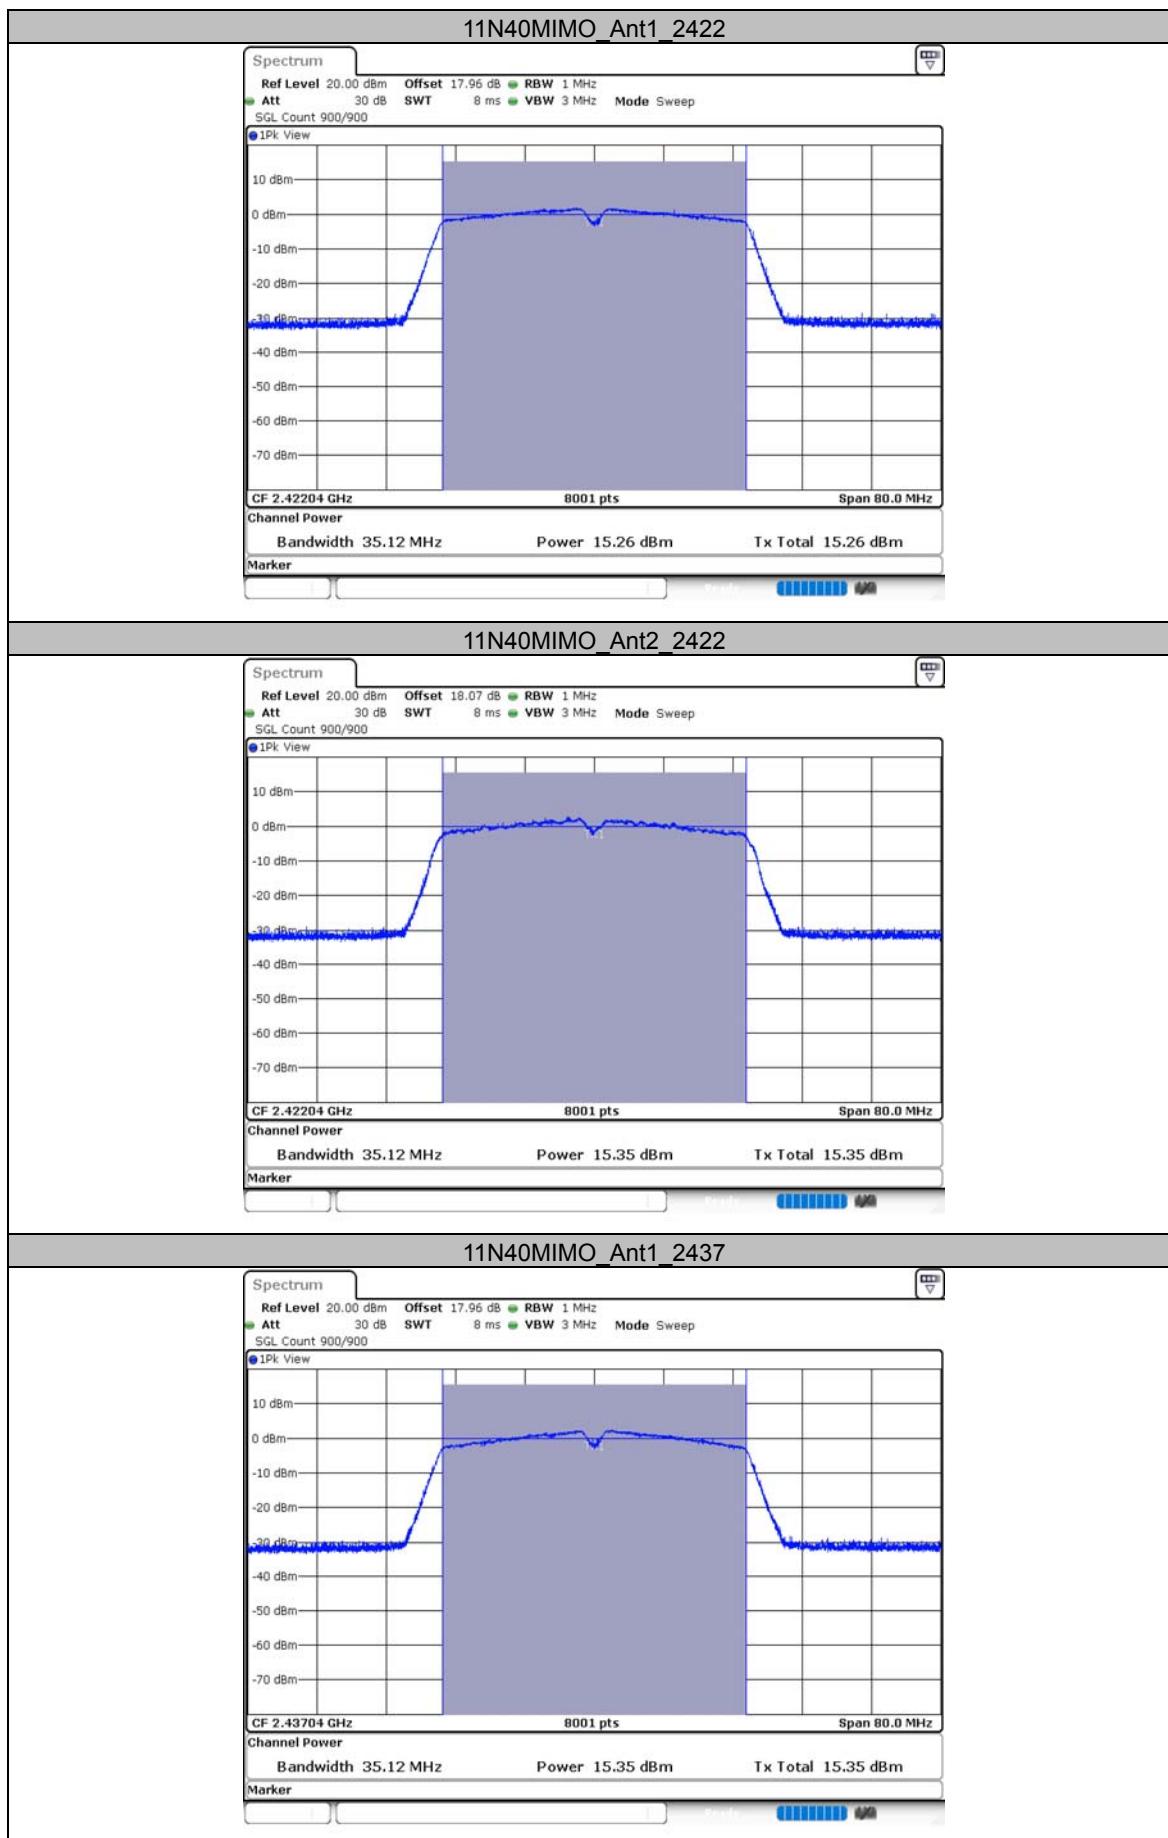

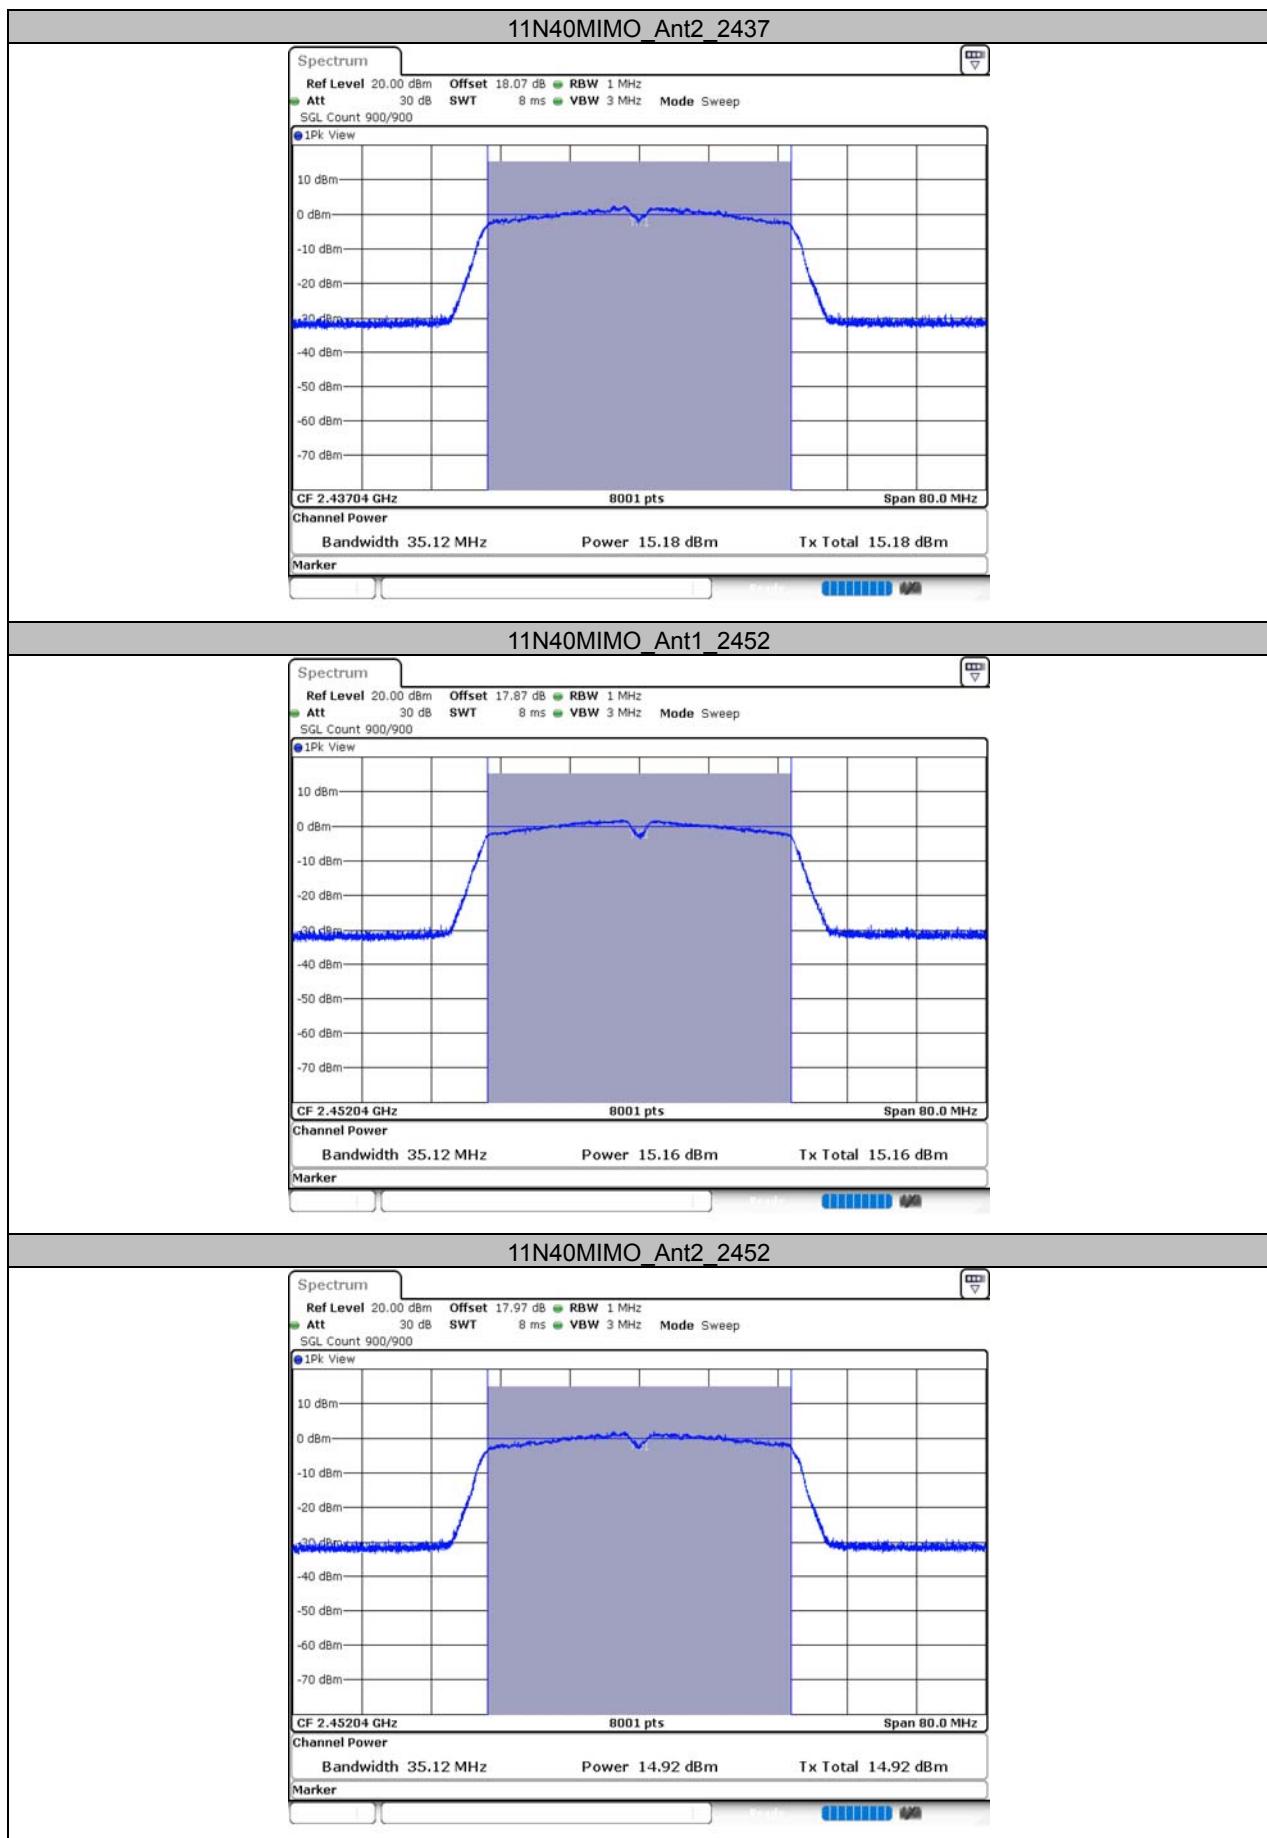


**Appendix D: Maximum power spectral density
Test Result**


Test Mode	Antenna	Frequency [MHz]	Result [dBm/3-100kHz]	Limit [dBm/3kHz]	Verdict
11B	Ant1	2412	3.73	≤8.00	PASS
	Ant2	2412	2.76	≤8.00	PASS
	Ant1	2437	3.67	≤8.00	PASS
	Ant2	2437	3.42	≤8.00	PASS
	Ant1	2462	3.55	≤8.00	PASS
	Ant2	2462	2.88	≤8.00	PASS
11G	Ant1	2412	-15.66	≤8.00	PASS
	Ant2	2412	-15.74	≤8.00	PASS
	Ant1	2437	-15.26	≤8.00	PASS
	Ant2	2437	-16.22	≤8.00	PASS
	Ant1	2462	-14.81	≤8.00	PASS
	Ant2	2462	-16.7	≤8.00	PASS
11N20MIMO	Ant1	2412	-16.84	≤8.00	PASS
	Ant2	2412	-18.26	≤8.00	PASS
	total	2412	-14.48	7.68	PASS
	Ant1	2437	-17.24	≤8.00	PASS
	Ant2	2437	-16.82	≤8.00	PASS
	total	2437	-14.01	7.68	PASS
	Ant1	2462	-17.49	≤8.00	PASS
	Ant2	2462	-18.77	≤8.00	PASS
	total	2462	-15.07	7.68	PASS
11N40MIMO	Ant1	2422	-20.84	≤8.00	PASS
	Ant2	2422	-21.43	≤8.00	PASS
	total	2422	-18.11	7.68	PASS
	Ant1	2437	-20.39	≤8.00	PASS
	Ant2	2437	-21.62	≤8.00	PASS
	total	2437	-17.95	7.68	PASS
	Ant1	2452	-20.56	≤8.00	PASS
	Ant2	2452	-21.02	≤8.00	PASS
			total	2452	-17.77
					7.68
					PASS

Test Graphs


11B_Ant1_2412

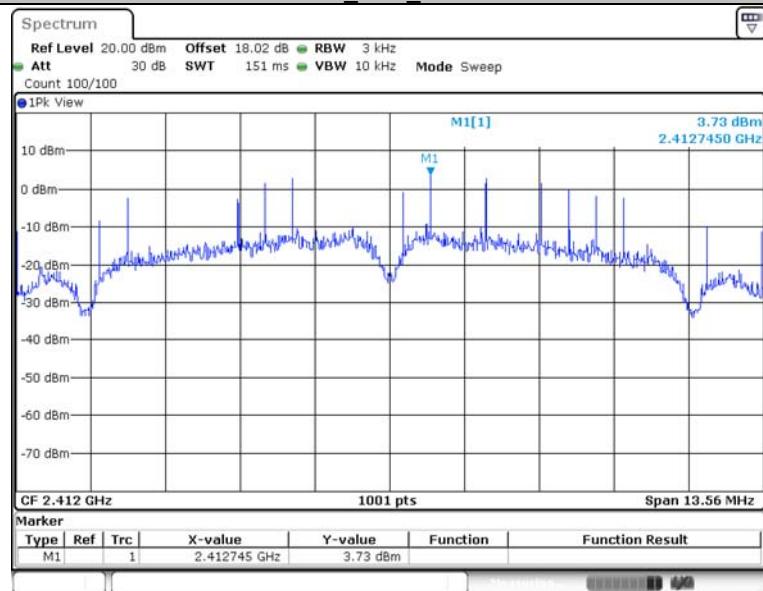



11B_Ant2_2412

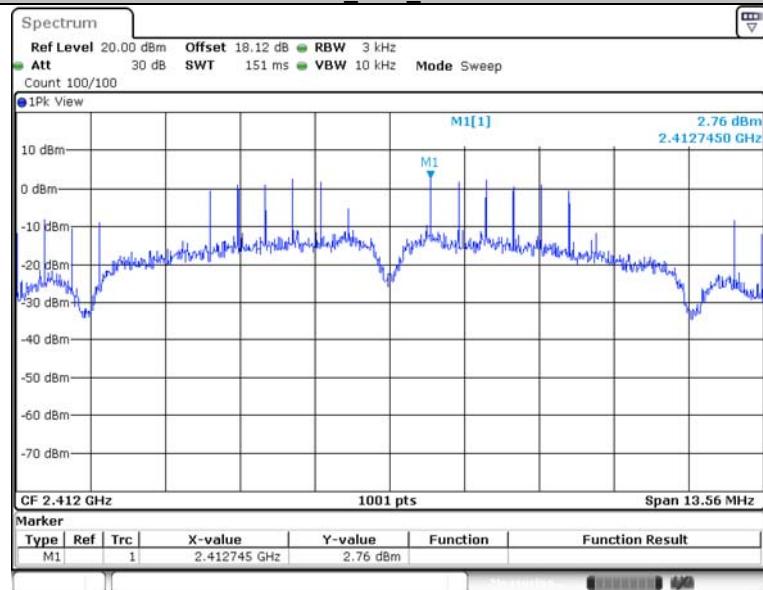



11B_Ant1_2437

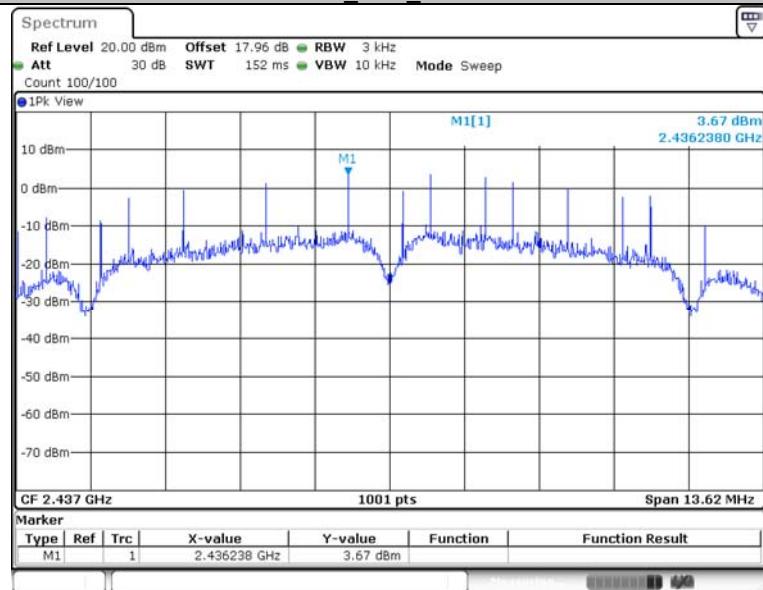


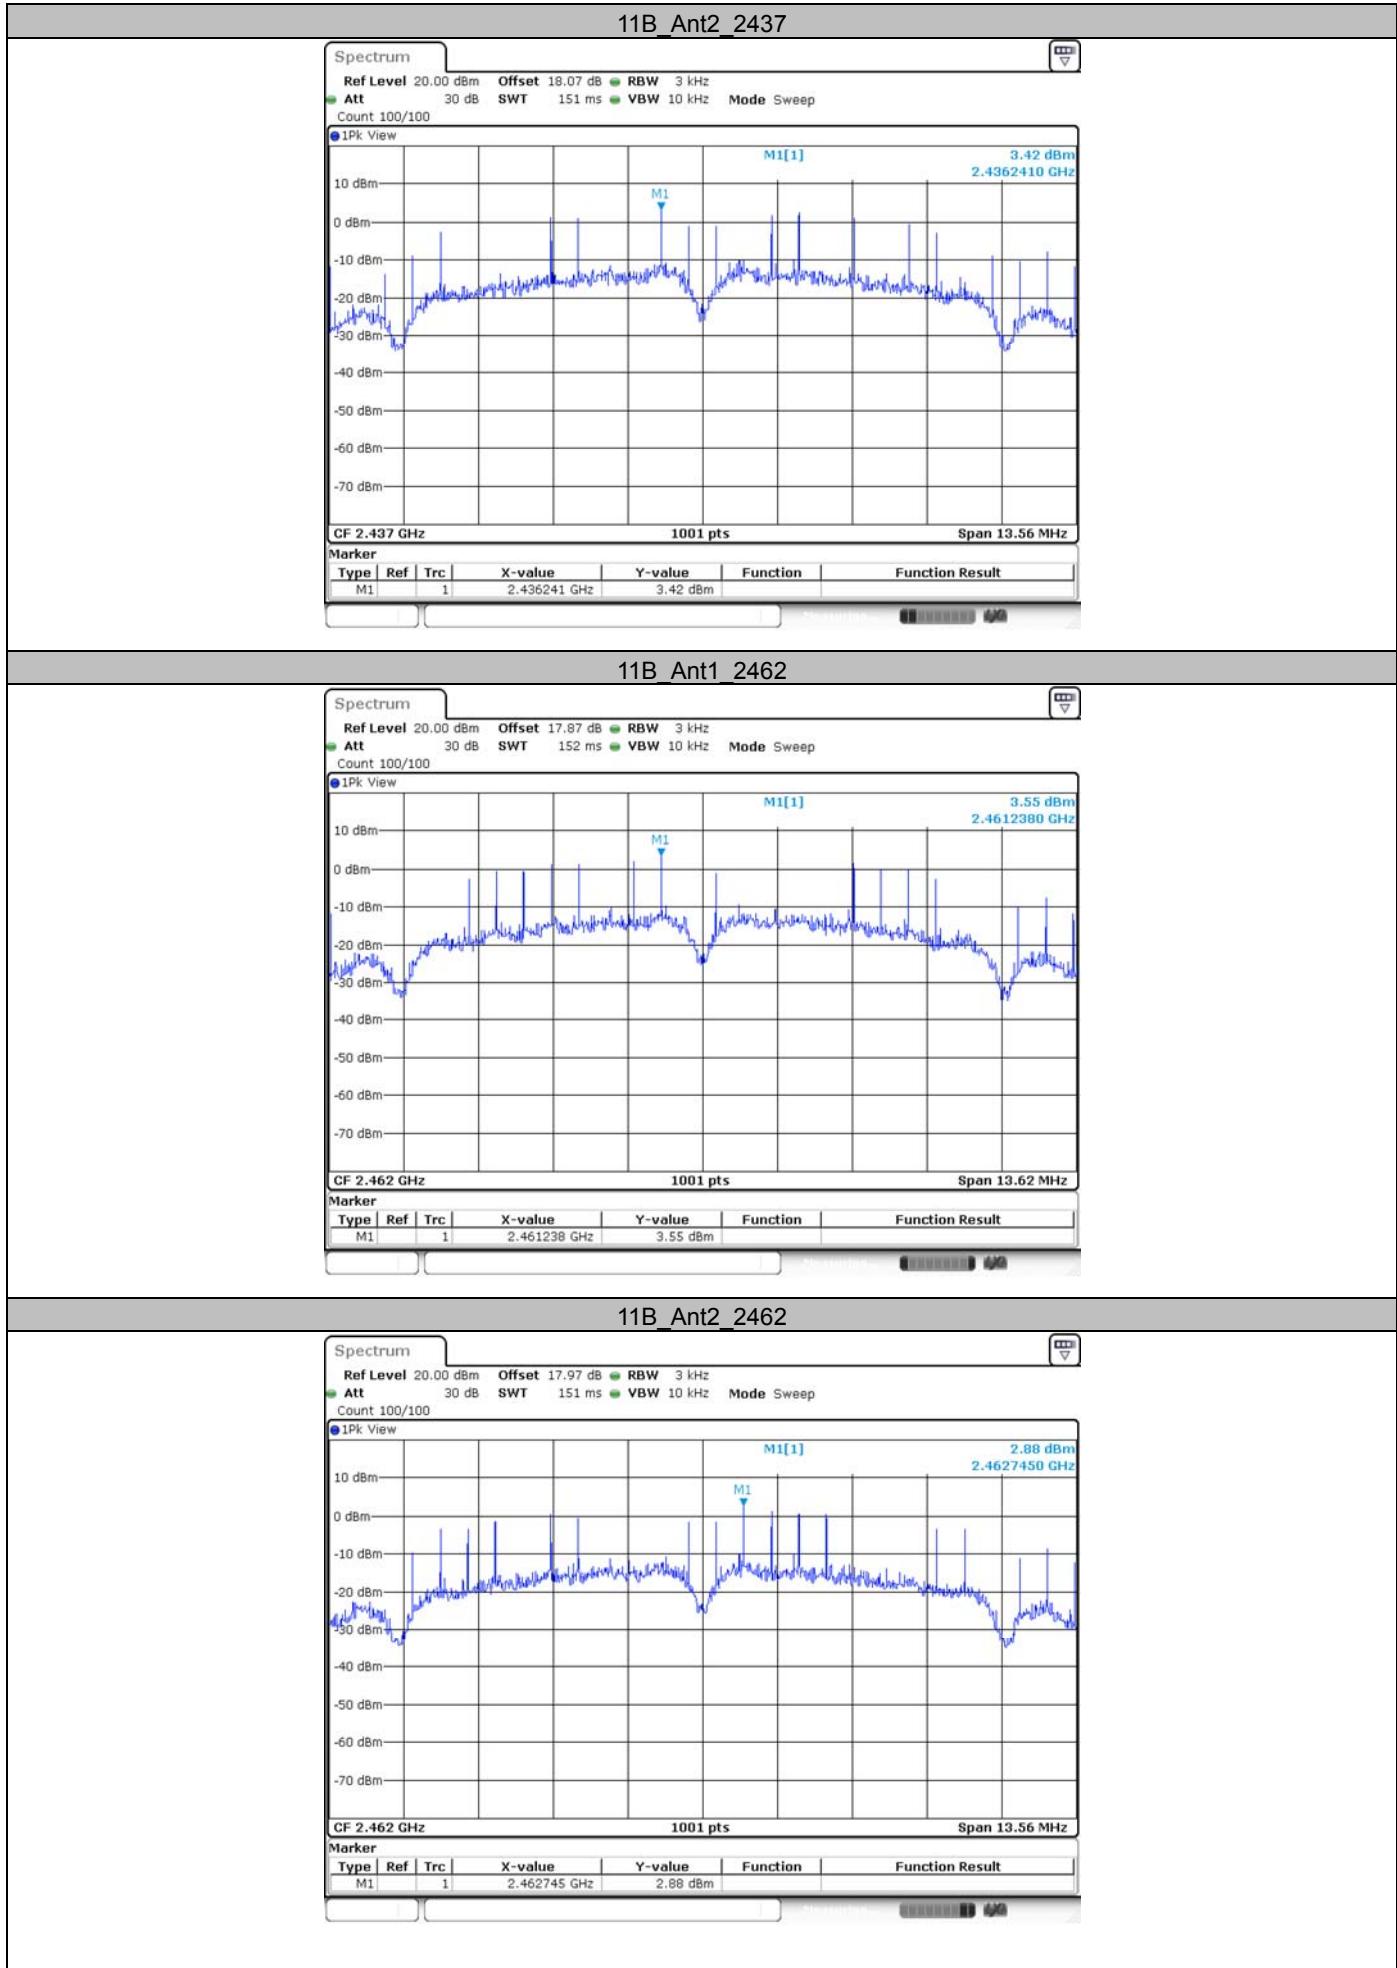


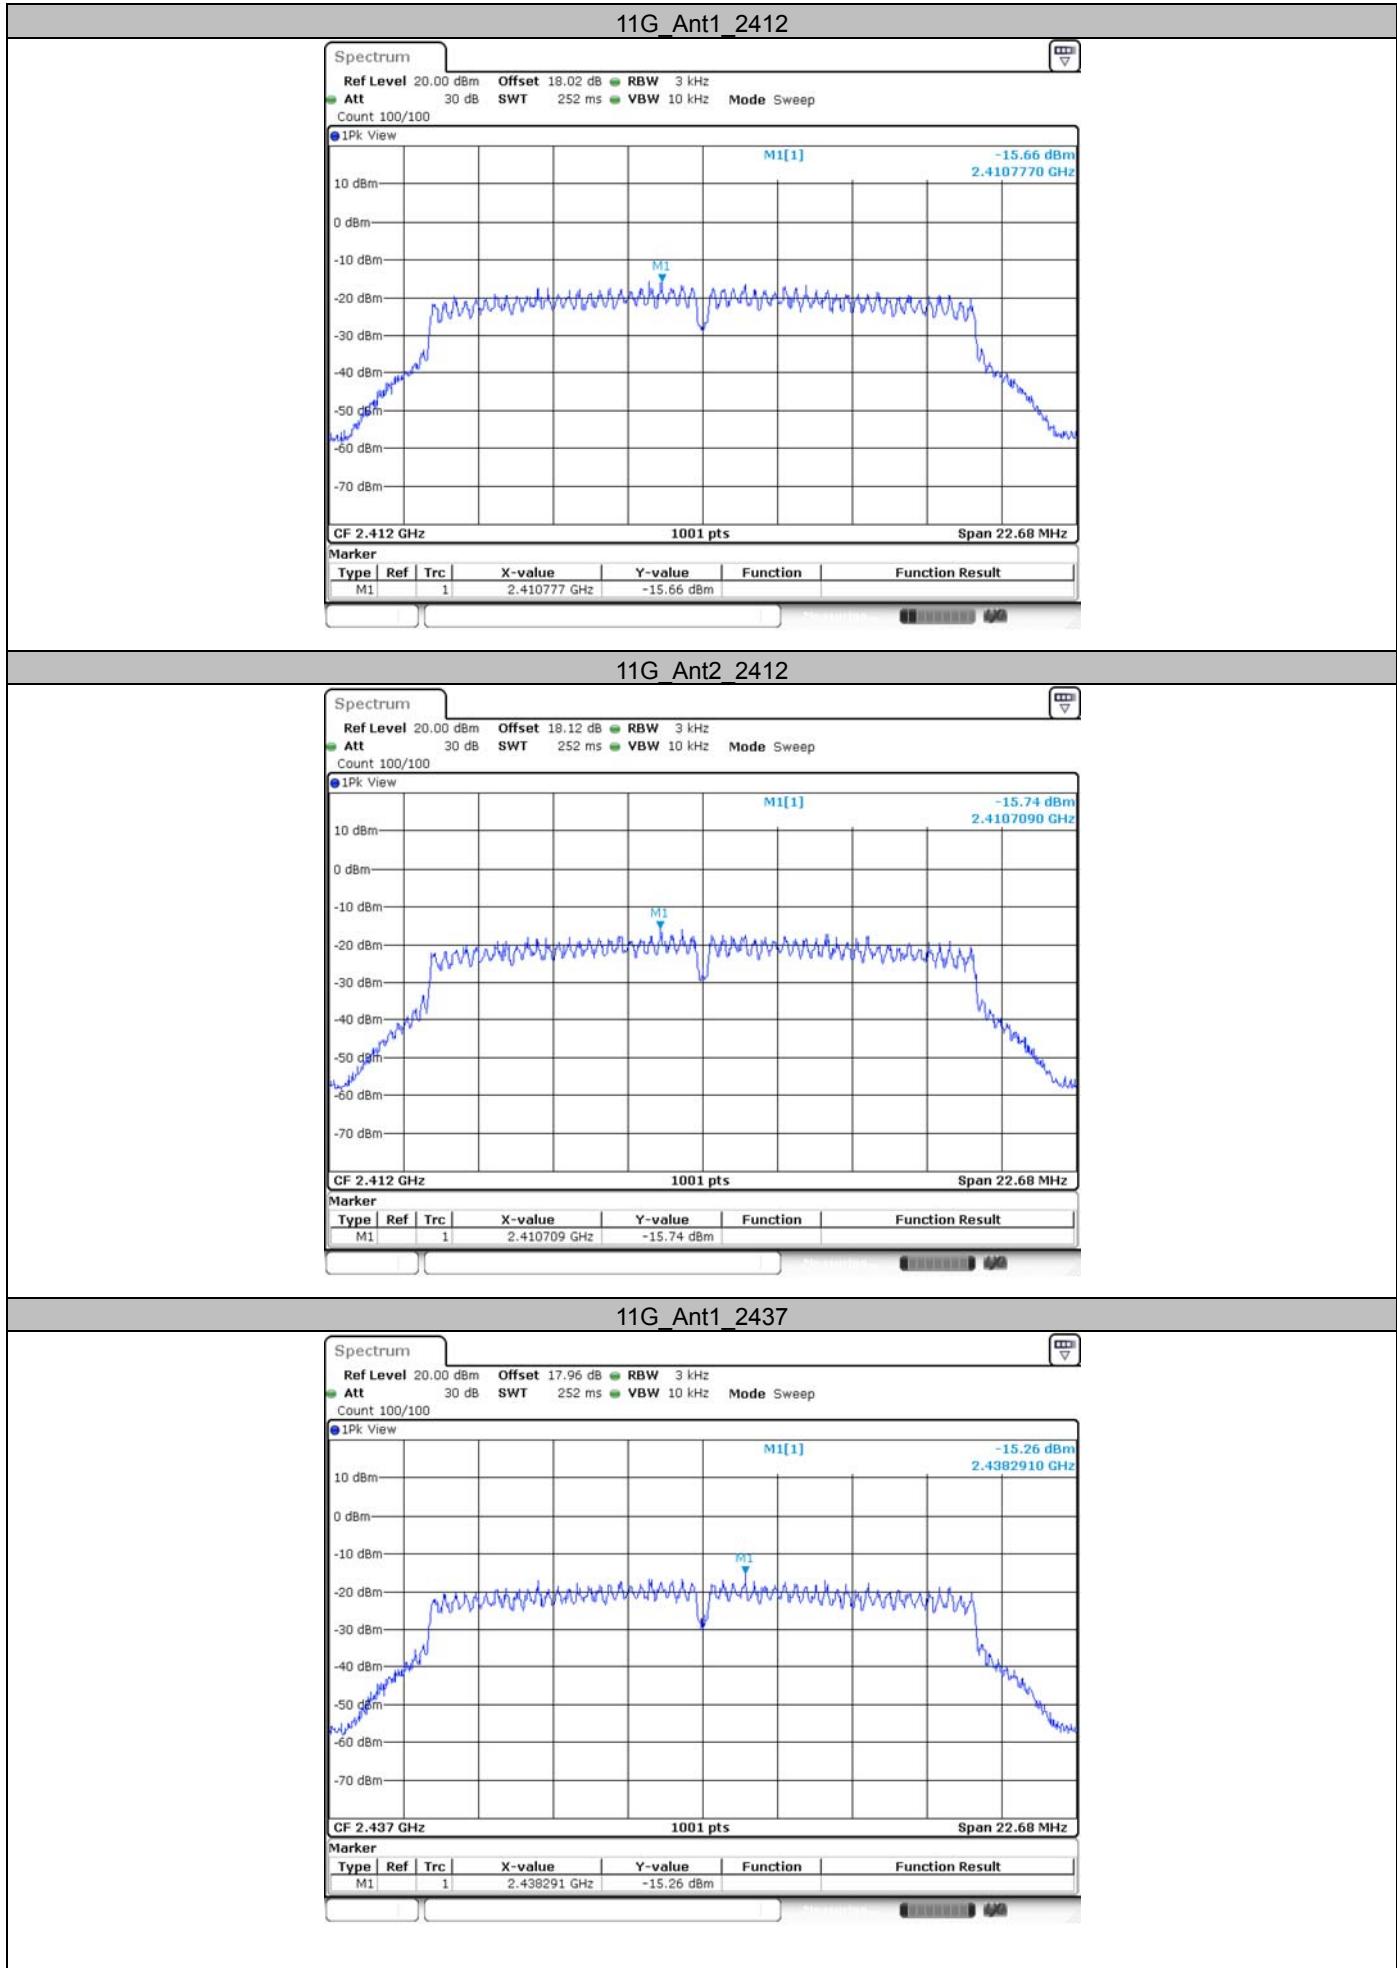


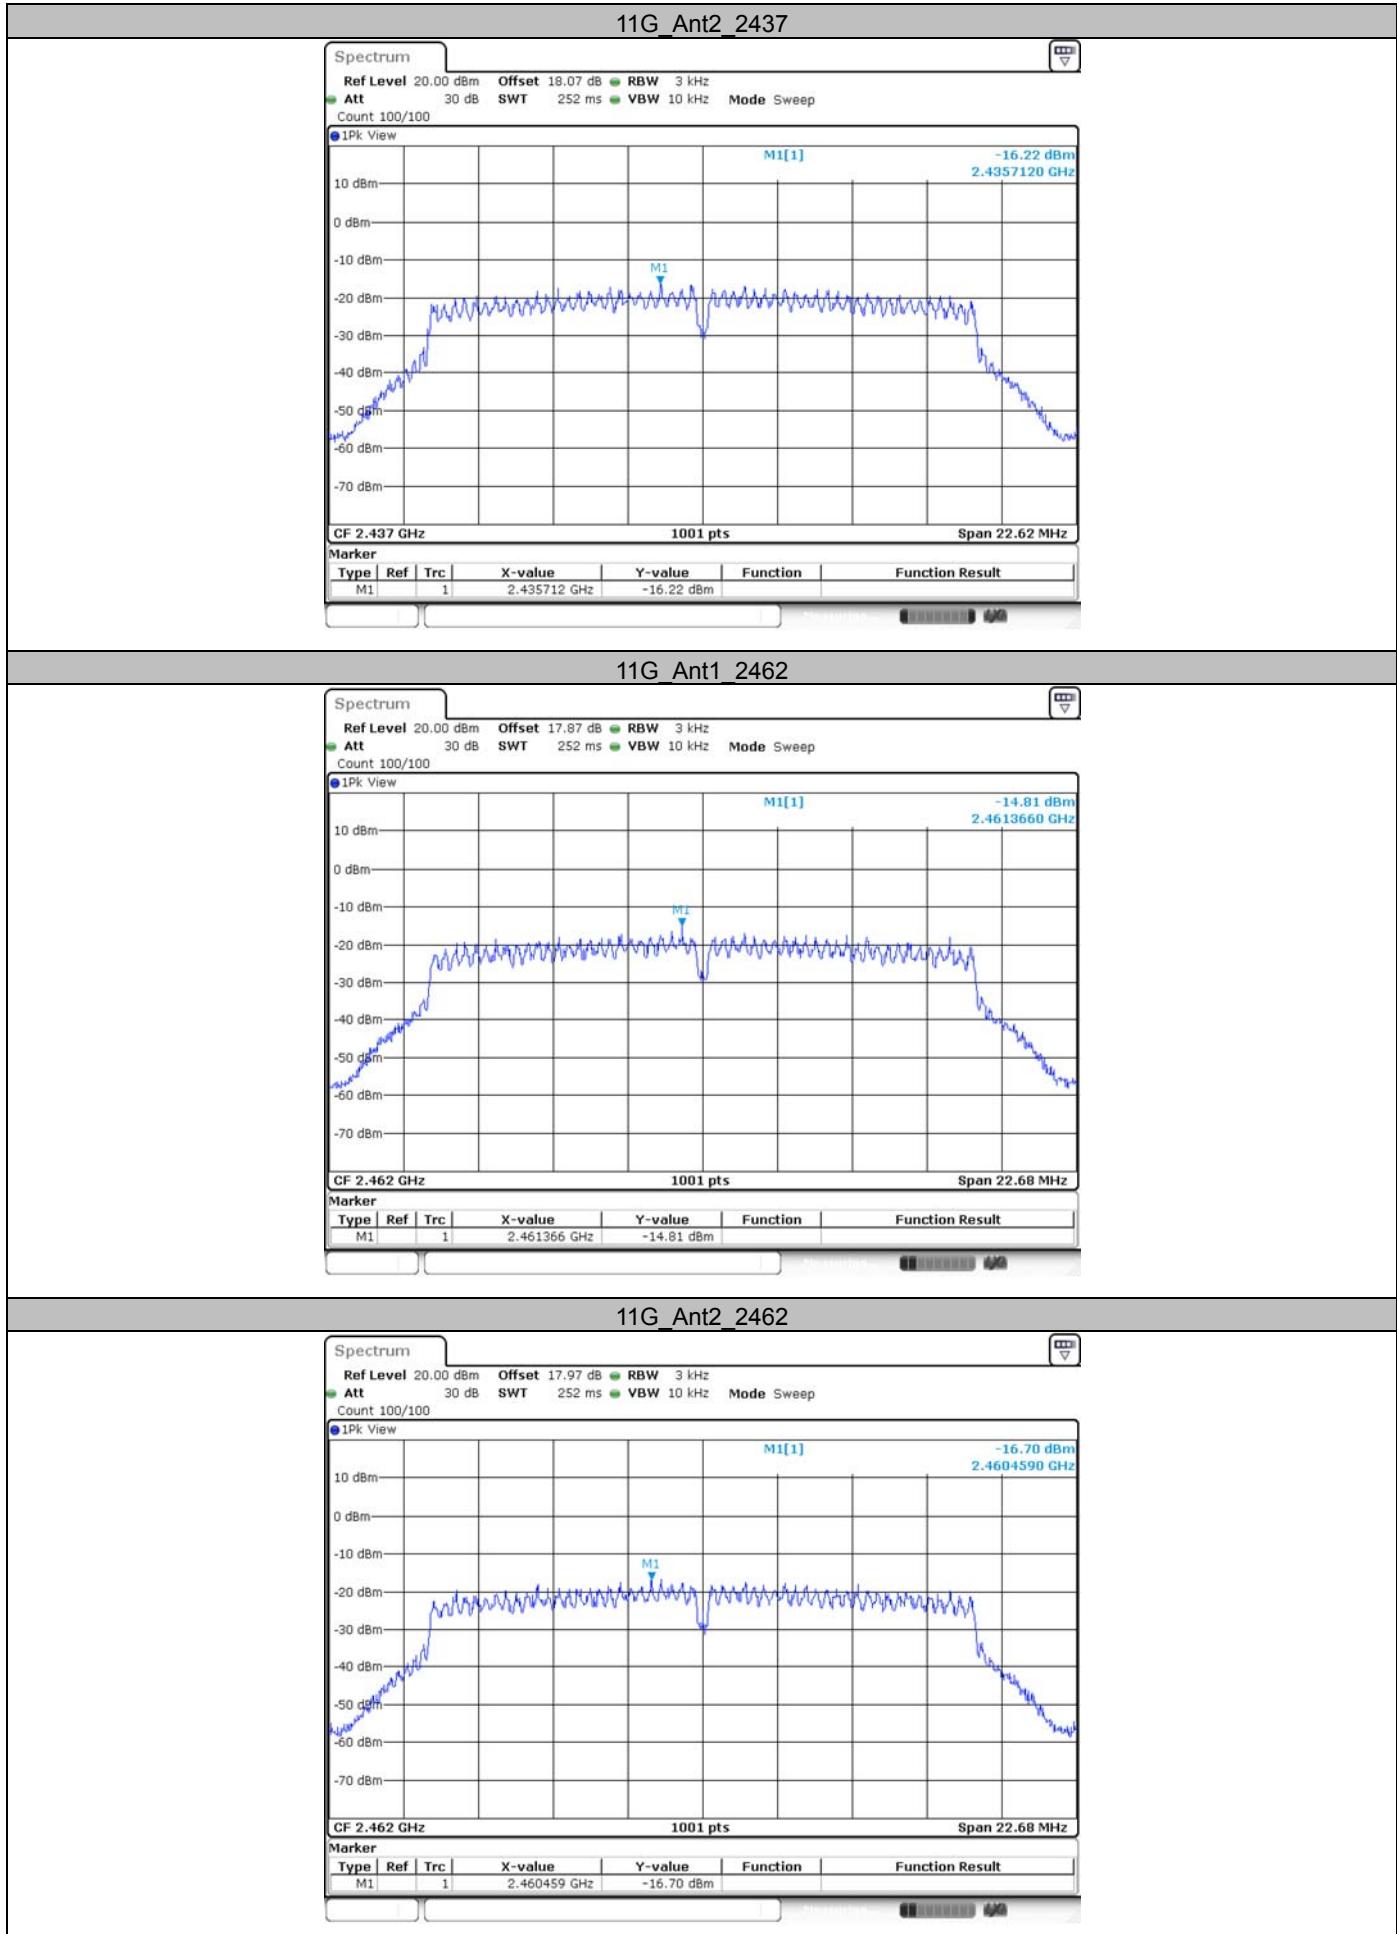

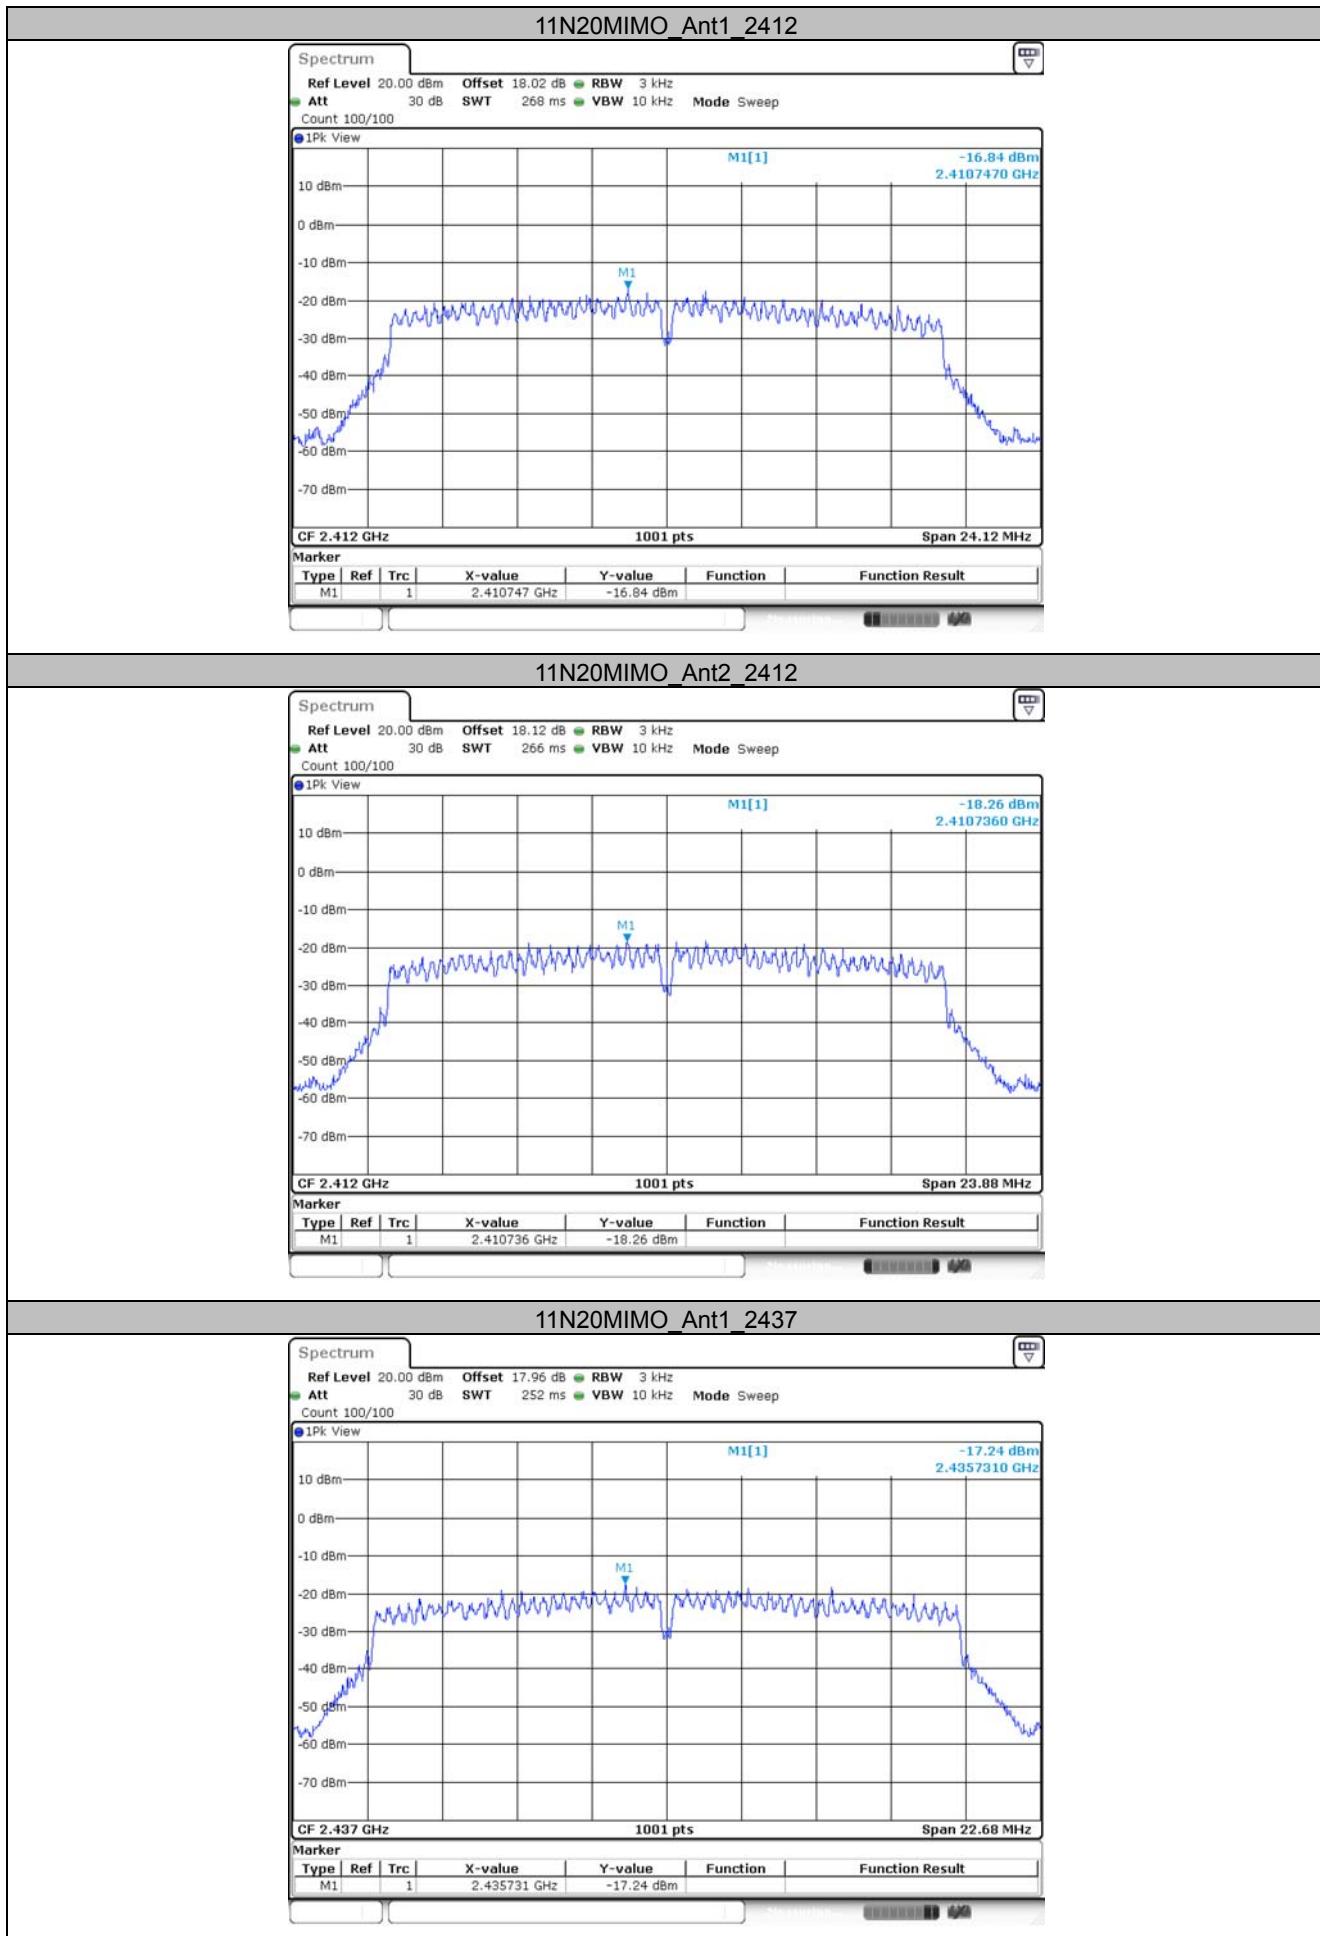

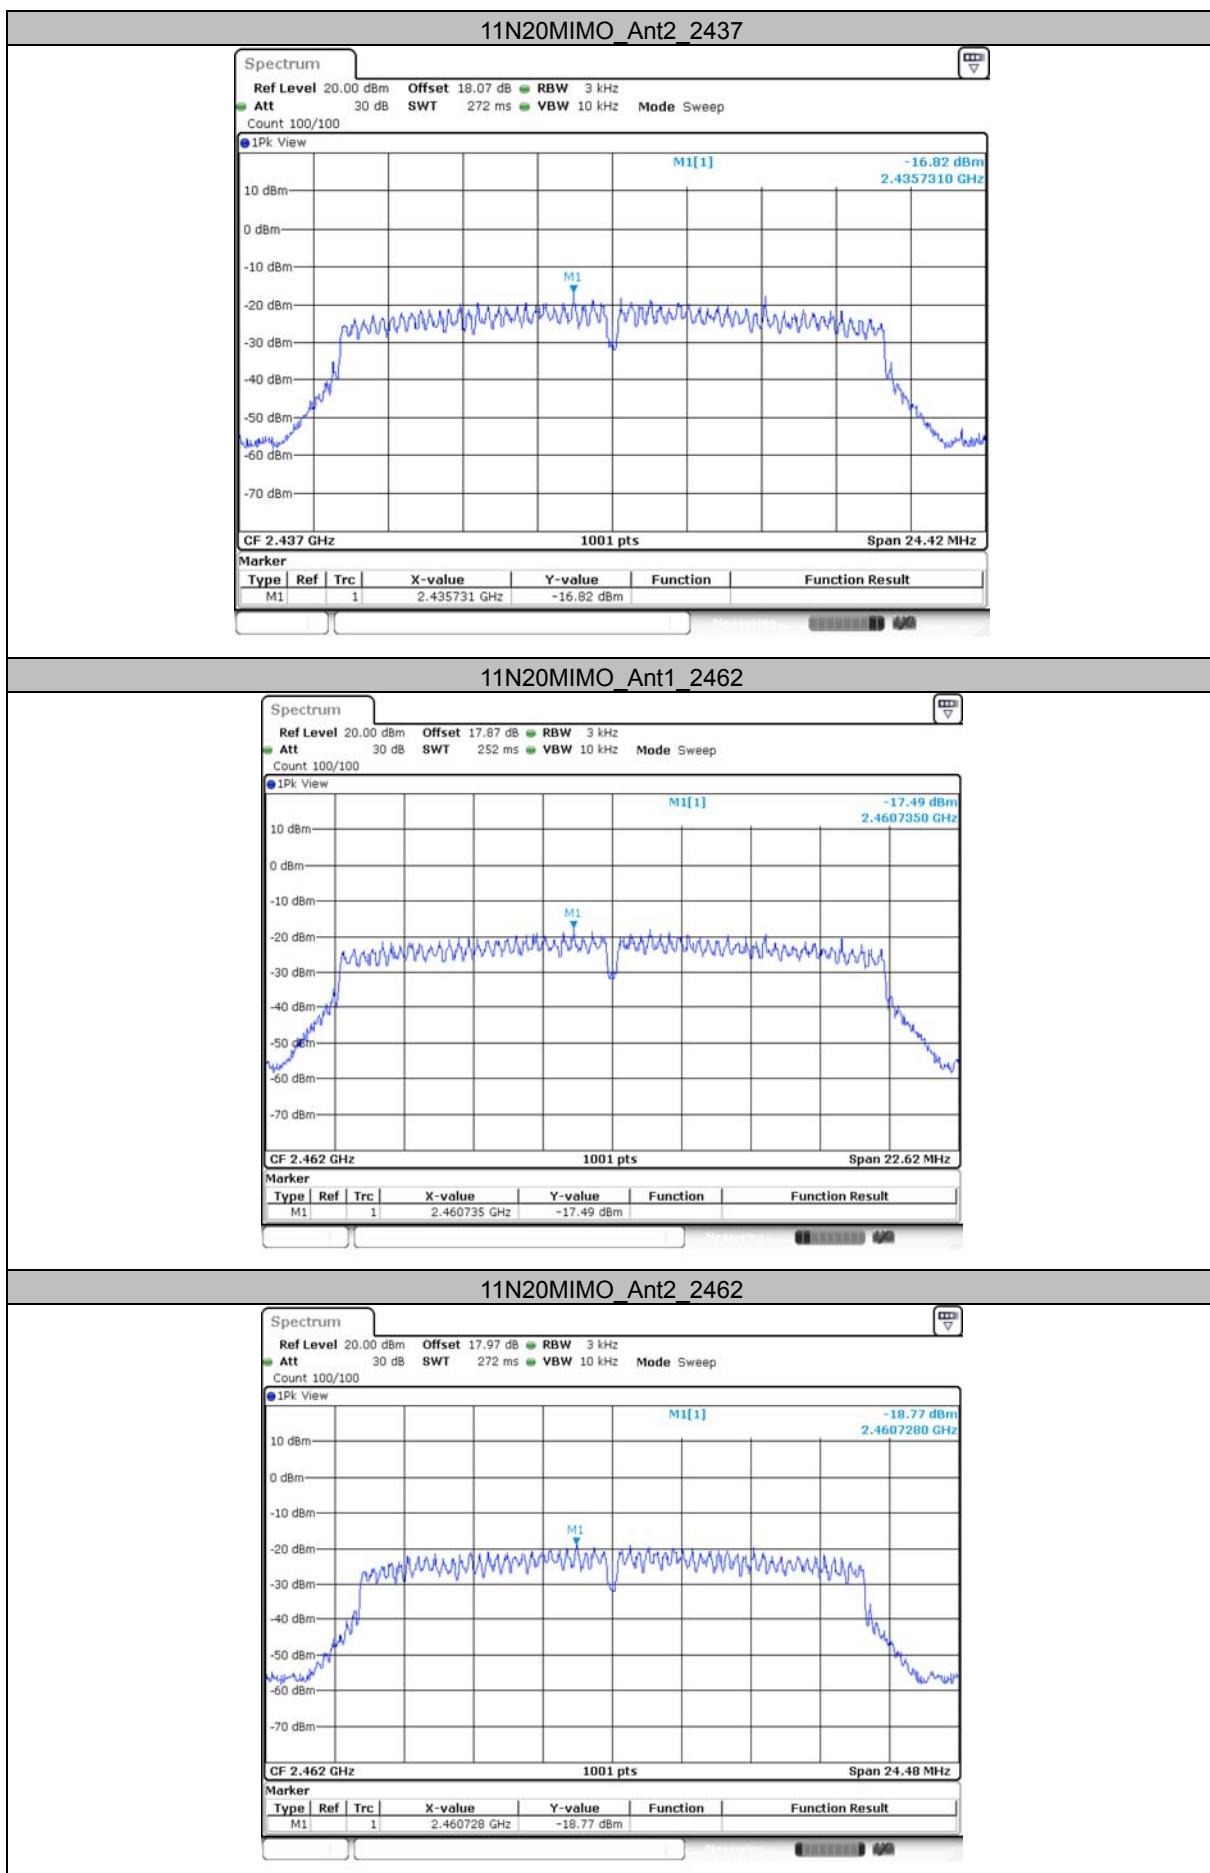

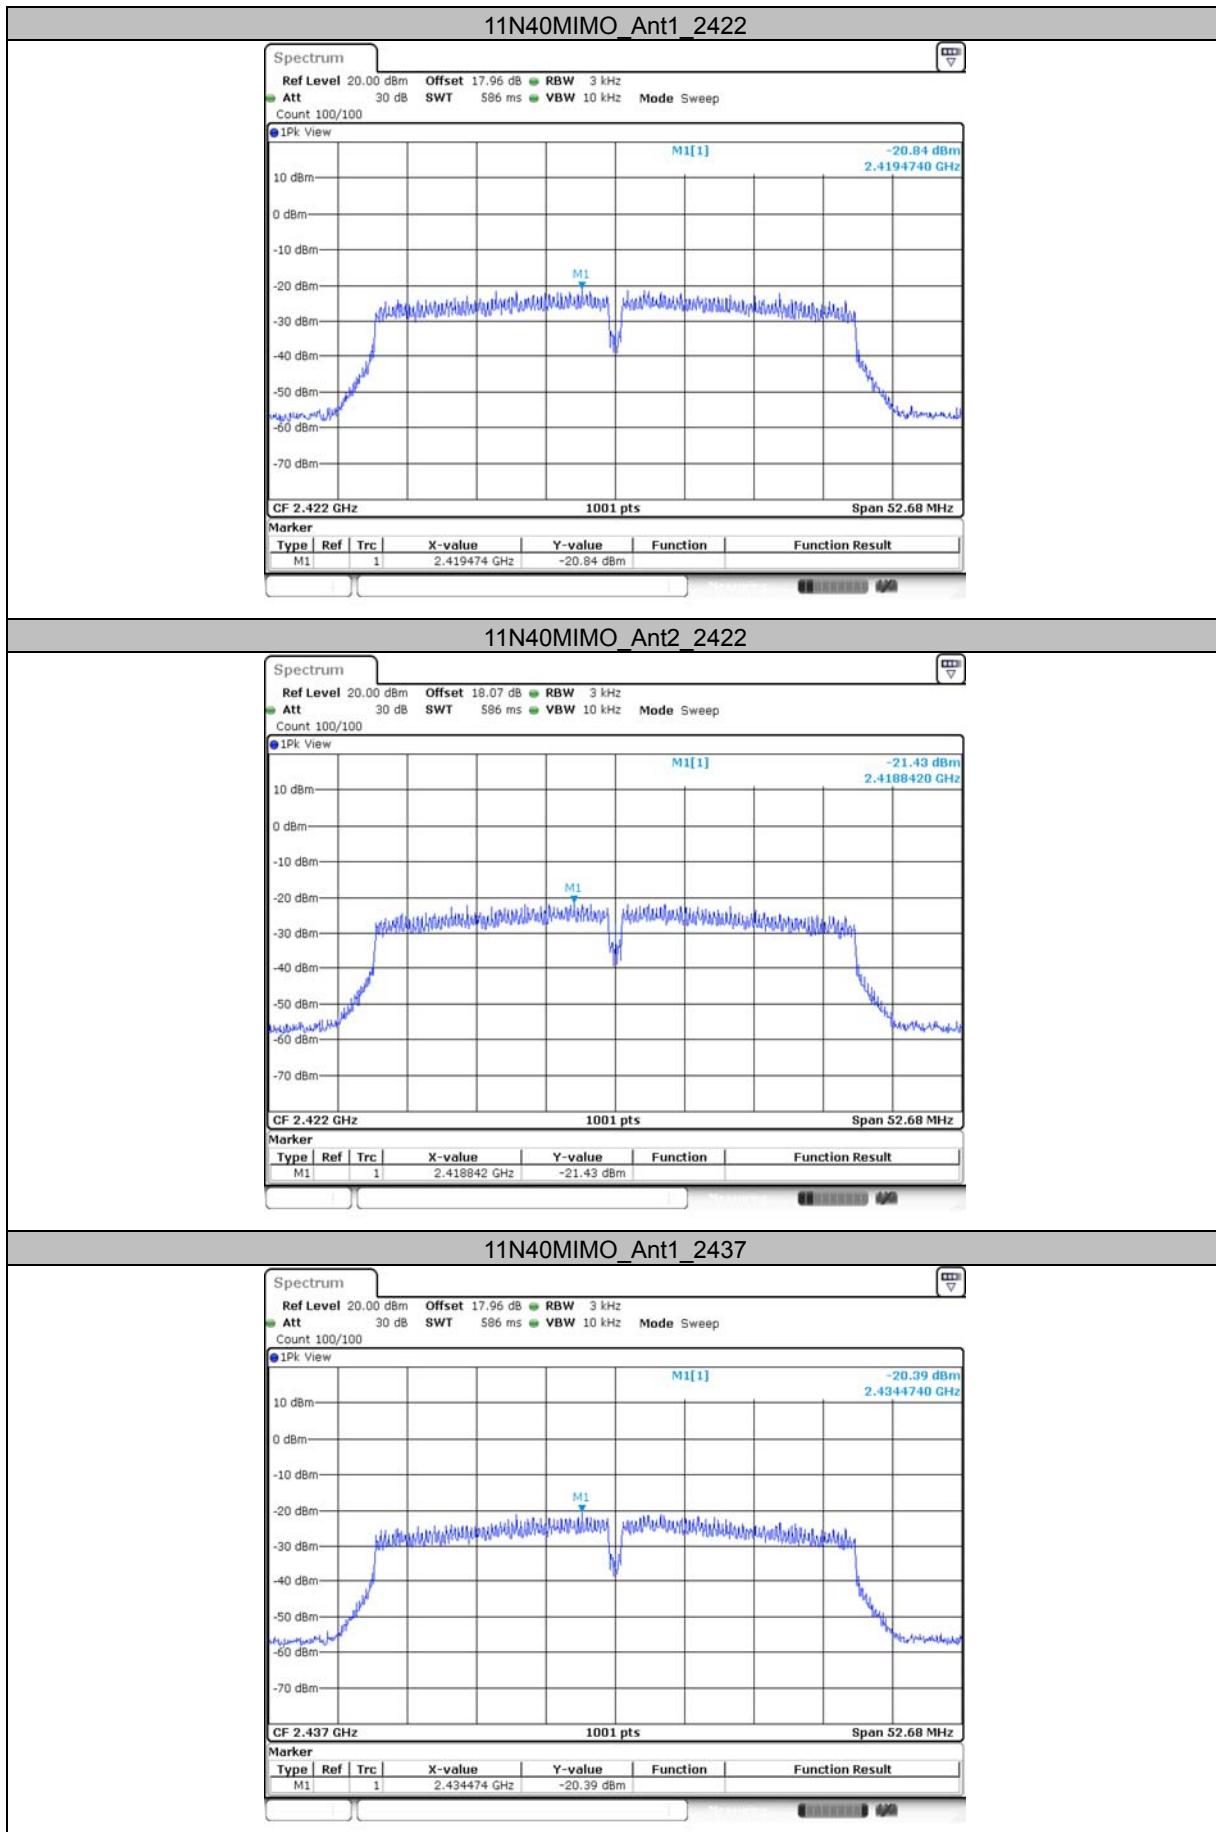

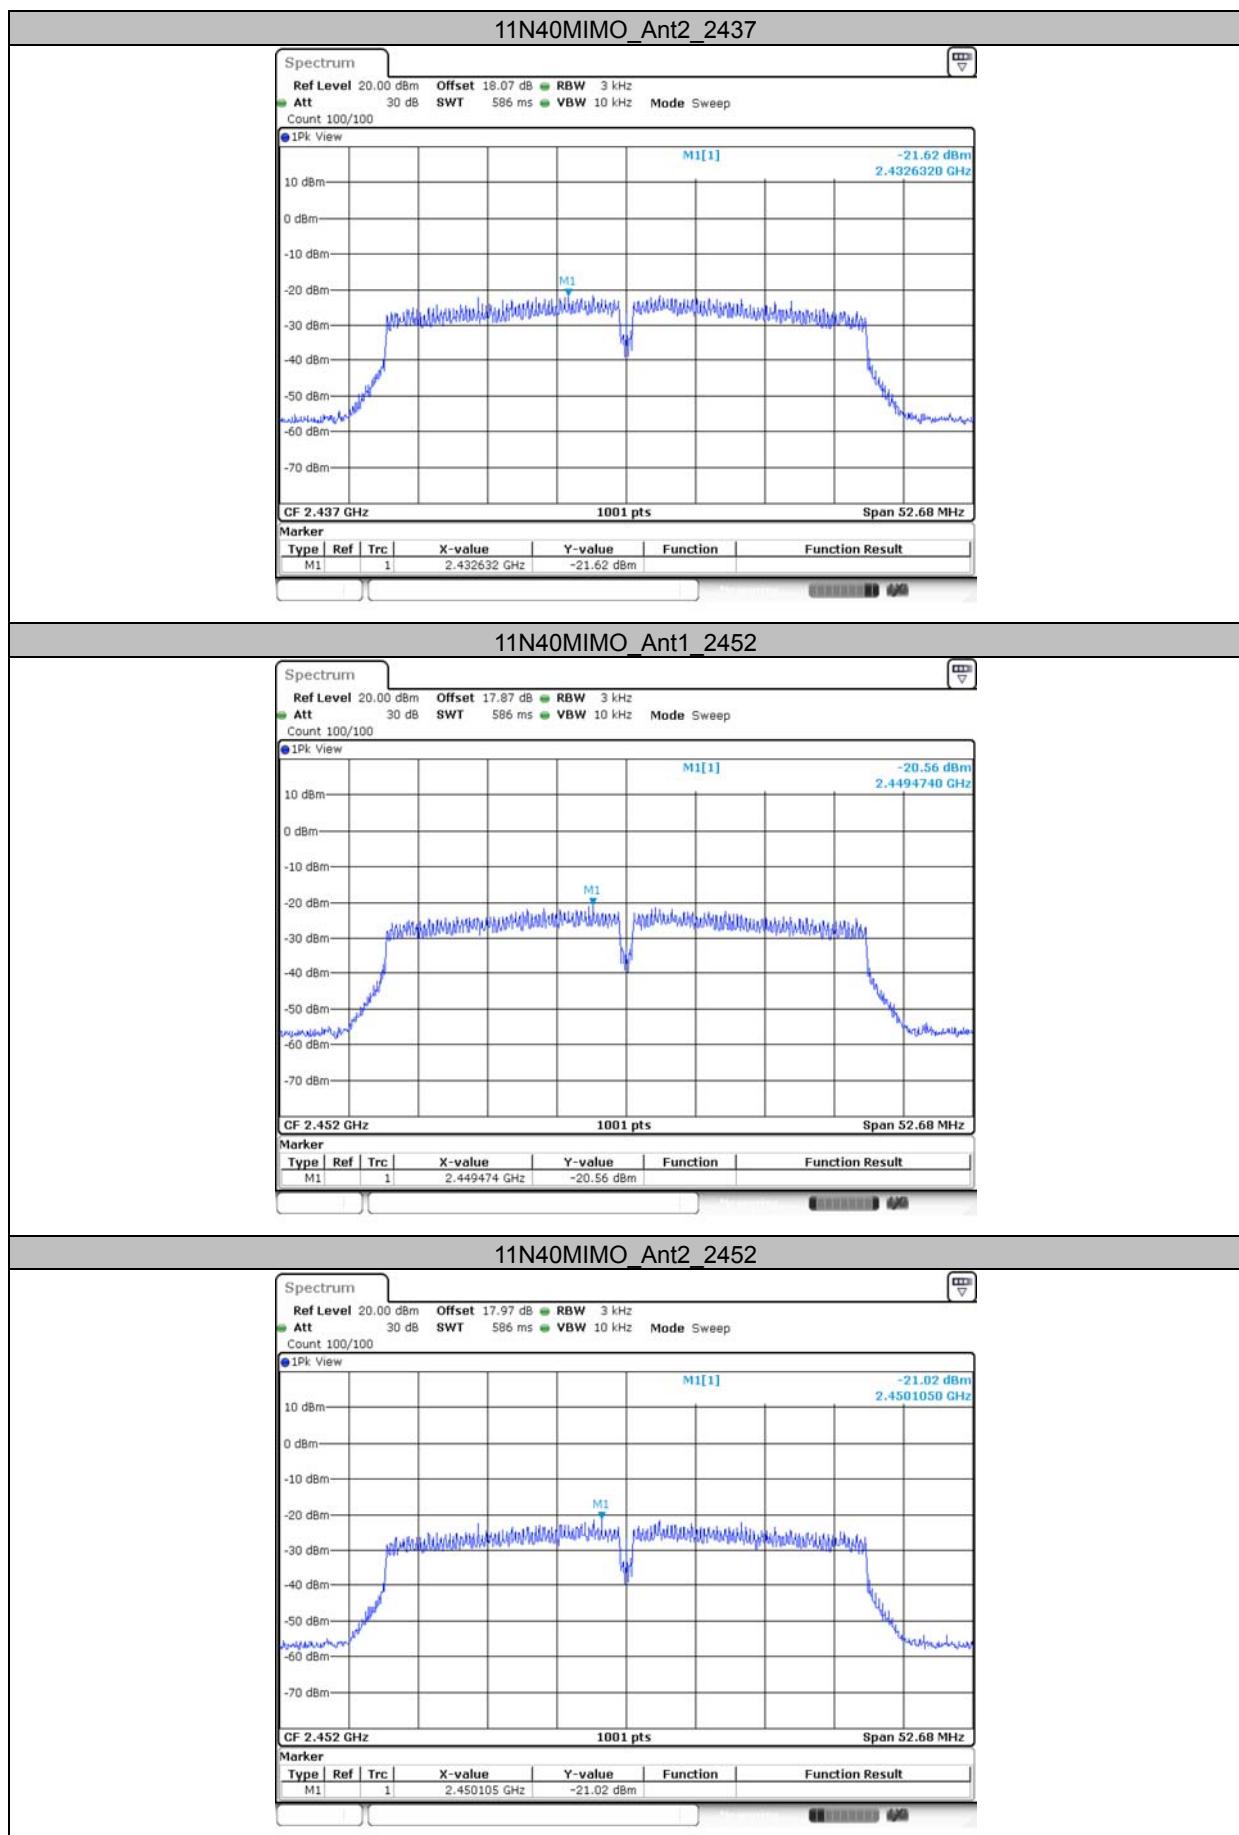

**Appendix E: Reference level measurement
Test Result**

Test Mode	Antenna	Freq (MHz)	Max.Point [MHz]	Result [dBm]
11B	Ant1	2412	2411.49	4.41
	Ant2	2412	2412.49	4.05
	Ant1	2437	2437.51	4.43
	Ant2	2437	2437.51	4.12
	Ant1	2462	2462.49	4.25
	Ant2	2462	2462.51	3.55
11G	Ant1	2412	2413.25	-1.05
	Ant2	2412	2410.75	-1.31
	Ant1	2437	2435.75	-1.22
	Ant2	2437	2435.76	-1.57
	Ant1	2462	2463.28	-1.32
	Ant2	2462	2460.75	-2.02
11N20MIMO	Ant1	2412	2413.26	-3.24
	Ant2	2412	2410.76	-3.56
	Ant1	2437	2438.25	-2.95
	Ant2	2437	2435.73	-3.99
	Ant1	2462	2460.76	-3.90
	Ant2	2462	2463.24	-4.43
11N40MIMO	Ant1	2422	2419.48	-5.74
	Ant2	2422	2419.48	-5.57
	Ant1	2437	2434.48	-5.24
	Ant2	2437	2434.48	-5.76
	Ant1	2452	2449.48	-5.72
	Ant2	2452	2449.48	-6.27

Test Graphs





