

## FCC RADIO TEST REPORT

Applicant..... : La Crosse Technology Ltd.  
Address..... : 2809 Losey Blvd. South. La Crosse Wisconsin 54601 United States  
Manufacturer..... : La Crosse Technology Ltd.  
Address..... : 2809 Losey Blvd. South. La Crosse Wisconsin 54601 United States  
Factory..... : La Crosse Technology Ltd.  
Address..... : 2809 Losey Blvd. South. La Crosse Wisconsin 54601 United States  
Product Name..... : Cyclone Pro Wind Sensor  
Brand Name..... : LA CROSSE TECHNOLOGY  
Model No. .... : LTV-WSDR1 (For addition model and model difference refer to section 2)  
FCC ID..... : OMOLTV-WSDR1  
Measurement Standard..... : 47 CFR FCC Part 15, Subpart C (Section 15.249)  
Receipt Date of Samples.... : June 06, 2022  
Date of Tested..... : June 06, 2022 to June 21, 2022  
Date of Report..... : July 28, 2022

This report shows that above equipment is technically compliant with the requirements of the standards above. All test results in this report apply only to the tested sample(s). Without prior written approval of Dongguan Nore Testing Center Co., Ltd, this report shall not be reproduced except in full.



Prepared by

Alina Guo / Project Engineer



---

## Table of Contents

1. Summary of Test Result.....	4
2. General Description of EUT .....	5
3. Test Channels and Modes Detail.....	7
4. Configuration of EUT.....	7
5. Modification of EUT .....	7
6. Description of Support Device.....	8
7. Test Facility and Location .....	8
8. Applicable Standards and References.....	9
9. Deviations and Abnormalities from Standard Conditions .....	9
10. Test Conditions .....	9
11. Measurement Uncertainty.....	10
12. Sample Calculations .....	11
13. Test Items and Results .....	12
13.1 Conducted Emissions Measurement .....	12
13.2 Radiated Spurious Emissions and Restricted Bands Measurement.....	14
13.3 20dB Bandwidth Measurement.....	24
13.4 Antenna Requirement .....	26
14. Test Equipment List.....	27

**Revision History**

Report Number	Description	Issued Date
NTC2206087FV00	Initial Issue	2022-07-28

## 1. Summary of Test Result

FCC Rules	Description of Test	Result	Remarks
§15.207 (a)	AC Power Conducted Emission	N/A	---
§15.249(a)/ 15.209	Radiated Emissions	PASS	---
§15.249(d)/ 15.205	Band Edge	PASS	---
§15.215(c)	20dB Bandwidth	PASS	---
§15.203	Antenna Requirement	PASS	---

## 2. General Description of EUT

Product Information	
Product name:	Cyclone Pro Wind Sensor
Main Model Name:	LTV-WSDR1
Additional Model Name:	LTV-WSDxx, LTV-WSDxx-xxx, LTV-WSDxxxx, LTV-WSDxxxx-xxx, LTV-WSDxx-xx LTV-WSDxx-xx-xxx (x can be 0~9 or A~Z or a~z, the difference for different version are the product shell color and packaging upgrade version number, when upgrade a version the number progressed to next number)
Model Difference:	These models have the same circuitry, electrical mechanical, PCB Layout and physical construction. The differences are model number, version are the product shell color and packaging upgrade version number due to marketing purpose.
S/N:	TX06600001
Brand Name:	LA CROSSE TECHNOLOGY
Hardware version:	TX066 REV05
Software version:	XCT066
Rating:	DC 4.5V from AA battery DC 0-8.5V from solar cell
Typical arrangement:	Table-top
I/O Port:	N/A
Accessories Information	
Adapter:	N/A
Cable:	N/A
Other:	N/A
Additional information	
Note:	All the tests performed on model LTV-WSDR1.
Remark:	All the information above are provided by the manufacturer. More detailed feature of the EUT please refers to the user manual.

Technical Specification	
Frequency Range:	915MHz
Modulation Type:	ASK
Number of Channel:	1
Antenna Type:	Spring antenna
Antenna Gain:	0 dBi (Declared by manufacturer)

### 3. Test Channels and Modes Detail

Mode		Channel	Frequency (MHz)	Modulation	Data Rate (Mbps)
1.	TX	1	2402	GFSK	1
2.	Normal Mode	---	---	---	---

Note: TX mode means that the EUT was programmed to be in continuously transmitting mode.

### 4. Configuration of EUT

**TX Mode**

EUT

### 5. Modification of EUT

No modifications are made to the EUT during all test items.

## 6. Description of Support Device

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Equipment	Brand	M/N	S/N	Cable Specification	Remarks
---	---	---	---	---	---	---

## 7. Test Facility and Location

Test Site	:	Dongguan Nore Testing Center Co., Ltd. (Dongguan NTC Co., Ltd.)
Accreditations and Authorizations	:	<p>The Laboratory has been assessed and proved to be in compliance with CNAS/CL01 Listed by CNAS, August 13, 2018 The Certificate Registration Number is L5795. The Certificate is valid until August 13, 2024</p> <p>The Laboratory has been assessed and proved to be in compliance with ISO17025 Listed by A2LA, November 01, 2017 The Certificate Registration Number is 4429.01</p> <p>Listed by FCC, November 06, 2017 Test Firm Registration Number: 907417</p> <p>Listed by Industry Canada, June 08, 2017 The Certificate Registration Number. Is 46405-9743A</p>
Test Site Location	:	Building D, Gaosheng Science and Technology Park, Hongtu Road, Nancheng District, Dongguan City, Guangdong Province, China



## 8. Applicable Standards and References

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

### Test Standards:

47 CFR Part 15, Subpart C, 15.249

ANSI C63.10-2013

### References Test Guidance:

N/A

## 9. Deviations and Abnormalities from Standard Conditions

No additions, deviations and exclusions from the standard.

## 10. Test Conditions

No.	Test Item	Test Mode	Test Voltage	Tested by	Remarks
1.	AC Power Conducted Emission	---	---	---	---
2.	Radiated Emissions	1	DC 4.5V	Sean	See note 1
3.	Band Edge	1	DC 4.5V	Sean	See note 1
4.	20dB Bandwidth	1	DC 4.5V	Sean	See note 1
5.	Antenna Requirement	---	---	---	---

### Note:

- The testing climatic conditions for temperature, humidity, and atmospheric pressure are within: 15~35 °C, 30~70%, 86~106kPa
- As the EUT can be operated multiple positions, all X,Y,Z axis were considered during the test and only the worst case X was recorded.
- This product will not be connected to the AC mains during normal use, therefore the AC Power Conducted Emission test is not applicable.
- The New battery be used during test.

## 11. Measurement Uncertainty

No.	Test Item	Frequency	Uncertainty	Remarks
1.	Conducted Emission	150KHz ~ 30MHz	±2.52 dB	---
2.	Radiated Emission Test	9kHz ~ 30MHz	±5.04 dB	---
		30MHz ~ 1GHz	±5.04 dB	---
		1GHz ~ 18GHz	±5.23 dB	---
		18GHz ~ 40GHz	±5.23 dB	---
3.	Occupied Bandwidth	--	±0.94%	---

**Note:**

1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
2. The measurement uncertainty levels above are estimated and calculated according to CISPR 16-4-2.
3. The conformity assessment statement in this report is based solely on the test results, measurement uncertainty is excluded.

## 12. Sample Calculations

Conducted Emission						
Freq. (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measurement (dBuV)	Limit (dBuV)	Over (dB)	Detector
0.1980	41.60	10.60	52.20	63.69	-11.49	QP
Where, Freq. = Emission frequency in MHz Reading Level = Spectrum Analyzer/Receiver Reading Corrector Factor = Insertion loss of LISN + Cable Loss + RF Switching Unit attenuation Measurement = Reading + Corrector Factor Limit = Limit stated in standard Margin = Measurement - Limit Detector = Reading for Quasi-Peak / Average / Peak						

Radiated Spurious Emissions and Restricted Bands						
Freq. (MHz)	Reading Level (dBuV)	Correct Factor (dB/m)	Measurement (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector
94.9900	30.87	-8.20	22.67	43.50	-20.83	QP
Where, Freq. = Emission frequency in MHz Reading Level = Spectrum Analyzer/Receiver Reading Corrector Factor = Antenna Factor + Cable Loss - Pre-amplifier Measurement = Reading + Corrector Factor Limit = Limit stated in standard Over = Margin, which calculated by Measurement - Limit Detector = Reading for Quasi-Peak / Average / Peak						

Note: For all conducted test items, the spectrum analyzer offset or transducer is derived from RF cable loss and attenuator factor. The offset or transducer is equal to the RF cable loss plus attenuator factor.

### 13. Test Items and Results

#### 13.1 Conducted Emissions Measurement


##### LIMIT

According to the requirements of FCC PART 15.207, the limits are as follows:

Frequency (MHz)	Quasi-peak	Average
0.15 to 0.5	66 to 56	56 to 46
0.5 to 5	56	46
5 to 30	60	50

Note: 1. If the limits for the average detector are met when using the quasi-peak detector, then the limits for the measurements with the average detector are considered to be met.  
 2. The lower limit shall apply at the transition frequencies.  
 3. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5MHz.

##### BLOCK DIAGRAM OF TEST SETUP

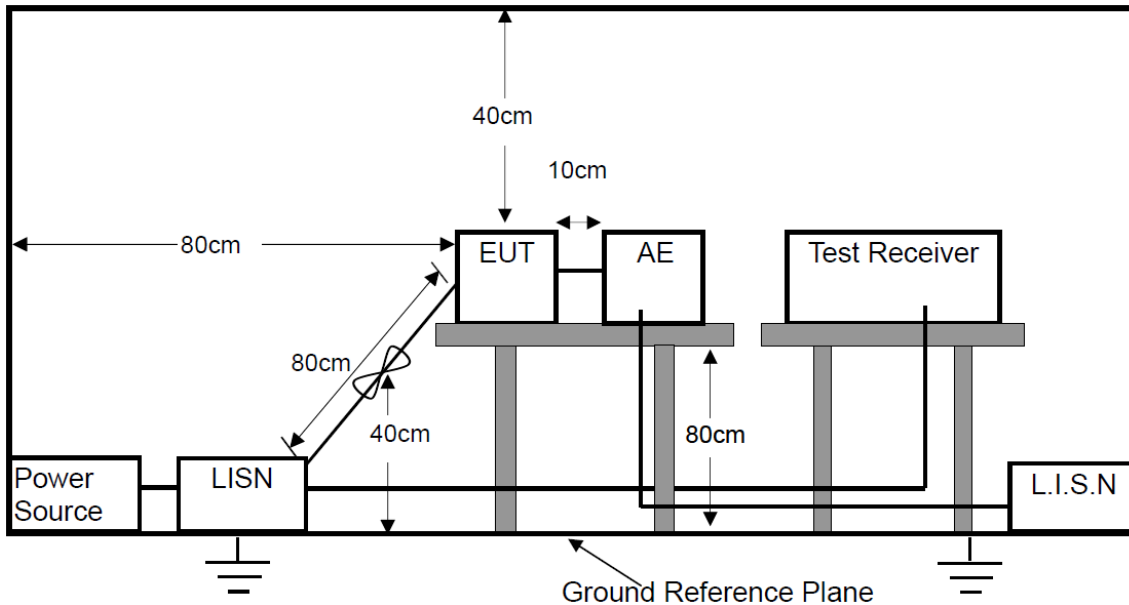

## **TEST PROCEDURES**

- a. The EUT was placed on a wooden table 0.8m height from the metal ground plan and 0.4m from the conducting wall of the shielding room and it was kept at 0.8m from any other grounded conducting surface.
- b. All I/O cables and support devices were positioned as per ANSI C63.10.
- c. Connect mains power port of the EUT to a line impedance stabilization network (LISN).
- d. Connect all support devices to the other LISN and AAN, if needed.
- e. Scan the frequency range from 150KHz to 30MHz at both sides of AC line for maximum conducted interference checking and record the test data.

## **TEST RESULTS**

Not Applicable.

## 13.2 Radiated Spurious Emissions and Restricted Bands Measurement

### LIMIT


Frequency range MHz	Distance Meters	Field Strengths Limit (15.209)	
		μV/m	
0.009 ~ 0.490	300	2400/F(kHz)	
0.490 ~ 1.705	30	24000/F(kHz)	
1.705 ~ 30	30	30	
30 ~ 88	3	100	
88 ~ 216	3	150	
216 ~ 960	3	200	
Above 960	3	500	
Frequency range MHz	Distance Meters	Field Strengths Limit (15.249)	
		mV/m (Field strength of fundamental)	μV/m (Field strength of Harmonics)
902 ~ 928	3	50	500
2400 ~ 2483.5	3	50	500
5725 ~ 5875	3	50	500
24000 ~ 2425000	3	250	2500

- Remark: (1) Emission level (dB)μV = 20 log Emission level μV/m
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.
- (4) The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.
- (5) §15.249(d) specifies that emissions which fall in the restricted bands, as defined in §15.205


comply with radiated emission limits specified in §15.209.

**BLOCK DIAGRAM OF TEST SETUP**


For Radiated Emission below 30MHz

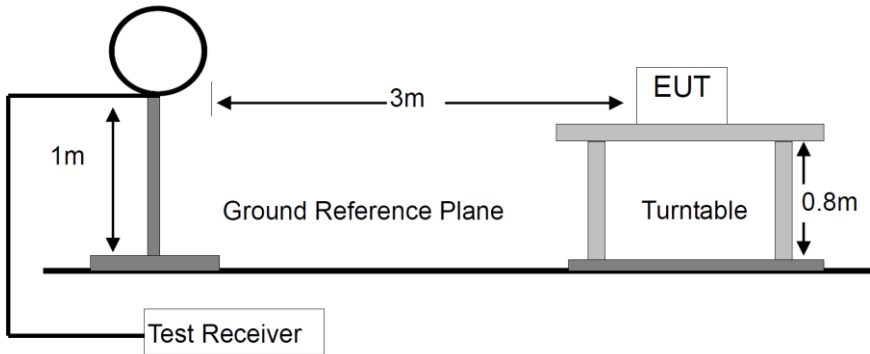

For Radiated Emission 30-1000MHz

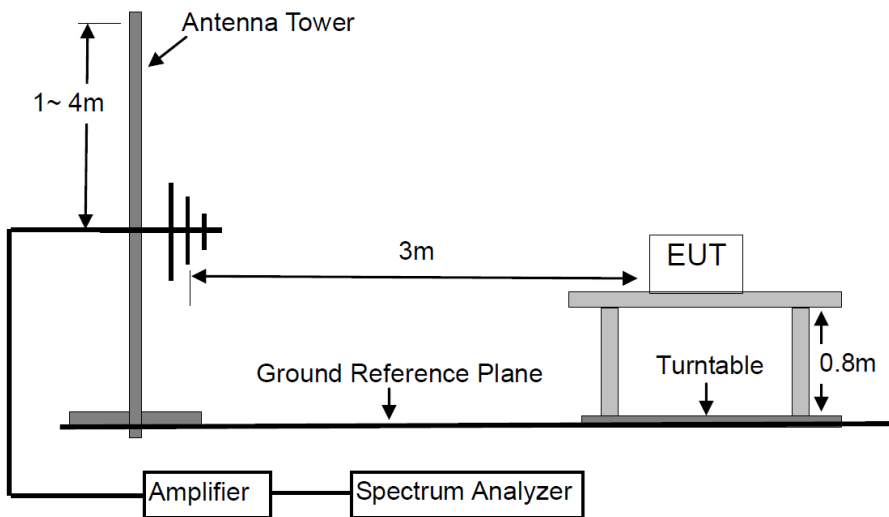

For Radiated Emission Above 1000MHz.

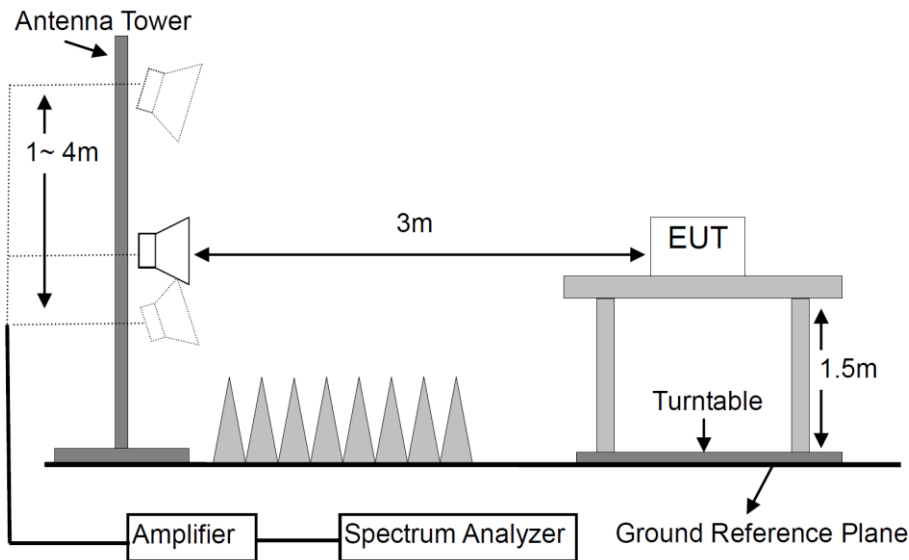

## TEST PROCEDURES

- a. Below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi- anechoic chamber room.
- b. For the radiated emission test above 1GHz:  
The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter full anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- c. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to peak detect function and specified bandwidth



with maximum hold mode.

- f. A Quasi-peak measurement was then made for that frequency point for below 1GHz test. PK and AV for above 1GHz emission test.

During the radiated emission test, the spectrum analyzer was set with the following configurations:

Frequency Band (MHz)	Detector	Resolution Bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	3 MHz
	Average	1 MHz	10 Hz

## TEST RESULTS

PASS

Please refer to the following pages.


M/N: LTV-WSDR1	Testing Voltage: DC 4.5V
Polarization: Horizontal	Detector: QP
Test Mode: 1	Distance: 3m

## Radiated Emission Measurement

Date: 2022/6/15

Time: 19:41:58

112.0 dBuV/m

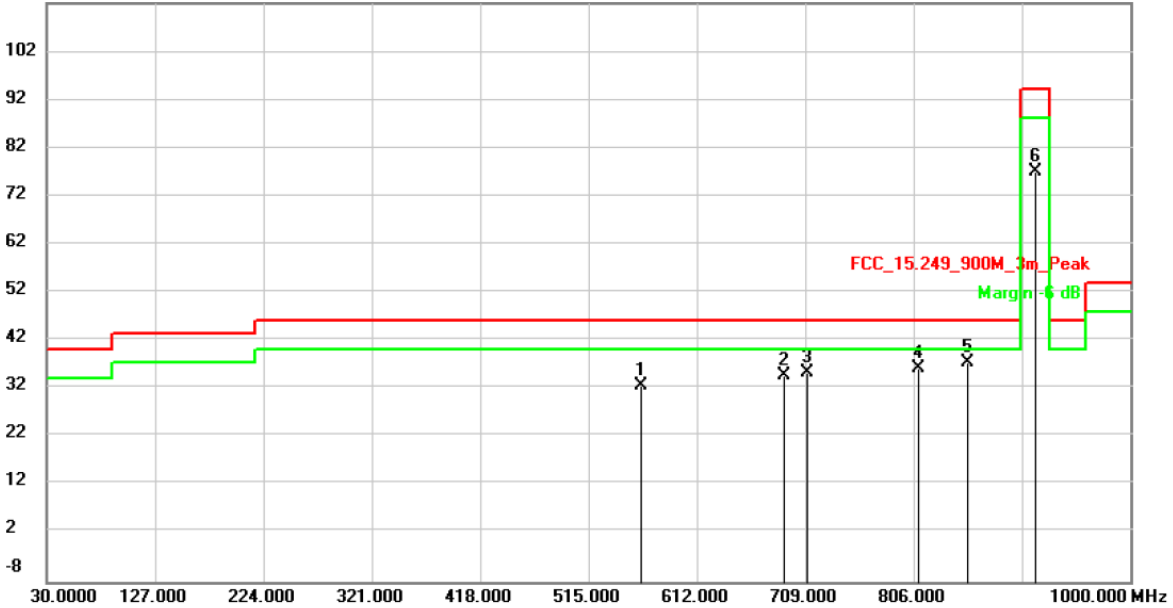

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		562.5300	5.97	26.61	32.58	46.00	-13.42	QP	
2		690.5700	6.16	28.74	34.90	46.00	-11.10	QP	
3		710.9400	6.16	29.10	35.26	46.00	-10.74	QP	
4		809.8800	5.66	30.50	36.16	46.00	-9.84	QP	
5	*	854.5000	6.04	31.35	37.39	46.00	-8.61	QP	
6		915.0000	43.91	33.06	76.97	94.00	-17.03	QP	


Note: Below 30MHz, the emissions are lower than 20dB below the allowable limit.

M/N: LTV-WSDR1	Testing Voltage: DC 4.5V
Polarization: Vertical	Detector: QP
Test Mode: 1	Distance: 3m

## Radiated Emission Measurement

Date: 2022/6/15

Time: 19:48:03

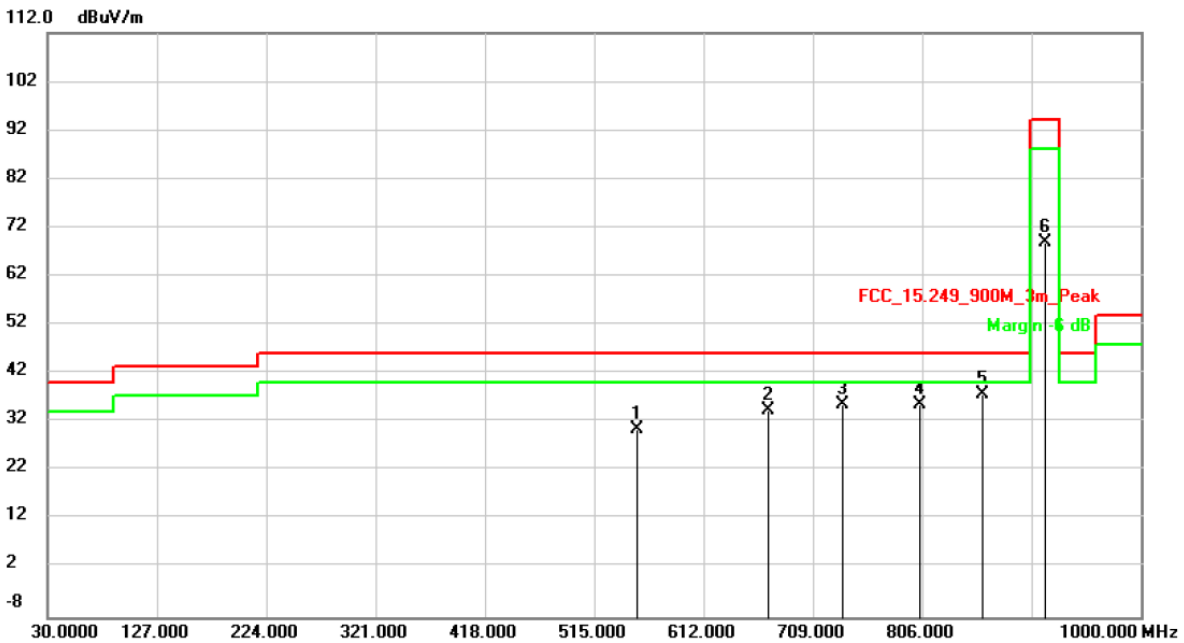

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		552.8300	5.14	25.40	30.54	46.00	-15.46	QP	
2		669.2300	6.25	28.34	34.59	46.00	-11.41	QP	
3		735.1900	6.12	29.44	35.56	46.00	-10.44	QP	
4		804.0600	5.17	30.37	35.54	46.00	-10.46	QP	
5	*	859.3500	6.21	31.41	37.62	46.00	-8.38	QP	
6		915.0000	37.20	31.82	69.02	94.00	-24.98	QP	


Note: Below 30MHz, the emissions are lower than 20dB below the allowable limit.

M/N: LTV-WSDR1	Testing Voltage: DC 4.5V
Polarization: Horizontal	Detector: QP
Test Mode: 1	Distance: 3m

## Radiated Emission Measurement

Date: 2022/6/15

Time: 19:28:31

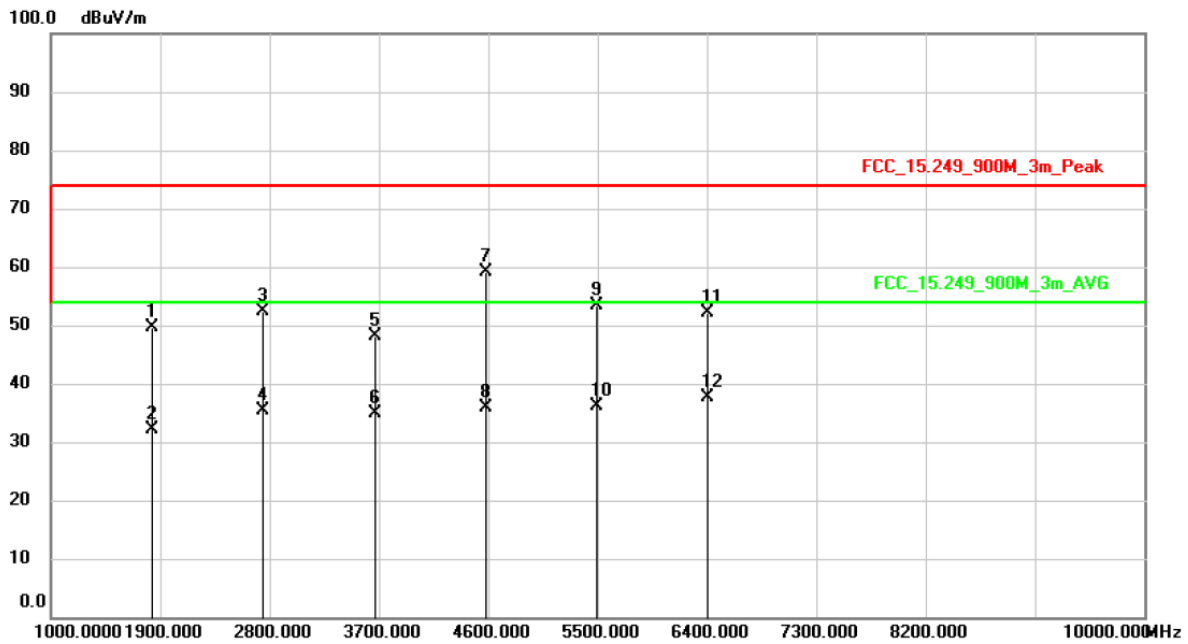


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1		1830.000	52.82	-3.10	49.72	74.00	-24.28	peak	
2		1830.000	35.16	-3.10	32.06	54.00	-21.94	AVG	
3		2745.000	51.19	1.26	52.45	74.00	-21.55	peak	
4		2745.000	34.00	1.26	35.26	54.00	-18.74	AVG	
5		3660.000	45.01	3.06	48.07	74.00	-25.93	peak	
6		3660.000	31.72	3.06	34.78	54.00	-19.22	AVG	
7	*	4575.000	53.85	5.40	59.25	74.00	-14.75	peak	
8		4575.000	30.52	5.40	35.92	54.00	-18.08	AVG	
9		5490.000	46.57	6.80	53.37	74.00	-20.63	peak	
10		5490.000	29.34	6.80	36.14	54.00	-17.86	AVG	
11		6405.000	44.52	7.68	52.20	74.00	-21.80	peak	
12		6405.000	29.83	7.68	37.51	54.00	-16.49	AVG	

M/N: LTV-WSDR1	Testing Voltage: DC 4.5V
Polarization: Vertical	Detector: QP
Test Mode: 1	Distance: 3m

## Radiated Emission Measurement

Date: 2022/6/15

Time: 19:35:29

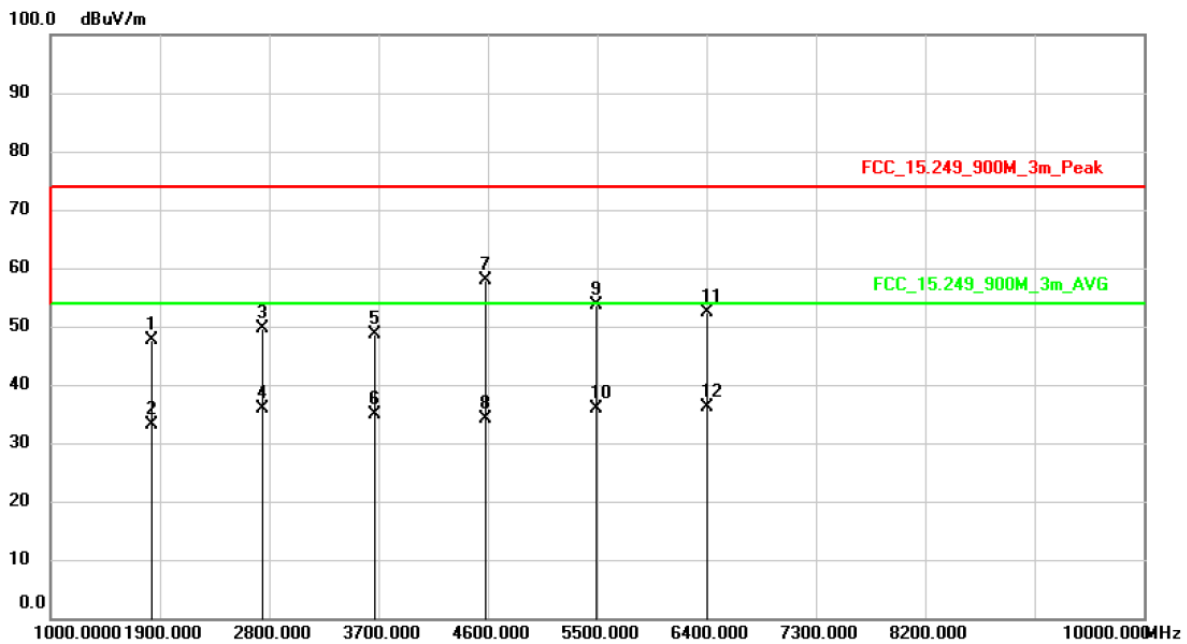

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	1830.000	50.72	-3.10	47.62	74.00	-26.38	peak	
2	1830.000	36.26	-3.10	33.16	54.00	-20.84	AVG	
3	2745.000	48.36	1.26	49.62	74.00	-24.38	peak	
4	2745.000	34.66	1.26	35.92	54.00	-18.08	AVG	
5	3660.000	45.68	3.06	48.74	74.00	-25.26	peak	
6	3660.000	31.86	3.06	34.92	54.00	-19.08	AVG	
7 *	4575.000	52.45	5.40	57.85	74.00	-16.15	peak	
8	4575.000	28.78	5.40	34.18	54.00	-19.82	AVG	
9	5490.000	46.95	6.80	53.75	74.00	-20.25	peak	
10	5490.000	29.10	6.80	35.90	54.00	-18.10	AVG	
11	6405.000	44.70	7.68	52.38	74.00	-21.62	peak	
12	6405.000	28.50	7.68	36.18	54.00	-17.82	AVG	


M/N: LTV-WSDR1	Testing Voltage: DC 4.5V
Polarization: Horizontal	Detector: QP
Test Mode: 1	Distance: 3m

## Radiated Emission Measurement

Date: 2022/6/15

Time: 19:54:27

102.0 dBuV/m

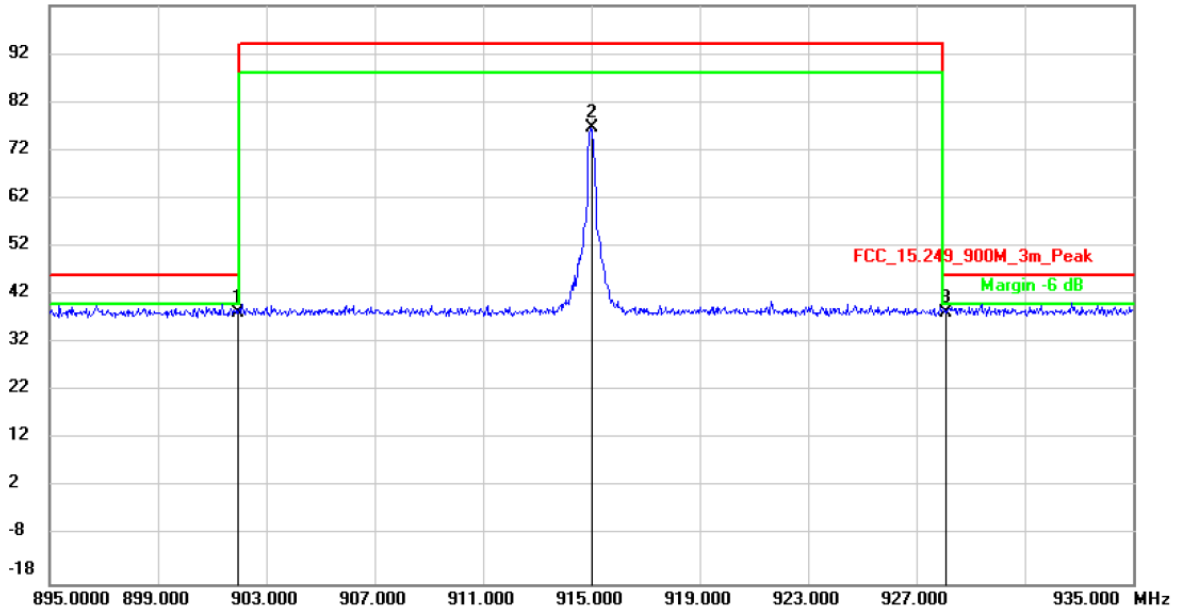

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1		901.9600	5.22	32.99	38.21	46.00	-7.79	peak	
2		915.0000	43.64	33.06	76.70	94.00	-17.30	peak	
3	*	928.0800	5.10	33.14	38.24	46.00	-7.76	peak	

Note: The measured peak values are below the specified Quai-Peak limits, thus the QP values are considered compliance with the limits as well.


M/N: LTV-WSDR1	Testing Voltage: DC 4.5V
Polarization: Vertical	Detector: QP
Test Mode: 1	Distance: 3m

## Radiated Emission Measurement

Date: 2022/6/15

Time: 20:00:47

102.0 dBuV/m

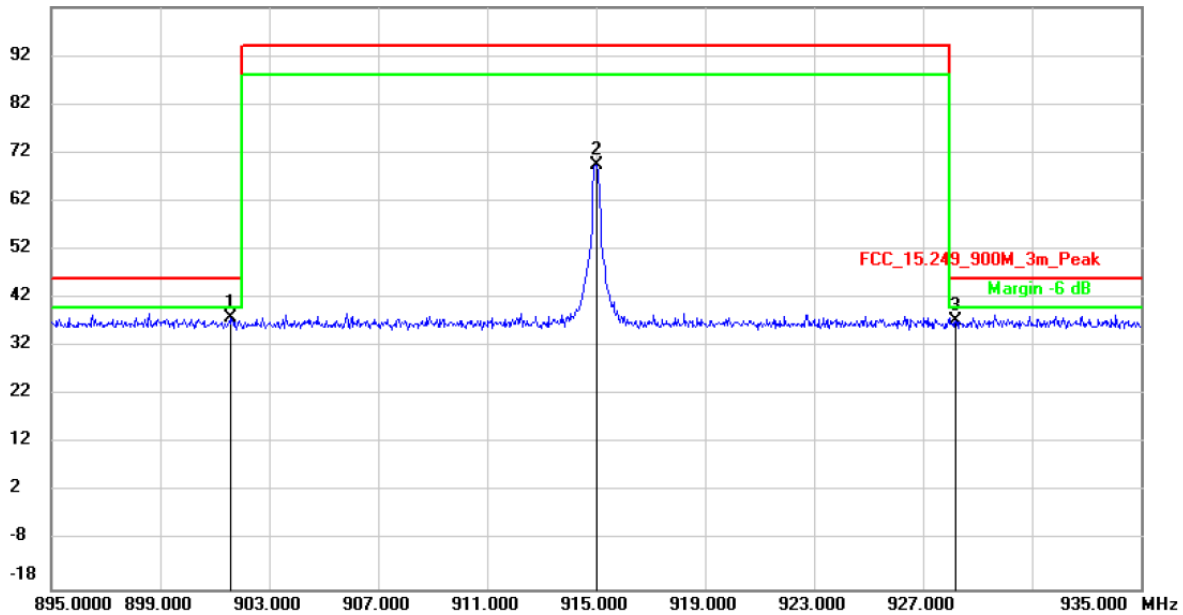

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	*	901.5600	6.12	31.75	37.87	46.00	-8.13	peak	
2		915.0000	37.76	31.82	69.58	94.00	-24.42	peak	
3		928.2000	5.44	31.90	37.34	46.00	-8.66	peak	


Note: The measured peak values are below the specified Quai-Peak limits, thus the QP values are considered compliance with the limits as well.

### 13.3 20dB Bandwidth Measurement

#### LIMIT

There is no limit.

#### BLOCK DIAGRAM OF TEST SETUP



#### TEST PROCEDURES

The 20dB bandwidth of the emission was contained within the frequency band designated which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over excepted variations in temperature and supply voltage were considered, FCC Rule 15.215(c):

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RBW was chosen so that the display was a result of the hopping channel modulation. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. Use the spectrum 20dB down delta function to measure the bandwidth.


#### TEST RESULTS

PASS

Please refer to the following table.



ASK			
Channel	Frequency (MHz)	20dB Bandwidth (KHz)	Result
1	915	355.5	PASS

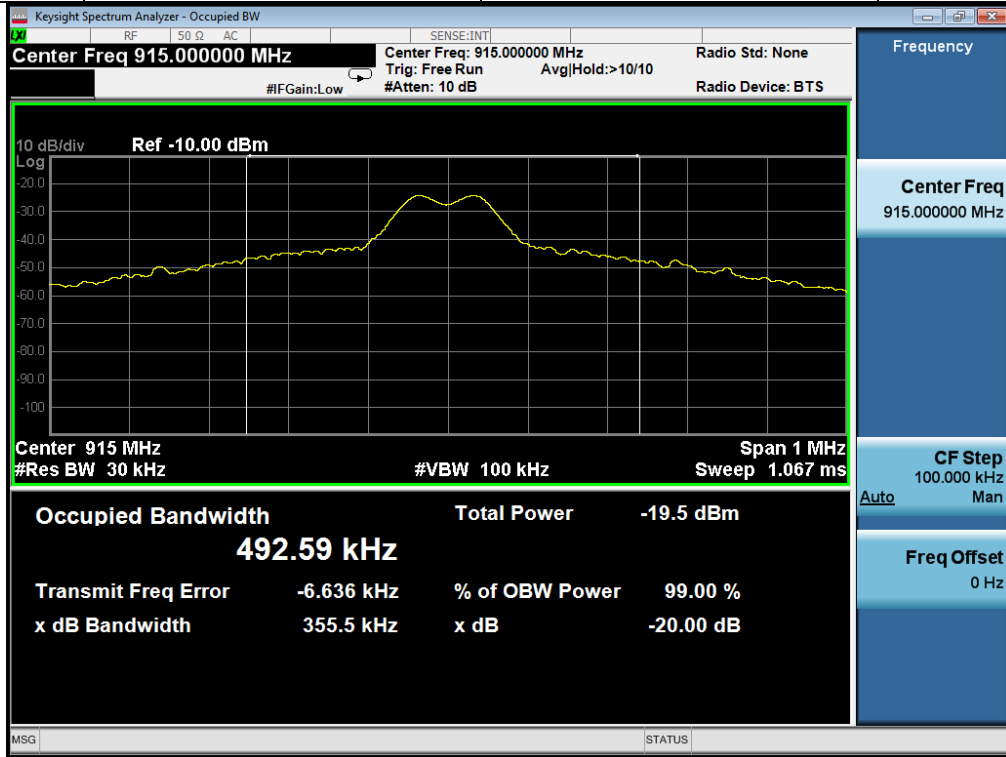

---

## **13.4 Antenna Requirement**

### **STANDARD APPLICABLE**

According to of FCC part 15C section 15.203 and 15.249:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### **ANTENNA CONNECTED CONSTRUCTION**

The antenna is PCB antenna that no antenna other than furnished by the responsible party shall be used with the device, and the best case gain of the antenna is 0 dBi, Therefore, the antenna is consider meet the requirement.

## 14. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESCI7	100837	Mar. 13, 2022	1 Year
2.	Antenna	Schwarzbeck	VULB9162	9162-010	Mar. 23, 2022	2 Year
3.	Spectrum Analyzer	Rohde & Schwarz	FSU26	200409/026	Mar. 13, 2022	1 Year
4.	Spectrum Analyzer	Keysight	N9020A	MY54200831	Mar. 13, 2022	1 Year
5.	Spectrum Analyzer	Rohde & Schwarz	FSV40	101094	Mar. 13, 2022	1 Year
6.	Horn Antenna	Schwarzbeck	BBHA9170	9170-172	Mar. 23, 2022	2 Year
7.	Power Sensor	DARE	RPR3006W	15I00041SNO 64	Mar. 13, 2022	1 Year
8.	Horn Antenna	COM-Power	AH-118	071078	Mar. 23, 2022	2 Year
9.	Pre-Amplifier	HP	HP 8449B	3008A00964	Mar. 13, 2022	1 Year
10.	Pre-Amplifier	HP	HP 8447D	1145A00203	Mar. 13, 2022	1 Year
11.	Loop Antenna	Schwarzbeck	FMZB 1513	1513-272	Mar. 23, 2022	2 Year
12.	Test Receiver	Rohde & Schwarz	ESCI	101152	Mar. 13, 2022	1 Year
13.	L.I.S.N	Rohde & Schwarz	ENV 216	101317	Mar. 13, 2022	1 Year
14.	RF Switching Unit	Compliance Direction Systems Inc.	RSU-M2	38311	Mar.13, 2022	1 Year
15.	Temporary antenna connector	TESCOM	SS402	N/A	N/A	N/A
16.	Test Software	EZ	EZ_EMCC	N/A	N/A	N/A

Note: For photographs of EUT and measurement, please refer to appendix in separate documents.

---End---