



Produkte
Products

Prüfbericht - Nr.: 50004839 001		Seite 1 von 38 Page 1 of 38			
<i>Test Report No.:</i>					
Auftraggeber: <i>Client:</i>	CATEYE Co., Ltd. 2-8-25, Kuwazu, Higashi-Sumiyoshi-Ku, Osaka, 546-0041 Japan				
Gegenstand der Prüfung: <i>Test Item:</i>	STRADA SMART				
Bezeichnung: <i>Identification:</i>	CC-RD500B	Serien-Nr.: <i>Serial No.:</i>	BT1, A000068916-1		
Wareneingangs-Nr.: <i>Receipt No.:</i>	A000068916	Eingangsdatum: <i>Date of Receipt:</i>	2014-06-02		
Zustand des Prüfgegenstandes bei Anlieferung: Good <i>Condition of Test Item at Delivery:</i>					
Prüfört: <i>Testing Location:</i>	TÜV Rheinland Japan Ltd. – Global Technology Assessment Center 4-25-2 Kita-Yamata, Tsuzuki-ku, Yokohama 224-0021, Japan				
Prüfgrundlage: <i>Test Specification:</i>	FCC 47 CFR Part 15, Subpart C, Section 15.249 (October 1, 2013) ANSI C63.10-2009 RSS-210 (Issue 8): 2010 RSS-Gen (Issue 3): 2010 ANSI C63.10-2009				
Prüfergebnis: <i>Test Result:</i>	Der Prüfgegenstand entspricht oben genannter Prüfgrundlage(n). The test item passed the test specification(s).				
Prüflaboratorium: <i>Testing Laboratory:</i>	TÜV Rheinland Japan Ltd. – Global Technology Assessment Center 4-25-2 Kita-Yamata, Tsuzuki-ku, Yokohama 224-0021, Japan				
geprüft/ tested by:		kontrolliert/ reviewed by:			
2014-10-14	P. Zhang / Inspector	2014-10-14	R. Meiranke / Reviewer		
Datum <i>Date</i>	Name/Stellung <i>Name/Position</i>	Unterschrift <i>Signature</i>	Datum <i>Date</i>	Name/Stellung <i>Name/Position</i>	Unterschrift <i>Signature</i>
Sonstiges / Other Aspects:					
Abkürzungen: P(ass) = entspricht Prüfgrundlage F(ail) = entspricht nicht Prüfgrundlage N/A = nicht anwendbar N/T = nicht getestet			Abbreviations: P(ass) = passed F(ail) = failed N/A = not applicable N/T = not tested		
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. This test report relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any safety mark on this or similar products.					

Prüfbericht - Nr.: 50004839 001
Test Report No.:

Seite 2 von 38
Page 2 of 38

TEST SUMMARY

5.1.1 SUPPLY VOLTAGE REQUIREMENTS

RESULT: PASS

5.1.2 ANTENNA REQUIREMENTS

RESULT: PASS

5.1.3 RESTRICTED BANDS OF OPERATION

RESULT: PASS

5.2.1 CONDUCTED OUTPUT POWER

5.3.1 DUTY CYCLE

5.3.2 20dB BANDWIDTH

RESULT: PASS

5.3.3 99% BANDWIDTH

5.3.4 FIELD STRENGTH OF FUNDAMENTAL

RESULT: Pass

5.3.5 RADIATED SPURIOUS EMISSIONS OF TRANSMITTER

RESULT: PASS

5.4.1 AC POWER LINE CONDUCTED EMISSION OF TRANSMITTER

RESULT: N/A

Produkte
Products

Prüfbericht - Nr.: 50004839 001

Seite 3 von 38

Test Report No.:

Page 3 of 38

Contents

1.	GENERAL REMARKS	5
1.1	COMPLEMENTARY MATERIALS	5
2.	TEST SITES	5
2.1	TEST FACILITIES	5
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS	6
2.3	MEASUREMENT UNCERTAINTY	7
3.	GENERAL PRODUCT INFORMATION	8
3.1	PRODUCT FUNCTION AND INTENDED USE	8
3.2	SYSTEM DETAILS	8
3.3	CLOCK FREQUENCIES	8
3.4	NOISE SUPPRESSING PARTS	8
4.	TEST SET-UP AND OPERATION MODES	9
4.1	TEST METHODOLOGY	9
4.2	OPERATION MODES	9
4.3	PHYSICAL CONFIGURATION FOR TESTING	9
4.4	TEST SOFTWARE	11
4.5	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	12
4.6	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE	12
5.	TEST RESULTS RADIO	13
5.1	TECHNICAL REQUIREMENTS	13
5.1.1	Supply Voltage Requirements	13
5.1.2	Antenna Requirements	13
5.1.3	Restricted Bands of Operation	14
5.2	CONDUCTED MEASUREMENTS AT ANTENNA	15
5.2.1	Conducted Output Power	15
5.3	RADIATED MEASUREMENTS	16
5.3.1	Duty Cycle	16
5.3.2	20dB Bandwidth	17
5.3.3	99% Bandwidth	20
5.3.4	Field Strength of Fundamental	23
5.3.5	Radiated Spurious Emissions of Transmitter	26
5.4	AC POWER LINE CONDUCTED MEASUREMENTS	32
5.4.1	AC Power Line Conducted Emission of Transmitter	32
6.	PHOTOGRAPHS OF THE TEST SETUP	33

Produkte
Products

Prüfbericht - Nr.: 50004839 001
Test Report No.:

Seite 4 von 38
Page 4 of 38

7.	LIST OF TABLES.....	37
8.	LIST OF FIGURES	37
9.	LIST OF PHOTOGRAPHS	38

1. General Remarks

1.1 Complementary Materials

There is no attachment to this test report.

2. Test Sites

2.1 Test Facilities

TÜV Rheinland Japan Ltd. – Global Technology Assessment Center
4-25-2 Kita-Yamata, Tsuzuki-ku, Yokohama 224-0021, Japan

The used test equipment is in accordance with CISPR 16 for measurement of radio interference.

The Federal Communications Commission has reviewed the technical characteristics of the radiated and conducted emission facilities and has found these test sites to be in compliance with the requirements of section 2.948 of the FCC rules. The description of the test facility is listed under FCC registration number 299054.

The Industry Canada has reviewed the technical characteristics of the radiated and conducted emission facilities and has found these test sites to be in compliance with Canadian requirements. The description of the test facility is listed under OATS filing number 3466B-1.

The test facility is accredited by VLAC (member of ILAC) under number VLAC-017 according to ISO/IEC 17025:2005.



TÜV Rheinland Japan Ltd. is accredited by the Federal Communications Commission as a Conformity Assessment Body under Designation Number JP0017 and Test Firm Registration Number 386498.

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Kind of Equipment	Manufacturer	Model Name	Serial Number	Equipment ID	Calibrated until
For Antenna Port Conducted Emission					
Receiver	Rohde & Schwarz	ESU 8	100025	RF-0020	2014-09
RF Power Meter	Agilent	N1911A	MY451017 37	RF-0393	2014-11
RF Peak Power Sensor	Agilent	N1921A	MY452422 28	RF-0394	2014-11
For Radiated Emission					
Receiver	Rohde & Schwarz	ESU 8	100025	RF-0020	2014-09
Receiver	Rohde & Schwarz	ESU 40	100029	RF-0021	2015-03
RF Selector (10m Chamber)	Toyo Corporation	NS4900	0703-182	RF-0029	2014-11
Loop Antenna with Amplifier, 9kHz-30MHz	Rohde & Schwarz	HFH2-Z2	100139	RF-0048	2015-02
Trilog Antenna No. 2, 30-1000MHz	Schwarzbeck	VULB9168	9168-475	RF-0462	2015-01
3dB Attenuator	Tamagawa Electronics	CFA-01	-	RF-0265	2014-11
Low Noise Preamplifier, 9kHz-1GHz	TSJ	MLA-10K01-B01-35	1370750	RF-0253	2014-11
Low Pass Filter, DC-1GHz	R&K	LP1000CH3	12104001	RF-0515	2014-11
Horn Antenna, 1-8GHz	Schwarzbeck	BBHA9120D	1059	RF-0553	2015-05
Microwave Preamplifier, 1-8GHz	Toyo Corporation	TPA0108-40	0634	RF-0052	2014-11
Band Reject Filter, 1-8GHz	Nitsuki	NF-49BT	027	RF-0131	2014-11
Horn Antenna with Preamplifier, 8-18GHz	Toyo Corporation	HAP06-18W	00000025	RF-0065	2015-05
High Pass Filter, 8-18GHz	Micro-Tronics	HPM50107	006	RF-0334	2015-05
Horn Antenna with Preamplifier, 18-26.5GHz	Toyo Corporation	HAP18-26N	00000010	RF-0070	2015-05
Power Accessories					
True RMS Multimeter	Fluke	87V	16110176	RF-0414	2014-07

Conformance of the used measurement and test equipment with the requirements of ISO/IEC 17025:2005 has been confirmed before testing.

2.3 Measurement Uncertainty

Table 2: Emission Measurement Uncertainty

Measurement Type	Frequency	Uncertainty
Antenna Port Conducted Emission	20Hz - 40GHz	±1.5dB
Radiated Emission	150kHz - 30MHz	±4.7dB
	30MHz - 1GHz	±4.7dB
	> 1GHz	±4.7dB

3. General Product Information

3.1 Product Function and Intended Use

The EUT (Equipment Under Test) is a Bluetooth Strada Smart to be installed on a bicycle. It can transmit speed information to a remote device via Bluetooth.

3.2 System Details

Radio standard:	Bluetooth 4.0 LE
Specified output power:	-2.87dBm (Conducted, Peak)
Antenna gain:	-6.77dBi
Antenna type:	Pattern antenna
Antenna mounting type:	On board
Frequency range:	2402 - 2480MHz
Number of channels:	40
	$f = 2402\text{MHz} + k \cdot 2\text{MHz}$, where $k=0, 1, \dots, 39$
Channel spacing:	2MHz
Modulation type:	GFSK
FCC classification:	DTS
IC classification:	Bluetooth Device
Emission designator:	F1D
Rated voltage:	DC 3.0V
Rated current:	Max. 1.5mA
Protection class:	III
Test voltage:	DC 3.0V

3.3 Clock Frequencies

The highest frequency generated or used by the EUT is 16MHz for the Radio portion. For the details, refer to schematics.

3.4 Noise Suppressing Parts

Refer to schematics.

4. Test Set-up and Operation Modes

4.1 Test Methodology

The test methodology used is based on the requirements of 47 CFR Part 15, Sections 15.31, 15.33, 15.35, 15.205, 15.209 and 15.249.

The test methods, which have been used, are based on ANSI C63.10-2009 and RSS-Gen (Issue 3).

For details, see under each test item.

4.2 Operation Modes

Testing was performed at the lowest operating frequency (2402MHz), at the operating frequency in the middle of the specified frequency band (2442MHz) and at the highest operating frequency (2480MHz).

The basic operation modes used for testing are:

- A. EUT transmits (TX mode), with full power, at lowest channel (2402MHz), a continuous modulated signal streaming with 100% duty cycle.
- B. EUT transmits (TX mode), with full power, at middle channel (2442MHz), a continuous modulated signal streaming with 100% duty cycle.
- C. EUT transmits (TX mode), with full power, at highest channel (2480MHz), a continuous modulated signal streaming with 100% duty cycle.

4.3 Physical Configuration for Testing

The test system was configured in a typical fashion. USB to serial port adaptor and Laptop were connected for testing only.

The justification and manipulation of cables and equipment in order to simulate a worst-case behavior of the test setup has been carried out as prescribed in ANSI C63.10-2009.

Figure 1: Test Setup of Conducted Radio Testing


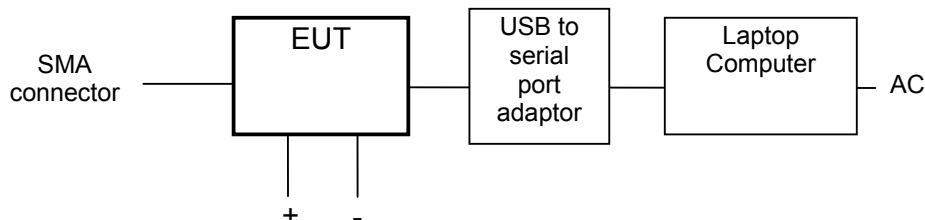


Figure 2: Test Setup of Radiated Radio Testing

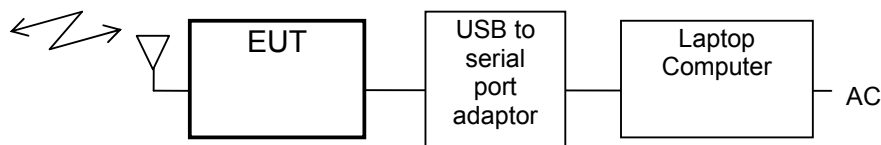

Notes:

USB to serial port adaptor and Laptop computer were disconnected after the test mode setting. These were out of chamber during test.

Serial No. BT1 was for Conducted Radio Test. Serial No. A000068916-1 was for Radiated Radio Test.

Table 3: Interfaces present on the EUT

No.	Interface	Cable Length for Testing, Shielding	Interface Classification
1.	Battery Power Line (Conducted Radio test only)	0.2m, un-shielded	DC input power port
2.	Signal line (Between EUT and USB to serial port adaptor)	0.2m, un-shielded	Signal port

Notes:

For more details, refer to section: Photographs of the Test Set-Up.


4.4 Test Software

The EUT was provided by the manufacturer with suitable software to allow operation in all the required modes.

Software used for testing: nRFgo Studio version 1.16.1.3119 by Nordic Semiconductor ASA.

This software was running on the laptop computer connected to the EUT. It was used to enable the test operation modes listed in section 4.2 as appropriate.

Figure 3: Software Version

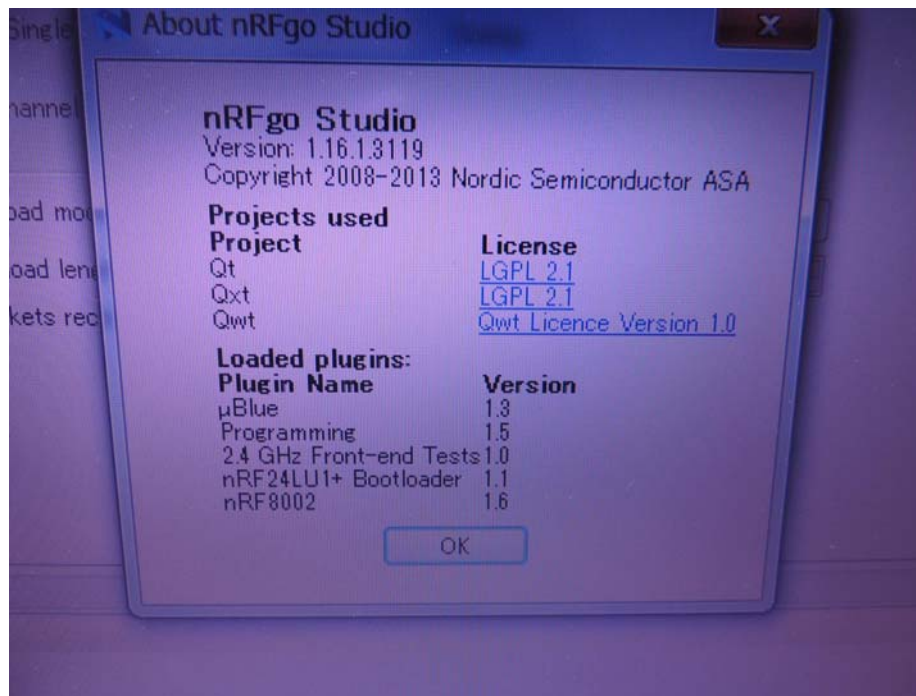

4.5 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

1. Product: Laptop Computer
Manufacturer: Panasonic
Model: CF-T9JWFCPS
Rated Voltage: DC 16V
Protection Class: III
Serial Number: 0DKSA02735

2. Product: AC Adaptor for Laptop Computer
Manufacturer: Panasonic
Model: CF-AA6372A M3
Rated Voltage: 100V-240V
Input Current: 1.5A
Frequency: 50-60Hz
Protection Class: II
Serial Number: 6372AM310201996J

3. Product: Serial Adaptor
Manufacturer: IO DATA
Model: USB-RSAQ3
Rated Voltage: USB 5V
Protection Class: III
Serial Number: V1E0035358BT

4.6 Countermeasures to achieve EMC Compliance

No additional measures were employed to achieve compliance.

5. Test Results RADIO

5.1 Technical Requirements

5.1.1 Supply Voltage Requirements

RESULT: **PASS**

Requirements:

FCC 15.31(e)

For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a new battery.

Verdict:

The EUT is battery operated and it was tested with a new battery. Hence it complies with the supply voltage requirements.

5.1.2 Antenna Requirements

RESULT: **PASS**

Requirements:

FCC 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Verdict:

The EUT has an internal antenna which is not user accessible. Hence it complies with the antenna requirements.

Prüfbericht - Nr.: 50004839 001
Test Report No.:

Seite 14 von 38
Page 14 of 38

5.1.3 Restricted Bands of Operation

RESULT:

PASS

Requirements:

FCC 15.205 and RSS-Gen 7.2.2

Only spurious emissions are permitted in any of the restricted frequency bands, unless otherwise specified.

Verdict:

The EUT operation frequency range is 2402 - 2480MHz. Therefore only spurious emissions may be found in the restricted bands of operation and the EUT complies with the restricted frequency band requirement.

5.2 Conducted Measurements at Antenna

5.2.1 Conducted Output Power

Date of testing: 2014-07-11

Ambient temperature: 24°C

Relative humidity: 68%

Atmospheric pressure: 998hPa

Requirements:

RSS-Gen (Issue 3) §4.8

Transmitter output power measurements shall be carried out before the unwanted emissions test.

Test procedure:

RSS-Gen (Issue 3) §4.8

The maximum peak output power (conducted) was measured at the antenna connector with a power meter. Average power was taken as reference.

Table 4: Conducted Output Power

Frequency [MHz]	Peak Power [dBm]	Average Power [dBm]
2402	-2.878	-2.968
2442	-3.038	-3.108
2480	-3.158	-3.248

5.3 Radiated Measurements

5.3.1 Duty Cycle

Date of testing: 2014-07-07


Ambient temperature: 25°C
Relative humidity: 69%
Atmospheric pressure: 1010hPa

Requirements:
FCC 15.35(c) and RSS-Gen 4.5

Test procedure:
ANSI C63.10-2009

Note: The duty cycle of the EUT is 100% for testing purpose as shown in figure 4.

Figure 4: Duty Cycle, Mode B (2442MHz)

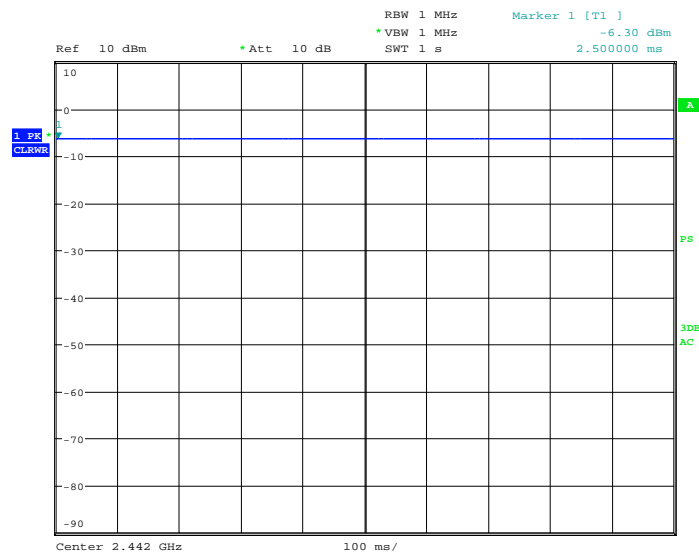

Prüfbericht - Nr.: 50004839 001

Seite 17 von 38

Test Report No.:

Page 17 of 38

5.3.2 20dB Bandwidth

RESULT:

PASS

Date of testing: 2014-07-01

Ambient temperature: 24°C

Relative humidity: 68%

Atmospheric pressure: 1007hPa

Requirements:

FCC 15.215(c) and FCC 15.249

The 20dB bandwidth of the emission shall be contained within the frequency band designated in the rule section under which the equipment is operated.

Test procedure:

ANSI C63.10-2009.

The EUT was placed on a nonconductive turntable 0.8m above the ground plane. Measurements were made at 3m distance. The EUT was rotated 360° and the antenna was raised and lowered from 1 to 4m in order to determine the emission's maximum level.

Measurements were taken using both horizontal and vertical antenna polarizations for 3 EUT orientations (X, Y and Z). The results corresponding to the worst case antenna polarization and EUT orientation are recorded in this report.

Measurements were performed using a spectrum analyzer with a suitable span to encompass the peak of the fundamental and using the following settings: RBW = 100kHz, VBW = 100kHz.

Table 5: 20dB Bandwidth Edge Frequencies

Operating Frequency [MHz]	EUT / Antenna Orient.	Edge Frequency [MHz]	Limit [MHz]	Margin [MHz]
2402	X / H	2401.3	2400	1.3
2480	X / H	2480.6	2483.5	2.9

Table 6: 20dB Bandwidth

Operating Frequency [MHz]	EUT / Antenna Orient.	20dB Bandwidth [MHz]
2402	X / H	1.306
2442	X / H	1.298
2480	X / H	1.290

Figure 5: 20dB Bandwidth, Mode A (2402MHz)



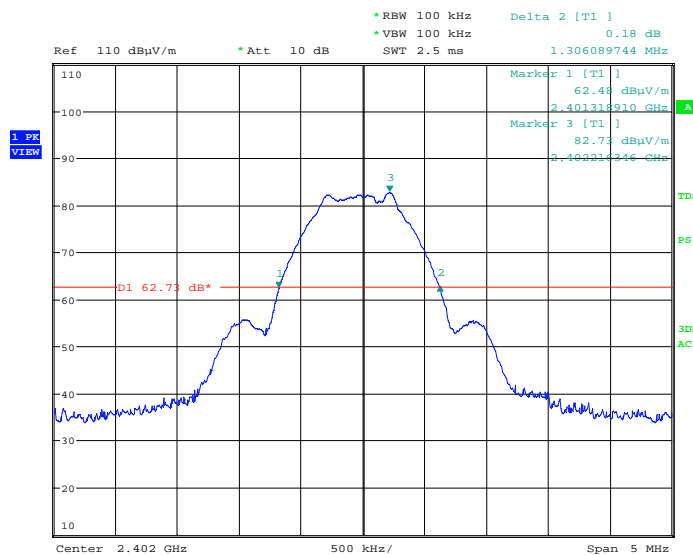


Figure 6: 20dB Bandwidth, Mode B (2442MHz)

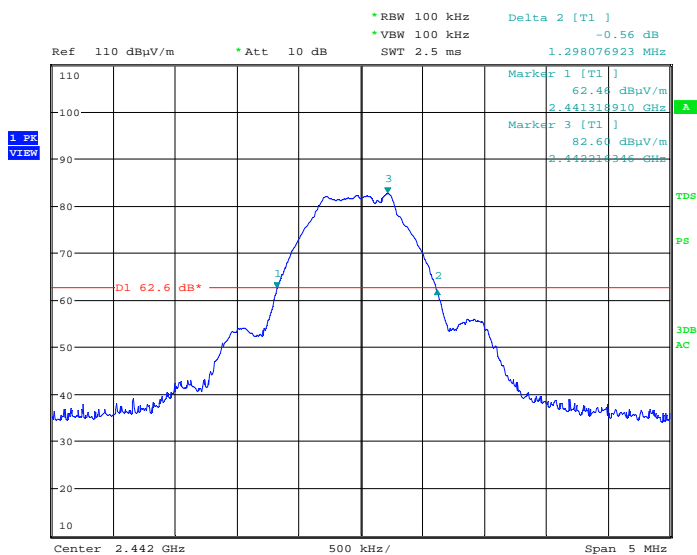

CC-RD500B, 20dB BW, 2.442GHz, X, Hor
Date: 1.JUL.2014 16:35:01

Figure 7: 20dB Bandwidth, Mode C (2480MHz)

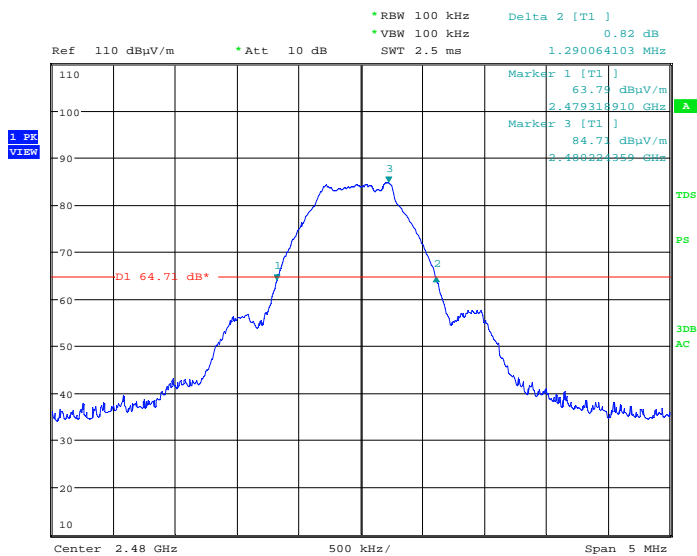

CC-RD500B, 20dB BW, 2.480GHz, X, Hor
Date: 1.JUL.2014 17:13:40

Prüfbericht - Nr.: 50004839 001

Seite 20 von 38

Test Report No.:

Page 20 of 38

5.3.3 99% Bandwidth

Date of testing: 2014-07-11

Ambient temperature: 24°C

Relative humidity: 68%

Atmospheric pressure: 998hPa

Requirements:

RSS-Gen 4.6.1

The 99% bandwidth shall be reported according to RSS-Gen 4.6.1.

Test procedure:

RSS-Gen 4.6.1.

The EUT was placed on a nonconductive turntable 0.8m above the ground plane. Measurements were made at 3m distance. The EUT was rotated 360° and the antenna was raised and lowered from 1 to 4m in order to determine the emission's maximum level.

Measurements were taken using both horizontal and vertical antenna polarizations for 3 EUT orientations (X, Y and Z). The results corresponding to the worst case antenna polarization and EUT orientation are recorded in this report.

Final measurements were performed using a spectrum analyzer with the resolution bandwidth set to 1MHz (1% of the span) and the video bandwidth to 3MHz. The 99% bandwidth was measured by using the OBW function of the analyzer with a 99% coverage setting.

Table 7: 99% Bandwidth

Operating Frequency [MHz]	EUT / Antenna Orient.	99% Bandwidth [MHz]
2402	X / H	1.122
2442	X / H	1.122
2480	X / H	1.090

Figure 8: 99% Bandwidth, Mode A (2402MHz)



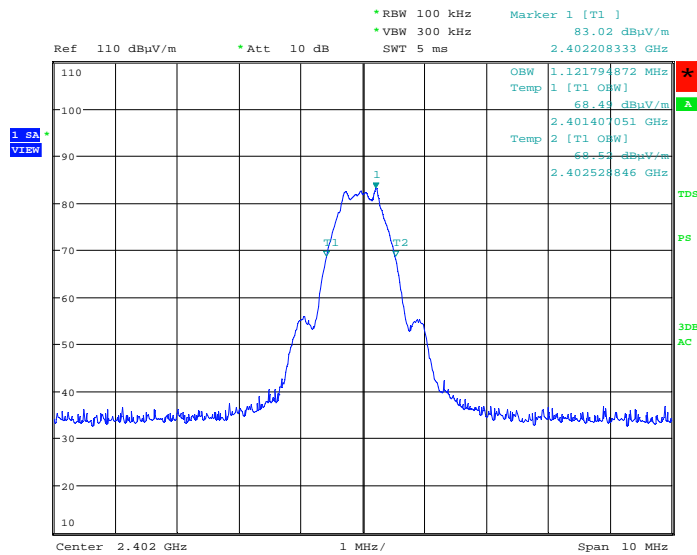


Figure 9: 99% Bandwidth, Mode B (2442MHz)

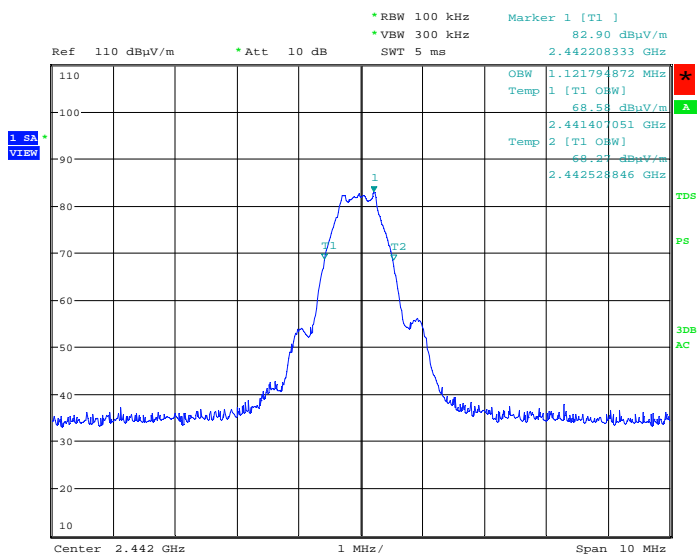

CC-RD500B, 99per BW, 2.442GHz, X, Hor
 Date: 1.JUL.2014 16:37:05

Figure 10: 99% Bandwidth, Mode C (2480MHz)

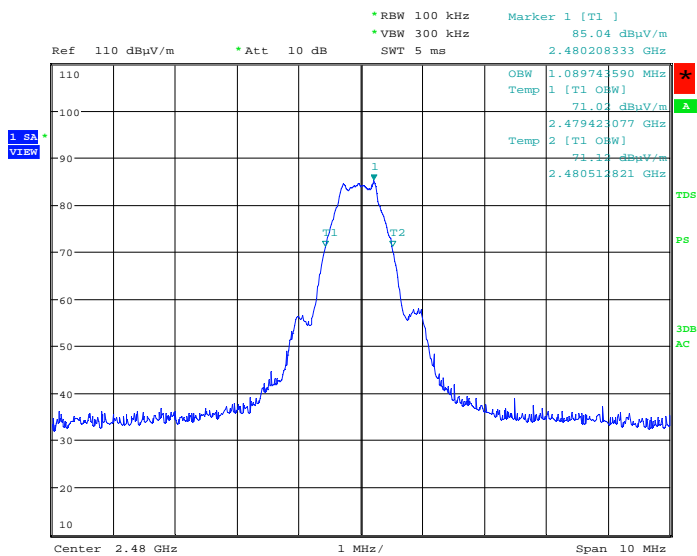

CC-RD500B, 99per BW, 2.480GHz, X, Hor
 Date: 1.JUL.2014 17:15:33

Prüfbericht - Nr.: 50004839 001

Seite 23 von 38

Test Report No.:

Page 23 of 38

5.3.4 Field Strength of Fundamental

RESULT:

Pass

Date of testing: 2014-07-01

Ambient temperature: 24°C

Relative humidity: 68%

Atmospheric pressure: 1007hPa

Measurement distance: 3m

Kind of test site: Semi Anechoic Chamber

Requirements:

FCC 15.249(a) and RSS 210 A2.9(a)

The field strength of fundamental shall not exceed the level specified in FCC 15.249(a) and RSS-210 A2.9(a).

Test procedure:

ANSI C63.10-2009.

The EUT was placed on a nonconductive turntable 0.8m above the ground plane. Measurements were made at 3m distance. The EUT was rotated 360° and the antenna was raised and lowered from 1 to 4m in order to determine the emission's maximum level.

Measurements were taken using both horizontal and vertical antenna polarizations for 3 EUT orientations (X, Y and Z).

Measurements were performed using a spectrum analyzer with a suitable span to encompass the peak of the fundamental and using the following settings: Peak: RBW = 1MHz, VBW = 3MHz, Average: RBW = 1MHz, VBW = 10Hz.

The highest emission amplitudes relative to the appropriate limit were measured and recorded in this report. In the spectra here below, the upper trace corresponds to the peak measurement and the lower trace corresponds to the average measurement.

Table 8: Field Strength of Fundamental

Operating Frequency [MHz]	EUT / Antenna Orient.	Average Value [dBµV/m]	Peak Value [dBµV/m]	Average Limit [dBµV/m]	Peak Limit [dBµV/m]	Average Margin [dB]	Peak Margin [dB]
2401	X / H	83.3	84.0	94.0	114.0	10.7	30.0
2441	X / H	83.2	84.0	94.0	114.0	10.8	30.0
2480	X / H	85.2	86.1	94.0	114.0	8.8	27.9

Notes: All correction factors (antenna, cable, pre-amplifier) are included in the measurement values.
 Average limit in dBµV/m is calculated as follows: Average limit = 20 x log(50000µV/m).
 Peak limit in dBµV/m is calculated as follows: Peak limit = Average limit + 20dB.

Figure 11: Field Strength of Fundamental, Spectral Diagram, Mode A (2402MHz)



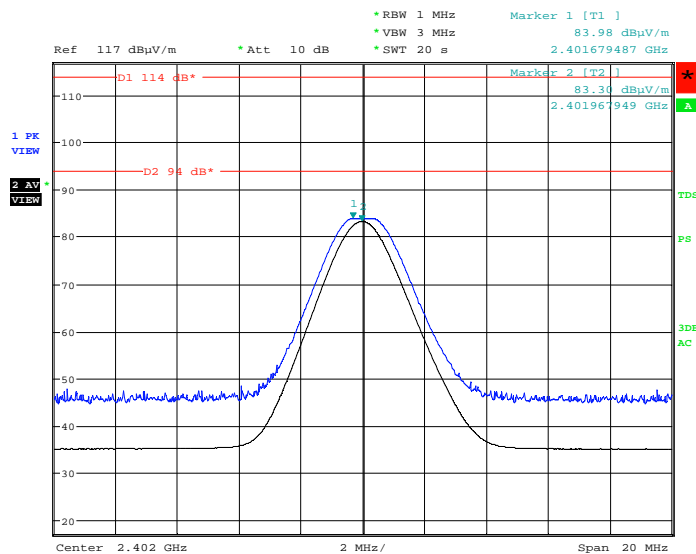


Figure 12: Field Strength of Fundamental, Spectral Diagram, Mode B (2442MHz)

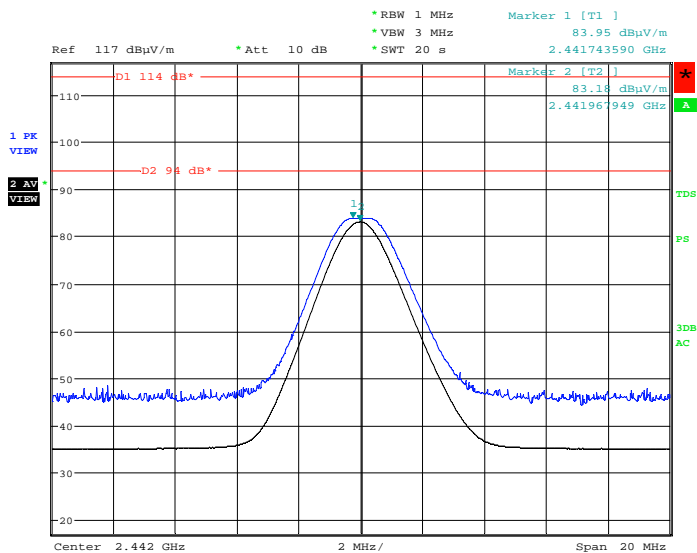

CC-RD500B, FSoF, 2.442GHz, X, Hor
 Date: 1.JUL.2014 16:31:57

Figure 13: Field Strength of Fundamental, Spectral Diagram, Mode C (2480MHz)

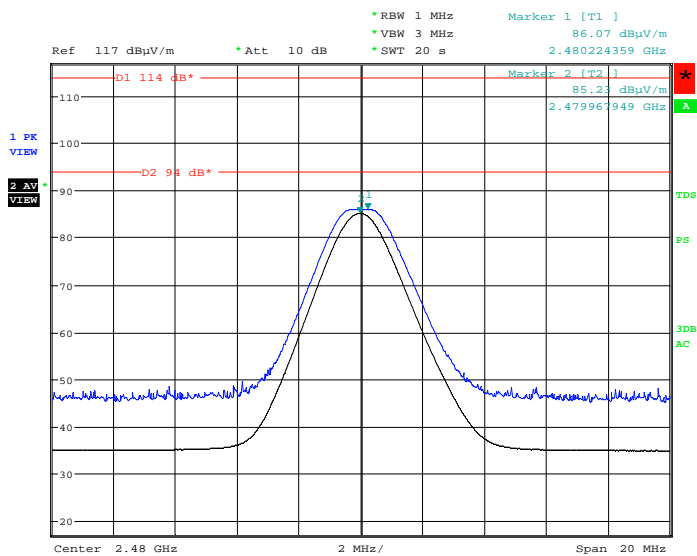

CC-RD500B, FSoF, 2.480GHz, X, Hor
 Date: 1.JUL.2014 17:11:07

5.3.5 Radiated Spurious Emissions of Transmitter

RESULT:

PASS

Date of testing: 2014-06-30, 2014-07-01, 2014-07-02

Ambient temperature: 19, 24, 24°C

Relative humidity: 57, 68, 65%

Atmospheric pressure: 1006, 1007, 1007hPa

Frequency range: 9kHz - 25GHz

Measurement distance: 3m

Kind of test site: Semi Anechoic Chamber

Requirements:

FCC 15.209, FCC 15.249(a), FCC 15.249(d), RSS-Gen 7.2.2 and 7.2.5 and RSS-210 2.1, 2.2, 2.5, A2.9(a) and A2.9(b)

Emission radiated outside the specified frequency bands must comply with the radiated emission limits specified in FCC 15.209(a), FCC 15.249(a), RSS-Gen 7.2.5 (tables 5 and 6) and RSS-210 A2.9(a).

Test procedure:

ANSI C63.10-2009 and RSS-Gen 4.9 and 7.2

The EUT was placed on a nonconductive turntable 0.8m above the ground plane. Before final measurements of radiated emissions were performed, the EUT was scanned to determine its emission spectrum profile. The physical arrangement of the test system, the associated cabling and the EUT orientation (X, Y, Z) were varied in order to ensure that maximum emission amplitudes were attained.

The spectrum was examined from 9kHz to the 10th harmonic of the highest fundamental transmitter frequency (25GHz). Final radiated emission measurements were made at 3m distance.

At each frequency where a spurious emission was found, the EUT was rotated 360° and the antenna was raised and lowered from 1 to 4m in order to determine the emission's maximum level. Measurements were taken using both horizontal and vertical antenna polarizations.

For emissions between 30MHz and 1GHz, measurements were performed with a test receiver operating in the CISPR quasi-peak detection mode. The receiver's 6dB bandwidth was set to 120kHz. For emissions above 1GHz, measurements were performed with a spectrum analyzer using the following settings: for peak field strength: RBW = 1MHz & VBW ≥ 1MHz; for average field strength: RBW = 1MHz & VBW = 10Hz.

Absorbers have been placed on the floor between the EUT and the measuring antenna for testing above 1GHz.

The highest emission amplitudes relative to the appropriate limit were recorded in this report. Emissions other than those mentioned are small or not detectable.

No spurious emission was found in the range 9kHz - 30MHz.

Table 9: Radiated Emissions, Quasi Peak Data, 30MHz - 1GHz, Horizontal and Vertical Antenna Orientations, Mode A (2402MHz)

Freq. [MHz]	EUT / Antenna Orientation	Reading QP [dBµV]	Factor [dB(1/m)]	Level QP [dBµV/m]	Limit [dBµV/m]	Margin QP [dB]	Height [cm]	Angle [°]
32.051	Y / H	38.0	-16.6	21.4	40.0	18.6	101	359
953.386	Y / H	30.4	-0.9	29.5	46.0	16.5	289	106

Note: Level QP = Reading QP + Factor

Table 10: Radiated Emissions, Average Data, 1 - 25GHz, Horizontal and Vertical Antenna Orientations, Mode A (2402MHz)

Freq. [MHz]	EUT / Antenna Orientation	Reading AV [dBµV]	Factor [dB(1/m)]	Level AV [dBµV/m]	Limit [dBµV/m]	Margin AV [dB]	Height [cm]	Angle [°]
2113.741	X / H	39.0	-14.6	24.4	54.0	29.6	187	354
3568.757	X / V	39.2	-10.9	28.3	54.0	25.7	139	4
7102.585	X / H	38.8	-0.4	38.4	54.0	15.6	199	267
7390.482	X / V	38.3	0.6	38.9	54.0	15.1	116	176

Note: Level AV = Reading AV + Factor

Table 11: Radiated Emissions, Peak Data, 1 - 25GHz, Horizontal and Vertical Antenna Orientations, Mode A (2402MHz)

Freq. [MHz]	EUT / Antenna Orientation	Reading PK [dBµV]	Factor [dB(1/m)]	Level PK [dBµV/m]	Limit [dBµV/m]	Margin PK [dB]	Height [cm]	Angle [°]
2113.741	X / H	53.3	-14.6	38.7	74.0	35.3	187	354
3568.757	X / V	53.1	-10.9	42.3	74.0	31.7	139	4
7102.585	X / H	53.4	-0.4	53.0	74.0	21.0	199	267
7390.482	X / V	52.1	0.6	52.7	74.0	21.3	116	176

Note: Level PK = Reading PK + Factor

Table 12: Radiated Emissions, Quasi Peak Data, 30MHz - 1GHz, Horizontal and Vertical Antenna Orientations, Mode B (2442MHz)

Freq. [MHz]	EUT / Antenna Orientation	Reading QP [dBµV]	Factor [dB(1/m)]	Level QP [dBµV/m]	Limit [dBµV/m]	Margin QP [dB]	Height [cm]	Angle [°]
32.061	Y / H	39.2	-16.6	22.6	40.0	17.4	100	359
948.124	Y / H	30.3	-1.0	29.3	46.0	16.7	145	347

Note: Level QP = Reading QP + Factor

Table 13: Radiated Emissions, Average Data, 1 - 25GHz, Horizontal and Vertical Antenna Orientations, Mode B (2442MHz)

Freq. [MHz]	EUT / Antenna Orientation	Reading AV [dBµV]	Factor [dB(1/m)]	Level AV [dBµV/m]	Limit [dBµV/m]	Margin AV [dB]	Height [cm]	Angle [°]
1699.842	X / V	39.6	-16.7	22.9	54.0	31.1	162	230
5590.644	X / H	38.8	-6.1	32.7	54.0	21.3	126	203
7383.494	X / H	38.3	0.6	38.9	54.0	15.1	188	351

Note: Level AV = Reading AV + Factor

Table 14: Radiated Emissions, Peak Data, 1 - 25GHz, Horizontal and Vertical Antenna Orientations, Mode B (2442MHz)

Freq. [MHz]	EUT / Antenna Orientation	Reading PK [dBµV]	Factor [dB(1/m)]	Level PK [dBµV/m]	Limit [dBµV/m]	Margin PK [dB]	Height [cm]	Angle [°]
1699.842	X / V	53.3	-16.7	36.6	74.0	37.4	162	230
5590.644	X / H	53.2	-6.1	47.1	74.0	26.9	126	203
7383.494	X / H	52.4	0.6	53.0	74.0	21.0	188	351

Note: Level PK = Reading PK + Factor

Table 15: Radiated Emissions, Quasi Peak Data, 30MHz - 1GHz, Horizontal and Vertical Antenna Orientations, Mode C (2480MHz)

Freq. [MHz]	EUT / Antenna Orientation	Reading QP [dBμV]	Factor [dB(1/m)]	Level QP [dBμV/m]	Limit [dBμV/m]	Margin QP [dB]	Height [cm]	Angle [°]
32.050	Y / H	39.1	-16.6	22.5	40.0	17.5	100	359
868.496	Y / H	30.4	-2.9	27.5	46.0	18.5	225	226

Note: Level QP = Reading QP + Factor

Table 16: Radiated Emissions, Average Data, 1 - 25GHz, Horizontal and Vertical Antenna Orientations, Mode C (2480MHz)

Freq. [MHz]	EUT / Antenna Orientation	Reading AV [dBμV]	Factor [dB(1/m)]	Level AV [dBμV/m]	Limit [dBμV/m]	Margin AV [dB]	Height [cm]	Angle [°]
1699.912	X / V	40.4	-16.7	23.7	54.0	30.3	159	345
3852.736	X / H	38.6	-9.7	28.9	54.0	25.1	199	157
7376.343	X / H	38.2	0.6	38.8	54.0	15.2	162	299

Note: Level AV = Reading AV + Factor

Table 17: Radiated Emissions, Peak Data, 1 - 25GHz, Horizontal and Vertical Antenna Orientations, Mode C (2480MHz)

Freq. [MHz]	EUT / Antenna Orientation	Reading PK [dBμV]	Factor [dB(1/m)]	Level PK [dBμV/m]	Limit [dBμV/m]	Margin PK [dB]	Height [cm]	Angle [°]
1699.912	X / V	54.9	-16.7	38.2	74.0	35.8	159	345
3852.736	X / H	52.8	-9.7	43.1	74.0	30.9	199	157
7376.343	X / H	52.9	0.6	53.5	74.0	20.5	162	299


Note: Level PK = Reading PK + Factor

Table 18: Radiated Emissions at Band Edge, Average and Peak Data, Horizontal and Vertical Antenna Orientations, Modes A (2402MHz) and C (2480MHz)

Operating Frequency [MHz]	EUT / Antenna Orientation	Level AV [dBµV/m]	Level PK [dBµV/m]	Limit AV [dBµV/m]	Limit PK [dBµV/m]	Margin AV [dB]	Margin PK [dB]
2390.0	X / H	34.8	46.7	54.0	74.0	19.2	27.3
2483.5	X / H	40.6	49.1	54.0	74.0	13.4	24.9

Notes: All correction factors (antenna, cable, pre-amplifier) are included in the measurement values.
 Average limit in dBµV/m is calculated as follows: Average limit = 20 x log(500µV/m).
 Peak limit in dBµV/m is calculated as follows: Peak limit = Average limit + 20dB.


Figure 14: Radiated Emissions at Band Edge, Spectral Diagram, Mode A (2402MHz)

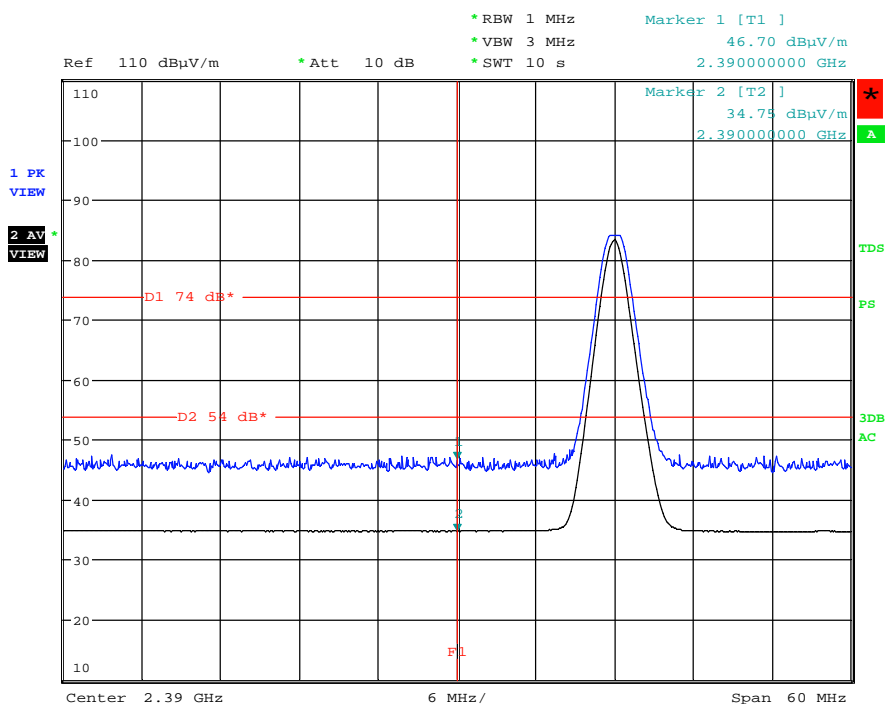

CC-RD500B, BE, 2.39GHz, X, Hor
 Date: 1.JUL.2014 15:49:06

Note: The upper trace shows the peak value and the lower trace shows the average value.

Figure 15: Radiated Emissions at Band Edge, Spectral Diagram, Mode C (2480MHz)

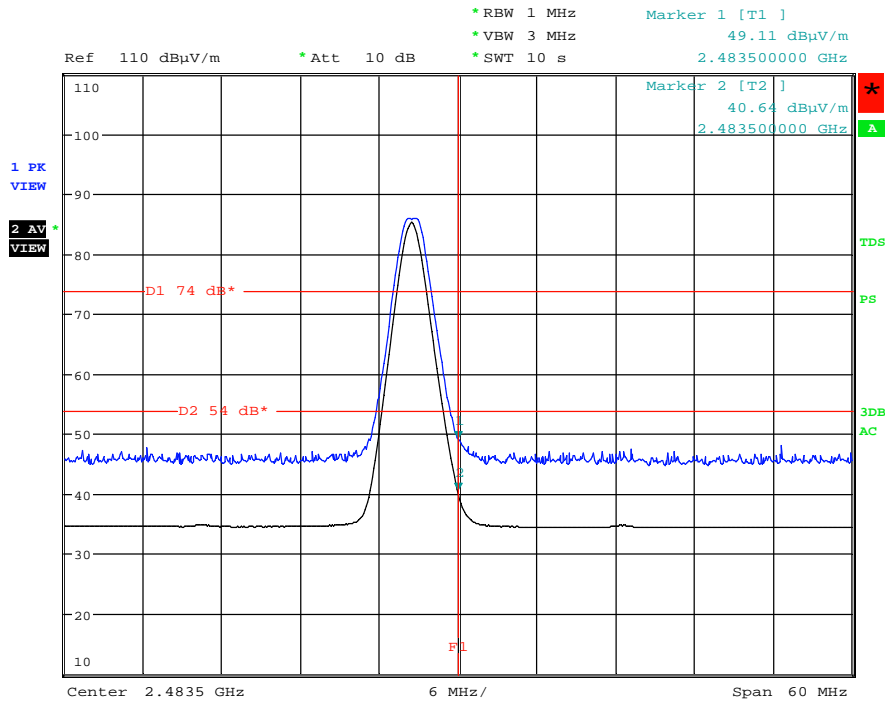

CC-RD500B, BE, 2.4835GHz, X, Hor

Date: 1.JUL.2014 17:06:59

Note: The upper trace shows the peak value and the lower trace shows the average value.

Prüfbericht - Nr.: 50004839 001

Seite 32 von 38

Test Report No.:

Page 32 of 38

5.4 AC Power Line Conducted Measurements

5.4.1 AC Power Line Conducted Emission of Transmitter

RESULT:

N/A

Frequency range: 0.15 - 30MHz

Requirements:

FCC 15.207 and RSS-Gen 7.2.4

The AC power line conducted emission on any frequency within the band 150kHz to 30MHz shall not exceed the limits specified in FCC 15.207 and RSS-Gen 7.2.4 (table 4).

Test procedure:

ANSI C63.10-2009 and RSS-Gen 7.2

Note:

It is not applicable since the EUT is battery operated.

7. List of Tables

Table 1: List of Test and Measurement Equipment.....	6
Table 2: Emission Measurement Uncertainty.....	7
Table 3: Interfaces present on the EUT	10
Table 4: Conducted Output Power.....	15
Table 5: 20dB Bandwidth Edge Frequencies	18
Table 6: 20dB Bandwidth.....	18
Table 7: 99% Bandwidth.....	21
Table 8: Field Strength of Fundamental.....	24
Table 9: Radiated Emissions, Quasi Peak Data, 30MHz - 1GHz, Horizontal and Vertical Antenna Orientations, Mode A (2402MHz).....	27
Table 10: Radiated Emissions, Average Data, 1 - 25GHz, Horizontal and Vertical Antenna Orientations, Mode A (2402MHz).....	27
Table 11: Radiated Emissions, Peak Data, 1 - 25GHz, Horizontal and Vertical Antenna Orientations, Mode A (2402MHz).....	27
Table 12: Radiated Emissions, Quasi Peak Data, 30MHz - 1GHz, Horizontal and Vertical Antenna Orientations, Mode B (2442MHz).....	28
Table 13: Radiated Emissions, Average Data, 1 - 25GHz, Horizontal and Vertical Antenna Orientations, Mode B (2442MHz).....	28
Table 14: Radiated Emissions, Peak Data, 1 - 25GHz, Horizontal and Vertical Antenna Orientations, Mode B (2442MHz).....	28
Table 15: Radiated Emissions, Quasi Peak Data, 30MHz - 1GHz, Horizontal and Vertical Antenna Orientations, Mode C (2480MHz)	29
Table 16: Radiated Emissions, Average Data, 1 - 25GHz, Horizontal and Vertical Antenna Orientations, Mode C (2480MHz)	29
Table 17: Radiated Emissions, Peak Data, 1 - 25GHz, Horizontal and Vertical Antenna Orientations, Mode C (2480MHz)	29
Table 18: Radiated Emissions at Band Edge, Average and Peak Data, Horizontal and Vertical Antenna Orientations, Modes A (2402MHz) and C (2480MHz).....	30

8. List of Figures

Figure 1: Test Setup of Conducted Radio Testing	10
Figure 2: Test Setup of Radiated Testing	10
Figure 3: Software Version	11
Figure 4: Duty Cycle, Mode B (2442MHz).....	16
Figure 5: 20dB Bandwidth, Mode A (2402MHz).....	18
Figure 6: 20dB Bandwidth, Mode B (2442MHz).....	19
Figure 7: 20dB Bandwidth, Mode C (2480MHz).....	19
Figure 8: 99% Bandwidth, Mode A (2402MHz).....	21
Figure 9: 99% Bandwidth, Mode B (2442MHz).....	22
Figure 10: 99% Bandwidth, Mode C (2480MHz).....	22
Figure 11: Field Strength of Fundamental, Spectral Diagram, Mode A (2402MHz).....	24
Figure 12: Field Strength of Fundamental, Spectral Diagram, Mode B (2442MHz).....	25
Figure 13: Field Strength of Fundamental, Spectral Diagram, Mode C (2480MHz)	25
Figure 14: Radiated Emissions at Band Edge, Spectral Diagram, Mode A (2402MHz).....	30
Figure 15: Radiated Emissions at Band Edge, Spectral Diagram, Mode C (2480MHz)	31

9. List of Photographs

Photograph 1: Set-up for Radiated Emission of Transmitter, Table View.....	33
Photograph 2: Set-up for Radiated Emission of Transmitter, Measuring Antenna View.....	34
Photograph 3: Set-up for Radiated Emission, EUT Configuration X-Axis.....	35
Photograph 4: Set-up for Radiated Emission, EUT Configuration Y-Axis.....	35
Photograph 5: Set-up for Radiated Emission, EUT Configuration Z-Axis.....	36