



FCC RADIO TEST REPORT

FCC ID: OQ5IEMTX

Product: Stage Pass IEM
Trade Name: CADAUDIO
Model Name: IEMTX
Serial Model: N/A
Report No.: BCTC-2015022317F

Prepared for

CAD Audio, LLC

6573 Cochran Road, Building I, Solon, Ohio, USA 44139

Prepared by

Shenzhen BCTC Technology Co., Ltd.

A.Floor 3, 44 Building, Tanglang Industrial Park B, Taoyuan Street,
Nanshan District, Shenzhen, China



TEST RESULT CERTIFICATION

Applicant's name: CAD Audio, LLC
 Address: 6573 Cochran Road, Building I, Solon, Ohio, USA 44139
Manufacture's Name: CAD Audio, LLC
 Address: 6573 Cochran Road, Building I, Solon, Ohio, USA 44139

Product description

Product name.....: Stage Pass IEM
 Model and/or type reference: IEMTX

Standards.....: FCC Part74

Test procedure ANSI C63.4-2003

This device described above has been tested by BCTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of BCTC, this document may be altered or revised by BCTC, personal only, and shall be noted in the revision of the document.

Date of Test

Date (s) of performance of tests: 13 Feb. 2015~03 Mar. 2015

Date of Issue: 03 Mar. 2015

Testing Engineer : Eric Yang
 (Eric Yang)

Technical Manager : Sophie Lee
 (Sophia Lee)

Authorized Signatory : Carson Zhang
 (Carson. Zhang)





TABLE OF CONTENTS

- 1. GENERAL INFORMATION4
 - 1.1 PRODUCT DESCRIPTION4
 - 1.2 RELATED SUBMITTAL(S) / GRANT (S)5
 - 1.3 TEST METHODOLOGY5
 - 1.4 TEST FACILITY5
 - 1.5 SPECIAL ACCESSORIE5
 - 1.6 EQUIPMENT MODIFICATIONS5
 - 1.7 DIFFERENCES BETWEEN MODELS5
- 2. SYSTEM TEST CONFIGURATION6
 - 2.1 EUT CONFIGURATION.....6
 - 2.2 EUT EXERCISE.....6
 - 2.3 GENERAL TECHNICAL REQUIREMENTS.....6
 - 2.4 CONFIGURATION OF TESTED SYSTEM.....6
- 3. SUMMARY OF TEST RESULTS.....7
- 4. DESCRIPTION OF TEST MODES7
- 5. MAXIMUM TRANSMITTER POWER8
 - 5.1 PROVISIONS APPLICABLE.....8
 - 5.2 MEASUREMENT PROCEDURE8
 - 5.3 TEST SETUP BLOCK DAIGRAM9
 - 5.4 MEASUREMENT EQUIPMENT USED.....10
 - 5.5 TEST RESULT10
- 6. MODULATION CHARACTERISTICS12
 - 6.1 PROVISIONS APPLICABLE.....12
 - 6.2 MEASUREMENT METHOD12
 - 6.2.1 MODULATION LIMIT12
 - 6.2.2 AUDIO FREQUENCY RESPONSE.....12
 - 6.3 MEASUREMENT INSTRUMENTS.....12
 - 6.4 TEST RESULT13
- 7. FREQUENCY TOLERANCE22
 - 7.1 PROVISIONS APPLICABLE.....22
 - 7.2 MEASUREMENT PROCEDURE22
 - 7.2.1 FREQUENCY STABILITY VERSUS ENVIRONMENTAL TEMPERATURE.....22
 - 7.2.2 FREQUENCY STABILITY VERSUS INPUT VOLTAGE22
 - 7.3 TEST SETUP BLOCK DIAGRAM23



7.4 TEST EQUIPMENT USED.....23

7.5 TEST RESULT23

8. EMISSION BANDWIDTH26

8.1 PROVISIONS APPLICABLE26

8.2 MEASUREMENT PROCEDURE26

8.3 TEST SETUP BLOCK DIAGRAM26

8.4 MEASUREMENT EQUIPMENT USED26

8.5 TEST RESULT26

9. UNWANTED RADIATION29

9.1 PROVISIONS APPLICABLE29

9.2 MEASUREMENT PROCEDURE29

9.3 TEST SETUP BLOCK DIAGRAM30

9.4 MEASUREMENT EQUIPMENT USED32

9.5 TEST RESULTS32

APPENDIX I36

PHOTOGRAPHS OF TEST SETUP36



1. GENERAL INFORMATION

1.1 PRODUCT DESCRIPTION

The EUT is a Wireless Microphone designed as Low Power Auxiliary Stations for transmitting voice only. It is designed by way of utilizing the FM modulation achieves the system operating.

A major technical description of EUT is described as following:

Communication Type	Voice / Tone only
Modulation	FM
Emission Type	F3E
Emission Designator	121KF3E (2M+2DK, M=12, D=48.72, K=1, Necessary Bandwidth = 121.44 KHz)
Emission Bandwidth	146.80 KHz
Peak Frequency Deviation	48.72KHz
Audio Frequency Deviation	12 KHz
Maximum Output Power	6.14dBm
Output Power Modification	Fixed can't be changed
Antenna Designation	TNC type ANT
Power Supply	AC 120V/60Hz by adapter
Operation Frequency Range and Channel	Frequency Range: 469-489MHz
	Channels number:16
	1. 469.975MHz 9. 477.325MHz 2. 471.025MHz 10. 478.525MHz 3. 472.300MHz 11. 479.875MHz 4. 472.975MHz 12. 481.900MHz 5. 473.725MHz 13. 483.775MHz 6. 474.550MHz 14. 485.125MHz 7. 475.450MHz 15. 486.625MHz 8. 476.275MHz 16. 488.950MHz
	Channel: Top Channel:488.950MHz, Middle Channel: 477.325 MHz, Bottom Channel: 469.975MHz
Frequency Tolerance	0.000191%



1.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for FCC ID: OQ5IEMTX filing to comply with the FCC Part 74, Subpart H Rules.

1.3 TEST METHODOLOGY

The radiated emission testing was performed according to the procedures of ANSI TIA/EIA 603 and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055 and 2.1057

1.4 TEST FACILITY

Shenzhen BCTC Technology Co., Ltd.
Add.:No.101,Yousong Road,Longhua New District, Shenzhen,China
FCC Registration No.:187086

1.5 SPECIAL ACCESSORIE

Not available for this EUT intended for grant.

1.6 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

1.7 DIFFERENCES BETWEEN MODELS

Not available for this EUT intended for grant.



2. SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission’s requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT EXERCISE

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

2.3 GENERAL TECHNICAL REQUIREMENTS

- a) Section 74.861 (e) - 1: Maximum transmitter power less than 250mW
- b) Section 74.861 (e) - 3: Peak Frequency Deviation less than ±75 KHz
- c) Section 74.861 (e) - 4: Frequency Tolerance less than 0.005%
- d) Section 74.861 (e) - 5: Emission Bandwidth shall less than 200 KHz
- e). Section 74.861 (e) - 6: Unwanted radiation

According to Section 74.861 (e) – 6, the mean power of emission shall be attenuated below the mean output power of the transmitter in accordance with the following schedule:

- 1). At least 25 dB on any frequency removed from the center of the authorized bandwidth by more than 50% up to and including 100% of the authorized bandwidth.
- 2). At least 35 dB on any frequency removed from the center of the authorized bandwidth by more than 100% up to and including 250% of the authorized bandwidth.
- 4). At least 43 + 10 log10 (T) dB on any frequency removed from the center of the authorized bandwidth by more than 250%

2.4 CONFIGURATION OF TESTED SYSTEM

Fig. 2-1 Configuration of Tested System



Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
1.	Wireless Microphone	N/A	IEMTX	OQ5IEMTX	N/A	EUT
--	--	--	--	--	--	--
--	--	--	--	--	--	--



3. SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
§74.861 (e)-1	Carrier Power	Compliant
§74.861 (e)-3	Frequency Deviation	Compliant
§74.861 (e)-4	Frequency Tolerance	Compliant
§74.861 (e)-5	Operating Bandwidth	Compliant
§74.861 (e)-6	Unwanted Radiation	Compliant

4. DESCRIPTION OF TEST MODES

The EUT (Wireless Microphone) has been tested under normal operating condition. Three channels (the bottom channel, the middle channel and the top channel) have been chosen for testing. On each channel three axes have been evaluated for radiated emission.



5. MAXIMUM TRANSMITTER POWER

5.1 PROVISIONS APPLICABLE

According to FCC Part 74 Section 74.861(e) – 1: The power of the measured unmodulated carrier power at the output of the transmitter power amplifier may not exceed 50mW



5.2 MEASUREMENT PROCEDURE

- 1). On a test site, the EUT shall be placed on a turntable, and in the position closest to the normal use as declared by the user.
- 2). The test antenna shall be oriented initially for vertical polarization located 3m from the EUT to correspond to the transmitter.
- 3). The output of the antenna shall be connected to the measuring receiver and either a peak or quasi-peak detector was used for the measurement as indicated on the report. The detector selection is based on how close the emission level was approaching the limit.
- 4). The transmitter shall be switched on; if possible, without the modulation and the measurement receiver shall be tuned to the frequency of the transmitter under test.
- 5). The test antenna shall be raised and lowered through the specified range of height until the measuring receiver detects a maximum signal level.
- 6). The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- 7). The test antenna shall be raised and lowered again through the specified range of height until the measuring receiver detects a maximum signal level.
- 8). The maximum signal level detected by the measuring receiver shall be noted.
- 9). Replace the antenna with a proper Antenna (substitution antenna).
- 10). The substitution antenna shall be oriented for vertical polarization and, if necessary, the length of the substitution antenna shall be adjusted to correspond to the frequency of transmitting.
- 11). The substitution antenna shall be connected to a calibrated signal generator.
- 12). If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- 13). The test antenna shall be raised and lowered through the specified range of the height to ensure that the maximum signal is received.
- 14). The input signal to substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuation setting of the measuring receiver.

- 15). The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
- 16). The measurement shall be repeated with the test antenna and the substitution antenna oriented for horizontal polarization.
- 17). The measure of the effective radiated power is the larger of the two levels recorded, at the input to the substitution antenna, corrected for the gain of the substitution antenna if necessary.

5.3 TEST SETUP BLOCK DAIGRAM

TEST SETUP OF SUBSTITUTION METHOD

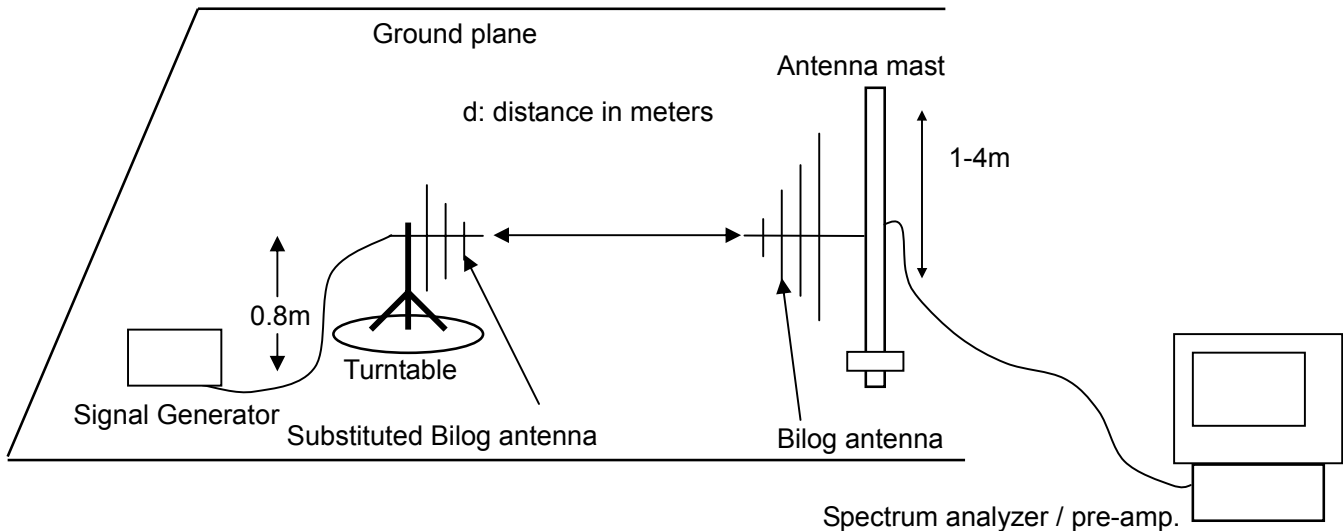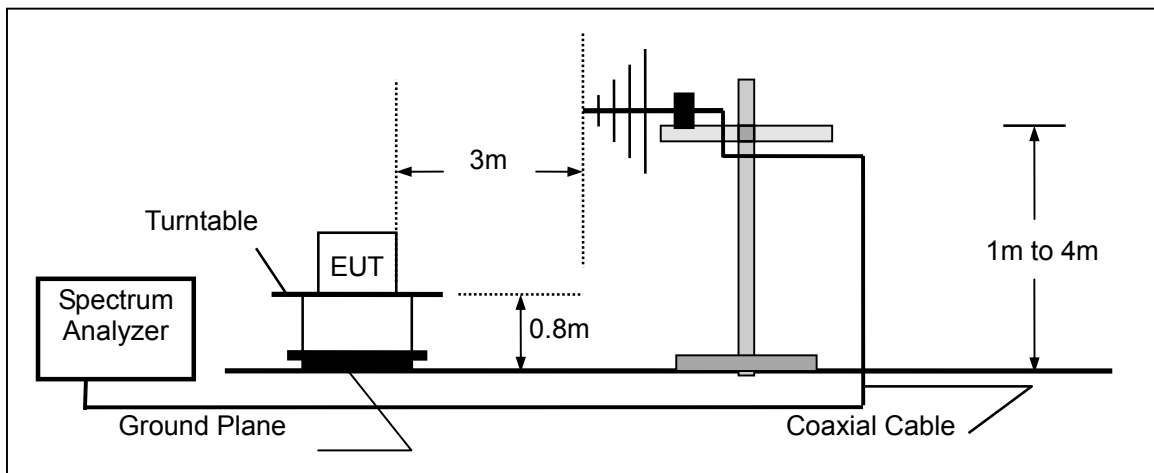



5.4 MEASUREMENT EQUIPMENT USED

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	MY45108040	2014.07.06	2015.07.05	1 year
2	Test Receiver	R&S	ESPI	101318	2014.06.07	2015.06.06	1 year
3	Bilog Antenna	TESEQ	CBL6111D	31216	2014.07.06	2015.07.05	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2014.06.07	2015.06.06	1 year
5	Spectrum Analyzer	ADVANTEST	R3132	150900201	2014.06.07	2015.06.06	1 year
6	Horn Antenna	EM	EM-AH-10180	2011071402	2014.07.06	2015.07.05	1 year
7	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2014.07.06	2015.07.05	1 year
8	Amplifier	EM	EM-30180	060538	2014.12.22	2015.12.21	1 year
9	Loop Antenna	ARA	PLA-1030/B	1029	2014.06.08	2015.06.07	1 year
10	Power Meter	R&S	NRVS	100696	2014.07.06	2015.07.05	1 year
11	Power Sensor	R&S	URV5-Z4	0395.1619.05	2014.07.06	2015.07.05	1 year

5.5 TEST RESULT

Test was performed on 469.975 MHz

Freq. (MHz)	Antenna Polarity	Reading (dBm)	Total Factor (dB)	Corrected Power		Limit (mW)
				(dBm)	(mW)	
469.975	V	-22.12	32.47	5.72	3.733	250
469.975	H	-26.05	32.19	6.14	4.111	250



Test was performed on 477.325 MHz

Freq. (MHz)	Antenna Polarity	Reading (dBm)	Total Factor (dB)	Corrected Power		Limit (mW)
				(dBm)	(mW)	
477.325	V	-29.15	34.56	5.41	3.475	250
477.325	H	-29.56	35.57	6.01	3.990	250

Test was performed on 488.950 MHz

Freq. (MHz)	Antenna Polarity	Reading (dBm)	Total Factor (dB)	Corrected Power		Limit (mW)
				(dBm)	(mW)	
488.950	V	-27.74	33.37	5.63	3.656	250
488.950	H	-26.87	32.86	5.99	3.972	250

6. MODULATION CHARACTERISTICS

6.1 PROVISIONS APPLICABLE

- a).According to CFR 47 section 2.1047(a), for Voice Modulation Communication Equipment, the frequency response of the audio modulation circuit over a range of 100 to 5000Hz shall be measured.
- b). According to CFR 47 section 74.861(e)-3, any form of modulation may be used. A maximum deviation of ± 75 KHz is permitted when frequency modulation is employed.

6.2 MEASUREMENT METHOD

6.2.1 MODULATION LIMIT

- 1). Configure the EUT as shown in figure 6-1, adjust the audio input for 60% of rated system deviation at 1KHz using this level as a reference (0dB) and vary the input level from -20 to $+20$ dB. Record the frequency deviation obtained as a function of the input level.
- 2). Repeat step 1 with input frequency changing to 300, 1000, 3000, and 12000 Hz in sequence.

6.2.2 AUDIO FREQUENCY RESPONSE

- 1). Configure the EUT as shown in figure 6-1.
- 2). Adjust the audio input for 20% of rated system deviation at 1 KHz using this level as a reference (0 dB).
- 3). Vary the Audio frequency from 100 Hz to 30 KHz and record the frequency deviation.
- 4). Audio Frequency Response = $20\log_{10}$ (Deviation of test frequency/Deviation of 1 KHz reference).

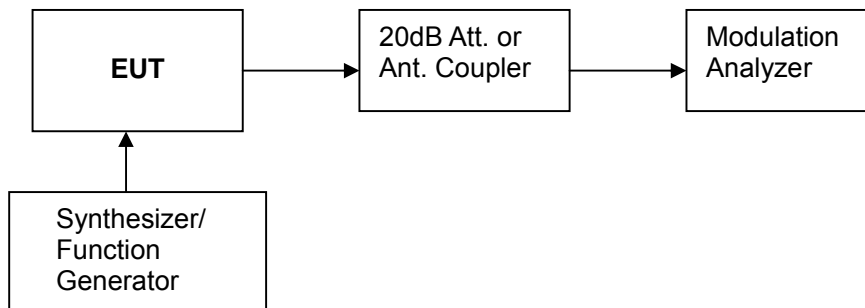


Figure 6-1: Modulation Characteristic Measurement Configuration

6.3 MEASUREMENT INSTRUMENTS


EQUIPMENT TYPE	MFR	MODEL NUMBER	LAST CAL.	CAL DUE.
Audio Signal Generator	HP	3325A	07/13/2014	07/12/2015
Modulation Analyzer	HP	8920B	07/13/2014	07/12/2015
Attenuator	MINI CIRCUITS	MCL BW-S20W2	07/13/2014	07/12/2015

6.4 TEST RESULT

a). Modulation Limit:

Test Result @ 469.975 MHz


Modulation Level (dB)	Peak Freq. Deviation At 300 Hz (KHz)	Peak Freq. Deviation At 1000 Hz (KHz)	Peak Freq. Deviation At 3000 Hz (KHz)	Peak Freq. Deviation At 12000 Hz (KHz)
-20	19.68	27.86	27.04	28.29
-15	30.12	33.14	34.28	35.13
-10	34.87	36.39	38.86	39.24
-5	36.04	41.89	43.16	44.54
0	37.12	44.97	45.17	46.09
+5	37.29	46.27	46.74	47.24
+10	37.44	46.98	48.09	48.15
+15	37.64	47.63	48.18	48.28
+20	37.89	48.29	48.42	48.51

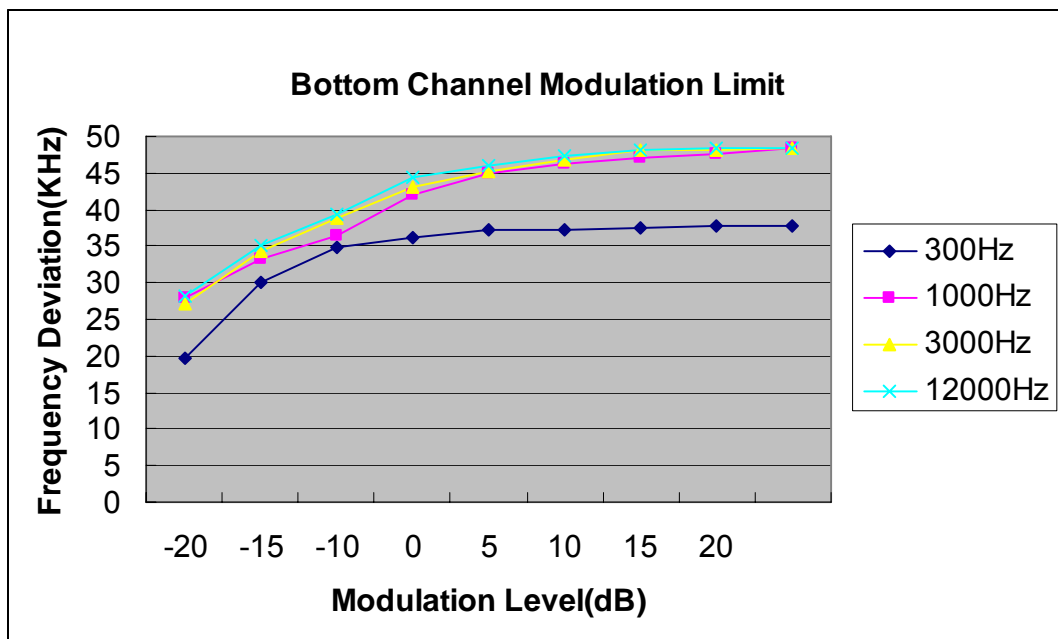



Test Result @ 477.325 MHz


Modulation Level (dB)	Peak Freq. Deviation At 300 Hz (KHz)	Peak Freq. Deviation At 1000 Hz (KHz)	Peak Freq. Deviation At 3000 Hz (KHz)	Peak Freq. Deviation At 12000 Hz (KHz)
-20	18.98	26.69	27.26	27.79
-15	31.02	32.46	34.11	34.88
-10	34.69	35.11	37.68	38.17
-5	36.24	40.77	42.49	44.79
0	37.47	45.05	45.46	46.11
+5	37.59	46.18	46.89	47.49
+10	37.88	46.77	47.38	48.04
+15	38.13	47.53	48.09	48.55
+20	38.49	48.18	48.58	48.72

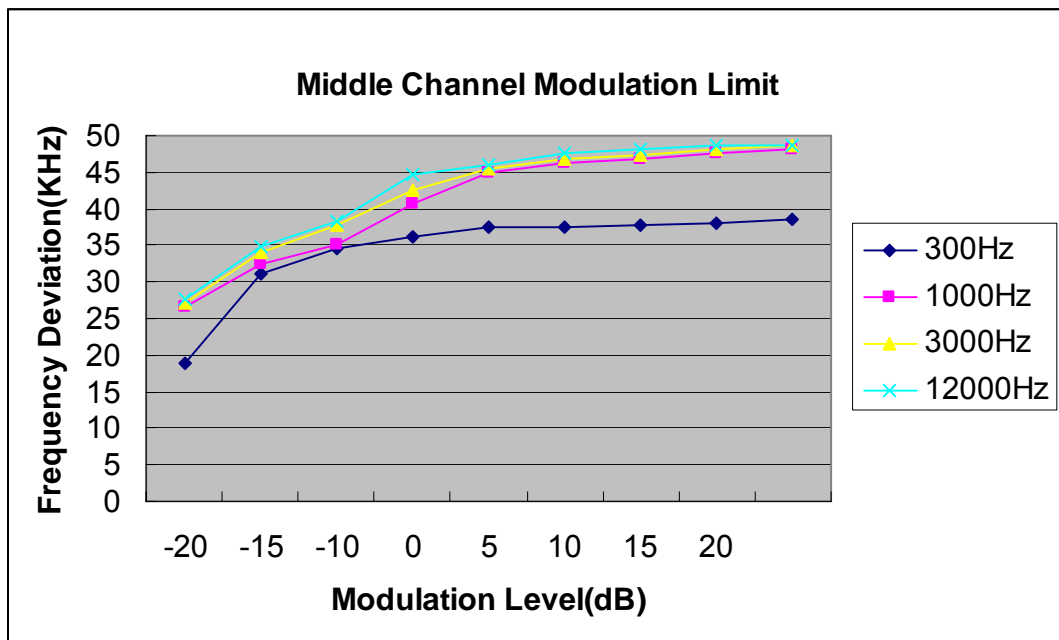



Test Result @ 488.950 MHz

Modulation Level (dB)	Peak Freq. Deviation At 300 Hz (KHz)	Peak Freq. Deviation At 1000 Hz (KHz)	Peak Freq. Deviation At 3000 Hz (KHz)	Peak Freq. Deviation At 12000 Hz (KHz)
-20	18.43	25.39	26.59	27.33
-15	30.12	31.19	33.18	35.12
-10	33.65	35.02	36.71	37.77
-5	35.89	37.82	41.94	43.09
0	36.98	45.12	45.59	46.23
+5	37.39	45.87	46.29	47.11
+10	37.95	46.38	47.05	47.69
+15	38.09	47.27	47.83	48.12
+20	38.51	47.75	48.24	48.69

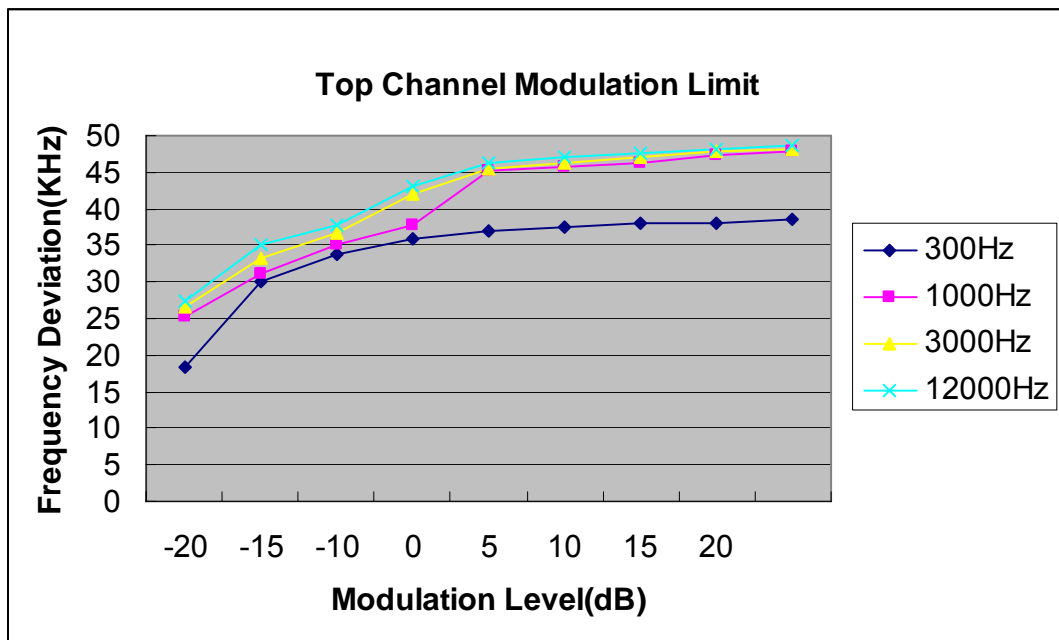




b). Audio Frequency Response:

Test Result @ 469.975 MHz

Frequency (Hz)	Deviation (KHz)
100	9.89
200	10.43
300	11.26
400	11.89
500	12.87
600	13.36
700	13.76
800	14.18
900	14.78
1000	15.06
1200	15.27
1400	15.49
1600	15.78
1800	16.14
2000	16.58
2400	16.74
2800	16.83
3200	16.94
3600	17.14
4000	17.26
4500	17.43
5000	17.65
5500	17.88
6000	17.95
6500	18.09
7000	18.23
8000	18.36
9000	18.42
10000	18.56
12000	18.63
14000	17.26
16000	16.14
18000	14.27
20000	12.09
25000	10.13
30000	8.47



Audio Frequency Response @469.975MHz

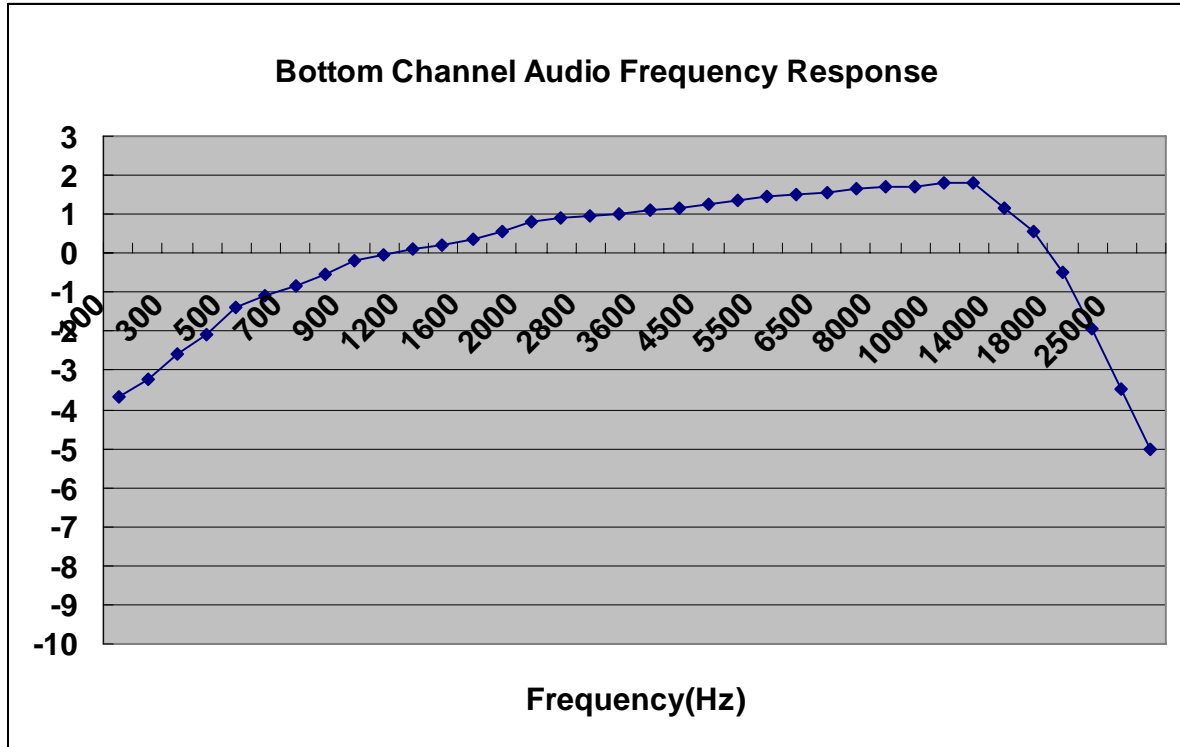




Test Result @ 477.325 MHz

Frequency (Hz)	Deviation (KHz)
100	9.44
200	10.38
300	11.19
400	11.92
500	12.79
600	13.42
700	13.68
800	14.25
900	14.64
1000	15.09
1200	15.33
1400	15.52
1600	15.83
1800	15.96
2000	16.25
2400	16.47
2800	16.64
3200	16.81
3600	17.03
4000	17.16
4500	17.37
5000	17.54
5500	17.71
6000	17.86
6500	17.97
7000	18.08
8000	18.21
9000	18.33
10000	18.42
12000	18.53
14000	17.33
16000	16.27
18000	14.31
20000	12.13
25000	10.26
30000	9.01



Audio Frequency Response @477.325MHz

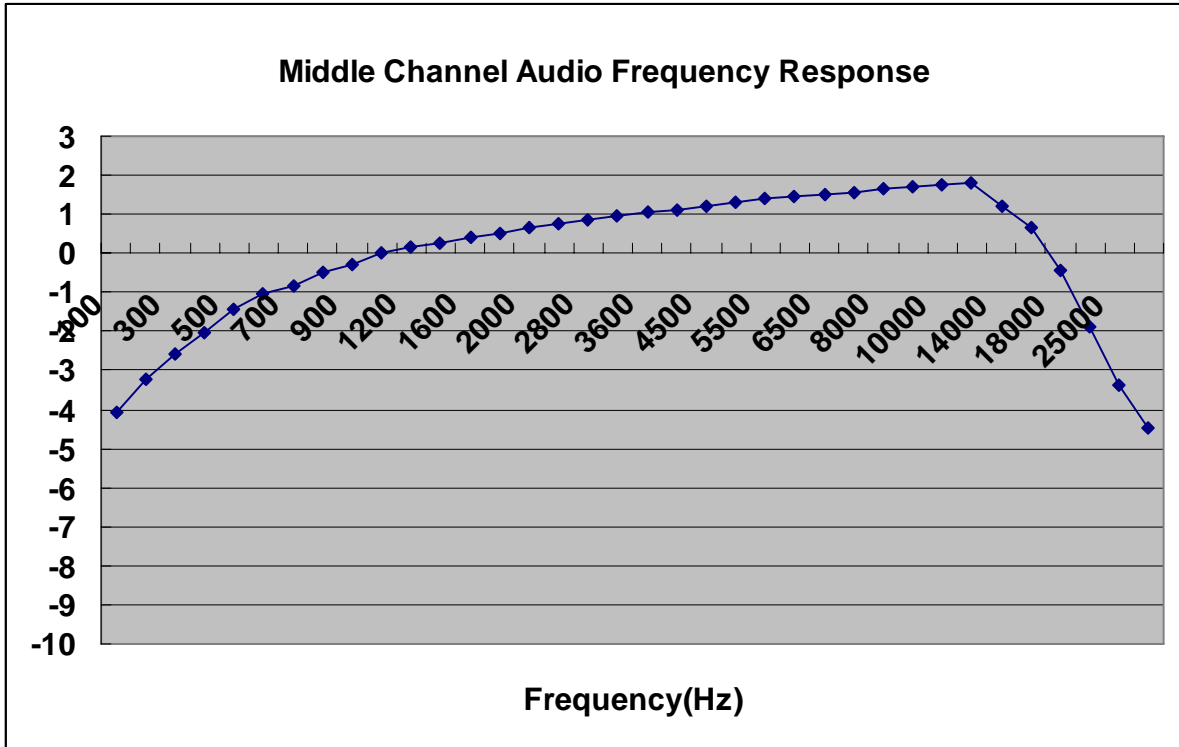




Test Result @ 488.950 MHz

Frequency (Hz)	Deviation (KHz)
100	9.93
200	10.42
300	11.23
400	11.97
500	12.83
600	13.47
700	13.79
800	14.36
900	14.72
1000	15.12
1200	15.36
1400	15.64
1600	15.87
1800	15.98
2000	16.15
2400	16.53
2800	16.79
3200	16.94
3600	17.08
4000	17.19
4500	17.42
5000	17.63
5500	17.85
6000	17.94
6500	18.02
7000	18.16
8000	18.35
9000	18.47
10000	18.59
12000	18.64
14000	17.29
16000	16.32
18000	14.27
20000	12.09
25000	10.36
30000	9.25



Audio Frequency Response@488.950MHz

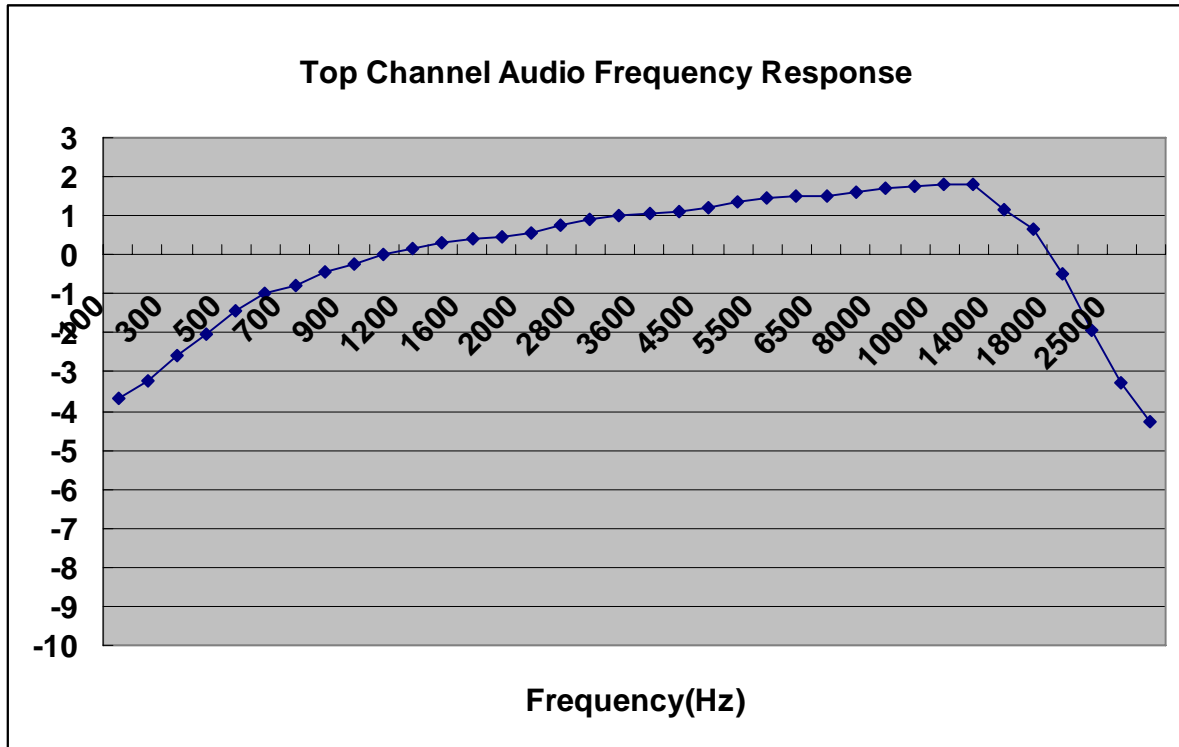



7. FREQUENCY TOLERANCE

7.1 PROVISIONS APPLICABLE

- a). According to FCC Part 2 Section 2.1055(a)(1), the frequency stability shall be measured with variation of ambient temperature from -30°C to $+50^{\circ}\text{C}$ centigrade.
- b). According to FCC Part 2 Section 2.1055(d)(2), for hand carried battery powered equipment, the frequency stability shall be measured with reducing primary supply voltage to the battery operating end point, which is specified by the manufacture.
- c). According to FCC Part 74 Section 74.861(e)-4, the frequency tolerance must be maintained within 0.005%.

7.2 MEASUREMENT PROCEDURE

7.2.1 FREQUENCY STABILITY VERSUS ENVIRONMENTAL TEMPERATURE

- 1) Setup the configuration per figure 7-1 for frequencies measurement inside an environment chamber, install new battery in the EUT.
- 2) Turn on EUT and set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1KHz and Video Resolution Bandwidth to 1KHz and Frequency Span to 50KHz. Record this frequency as reference frequency.
- 3) Set the temperature of chamber to 50°C . Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. While maintaining a constant temperature inside the chamber, turn the EUT on and measure the EUT operating frequency.
- 4) Repeat step 2 with a 10°C decreased per stage until the lowest temperature -30°C is measured, record all measured frequencies on each temperature step.

7.2.2 FREQUENCY STABILITY VERSUS INPUT VOLTAGE

- 1) Setup the configuration per figure 7-1 for frequencies measured at temperature if it is within 15°C to 25°C . Otherwise, an environment chamber set for a temperature of 20°C shall be used. Install new battery in the EUT.
- 2) Set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1 KHz and Video Resolution Bandwidth to 1KHz. Record this frequency as reference frequency.
- 3) For battery operated only device, supply the EUT primary voltage at the operating end point which is specified by manufacturer and record the frequency.

7.3 TEST SETUP BLOCK DIAGRAM

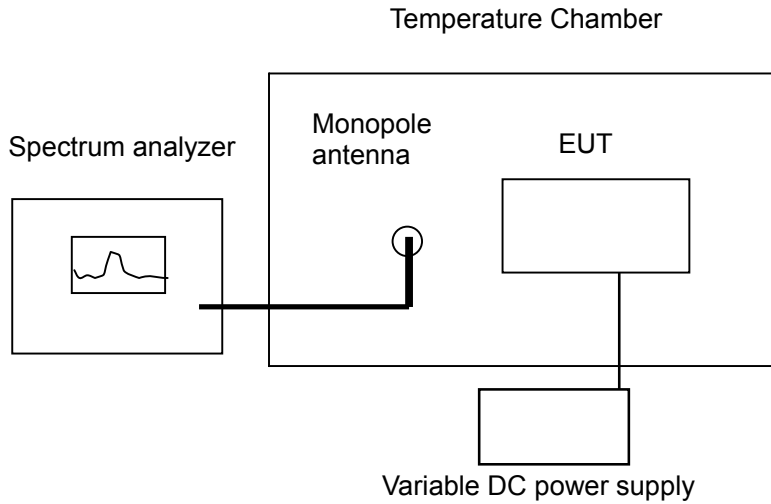


Figure 7-1

7.4 TEST EQUIPMENT USED

EQUIPMENT TYPE	MFR	MODEL NO.	SERIAL NO.	LAST CAL.	CAL DUE.
EMI Test Receiver	R&S	ESCS30	100307	07/13/2014	07/12/2015
Temperature Chamber	SHIHIN	BM50-CB	908	07/13/2014	07/12/2015
DC Power Supply	LONGWEI	WYK-605	N/A	07/13/2014	07/12/2015

7.5 TEST RESULT



a) Frequency stability versus input voltage (battery operation end point voltage is AC 120V)

Wireless Microphone	Reference Frequency (MHz)	Frequency Measured at End Point Voltage	Frequency Error (%)	Limit (%)
Bottom channel	469.975	469.975326	6.93654E-05	0.005
Middle Channel	477.325	477.325396	8.29623E-05	0.005
Top channel	488.950	488.950258	5.27661E-05	0.005

b) Frequency stability versus ambient temperature

Test Result @ Bottom Channel 469.975MHz

Reference Frequency: 174.2MHz		Limit: ±0.005%	
Environment Temperature (°C)	Power Supply	Frequency deviation measured with time Elapsed (30 minutes)	
		(MHz)	%
50	AC 120V	469.975593	0.000126
40	AC 120V	469.975504	0.000107
30	AC 120V	469.975612	0.000130
20	AC 120V	469.975522	0.000111
10	AC 120V	469.975432	0.000091
0	AC 120V	469.975367	0.000078
-10	AC 120V	469.975612	0.000130
-20	AC 120V	469.975612	0.000130
-30	AC 120V	469.975456	0.000097

**Test Result @ 477.325MHz**

Reference Frequency: 587.5 MHz		Limit: $\pm 0.005\%$	
Environment Temperature (°C)	Power Supply	Frequency deviation measured with time Elapsed(30 minutes)	
		(MHz)	%
50	AC 120V	477.325821	0.000172
40	AC 120V	477.325838	0.000175
30	AC 120V	477.325106	0.000022
20	AC 120V	477.325439	0.000091
10	AC 120V	477.325748	0.000156
0	AC 120V	477.325655	0.000137
-10	AC 120V	477.325193	0.000040
-20	AC 120V	477.325378	0.000079
-30	AC 120V	477.325429	0.000089

Test Result @ 488.950

Reference Frequency: 215.8 MHz		Limit: $\pm 0.005\%$	
Environment Temperature (°C)	Power Supply	Frequency deviation measured with time Elapsed (30 minutes)	
		(MHz)	%
50	AC 120V	488.950283	0.000057
40	AC 120V	488.950937	0.000191
30	AC 120V	488.950392	0.000080
20	AC 120V	488.950816	0.000166
10	AC 120V	488.950842	0.000172
0	AC 120V	488.950485	0.000099
-10	AC 120V	488.950593	0.000121
-20	AC 120V	488.950638	0.000130
-30	AC 120V	488.950722	0.000147

8. EMISSION BANDWIDTH


8.1 PROVISIONS APPLICABLE

According to FCC Part 74 Section 74.861(e)-5: The operation bandwidth shall not exceed 200 KHz

8.2 MEASUREMENT PROCEDURE

- 1). The EUT was placed on a turntable which is 0.8m above ground plane.
- 2). Set EUT as normal operation
- 3). Set SPA Center Frequency = fundamental frequency, RBW=1 KHz, VBW=1 KHz, Span =200 KHz.
- 4). Set SPA Max hold. Mark peak, -26dB.

8.3 TEST SETUP BLOCK DIAGRAM

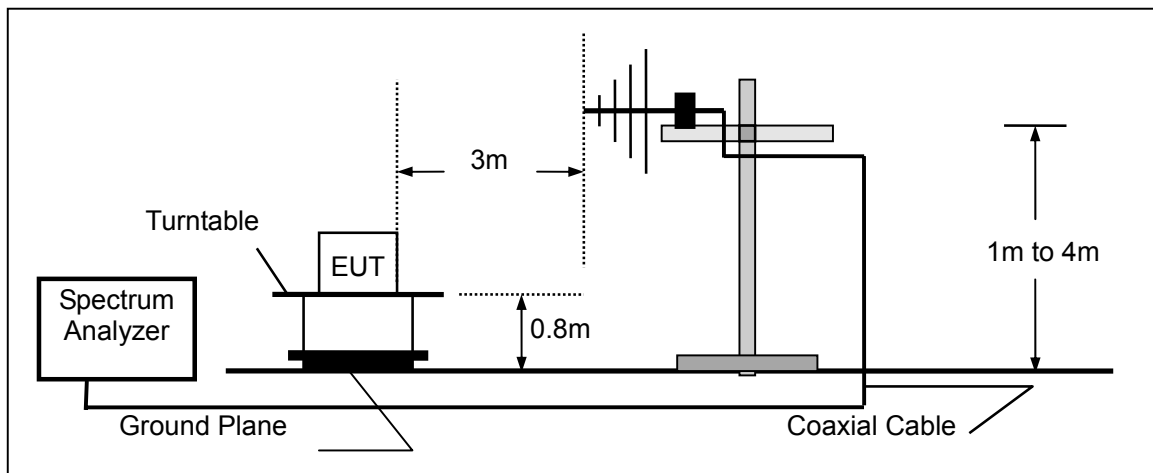

8.4 MEASUREMENT EQUIPMENT USED


EQUIPMENT TYPE	MFR	MODEL NO.	SERIAL NO.	LAST CAL.	CAL DUE.
EMI Test Receiver	R&S	ESCS30	100307	07/13/2014	07/12/2015
Pre-Amplifier	HP	8447D	2944A07999	07/13/2014	07/12/2015
Bi-Log Antenna	EMCO	3142	9910-1436	07/13/2014	07/12/2015
Bi-Log Antenna	SCHAFFNER	CBL6143	5082	07/13/2014	07/12/2015

8.5 TEST RESULT




26 dB Test Result			
Operation Channel	Test Data	Limit	Result
Bottom Channel	146.564 KHz	≤200 KHz	Pass
Middle Channel	146.802 KHz	≤200 KHz	Pass
Top Channel	146.564 KHz	≤200 KHz	Pass


Emission Bandwidth @ Bottom Channel, Input audio signal:1kHz

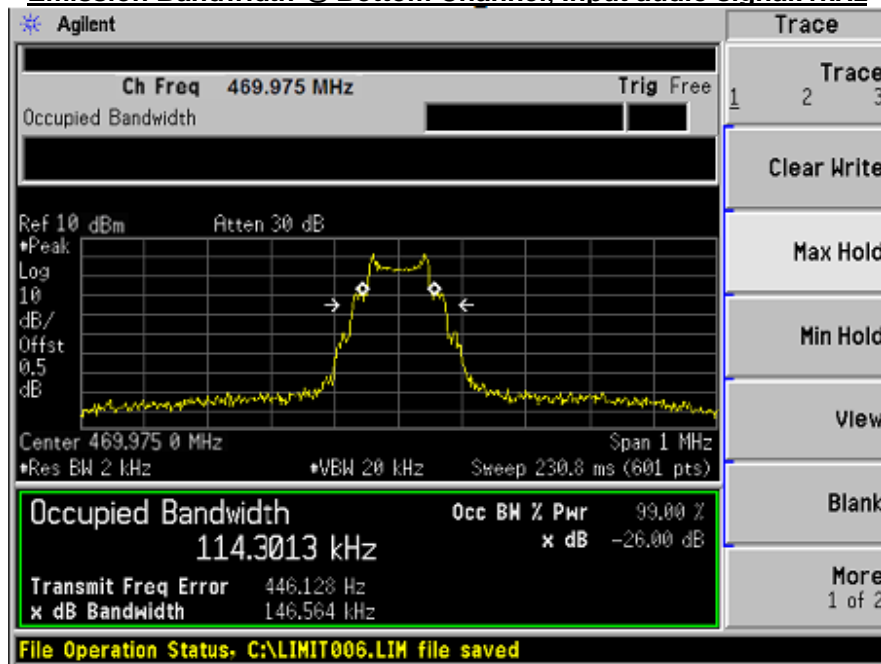

Emission Bandwidth@ Middle Channel, Input audio signal:1kHz

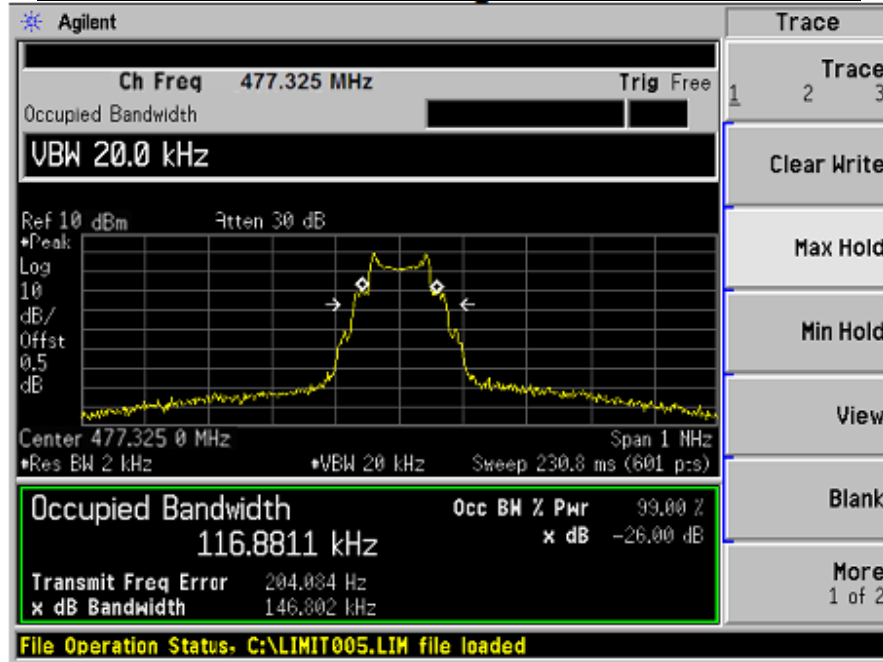

Emission Bandwidth @ Top Channel, Input audio signal:1kHz

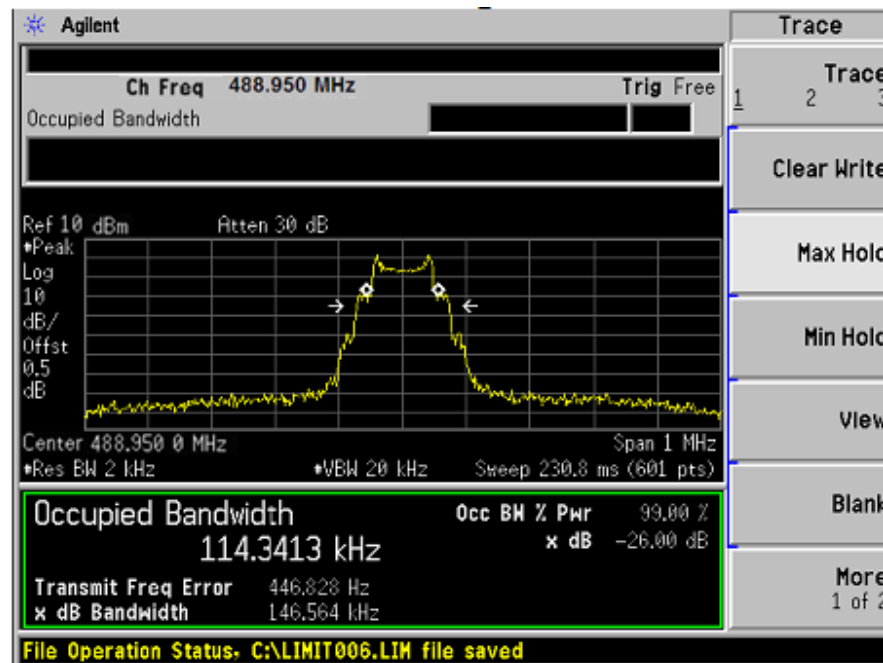



9. UNWANTED RADIATION

9.1 PROVISIONS APPLICABLE

According to Section 74.861(e)-6, the mean power of emissions shall be attenuated below the mean output power of the transmitter in accordance with the following schedule:


- 1). On any frequency removed from the operating frequency by more than 50 percent up to and including 100 percent of the authorized bandwidth: at least 25 dB;
- 2). On any frequency removed from the operating frequency by more than 100 percent up to and including 250 percent of the authorized bandwidth: at least 35 dB;
- 3). On any frequency removed from the operating frequency by more than 250 percent of the authorized bandwidth: at least $43 + 10 \log_{10} (TP)$ dB

9.2 MEASUREMENT PROCEDURE

- 1). On a test site, the EUT shall be placed on a turntable, and in the position closest to the normal use as declared by the user.
- 2). The test antenna shall be oriented initially for vertical polarization located 3m from the EUT to correspond to the transmitter.
- 3). The output of the antenna shall be connected to the measuring receiver and either a peak or quasi-peak detector was used for the measurement as indicated on the report. The detector selection is based on how close the emission level was approaching the limit.
- 4). The transmitter shall be switched on; if possible, without the modulation and the measurement receiver shall be tuned to the frequency of the transmitter under test.
- 5). The test antenna shall be raised and lowered through the specified range of height until the measuring receiver detects a maximum signal level.
- 6). The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- 7). The test antenna shall be raised and lowered again through the specified range of height until the measuring receiver detects a maximum signal level.
- 8). The maximum signal level detected by the measuring receiver shall be noted.
- 9). The measurement shall be repeated with the test antenna set to horizontal polarization.
- 10). Replace the antenna with a proper Antenna (substitution antenna).
- 11). The substitution antenna shall be oriented for vertical polarization and, if necessary, the length of the substitution antenna shall be adjusted to correspond to the frequency of transmitting.
- 12). The substitution antenna shall be connected to a calibrated signal generator.
- 13). If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.


- 14). The test antenna shall be raised and lowered through the specified range of the height to ensure that the maximum signal is received.
- 15). The input signal to substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuation setting of the measuring receiver.
- 16). The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
- 17). The measurement shall be repeated with the test antenna and the substitution antenna oriented for horizontal polarization.

9.3 TEST SETUP BLOCK DIAGRAM

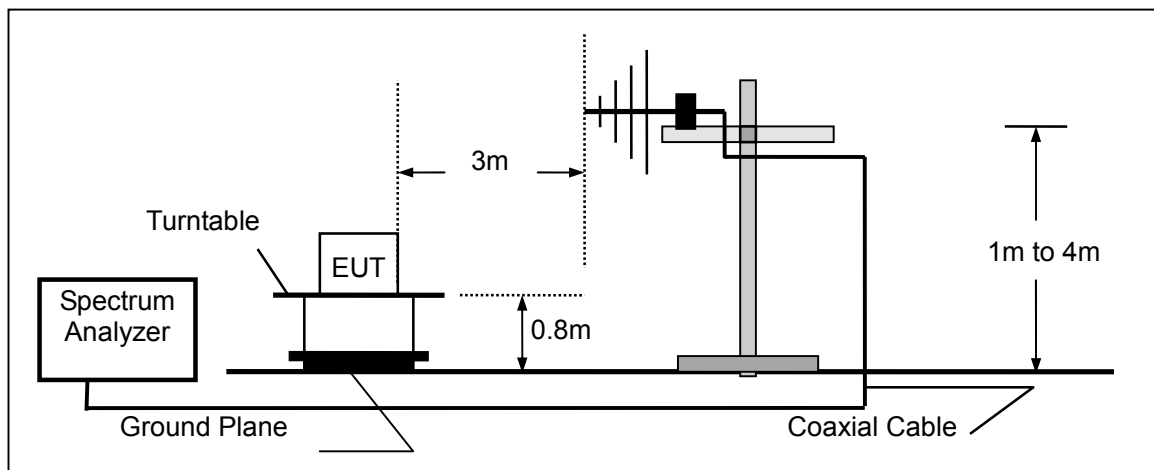


Substitution Method:

Radiation below 1GHz

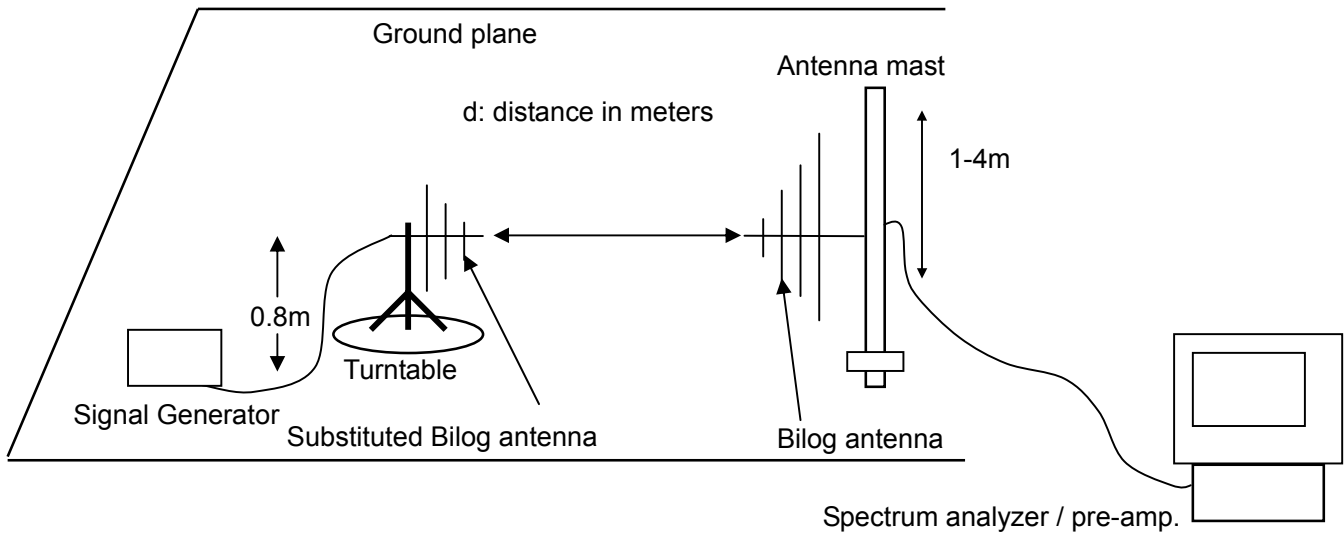

Radiation above 1GHz

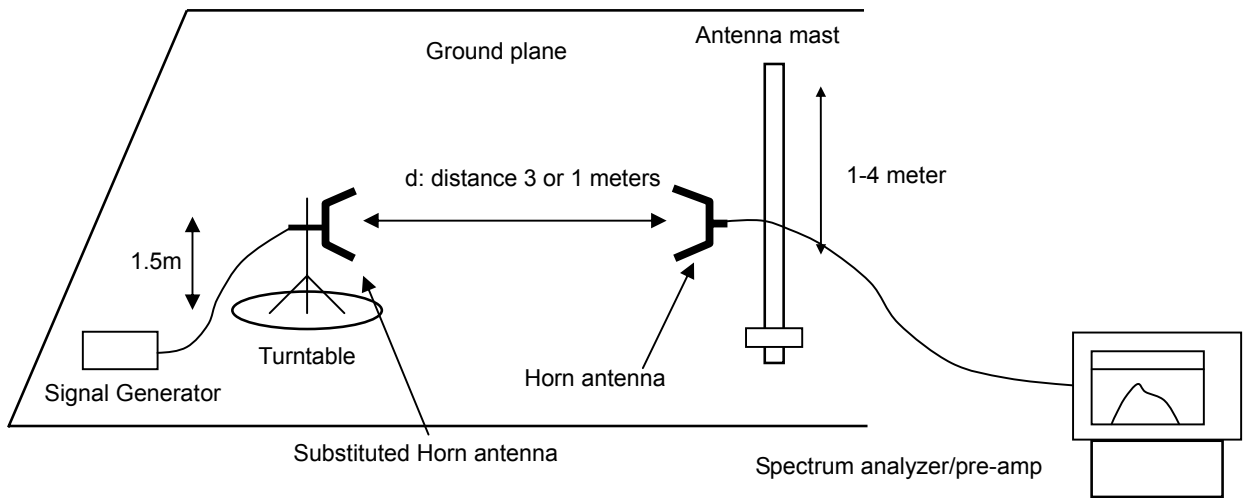

**9.4 MEASUREMENT EQUIPMENT USED**

EQUIPMENT TYPE	MFR	MODEL NO.	SERIAL NO.	LAST CAL.	CAL DUE.
EMI Test Receiver	R&S	ESCS30	100307	07/13/2014	07/12/2015
Pre-Amplifier	HP	8447D	2944A07999	07/13/2014	07/12/2015
Bi-Log Antenna	EMCO	3142	9910-1436	07/13/2014	07/12/2015
Bi-Log Antenna	SCHAFFNER	CBL6143	5082	07/13/2014	07/12/2015

9.5 TEST RESULTS

Calculation: Limit (dBm)= EL-43-10log10 (TP)

Notes: EL is the emission level of the Output Power expressed in dBm, in this application, the EL is 6.14 dBm.

Limit (dBm)=6.14-43-10log 10 (0.00411) = -13

Top Channel, Middle Channel & Bottom Channel,10th Frequency

Frequency	Reading	Antenna	S.G.	Cabel	Ant.Gain	Emission	Limit	Margin
(MHz)	(dBm)	Polarization	(dBm)	Loss	(dB)	(dBm)	(dBm)	(dB)
939.95	-66.93	H	-45.87	1.47	13.37	-33.97	-13	-20.97
939.95	-61.54	V	-40.12	1.47	13.37	-28.22	-13	-15.22
954.65	-68.46	H	-46.29	1.52	13.42	-34.39	-13	-21.39
954.65	-62.17	V	-41.09	1.52	13.42	-29.19	-13	-16.19
977.90	-68.55	H	-47.89	1.58	13.67	-35.80	-13	-22.80
977.90	-62.39	V	-42.94	1.58	13.67	-30.85	-13	-17.85
1409.93	-82.34	H	-63.47	1.61	13.83	-51.25	-13	-38.25
1409.93	-79.37	V	-61.83	1.61	13.83	-49.61	-13	-36.61
1431.97	-83.26	H	-64.74	1.64	13.87	-52.51	-13	-39.51
1431.97	-80.14	V	-62.05	1.64	13.87	-49.82	-13	-36.82
1466.85	-83.43	H	-64.98	1.69	13.95	-52.72	-13	-39.72
1466.85	-80.25	V	-62.27	1.69	13.95	-50.01	-13	-37.01
3289.91	-83.25	H	-63.21	1.71	14.32	-50.60	-13	-37.60
3289.91	-83.42	V	-63.32	1.71	14.44	-50.59	-13	-37.59
3341.27	-83.41	H	-64.21	1.81	15.32	-50.70	-13	-37.70
3341.27	-83.43	V	-64.31	1.81	15.04	-51.08	-13	-38.08
3422.60	-84.22	H	-65.43	1.93	15.22	-52.14	-13	-39.14
3422.60	-84.56	V	-65.43	1.93	15.33	-52.03	-13	-39.03
4669.75	-89.23	H	-69.34	2.03	16.77	-54.60	-13	-41.60
4669.75	-89.98	V	-69.97	2.03	16.78	-55.22	-13	-42.22




4773.25	-89.11	H	-69.22	2.11	16.88	-54.45	-13	-41.45
4773.25	-89.45	V	-69.97	2.11	16.88	-55.20	-13	-42.20
4889.50	-89.98	H	-69.34	2.03	17.01	-54.36	-13	-41.36
4889.50	-89.25	V	-69.97	2.03	17.03	-54.97	-13	-41.97
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--

Notes: -- means the output power of all the spurious frequency is at least 20dB down to the limit.




Emission Mask @ Bottom Channel

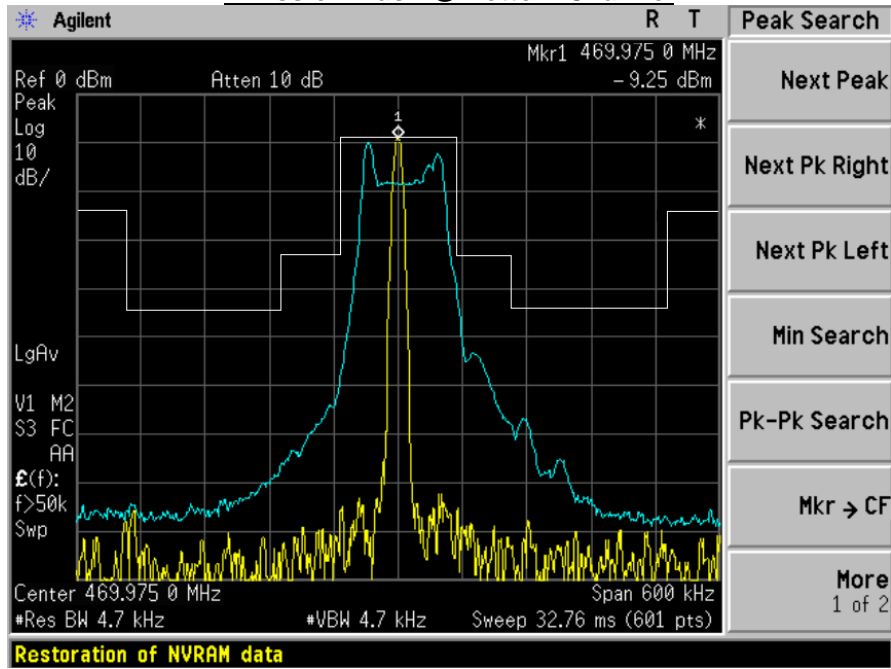




Emission Mask @ Middle Channel

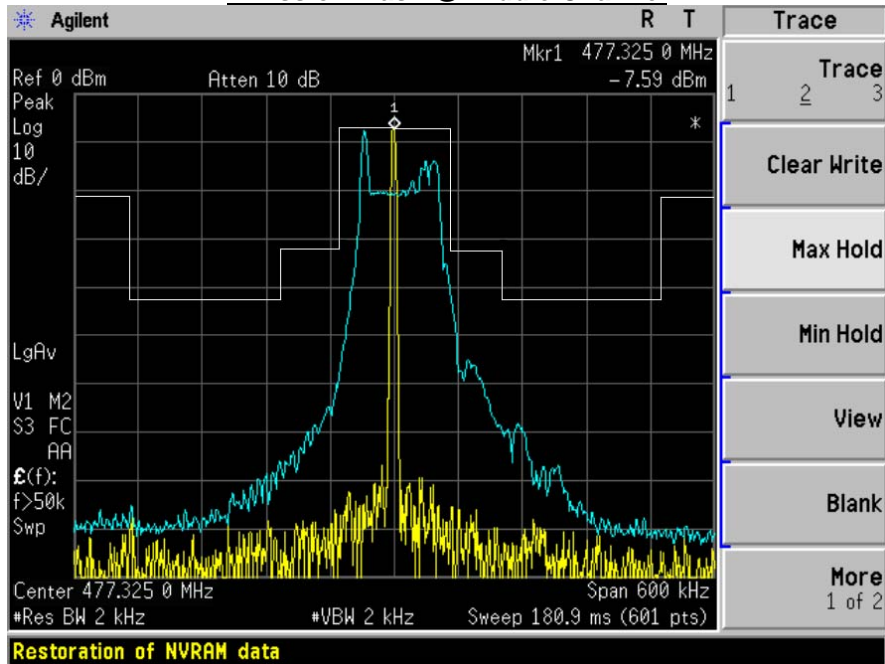

Emission Mask @ Top Channel


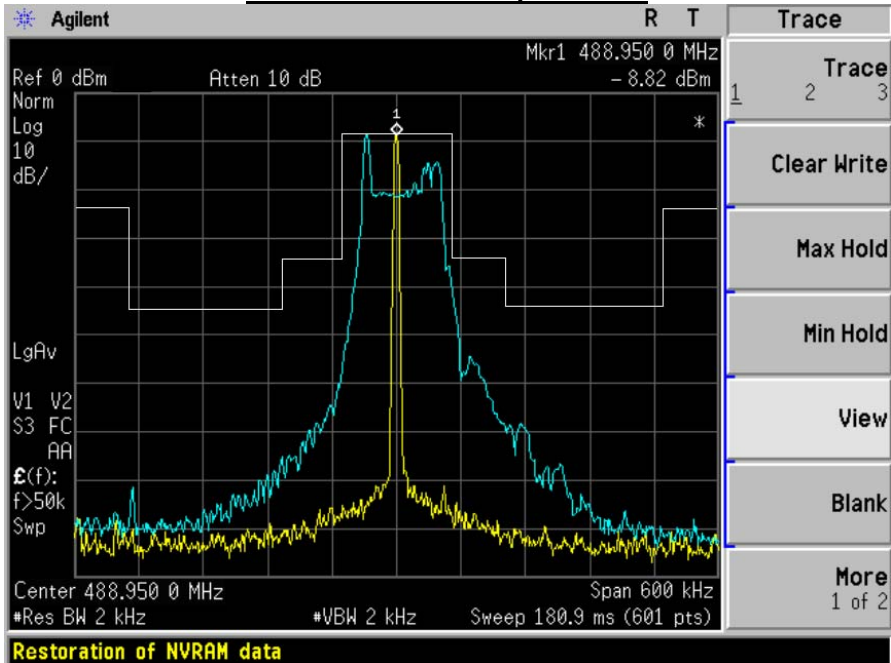




APPENDIX I

PHOTOGRAPHS OF TEST SETUP

RADIATED EMISSION TEST SETUP

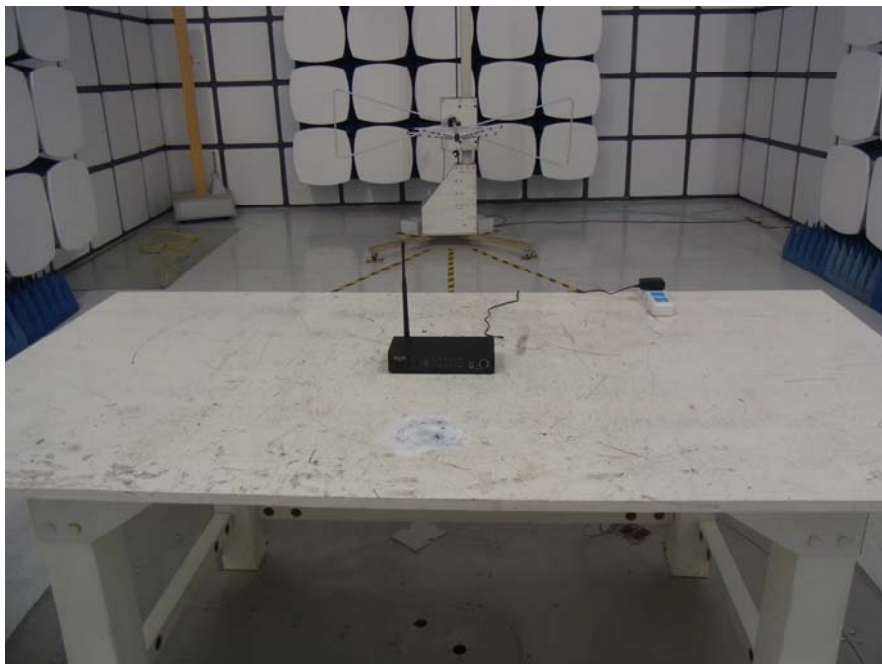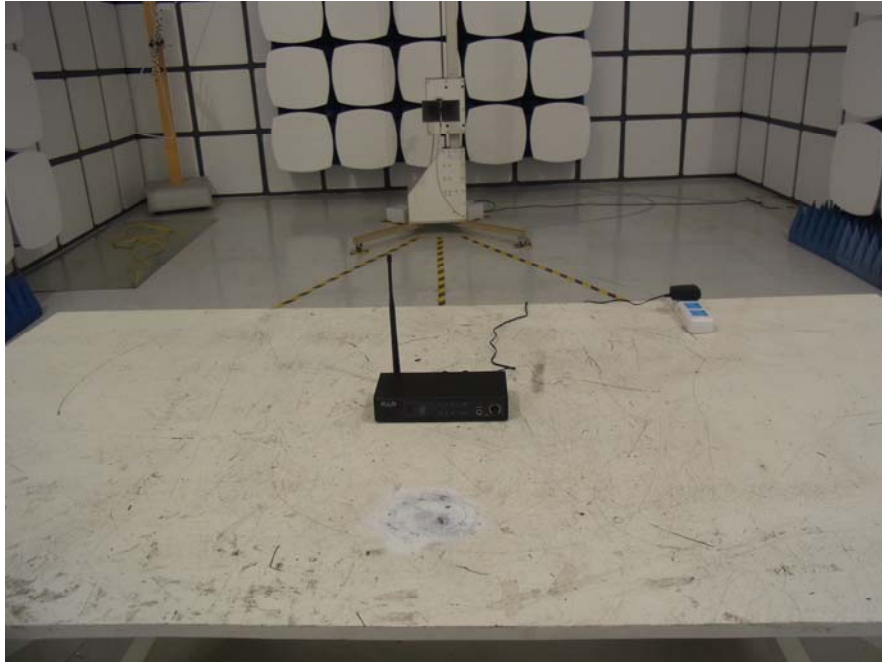

---END OF REPORT---