



CETECOM ICT Services is now

**CTC** | **advanced**  
member of RWTÜV group

## TEST REPORT

Test report no.: 1-1478/16-01-06



### Testing laboratory

**CTC advanced GmbH**

Untertuerkheimer Strasse 6 – 10

66117 Saarbruecken / Germany

Phone: + 49 681 5 98 - 0

Fax: + 49 681 5 98 - 9075

Internet: <http://www.ctcadvanced.com>

e-mail: [mail@ctcadvanced.com](mailto:mail@ctcadvanced.com)

**Accredited Testing Laboratory:**

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2005) by the Deutsche Akkreditierungsstelle GmbH (DAkkS)

The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number: D-PL-12076-01-01

### Applicant

**beyerdynamic GmbH & Co. KG**

Theresienstraße 8

74072 Heilbronn / GERMANY

Phone: +49 7131 617-0

Fax: +49 7131 617-215

Contact: Ulrich Roth

e-mail: [roth@beyerdynamic.de](mailto:roth@beyerdynamic.de)

Phone: +49 7131 617-155

### Manufacturer

**beyerdynamic GmbH & Co. KG**

Theresienstraße 8

74072 Heilbronn / GERMANY

### Test standard/s

47 CFR Part 74

Part 74 – Experimental radio, auxiliary, special broadcast and or other program distributional services

RSS - 210 Issue 9

Spectrum Management and Telecommunications Radio Standards Specification - Licence-Exempt Radio Apparatus: Category I Equipment

For further applied test standards please refer to section 3 of this test report.

### Test Item

**Kind of test item:** Wireless Microphone System, Handheld transmitter

**Model name:** TG-500

**FCC ID:** OSDTG500H

**IC:** 3628A-TG500H

**Frequency:** 518 MHz – 548 MHz

**Technology tested:** Proprietary

**Antenna:** Integrated antenna

**Power supply:** 3.0 V DC by 2 AA type batteries

**Temperature range:** -10°C to +55°C



This test report is electronically signed and valid without handwriting signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

### Test report authorized:

Stefan BöS  
Lab Manager  
Radio Communications & EMC

### Test performed:

Christoph Schneider  
Lab Manager  
Radio Communications & EMC

<b>1 Table of contents</b>	
1	Table of contents .....2
2	General information .....3
2.1	Notes and disclaimer .....3
2.2	Application details.....3
2.3	Test laboratories sub-contracted .....3
3	Test standard/s and references .....4
4	Test environment.....5
5	Test item .....5
5.1	General description .....5
5.2	Additional information .....5
6	Description of the test setup .....6
6.1	Shielded fully anechoic chamber .....7
6.2	Conducted measurements normal and extreme conditions.....8
7	Sequence of testing .....9
7.1	Sequence of testing radiated spurious 9 kHz to 12.75 GHz.....9
8	Measurement uncertainty .....10
9	Summary of measurement results .....11
10	Additional comments .....12
11	Measurement results .....13
11.1	Transmitter output power .....13
11.2	Occupied bandwidth.....16
11.3	Transmitter frequency stability .....20
11.4	Transmitter unwanted emissions (radiated) .....24
11.5	Necessary bandwidth (BN) for analogue systems .....31
11.6	Frequency modulation .....34
12	Observations .....37
Annex A	Document history .....37
Annex B	Further information.....37
Annex C	Accreditation Certificate .....38

## 2 General information

### 2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CTC advanced GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CTC advanced GmbH.

The testing service provided by CTC advanced GmbH has been rendered under the current "General Terms and Conditions for CTC advanced GmbH".

CTC advanced GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CTC advanced GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CTC advanced GmbH test report include or imply any product or service warranties from CTC advanced GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CTC advanced GmbH.

All rights and remedies regarding vendor's products and services for which CTC advanced GmbH has prepared this test report shall be provided by the party offering such products or services and not by CTC advanced GmbH. In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

### 2.2 Application details

Date of receipt of order:	2016-10-27
Date of receipt of test item:	2017-01-26
Start of test:	2017-01-30
End of test:	2017-03-13
Person(s) present during the test:	-/-

### 2.3 Test laboratories sub-contracted

None

### 3 Test standard/s and references

Test standard	Date	Description
47 CFR Part 74	-/-	Part 74 – Experimental radio, auxiliary, special broadcast and or other program distributional services
CFR 47 Part 2	-/-	Frequency allocations and radio treaty matters; general rules and regulations
RSS - 210 Issue 9	August 2016	Spectrum Management and Telecommunications Radio Standards Specification - Licence-Exempt Radio Apparatus: Category I Equipment
RSS – Gen Issue 4	November 2014	General Requirements for Compliance of Radio Apparatus
ETSI EN 300 422-1 V1.4.2	2011-08	Electromagnetic compatibility and Radio spectrum Matters (ERM); Wireless microphones in the 25 MHz to 3 GHz frequency range; Part 1: Technical characteristics and methods of measurement
ETSI EN 300 422-2 V1.3.1	2011-08	Electromagnetic compatibility and Radio spectrum Matters (ERM); Wireless microphones in the 25 MHz to 3 GHz frequency range; Part 2: Harmonized EN covering the essential requirements of article 3.2 of the R&TTE Directive

Guidance	Version	Description
ANSI C63.4-2014	-/-	American national standard for methods of measurement of radio-noise emissions from low-voltage electrical and electronic equipment in the range of 9 kHz to 40 GHz

#### 4 Test environment

Temperature	:	$T_{nom}$ $T_{max}$ $T_{min}$	+20 °C during room temperature tests +50 °C during high temperature tests -30 °C during low temperature tests
Relative humidity content	:		55 %
Barometric pressure	:		1021 hpa
Power supply	:	$V_{nom}$ $V_{max}$ $V_{min}$	3.00 V DC by 2 AA type batteries 3.45 V 2.55 V

#### 5 Test item

##### 5.1 General description

Kind of test item	:	Wireless Microphone System, Handheld transmitter
Type identification	:	TG-500
HMN	:	-/-
PMN	:	TG 500H-C, TG 500H-D
HVIN	:	TG 500H-C, TG 500H-D
FVIN	:	-/-
S/N serial number	:	-/-
HW hardware status	:	-/-
SW software status	:	-/-
Frequency band	:	518 MHz – 548 MHz
Type of radio transmission	:	Frequency modulation, continuous carrier
Use of frequency spectrum	:	
Type of modulation	:	FSK
Number of channels	:	25
Antenna	:	Integrated antenna
Power supply	:	3.0 V DC by 2 AA type batteries
Temperature range	:	-10°C to +55°C

##### 5.2 Additional information

The content of the following annexes is defined in the QA. It may be that not all of the listed annexes are necessary for this report, thus some values in between may be missing.

Test setup- and EUT-photos are included in test report:

- 1-1478/16-01-01\_AnnexA
- 1-1478/16-01-01\_AnnexB
- 1-1478/16-01-01\_AnnexD

## 6 Description of the test setup


Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, RF generating and signaling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Lab/Item).

### Agenda: Kind of Calibration

k	calibration / calibrated	EK	limited calibration
ne	not required (k, ev, izw, zw not required)	zw	cyclical maintenance (external cyclical maintenance)
ev	periodic self verification	izw	internal cyclical maintenance
Ve	long-term stability recognized	g	blocked for accredited testing
v/k!	Attention: extended calibration interval		
NK!	Attention: not calibrated	*)	next calibration ordered / currently in progress

## 6.1 Shielded fully anechoic chamber

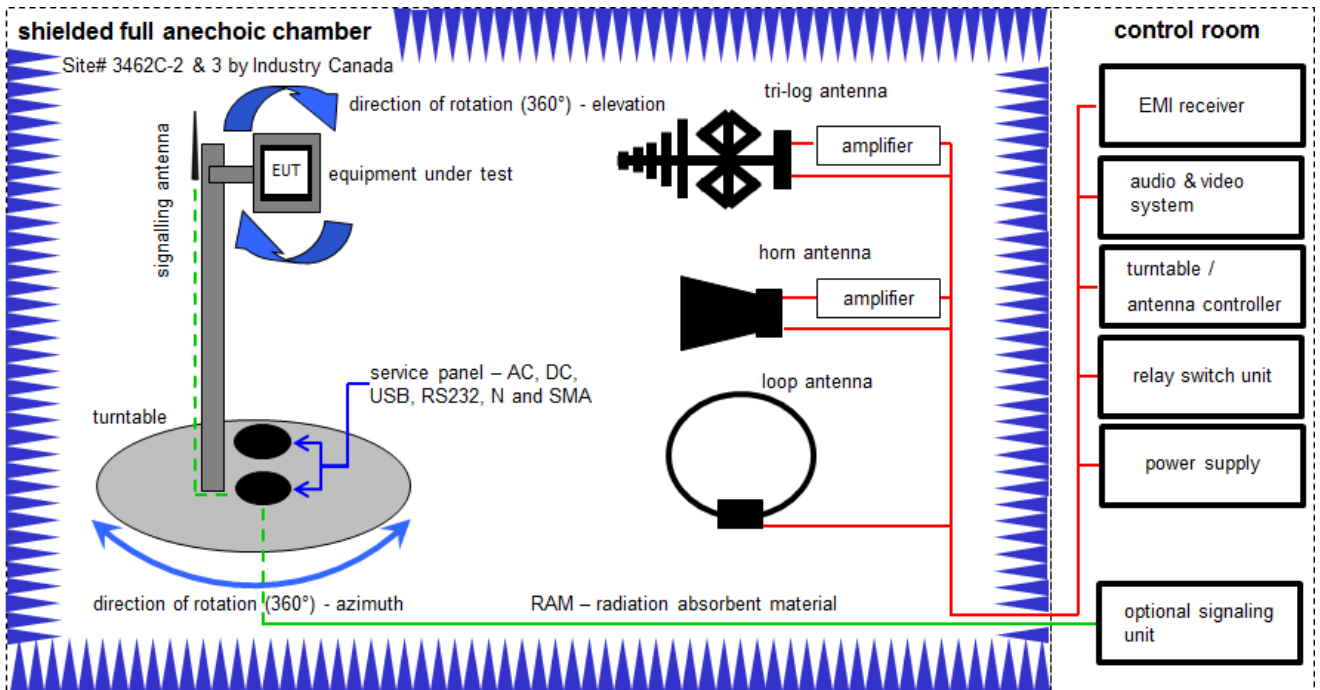

Measurement distance: tri-log antenna and horn antenna 3 meter; loop antenna 3 meter / 1 meter

$$OP = AV + D - G + CA$$

(OP-radiated output power; AV-analyzer value; D-free field attenuation of measurement distance; G-antenna gain+amplifier gain; CA-loss signal path)

Example calculation:


$$OP [dBm] = -65.0 [dBm] + 50 [dB] - 20 [dBi] + 5 [dB] = -30 [dBm] (1 \mu W)$$

**Equipment table:**

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Double-Ridged Waveguide Horn Antenna 1-18.0GHz	3115	EMCO	8812-3088	300001032	vIKI!	20.05.2015	20.05.2017
2	A, B, C	Anechoic chamber	FAC 3/5m	MWB / TDK	87400/02	300000996	ev	-/-	0
3	A, B, C	Switch / Control Unit	3488A	HP	*	300000199	ne	-/-	0
4	B	Active Loop Antenna 10 kHz to 30 MHz	6502	EMCO/2	8905-2342	300000256	k	24.06.2015	24.06.2017
5	A, B, C	EMI Test Receiver 20Hz- 26,5GHz	ESU26	R&S	100037	300003555	k	31.01.2017	30.01.2018
6	A	Highpass Filter	WHK1.1/15G-10SS	Wainwright	3	300003255	ev	-/-	0
7	C	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	371	300003854	vIKI!	29.10.2014	29.10.2017
8	B, A	Broadband Amplifier 0,5-18 GHz	CBLU5184540	CERNEX	22049	300004481	ev	-/-	0
9	A, B, C	4U RF Switch Platform	L4491A	Agilent Technologies	MY50000037	300004509	ne	-/-	0
10	A, B, C	NEXIO EMV-Software	BAT EMC V3.16.0.49	EMCO		300004682	ne	-/-	0
11	A, B, C	PC	ExOne	F+W		300004703	ne	-/-	0

## 6.2 Conducted measurements normal and extreme conditions

### Conducted measurements normal & extreme conditions

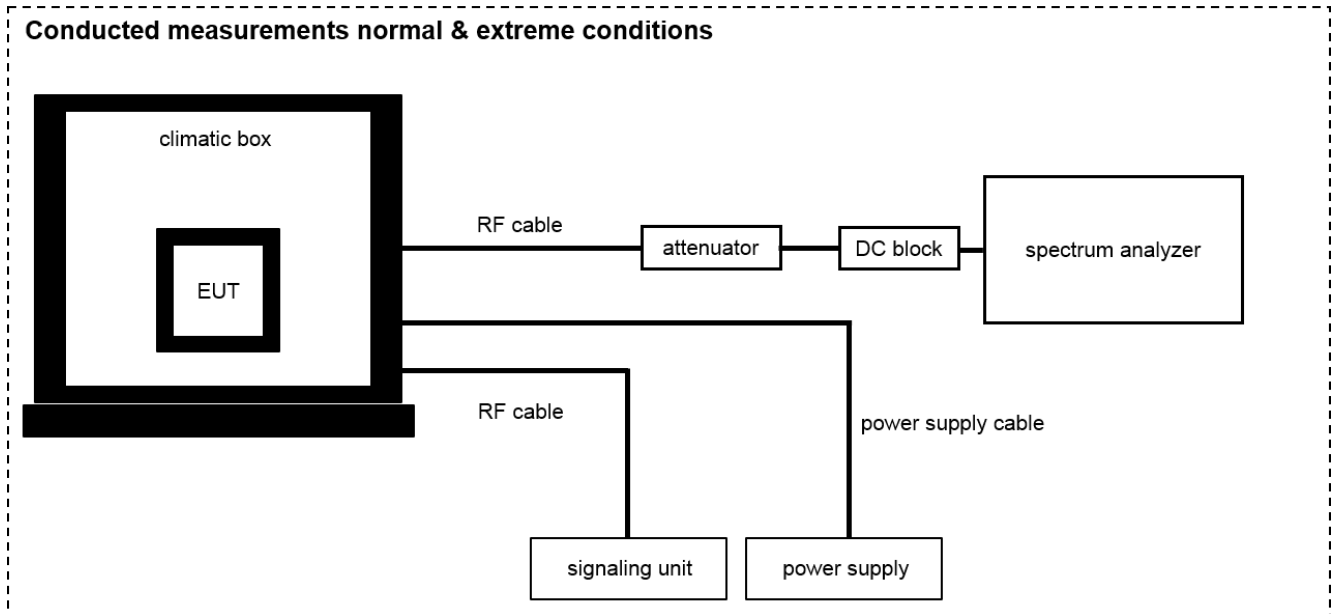

OP = AV + CA  
 (OP-output power; AV-analyzer value; CA-loss signal path)

#### Example calculation:

OP [dBm] = 6.0 [dBm] + 11.7 [dB] = 17.7 [dBm] (58.88 mW)

#### **Equipment table:**

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	DC Power Supply, 60V, 10A	6038A	HP	2752A04866	300001161	Ve	21.01.2015	21.01.2018
2	A	Temperature Test Chamber	T-40/50	CTS GmbH	064023	300003540	ev	03.09.2015	03.09.2017
3	A	Signal- and Spectrum Analyzer	FSW26	R&S	101455	300004528	k	25.01.2017	24.01.2018



## 7 Sequence of testing

### 7.1 Sequence of testing radiated spurious 9 kHz to 12.75 GHz

#### Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 10 m or 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

#### Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 m to 3 m.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

#### Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximize the peaks by changing turntable position  $\pm 45^\circ$  and antenna height between 1 and 4 m.
- The final measurement is done with quasi-peak detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

## 8 Measurement uncertainty

Measurement uncertainty	
Test case	Uncertainty
Transmitter output power	± 3 dB
<b>Occupied bandwidth</b>	± 3 kHz to 10 kHz (depends on the used RBW)
Transmitter frequency stability	± 1 Hz to 1 kHz (depends on the used RBW)
Transmitter unwanted emissions (radiated or conducted)	Radiated: ± 3 dB Conducted: ± 0.5 dB
Modulation characteristics	-/-
Necessary bandwidth (BN) for analogue systems	± 1 kHz (depends on the used RBW)
Frequency modulation	± 3 kHz (depends on the used RBW)
Spurious emissions conducted below 30 MHz (AC conducted)	± 2.6 dB

## 9 Summary of measurement results

<input checked="" type="checkbox"/>	No deviations from the technical specifications were ascertained
<input type="checkbox"/>	There were deviations from the technical specifications ascertained
<input type="checkbox"/>	This test report is only a partial test report. The content and verdict of the performed test cases are listed below.

TC Identifier	Description	Verdict	Date	Remark
RF-Testing	FCC Part 74 RSS - 210, Issue 9 RSS-Gen, Issue 4	See table!	2017-03-30	-/-

Test specification clause	Test case	Temperature conditions	Voltage conditions	C	NC	NA	NP	Remark
FCC Part 74.861 (e)(1)(ii) RSS-210 A1 – 5.1 & 5.3.2 RSS-Gen – 6.12	Transmitter output power	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
FCC Part 74.861 (e)(5) FCC Part 2.1049 RSS-210 A1 – 6.2 RSS-Gen – 6.6	Occupied bandwidth	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
FCC Part 74.861 (e)(4) FCC Part 2.1055 RSS-210 A1 – 6.3 RSS-Gen – 6.11	Transmitter frequency stability	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
		Extreme	Extreme	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
FCC Part 74.861 (e)(6) RSS-210 A1 – 6.4.1	Transmitter unwanted emissions (radiated or conducted)	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
FCC Part 2.1049	Modulation characteristics	Nominal	Nominal	-/-				-/-
FCC Part 74.861 (e)(7) ETSI EN 300 422-1 8.3.1	Necessary bandwidth (BN) for analogue systems	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
FCC Part 74.861 (e)(3) RSS-210 A1 – 6.6.2	Frequency modulation	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
RSS-210 A1 – 6.5 RSS-Gen	Receiver spurious emissions	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	No receiver integrated!
§15.107(a) §15.207	Conducted emissions < 30 MHz	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	-/-

**Note:** C = Compliant; NC = Not compliant; NA = Not applicable; NP = Not performed

## 10 Additional comments

Reference documents: None

Special test descriptions: None

Configuration descriptions: EUT tested with a sensitivity setting of -30 dB – pre-setting from manufacturer.

Test mode:

- No test mode available.  
Test signal is applied to the transmitter.
- Special software is used.  
EUT is transmitting pseudo random data by itself

Antennas and transmit operating modes:

- Operating mode 1 (single antenna)
  - *Equipment with 1 antenna,*
  - *Equipment with 2 diversity antennas operating in switched diversity mode by which at any moment in time only 1 antenna is used,*
  - *Smart antenna system with 2 or more transmit/receive chains, but operating in a mode where only 1 transmit/receive chain is used)*
- Operating mode 2 (multiple antennas, no beamforming)
  - *Equipment operating in this mode contains a smart antenna system using two or more transmit/receive chains simultaneously but without beamforming.*
- Operating mode 3 (multiple antennas, with beamforming)
  - *Equipment operating in this mode contains a smart antenna system using two or more transmit/receive chains simultaneously with beamforming.  
In addition to the antenna assembly gain (G), the beamforming gain (Y) may have to be taken into account when performing the measurements.*

## 11 Measurement results

### 11.1 Transmitter output power

**Measurement:**

Measurement parameter	
Detector:	Peak (worst case) / Average (RMS)
Sweep time:	Auto / 20s
Resolution bandwidth:	> emission bandwidth
Video bandwidth:	> resolution bandwidth
Span:	> 2 times emissions bandwidth
Trace mode:	Max. hold
EUT configuration:	Peak: Unmodulated carrier  RMS: Modulate the transmitter with a 2.5 kHz tone at a level 16 dB higher than that required to produce a frequency deviation of $\pm 75$ kHz, or to produce 50% of the manufacturer's rated deviation, whichever is less.
Test setup:	See sub clause 7.2 – A
Measurement uncertainty:	See sub clause 9

**Limits:**


FCC & IC
470 MHz to 608 MHz 250 mW (average) / 24 dBm (average)

**Result:**

Frequency (MHz)	transmitter output power (dBm)	
	Peak	Average
518.1	12.78	12.68
533.0	13.29	13.02
547.9	14.47	14.21


**Plots:**

**Plot 1: lowest channel**

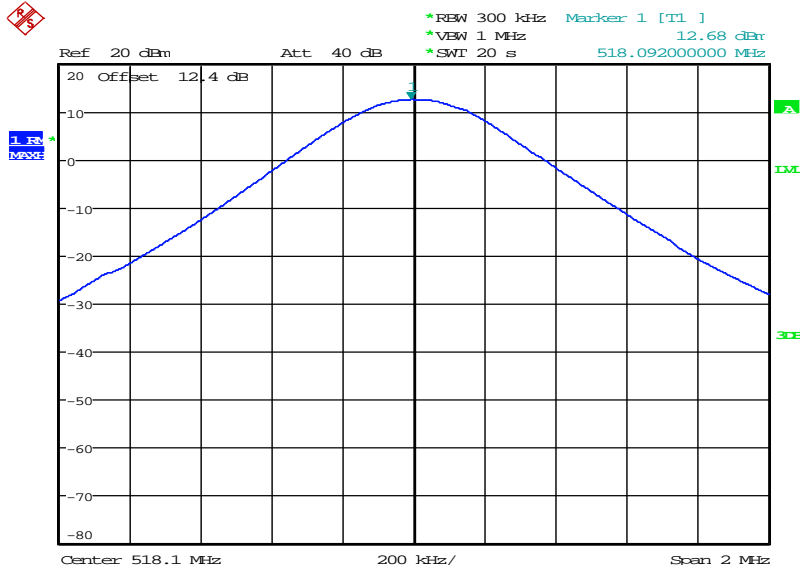


Date: 23.MAR.2017 08:48:11

**Plot 2: middle channel**

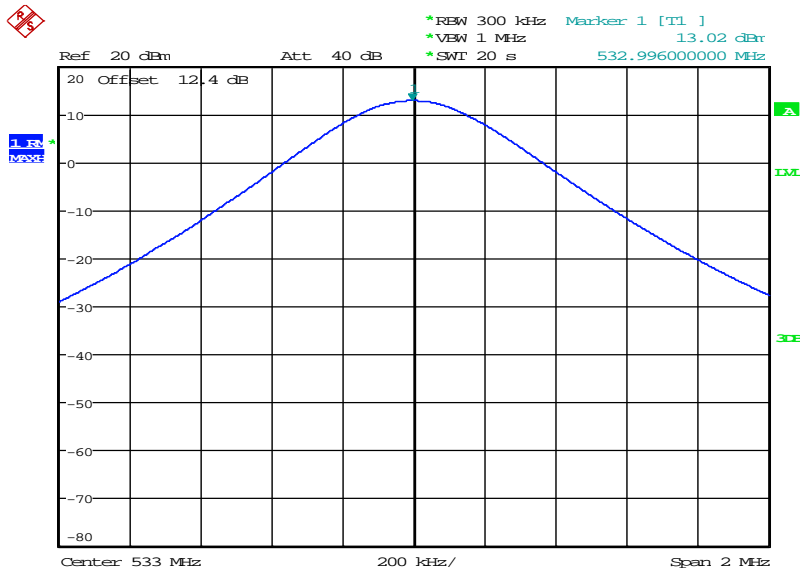

Date: 23.MAR.2017 08:49:42

**Plot 3: highest channel**

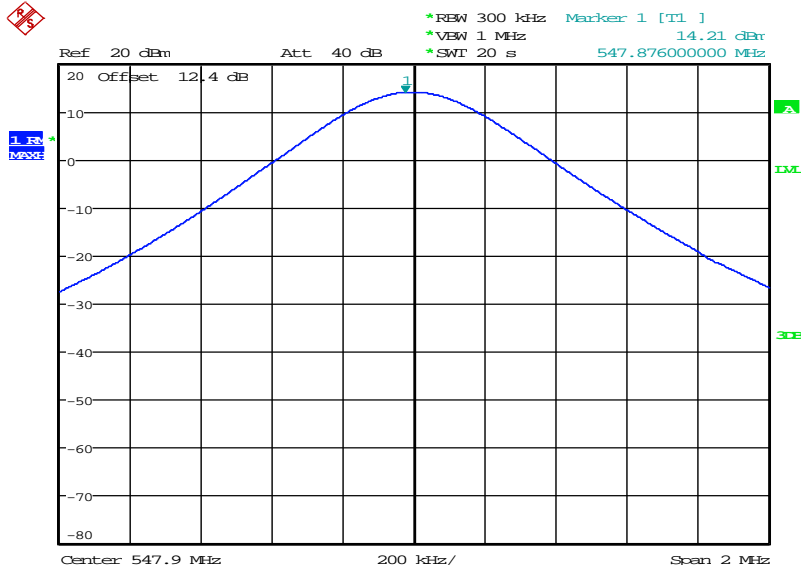

Date: 23.MAR.2017 09:00:11

## 11.2 Occupied bandwidth

### Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	1 % to 5 % of the occupied bandwidth
Video bandwidth:	3 x resolution bandwidth
Span:	2 x emission bandwidth
Trace mode:	Max. hold
Analyzer function:	99% power occupied bandwidth function
EUT:	Modulated signal with max. frequency deviation
Test setup:	See sub clause 7.2 - A
Measurement uncertainty:	See sub clause 9

### Limits:

FCC & IC
470 MHz to 608 MHz 200 kHz
Occupied bandwidth 99%. Other than single sideband or independent sideband transmitters - when modulated by a 2500 Hz tone at an input level 16 dB greater than that necessary to produce 50 percent modulation. The input level shall be established at the frequency of maximum response of the audio modulating circuit.


### Result:

Frequency (MHz)	occupied bandwidth (kHz)	
	1 kHz tone	2.5 kHz tone
518.1	127.2	112.4
533.0	127.6	112.4
547.9	128.8	112.8




**Plots:**

**Plot 1: lowest channel, 1 kHz tone**

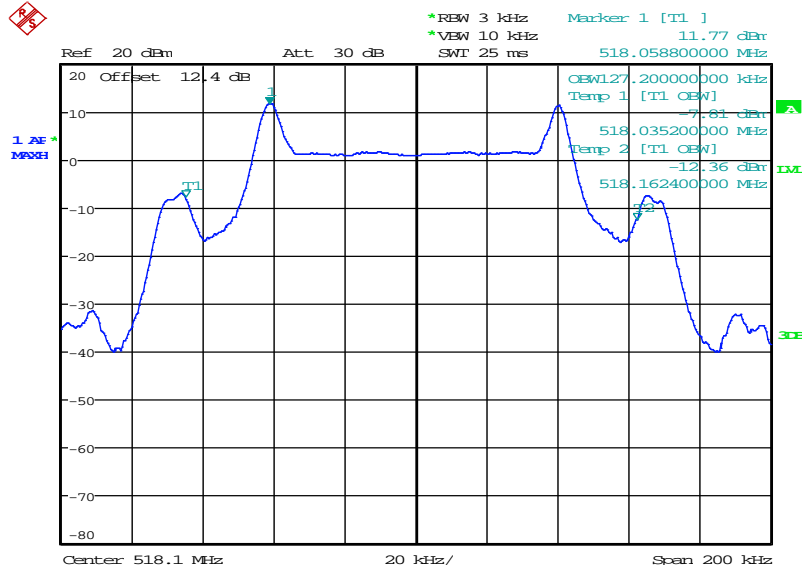


Date: 23.MAR.2017 09:36:31

**Plot 2: middle channel, 1 kHz tone**

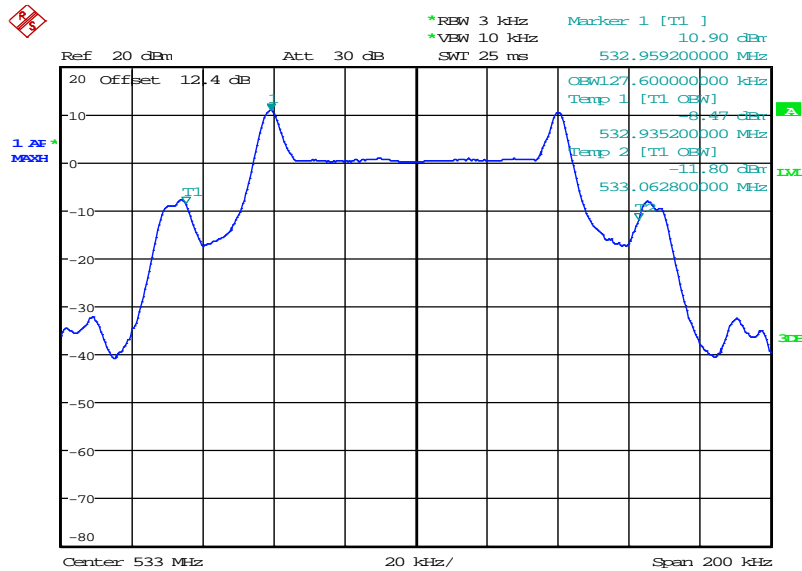


Date: 23.MAR.2017 09:39:25

Plot 3: highest channel, 1 kHz tone

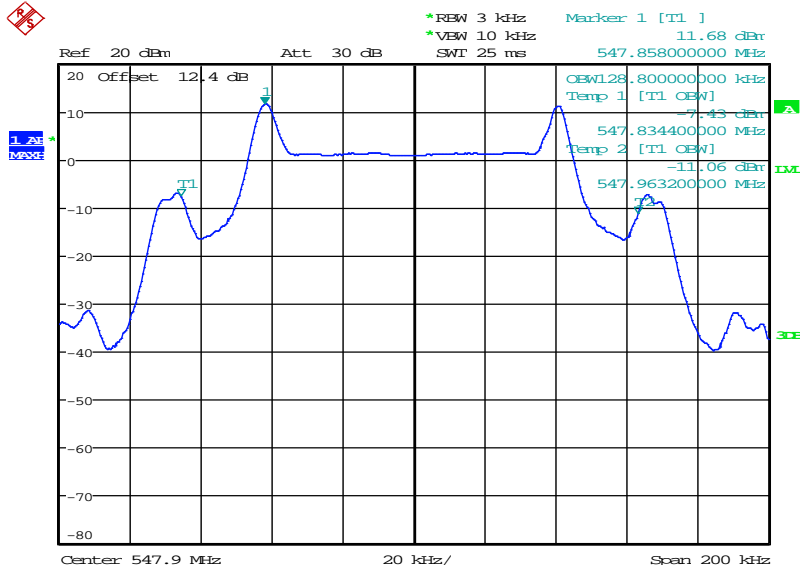


Date: 23.MAR.2017 09:47:04

Plot 4: lowest channel, 2.5 kHz tone

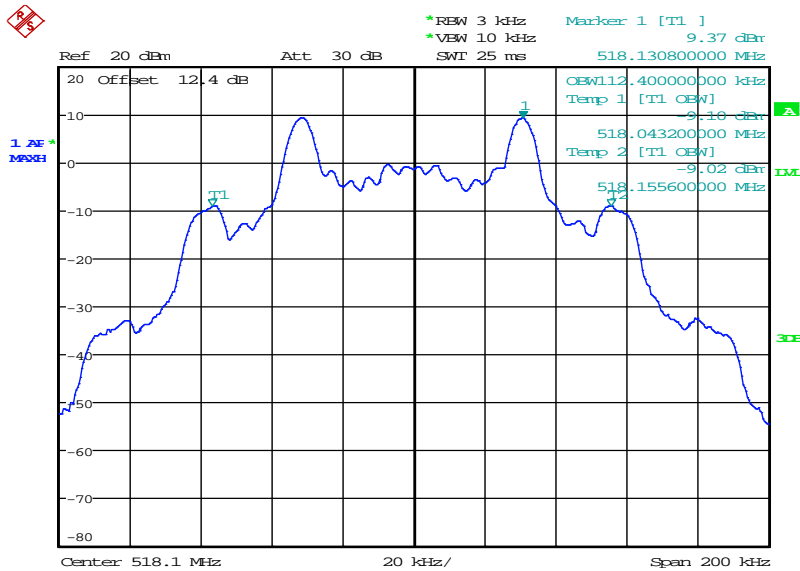


Date: 23.MAR.2017 09:37:36

Plot 5: middle channel, 2.5 kHz tone

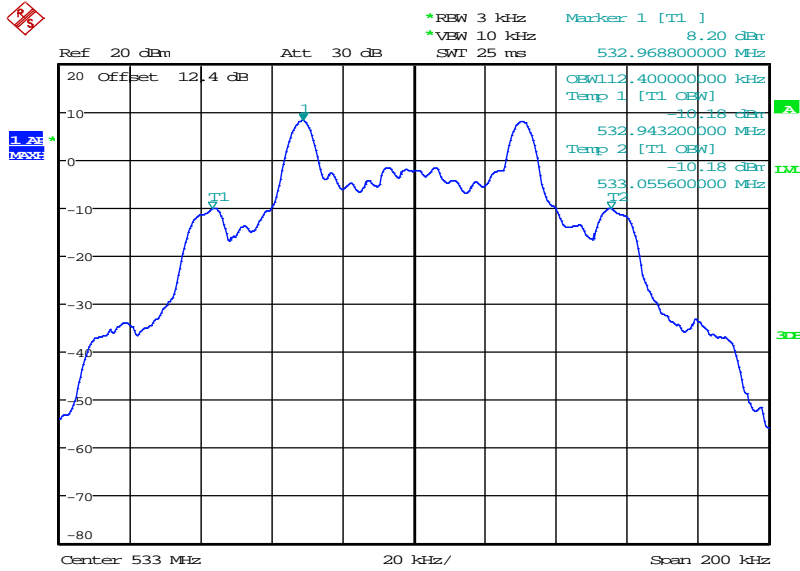

Date: 23.MAR.2017 09:41:22

Plot 6: highest channel, 2.5 kHz tone

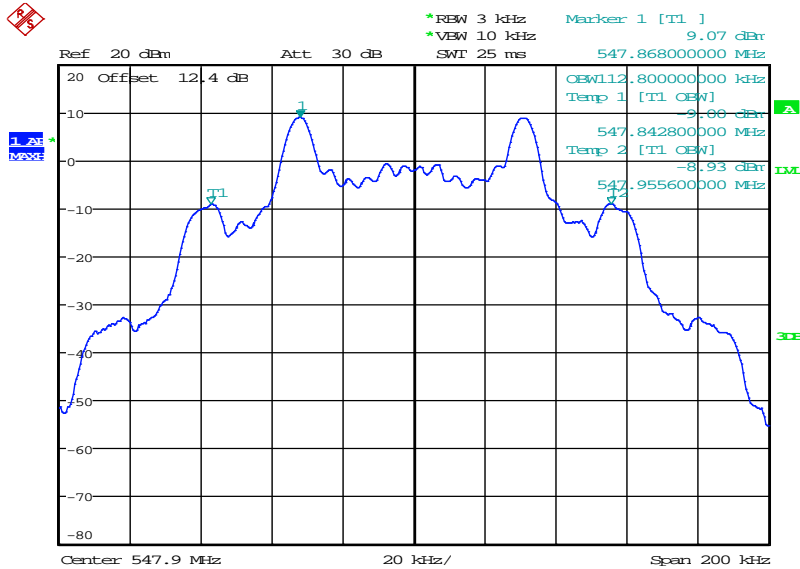

Date: 23.MAR.2017 10:36:21

### 11.3 Transmitter frequency stability

**Measurement:**

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	1 Hz / 10 Hz / 100 Hz
Video bandwidth:	3 x resolution bandwidth
Span:	wide enough to follow the frequency drift
Trace mode:	clear/write/view
EUT:	CW signal or MC with measurement method description
Test setup:	See sub clause 7.2 - B
Measurement uncertainty:	See sub clause 9

**Limits:**

FCC & IC
470 MHz to 608 MHz ± 50 ppm

**Results:** lowest channel

Temperature / Voltage	Frequency (MHz)	Deviation (kHz / ppm)
-30 °C / V <sub>nom</sub>	518.10217	2.17 / 4.19
-20 °C / V <sub>nom</sub>	518.10348	3.48 / 6.72
-10 °C / V <sub>nom</sub>	518.10421	4.21 / 8.13
0 °C / V <sub>nom</sub>	518.10409	4.09 / 7.89
+10 °C / V <sub>nom</sub>	518.10309	3.09 / 5.96
+20 °C / V <sub>nom</sub>	518.10089	0.89 / 1.12
+30 °C / V <sub>nom</sub>	518.10042	0.42 / 0.81
+40 °C / V <sub>nom</sub>	518.09886	-1.14 / -2.20
+50 °C / V <sub>nom</sub>	518.09641	-3.59 / -6.93
+55 °C / V <sub>nom</sub> (not required)	518.09516	-4.84 / -9.34
<hr/>		
+20 °C / V <sub>nom</sub> - 15%	518.10105	1.06 / 2.05
+20 °C / V <sub>nom</sub>	518.10089	0.89 / 1.72
+20 °C / V <sub>nom</sub> + 15%	518.10104	1.04 / 2.01

**Results:** middle channel

Temperature / Voltage	Frequency (MHz)	Deviation (kHz / ppm)
-30 °C / V <sub>nom</sub>	533.00203	2.03 / 3.81
-20 °C / V <sub>nom</sub>	533.00371	3.71 / 6.96
-10 °C / V <sub>nom</sub>	533.00486	4.86 / 9.11
0 °C / V <sub>nom</sub>	533.00405	4.05 / 7.60
+10 °C / V <sub>nom</sub>	533.00264	2.64 / 4.95
+20 °C / V <sub>nom</sub>	533.00010	0.10 / 0.19
+30 °C / V <sub>nom</sub>	532.99849	-1.51 / -2.83
+40 °C / V <sub>nom</sub>	532.99765	-2.35 / -4.41
+50 °C / V <sub>nom</sub>	532.99727	-2.73 / -5.12
+55 °C / V <sub>nom</sub> (not required)	532.99659	-3.41 / -6.40
+20 °C / V <sub>nom</sub> - 15%	533.00085	0.85 / 1.60
+20 °C / V <sub>nom</sub>	533.00010	0.10 / 0.19
+20 °C / V <sub>nom</sub> + 15%	533.00070	0.70 / 1.31


**Results:** highest channel

Temperature / Voltage	Frequency (MHz)	Deviation (kHz / ppm)
-30 °C / V <sub>nom</sub>	547.90266	2.66 / 4.86
-20 °C / V <sub>nom</sub>	547.90373	3.73 / 6.81
-10 °C / V <sub>nom</sub>	547.90442	4.42 / 8.07
0 °C / V <sub>nom</sub>	547.90418	4.18 / 7.63
+10 °C / V <sub>nom</sub>	547.90316	3.16 / 5.77
+20 °C / V <sub>nom</sub>	547.90117	1.17 / 2.14
+30 °C / V <sub>nom</sub>	547.90069	0.69 / 1.26
+40 °C / V <sub>nom</sub>	547.89845	-1.55 / -2.83
+50 °C / V <sub>nom</sub>	547.89599	-4.01 / -7.32
+55 °C / V <sub>nom</sub> (not required)	547.89499	-5.01 / -9.14
+20 °C / V <sub>nom</sub> - 15%	547.90122	1.22 / 2.23
+20 °C / V <sub>nom</sub>	547.90117	1.17 / 2.14
+20 °C / V <sub>nom</sub> + 15%	547.90115	1.15 / 2.10

**Plots:**


The carrier frequency drift is calculated with the right and the left marker (see plots below) from the integrated 99% OBW function.

**Plot 1:** lowest channel,  $T_{nom} / V_{nom}$

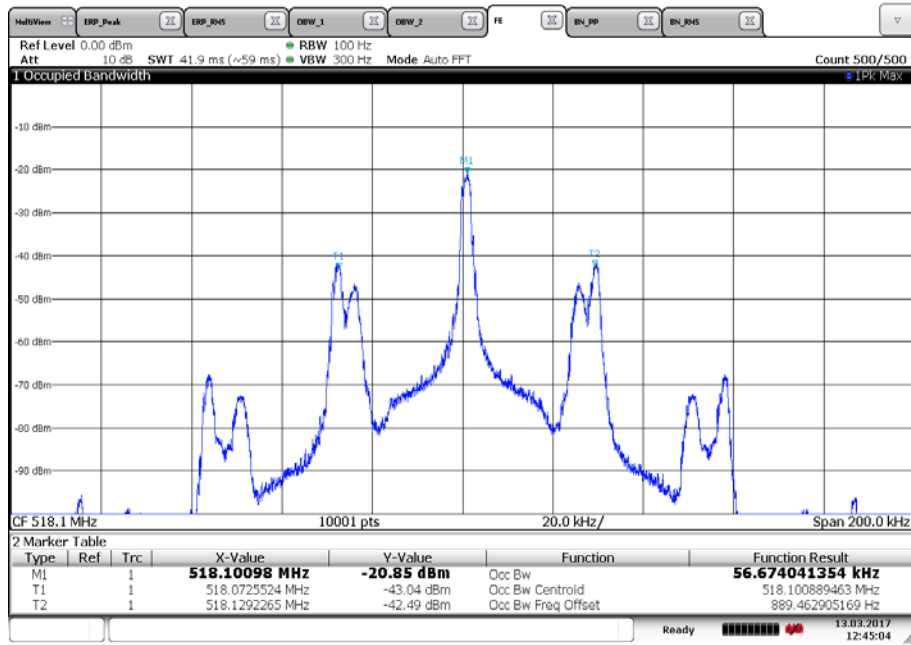


12:45:04 13.03.2017

Plot 2: middle channel,  $T_{nom} / V_{nom}$

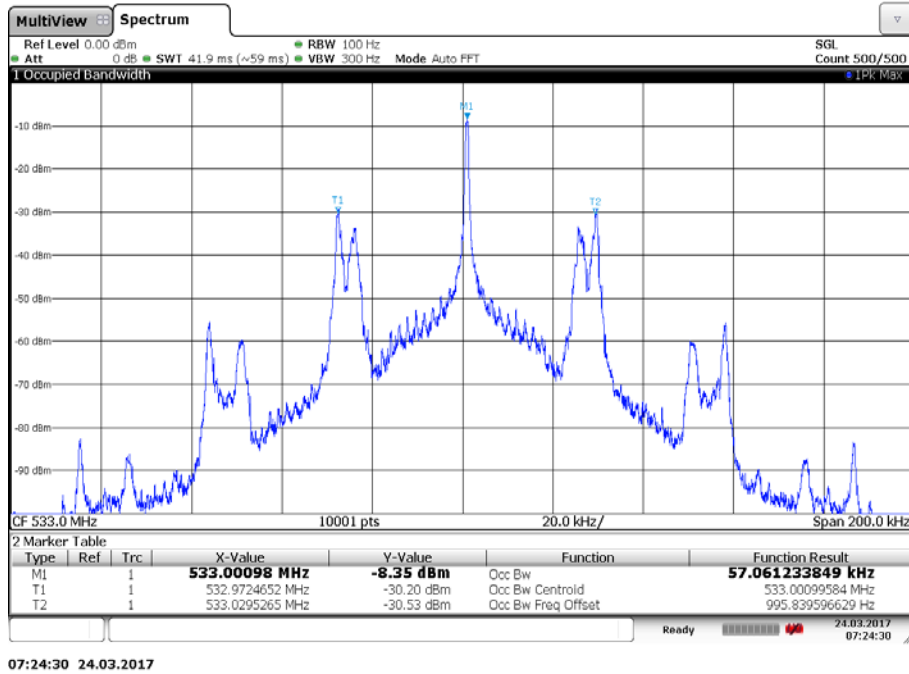

Plot 3: highest channel,  $T_{nom} / V_{nom}$

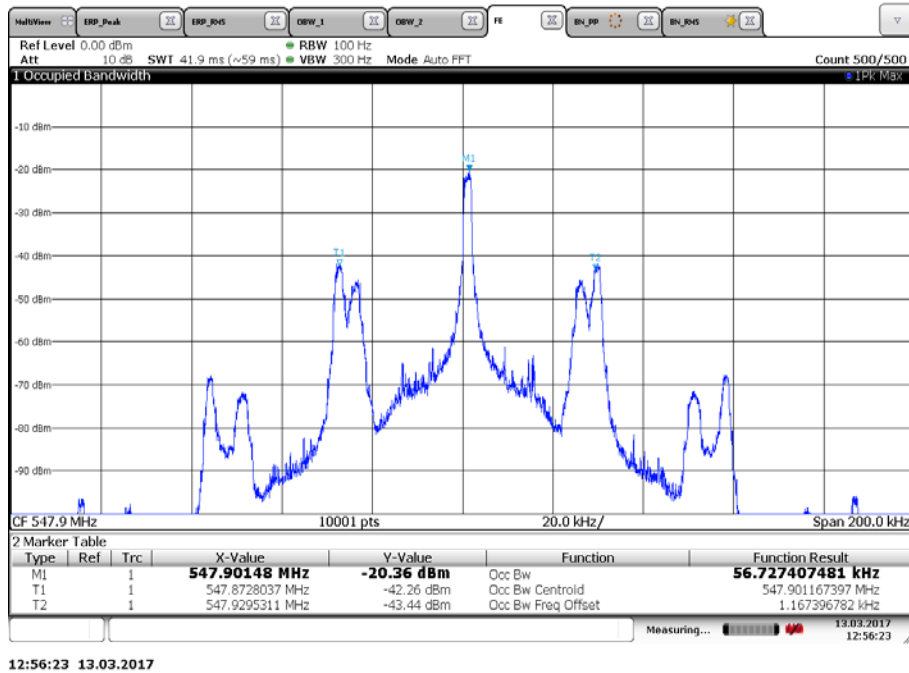

### 11.4 Transmitter unwanted emissions (radiated)

**Measurement:**

Measurement parameter		
Detector:	Peak	
Sweep time:	Auto	
Resolution bandwidth:	25 dBc and 35 dBc-criteria:	1% of the authorized bandwidth
	$55+10\log_{10}(P_{MEAN}$ in Watts) dB - criteria	30 kHz
	$43+10\log_{10}(P_{MEAN}$ in Watts) dB - criteria	120 kHz / 1 MHz
Video bandwidth:	3 x resolution bandwidth	
Trace mode:	Max. hold	
EUT:	MC with max frequency deviation	
Test setup:	See sub clause 7.1 – A See sub clause 7.2 – A	
Measurement uncertainty:	See sub clause 9	

**Limits:**

IC
<ul style="list-style-type: none"> <li>at least 25 dB on any frequency that is removed from the operating frequency by more than 50%, up to and including 100% of the authorized bandwidth; and (FCC &amp; IC)</li> <li>at least 35 dB on any frequency that is removed from the operating frequency by more than 100%, up to and including 250% of the authorized bandwidth. (FCC &amp; IC)</li> <li>On any frequency removed from the operating frequency by more than 250 percent of the authorized bandwidth: at least <math>43 + 10 \cdot \log_{10}</math> (mean output power in watts) dB. (FCC)</li> <li>at least <math>55 + 10 \cdot \log_{10}</math> (<math>P_{MEAN}</math> in Watts) dB on any frequency removed from the operating frequency by more than 250% of the authorized bandwidth. (IC)</li> </ul>


**Results:**

carrier frequency (MHz)	unwanted emission frequency (MHz)	Limit	level (dB) / (dBm) or remark
All detected emissions are more than 20 dB below the limit.			




**Plots:** radiated


**Plot 1:** lowest channel, magnetic spurious emissions 9 kHz to 30 MHz

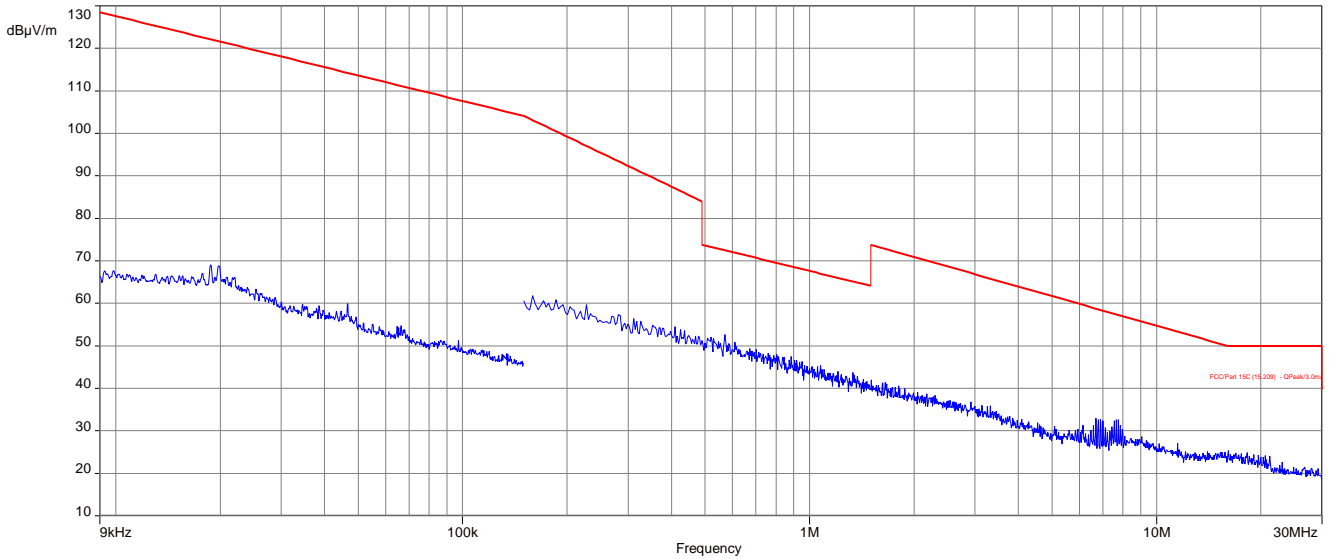

**Plot 2:** lowest channel, spurious emissions, 30 MHz – 12.75 GHz

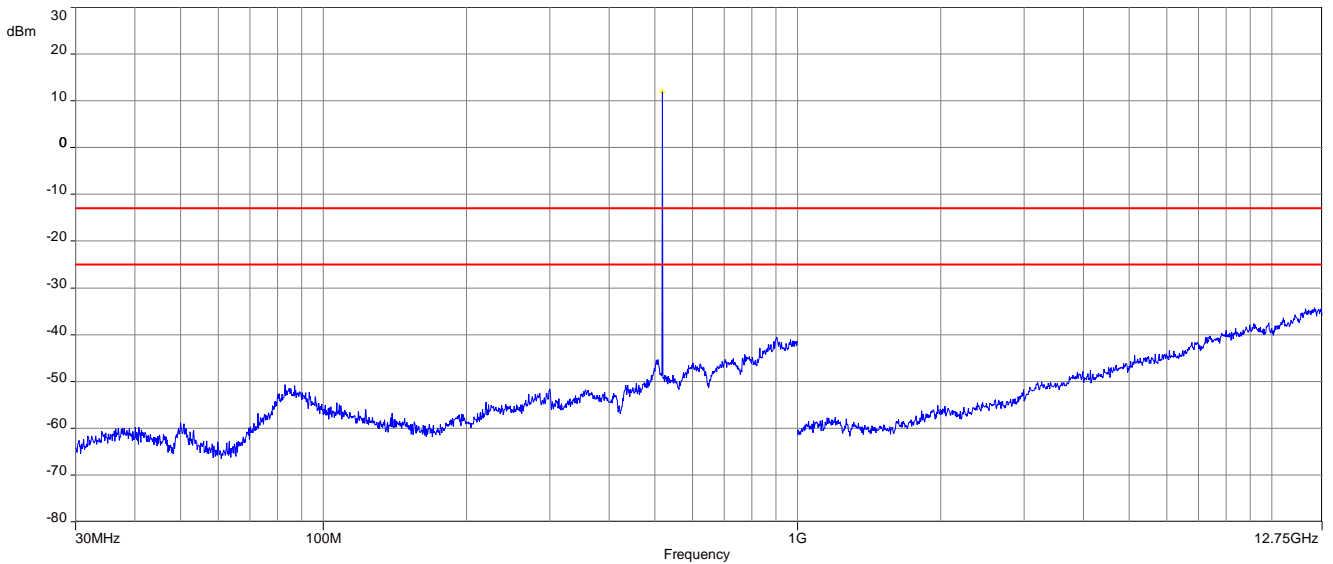


Plot 3: lowest channel, spectrum mask

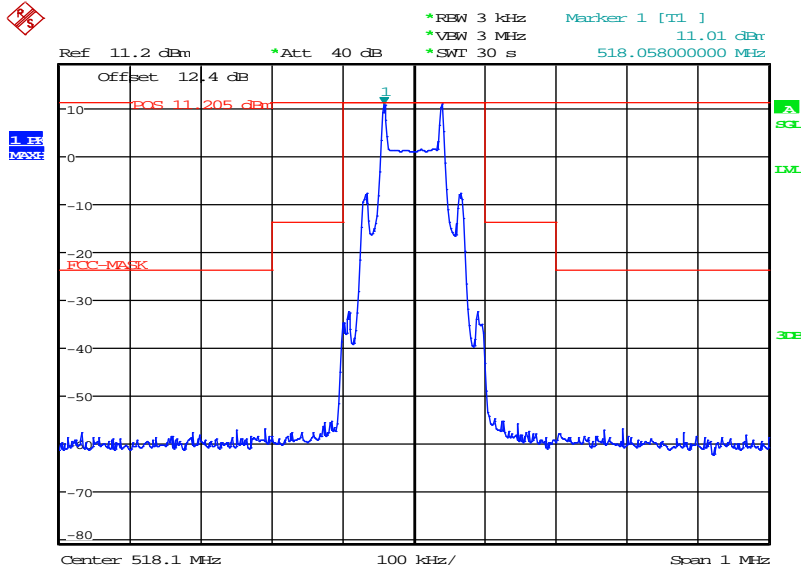


Date: 23.MAR.2017 10:57:23


**Plot 4:** middle channel, magnetic spurious emissions 9 kHz to 30 MHz

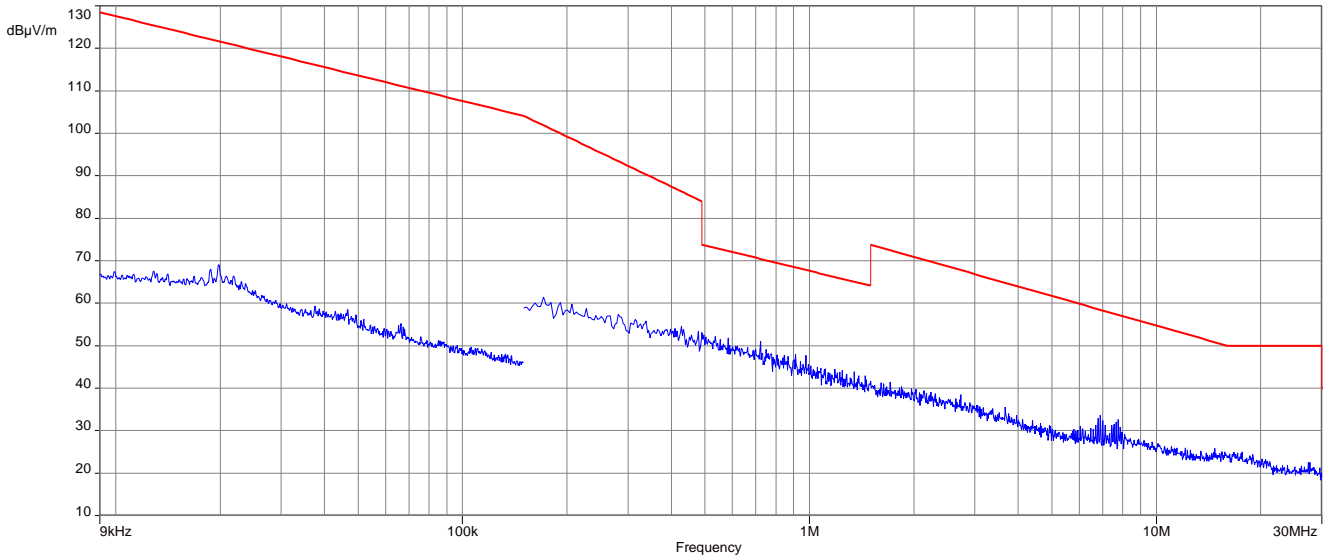

**Plot 5:** middle channel, spurious emissions, 30 MHz – 12.75 GHz

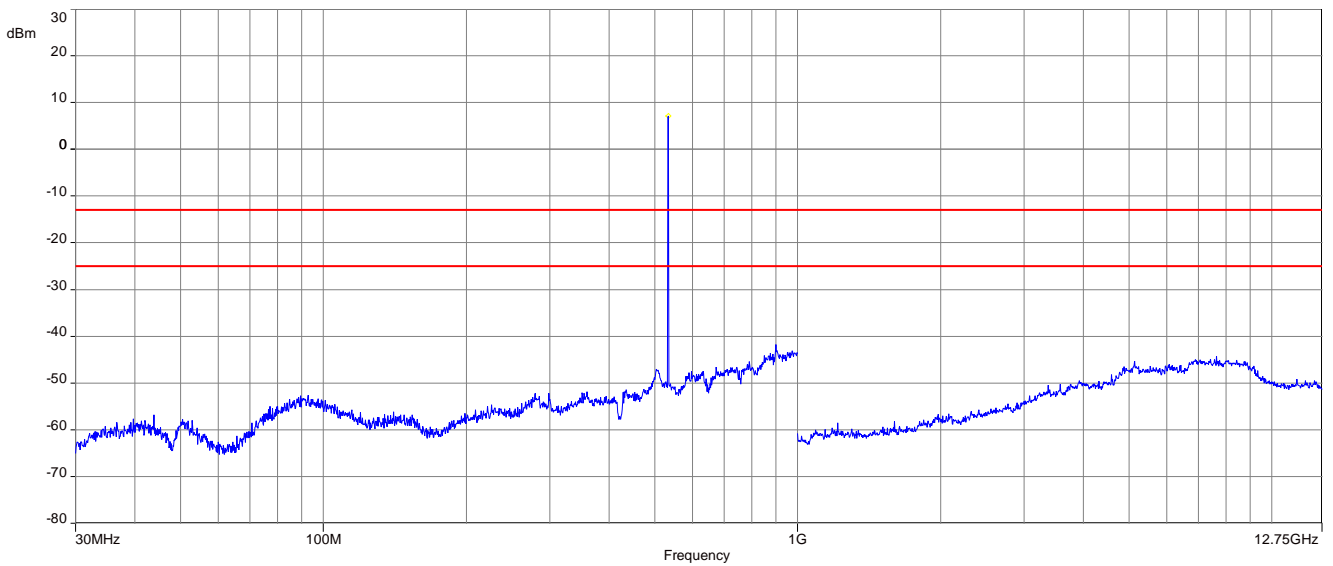


Plot 6: middle channel, spectrum mask

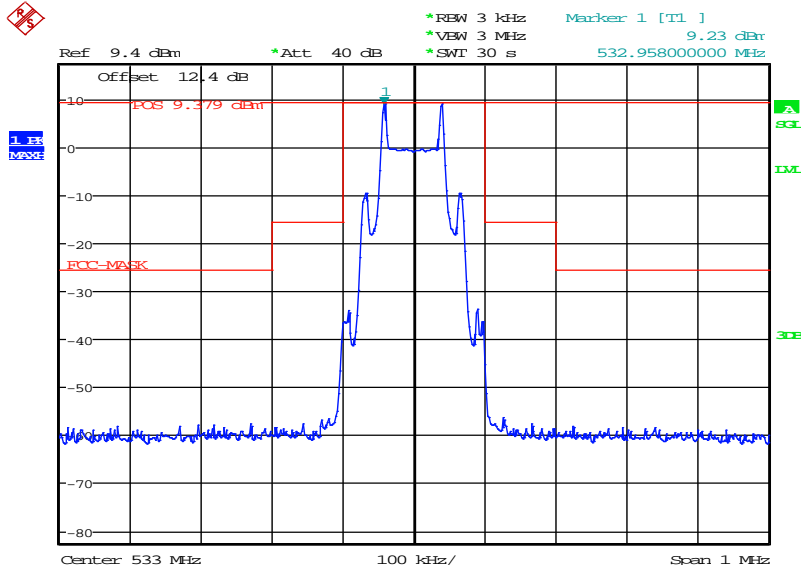


Date: 23.MAR.2017 10:55:31


**Plot 7:** highest channel, magnetic spurious emissions 9 kHz to 30 MHz

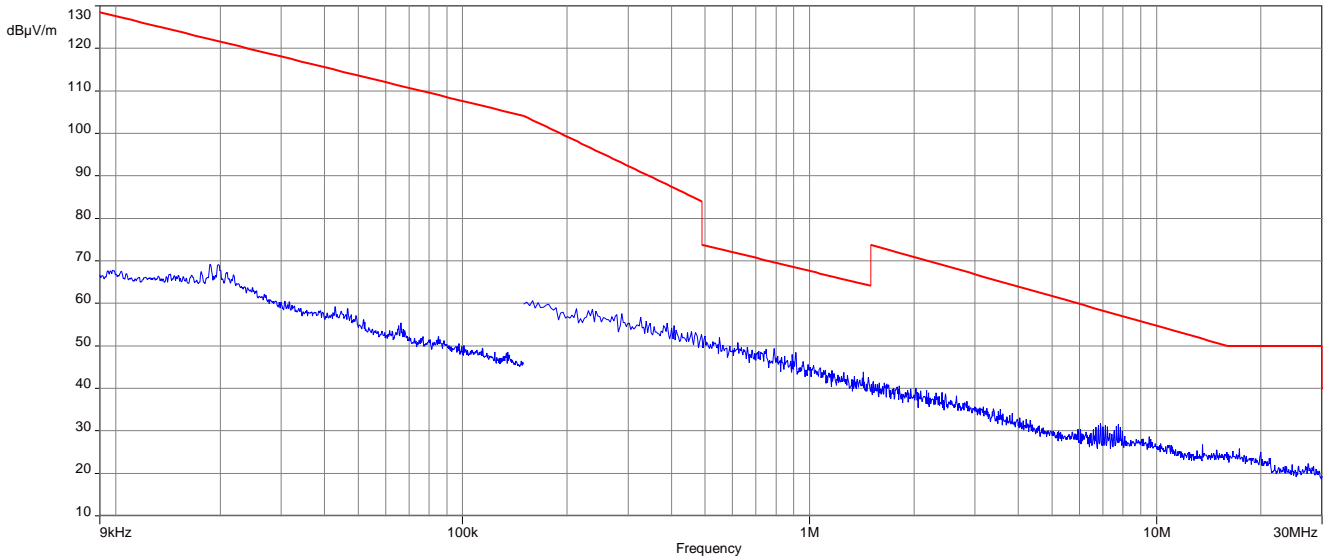

**Plot 8:** highest channel, spurious emissions, 30 MHz – 12.75 GHz

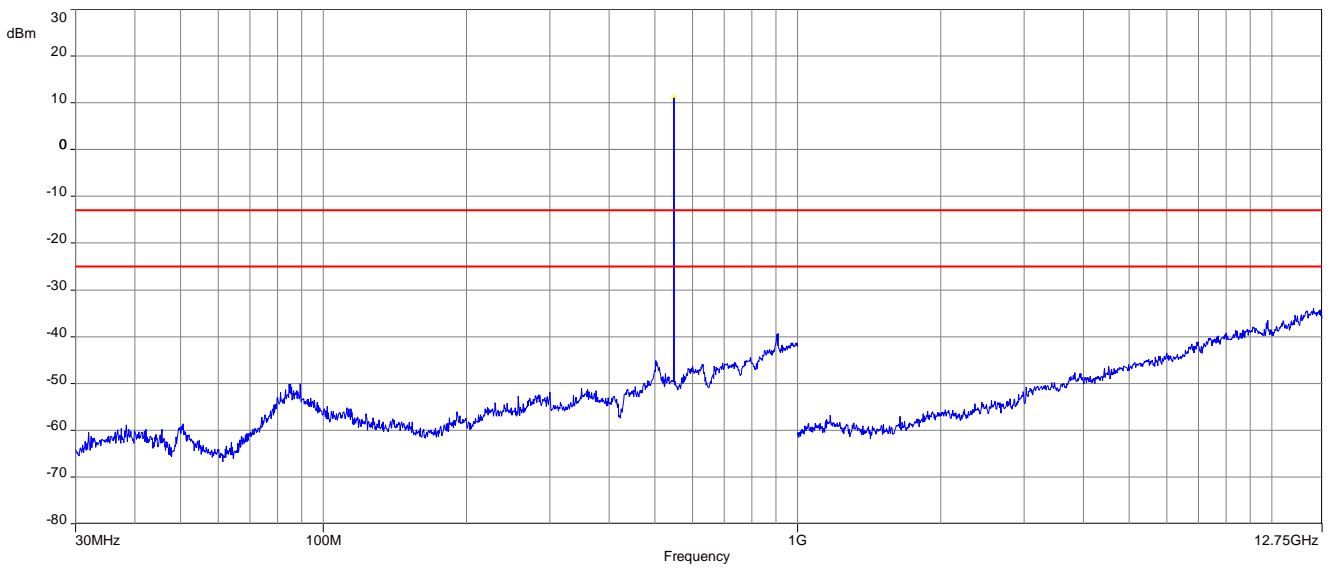

Plot 9: highest channel, spectrum mask

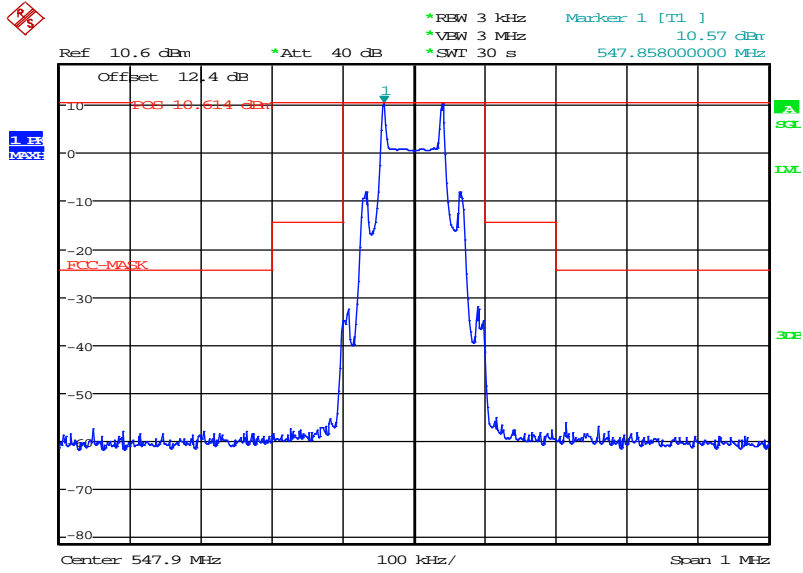


Date: 23.MAR.2017 10:53:16

### 11.5 Necessary bandwidth (BN) for analogue systems

**Measurement:**


Measurement parameter	
Detector:	Peak / Average (-90 dBc point only)
Sweep time:	Auto
Resolution bandwidth:	1 kHz
Video bandwidth:	1 kHz
Span:	$f_c - 1 \text{ MHz}$ to $f_c + 1 \text{ MHz}$ (2 MHz)
Trace mode:	Max hold/view
EUT:	CW and MC
Test setup:	See sub clause 7.2 - D
Measurement uncertainty:	See sub clause 9

**Limits:**

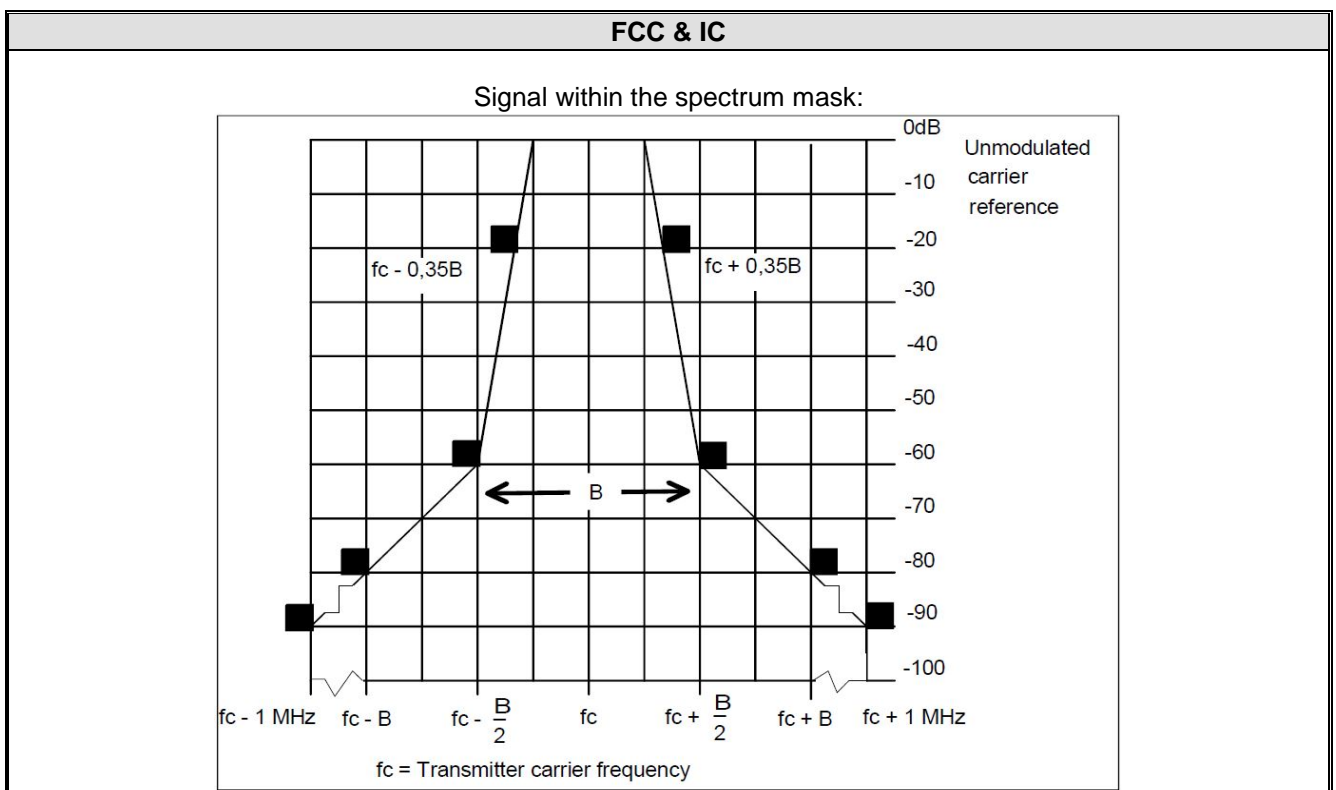


**Plots:**

**Plot 1:** lowest channel, modulated carrier

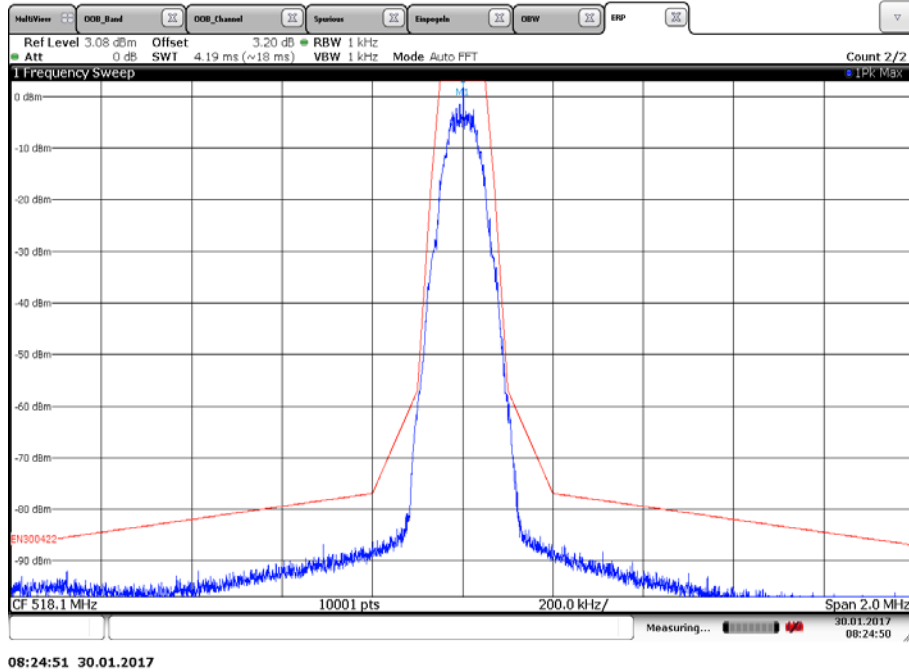


**Plot 2:** middle channel, modulated carrier

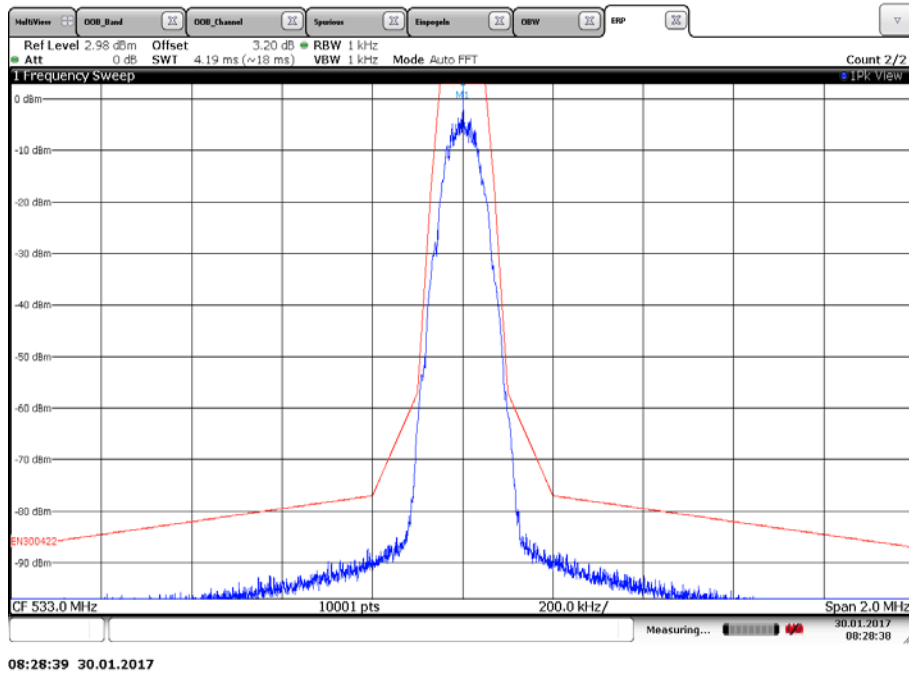



Plot 3: highest channel, modulated carrier

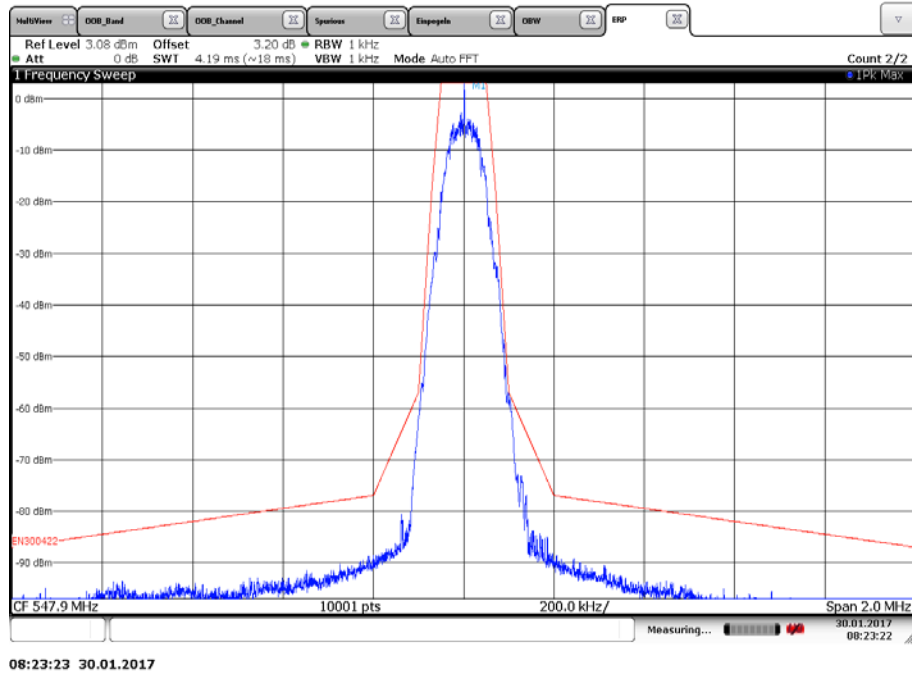

## 11.6 Frequency modulation

### Measurement:


Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	1 % to 5 % of the occupied bandwidth
Video bandwidth:	3 x resolution bandwidth
Span:	2 x emission bandwidth
Trace mode:	Max. hold
Analyzer function:	99% power occupied bandwidth function
EUT:	Modulated signal with frequency varied between 50 Hz and 15 kHz
Test setup:	See sub clause 7.2 - D
Measurement uncertainty:	See sub clause 9

### Limits:

FCC & IC
Frequency deviation up to a maximum of $\pm 75$ kHz


**Plots:**

**Plot 1:** lowest channel, max hold with frequency variation from 50 Hz to 15 kHz

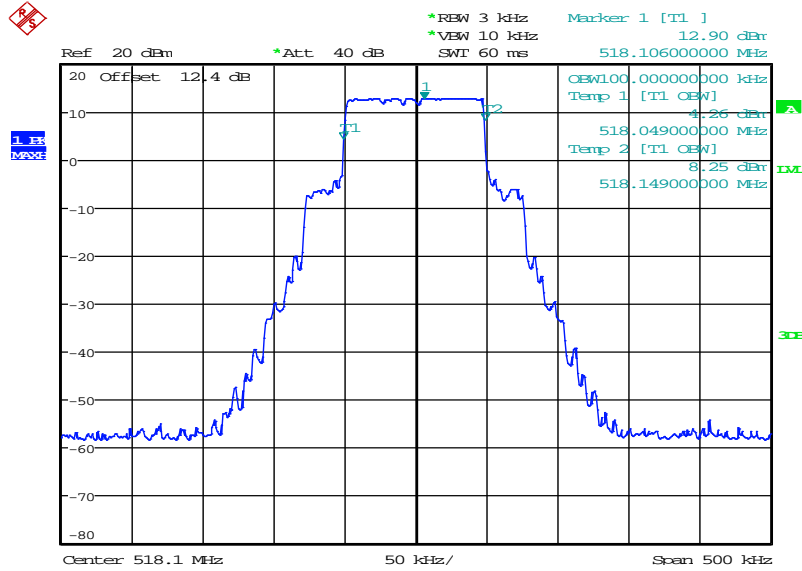


Date: 23.MAR.2017 11:00:22

**Plot 2:** middle channel, max hold with frequency variation from 50 Hz to 15 kHz

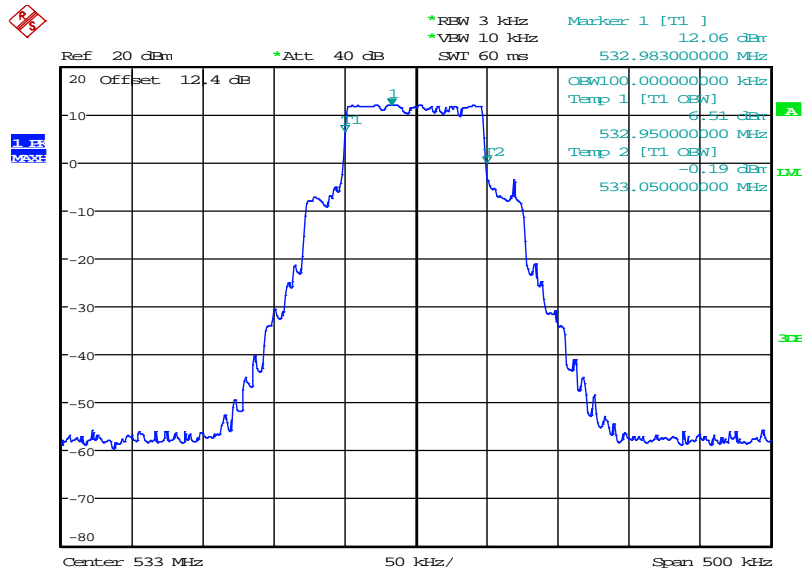

Date: 23.MAR.2017 11:04:17

**Plot 3:** highest channel, max hold with frequency variation from 50 Hz to 15 kHz

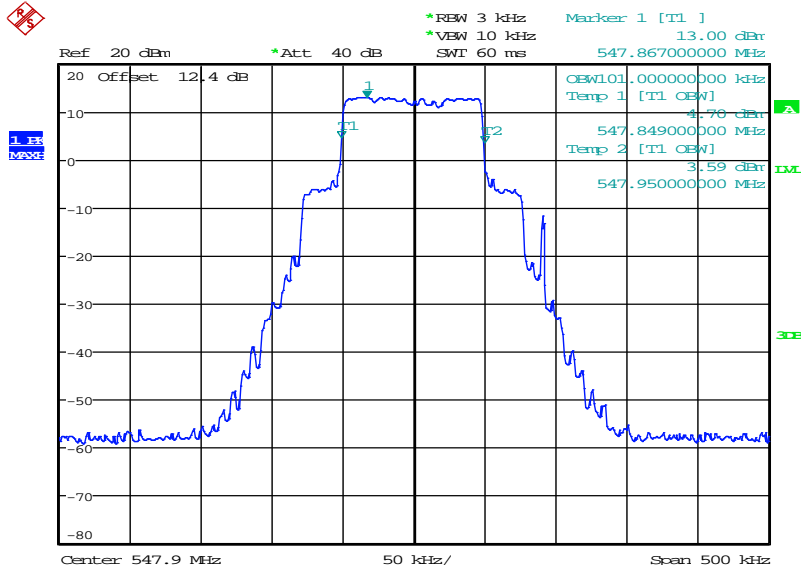

Date: 23.MAR.2017 11:06:54

## 12 Observations

No observations except those reported with the single test cases have been made.

## Annex A Document history

Version	Applied changes	Date of release
	Initial release	2017-03-30

## Annex B Further information

### Glossary

AVG	-	Average
DUT	-	Device under test
EMC	-	Electromagnetic Compatibility
EN	-	European Standard
EUT	-	Equipment under test
ETSI	-	European Telecommunications Standard Institute
FCC	-	Federal Communication Commission
FCC ID	-	Company Identifier at FCC
HW	-	Hardware
IC	-	Industry Canada
Inv. No.	-	Inventory number
N/A	-	Not applicable
PP	-	Positive peak
QP	-	Quasi peak
S/N	-	Serial number
SW	-	Software
PMN	-	Product marketing name
HMN	-	Host marketing name
HVIN	-	Hardware version identification number
FVIN	-	Firmware version identification number
OBW		Occupied Bandwidth
OC		Operating Channel
OCW		Operating Channel Bandwidth
OOB		Out Of Band

## Annex C Accreditation Certificate

first page

last page



Deutsche Akkreditierungsstelle GmbH

Befehle gemäß § 8 Absatz 1 AkkStelleG i.V.m. § 1 Absatz 1 AkkStelleGBV  
Unterzeichnerin der Multilateralen Abkommen  
von EA, ILAC und IAF zur gegenseitigen Anerkennung

### Akkreditierung



Die Deutsche Akkreditierungsstelle GmbH bestätigt hiermit, dass das Prüflaboratorium

**CTC advanced GmbH**  
Untertürkheimer Straße 6-10, 66117 Saarbrücken

die Kompetenz nach DIN EN ISO/IEC 17025:2005 besitzt, Prüfungen in folgenden Bereichen durchzuführen:

**Funk**  
Mobilfunk (GSM / DCS) + OTA  
Elektromagnetische Verträglichkeit (EMV)  
Produktsicherheit  
SAR / EMF  
Umwelt  
Smart Card Technology  
Bluetooth®  
Automotive  
Wi-Fi-Services  
Kandische Anforderungen  
US-Anforderungen  
Akustik  
Near Field Communication (NFC)

Die Akkreditierungsurkunde gilt nur in Verbindung mit dem Bescheid vom 25.11.2016 mit der Akkreditierungsnummer D-PL-12076-01 und ist gültig bis 17.01.2018. Sie besteht aus diesem Deckblatt, der Rückseite des Deckblatts und der folgenden Anlage mit insgesamt 63 Seiten.

Registrierungsnummer der Urkunde: D-PL-12076-01-01

Frankfurt, 25.11.2016

Stelle Minister auf der Rückseite

Im Auftrag Dipl.-Ing. (FH) Ralf Eigner  
Abteilungsleiter

Deutsche Akkreditierungsstelle GmbH

Standort Berlin  
Spittelmarkt 10  
10117 Berlin

Standort Frankfurt am Main  
Europa-Allee 52  
60327 Frankfurt am Main

Standort Braunschweig  
Bundesallee 100  
38116 Braunschweig

Die auszugsweise Veröffentlichung der Akkreditierungsurkunde bedarf der vorherigen schriftlichen Zustimmung der Deutsche Akkreditierungsstelle GmbH (DAkkS). Ausgenommen davon ist die separate Weiterverbreitung des Deckblatts durch die umeitig genannte Konformitätsbewertungsstelle in unveränderter Form.

Es darf nicht der Anschein erweckt werden, dass sich die Akkreditierung auch auf Bereiche erstreckt, die über den durch die DAkkS bestätigten Akkreditierungsbereich hinausgehen.

Die Akkreditierung erfolgte gemäß des Gesetzes über die Akkreditierungsstelle (AkkStelleG) vom 31. Juli 2009 (BGBl. I S. 2625) sowie der Verordnung (EG) Nr. 765/2008 des Europäischen Parlaments und des Rates vom 9. Juli 2008 über die Vorschriften für die Akkreditierung und Marktüberwachung im Zusammenhang mit der Vermarktung von Produkten (Abt. L 218 vom 9. Juli 2008, S. 30). Die DAkkS ist Unterzeichnerin der Multilateralen Abkommen zur gegenseitigen Anerkennung der European co-operation for Accreditation (EA), des International Accreditation Forum (IAF) und der International Laboratory Accreditation Cooperation (ILAC). Die Unterzeichner dieser Abkommen erkennen ihre Akkreditierungen gegenseitig an.

Der aktuelle Stand der Mitgliedschaft kann folgenden Webseiten entnommen werden:  
EA: [www.european-accreditation.org](http://www.european-accreditation.org)  
ILAC: [www.ilac.org](http://www.ilac.org)  
IAF: [www.iaf.eu](http://www.iaf.eu)

**Note:**  
The current certificate including annex can be received on request.