

FCC Test Report

Report No.: AGC03061231002FR01

FCC ID	:	OSF-HS-OTE-Q
APPLICATION PURPOSE	:	Original Equipment
PRODUCT DESIGNATION	:	Zum Over-The-Ear BT-Headset
BRAND NAME	:	Spracht
MODEL NAME	:	HS-OTE-Q
APPLICANT	:	Spracht
DATE OF ISSUE	:	Nov. 13, 2023
STANDARD(S)	:	FCC Part 15 Subpart C §15.247
REPORT VERSION	:	V1.0







Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Nov. 13, 2023	Valid	Initial Release



Table of Contents

1	. General Information	5
2	. Product Information	6
	2.1 Product Technical Description	6
	2.2 Test Frequency List	6
	2.3 Related Submittal(S) / Grant (S)	7
	2.4 Test Methodology	7
	2.5 Special Accessories	7
	2.6 Equipment Modifications	7
	2.7 Antenna Requirement	7
3	. Test Environment	8
	3.1 Address of the Test Laboratory	8
	3.2 Test Facility	8
	3.3 Environmental Conditions	9
	3.4 Measurement Uncertainty	9
	3.5 List of Equipment Use	10
4	.System Test Configuration	12
	4.1 EUT Configuration	12
	4.2 EUT Exercise	12
	4.3 Configuration of Tested System	12
	4.4 Equipment Used In Tested System	12
	4.5 Summary of Test Results	13
5	. Description of Test Modes	14
6	. Duty Cycle Measurement	15
7	. RF Output Power Measurement	16
	7.1 Provisions Applicable	16
	7.2 Measurement Procedure	16
	7.3 Measurement Setup (Block Diagram of Configuration)	16
	7.4 Measurement Result	17

8.1 Provisions Applicable	20
8.2 Measurement Procedure	20
8.3 Measurement Setup (Block Diagram of Configuration)	20
8.4 Measurement Results	21
9. Power Spectral Density Measurement	25
9.1 Provisions Applicable	25
9.2 Measurement Procedure	25
9.3 Measurement Setup (Block Diagram of Configuration)	25
9.4 Measurement Results	26
10. Conducted Band Edge And Out-of-Band Emissions	
10.1 Provisions Applicable	
10.2 Measurement Procedure	
10.3 Measurement Setup (Block Diagram of Configuration)	28
10.4 Measurement Results	29
11. Radiated Spurious Emission	35
11.1 Measurement Limit	
11.2 Measurement Procedure	
11.3 Measurement Setup (Block Diagram of Configuration)	
11.4 Measurement Result	
12. AC Power Line Conducted Emission Test	48
12.1 Measurement Limit	
12.2 Measurement Setup (Block Diagram of Configuration)	
12.3 Preliminary Procedure of Line Conducted Emission Test	
12.4 Final Procedure of Line Conducted Emission Test	
12.5 Measurement Results	50
Appendix I: Photographs of Test Setup	52
Appendix II: Photographs of Test EUT	



1. General Information

Applicant	Spracht
Address	974 Commercial Street, Suite 108, Palo Alto, CA 94303, United States
Manufacturer	Zhongshan K-mate General Electronics Co., Ltd.
Address	No. 2, 5th Xinsheng Street, East Mu He Jing Road, Gangkou Town, Zhongshan, China
Factory	Zhongshan K-mate General Electronics Co., Ltd.
Address	No. 2, 5th Xinsheng Street, East Mu He Jing Road, Gangkou Town, Zhongshan, China
Product Designation	Zum Over-The-Ear BT-Headset
Brand Name	Spracht
Test Model	HS-OTE-Q
Series Model(s)	N/A
Difference Description	N/A
Date of receipt of test item	Oct. 30 2023
Date of Test	Oct. 30, 2023 to Nov. 13, 2023
Deviation from Standard	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Test Report Form No	AGCER-FCC-BLE-V1

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By

Alan Duan

(Project Engineer)

Nov. 13, 2023

Reviewed By

in Lin

Calvin Liu (Reviewer)

Nov. 13, 2023

Approved By

Max Zhang

Nov. 13, 2023

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



2. Product Information

2.1 Product Technical Description

Frequency Band	2400MHz-2483.5MHz
Operation Frequency Range	2402MHz-2480MHz
Bluetooth Version	V5.2
Modulation Type	BLE GFSK 1Mbps GFSK 2Mbps
Number of channels	40
Carrier Frequency of Each Channel	40 Channels (37 hopping + 3 advertising channel)
Channel Separation	2 MHz
Maximum Transmitter Power	-3.168 dBm (0.000482 W)
Hardware Version	BL001A-V03-01
Software Version	BL001A-KMA01-V004-T06
Antenna Designation	PCB Antenna
Antenna Gain	-3.1 dBi
Power Supply	DC 5V by adapter or DC 3.7V by battery

2.2 Test Frequency List

Frequency Band	Channel Number	Frequency		
	0	2402 MHz		
	1	2404 MHz		
	:	:		
2400~2483.5MHz	19	2440MHz		
	•	:		
	38	2478 MHz		
	39	2480 MHz		
Note: f = 2402 + 2*k MHz,	k = 0,, 39 f is the operating frequ	ency (MHz) k is the operating channel.		



2.3 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for FCC ID: **OSF-HS-OTE-Q**, filing to comply with Part 2, Part 15 of the Federal Communication Commission rules.

2.4 Test Methodology

The tests were performed according to following standards:

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 15	Radio Frequency Devices
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
4	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on Digital Transmission Systems, Frequency Hopping Spread Spectrum system, and Hybrid system devices operating under Section 15.247 of the FCC rules

2.5 Special Accessories

Not available for this EUT intended for grant.

2.6 Equipment Modifications

Not available for this EUT intended for grant.

2.7 Antenna Requirement

Standard Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi

EUT Antenna:

The non-detachable antenna inside the device cannot be replaced by the user at will. The gain of the antenna is -3.1 dBi.



3. Test Environment

3.1 Address of the Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories).

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



3.3 Environmental Conditions

	Normal Conditions
Temperature range (°C)	15 - 35
Relative humidity range	20 % - 75 %
Pressure range (kPa)	86 - 106
Power supply	DC 5V

3.4 Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard

uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 2.9 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 3.9 \text{ dB}$
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.9 \text{ dB}$
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of spurious emissions, conducted	U _c = ±2 %
Uncertainty of Occupied Channel Bandwidth	U _c = ±2 %



3.5 List of Equipment Use

• R	RF Conducted Test System							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
\boxtimes	AGC-ER-E036	Spectrum Analyzer	Agilent	N9020A	MY49100060	2023-06-01	2024-05-31	
\boxtimes	AGC-ER-E062	Power Sensor	Agilent	U2021XA	MY54110007	2023-03-03	2024-03-02	
\boxtimes	AGC-ER-E063	Power Sensor	Agilent	U2021XA	MY54110009	2023-03-03	2024-03-02	
\boxtimes	AGC-EM-A152	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08	
\boxtimes	AGC-ER-E083	Signal Generator	Agilent	E4421B	US39340815	2023-06-01	2024-05-31	
\boxtimes	N/A	RF Connection Cable	N/A	1#	N/A	Each time	N/A	
\boxtimes	N/A	RF Connection Cable	N/A	2#	N/A	Each time	N/A	

• F	Radiated Spurious Emission								
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)		
\boxtimes	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2023-02-18	2024-02-17		
	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2023-06-03	2024-06-02		
\boxtimes	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2023-06-01	2024-05-31		
\boxtimes	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2022-03-12	2024-03-11		
\boxtimes	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10		
\boxtimes	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2023-03-23	2024-03-22		
\square	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2023-09-24	2025-09-23		
\square	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2022-08-04	2024-08-03		
\boxtimes	AGC-EM-A119	2.4G Filter	SongYi	N/A	N/A	2023-06-01	2024-05-31		
\boxtimes	AGC-EM-A138	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08		
	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08		

• A	AC Power Line Conducted Emission						
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
\boxtimes	AGC-EM-E045	EMI Test Receiver	R&S	ESPI	101206	2023-06-03	2024-06-02
\boxtimes	AGC-EM-E023	AMN	R&S	100086	ESH2-Z5	2023-06-03	2024-06-02
\square	AGC-EM-A130	6dB Attenuator	Eeatsheep	LM-XX-6-5W	DC-6GZ	2023-06-09	2024-06-08



• Tes	Test Software					
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information	
\boxtimes	AGC-EM-S001	CE Test System	R&S	ES-K1	V1.71	
\boxtimes	AGC-EM-S003	RE-Test System	FARA	EZ-EMC	VRA-03A	
\boxtimes	AGC-ER-S012	BT/WIFI-Test System	Tonscend	JS1120-2	2.6	
\boxtimes	AGC-EM-S011	RSE Test System	Tonscend	TS+-Ver2.1(JS36-RSE)	4.0.0.0	



4.System Test Configuration

4.1 EUT Configuration


The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT Exercise


The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

4.3 Configuration of Tested System

Radiated Emission Configure:



Conducted Emission Configure:



4.4 Equipment Used In Tested System

The following peripheral devices and interface cables were connected during the measurement: Test Accessories Come From The Laboratory

No.	Equipment	Model No.	Manufacturer	Specification Information	Cable
1	Control Box	N/A	USB-TTL	-	
		~:			

☑ Test Accessories Come From The Manufacturer

No.	Equipment	Model No.	Manufacturer	Specification Information	Cable
1	Adapter	K05100-40		Input: AC 100-240V, 50/60Hz Max 0.2A Output: DC 5.0V/1A	
2	USB Cable				0.8m,unshielded



4.5 Summary of Test Results

Item	FCC Rules	Description of Test	Result
1	§15.203&15.247(b)(4)	Antenna Equipment	Pass
2	§15.247 (b)(1)	RF Output Power	Pass
3	§15.247 (a)(1)	6 dB Bandwidth	Pass
4	§15.247 (e)	Power Spectral Density	Pass
4	§15.247 (d)	Conducted Band Edge and Out-of-Band Emissions	Pass
5	§15.209	Radiated Emission& Band Edge	Pass
6	§15.207	AC Power Line Conducted Emission	Pass



5. Description of Test Modes

		Summary	able of Test Cases		
			Data Rate / Mod	ulation	
Test Item B		Bluetooth – LE(1Mbp	Bluetooth – LE(1Mbps) / GFSK		
Radiated & Conducted Test Cases	Mode 2: Bluetooth Tx CH19		19_2440 MHz_1Mbps	(Battery powered or AC/DC adapter) (Battery powered or AC/DC adapter) (Battery powered or AC/DC adapter)	
AC Conducted Emission	Mode	e 1: Bluetooth L	nk + Battery + USB Ca	able (Charging from AC Adapter)	
 The battery is full-cha For Radiated Emissic For Conducted Test n 	nged during n, 3axis we nethod, a te	g the test. are chosen for te emporary anteni Software	n the report, if no other esting for each applical na connector is provide Setting Diagram		
_	EK Studio Release V5.4		TEK Studio	— — × _	
	OM2 Close	12M Reset	Close	SYD8810	
HCICa	e BLE Service Sommand		UART HCI Aboult More		
	ltem	Value			
	quency		00		
	n Of Test Data t Payload	Pseudo-Random bit se		Exit HCI Mode	
		Send HCI Cm	d		
Cmd L	og		Evt Log		
TX Fre Length	md : 0x201e(LE Transmitter Test) equency : 0x00 h Of Test Data : 0x00 tt Payload : 0 (Pseudo-Random bit sequence !		HCI Evt : 0x0e (Command C Num HCI Command Packet: Command Opcode : 201e (L Status : 0x00	s : 0x01	
	с	lear	Clea	r	



6. Duty Cycle Measurement


The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = Peak. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Operating mode	T(µs)	Duty Cycle (%)	Duty Cycle Factor (dB)	1/ T Minimum VBW (kHz)
BLE_1Mbps	81	13.30	8.76	12.35

Remark:

- 1. Duty Cycle factor = 10 * log (1/ Duty cycle)
- 2. The duty cycle of each frequency band mode reflects the determination requirements of the low channel measurement value

The test plots as follows:

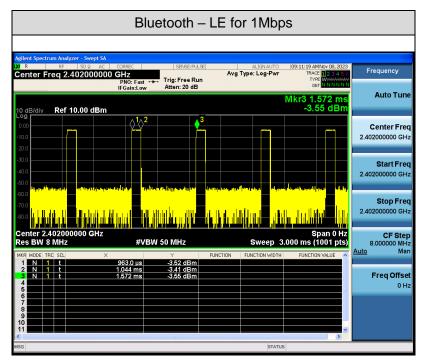



7. RF Output Power Measurement

7.1 Provisions Applicable

For DTSs employing digital modulation techniques operating in the bands 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W.


7.2 Measurement Procedure

For Peak Power, the testing follows ANSI C63.10 Section 11.9.1.2 Method Integrated band power:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. RBW > DTS bandwidth
- 3. VBW≥3*RBW.
- 4. SPAN≥VBW.
- 5. Sweep: Auto.
- 6. Detector Function: Peak.
- 7. Trace: Max hold.
- 8. Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.
- For Average power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G:
- 1. The RF output of EUT was connected to the power meter by RF cable and attenuator.
- 2. The path loss was compensated to the results for each measurement.
- 3. Set to the maximum power setting and enable the EUT transmit continuously.
- 4. Measure the conducted output power and record the results in the test report.


7.3 Measurement Setup (Block Diagram of Configuration)

For Average power test setup

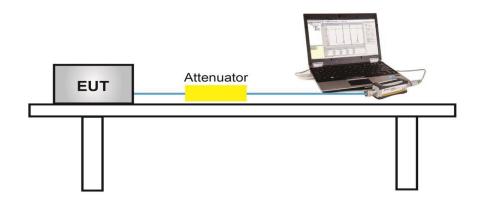



For peak power test setup

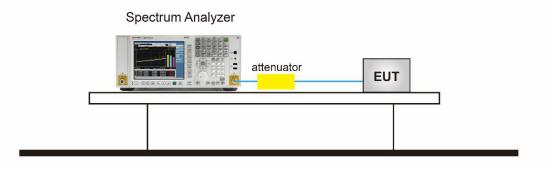


7.4 Measurement Result

Test Data of Conducted Output Power						
Test Mode	Test Frequency (MHz)	Peak Power (dBm)	Limits (dBm)	Pass or Fail		
	2402	-3.168	≪30	Pass		
GFSK_1Mbps	2440	-3.930	≪30	Pass		
	2480	-4.415	≪30	Pass		

Test Result of Average Output Power (Reporting Only)


Test Data of Conducted Output Power						
Test Mode	Test Frequency (MHz)	Average Power (dBm)	Limits (dBm)	Pass or Fail		
	2402	-5.221	≪30	Pass		
GFSK_1Mbps	2440	-5.946	≪30	Pass		
	2480	-6.432	≪30	Pass		



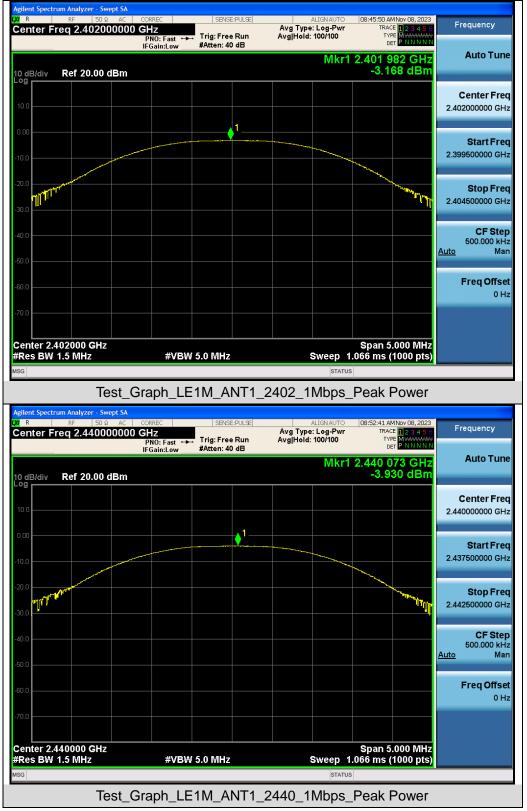

Test Graphs of Conducted Output Power



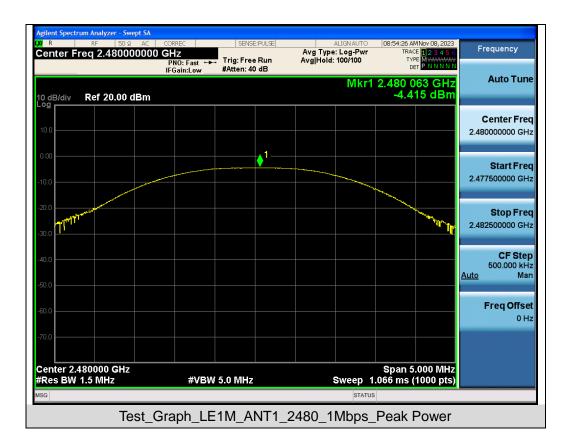



8. 6dB Bandwidth Measurement


8.1 Provisions Applicable

The minimum 6 dB bandwidth shall be 500 kHz.

8.2 Measurement Procedure

- 1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
- 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 3. Set to the maximum power setting and enable the EUT transmit continuously.
- 4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
- For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) ≥ 3 * RBW.
- 6. Measure and record the results in the test report.

8.3 Measurement Setup (Block Diagram of Configuration)

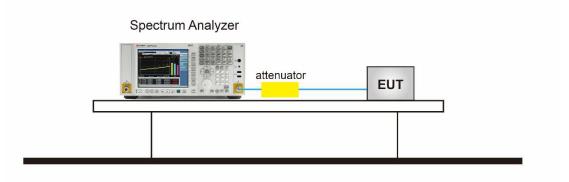



8.4 Measurement Results

Test Data of Occupied Bandwidth and DTS Bandwidth						
Test Mode	Test Frequency (MHz)	Occupied Bandwidth (MHz)	DTS BW (MHz)	DTS BW Limits	Pass or Fail	
GFSK_1Mbps	2402	1.036	0.535	≥0.5	Pass	
	2440	1.034	0.527	≥0.5	Pass	
	2480	1.034	0.529	≥0.5	Pass	


ctrum Analyzer - Occupied BW 08:45:38 AM Nov 08, 2023 Radio Std: None Center Freq: 2.402000000 GHz Trig: Free Run Avg|Hol #Atten: 30 dB Frequency Center Freq 2.402000000 GHz Avg|Hold: 10/10 #IFGain:Low Radio Device: BTS Ref 30.00 dBm og **Center Freq** 2.402000000 GHz Center 2.402 GHz #Res BW 30 kHz Span 3 MHz Sweep 4.133 ms **CF** Step #VBW 100 kHz 300.000 kHz Man <u>Auto</u> **Total Power** 1.09 dBm **Occupied Bandwidth** 1.0360 MHz Freq Offset Transmit Freq Error 18.306 kHz OBW Power 99.00 % 0 Hz -26.00 dB x dB Bandwidth 1.262 MHz x dB STATUS Test_Graph_LE1M_ANT1_2402_1Mbps_OBW

Test Graphs of Occupied Bandwidth








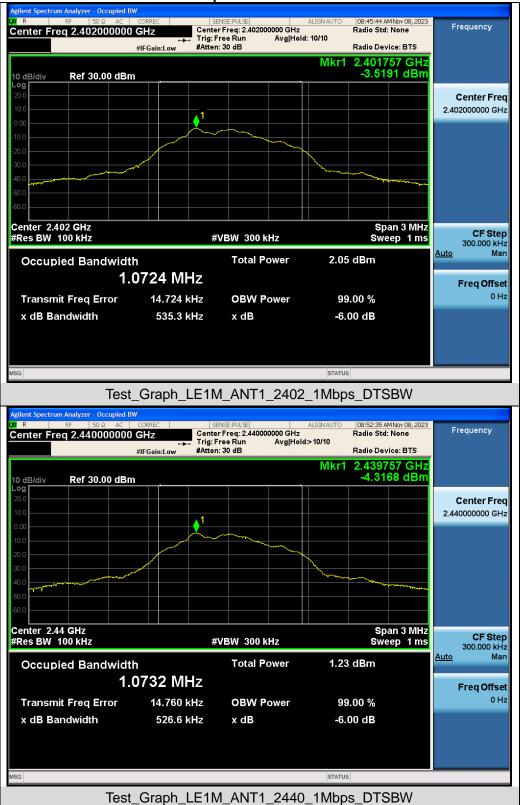

Test Graphs of DTS Bandwidth



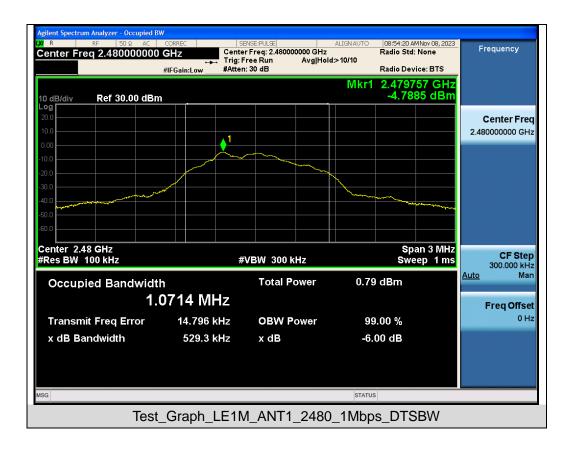



9. Power Spectral Density Measurement


9.1 Provisions Applicable

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

9.2 Measurement Procedure

- 1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
- 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 3. Set to the maximum power setting and enable the EUT transmit continuously.
- Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz in order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
- 5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
- 6. Measure and record the results in the test report.
- The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

9.3 Measurement Setup (Block Diagram of Configuration)

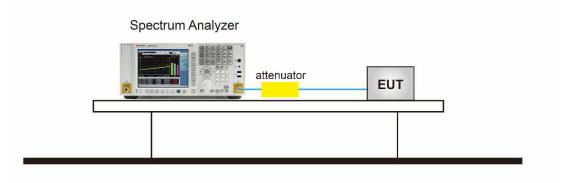




9.4 Measurement Results

Test Data of Conducted Output Power Spectral Density						
Test Mode	Test Frequency (MHz)	Power density (dBm/3kHz)	Limit (dBm/3kHz)	Pass or Fail		
	2402	-21.875	≪8	Pass		
GFSK_1Mbps	2440	-22.685	≪8	Pass		
	2480	-23.151	≪8	Pass		

Test Graphs of Conducted Output Power Spectral Density





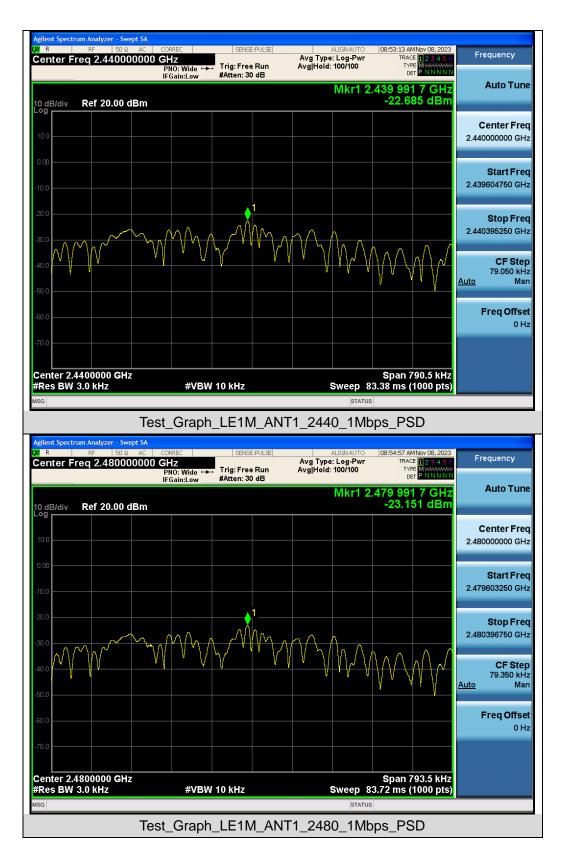



10. Conducted Band Edge And Out-of-Band Emissions

10.1 Provisions Applicable


The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the PSD procedure.

10.2 Measurement Procedure

- Reference level measurement
- 1. Set instrument center frequency to DTS channel center frequency
- 2. Set the span to \geq 1.5 times the DTS bandwidth
- 3. Set the RBW = 100 kHz
- 4. Set the VBW \geq 3 x RBW
- 5. Detector = peak
- 6. Sweep time = auto couple
- 7. Trace mode = max hold
- 8. Allow trace to fully stabilize
- Emission level measurement
- 1. Set the center frequency and span to encompass frequency range to be measured
- 2. RBW = 100kHz
- 3. VBW = 300kHz
- 4. Detector = Peak
- 5. Trace mode = max hold
- 6. Sweep time = auto couple
- 7. The trace was allowed to stabilize


10.3 Measurement Setup (Block Diagram of Configuration)

Spectrum Analyzer

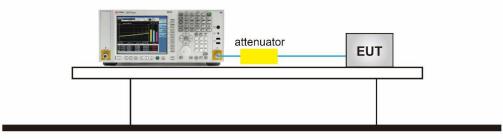




10.4 Measurement Results

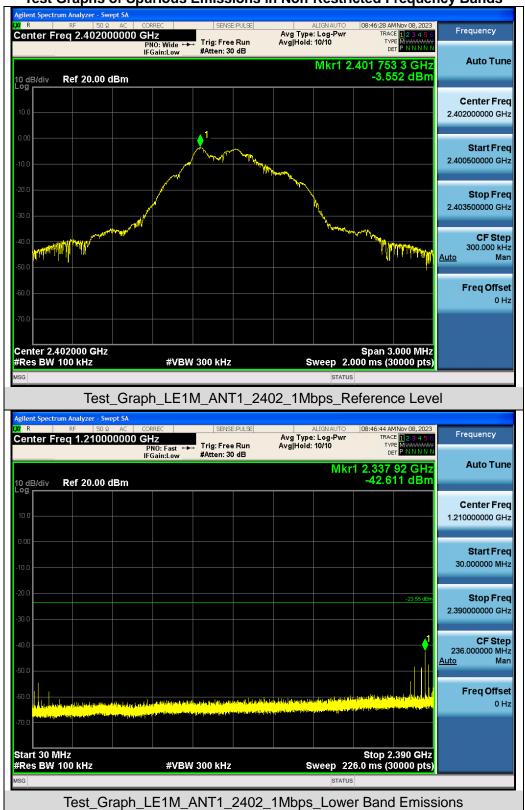


Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands




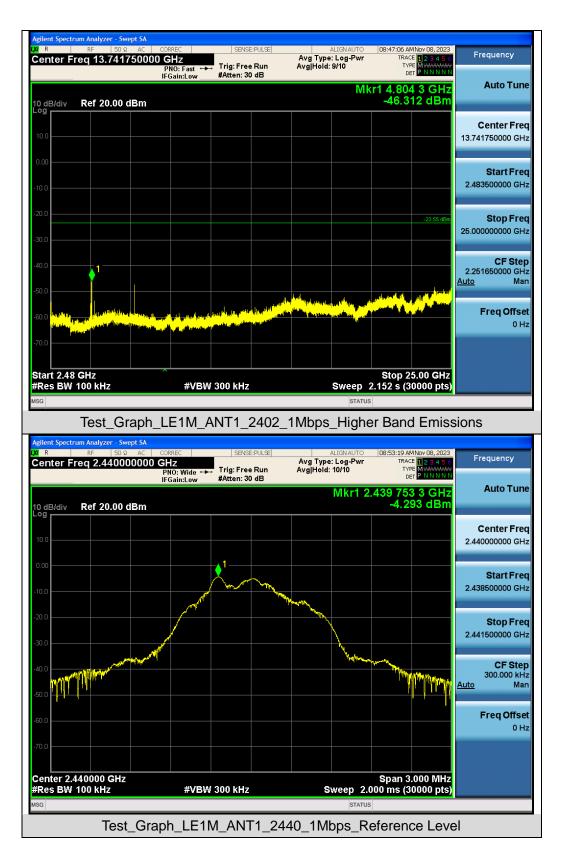




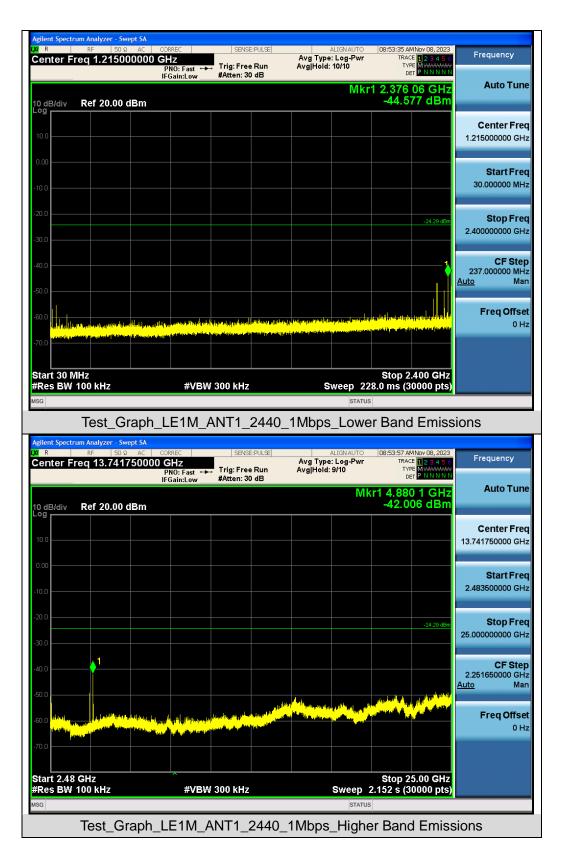




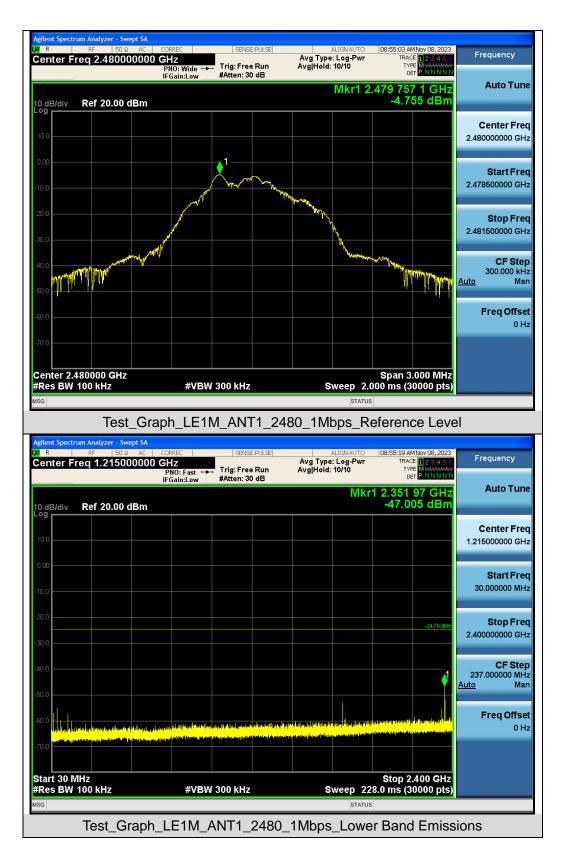



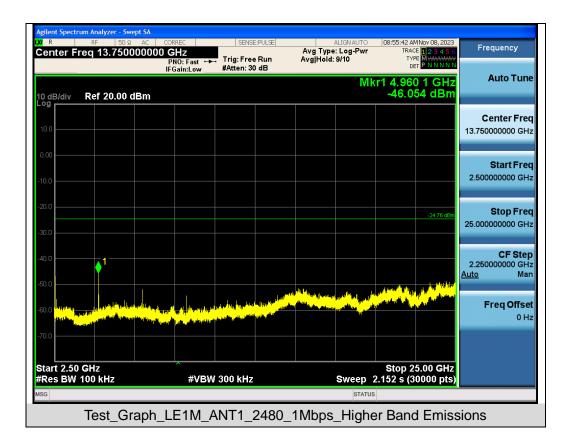



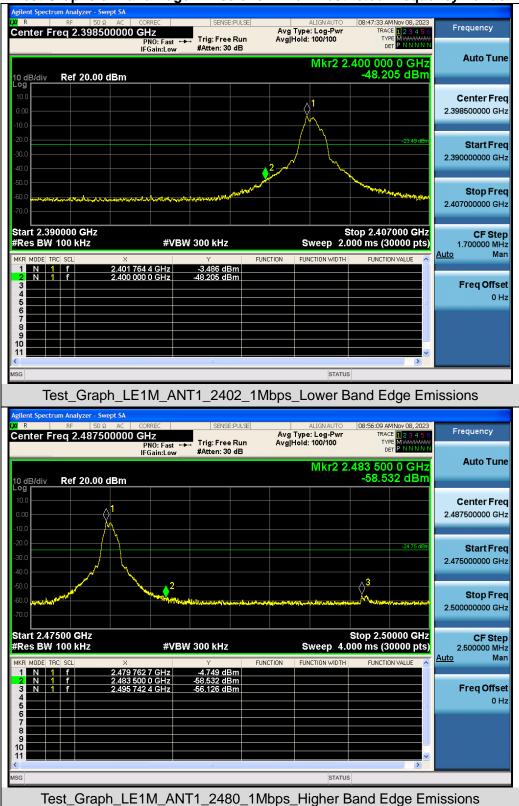

Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands



11. Radiated Spurious Emission

11.1 Measurement Limit

FCC Part 15.209 Limit in the below table to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

11.2 Measurement Procedure

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds.

Any rep Ashang alternative b(provided pther, transmitter aloperates a forril page in than out of the seconds) e or bin cases in where is the Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



1GHz~26.5GHz

1MHz/3MHz for Peak, 1MHz/3MHz for Average

pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.

- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.

 Spectrum Parameter
 Setting

 Start ~Stop Frequency
 9kHz~150kHz/RB 200Hz for QP

 Start ~Stop Frequency
 150kHz~30MHz/RB 9kHz for QP

 Start ~Stop Frequency
 30MHz~1000MHz/RB 120kHz for QP

The following table is the setting of spectrum analyzer and receiver.

Start ~Stop Frequency

Receiver Parameter	Setting
Start ~Stop Frequency	9kHz~150kHz/RB 200Hz for QP
Start ~Stop Frequency	150kHz~30MHz/RB 9kHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120kHz for QP



• Quasi-Peak Measurements below 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. Span was set greater than 1MHz
- 3. RBW = as shown in the table above
- 4. Detector = CISPR quasi-peak
- 5. Sweep time = auto couple
- 6. Trace was allowed to stabilize

Peak Measurements above 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW = 3MHz
- 4. Detector = peak
- 5. Sweep time = auto couple
- 6. Trace mode = max hold
- 7. Trace was allowed to stabilize


<u>Average Measurements above 1GHz (Method VB)</u>

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW setting requirements are as follows:
- 4. If the EUT is configured to transmit with duty cycle \ge 98%, set VBW = 10 Hz.
- 5. If the EUT duty cycle is < 98%, set VBW \ge 1/T. T is the minimum transmission duration.
- 6. Detector = Peak
- 7. Sweep time = auto
- 8. Trace mode = max hold
- 8. Trace was allowed to stabilize




11.3 Measurement Setup (Block Diagram of Configuration)




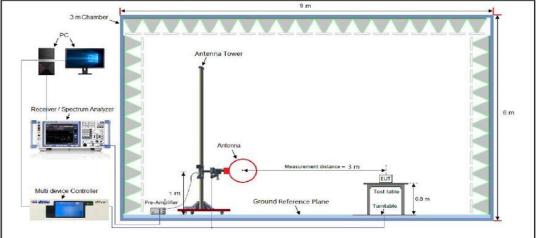

Radiated Emission Test Setup 30MHz-1000MHz

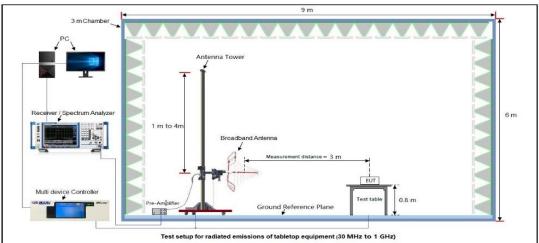

Radiated Emission Test Setup Above 1000MHz

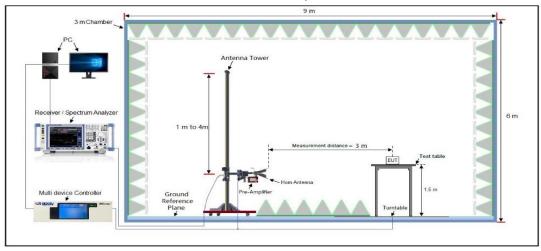

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com



11.4 Measurement Result

Radiated Emission Below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

							suits a	t JUIV	IHz-1G	112				
EUT Name	Zum (Dver-Th	ne-Ea	ar BT-H	leadse	et	М	odel	Name		ł	HS-	OTE	-Q
Temperature	24.8℃	2					R	elativ	e Hum	idity	,	56.7	7%	
Pressure	960hF	Pa					Te	Test Voltage			[DC 5V		
Test Mode	Mode	1					Α	ntenn	na Pola	rity	ł	Hori	izonta	al
72.0	dBu∀Jm								3	5	Limi Mar			
- 6	And the state of the	Manak Makelebaragi	~a/serger	antiberton portable	2 Alluriania	nder here and a second	Marchineduk	ythe adaption	1 A A A A A A A A A A A A A A A A A A A					
			\	B0		(MHz)		300	1 A A A A A A A A A A A A A A A A A A A	500).000
-8 30.00		50 6		B0	ding	" Martha and Mark	Mea: me	300 Sure-		500		700).00D
-0 30.00	00 40	50 G	0 70	BO Rea Lev	ding	(MHz)	Meas	300 Sure- ent	400	500	600	700 r		
-0 30.00	00 40 No. Mk	50 G	0 70 req. Hz 445	BO Rea Lev dB	ding vel uV .14	(мнг) Correct Factor dB 13.84	Mea: me dBu\ 19.9	300 sure- ent //m 98	400 Limi 40.01	500 t n D -	600 Over dB	700 r	1000	tor
-0 30.00	00 40 No. Mk	50 6 . Fr M	0 70 req. Hz 445	BO Rea Lev dB	ding vel	(MHz) Correct Factor dB	M ea: me dBu\	300 sure- ent //m 98	400 Limi	500 t n D -	600 Over	700 r	1000 Detec	tor Ik
-0 30.00	00 40 No. Mk	50 G	0 70 req. Hz 445 766	80 Rea Lev dB	ding vel uV .14	(мнг) Correct Factor dB 13.84	Mea: me dBu\ 19.9	300 sure- ent //m 98	400 Limi 40.01	500 500	600 Over dB	700 r 2 4	1000 Detec	tor Ik Ik
-0 30.00	00 40 No. Mk	50 6 . Fr M 40.8- 120.2	• 70 req. Hz 445 766 318	80 Rea Lev dB 6	ding vel uV .14 .68	(мнг) Соггест Factor dB 13.84 16.38	M ea: me dBu\ 19.3 22.1	300 sure- ent //m 98 06 21	400 Limi 400 40.01 43.51	500 500	600 Over dB -20.0	700 r 2 4 9	1000 Detec pea	:tor Ik Ik
-0 30.00	00 40 No. Mk	50 6 . Fr 40.8 120.2 383.9	• 7 0 req. Hz 445 766 318 553	90 Rea Lev dB 6. 5.	ding vel uV .14 .68 .58	(мнг) Соггест Factor dB 13.84 16.38 18.63	Mea: me dBu\ 19. 22.1 26.1	300 sure- ent 98 06 21 86	400 Limi 40.01 43.51 46.01	500 it D - D - D -	600 Over dB -20.02 -21.44	700 r 2 4 9 4	1000 Detec pea pea	itor Ik Ik Ik



		Radia	ated Emissi	on Test Res	ults at 30N	Hz-1GH	Z	
EUT Name	Zum	Over-The-Ea	r BT-Headse	et	Model	Name	Н	S-OTE-Q
Temperature	24.8°	24.8°C				e Humid	l ity 50	6.7%
Pressure	960hPa Test Voltage			D	C 5V			
Test Mode	Mode 1 Antenna Polarity			ty V	ertical			
72.0	dBuV/m				i	i	Limi	a]
								rgin:
32						4	way with the grant	-
-8	**************************************			3 denter minkedantur da (MH-1)				
	the second day of the	50 G0 70	80	(MHz)	300	400	500 600	700 1000.000
-8 30.000	the second day of the	50 60 70						700 1000.000
-8 30.000	+/~~~/////////////////////////////////	50 60 70	80 Reading	(MHz) Correct	300 Measure-	400	500 600	700 1000.000
-8 30.000	+/~~~/////////////////////////////////	50 60 70 k. Freq.	80 Reading Level	(MHz) Correct Factor	300 Measure- ment	400 Limit	500 600 Over	Detector
-8 30.000	+/~~~/////////////////////////////////	50 60 70 k. Freq. MHz	80 Reading Level dBuV	(MHz) Correct Factor dB	300 Measure- ment dBuV/m	400 Limit dB/m	500 600 O∨er dB	Detector pe ak
-8 30.000	0 40 No. MI	50 60 70 k. Freq. MHz 43.2017	BO Reading Level dBuV 7.47	(MHz) Correct Factor dB 16.93	300 Measure- ment dBuV/m 24.40	400 Limit dB/m 40.00	500 600 O∨er dB -15.60	Detector peak peak
-8 30.000	0 40 No. MI	50 60 70 k. Freq. MHz 43.2017 54.0711	BO Reading Level dBuV 7.47 7.56	(MHz) Correct Factor dB 16.93 17.04	300 Measure- ment dBuV/m 24.40 24.60	400 Limit dB/m 40.00 40.00	500 600 O∨er dB -15.60 -15.40	Detector peak peak peak
-8 30.000	No. MI	50 60 70 k. Freq. MHz 43.2017 54.0711 132.2205	80 Reading Level dBuV 7.47 7.56 6.92	(MHz) Correct Factor dB 16.93 17.04 18.01	300 Measure- ment dBuV/m 24.40 24.60 24.93	400 Limit dB/m 40.00 40.00 43.50	500 600 Over dB -15.60 -15.40 -18.57	Detector peak peak peak peak

RESULT: Pass

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

UT Name	Zum Over-	The-Ear BT-H	eadset	Mode	I Name	HS-OTE	-Q
emperature	25.6 ℃			Relati	ive Humidity	55.9%	
ressure	960hPa			Test Voltage		DC 5V	
est Mode	Mode 1			Anter	nna Polarity	Horizonta	al
Frequency	Meter Reading	Factor	Factor Emission Level		Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/	/m)	(dBµV/m)	(dB)	value Type
4804.000	46.89	0.08	46.9	7	74	-27.03	peak
4804.000	37.73	0.08	37.8	1	54	-16.19	AVG
7206.000	41.66	2.21	43.8		74	-30.13	peak
7206.000	32.95	2.21	35.1	6	54	-18.84	AVG
Remark:							
Factor = Anter	nna Factor + Cab	e Loss – Pre-	amplifier.				
UT Name	Zum Over-	The-Ear BT-H	eadset	Mode	I Name	HS-OTE	-Q
emperature	25.6 ℃			Relati	ive Humidity	55.9%	
ressure	960hPa			Test \	/oltage	DC 5V	
est Mode	Mada (Anton		Vertical	
est moue	Mode 1			Anter	nna Polarity	Vertical	
		F					1
Frequency	Meter Reading	Factor	Emission	ı Level	Limits	Margin	Value Type
Frequency (MHz)	Meter Reading (dBµV)	(dB)	(dBµV/	ı Level /m)	Limits (dBµV/m)	Margin (dB)	
Frequency (MHz) 4804.000	Meter Reading (dBµV) 46.17	(dB) 0.08	(dBµV/ 46.2	n Level /m) 5	Limits (dBµV/m) 74	Margin (dB) -27.75	peak
Frequency (MHz) 4804.000 4804.000	Meter Reading (dBμV) 46.17 37.53	(dB) 0.08 0.08	(dBµV/ 46.2 37.6	n Level /m) 5 1	Limits (dBµV/m) 74 54	Margin (dB) -27.75 -16.39	peak AVG
Frequency (MHz) 4804.000 4804.000 7206.000	Meter Reading (dBµV) 46.17 37.53 41.69	(dB) 0.08 0.08 2.21	(dBµV/ 46.2 37.6 43.9	i Level /m) 5 1	Limits (dBµV/m) 74 54 74	Margin (dB) -27.75 -16.39 -30.1	AVG peak
Frequency (MHz) 4804.000 4804.000	Meter Reading (dBμV) 46.17 37.53	(dB) 0.08 0.08	(dBµV/ 46.2 37.6	i Level /m) 5 1	Limits (dBµV/m) 74 54	Margin (dB) -27.75 -16.39	peak AVG
Frequency (MHz) 4804.000 4804.000 7206.000	Meter Reading (dBµV) 46.17 37.53 41.69	(dB) 0.08 0.08 2.21	(dBµV/ 46.2 37.6 43.9	i Level /m) 5 1	Limits (dBµV/m) 74 54 74	Margin (dB) -27.75 -16.39 -30.1	peak AVG peak

Radiated Emissions Test Results for Above 1GHz

RESULT: Pass



EUT Name		Zum Over-The-Ear BT-Headset				el Name		HS-OT	E-Q
Temperature	erature 25.6℃		Relative Hu			tive Humid	ity	55.9%	
Pressure	1	960hPa			Test	Voltage		DC 5V	
Test Mode Mode		Mode 2	le 2		Ante	Antenna Polarity		Horizontal	
Frequency	Met	leter Reading Factor Emissi		Emissio	n Level	Limits		Margin) (alua T ara
(MHz)		(dBµV)	(dB)	(dBµ∖	//m)	(dBµV/m)		(dB)	Value Type
4882.000		45.84	0.14	45.9	98	74		-28.02	peak
4882.000		38.69	0.14	38.8	33	54		-15.17	AVG
7323.000		41.78	2.36	44.1	14	74		-29.86	peak
7323.000		34.17	2.36	36.5	53	54		-17.47	AVG
Factor = Ante	enna ⊢a	actor + Cab	le Loss – Pre	e-amplifier.					
			<u>le Loss – Pre</u> The-Ear BT-		Mode	el Name		HS-OT	E-Q
EUT Name						el Name tive Humid	ity	HS-OT 55.9%	E-Q
EUT Name		Zum Over-			Relat		ity		E-Q
EUT Name Temperature Pressure		Zum Over- 25.6℃			Relat Test	tive Humid		55.9%	
EUT Name Temperature Pressure Test Mode		Zum Over- 25.6℃ 960hPa Mode 2			Relat Test	tive Humid Voltage	y	55.9% DC 5V Vertica	
EUT Name Temperature Pressure	Meter F	Zum Over- 25.6℃ 960hPa	The-Ear BT-	Headset	Relat Test Anter	tive Humid Voltage nna Polarit	: y Ma	55.9% DC 5V	
EUT Name Temperature Pressure Test Mode Frequency (MHz)	Meter F (dE	Zum Over- 25.6°C 960hPa Mode 2 Reading	The-Ear BT-	Headset	Relat Test Anter	t ive Humid Voltage nna Polarit	у Ма (1	55.9% DC 5V Vertica	
EUT Name Frequency	Meter F (dE	Zum Over- 25.6°C 960hPa Mode 2 Reading BµV)	The-Ear BT- Factor (dB)	Headset Emission Lo (dBµV/m	Relat Test Anter	tive Humid Voltage nna Polarit Limits (dBµV/m)	у Ма (1	55.9% DC 5V Vertica argin dB)	l Value Type
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4882.000	Meter F (dE 45	Zum Over- 25.6℃ 960hPa Mode 2 Reading 3µV) 5.56	The-Ear BT- Factor (dB) 0.14	Headset Emission Lu (dBµV/m 45.7	Relat Test Anter	tive Humid Voltage nna Polarit Limits (dBµV/m) 74	у Ма ((-2	55.9% DC 5V Vertica argin dB) 28.3	Value Type peak
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4882.000 4882.000	Meter F (dE 45 37 40	Zum Over- 25.6°C 960hPa Mode 2 Reading 3µV) 5.56 7.71	The-Ear BT- Factor (dB) 0.14 0.14	Headset Emission Lo (dBµV/m 45.7 37.85	Relat Test Anter	tive Humid Voltage nna Polarit Limits (dBμV/m) 74 54	∑ ∑	55.9% DC 5V Vertica argin dB) 28.3 6.15	Value Type peak AVG
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4882.000 4882.000 7323.000	Meter F (dE 45 37 40	Zum Over- 25.6 °C 960hPa Mode 2 Reading 3µV) 5.56 7.71	The-Ear BT- Factor (dB) 0.14 0.14 2.36	Headset Emission Lu (dBµV/m 45.7 37.85 42.6	Relat Test Anter	tive Humid Voltage nna Polarit Limits (dBµV/m) 74 54 74	∑ ∑	55.9% DC 5V Vertica argin dB) 28.3 6.15 31.4	Value Type peak AVG peak
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4882.000 4882.000 7323.000	Meter F (dE 45 37 40	Zum Over- 25.6 °C 960hPa Mode 2 Reading 3µV) 5.56 7.71	The-Ear BT- Factor (dB) 0.14 0.14 2.36	Headset Emission Lu (dBµV/m 45.7 37.85 42.6	Relat Test Anter	tive Humid Voltage nna Polarit Limits (dBµV/m) 74 54 74	∑ ∑	55.9% DC 5V Vertica argin dB) 28.3 6.15 31.4	Value Type peak AVG peak

Radiated Emissions Test Results for Above 1GHz

RESULT: Pass




UT Name	Zum Over-	Zum Over-The-Ear BT-Headset			Name	HS-OTE	-Q	
emperature	25.6 ℃			Relativ	ve Humidity	55.9%		
Pressure	960hPa			Test Voltage		DC 5V	DC 5V	
est Mode	Mode 3			Antenna Polarity		Horizonta	Horizontal	
	·							
Frequency	Meter Reading	Factor Emission Leve		on Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµ	uV/m)	(dBµV/m)	(dB)	value Type	
4960.000	46.79	0.22	47	'.01	74	-26.99	peak	
4960.000	38.43	0.22	38	8.65	54	-15.35	AVG	
7440.000	41.46	2.64	44	4.1	74	-29.9	peak	
7440.000	32.88	2.64	35	5.52	54	-18.48	AVG	
Remark:								
	nna Factor + Cat	le Loss – Pre-	amplifier.					
		le Loss – Pre- The-Ear BT-H		Model	Name	HS-OTE	-Q	
Factor = Anter					Name ve Humidity	HS-OTE	-Q	
Factor = Anter	Zum Over-			Relativ			-Q	
Factor = Anter UT Name emperature	Zum Over- 25.6℃			Relativ Test V	ve Humidity	55.9%	-Q	
Factor = Anter	Zum Over- 25.6°C 960hPa Mode 3	The-Ear BT-H	eadset	Relativ Test V Anten	ve Humidity oltage na Polarity	55.9% DC 5V Vertical	-Q	
Factor = Anter	Zum Over- 25.6°C 960hPa Mode 3 Meter Reading	The-Ear BT-H	eadset	Relativ Test V Anten	ve Humidity oltage na Polarity Limits	55.9% DC 5V Vertical Margin	-Q Value Type	
Factor = Anter	Zum Over- 25.6°C 960hPa Mode 3 Meter Reading (dBµV)	The-Ear BT-H	eadset Emissic	Relation Test V Anten	ve Humidity oltage na Polarity Limits (dBµV/m)	55.9% DC 5V Vertical Margin (dB)	- Value Type	
Factor = Anter EUT Name Temperature Pressure Test Mode Frequency (MHz) 4960.000	Zum Over- 25.6°C 960hPa Mode 3 Meter Reading (dBµV) 46.23	The-Ear BT-H	Emissio (dBp 46	Relation Test V Anten on Level JV/m) 5.45	ve Humidity oltage na Polarity Limits (dBµV/m) 74	55.9% DC 5V Vertical Margin (dB) -27.55	- Value Type peak	
Factor = Anter	Zum Over- 25.6 °C 960hPa Mode 3 Meter Reading (dBμV) 46.23 38.67	Factor (dB) 0.22 0.22	Emissie (dB) 46	Relating Test V Anten on Level JV/m) 3.45 3.89	ve Humidity foltage na Polarity Limits (dBµV/m) 74 54	55.9% DC 5V Vertical Margin (dB) -27.55 -15.11	Value Type peak AVG	
Factor = Anter	Zum Over- 25.6°C 960hPa Mode 3 Meter Reading (dBµV) 46.23 38.67 40.84	The-Ear BT-H Factor (dB) 0.22 0.22 2.64	Emissie (dB) 46 38 43	Relating Test V Anten on Level JV/m) 6.45 6.89 6.48	ve Humidity foltage na Polarity Limits (dBµV/m) 74 54 74	55.9% DC 5V Vertical Margin (dB) -27.55 -15.11 -30.52	- Value Type peak AVG peak	
Factor = Anter EUT Name Temperature Pressure Test Mode Frequency (MHz) 4960.000 4960.000	Zum Over- 25.6 °C 960hPa Mode 3 Meter Reading (dBμV) 46.23 38.67	Factor (dB) 0.22 0.22	Emissie (dB) 46 38 43	Relating Test V Anten on Level JV/m) 3.45 3.89	ve Humidity foltage na Polarity Limits (dBµV/m) 74 54	55.9% DC 5V Vertical Margin (dB) -27.55 -15.11	Value Type peak AVG	
Factor = Anter EUT Name Temperature Pressure Test Mode Frequency (MHz) 4960.000 7440.000	Zum Over- 25.6°C 960hPa Mode 3 Meter Reading (dBµV) 46.23 38.67 40.84	The-Ear BT-H Factor (dB) 0.22 0.22 2.64	Emissie (dB) 46 38 43	Relating Test V Anten on Level JV/m) 6.45 6.89 6.48	ve Humidity foltage na Polarity Limits (dBµV/m) 74 54 74	55.9% DC 5V Vertical Margin (dB) -27.55 -15.11 -30.52	- Value Type peak AVG peak	

Radiated Emissions Test Results for Above 1GHz

RESULT: Pass

Note:


- 1. The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.
- 2. Factor = Antenna Factor + Cable loss Pre-amplifier gain, Margin = Emission Level-Limit.
- 3. The "Factor" value can be calculated automatically by software of measurement system.





EUT Name	Zum Over-The-Ear BT-Headset	Model Name	HS-OTE-Q
Temperature	25.8℃	Relative Humidity	56.2%
Pressure	960hPa	Test Voltage	DC 5V
Test Mode	Mode 1	Antenna Polarity	Horizontal


Test Graph for Peak Measurement

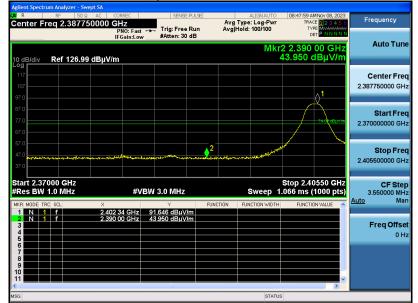

Test Graph for Average Measurement




RESULT: Pass






			-
EUT Name	Zum Over-The-Ear BT-Headset	Model Name	HS-OTE-Q
Temperature	25.8 ℃	Relative Humidity	56.2%
Pressure	960hPa	Test Voltage	DC 5V
Test Mode	Mode 1	Antenna Polarity	Vertical

Test Graph for Peak Measurement

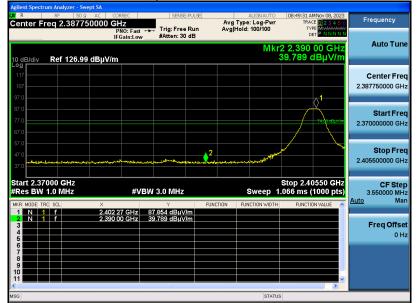

Test Graph for Average Measurement

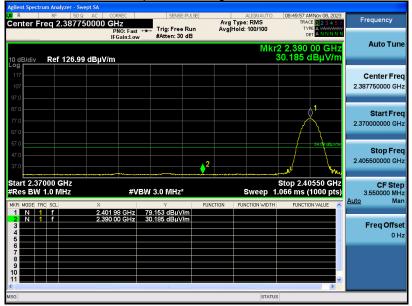


RESULT: Pass



EUT Name	Zum Over-The-Ear BT-Headset	Model Name	HS-OTE-Q
Temperature	25.8℃	Relative Humidity	56.2%
Pressure	960hPa	Test Voltage	DC 5V
Test Mode	Mode 3	Antenna Polarity	Horizontal


Test Graph for Peak Measurement

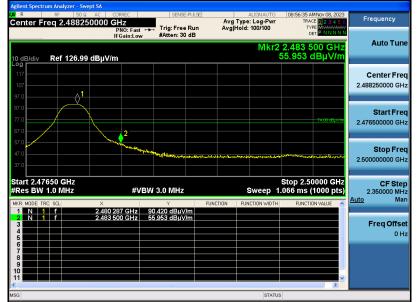

Test Graph for Average Measurement




RESULT: Pass





EUT Name	Zum Over-The-Ear BT-Headset	Model Name	HS-OTE-Q
Temperature	25.8℃	Relative Humidity	56.2%
Pressure	960hPa	Test Voltage	DC 5V
Test Mode	Mode 3	Antenna Polarity	Vertical

Test Graph for Peak Measurement

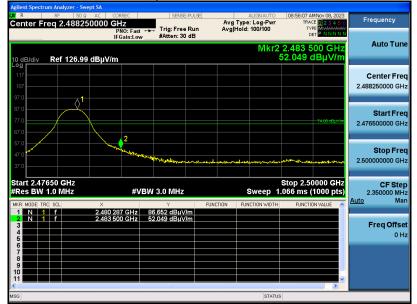

Test Graph for Average Measurement



RESULT: Pass

Note: The factor had been edited in the "Input Correction" of the Spectrum Analyzer.



12. AC Power Line Conducted Emission Test

12.1 Measurement Limit


Francisco	Maximum RF	Line Voltage
Frequency	Q.P. (dBµV)	Average (dBµV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Note:

1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

12.2 Measurement Setup (Block Diagram of Configuration)

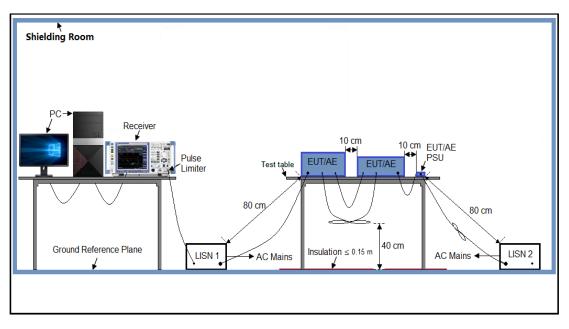



12.3 Preliminary Procedure of Line Conducted Emission Test

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 5V power from adapter which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.


Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

12.4 Final Procedure of Line Conducted Emission Test

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less – 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.



12.5 Measurement Results

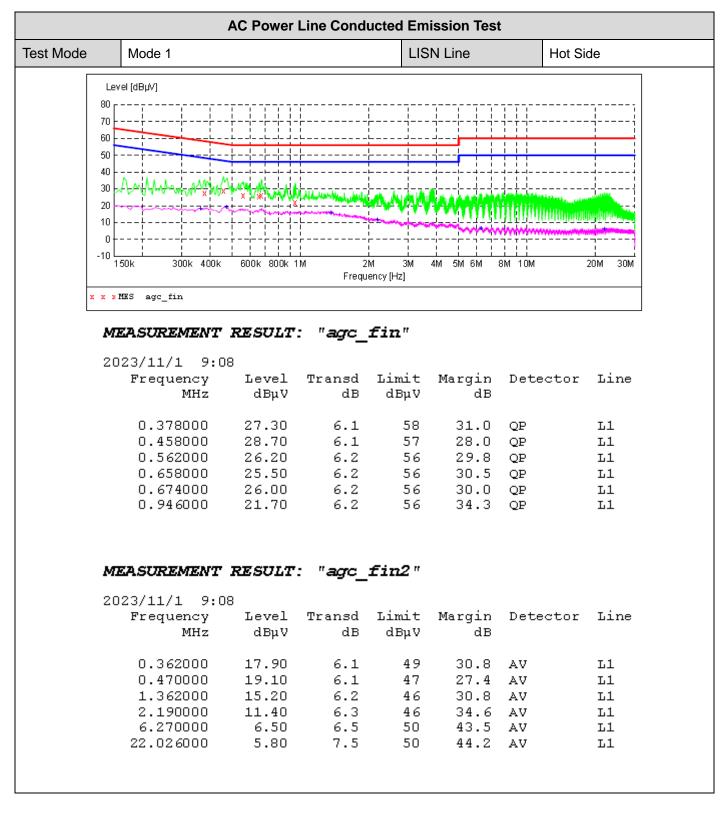



AC Power Line Conducted Emission Test									
Test Mode	Mode 1		LISN Line	Neutra	al Side				
Le	vel (dBµV)								
80					 1 1 11				
60		 	<u> </u>						
50		<u></u>							
30	AAAAAA								
20				an a					
10									
-10									
	150k 300k 400k 600k 800k	1M 2M Frequency (H		1 1 0M 20	DM 30M				
x x x	MES agc_fin								
M	EASUREMENT RESULT	": "agc_fir	2″						
20	023/11/1 9:11								
	Frequency Level	Transd Li		Detector	Line				
	MHz dBµV	dB d	BµV dB						
	0.494000 25.40	6.1	56 30.7	QP	N				
	0.550000 21.20	6.2		QP	N				
	0.590000 20.90 0.706000 20.90	6.2 6.2		QP QP	N N				
	0.754000 21.00	6.2		QP QP	N				
	0.890000 20.90	6.2	56 35.1	QP	Ν				
M.	EASUREMENT RESULT	: "agc_fir	<u>:2</u> "						
20	023/11/1 9:11								
	Frequency Level MHz dBµV		mit Margin BµV dB	Detector	Line				
	0.350000 16.90	6.1	49 32.1	AV	N				
	0.590000 16.10	6.2	46 29.9	AV	N				
	1.030000 15.60	6.2		AV	N				
	2.238000 10.40 6.294000 5.20	6.3 6.5		AV	N				
	6.294000 5.20 28.846000 4.90	8.3		AV AV	N N				
	1.70	0.0							



Report No.: AGC03061231002FR01 Page 52 of 52

Appendix I: Photographs of Test Setup

Refer to the Report No.: AGC03061231002AP01

Appendix II: Photographs of Test EUT

Refer to the Report No.: AGC03061231002AP02

-----End of Report-----



Conditions of Issuance of Test Reports

1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").

2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.

3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.

4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.

5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.

6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.

7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.

8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.

9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.