

# TEST REPORT

FCC RULES Part 15 Subpart C §15.231

FCC ID : OSLOKA - 640T

|                 |   |
|-----------------|---|
| Report File No. | : <u>STROR-04-014</u>                                 |
| Date of Issue   | : <u>Sep 20, 2004</u>                                 |
| Kind of Product | : <u>Remote Keyless Entry System</u>                  |
| Model Name      | : <u>OKA - 640T</u>                                   |
| Manufacturer    | : <u>Omron Automotive Electronics Korea Co., Ltd.</u> |
| Serial No.      | : <u>-</u>  |
| Test Result     | : <u>Complied</u>                                     |

The results shown in this report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of company.

**VERIFICATION OF COMPLIANCE**

Applicant : Omron Automotive Electronics Korea Co., Ltd.  
 Kind of Product : Remote Keyless Entry System  
 Brand Name : -  
 Model Name : OKA-640T  
 Model Difference : -  
 Report File No. : STROR-04-014  
 Date of test : Sep 1, 2004 ~ Sep 20, 2004  
 Receiver EUT : -

| APPLICABLE STANDARDS      |             |
|---------------------------|-------------|
| STANDARD                  | TEST RESULT |
| Part 15 Subpart C §15.231 | Complied    |

The above equipment was tested by SGS Testing Korea Co., Ltd. for compliance with the requirements set forth in the FCC RULES Part 15 Subpart C §15.231. The results of testing in this report apply to the product system that was tested only. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Tested By:



Date


Sep 20, 2004

---

Feel Jeong

---

Approved By



Date

Sep 20, 2004

---

James Kwon

---

# INDEX

| <u>CONTENTS</u>                                   | <u>Page</u> |
|---|-------------|
| 1. General Description of EUT -----               | <u>4</u>    |
| 2. General Information of EUT -----               | <u>4</u>    |
| 3. Test Procedure -----                           | <u>5</u>    |
| 4. Test Condition -----                           | <u>6</u>    |
| <b>Test Results</b>                               |             |
| 5. Field Strength of the Carrier -----            | <u>7</u>    |
| 6. Spurious Emission -----                        | <u>8</u>    |
| 7. Bandwidth of Operation Frequency -----         | <u>9</u>    |
| 8. Transmission Time -----                        | <u>10</u>   |
| 9. Attachment A ? Photos of the Test Set up ----- | <u>11</u>   |
| 10.Attachment B ? Photos of the EUT -----         | <u>12</u>   |

## 1. General Description of EUT

The Omron Automotive Electronics Korea Co., Ltd., Model OKA -640T is a transmitter that it controls that it controls locking and unlocking the door and opening by wireless remote controller.

## 2. General Information of EUT

### Transmitter

|                       |                                  |
|-----------------------|----------------------------------|
| Power Supply          | DC 3 V(Lithium),10 mA            |
| Operating Frequency   | 307.9 MHz                        |
| Modulation            | FSK                              |
| Operating Temperature | -20 ~ +60                        |
| Frequency Generation  | SAW resonator                    |
| Communication method  | One-way                          |
| Size                  | 52.5 mm(L) * 33 mm(W) * 11 mm(H) |
| Antenna Type          | Built - in on the PCB in the EUT |

### **3. Test Procedure**

The test procedures are performed following the test stands ANSI C.63.4-2000 if applicable.

#### **3.1 Conducted Emission**

Testing was performed according ANSI C.63.4-2000 in a shielded room with peripherals placed on a table, 0.8 m high over a metal floor.

It was located more than required distance away from the shield room wall.

#### **3.2 Radiated Emission**

Testing was performed according ANSI C.63.4-2000 at open field test site. The EUT was placed in a 0.8 m high table along with the peripherals.

The turn table was separated from the antenna distance 3 meters. Cables were placed in a position to produce maximum emissions as determined by experimentation and operation mode was selected for maximum.

The frequencies and amplitudes of maximum emission were measured at vary azimuths, antenna heights and antenna polarities.

Reported are maximized emission levels.

## 4. Test Condition

### 4.1 Test Configuration

The device was configured for testing in a typical fashion (as a customer would normally use it).

During the tests, the EUT and the supported equipments were installed to meet FCC requirement and operated in a manner, which tends to maximize its emission level in a typical application.

#### Conducted Emission Test

It needs not to test requirement, because the EUT supplies from a DC battery.

#### Radiated Emission Test

Preliminary radiated emission tests were conducted using the procedure in ANSI C63.4-2000 clause 8.3.1.1. to determine the worst operating condition. Final radiated emission tests were measured at 3 meter open field test site. To complete the test configuration required by the FCC, the EUT was tested in all three orthogonal planes.

### 4.2 EUT Operation

EUT was tested according to the following operation modes provided by the specifications given by the manufacturer, and reported the worst emissions.

### 4.3 Peripherals / Support Equipment Used

Following peripheral devices and interface cables were connected during the measurement.

Type of Peripheral Equipment Used:

| Description | Model Name | Serial NO | Manufacturer | FCC ID |
|-------------|------------|-----------|--------------|--------|
|             |            |           |              |        |

## 5. Field Strength of the Carrier FCC Part 15,Subpart C, Section15.231(b)

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.

Humidity Level : 51%

Temperature: 26

| Radiated Emissions  |               |             | Ant  | Correction Factors |            | Total         | FCC Limit         |             |
|---------------------|---------------|-------------|------|--------------------|------------|---------------|-------------------|-------------|
| Carrier Freq. (MHz) | Amp. (dBuV/m) | Detect Mode | Pol. | Ant. (dB/m)        | Cable (dB) | Amp. (dBuV/m) | AV Limit (dBuV/m) | Margin (dB) |
| 307.9               | 48.1          | Peak        | H    | 15.67              | 2.00       | 65.77         | 75.19             | 9.42        |

\* Remark: To get a maximum emission level from the EUT, the EUT was moved throughout the XY,XZ, and YZ planes.

Note :

1.A peak limit is 20dB above the average limit.

### Test Equipment Used

| EQUIPMENT         | MANUFACTURER    | MODEL     | CAL DUE.  |
|-------------------|-----------------|-----------|-----------|
| Spectrum analyzer | H/P             | 8593E     | Aug. 2005 |
| Test Receiver     | Rohde & Schwarz | ESVS 10   | Jun. 2005 |
| Log-periodic      | Rohde & Schwarz | UHALP9107 | Jan. 2005 |

## 6. Spurious Emission FCC Part 15, Subpart C, Section 15.231(b)

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.

Humidity Level : 51%

Temperature: 26

| Radiated Emissions |               |             | Ant  | Correction Factors |            | Total         | FCC Limit         |             |
|--------------------|---------------|-------------|------|--------------------|------------|---------------|-------------------|-------------|
| Freq. (MHz)        | Amp. (dBuV/m) | Detect Mode | Pol. | Ant. (dB/m)        | Cable (dB) | Amp. (dBuV/m) | AV Limit (dBuV/m) | Margin (dB) |
| 615.8              | 16.9          | Peak        | H    | 20.55              | 3.02       | 40.47         | 55.19             | 14.72       |
| 923.7              | 13.7          | Peak        | V    | 25.67              | 3.51       | 42.98         | 55.19             | 12.31       |
| 1231.6             | 10.1          | Peak        | H    | 25.47              | 4.74       | 40.31         | 55.19             | 14.88       |
| 1539.5             | 8.4           | Peak        | H    | 25.65              | 5.26       | 39.31         | 54.00             | 14.69       |
| 1847.4             | 6.7           | Peak        | H    | 25.83              | 5.86       | 38.39         | 55.19             | 16.80       |
| 2155.3             | 5.4           | Peak        | H    | 25.94              | 6.50       | 37.84         | 55.19             | 17.35       |

Remark: Other spurious frequencies were not found up to 3000MHz

To get a maximum emission level from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes.

Notes :

1. H: Horizontal polarization, V: Vertical polarization
2. Emission Level = Reading + Antenna Factor + Cable Loss
3. A peak limit is 20dB above the average limit

### Test Equipment Used

| EQUIPMENT            | MANUFACTURER    | MODEL           | CAL DUE.  |
|----------------------|-----------------|-----------------|-----------|
| Spectrum analyzer    | H/P             | 8593E           | Aug. 2005 |
| Test Receiver        | Rohde & Schwarz | ESVS 10         | Jun. 2005 |
| Log-periodic Antenna | Rohde & Schwarz | UHALP9107       | Jan. 2005 |
| Horn Antenna         | Schwarzbeck     | BBHA9120D(0600) | Jul. 2006 |



## 7. Bandwidth of Operation Frequency FCC Part 15, Subpart C, Section 15.231(c)


Humidity Level : 51%

Temperature: 26

Limit of 20dB Bandwidth :  $307.9\text{MHz} \times 0.0025 = 770\text{kHz}$

| Carrier Freq.<br>(MHz) | Bandwidth of the emission.<br>(kHz) | Limit<br>(kHz) | Remark   |
|------------------------|-------------------------------------|----------------|--|
| 307.9                  | 117.5                               | 770            | The point 20dB down from the modulated carrier |

The plot of test result is attached as below

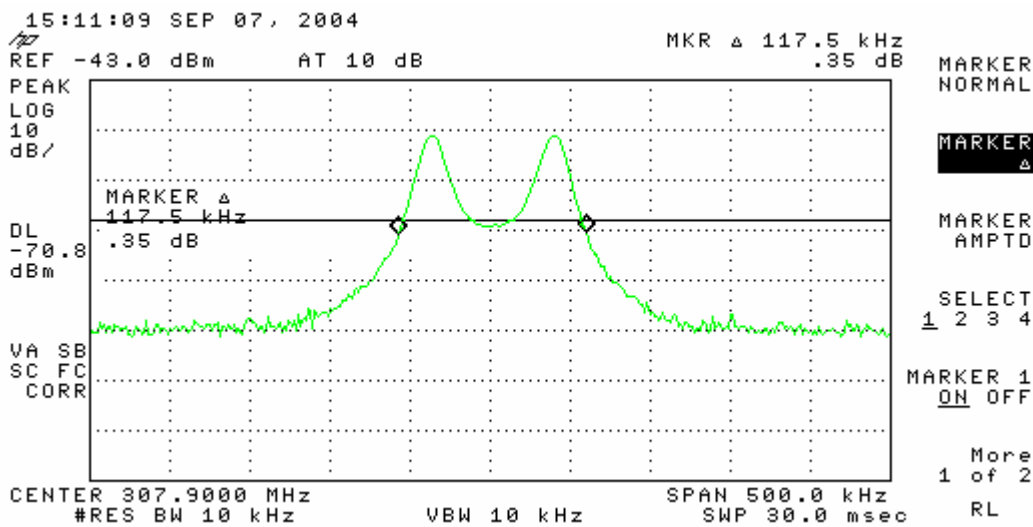

### Test Equipment Used

| EQUIPMENT            | MANUFACTURER    | MODEL     | CAL DUE.  |
|----------------------|-----------------|-----------|-----------|
| Spectrum analyzer    | H/P             | 8593E     | Aug. 2005 |
| Test Receiver        | Rohde & Schwarz | ESVS 10   | Jun. 2005 |
| Log-periodic Antenna | Rohde & Schwarz | UHALP9107 | Jan. 2005 |

### 8. Transmission Time FCC Part 15,Subpart C, Section15.231(a) (1)


Humidity Level : 51%

Temperature: 26

Limit of Transmission Time :A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.


| Carrier Freq.<br>(MHz) | Transmission Time<br>(sec) | Limit<br>(sec) | Pass/Fail |
|------------------------|----------------------------|----------------|-----------|
| 307.9                  | 0.588                      | 5              | Pass      |

The plot of test result is attached as below

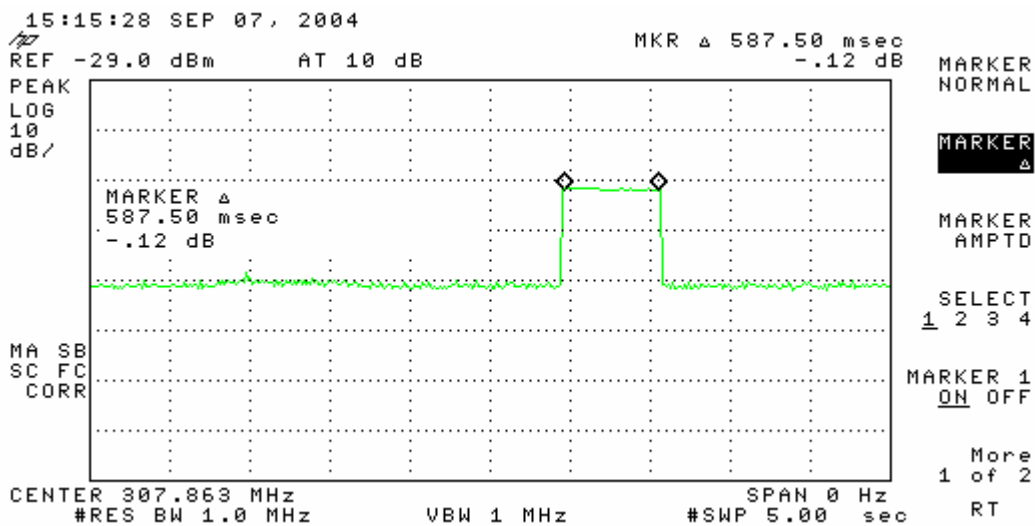

### Test Equipment Used

| EQUIPMENT            | MANUFACTURER    | MODEL     | CAL DUE.  |
|----------------------|-----------------|-----------|-----------|
| Spectrum analyzer    | H/P             | 8593E     | Aug. 2005 |
| Test Receiver        | Rohde & Schwarz | ESVS 10   | Jun. 2005 |
| Log-periodic Antenna | Rohde & Schwarz | UHALP9107 | Jan. 2005 |

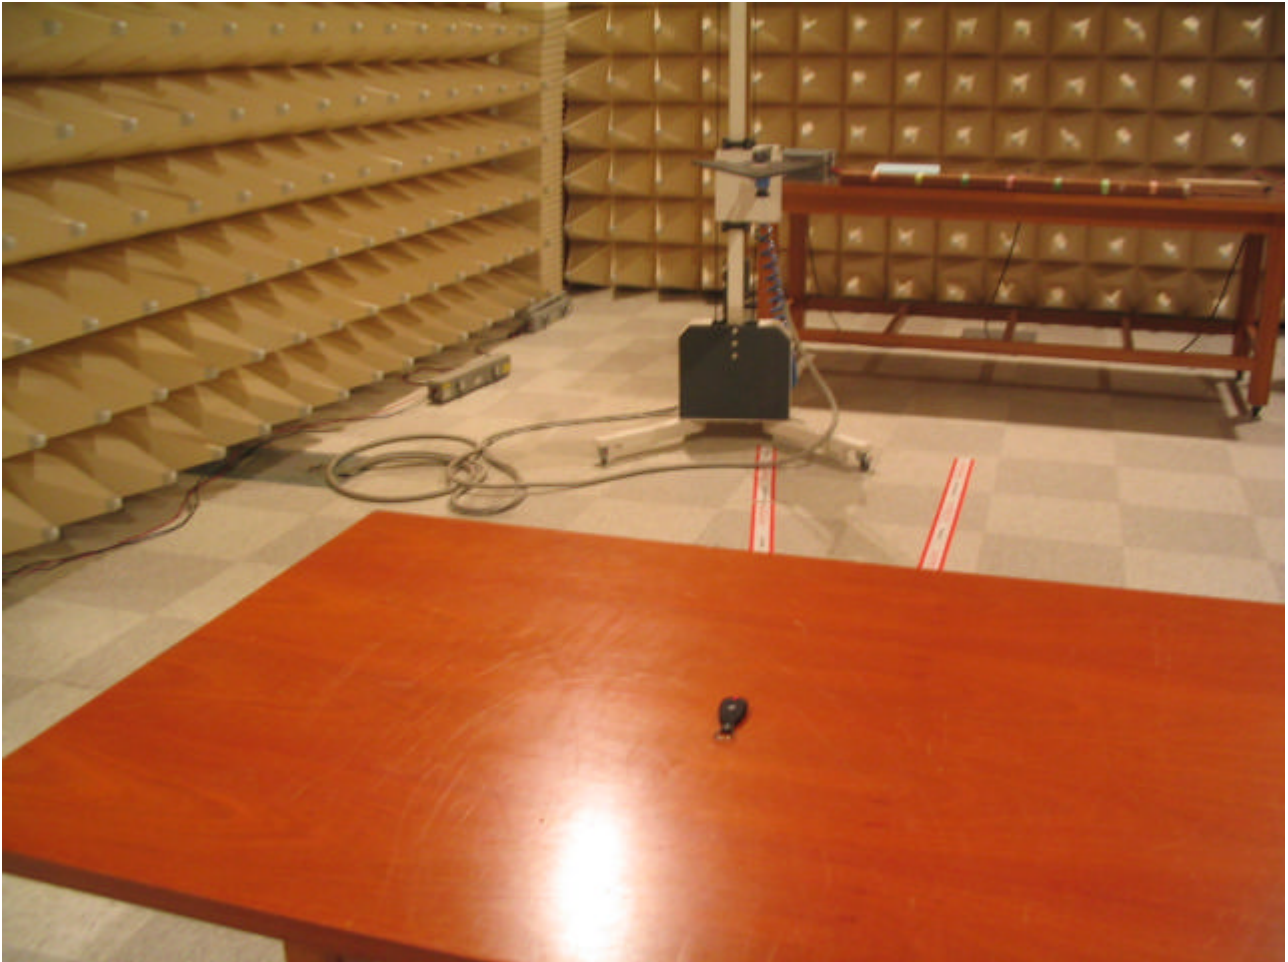**9. Attachment A – Photos of the test set up**

**10. Attachment B – Photos of the EUT**


**View of EUT**



**Rear View of Product**



## Inner View of Product

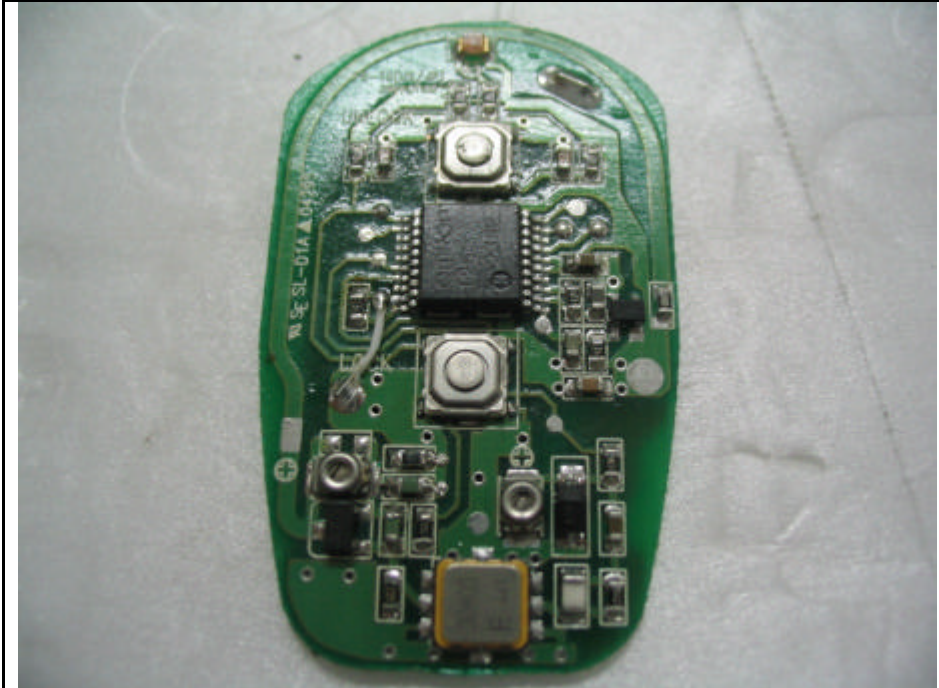

## Inner View of Product

