

廠商會檢定中心

## **TEST REPORT**

Report No. : AY0034265(9)	Date:	27 Jun 2019
---------------------------	-------	-------------

Application No. : LY014803(5)

Client : Kidztech Toys Manufacturing Limited

Room 1201, 12/F., Inter-Continental Plaza, 94 Granville Road, Tsim Sha Tsui East,

Kowloon, Hong Kong

Sample Description : One(1) item of submitted sample stated to be:

Sample Description	Model number
1:16 RC Cars / 1:16 RC Exotics / 1:16	85076 / 85126 / 85136 / 85226 /
Muscle Car / 1:16 Tuner Car / 1:16 Neon	85246 / 85286 / 85346 / 5F62D85 /
Asst	5F62D86 / 5F62DB7 / AD15452

Radio Frequency : 49.860MHz
Rating : 1 x 9V battery
No. of submitted sample : One (1) piece (s)
Sample registration No. : RY008983-001

Date Received : 27 May 2019

Test Period : 27 May 2019 – 21 Jun 2019

Test Requested : FCC 47CFR Part 15 Certification.

Test Method : 47 CFR Part 15 (10-1-18 Edition)

ANSI C63.10 - 2013

Test Result : See attached sheet(s) from page 2 to 15.

Conclusion : The submitted sample was found to comply with requirement of FCC 47CFR Part

15 Subpart C.

For and on behalf of

CMA Industrial Development Foundation Limited

Authorized Signature : \_\_\_\_\_\_ Page 1 of 15

Mr. WONG Lap-pong Andrew

Manager

FCC ID: OTM-8507619-49MTX

This document is issued subject to the latest CMA Testing General Terms and Conditions of Testing and Inspection Services, available on request or accessible at website <a href="https://www.cmatesting.org">www.cmatesting.org</a>. This document shall not be reproduced except in full or with written approval by CMA Testing.

Tel: (852) 2698 8198 Fax: (852) 2695 4177 E-mail: info@cmatesting.org Web Site: http://www.cmatesting.org



廠商會檢定中心

## **TEST REPORT**

Report No. : AY0034265(9) Date : 27 Jun 2019

### **Table of Contents**

1	Gen	eral Information	3
	1.1	General Description	3
	1.2	Location of the test site	
	1.3	List of measuring equipment	5
	1.4	Measurement Uncertainty	6
	1.5	Test Summary	6
2		cription of the radiated emission test	
	2.1	Test Procedure	7
		Test Setup	
		Test Result	
	3.1	Test Procedure	12
		Test Result	
	3.3	Test Setup	
	3.4	Graph and Table of Conducted Emission Measurement Data	12
4	Sup	plementary document	13
	4.1	Bandwidth	13
5	App	pendices	14

FCC ID: OTM-8507619-49MTX



Report No. : AY0034265(9) Date : 27 Jun 2019

#### 1 General Information

### 1.1 General Description

The equipment under test (EUT) model 85126 is a remote controlled toys. It operates at frequency band 49.86MHz for transmitter. The oscillation of radio control is generated by a 49.860MHz crystal (Y1) and modulated by encoder PT977. The EUT is powered by one 9V battery. The EUT contains two control levers to control moving direction and a ON/OFF switch (K1).

The wire antenna is used in EUT and the radio output power is unable to adjust.

Manufacturer declare that all <u>Eleven</u> models are the same cosmetics, materials, PCB layout, electrical, mechanical, physical design, including software/firmware; therefore model <u>85126</u> was provided to be the representative of the test sample.

The difference between the tested sample and declared model(s) are non-conductive outer casing only.

The PCB version of applicant's record is PCB B.

The brief circuit description is listed as follows:

- S1-S4 and K1	and its associated circuit act as switch and control lever.
- U1	and its associated circuit act as Encoder.
- Y1	and its associated circuit act as oscillation clock.
- Q1	and its associated circuit act as modulator.
- Q2	and its associated circuit act as RF amplifier.
- C1, C2, C3, T1, L1	and its associated circuit act as Filter and Antenna matching.
- ZD1	and its associated circuit act as Regulator circuit

FCC ID: OTM-8507619-49MTX



Report No. : AY0034265(9) Date : 27 Jun 2019

#### 1.2 Location of the test site

Radiated emissions measurements are investigated and taken pursuant to the procedures of ANSI C63.4 – 2014. A Semi-Anechoic Chamber Testing Site is set up for investigation and located at:

Ground Floor, Yan Hing Centre, 9 – 13 Wong Chuk Yeung Street, Fo Tan, Shatin, New Territories, Hong Kong.

Conducted emissions measurements are investigated and also taken pursuant to the procedures of ANSI C63.4 - 2014. A shielded room is located at :

Ground Floor, Yan Hing Centre, 9 – 13 Wong Chuk Yeung Street, Fo Tan, Shatin, New Territories, Hong Kong.

FCC Accredited Lab (Designation Number: HK0004) Conformity Assessment Body Identifier (CABID: HK0002)

FCC ID: OTM-8507619-49MTX



廠商會檢定中心

## **TEST REPORT**

Report No. : AY0034265(9) Date : 27 Jun 2019

### 1.3 List of measuring equipment

Equipment	Manufacturer	Model No.	Model No. Serial No.		Calibration Period
EMI Test Receiver	Rohde & Schwarz	ESCI	100152	31 May 2020	1Year
Spectrum Analyzer Rohde & Schwarz		FSV40	100964	11 Sep 2019	1Year
Loop Antenna EMCO		6502	00056620	29 Oct 2020	2Years
Biconical Antenna Rohde & Schwarz		HK116	837414/00	08 Oct 2020	2Years
Log Periodic Antenna TESEQ		UPA6109	43666	08 Oct 2019	2Years
Coaxial Cable Humber+Suhner		RG 213/U	N/A	08 May 2020	1Year
Coaxial Cable Humber+Suhner		RG 214/U	N/A	08 May 2020	1Year



廠商會檢定中心

## **TEST REPORT**

Report No. : AY0034265(9) Date : 27 Jun 2019

### 1.4 Measurement Uncertainty

The reported uncertainty is based on a standard uncertainty multiplied by a coverage factor k=2, providing a level of confidence of approximately 95%.

#### Radiated emissions

Frequency	Uncertainty (U <sub>lab</sub> )
30MHz ~ 200MHz (Horizontal)	4.59dB
30MHz ~ 200MHz (Vertical)	4.49dB
200MHz ~1000MHz (Horizontal)	4.94dB
200MHz ~1000MHz (Vertical)	4.97dB
1GHz ~ 6GHz	4.52dB

### 1.5 Test Summary

TEST ITEM	FCC REFERANCE	RESULT
Fundamental emission	15.235(a)	Comply
Out-band emission	15.235(b)	Comply
Bandwidth	15.215(c)	Comply



Report No. : AY0034265(9) Date : 27 Jun 2019

### 2 Description of the radiated emission test

#### 2.1 Test Procedure

Radiated emissions measurements are investigated and taken pursuant to the procedures of ANSI C63.10 - 2013.

A non-conductive turntable with dimensions of  $1.5 \text{m} \times 0.4 \text{m} \times 0.8 \text{m}$  (L x W x H) placed above the reference ground plane. The equipment under test (EUT) was placed at 0.8 m height for below 1 GHz measurement and 1.5 m height for above 1 GHz measurement. The test distance is 3 m between EUT and receiving antenna. A broadband antenna mounting on the mast received the signal strength. The turntable was rotated to maximize the emission level. The antenna was moving along the mast from 1 m up to 4 m until no more higher value was found. Both horizontal and vertical polarization of the antenna were placed and investigated. Additional absorbing material will be placed between the EUT and receiving antenna for above 1 GHz measurement.

For below 30MHz, a loop antenna with its vertical plane is placed 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1 m above the ground.

The device was rotated through three orthogonal axes to determine which attitude and configuration produce the highest emission during measurement.





廠商會檢定中心

## **TEST REPORT**

Report No. : AY0034265(9) Date : 27 Jun 2019

### 2.2 Test Setup

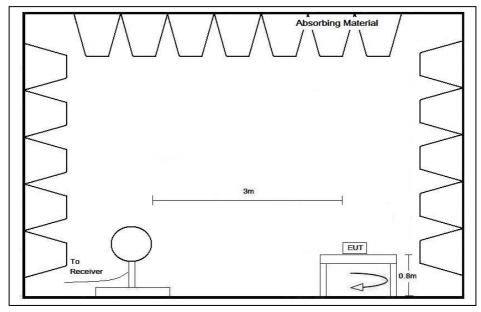

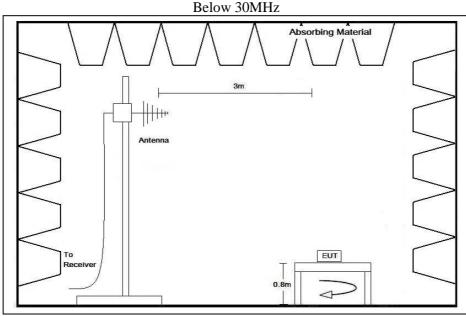

30MHz - 1GHz

FCC ID: OTM-8507619-49MTX




廠商會檢定中心

## **TEST REPORT**

Report No. : AY0034265(9) Date : 27 Jun 2019

### 2.2 Test Setup

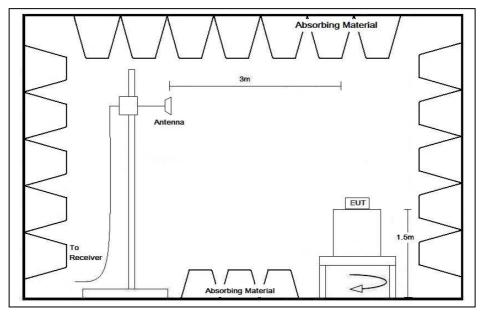

Above 1GHz

FCC ID: OTM-8507619-49MTX



Report No. : AY0034265(9) Date : 27 Jun 2019

#### 2.3 Test Result

Peak Detector data was measured unless otherwise stated.

The radiated emissions are measured from 9kHz to 500MHz (the tenth harmonics)

The worst case configuration is shown on the worst case configuration of test setup photo.

The frequencies from fundamental up to tenth harmonics were investigated, and emissions more 20dB below limit were not reported. Thus, those highest emissions were presented in next pages.

The EUT has been tested in Transmission mode and antenna is fully extended.

It was found that the EUT meet the FCC requirement.

The Receiver (CAR) for this Transmitter (Remove) is under Supplier's Declaration of Conformity procedure.



廠商會檢定中心

## **TEST REPORT**

Report No. : AY0034265(9) Date : 27 Jun 2019

2.4 Radiated Emission Measurement Data

#### **Radiated emission**

**Environmental conditions:** 

ParameterRecorded valueAmbient temperature:25.2° CRelative humidity:53.9%

Polarization	Frequency (MHz)	Reading at 3m (dBµV)	Antenn a Factor and Cable Loss	Field Strength at 3m (dBµV/m)	Limit at 3m (dBµV/m)	Margin (dB)	Detector Type
			(dB/m)				
Н	49.860	50.1	11.3	61.4	80.0	-18.6	PK
V	49.860	58.6	11.3	69.9	80.0	-10.1	PK
Н	99.695	19.2	10.2	29.4	43.5	-14.1	QP
Н	149.583	10.0	13.5	23.5	43.5	-20.0	QP
Н	199.391	7.5	15.3	22.8	43.5	-20.7	QP
Н	249.253	11.6	14.5	26.1	46.0	-19.9	QP
V	299.194	13.2	14.5	27.7	46.0	-18.3	QP
V	349.015	13.0	16.9	29.9	46.0	-16.1	QP
V	398.845	14.8	16.9	31.7	46.0	-14.3	QP
V	488.691	11.2	20.9	32.1	46.0	-13.9	QP
Н	498.554	11.5	20.9	32.4	46.0	-13.6	QP

Remark: All other emission below the limit more than 20dB are not reported in this report.

FCC ID: OTM-8507619-49MTX



廠商會檢定中心

## **TEST REPORT**

Report No. : AY0034265(9) Date : 27 Jun 2019

3 Description of the Line-conducted Test


#### 3.1 Test Procedure

Conducted emissions measurements are investigated and also taken pursuant to the procedures of ANSI C63.10 - 2013. The EUT was setup as described in the procedures, and both lines were measured.

3.2 Test Result

No measurement is required as the EUT is a battery-operated product.

### 3.3 Test Setup

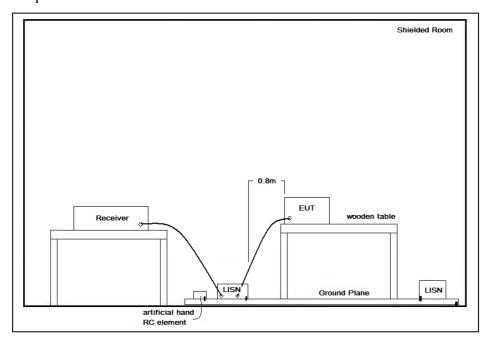

3.4 Graph and Table of Conducted Emission Measurement Data

Not Applicable

FCC ID: OTM-8507619-49MTX



Report No. : AY0034265(9) Date : 27 Jun 2019

### 4 Supplementary document

The following document were submitted by applicant, and for electronic filing, the document are saved with the following filenames:

Document	Filename		
ID Label/Location	Label Artwork and Location.pdf		
Block Diagram	Block Diagram.pdf		
Schematic Diagram	Schematic.pdf		
Users Manual	User Manual.pdf		
Operational Description	Operation Description.pdf		

#### 4.1 Bandwidth

Appendices A1 is shown the fundamental emission is confined in the specified band. 20dB bandwidth is 17.076kHz and 20dB bandwidth are within the assigned band. It shows that the EUT meets the FCC Part 15.215(c).

And the in-band emission is more than 26dBc within the band 49.81 - 49.91MHz. It shows that the EUT meets the FCC Part 15.235(b).



Report No. : AY0034265(9) Date : 27 Jun 2019

5 Appendices

A1. Bandwidth Plot 1 page(s)

FCC ID: OTM-8507619-49MTX




廠商會檢定中心

## **TEST REPORT**

Report No. : AY0034265(9) Date : 27 Jun 2019

#### A1. Bandwidth Plot

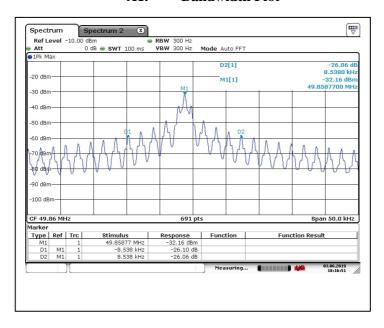

\*\*\*\*\* End of Report \*\*\*\*\*

FCC ID: OTM-8507619-49MTX