

Report No.: SZEM141200691901

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan

District, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594

Email: ee.shenzhen@sgs.com Page: 1 of 46

FCC REPORT

Application No: SZEM1412006919CR (SGS GZ NO.:GZEM1412006349CR)

Applicant: Guangdong Transtek Medical Electronics Co., Ltd.

Product Name: Bluetooth body Scale

Model No.(EUT): LS108-B6

FCC ID: OU9LS108-B06

Standards: 47 CFR Part 15, Subpart C (2013)

Date of Receipt: 2014-12-15

Date of Test: 2014-12-17 to 2014-12-18

Date of Issue: 2015-01-15

Test Result: PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

Jack Zhang
EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.



Report No.: SZEM141200691901

Page: 2 of 46

2 Version

Revision Record						
Version	Chapter	Date	Modifier	Remark		
00		2015-01-15		Original		

Authorized for issue by:		
Tested By	(Chris Zhong) /Project Engineer	2014-12-18 Date
Prepared By	Link Liang	2014-12-22
	(Link Liang) /Clerk	Date
Checked By	Orven Zhou	2015-01-15
	(Owen Zhou) /Reviewer	Date



Report No.: SZEM141200691901

Page: 3 of 46

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 2009	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 2009	N/A
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(3)	KDB558074 D01 v03r02	PASS
6dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(2)	KDB558074 D01 v03r02	PASS
Power Spectral Density	47 CFR Part 15, Subpart C Section 15.247 (e)	KDB558074 D01 v03r02	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	KDB558074 D01 v03r02	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	KDB558074 D01 v03r02	PASS
Radiated Spurious Emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2009	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2009	PASS

Remark:

N/A: In this whole report not application.



Report No.: SZEM141200691901

Page: 4 of 46

4 Contents

			Page
1	CC	OVER PAGE	1
2	VE	ERSION	2
3		ST SUMMARY	
4		ONTENTS	
5	GE	ENERAL INFORMATION	5
	5.1	CLIENT INFORMATION	5
	5.2	GENERAL DESCRIPTION OF EUT	
	5.3	TEST ENVIRONMENT	
	5.4	DESCRIPTION OF SUPPORT UNITS	7
	5.5	TEST LOCATION	
	5.6	TEST FACILITY	8
	5.7	DEVIATION FROM STANDARDS	
	5.8	ABNORMALITIES FROM STANDARD CONDITIONS	8
	5.9	OTHER INFORMATION REQUESTED BY THE CUSTOMER	
	5.10	EQUIPMENT LIST	9
6	TE	ST RESULTS AND MEASUREMENT DATA	12
	6.1	Antenna Requirement	12
	6.2	CONDUCTED PEAK OUTPUT POWER	13
	6.3	6DB OCCUPY BANDWIDTH	16
	6.4	POWER SPECTRAL DENSITY	19
	6.5	BAND-EDGE FOR RF CONDUCTED EMISSIONS	22
	6.6	Spurious RF Conducted Emissions	
	6.7	RADIATED SPURIOUS EMISSION	33
	6.7		
	6.8	RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY	41-46



Report No.: SZEM141200691901

Page: 5 of 46

5 General Information

5.1 Client Information

Applicant:	Guangdong Transtek Medical Electronics Co., Ltd.		
Address of Applicant:	Zone A, 5/F., Investment Building, No. 12 Huizhan East Rd., Torch Development District, Zhongshan, Guangdong, China 528437		

5.2 General Description of EUT

Product Name:	Bluetooth body Scale
Model No.:	LS108-B6
Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	4.0
Modulation Type:	GFSK
Number of Channel:	40
Sample Type:	Fixed production
Test Power Grade:	0(manufacturer declare)
Test Software of EUT:	BTool (manufacturer declare)
Antenna Type:	Integral
Antenna Gain:	0dBi
Power Supply:	6V
Battery:	6.0V DC (1.5V x 4 "AAA" Battery)



Report No.: SZEM141200691901

Page: 6 of 46

Operation F	Operation Frequency each of channel						
Channel	hannel Frequency Channel Frequency Channel Frequency Channel Frequency						Frequency
1	2402MHz	11	2422MHz	21	2442MHz	31	2462MHz
2	2404MHz	12	2424MHz	22	2444MHz	32	2464MHz
3	2406MHz	13	2426MHz	23	2446MHz	33	2466MHz
4	2408MHz	14	2428MHz	24	2448MHz	34	2468MHz
5	2410MHz	15	2430MHz	25	2450MHz	35	2470MHz
6	2412MHz	16	2432MHz	26	2452MHz	36	2472MHz
7	2414MHz	17	2434MHz	27	2454MHz	37	2474MHz
8	2416MHz	18	2436MHz	28	2456MHz	38	2476MHz
9	2418MHz	19	2438MHz	29	2458MHz	39	2478MHz
10	2420MHz	20	2440MHz	30	2460MHz	40	2480MHz

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency		
The Lowest channel	2402MHz		
The Middle channel	2440MHz		
The Highest channel	2480MHz		



Report No.: SZEM141200691901

Page: 7 of 46

5.3 Test Environment

Operating Environment:		
Temperature:	25.0 °C	
Humidity:	53 % RH	
Atmospheric Pressure:	995mbar	

5.4 Description of Support Units

The EUT has been tested independent unit.

5.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.



Report No.: SZEM141200691901

Page: 8 of 46

5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

VCCI

The 10m Semi-anechoic chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

• FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

Industry Canada (IC)

Two 3m Semi-anechoic chambers of SGS-CSTC Standards Technical Services Co., Ltd. have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1 & 4620C-2.

5.7 Deviation from Standards

None.

5.8 Abnormalities from Standard Conditions

None.

5.9 Other Information Requested by the Customer

None.



Report No.: SZEM141200691901

Page: 9 of 46

5.10 Equipment List

	Conducted Emission	n			
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	Shielding Room	ZhongYu Electron	GB-88	SEL0042	2015-06-10
2	LISN	Rohde & Schwarz	ENV216	SEL0152	2015-10-24
3	LISN	ETS-LINDGREN	3816/2	SEL0021	2015-05-16
4	8 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T8-02	SEL0162	2015-08-30
5	4 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T4-02	SEL0163	2015-08-30
6	2 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T2-02	SEL0164	2015-08-30
7	EMI Test Receiver	Rohde & Schwarz	ESCI	SEL0022	2015-05-16
8	Coaxial Cable	SGS	N/A	SEL0025	2015-05-29
9	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-24
10	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2015-10-24
11	Barometer	Chang Chun	DYM3	SEL0088	2015-05-16



Report No.: SZEM141200691901

Page: 10 of 46

	RE in Chamber					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)	
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2015-06-10	
2	EMI Test Receiver	Agilent Technologies	N9038A	SEL0312	2015-09-16	
3	EMI Test software	AUDIX	E3	SEL0050	N/A	
4	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2015-10-24	
5	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2015-10-24	
6	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2015-10-24	
7	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2015-05-16	
8	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2015-10-24	
9	Coaxial cable	SGS	N/A	SEL0027	2015-05-29	
10	Coaxial cable	SGS	N/A	SEL0189	2015-05-29	
11	Coaxial cable	SGS	N/A	SEL0121	2015-05-29	
12	Coaxial cable	SGS	N/A	SEL0178	2015-05-29	
13	Band filter	Amindeon	82346	SEL0094	2015-05-16	
14	Barometer	Chang Chun	DYM3	SEL0088	2015-05-16	
15	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-24	
16	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2015-10-24	
17	Signal Generator (10M-27GHz)	Rohde & Schwarz	SMR27	SEL0067	2015-05-16	
18	Signal Generator	Rohde & Schwarz	SMY01	SEL0155	2015-10-24	
19	Loop Antenna	Beijing Daze	ZN30401	SEL0203	2015-06-04	



Report No.: SZEM141200691901

Page: 11 of 46

	RF connected test				
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-24
2	Humidity/ Temperature Indicator	HYGRO	ZJ1-2B	SEL0033	2015-10-24
3	Spectrum Analyzer	Rohde & Schwarz	FSP	SEL0154	2015-10-24
4	Coaxial cable	SGS	N/A	SEL0178	2015-05-29
5	Coaxial cable	SGS	N/A	SEL0179	2015-05-29
6	Barometer	ChangChun	DYM3	SEL0088	2015-05-16
7	Signal Generator	Rohde & Schwarz	SML03	SEL0068	2015-05-16
8	Band filter	amideon	82346	SEL0094	2015-05-16
9	POWER METER	R&S	NRVS	SEL0144	2015-10-24
10	Attenuator	Beijin feihang taida	TST-2-6dB	SEL0205	2015-05-16
11	Power Divider(splitter)	Agilent Technologies	11636B	SEL0130	2015-10-24

Note: The calibration interval is one year, all the instruments are valid.



Report No.: SZEM141200691901

Page: 12 of 46

6 Test results and Measurement Data

6.1 Antenna Requirement

Standard requirement: 47 CFR Part 15C Section 15.203 /247(c)


15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

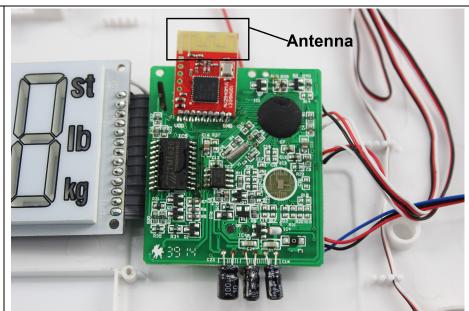

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0dBi.






Report No.: SZEM141200691901

Page: 13 of 46

6.2 Conducted Peak Output Power

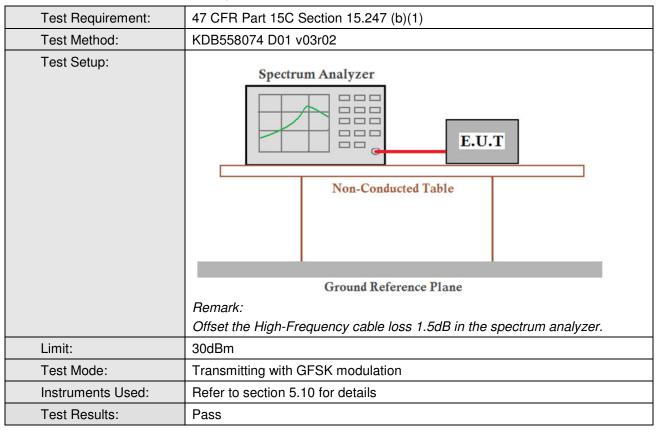

Measurement Data

GFSK mode							
Test channel	Test channel Peak Output Power (dBm) Limit (dBm)						
Lowest	2.34	30.00	Pass				
Middle	2.20	30.00	Pass				
Highest	1.69	30.00	Pass				




Report No.: SZEM141200691901


Page: 14 of 46

Test plot as follows:

Test mode: GFSK Test channel: Lowest

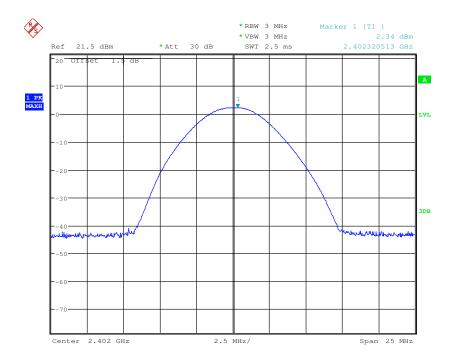



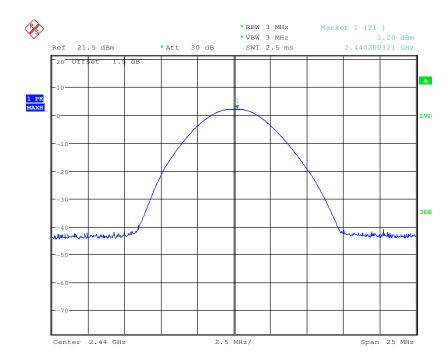




Report No.: SZEM141200691901

Page: 15 of 46

Test mode: GFSK Test channel: Highest

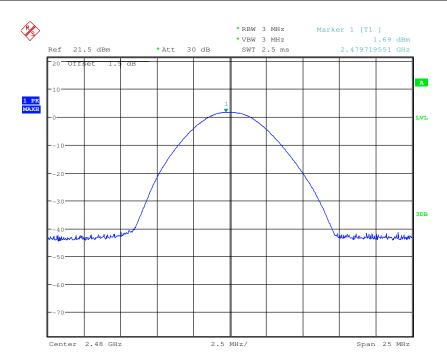




Report No.: SZEM141200691901

Page: 16 of 46

6.3 6dB Occupy Bandwidth

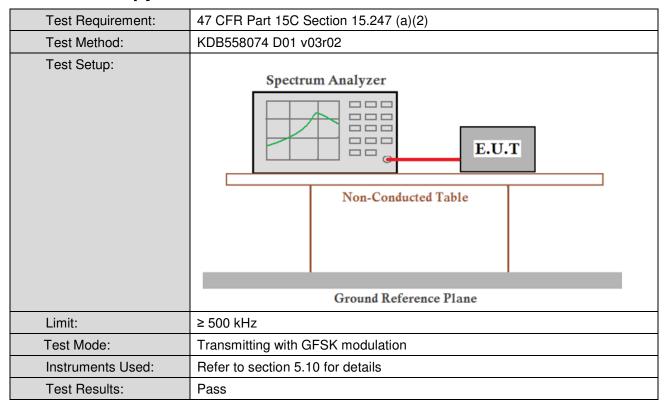

Measurement Data

Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result
Lowest	0.712	≥500	Pass
Middle	0.712	≥500	Pass
Highest	0.712	≥500	Pass




Report No.: SZEM141200691901


Page: 17 of 46

Test plot as follows:

Test mode: GFSK Test channel: Lowest

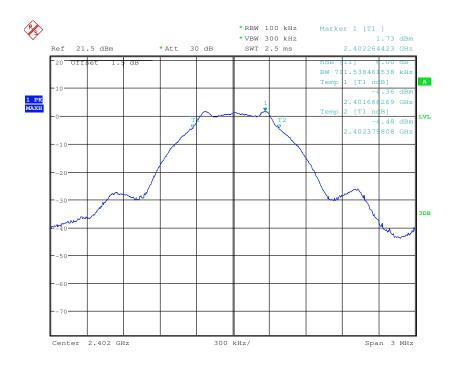


Test mode: GFSK Test channel: Middle

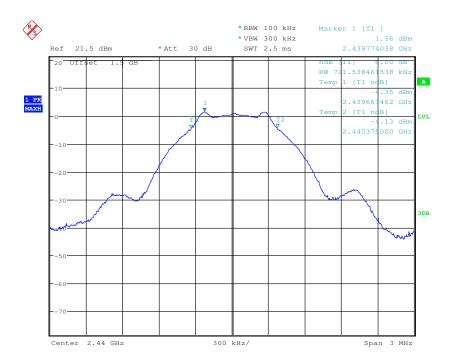




Report No.: SZEM141200691901

Page: 18 of 46



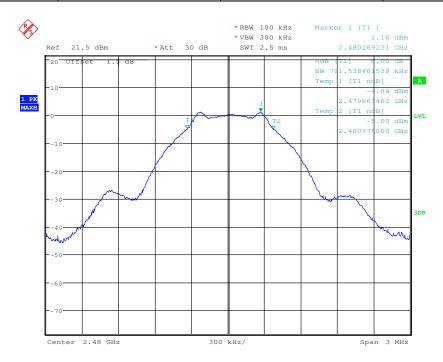




Report No.: SZEM141200691901

Page: 19 of 46

6.4 Power Spectral Density

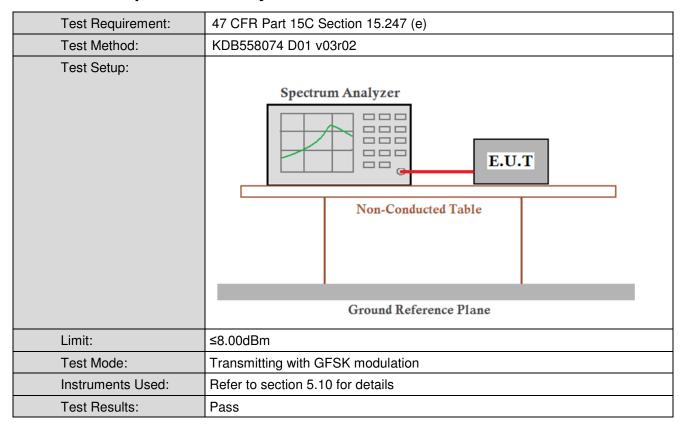

Measurement Data

GFSK mode							
Test channel	Power Spectral Density (dBm)	Limit (dBm)	Result				
Lowest	1.86	≤8.00	Pass				
Middle	1.53	≤8.00	Pass				
Highest	1.10	≤8.00	Pass				




Report No.: SZEM141200691901


Page: 20 of 46

Test plot as follows:

Test mode: GFSK Test channel: Lowest

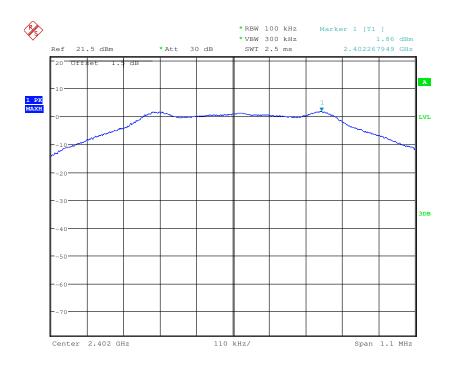



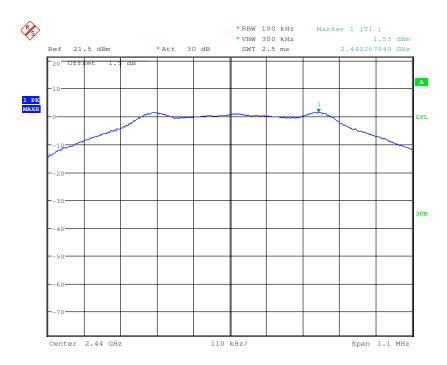




Report No.: SZEM141200691901

Page: 21 of 46

Test mode: GFSK Test channel: Highest

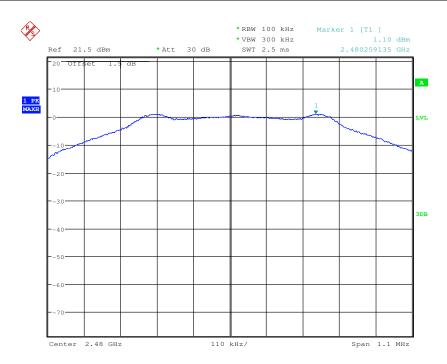



Report No.: SZEM141200691901

Page: 22 of 46

6.5 Band-edge for RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)			
Test Method:	KDB558074 D01 v03r02			
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.			
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.			
Test Mode:	Transmitting with GFSK modulation			
Instruments Used:	Refer to section 5.10 for details			
Test Results:	Pass			






Report No.: SZEM141200691901


Page: 23 of 46

Test plot as follows:

Test mode: GFSK Test channel: Lowest

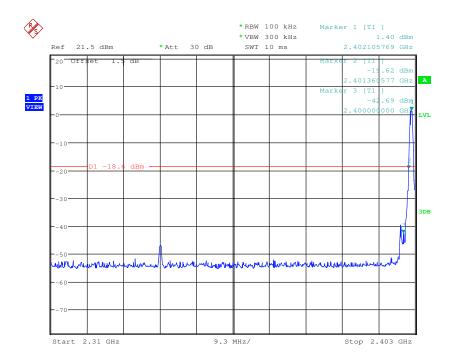



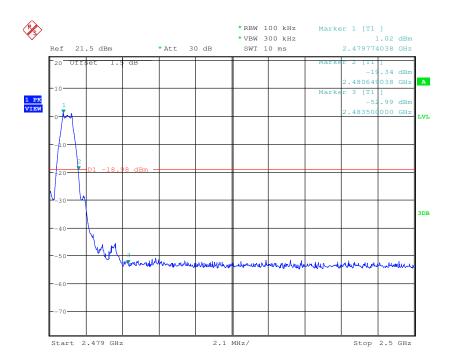



Report No.: SZEM141200691901

Page: 24 of 46

6.6 Spurious RF Conducted Emissions


Test Requirement:	47 CFR Part 15C Section 15.247 (d)			
Test Method:	KDB558074 D01 v03r02			
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane			
	Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.			
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.			
Test Mode:	Transmitting with GFSK modulation			
Instruments Used:	Refer to section 5.10 for details			
Test Results:	Pass			




Report No.: SZEM141200691901

Page: 25 of 46

Test mode: GFSK Test channel: Lowest

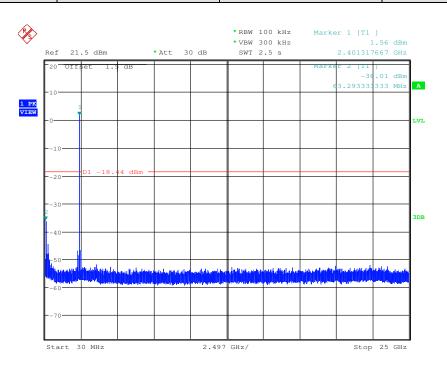


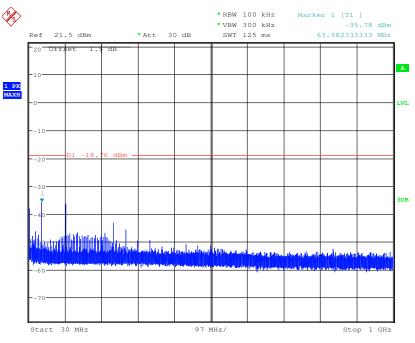




Report No.: SZEM141200691901

Page: 26 of 46

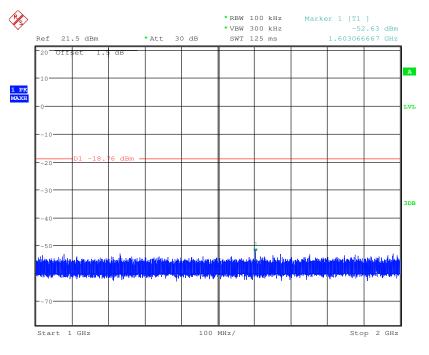


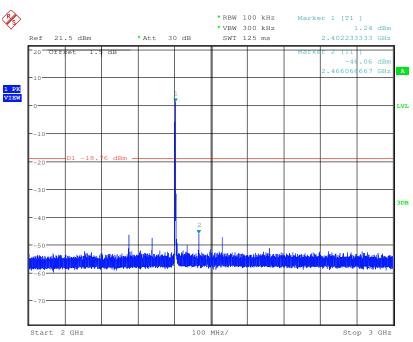




Report No.: SZEM141200691901

Page: 27 of 46

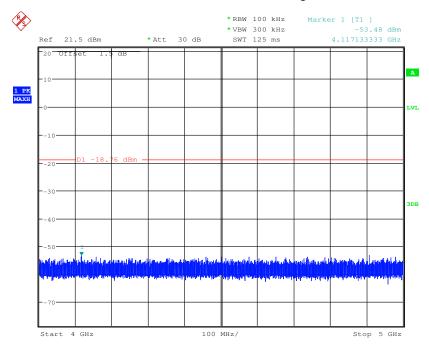




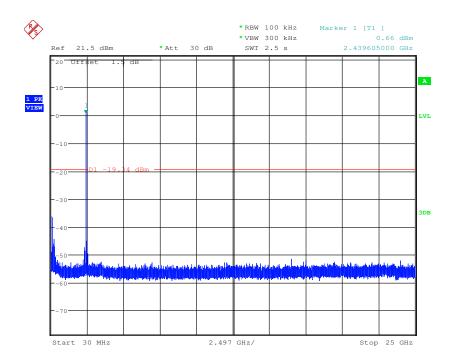



Report No.: SZEM141200691901


Page: 28 of 46

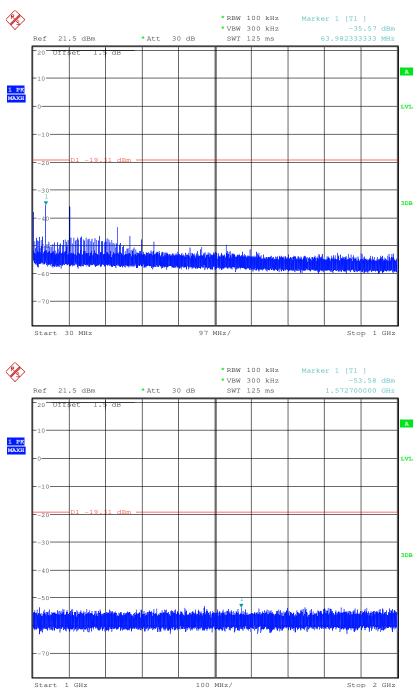



Report No.: SZEM141200691901


Page: 29 of 46

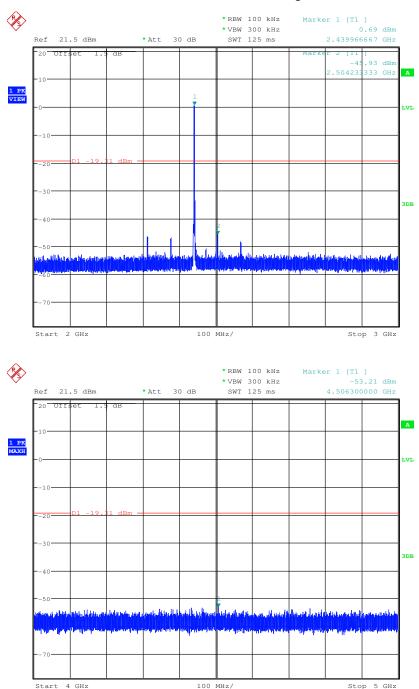



Report No.: SZEM141200691901

Page: 30 of 46

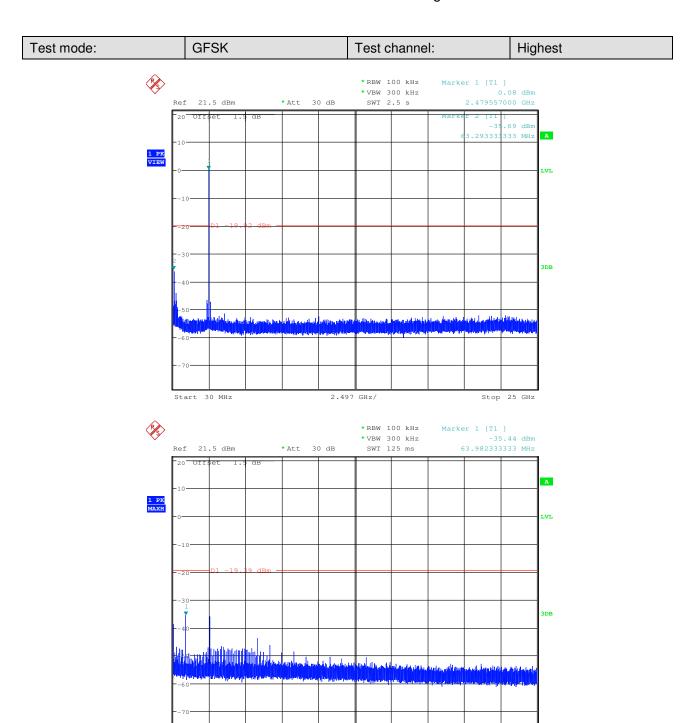

97 MHz/


Stop 1 GHz

Start 30 MHz



Report No.: SZEM141200691901

Stop 3 GHz

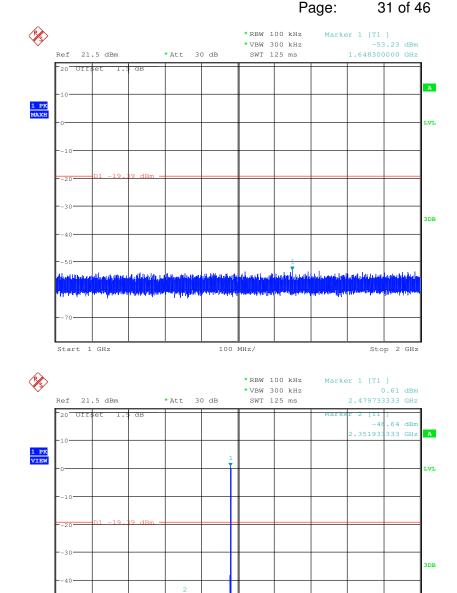


100 MHz/

Start 2 GHz



Report No.: SZEM141200691901

Page: 32 of 46

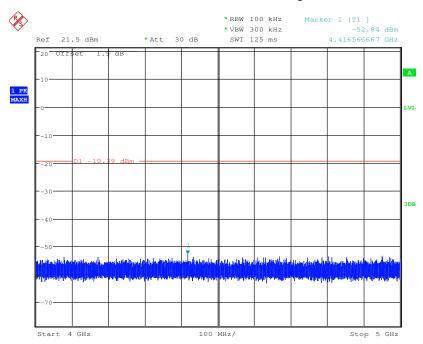

Remark:

Pretest 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report. Per FCC Part 15.33 (a) and 15.31 (o) ,The amplitude of spurious emissions from intentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.





Report No.: SZEM141200691901

Page: 33 of 46


6.7 Radiated Spurious Emission

Test Requirement:	47 CFR Part 15C Section	on 15.	209 and 15	.205					
Test Method:	ANSI C63.10 2009								
Test Site:		Measurement Distance: 3m (Semi-Anechoic Chamber)							
Receiver Setup:	Frequency		Detector	RBW	Ţ,	VBW	Remark	T	
	0.009MHz-0.090MHz		Peak	10kHz	2 3	0kHz	Peak	1	
	0.009MHz-0.090MH	z	Average	10kHz	: 3	0kHz	Average		
	0.090MHz-0.110MH	z	Quasi-peak	10kHz	: 3	0kHz	Quasi-peak		
	0.110MHz-0.490MH	z	Peak	10kHz	: 3	0kHz	Peak		
	0.110MHz-0.490MH	0.110MHz-0.490MHz		10kHz	: 3	0kHz	Average		
			Quasi-peak	10kHz	2 3	0kHz	Quasi-peak		
			Quasi-peak	100 kH	z 3	00kHz	Quasi-peak		
	Above 1GHz		Peak	1MHz	3	3MHz	Peak		
			Peak	1MHz		10Hz	Average		
Limit:	Frequency		d strength ovolt/meter)	Limit (dBuV/m)	Re	emark	Measureme distance (r		
	0.009MHz-0.490MHz	240	00/F(kHz)	-			300		
	0.490MHz-1.705MHz	2400	00/F(kHz)	-		-	30		
	1.705MHz-30MHz		30	-		-	30		
	30MHz-88MHz		100	40.0	Qua	si-peak	3		
	88MHz-216MHz		150	43.5	Qua	si-peak	3		
	216MHz-960MHz		200	46.0	Qua	si-peak	3		
		z 500		54.0	Quasi-peak		3		
	960MHz-1GHz		300			<u> </u>			
	960MHz-1GHz Above 1GHz		500	54.0	Av	erage	3		
		20dB quipm	500 s otherwise above the rent under to	specified maximum est. This p	l, the	limit o	n peak rad erage emissio	n	



Report No.: SZEM141200691901

Page: 34 of 46






Figure 1. Below 30MHz

Figure 2. 30MHz to 1GHz




Figure 3. Above 1 GHz

Test Procedure:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel (2402MHz),the middle channel (2440MHz),the Highest channel (2480MHz)
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse



Report No.: SZEM141200691901

Page: 35 of 46

	case. i. Repeat above procedures until all frequencies measured was complete.
Test Mode:s	Transmitting with GFSK modulation
Final Test Mode:	Transmitting with GFSK modulation Pretest the EUT at Transmitting mode. For below 1GHz part, through pre-scan, the worst case is the lowest channel. Only the worst case is recorded in the report.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass




Report No.: SZEM141200691901

Page: 36 of 46

Radiated Emission below 1GHz				
30MHz~1GHz (QP)				
Test mode:	Normal	Vertical		



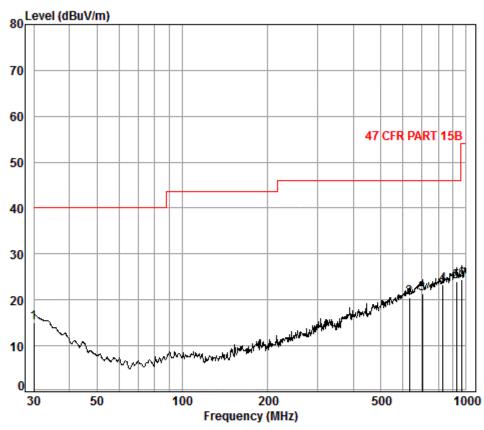

Condition: 47 CFR PART 15B 3m 3142C Vertical

Job No. : 6919CR

		Cable	Ant	Preamp	Read		Limit	0ver
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	——dB		dBuV/m	dBuV/m	——dB
		45	45/11	45	aba.	abav,	abar, iii	u.b
1	30.00	0.60	18.70	27.36	23.13	15.07	40.00	-24.93
2	631.69	2.77	20.53	27.50	24.78	20.58	46.00	-25.42
3	701.76	2.91	21.60	27.41	24.34	21.44	46.00	-24.56
4	830.40	3.33	22.40	27.13	24.73	23.33	46.00	-22.67
5	925.76	3.63	23.30	26.64	23.67	23.96	46.00	-22.04
6	968.93	3.67	23.30	26.44	23.92	24.45	54.00	-29.55




Report No.: SZEM141200691901

Page: 37 of 46

Test mode:	Normal	Horizontal
------------	--------	------------



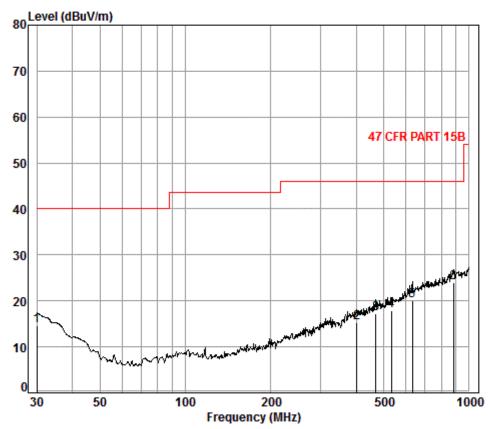

Condition: 47 CFR PART 15B 3m 3142C HORIZONTAL

Job No. : 6919CR

		Cable	Ant	Preamp	Read		Limit	0ver
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	30.00	0.60	18.70	27.36	22.56	14.50	40.00	-25.50
2	401.84	2.21	16.31	27.15	23.79	15.16	46.00	-30.84
3	468.88	2.49	17.58	27.54	24.71	17.24	46.00	-28.76
4	531.96	2.63	18.61	27.65	24.22	17.81	46.00	-28.19
5	631.69	2.77	20.53	27.50	24.34	20.14	46.00	-25.86
6	881.41	3.53	23.05	26.85	24.16	23.89	46.00	-22.11



Report No.: SZEM141200691901

Page: 38 of 46

Transmitter Emission above 1GHz								
Test mode:	1	GFSK	Test	channel:	Lowest	Lowest Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3679.853	6.8	32.7	35.6	46.1	50.0	74.0	-24.0	Vertical
4804.000	7.6	34.3	35.1	46.1	52.9	74.0	-21.1	Vertical
6187.203	8.5	34.9	33.9	45.5	55.0	74.0	-19.0	Vertical
7206.000	9.9	35.8	33.8	45.3	57.2	74.0	-16.8	Vertical
9608.000	12.0	37.2	32.5	44.6	61.3	74.0	-12.7	Vertical
11195.988	13.4	37.5	31.1	44.2	64.0	74.0	-10.0	Vertical
3679.853	6.8	32.7	35.6	46.4	50.3	74.0	-23.7	Horizontal
4804.000	7.6	34.3	35.1	46.3	53.1	74.0	-20.9	Horizontal
6321.675	8.7	34.8	33.7	44.9	54.7	74.0	-19.3	Horizontal
7206.000	9.9	35.8	33.8	46.3	58.2	74.0	-15.8	Horizontal
9608.000	12.0	37.2	32.5	44.1	60.8	74.0	-13.2	Horizontal
11459.836	13.5	37.6	31.6	44.7	64.2	74.0	-9.8	Horizontal

Test mode:		GFSK	Te	st channel:	Lowest		Rem	ark:	Average
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limi (dBµV/		Over Limit (dB)	Polarization
3679.853	6.8	32.7	35.6	33.3	37.2	54.0)	-16.8	Vertical
4804.000	7.6	34.3	35.1	33.7	40.5	54.0)	-13.5	Vertical
6187.203	8.5	34.9	33.9	32.7	42.2	54.0)	-11.8	Vertical
7206.000	9.9	35.8	33.8	32	43.9	54.0)	-10.1	Vertical
9608.000	12.0	37.2	32.5	31.6	48.3	54.0)	-5.7	Vertical
11195.988	13.4	37.5	31.1	31.1	50.9	54.0)	-3.1	Vertical
3679.853	6.8	32.7	35.6	33.3	37.2	54.0)	-16.8	Horizontal
4804.000	7.6	34.3	35.1	32.7	39.5	54.0)	-14.5	Horizontal
6321.675	8.7	34.8	33.7	32.5	42.3	54.0)	-11.7	Horizontal
7206.000	9.9	35.8	33.8	32.1	44.0	54.0)	-10.0	Horizontal
9608.000	12.0	37.2	32.5	31.6	48.3	54.0)	-5.7	Horizontal
11459.836	13.5	37.6	31.6	30.8	50.3	54.0)	-3.7	Horizontal



Report No.: SZEM141200691901

Page: 39 of 46

Test mode:		GFSK	Tes	t channel:	Middle	Re	mark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line	l limit	Polarization
3693.064	6.8	32.7	35.6	46.5	50.4	74.0	-23.6	Vertical
4880.000	7.6	34.5	35.2	45.7	52.6	74.0	-21.4	Vertical
6265.293	8.6	34.8	33.7	45.9	55.6	74.0	-18.4	Vertical
7320.000	10.0	35.7	33.8	46.5	58.4	74.0	-15.6	Vertical
9760.000	12.3	37.3	32.1	43.3	60.8	74.0	-13.2	Vertical
11036.649	13.0	37.6	31.2	44.8	64.2	74.0	-9.8	Vertical
3601.577	6.8	32.4	35.5	46.3	50.0	74.0	-24.0	Horizontal
4880.000	7.6	34.5	35.2	46.1	53.0	74.0	-21.0	Horizontal
6505.529	8.9	35.2	33.7	46.1	56.5	74.0	-17.5	Horizontal
7320.000	10.0	35.7	33.8	46	57.9	74.0	-16.1	Horizontal
9760.000	12.3	37.3	32.1	43.5	61.0	74.0	-13.0	Horizontal
11135.968	13.3	37.5	31.2	44.9	64.5	74.0	-9.5	Horizontal

Test mode:		GFSK	Tes	st channel:	Middle	F	Rema	ark:	Average
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBμV/r		Over Limit (dB)	Polarization
3693.064	6.8	32.7	35.6	33.6	37.5	54.0		-16.5	Vertical
4880.000	7.6	34.5	35.2	33.5	40.4	54.0		-13.6	Vertical
6265.293	8.6	34.8	33.7	32.8	42.5	54.0		-11.5	Vertical
7320.000	10.0	35.7	33.8	31.8	43.7	54.0		-10.3	Vertical
9760.000	12.3	37.3	32.1	30.8	48.3	54.0		-5.7	Vertical
11036.649	13.0	37.6	31.2	30.7	50.1	54.0		-3.9	Vertical
3601.577	6.8	32.4	35.5	33.4	37.1	54.0		-16.9	Horizontal
4880.000	7.6	34.5	35.2	32.5	39.4	54.0		-14.6	Horizontal
6505.529	8.9	35.2	33.7	32.9	43.3	54.0		-10.7	Horizontal
7320.000	10.0	35.7	33.8	32	43.9	54.0		-10.1	Horizontal
9760.000	12.3	37.3	32.1	30.9	48.4	54.0		-5.6	Horizontal
11135.968	13.3	37.5	31.2	30.6	50.2	54.0		-3.8	Horizontal



Report No.: SZEM141200691901

Page: 40 of 46

Test mode:		GFSK	Tes	t channel:	Highest	Rer	nark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3732.980	6.8	32.8	35.6	46.4	50.4	74.0	-23.6	Vertical
4960.000	7.6	34.6	35.3	46.1	53.0	74.0	-21.0	Vertical
6254.078	8.6	34.8	33.7	45.4	55.1	74.0	-18.9	Vertical
7440.000	10.1	35.8	33.9	45.7	57.7	74.0	-16.3	Vertical
9920.000	12.3	37.3	32.1	43.5	61.0	74.0	-13.0	Vertical
11175.945	13.4	37.5	31.1	44.7	64.5	74.0	-9.5	Vertical
3633.988	6.8	32.5	35.5	47.2	51.0	74.0	-23.0	Horizontal
4960.000	7.6	34.6	35.3	46	52.9	74.0	-21.1	Horizontal
6552.322	9.0	35.3	33.7	46.2	56.8	74.0	-17.2	Horizontal
7440.000	10.1	35.8	33.9	45.1	57.1	74.0	-16.9	Horizontal
9920.000	12.3	37.3	32.1	43.6	61.1	74.0	-12.9	Horizontal
11500.976	13.5	37.7	31.6	45.3	64.9	74.0	-9.1	Horizontal
Worse case	mode:	GFSK	Tes	t channel:	Highest	Remark:		Average
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBµV/m)	Over Limit (dB)	Polarization
3732.980	6.8	32.8	35.6	33.2	37.2	54.0	-16.8	Vertical
4960.000	7.6	34.6	35.3	32.9	39.8	54.0	-14.2	Vertical
6254.078	8.6	34.8	33.7	32.6	42.3	54.0	-11.7	Vertical
7440.000	10.1	35.8	33.9	32.7	44.7	54.0	-9.3	Vertical
	_	33.6	33.3	32.7	44.7	54.0	5.0	Vortical
9920.000	12.3	37.3	32.1	31.4	44.7	54.0	-5.1	Vertical
9920.000 11175.945				-				
	12.3	37.3	32.1	31.4	48.9	54.0	-5.1	Vertical
11175.945	12.3 13.4	37.3 37.5	32.1 31.1	31.4 30.4	48.9 50.2	54.0 54.0	-5.1 -3.8	Vertical Vertical
11175.945 3633.988	12.3 13.4 6.8	37.3 37.5 32.5	32.1 31.1 35.5	31.4 30.4 33	48.9 50.2 36.8	54.0 54.0 54.0	-5.1 -3.8 -17.2	Vertical Vertical Horizontal
11175.945 3633.988 4960.000	12.3 13.4 6.8 7.6	37.3 37.5 32.5 34.6	32.1 31.1 35.5 35.3	31.4 30.4 33 32.8	48.9 50.2 36.8 39.7	54.0 54.0 54.0 54.0	-5.1 -3.8 -17.2 -14.3	Vertical Vertical Horizontal Horizontal
11175.945 3633.988 4960.000 6552.322	12.3 13.4 6.8 7.6 9.0	37.3 37.5 32.5 34.6 35.3	32.1 31.1 35.5 35.3 33.7	31.4 30.4 33 32.8 32.5	48.9 50.2 36.8 39.7 43.1	54.0 54.0 54.0 54.0 54.0	-5.1 -3.8 -17.2 -14.3 -10.9	Vertical Vertical Horizontal Horizontal Horizontal

Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
 - Final Test Level =Receiver Reading + Antenna Factor + Cable Factor Preamplifier Factor
- 2) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.




Report No.: SZEM141200691901

Page: 41 of 46

6.8 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section 15	47 CFR Part 15C Section 15.209 and 15.205							
Test Method:	ANSI C63.10 2009								
Test Site:	Measurement Distance: 3m	Measurement Distance: 3m (Semi-Anechoic Chamber)							
Limit:	Frequency	Limit (dBuV/m @3m)	Remark						
	30MHz-88MHz	40.0	Quasi-peak Value						
	88MHz-216MHz	43.5	Quasi-peak Value						
	216MHz-960MHz	46.0	Quasi-peak Value						
	960MHz-1GHz	54.0	Quasi-peak Value						
	Above 1GHz	54.0	Average Value						
	Above IGHZ	74.0	Peak Value						
Test Setup:									






Figure 1. 30MHz to 1GHz

Figure 2. Above 1 GHz

- .	D	
Lest	Procedure:	

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel



Report No.: SZEM141200691901

Page: 42 of 46

	g. Test the EUT in the lowest channel, the Highest channel Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Transmitting with GFSK modulation
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass






Report No.: SZEM141200691901

Page: 43 of 46

Test plot as follows:

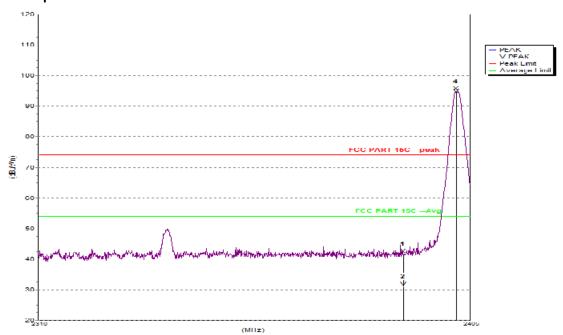


Mk.	Freq.(MHz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Ant.F.(dB/m)	Amp.G.(dB)	Cbl.L.(dB)	Pol.
Peak:								
1	2390	41.5	74.0	32.5	28.7	34.8	4.6	٧
2 F	2402	94.7	74.0	-20.7	28.8	34.9	4.6	٧
Avg								
1	2390	31.0	54.0	23.0	28.7	34.8	4.6	٧
2 F	2402	94.1	54.0	-40.1	28.8	34.9	4.6	V



Report No.: SZEM141200691901

Page: 44 of 46

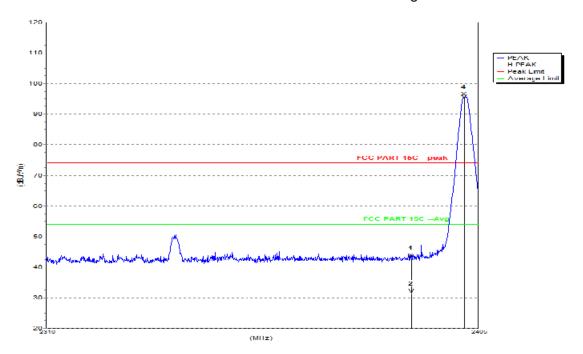


Mk.	Freq.(MHz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Ant.F.(dB/m)	Amp.G.(dB)	Cbl.L.(dB)	Pol.
Peak:								
1	2390	42.8	74.0	31.2	28.7	34.8	4.6	Н
2 F	2402	95.6	74.0	-21.6	28.8	34.9	4.6	Н
Avg								
1	2390	31.2	54.0	22.8	28.7	34.8	4.6	Н
2 F	2402	94.9	54.0	-40.9	28.8	34.9	4.6	Н



Report No.: SZEM141200691901

Page: 45 of 46

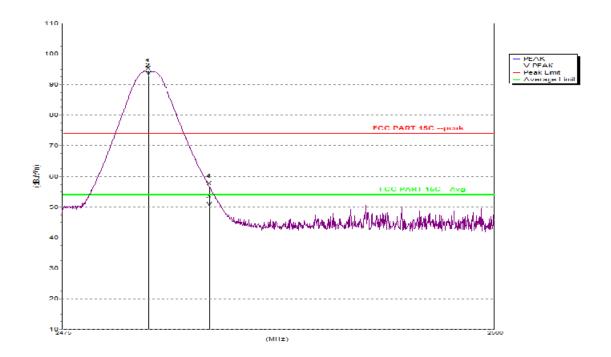


Mk.	Freq.(MHz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Ant.F.(dB/m)	Amp.G.(dB)	Cbl.L.(dB)	Pol.
Peak:								
1 F	2480	94.3	74.0	-20.3	29.3	35.0	4.5	٧
2	2483.5	56.7	74.0	17.3	29.3	35.0	4.5	V
Avg								
1 F	2480	92.9	54.0	-38.9	29.3	35.0	4.5	٧
2	2483.5	50.1	54.0	3.9	29.3	35.0	4.5	V



Report No.: SZEM141200691901

Page: 46 of 46

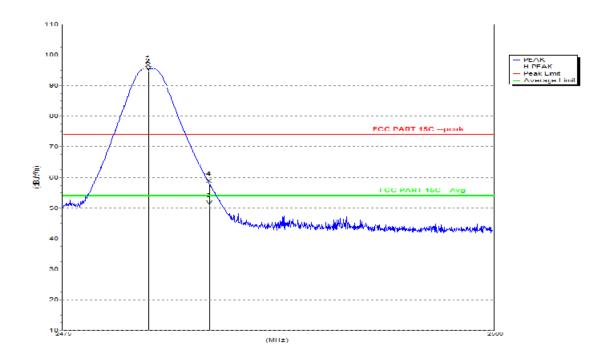

Mk.	Freq.(MHz)	Level(dBuV/m)	Limit(dBuV/m)	Margin(dB)	Ant.F.(dB/m)	Amp.G.(dB)	Cbl.L.(dB)	Pol.
Peak:								
1 F	2480	95.6	74.0	-21.6	29.3	35.0	4.5	Н
2	2483.5	57.9	74.0	16.1	29.3	35.0	4.5	Н
Avg								
1 F	2480	94.7	54.0	-40.7	29.3	35.0	4.5	Н
2	2483.5	50.8	54.0	3.2	29.3	35.0	4.5	Н

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor