





<b>EMC TEST REPORT</b> <b>FCC 47 CFR Part 15B</b> <b>Industry Canada RSS-Gen</b> <b>Electromagnetic compatibility - Unintentional radiators</b>	
<b>Report Reference No.</b> .....	G0M-1406-3892-EF0115B-V01
<b>Testing Laboratory</b> .....	Eurofins Product Service GmbH
Address .....	Storkower Str. 38c 15526 Reichenwalde Germany
Accreditation .....	<div style="text-align: center;">   </div> <p>A2LA Accredited Testing Laboratory, Certificate No.: 1983.01            FCC Filed Test Laboratory, Reg.-No.: 96970            IC OATS Filing assigned code: 3470A</p>
<b>Applicant's name</b> .....	Kamstrup A/S
Address .....	Industrivej 28 8660 Skanderborg DENMARK
<b>Test specification:</b>	
Standard.....	47 CFR Part 15 Subpart B RSS-Gen, Issue 3, 2010-12 ANSI C63.4:2009
<b>Equipment under test (EUT):</b>	
Product description	USB meter reader
Model No.	USB meter reader
Additional Models	None
Hardware version	55351369_B1
Firmware / Software version	5098711_B1 (production sw) / 5098775 F1 (customer sw) / 5514758 D1 (eeprom)
Contains	FCC-ID: OUY-USBEXT                      IC: N/A
<b>Test result</b>	<b>Passed</b>

<b>Possible test case verdicts:</b>	
- not applicable to test object .....	N/A
- test object does meet the requirement.....	P (Pass)
- test object does not meet the requirement.....	F (Fail)
<b>Testing:</b>	
Date of receipt of test item .....	2014-09-25
Date (s) of performance of tests .....	2014-12-22 - 2014-12-23
Compiled by .....	Steffen Zunke
Tested by (+ signature).....	Steffen Zunke 
Approved by (+ signature) .....	Marcus Klein 
Date of issue .....	2014-12-29
Total number of pages.....	28
<b>General remarks:</b>	
<p><b>The test results presented in this report relate only to the object tested.</b></p> <p><b>The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.</b></p> <p>This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.</p>	
<b>Additional comments:</b>	

---

## Version History

Version	Issue Date	Remarks	Revised by
V01	2014-12-29	Initial Release	

---



## REPORT INDEX


<b>1</b>	<b>EQUIPMENT (TEST ITEM) DESCRIPTION</b>	<b>5</b>
1.1	Photos – Equipment external	6
1.2	Photos – Equipment internal	8
1.3	Photos – Test setup	9
1.4	Supporting Equipment Used During Testing	10
1.5	Input / Output Ports	10
1.6	Operating Modes and Configurations	11
1.7	Test Equipment Used During Testing	12
1.8	Sample emission level calculation	13
<b>2</b>	<b>RESULT SUMMARY</b>	<b>14</b>
<b>3</b>	<b>TEST CONDITIONS AND RESULTS</b>	<b>15</b>
3.1	Test Conditions and Results – Radiated emissions	15
3.2	Test Conditions and Results – AC power line conducted emissions	25

## 1 Equipment (Test item) Description

<b>Description</b>	USB meter reader	
<b>Model</b>	USB meter reader	
<b>Additional Models</b>	None	
<b>Serial number</b>	None	
<b>Hardware version</b>	55351369_B1	
<b>Software / Firmware version</b>	5098711_B1 (production sw) / 5098775 F1 (customer sw) / 5514758 D1 (eeprom)	
<b>Contains FCC-ID</b>	OUY-USBEXT	
<b>Contains IC</b>	N/A	
<b>Power supply</b>	5 VDC via USB	
<b>AC/DC-Adaptor</b>	None	
<b>Radio module</b>	Type	SRD Modul
	FCC-ID	OUY-USBEXT
	IC	N/A
<b>Manufacturer</b>	Kamstrup A/S Industrivej 28 8660 Skanderborg DENMARK	
<b>Highest emission frequency</b>	Fmax [MHz] = 5496	
<b>Device classification</b>	Class B	
<b>Equipment type</b>	Tabletop	
<b>Number of tested samples</b>	1	



1.1 Photos – Equipment external

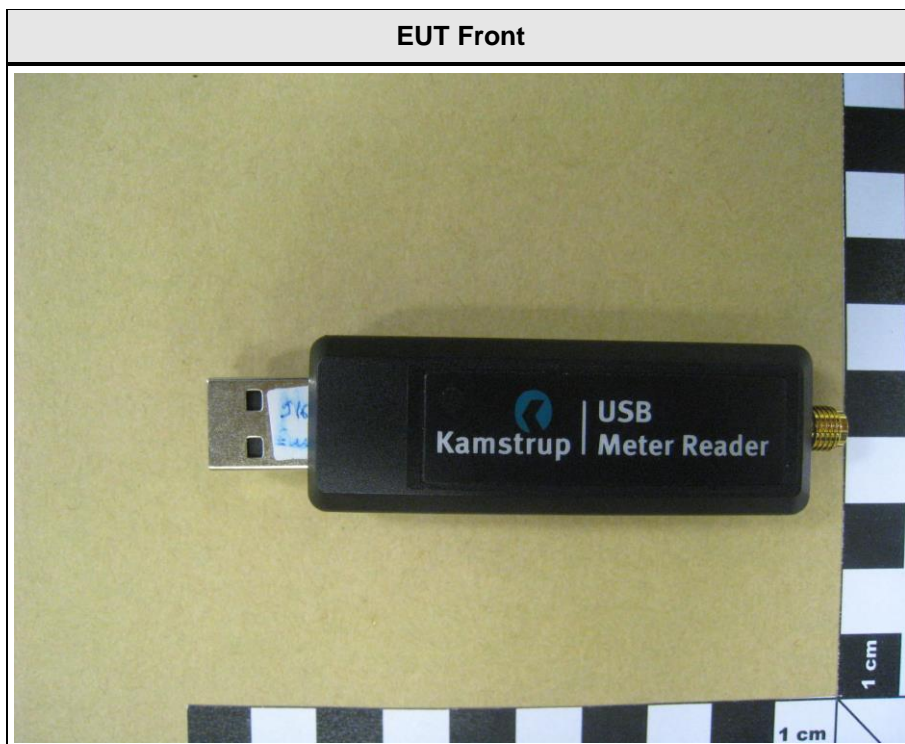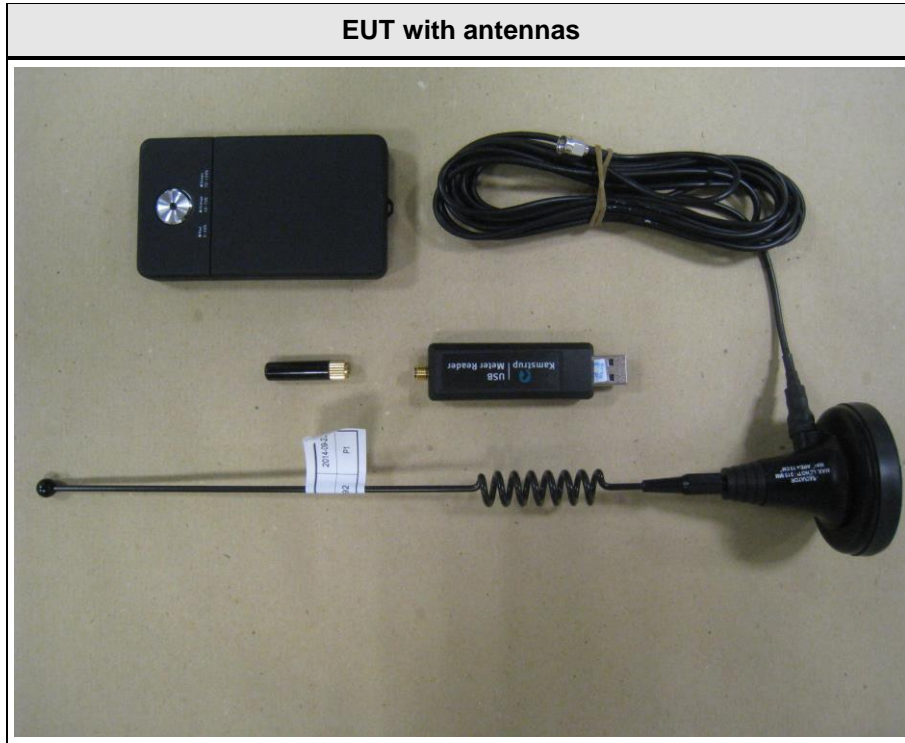

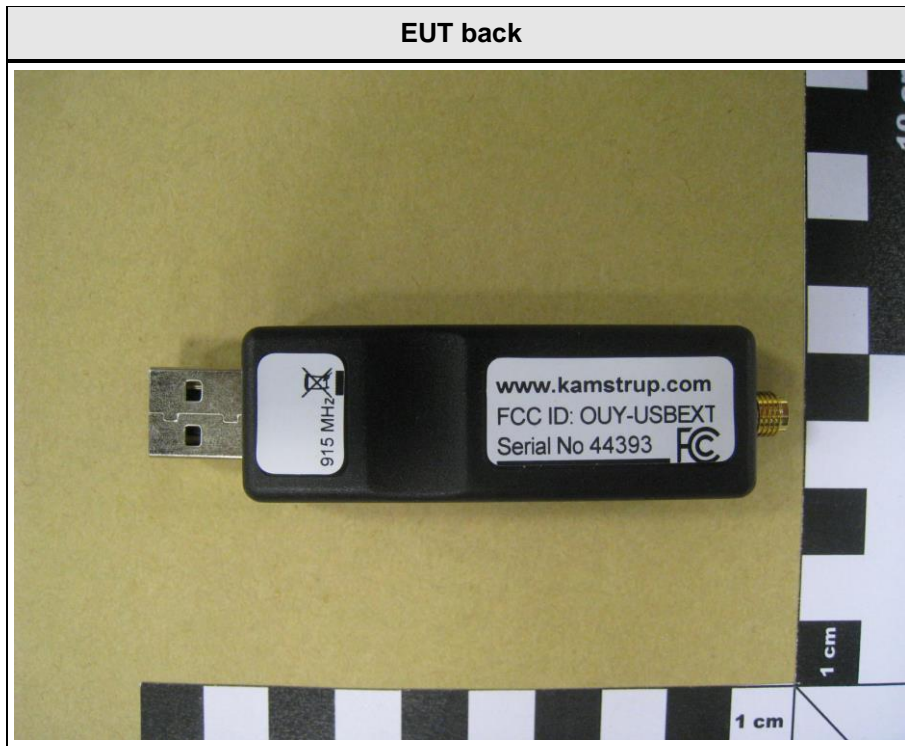





1.2 Photos – Equipment internal

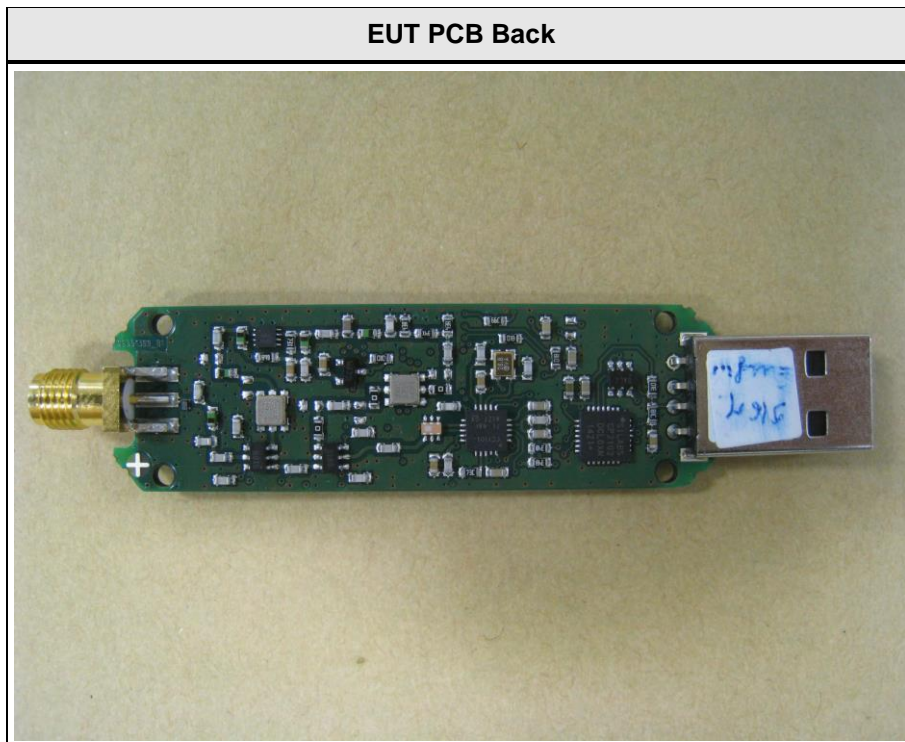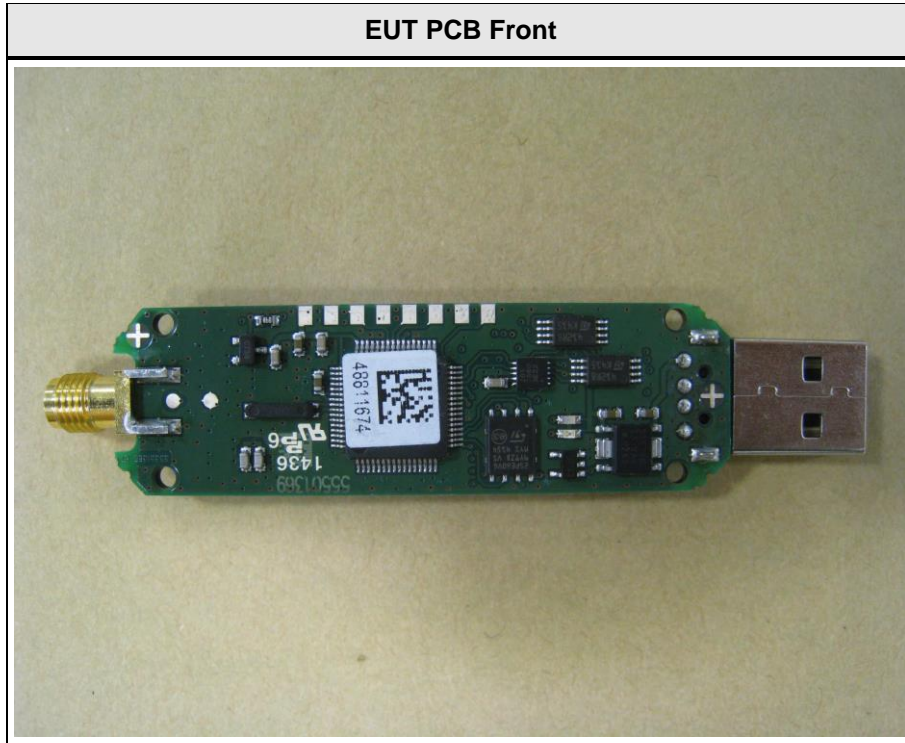



1.3 Photos – Test setup

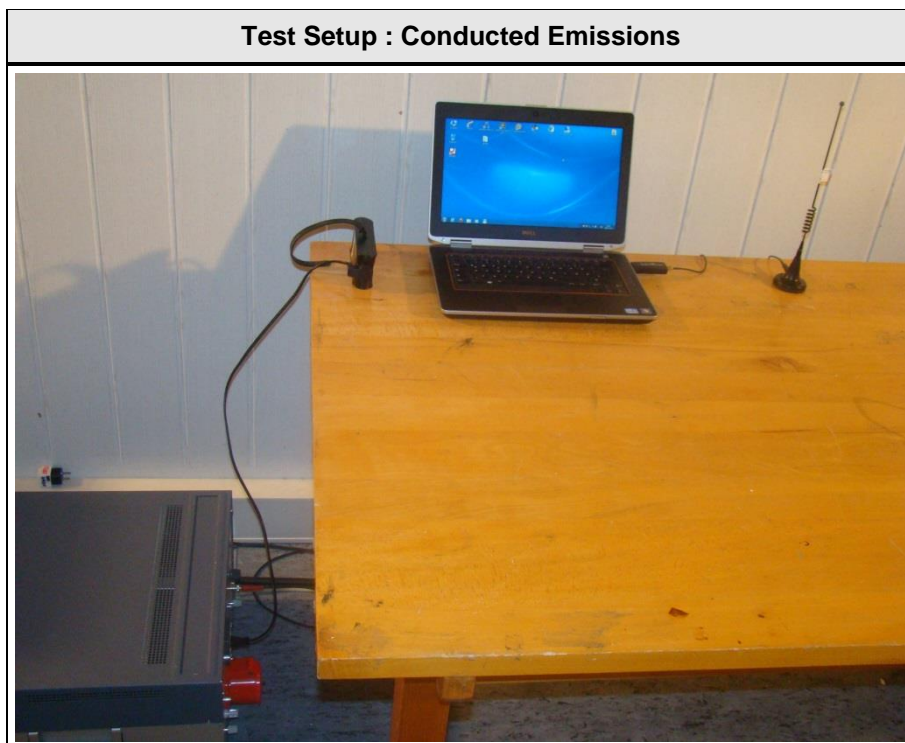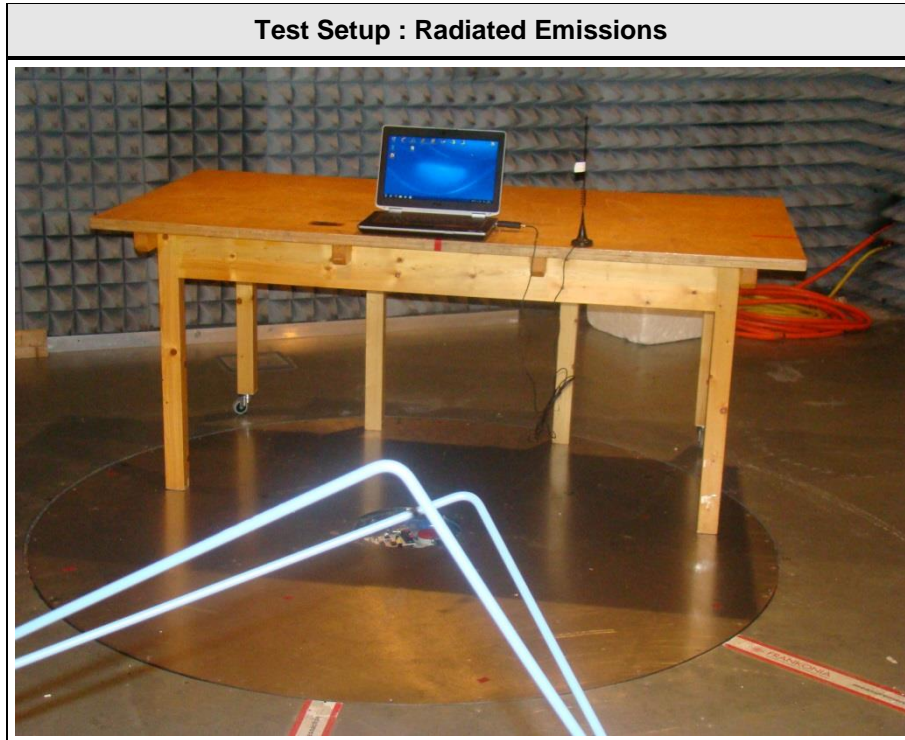

#### 1.4 Supporting Equipment Used During Testing

Product Type*	Device	Manufacturer	Model No.	Comments
AE	Laptop	DELL	Latitude E6420	-
AE	Antenna	smarteq	RA3156.03.00.00 + midmag base	-
AE	Antenna	procell	SBC-01	-

**\*Note:** Use the following abbreviations:

AE : Auxiliary/Associated Equipment, or

SIM : Simulator (Not Subjected to Test)

CABL : Connecting cables

#### 1.5 Input / Output Ports

Port #	Name	Type*	Max. Cable Length	Cable Shielded	Comments
1	RF port	I/O	3.5m	Yes	-
2	USB	DC / I/O	1m	No	-

**\*Note:** Use the following abbreviations:

AC : AC power port

DC : DC power port

N/E : Non electrical

I/O : Signal input or output port

TP : Telecommunication port

## 1.6 Operating Modes and Configurations

Mode #	Description
1	EUT connected to a Laptop via USB and constant transmit mode

Configuration #	EUT Configuration
1	Fully configuration with smarteq antenna and TX testmode
2	Fully configuration with procell antenna and TX testmode

**1.7 Test Equipment Used During Testing**

<b>Measurement Software</b>			
Description	Manufacturer	Name	Version
EMC Test Software	Dare Instruments	Radimation	2014.1.15

<b>Radiated emissions</b>					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Biconical Antenna	R&S	HK 116	EF00012	2013-02	2016-02
LPD-Antenne	R&S	HL 223	EF00187	2014-03	2017-03
Horn antenna	Schwarzbeck	BBHA 9120D	EF00018	2013-09	2016-09
EMI Test Receiver	R&S	ESU8	EF00379	2014-03	2015-03
EMI Test Receiver	R&S	ESCS30	EF00295	2014-10	2015-10

<b>Conducted emissions</b>					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
AMN	R&S	ESH2-Z5	EF00182	2014-11	2016-11
EMI Test Receiver	R&S	ESCS 30	EF00295	2014-10	2015-10

## 1.8 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dB $\mu$ V. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyzer (dB}\mu\text{V)} + \text{A.F. (dB)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dB $\mu$ V/m). The FCC limits are given in units of  $\mu$ V/m. The following formula is used to convert the units of  $\mu$ V/m to dB $\mu$ V/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 * \log (\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

$$\begin{array}{rclcl} \text{Reading} & + & \text{AF} & = & \text{Net Reading} & : & \text{Net reading - FCC limit} & = & \text{Margin} \\ 21.5 \text{ dB}\mu\text{V} & + & 26 \text{ dB} & = & 47.5 \text{ dB}\mu\text{V/m} & : & 47.5 \text{ dB}\mu\text{V/m} - 57.0 \text{ dB}\mu\text{V/m} & = & -9.5 \text{ dB} \end{array}$$

## 2 Result Summary

FCC 47 CFR Part 15B, Industry Canada RSS-Gen				
Product Specific Standard	Requirement – Test	Reference Method	Result	Remarks
47 CFR 15.109 RSS-Gen 4.9 & 4.10	Radiated emissions	ANSI C 63.4	PASS	-
47 CFR 15.107 RSS-Gen 7.2.4	AC power line conducted emissions	ANSI C63.4	PASS	-
<b>Remarks:</b>				



### 3 Test Conditions and Results

#### 3.1 Test Conditions and Results – Radiated emissions

Radiated emissions acc. FCC 47 CFR 15.109 / IC RSS-Gen		Verdict: PASS				
Laboratory Parameters:	Required prior to the test	During the test				
Ambient Temperature	15 to 35 °C	23°C				
Relative Humidity	30 to 60 %	33%				
Test according referenced standards	Reference Method					
	ANSI C63.4					
Sample is tested with respect to the requirements of the equipment class	Equipment class					
	Class B					
Test frequency range determined from highest emission frequency	Highest emission frequency					
	Fmax [MHz] = 5496					
Fully configured sample scanned over the following frequency range	Frequency range					
	30 MHz to 18 GHz					
Operating mode configuration	1					
Limits and results Class B						
Frequency [MHz]	Quasi-Peak [dB $\mu$ V/m]	Result	Average [dB $\mu$ V/m]	Result	Peak [dB $\mu$ V/m]	Result
30 – 88	40	PASS	-		-	-
88 – 216	43.5	PASS	-		-	-
216 – 960	46	PASS	-		-	-
960 – 1000	54	PASS	-		-	-
> 1000	-	-	54	PASS	74	PASS
Comments: Measurements were performed up to 18 GHz, above 18 GHz no relevant emission were determined. The setup with the smarteq antenna was as worst case detected.						

**Test Procedure:**

The test site is in accordance with ANSI C63-4:2009 requirements and is listed by FCC.

The measurement procedure is as follows:


- 1) The EUT was placed on a 0.8 m non conductive table at a 3 m distance from the receive antenna (ANSI C63.4: 2009 item 6.2)
- 2) The antenna output was connected to the measurement receiver
- 3) A biconical antenna was used for the frequency range 30 – 200 MHz, a logarithmic periodical antenna was used for the frequency range from 200 – 1000 MHz. Above one 1 GHz a Double Ridged Broadband Horn antenna was used. The antenna was placed on an adjustable height antenna mast
- 4) Emissions were maximized at each frequency by rotating the EUT and adjusting the receive antenna height and polarization. The maximum values were recorded.

**Spurious emissions under normal conditions according to FCC 15B**

Project number: G0M-1406-3892

Manufacturer:	Kamstrup A/S
EUT Name:	USB meter reader
Model:	USB meter reader
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Zunke
Test Conditions:	Tnom: 23°C, Unom: 5VDC via USB
Antenna:	Rohde & Schwarz HK 116, Vertical
Measurement distance:	3m
Mode:	constant TX
Test Date:	2014-12-23
Note:	

Index 5

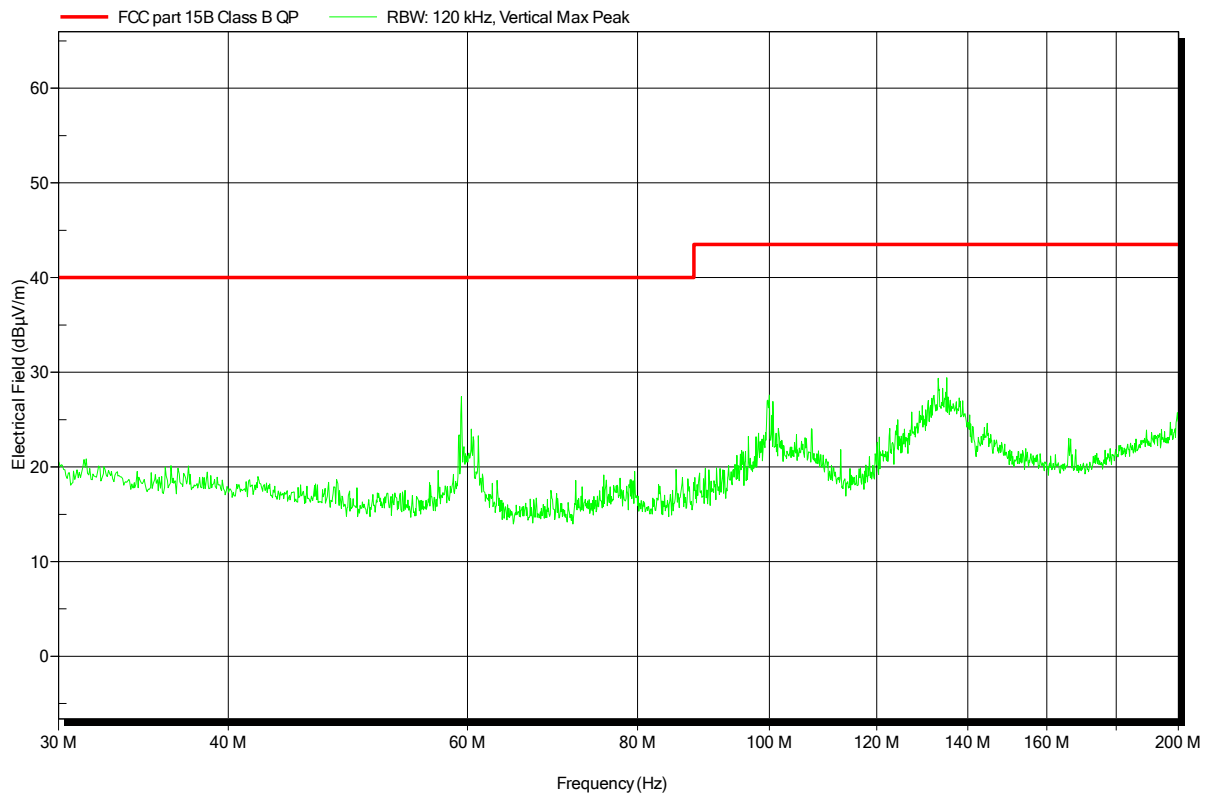


**Spurious emissions under normal conditions according to FCC 15B**

Project number: G0M-1406-3892

Manufacturer:	Kamstrup A/S
EUT Name:	USB meter reader
Model:	USB meter reader
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Zunke
Test Conditions:	Tnom: 23°C, Unom: 5VDC via USB
Antenna:	Rohde & Schwarz HK 116, Horizontal
Measurement distance:	3m
Mode:	constant TX
Test Date:	2014-12-23
Note:	

Index 6

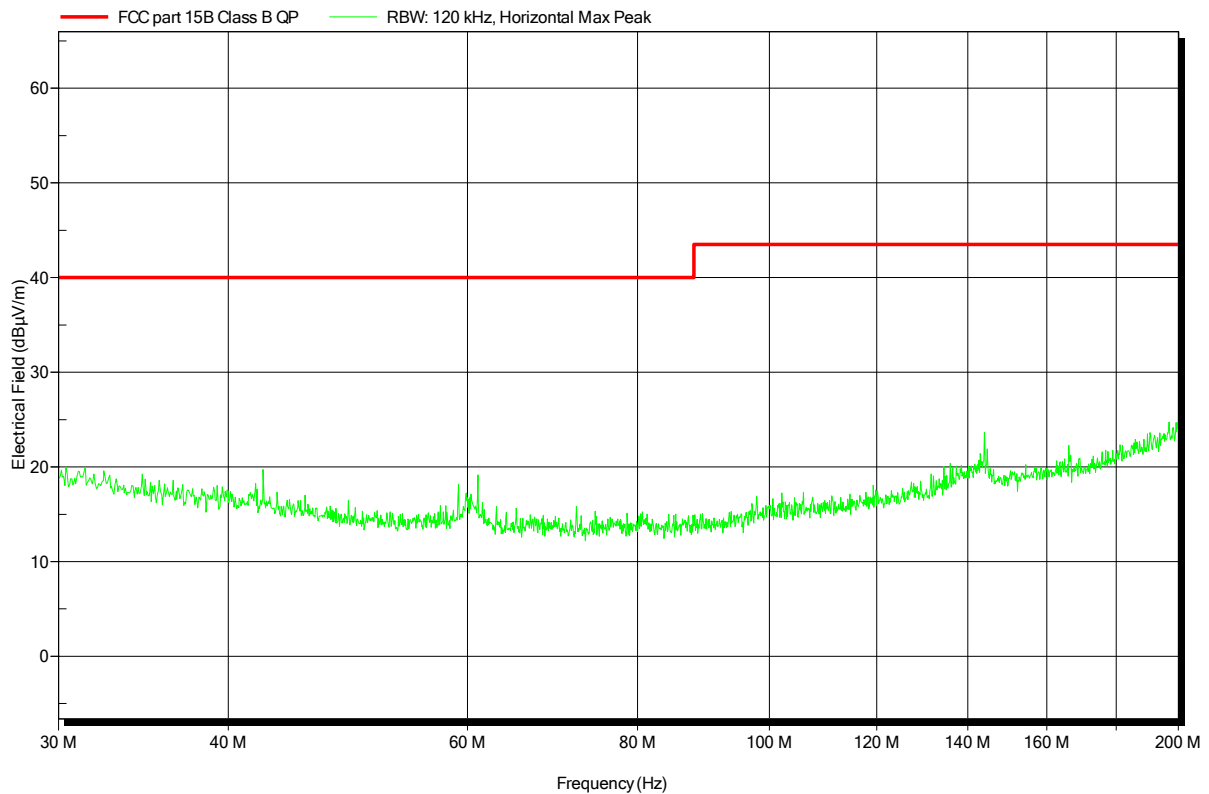


**Spurious emissions under normal conditions according to FCC 15B**

Project number: G0M-1406-3892

Manufacturer:	Kamstrup A/S
EUT Name:	USB meter reader
Model:	USB meter reader
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Zunke
Test Conditions:	Tnom: 23°C, Unom: 5VDC via USB
Antenna:	Rohde & Schwarz HL 223, Vertical
Measurement distance:	3m
Mode:	constant TX
Test Date:	2014-12-23
Note:	

Index 4

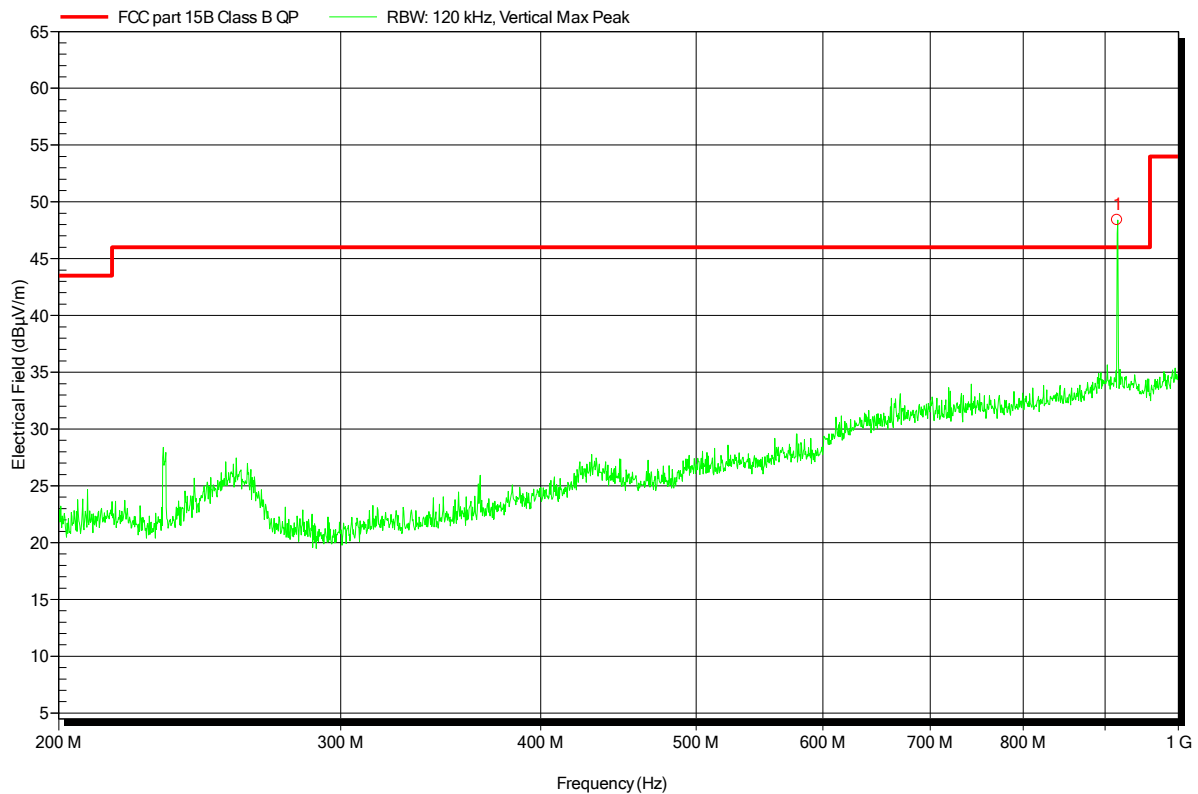


Frequency  
915,8 MHz SRD carrier

**Spurious emissions under normal conditions according to FCC 15B**

Project number: G0M-1406-3892

Manufacturer:	Kamstrup A/S
EUT Name:	USB meter reader
Model:	USB meter reader
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Zunke
Test Conditions:	Tnom: 23°C, Unom: 5VDC via USB
Antenna:	Rohde & Schwarz HL 223, Horizontal
Measurement distance:	3m
Mode:	constant TX
Test Date:	2014-12-23
Note:	

Index 3

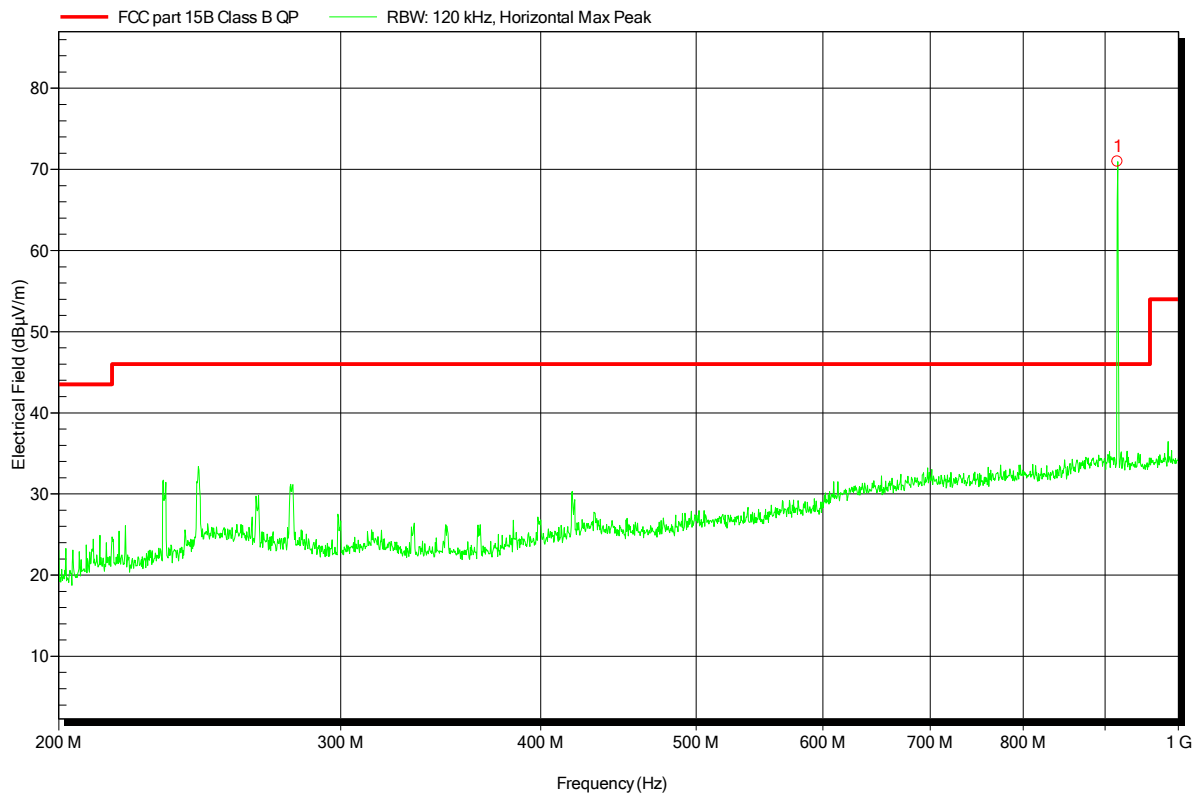

Frequency  
916,2 MHz SRD carrier




**Spurious emissions under normal conditions according to FCC 15B**

Project number: G0M-1406-3892

Manufacturer:	Kamstrup A/S
EUT Name:	USB meter reader
Model:	USB meter reader
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Zunke
Test Conditions:	Tnom: 23°C, Unom: 5VDC via USB
Antenna:	Schwarzbeck BBHA 9120D, Vertical
Measurement distance:	3m
Mode:	constant TX
Test Date:	2014-12-23
Note:	

Index 7

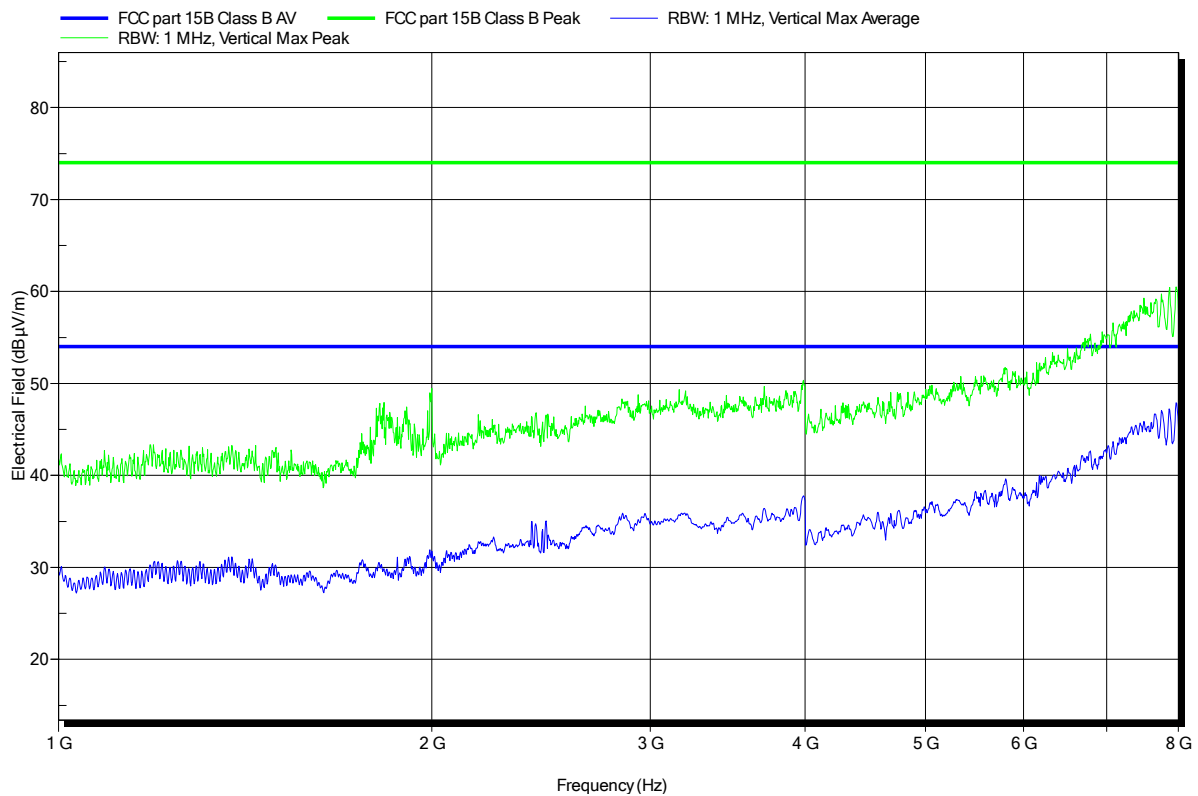


**Spurious emissions under normal conditions according to FCC 15B**

Project number: G0M-1406-3892

Manufacturer:	Kamstrup A/S
EUT Name:	USB meter reader
Model:	USB meter reader
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Zunke
Test Conditions:	Tnom: 23°C, Unom: 5VDC via USB
Antenna:	Schwarzbeck BBHA 9120D, Horizontal
Measurement distance:	3m
Mode:	constant TX
Test Date:	2014-12-23
Note:	

Index 8

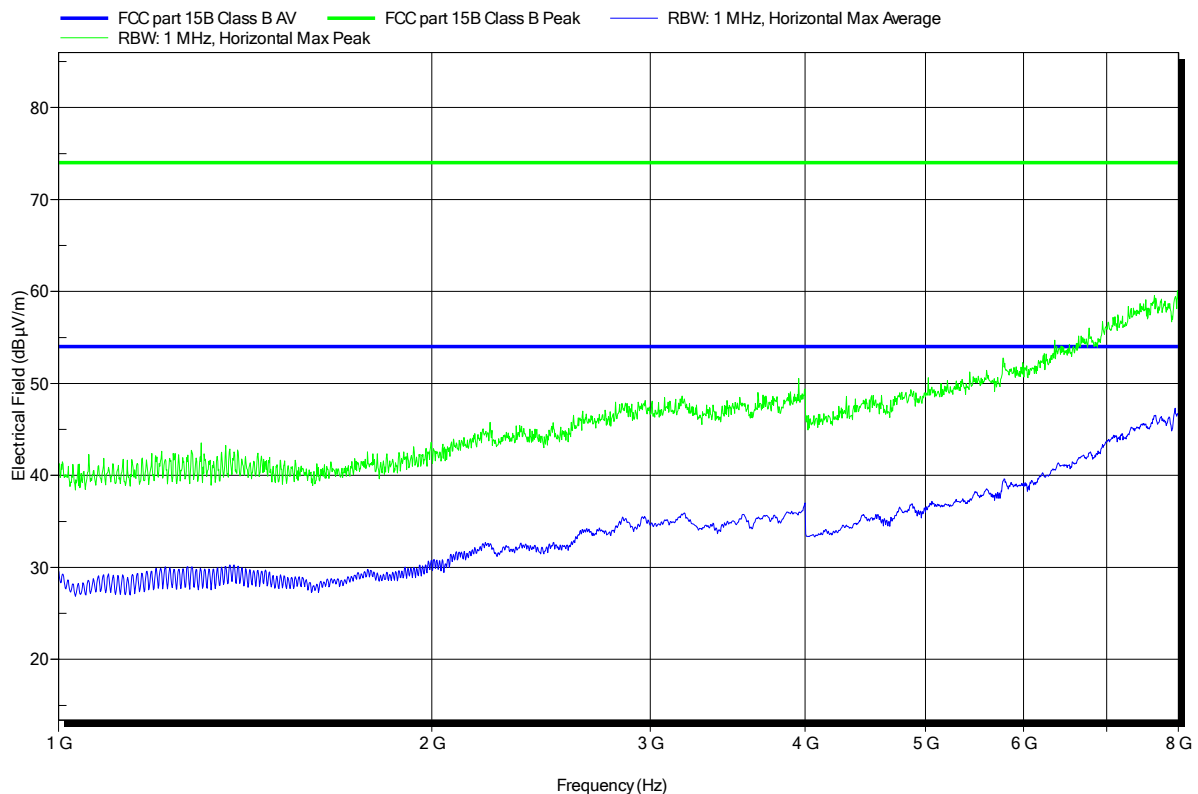


**Spurious emissions under normal conditions according to FCC 15B**

Project number: G0M-1406-3892

Manufacturer:	Kamstrup A/S
EUT Name:	USB meter reader
Model:	USB meter reader
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Zunke
Test Conditions:	Tnom: 23°C, Unom: 5VDC via USB
Antenna:	Schwarzbeck BBHA 9120D, Vertical
Measurement distance:	3m
Mode:	constant TX
Test Date:	2014-12-23
Note:	

Index 10

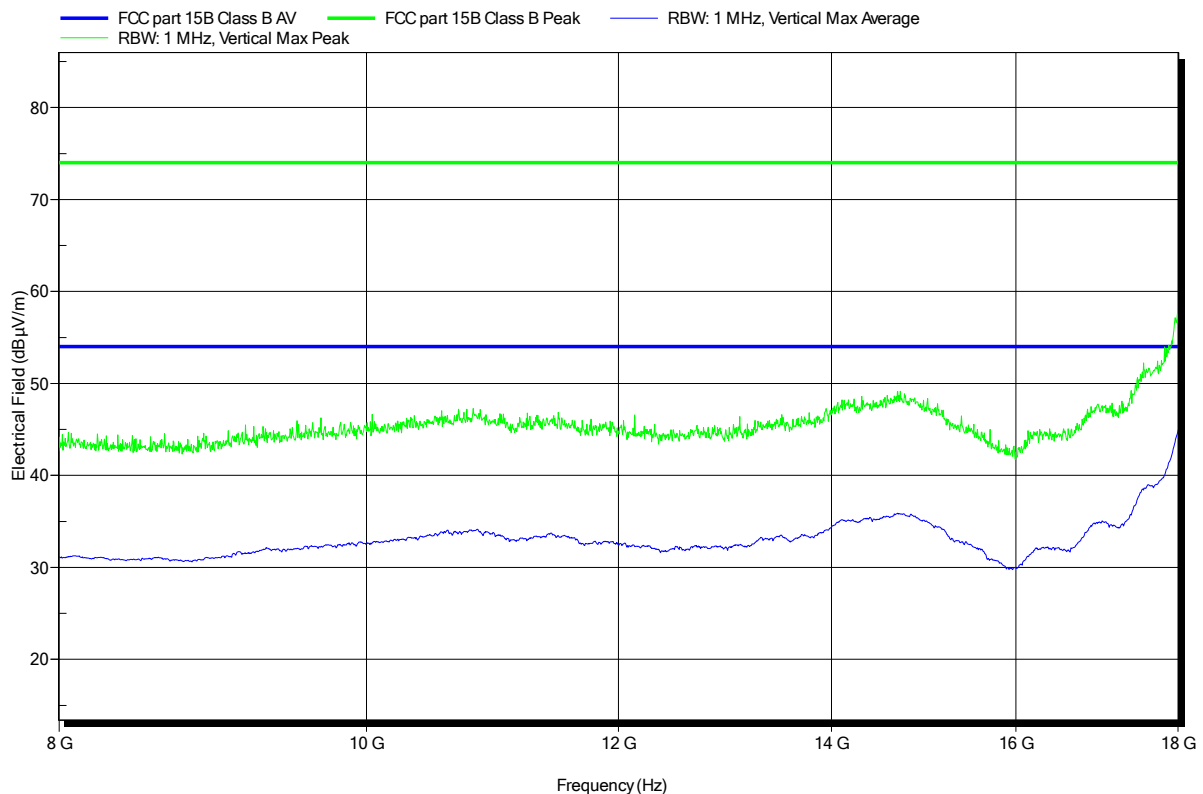


**Spurious emissions under normal conditions according to FCC 15B**

Project number: G0M-1406-3892

Manufacturer:	Kamstrup A/S
EUT Name:	USB meter reader
Model:	USB meter reader
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Zunke
Test Conditions:	Tnom: 23°C, Unom: 5VDC via USB
Antenna:	Schwarzbeck BBHA 9120D, Horizontal
Measurement distance:	3m
Mode:	constant TX
Test Date:	2014-12-23
Note:	

Index 9

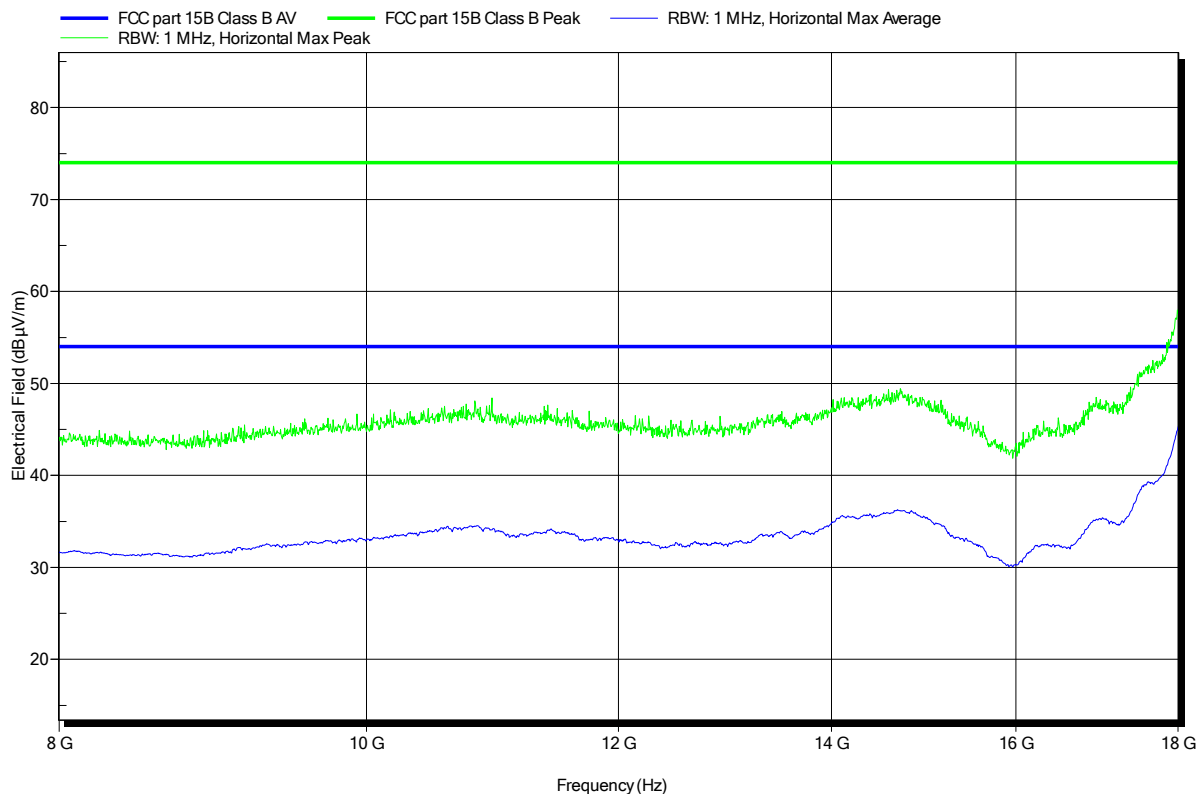

**3.2 Test Conditions and Results – AC power line conducted emissions**

<b>Conducted emissions acc. FCC 47 CFR 15.107 / IC RSS-Gen</b>			<b>Verdict: PASS</b>	
Laboratory Parameters:	Required prior to the test	During the test		
Ambient Temperature	15 to 35 °C	23°C		
Relative Humidity	30 to 60 %	33%		
Test according referenced standards	Reference Method			
	ANSI C63.4			
Fully configured sample scanned over the following frequency range	Frequency range			
	0.15 MHz to 30 MHz			
Sample is tested with respect to the requirements of the equipment class	Equipment class			
	Class B			
Points of Application	Application Interface			
AC Mains	LISN			
Operating mode and configuration	1			
<b>Limits and results Class B</b>				
Frequency [MHz]	Quasi-Peak [dBµV]	Result	Average [dBµV]	Result
0.15 to 5	66 to 56*	PASS	56 to 46*	PASS
0.5 to 5	56	PASS	46	PASS
5 to 30	60	PASS	50	PASS
Comments:				
* Limit decreases linearly with the logarithm of the frequency.				

**Test Procedure:**

- 1) The EUT was placed on a non conductive table 0.8 m above the reference ground plane and 0.4 m away from the vertical conducting plane (ANSI C63.4: 2009 item 7.3.1)
- 2) The power cord that is normally supplied or recommended by the manufacturer was connected to the LISN.
- 3) The distance between the outer edge of the EUT and the LISN shall be set to 0.8 m. A longer power cord shall be bundled to this length (bundling shall not exceed 40 cm in length).
- 4) The LISN measurement port was connected to a measurement receiver
- 5) I/O cables were bundled not longer than 0.4 m
- 6) Measurement was performed in the frequency range 0.15 – 30MHz on each current-carrying conductor




**EMI voltage test in the ac-mains according to FCC 15B**

Project number: G0M-1406-3892

Manufacturer:	Kamstrup A/S
EUT Name:	USB meter reader
Model:	USB meter reader
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Marquardt
Test Conditions:	Tnom: 23°C, Unom: 5VDC via USB
LISN:	ESH2-Z5 N
Mode:	constant TX
Test Date:	2014-12-22
Note:	

Index 1

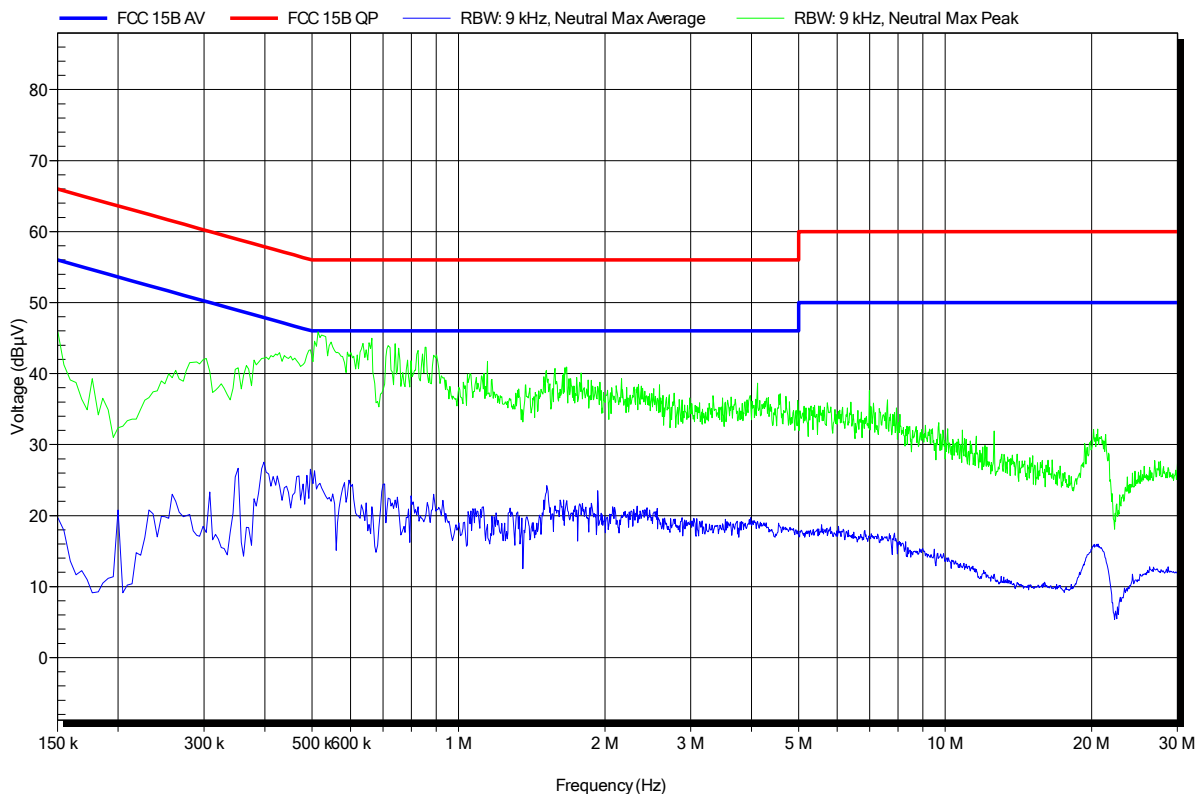

**EMI voltage test in the ac-mains according to FCC 15B**

Project number: G0M-1406-3892

Manufacturer:	Kamstrup A/S
EUT Name:	USB meter reader
Model:	USB meter reader
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Marquardt
Test Conditions:	Tnom: 23°C, Unom: 5VDC via USB
LISN:	ESH2-Z5 L
Mode:	constant TX
Test Date:	2014-12-22
Note:	

Index 2

