

Test Report On
Tri-Band CDMA Cellular Phone

FCC Part 22, 24 & 27 Certification

FCC ID: **OVF-K33BIC03**

Models: **K33BI-03**

Date: **September 26, 2008**

STATEMENT OF CERTIFICATION

The data, data evaluation and equipment configuration represented herein are a true and accurate representation of the measurements of the sample's radio frequency interference emissions characteristics as of the dates and at the times of the test under the conditions herein specified.

STATEMENT OF COMPLIANCE

This product has been shown to be capable of compliance with the applicable technical standards as indicted in the measurement report and was tested in accordance with the measurement procedures specified in §2.947.

Date of Test: September 4, 2008 – September 10, 2008

Test performed by: Kyocera Wireless Corp.
10300 Campus Point Drive
San Diego, CA 92121

Report Prepared by: Neil Primero, Test Technician

Report Reviewed by: Thuy To, Regulatory Engineer

Report Approved by: C.K. Li, Director of Regulatory Engineering

Compliance Certification Services performed the tests that required an OATS site.

Table of Contents

1	GENERAL INFORMATION	3
2	PRODUCT DESCRIPTION	3
3	TEST CONFIGURATION.....	4
4	FCC COMPLIANCE EMERGENCY 911	5
5	TTY COMPLIANCE.....	5
6	TRANSMITTER RF POWER OUTPUT	5
6.1	CONDUCTED POWER	5
6.2	RADIATED POWER.....	6
7	OCCUPIED BANDWIDTH.....	7
8	SPURIOUS EMISSIONS AT ANTENNA TERMINALS	11
9	TRANSMITTER RADIATED SPURIOUS EMISSIONS MEASURED DATA	21
10	RECEIVER SPURIOUS EMISSIONS	21
11	TRANSMITTER RF CARRIER FREQUENCY STABILITY	21
11.1	CDMA 800 MODE.....	22
11.2	CDMA 1700 MODE.....	23
11.3	CDMA 1900 MODE.....	24
12	EXPOSURE OF HUMANS TO RF FIELDS (SAR).....	25
13	TEST EQUIPMENT	25

1 General Information

Applicant:	Kyocera Wireless Corp 10300 Campus Point Drive San Diego CA 92121		
FCC ID:	OVF-K33BIC03		
Product:	Tri-Band CDMA Cellular Phone		
Model Numbers:	K33BI-03		
EUT Serial Number:	FFS10000001724		
Type:	[] Identical Prototype, [X] Pre-Production, [] Production		
Device Category:	Portable		
RF Exposure Environment:	General Population / Uncontrolled		
Antenna:	Internal Antenna		
Detachable Antenna:	No		
External Input:	Audio/Digital Data		
Quantity:	Quantity production is planned		
FCC Rule Parts:	§22H	§27L	§24E
Modes:	800 CDMA	1700 CDMA	1900 CDMA
Multiple Access Scheme:	CDMA	CDMA	CDMA
TX Frequency (MHz):	824 – 849	1710 - 1755	1850 - 1910
Emission Designators:	1M25F9W	1M25F9W	1M25F9W
Max. Output Power (dBm):	22.8 ERP	24.0 EIRP	24.8 EIRP

2 Product Description

The EUT (OVF-K33BIC03) is a Tri-Band 1XRTT CDMA Cellular phone. The phone has assisted GPS software feature enabled to meet the emergency location requirements of the FCC's E911 Phase II mandate. The tri-band architecture is defined as 800MHz (cellular CDMA), 1700MHz (AWS CDMA) and 1900MHz (PCS CDMA).

The phone is designed in compliance with the technical specifications for compatibility of mobile and base stations in the Cellular Radio telephone service contained in "Cellular System Mobile Station -Land Station Compatibility Specification" as specified in OET Bulletin 53 and TIA Standards.

As described in Exhibit 1 (operation description), The EUT can operate in the CDMA mode specified in IS-2000.2 standard, release 0. It can only invoke a Spreading Rate 1 (SR1) operational mode. SR1 is defined as a 1.2288 Mcps chip rate-based system using a direct-spread single carrier, which limits the bandwidth to the same 1.25 MHz bandwidth occupied by the legacy IS-95/8-A/B system. Thus, for SR1 in IS-2000, the frequency response is identical to the legacy IS-95 B system standard.

3 Test Configuration

For Part 22, 24, and 27 all of CDMA measurements were conducted with Agilent 8960 as a base station simulator. The base station simulator establishes a CDMA link with the test device. To justify on the selection of applicable configurations, the EUT was pre-tested under all R.C. and S.O. operation modes to determine the worst case scenario:

CONFIGURATION	CONDUCTED POWER (dBm)								
	CDMA 800			CDMA 1700			CDMA 1900		
	Ch 1013	Ch 383	Ch 777	Ch 25	Ch 450	Ch 875	Ch 25	Ch 600	Ch 1175
	Peak	Peak	Peak	Peak	Peak	Peak	Peak	Peak	Peak
SO2, RC1 Full Rate	28.88	29.13	28.47	26.75	27.88	26.66	27.72	28.21	28.05
SO2, RC3 Full Rate	28.36	28.88	27.97	26.36	27.66	26.31	26.90	27.58	27.35
SO55, RC1 Full Rate	28.98	29.15	28.56	26.77	27.90	26.79	27.91	28.36	28.10
SO55, RC3 Full Rate	28.41	28.44	27.92	26.20	27.43	26.40	27.04	27.42	27.54
TDSO SO32, RC3 (FCH+SCH) Full Rate	28.27	28.69	27.86	26.51	27.58	26.67	27.11	27.64	27.67
TDSO SO32, RC3 (-SCH) Full Rate	28.46	28.80	28.14	26.53	27.62	26.73	27.07	27.42	27.17

CONFIGURATION	CONDUCTED POWER (dBm)								
	CDMA 800			CDMA 1700			CDMA 1900		
	Ch 1013	Ch 383	Ch 777	Ch 25	Ch 450	Ch 875	Ch 25	Ch 600	Ch 1175
	Avg	Avg	Avg	Avg	Avg	Avg	Avg	Avg	Avg
SO2, RC1 Full Rate	23.56	23.86	23.27	22.55	22.63	22.55	22.21	22.36	22.36
SO2, RC3 Full Rate	23.40	23.95	23.29	22.53	22.73	22.54	21.96	22.46	22.28
SO55, RC1 Full Rate	23.60	23.93	23.31	22.58	22.77	22.58	22.24	22.47	22.40
SO55, RC3 Full Rate	23.58	23.92	23.30	22.36	22.71	22.53	22.03	22.44	22.39
TDSO SO32, RC3 (FCH+SCH) Full Rate	23.56	23.83	23.17	22.57	22.67	22.45	22.04	22.45	22.34
TDSO SO32, RC3 (-SCH) Full Rate	23.49	23.90	23.29	22.56	22.69	22.57	22.02	22.43	22.25

The following configuration was determined and reported as worst case for all measurements:
 Radio Configuration: RC1
 Service Options: SO55
 Data Rate: full rate

4 FCC Compliance Emergency 911

FCC § 22.921
When an emergency 911 call is originated by the user, the mobile will attempt to acquire any available system and originate the emergency call on that system, disregarding restrictions set by the roaming list. The FCC NPRM WT99-13, CC94-102 automatic analog A/B roaming option has been implemented for 911 emergency calls. Note that the models that contain the letter “L” have Global Positioning System (GPS) support.

5 TTY compliance

FCC § 255 of the Telecom Act
The EUT has been designed for TTY Compliance with Cellular Compatibility Standard.

6 Transmitter RF Power Output

6.1 Conducted Power

FCC: § 2.1046
Measurement Procedures:
The RF output power was measured using a Giga-tronics 8541C Universal Power Meter. Terminated to a resistive coaxial load of 50 ohms.

Mode	Frequency (MHz)	Channel	Power (dBm)
CDMA 800	824.70	1013	23.60
	836.52	383	23.92
	848.31	777	23.36
CDMA 1700	1711.25	25	22.44
	1732.5	450	22.75
	1753.75	875	22.57
CDMA 1900	1851.25	25	22.13
	1880	600	22.33
	1908.75	1175	22.39

6.2 Radiated Power

FCC: § 22.913, § 24.232

Measurement Procedures:

Tests were performed in Compliance Certification Service using substitution method. See separated radiated emission report for details.

Mode	Frequency (MHz)	Channel	Max. Power (dBm)	Ref.
CDMA 800	824.70	1013	22.6	ERP
	836.52	383	22.1	
	848.31	777	22.8	
CDMA 1700	1711.25	25	23.2	EIRP
	1732.5	450	24.0	
	1753.75	875	23.1	
CDMA 1900	1851.25	25	24.8	EIRP
	1880.00	600	24.4	
	1908.75	1175	24.5	


7 Occupied Bandwidth

FCC: § 2.1049, § 22.917(b)(d), § 24.238, § 27.53(g)(1)		
Measurement Procedures:		
The RF output of the EUT was connected to the input of the spectrum analyzer (S.A.) with sufficient attenuation. The spectrum with no modulation was recorded.		
For Digital: Modulate with full rate all up power control bit.		
S.A. Setting	RBW	VBW
Bandwidth Measurement	30KHz	300kHz
Band Edge Measurement	100KHz	100KHz

List of Figures


Figure	Mode	Description
7-1	CDMA 800	CDMA @ Ch383
7-2		Lower Band Edge @ Ch 1013
7-3		Upper Band Edge @ Ch 777
7-4	CDMA 1700	AWS @ CH450
7-5		Lower Band Edge @ CH25
7-6		Upper Band Edge @ CH875
7-7	CDMA 1900	CDMA @ CH600
7-8		Lower Band Edge @ CH 25
7-9		Upper Band Edge @ CH 1175

CDMA

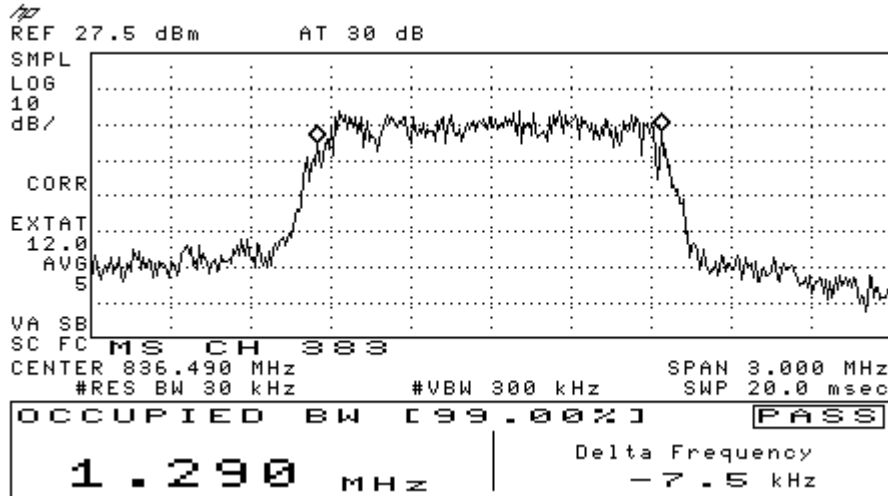


RL

Figure 7-1 CDMA 800 @ CH 383

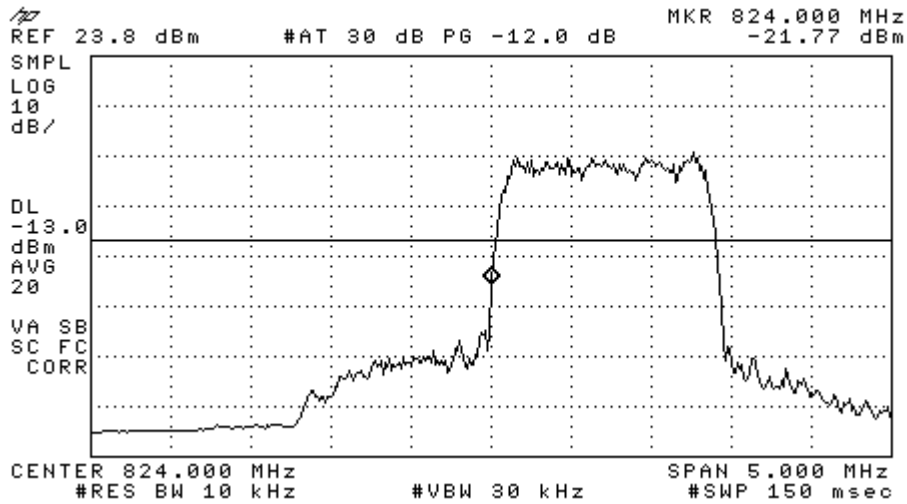

RL

Figure 7-2 CDMA 800 Lower Band Edge @ CH 1013

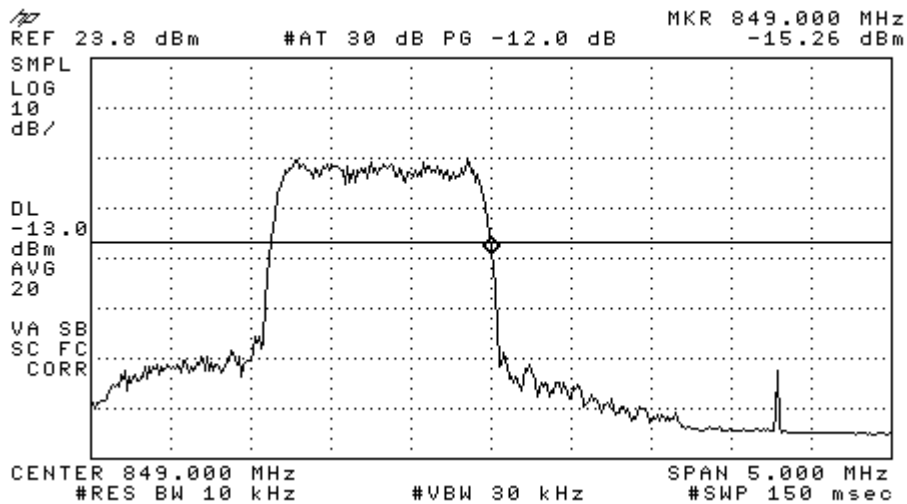

RL

Figure 7-3 CDMA 800 Lower Band Edge @ CH 777

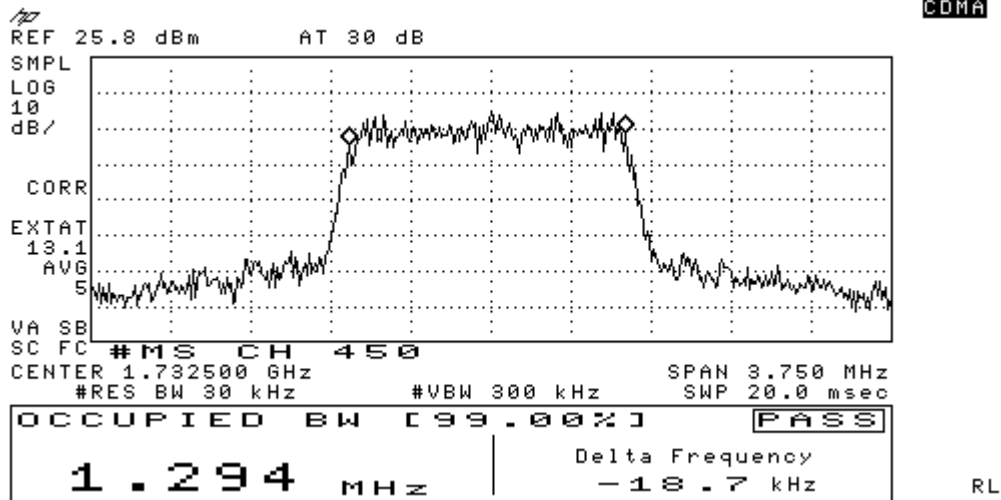


Figure 7-4 AWS 1700 @ CH 450

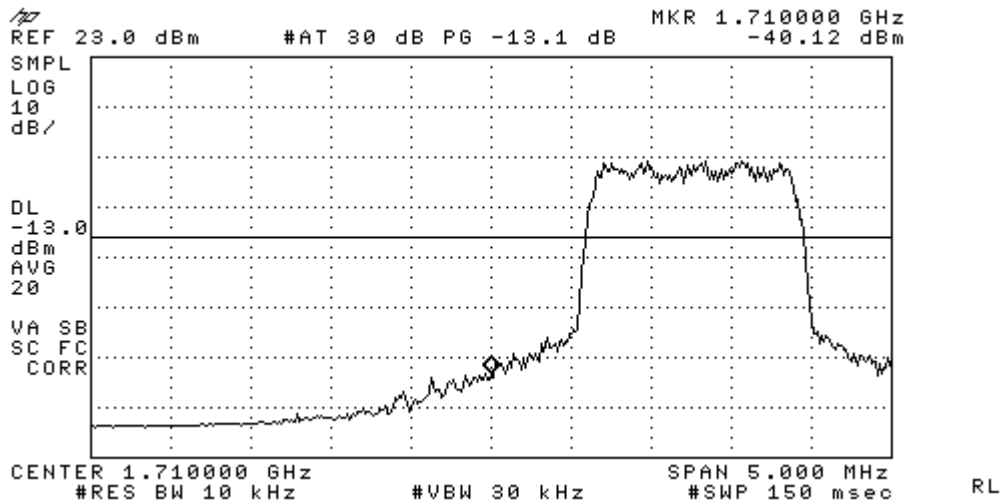


Figure 7-5 AWS 1700 Lower Band Edge @ CH 25

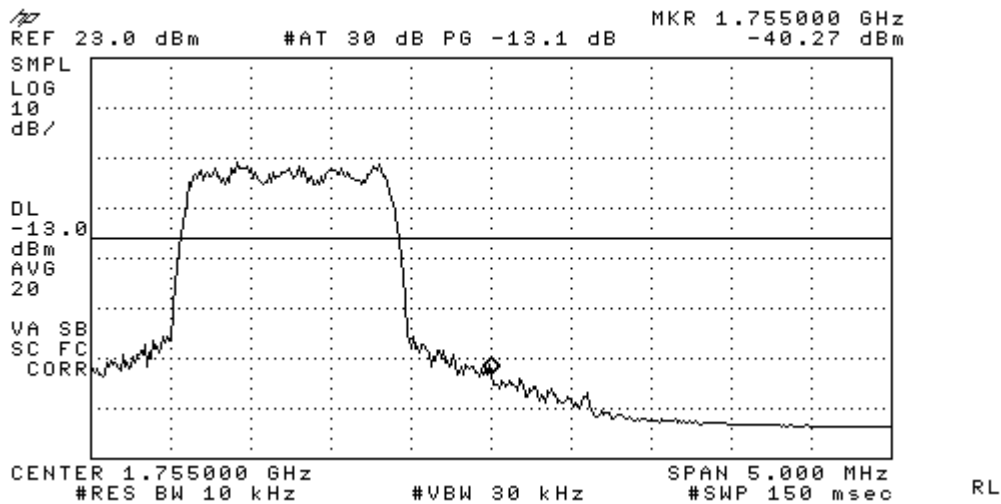


Figure 7-6 AWS 1700 Upper Band Edge @ CH 875

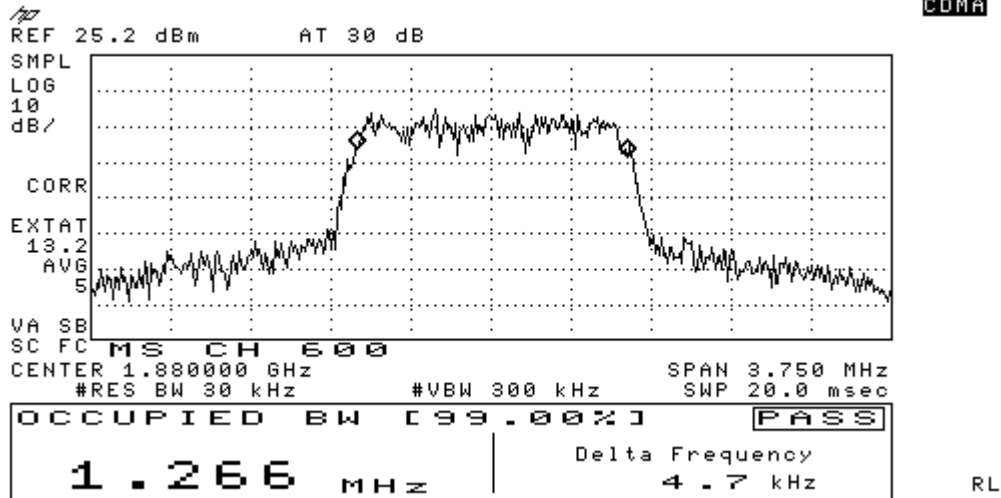


Figure 7-7 CDMA 1900 @ CH 600

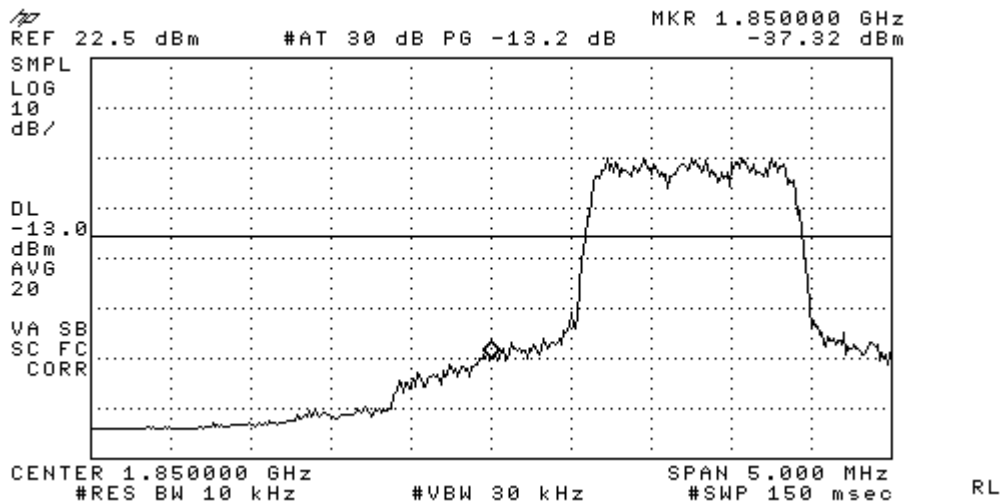


Figure 7-8 CDMA 1900 Lower Band Edge @ CH 25

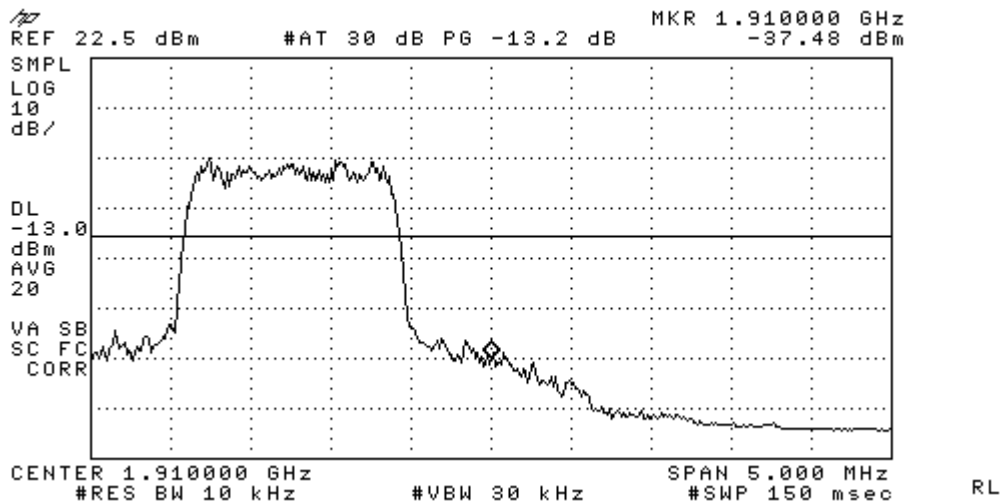


Figure 7-9 CDMA 1900 Upper Band Edge @ CH 1175

8 Spurious Emissions At Antenna Terminals

FCC: § 2.1051, § 22.917(e)(f), § 24.238		
Measurement Procedures:		
<p><u>Out of Band:</u> The RF output of the EUT was connected to the input of the spectrum analyzer with sufficient attenuation. The modulating signal was applied accordingly. The frequency spectrum was investigated from the lowest frequency signal generated up to at least the tenth harmonic of the fundamental.</p>		
S.A. Setting	RBW	VBW
Spurious Emissions Measurement	1MHz	1MHz

List of Figures:

Figure	Mode	Channel	Plot Description
8-1	CDMA 800	1013	Conducted spurious emissions, 9kHz to 10GHz
8-2		383	Conducted spurious emissions, 9kHz to 10GHz
8-3		777	Conducted spurious emissions, 9kHz to 10GHz
8-4	CDMA 1700	25	Conducted spurious emissions, 9kHz to 20GHz
8-5		450	Conducted spurious emissions, 9kHz to 20GHz
8-6		875	Conducted spurious emissions, 9kHz to 20GHz
8-7	CDMA 1900	25	Conducted spurious emissions, 9kHz to 20GHz
8-8		600	Conducted spurious emissions, 9kHz to 20GHz
8-9		1175	Conducted spurious emissions, 9kHz to 20GHz

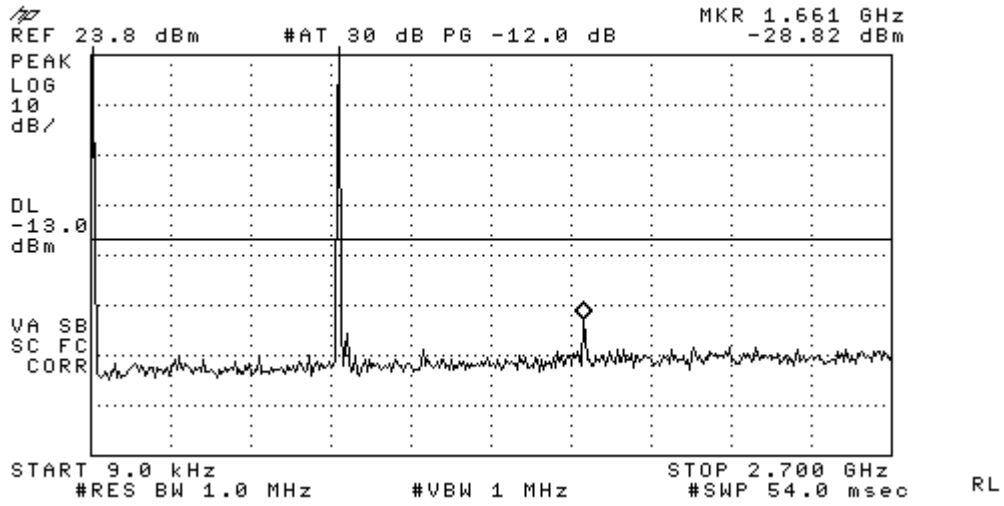


Figure 8-1a CDMA 800 – Conducted Spurious Emission (CH 1013)

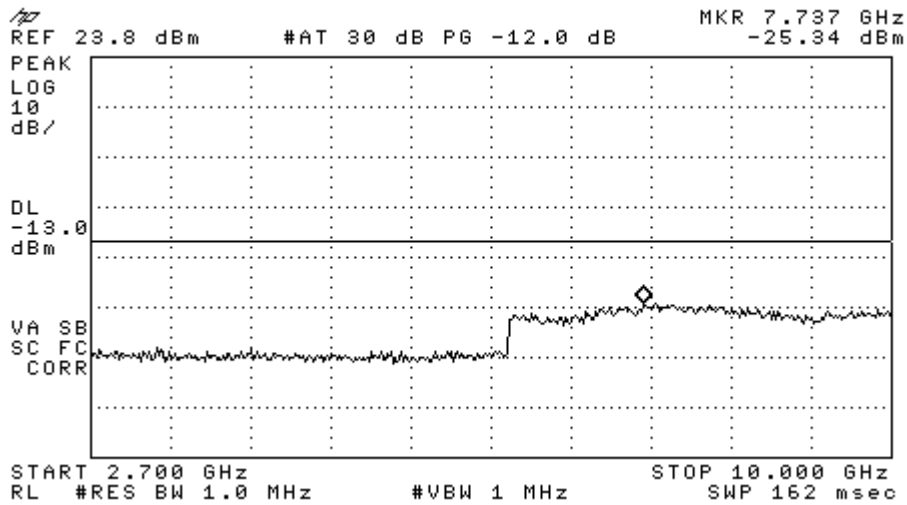


Figure 8-1b CDMA 800 – Conducted Spurious Emission (CH 1013)

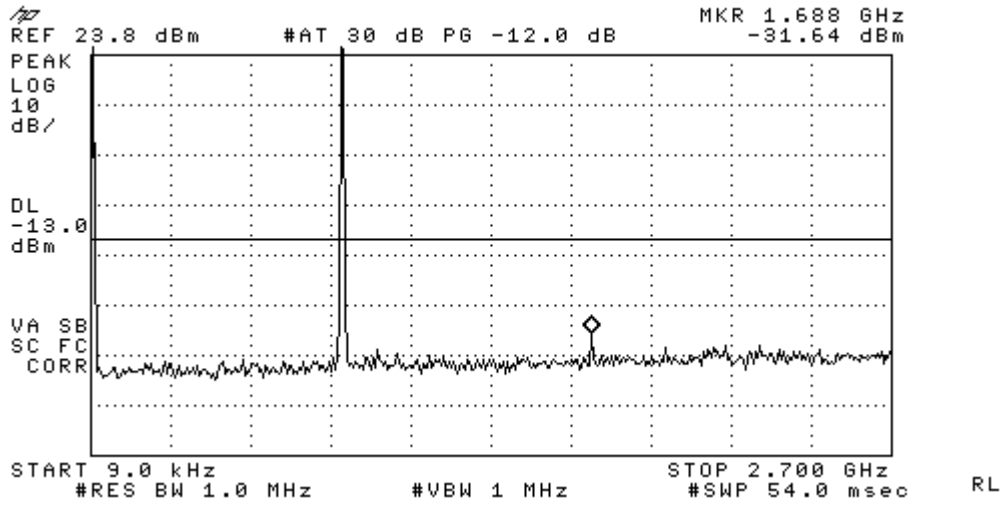


Figure 8-2a CDMA 800 – Conducted Spurious Emission (CH 383)

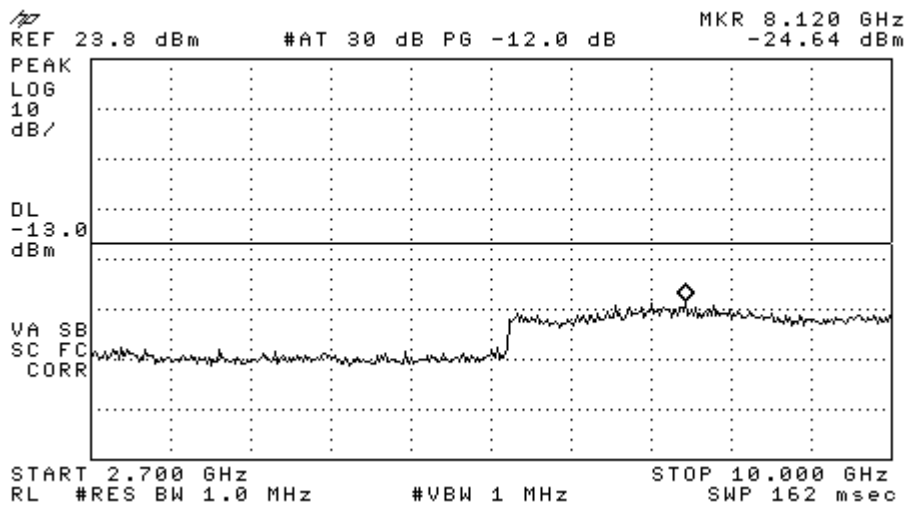


Figure 8-2b CDMA 800 – Conducted Spurious Emission (CH 383)

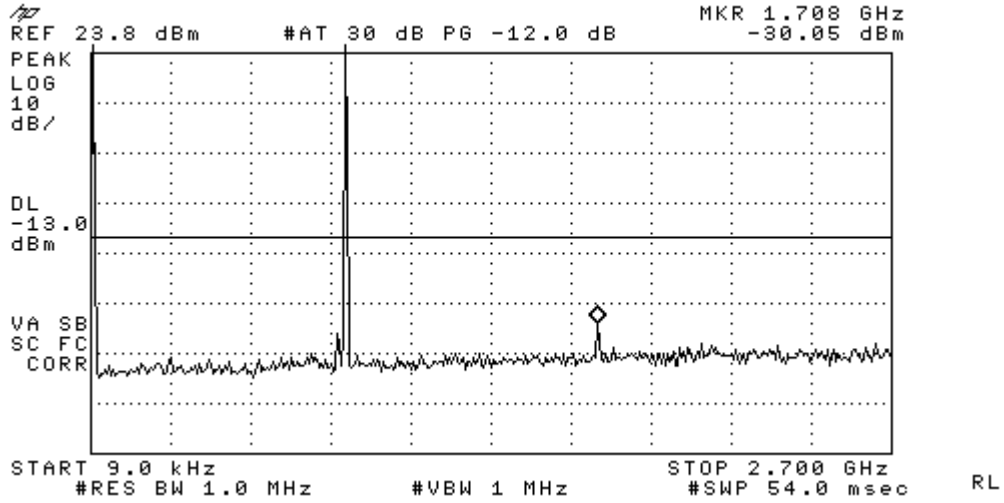


Figure 8-3a CDMA 800 – Conducted Spurious Emission (CH 777)


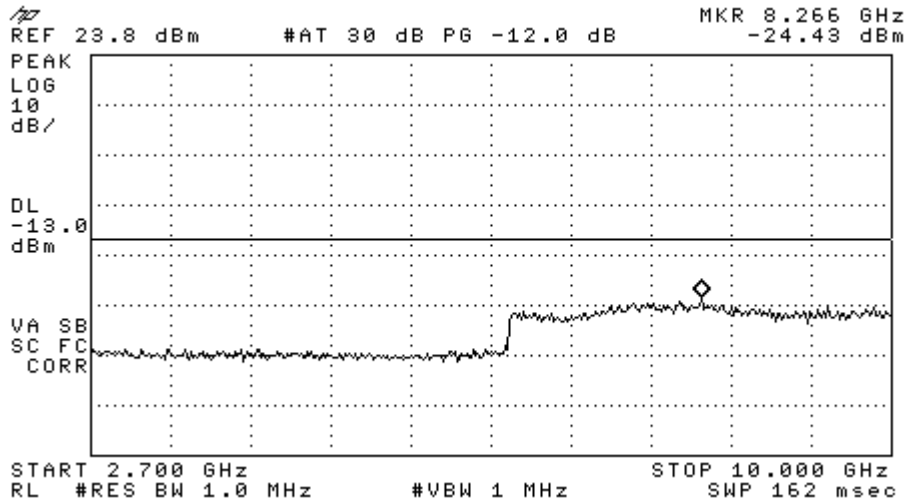


Figure 8-3b CDMA 800 – Conducted Spurious Emission (CH 777)

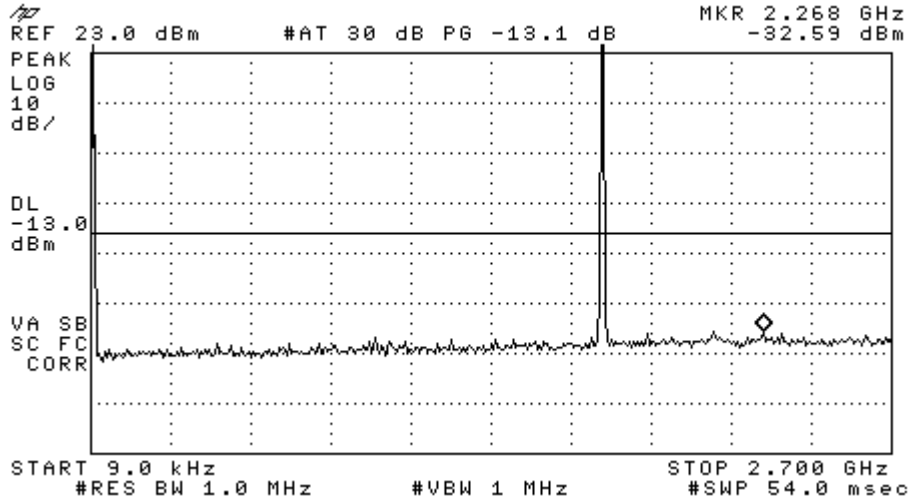

RL

Figure 8-4a AWS 1700 - Conducted Spurious Emission (CH 25)

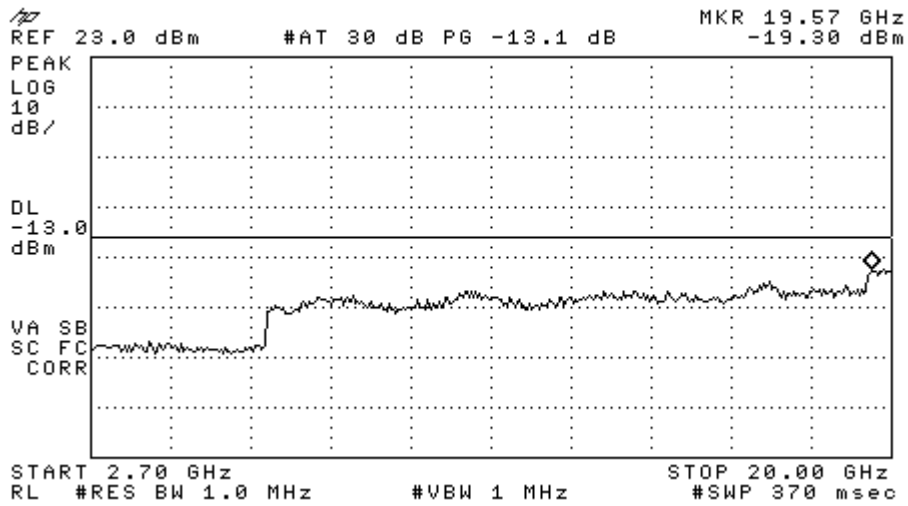


Figure 8-4b AWS 1700 - Conducted Spurious Emission (CH 25)

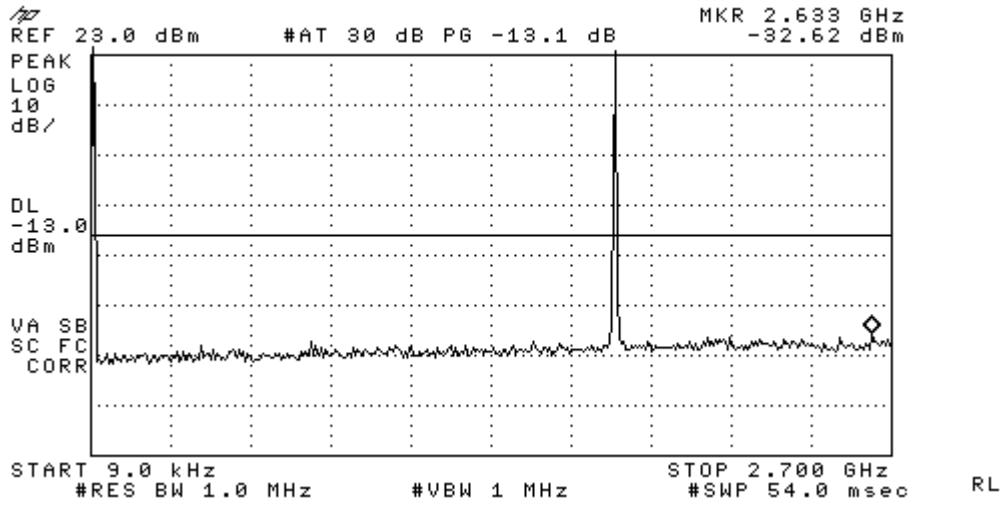


Figure 8-6a AWS 1700 - Conducted Spurious Emission (CH 875)

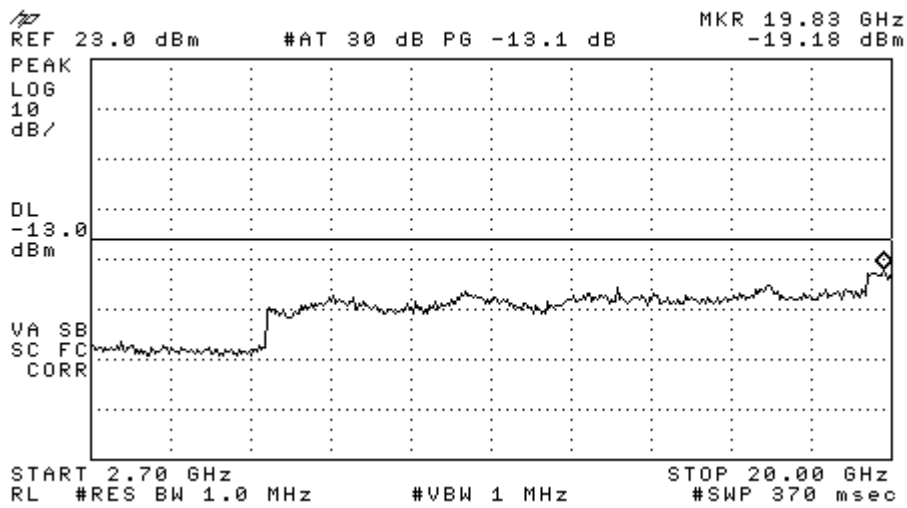


Figure 8-6b AWS 1700 - Conducted Spurious Emission (CH 875)

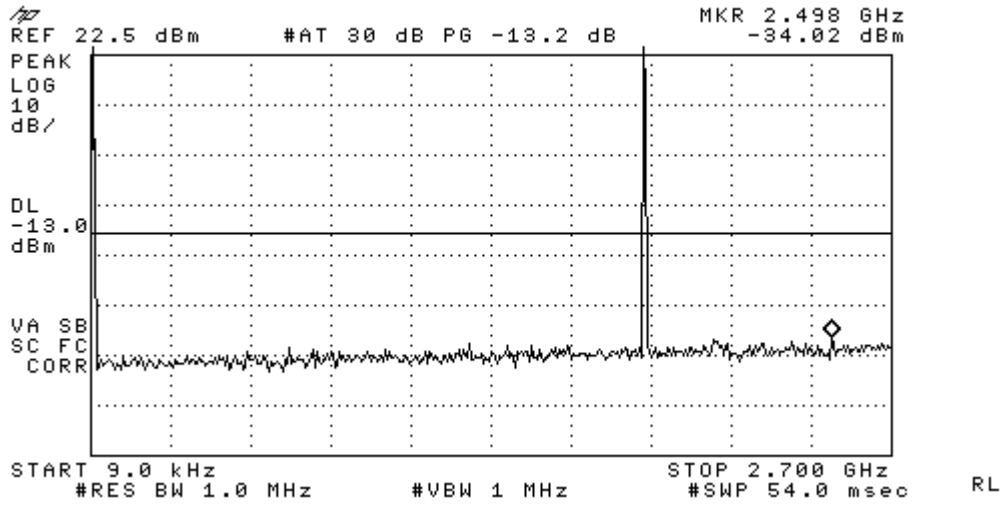


Figure 8-7a CDMA 1900 - Conducted Spurious Emission (CH 25)

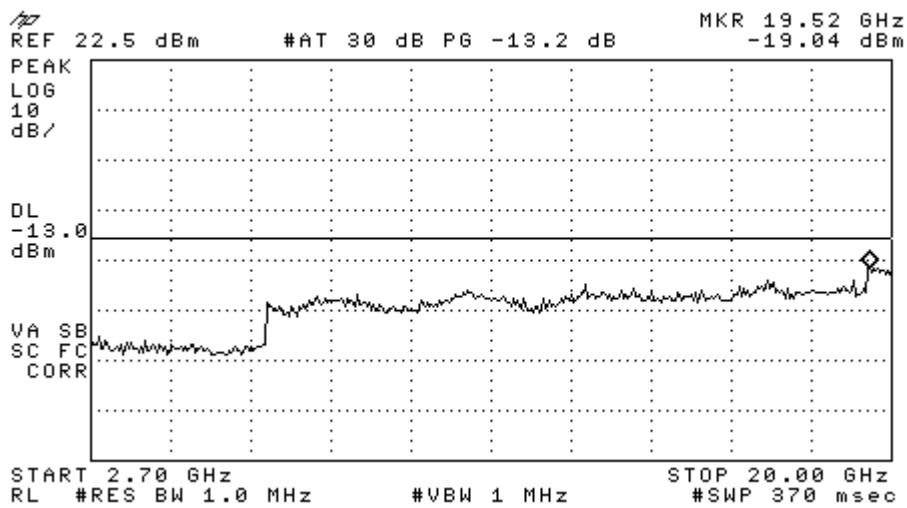


Figure 8-7b CDMA 1900 - Conducted Spurious Emission (CH 25)

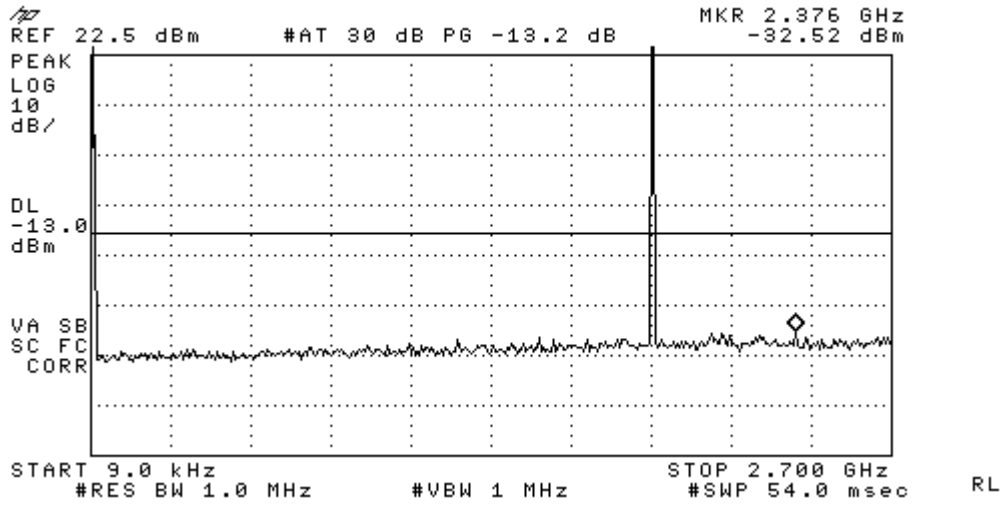


Figure 8-8a CDMA 1900 - Conducted Spurious Emission (CH 600)

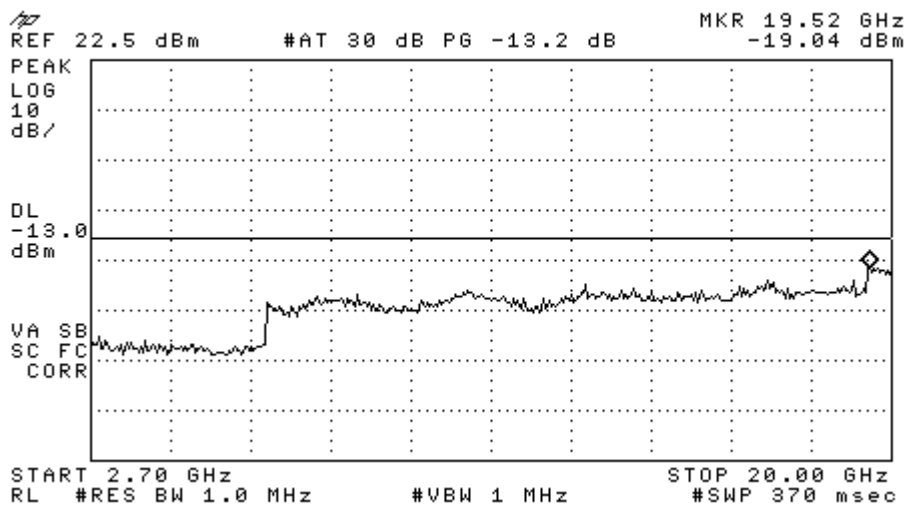


Figure 8-8b CDMA 1900 - Conducted Spurious Emission (CH 600)

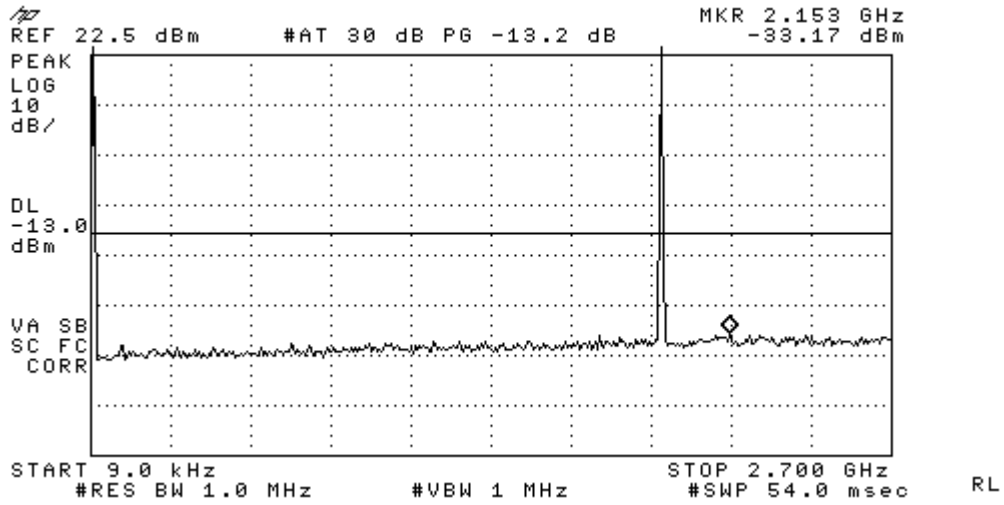


Figure 8-9a CDMA 1900 - Conducted Spurious Emission (CH 1175)

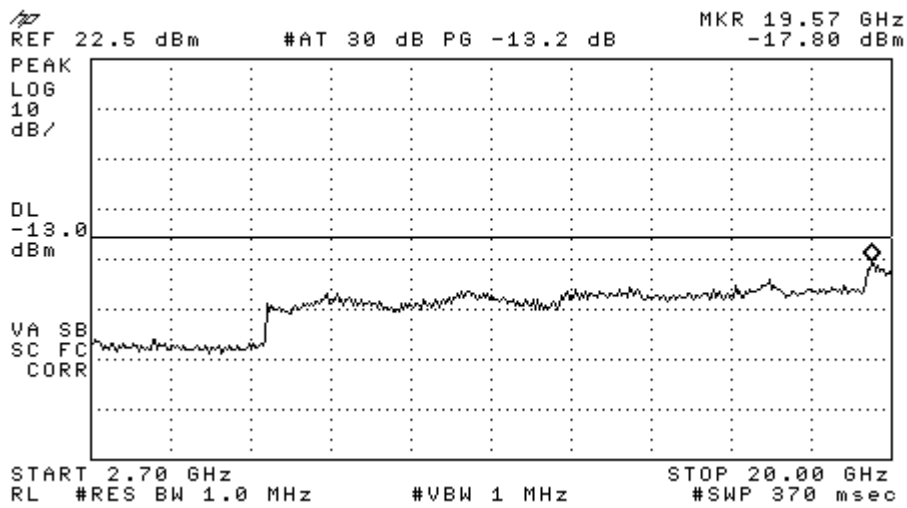


Figure 8-9b CDMA 1900 - Conducted Spurious Emission (CH 1175)

9 Transmitter Radiated Spurious Emissions Measured Data

FCC: § 2.1053, § 22.91, § 24.238, §27.53(g)

Measurement Procedures:

The radiated spurious emission test was performed at Compliance Certification Service. The test report is attached in a separate attachment.

10 Receiver Spurious Emissions

FCC: § 15.109

Measurement Procedures:

The receiver radiated spurious emission test was performed at Compliance Certification Service. The test report is attached in a separate attachment.

11 Transmitter RF Carrier Frequency Stability

FCC: § 2.1055, § 22.355, § 24.235, § 27.54


Measurement Procedures:

The EUT was placed in an environmental chamber. The RF output of the EUT was connected to Agilent 8960 Series 10 E5515C. A power supplier was connected as primary voltage supply.

11.1 CDMA 800 Mode

Tx Frequency : 836.49 MHz	Voltage : 3.7V
Tolerance : +/- 2.5 Ppm (+/- 2091 Hz)	Ch : 383


Temperature (°C)	Deviation of Carrier (Hz)			Specification (Hz)	
	3.6V (Battery endpoint)	3.7V	4.26V (115%)	Lower limit	Upper limit
-30		2.84		-2091	2091
-20		3.45		-2091	2091
-10		2.78		-2091	2091
0		4.79		-2091	2091
10		-2.67		-2091	2091
20	-3.08	2.59	-3.62	-2091	2091
30		-3.28		-2091	2091
40		-3.2		-2091	2091
50		2.59		-2091	2091
60		2.56		-2091	2091

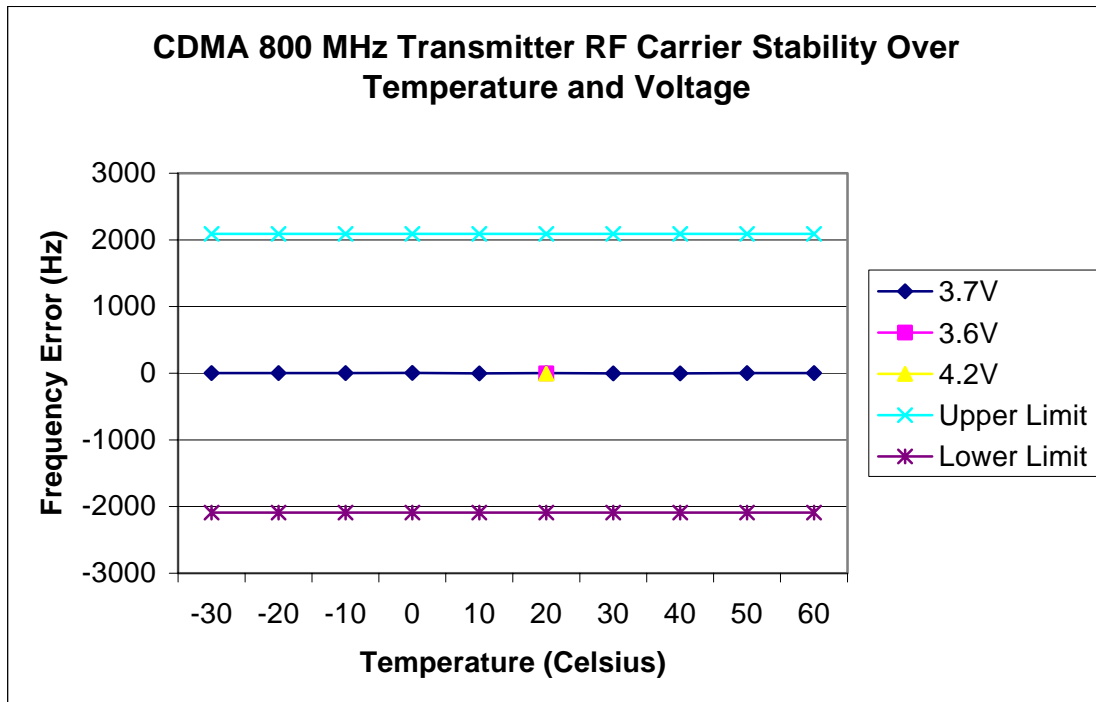

11.2 CDMA 1700 Mode

Tx Frequency : 1732.50 MHz	Voltage : 3.7V
Tolerance : +/- 2.5 ppm (+/-4331 Hz)	Ch : 450


Temperature (°C)	Deviation of Carrier (Hz)			Specification (Hz)	
	3.6V (Battery endpoint)	3.7V	4.26V (115%)	Lower limit	Upper limit
-30		-5.13		-4331	4331
-20		-4.53		-4331	4331
-10		-4.92		-4331	4331
0		-4.81		-4331	4331
10		-6.07		-4331	4331
20	-4.66	-5.27	-5.25	-4331	4331
30		-4.63		-4331	4331
40		-5.76		-4331	4331
50		-4.31		-4331	4331
60		3.75		-4331	4331

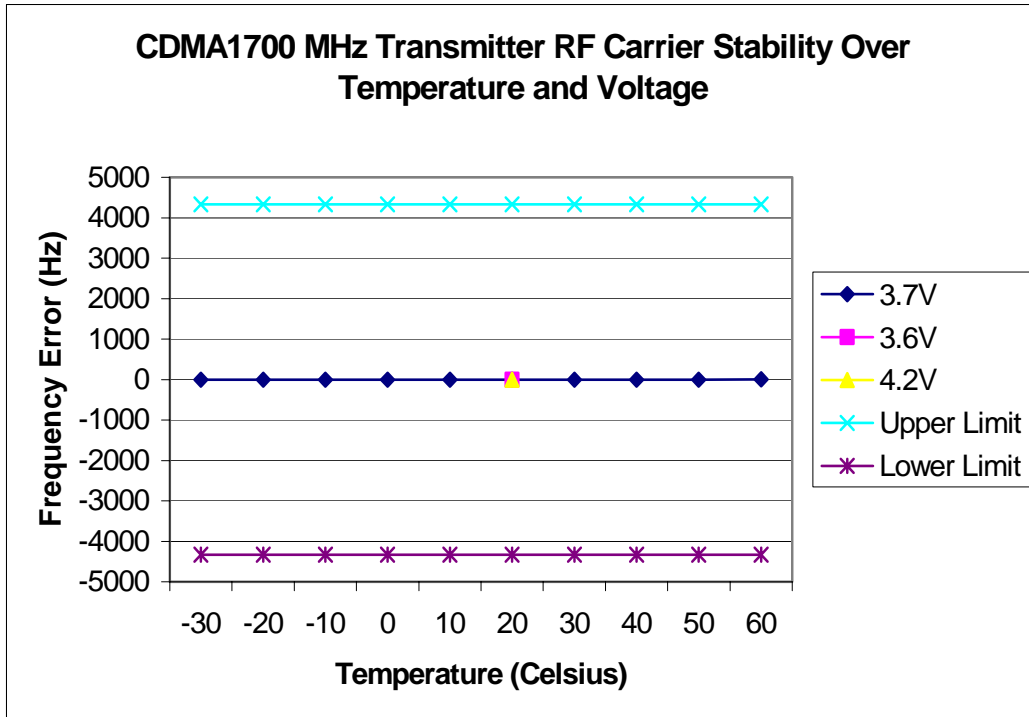

11.3 CDMA 1900 Mode

Tx Frequency : 1880 MHz	Voltage : 3.7V
Tolerance : +/- 2.5 ppm (+/-4700 Hz)	Ch : 600

Temperature (°C)	Deviation of Carrier (Hz)			Specification (Hz)	
	3.6V (Battery endpoint)	3.7V	4.26V (115%)	Lower limit	Upper limit
-30		9.3		-4700	4700
-20		6.07		-4700	4700
-10		-6.02		-4700	4700
0		8.45		-4700	4700
10		-4.01		-4700	4700
20	-5.95	-5.17	-4.34	-4700	4700
30		-10.54		-4700	4700
40		-4.96		-4700	4700
50		5.72		-4700	4700
60		7.17		-4700	4700

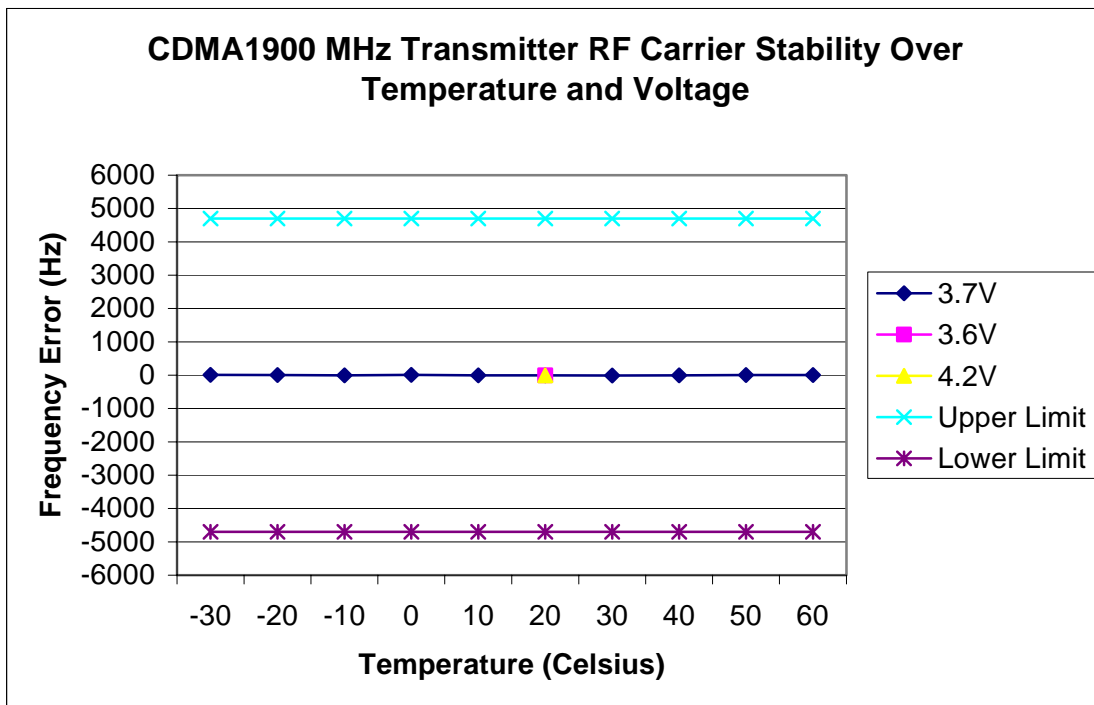

12 Exposure of Humans to RF Fields (SAR)

The SAR Test Report is showed in a separate attachment as Exhibit 9.

13 Test Equipment

Description	Manufacturer	Model Number	Serial Number	Cal Due Date
Power Meter	Giga-tronics	8541C	1832048	07/23/09
Spectrum Analyzer	Hewlett Packard	8593EM	3710A00203	03/04/10
Spectrum Analyzer	Hewlett Packard	8595E	3911A03899	07/19/09
Wireless Communications Test Set	Agilent	8960	GB44052789	05/19/10
Temperature Chamber	Test Equity	ZH2-033-033-H/AC	ZZ9622421	2/20/09