

**Appendix A:**  
**Validation Test Printout**

Test Laboratory: Kyocera-Wireless Corp.

## 1900MHz Validation @ 20dBm, Probe #3036, DAE #530, Dipole #5d005

Communication System: CW, Frequency: 1900 MHz, Duty Cycle: 1:1

Medium: HSL1800, Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.39$  mho/m;  $\epsilon_r = 39.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom: SAM 12, Phantom section: Flat Section

### DASY4 Configuration:

Probe: ES3DV2 - SN3036, ConvF(4.64, 4.64, 4.64), Calibrated: 10/25/2005

Sensor-Surface: 4mm (Mechanical Surface Detection),

Electronics: DAE4 Sn530, Calibrated: 1/4/2005

Measurement SW: DASY4, V4.4 Build 3

Postprocessing SW: SEMCAD, V1.8 Build 159

### Temperature:

Room T = 21.8 +/- 1 deg C, Liquid T = 22.0 +/- 1 deg C


### Validation Flat/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 61.1 V/m; Power Drift = -0.005 dB

Peak SAR (extrapolated) = 7.93 W/kg

SAR(1 g) = 4.39 mW/g; SAR(10 g) = 2.3 mW/g

Maximum value of SAR (measured) = 4.96 mW/g

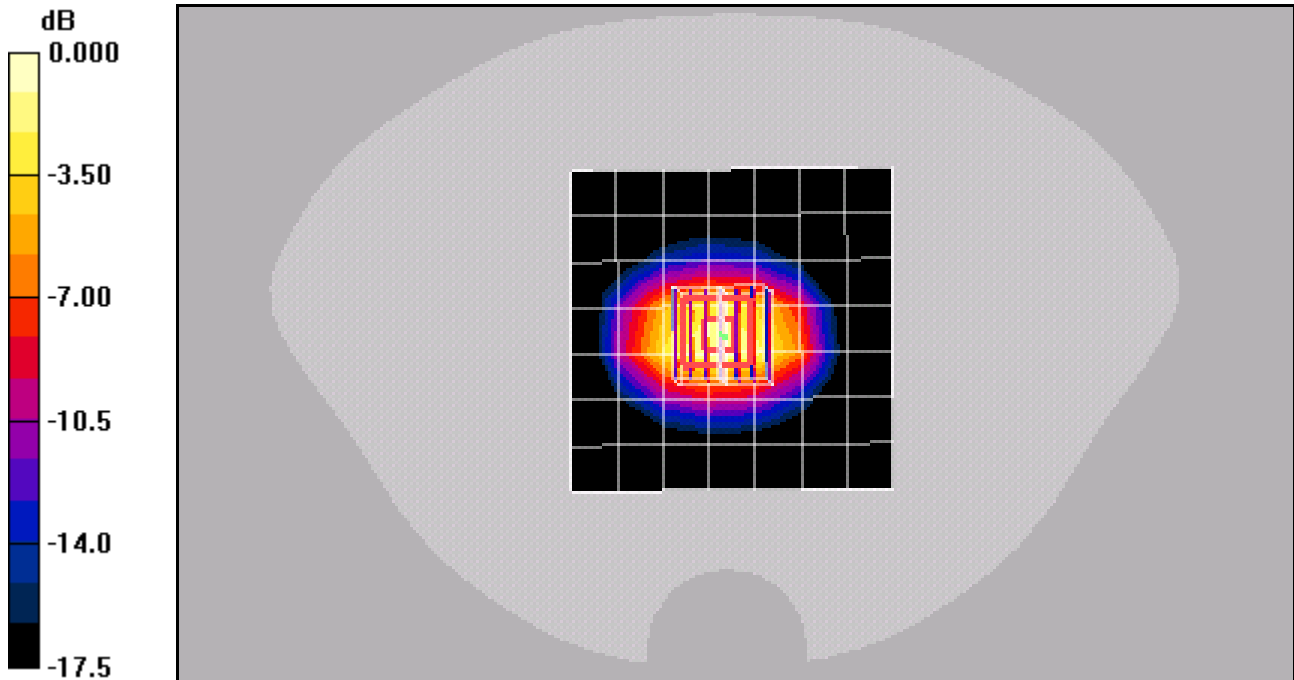

0 dB = 4.96mW/g