

# **FCC TEST REPORT**

## **FCC ID:OXGAL69RGB**

Product : Garden Laser Projector Red、 Green and Blue Moving

Model Name : AL69RGB

Brand : **show»lights™**

Report No. : PTC-DQ-01170303601E-FC01

### **Prepared for**

Willis Electric CO.,Ltd.

No.504-1, Chung-Hua Road, Sec.4 Hsin Chu,Taiwan

### **Prepared by**

DongGuan Precise Testing Service Co.,Ltd.

Building D, Baoding Technology Park, Guangming Road 2, Guangming Community

Dongcheng District, Dongguan, Guangdong, China



**TEST RESULT CERTIFICATION**

Applicant's name : Willis Electric CO.,Ltd.  
Address : No.504-1, Chung-Hua Road, Sec.4 Hsin Chu,Taiwan  
Manufacture's name : Kupoint (DongGuan) Electric Co., Ltd  
Address : Huai De Industrial Humen Town Dong Guan City Guang Dong  
Provience, China  
Product name : Garden Laser Projector Red、 Green and Blue Moving  
Model name : AL69RGB  
Standards : FCC CFR47 Part 15 B  
Test procedure : ANSI C63.4:2014  
Test Date : Mar.18, 2017 ~ May.25, 2017  
Date of Issue : May.25, 2017  
Test Result : Pass

This device described above has been tested by PTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of PTC, this document may be altered or revised by PTC, personal only, and shall be noted in the revision of the document.

Testing Engineer

August Qiu

Authorized Signatory

Chris Du



# Contents

	<b>Page</b>
<b>2 TEST SUMMARY.....</b>	<b>4</b>
<b>3 GENERAL INFORMATION.....</b>	<b>5</b>
3.1 GENERAL DESCRIPTION OF E.U.T. ....	5
3.2 TEST MODE .....	6
3.3 TEST SITE.....	6
<b>4 EQUIPMENT DURING TEST.....</b>	<b>7</b>
4.1 EQUIPMENTS LIST .....	7
4.2 MEASUREMENT UNCERTAINTY .....	8
<b>5 CONDUCTED EMISSION.....</b>	<b>9</b>
5.1 E.U.T. OPERATION .....	9
5.2 EUT SETUP.....	9
5.3 MEASUREMENT DESCRIPTION .....	10
5.4 CONDUCTED EMISSION TEST RESULT.....	11
<b>6 RADIATED SPURIOUS EMISSIONS.....</b>	<b>13</b>
6.1 EUT OPERATION.....	13
6.2 TEST SETUP .....	14
6.3 SPECTRUM ANALYZER SETUP .....	16
6.4 TEST PROCEDURE.....	17
6.5 TEST RESULTS.....	18
<b>7 15.111(A) REQUIRED.....</b>	<b>22</b>
7.1 APPLIED PROCEDURES / LIMIT .....	22
7.2 MEASURING PROCEDURES .....	22
7.3 TEST RESULT .....	23
<b>8 TEST SETUP.....</b>	<b>25</b>



## 2 Test Summary

Test procedures according to the technical standards:

EMISSION			
Standard	Item	Result	Remarks
FCC 47 CFR Part 15 Subpart B	Conducted Emission	PASS	Meet Class B limit
	Radiated Emission	PASS	Meet Class B limit
Part 15.111	PASS	Pass	N/A

NOTE:

(1) " N/A" denotes test is not applicable in this Test Report



### 3 General Information

#### 3.1 General Description of E.U.T.

Product Name : Garden Laser Projector Red、 Green and Blue Moving

Model Name : AL69RGB

Model Description : --

Receiving frequency : 433.92MHz

Receiver modulation : ASK

Antenna installation: : Integrated Antenna

Antenna Gain: : -0.25dBi

Power supply : Input: AC120V, 50/60Hz 0.6A  
Output: DC12.0V, 2.0A

Hardware Version : AL69B \_V1

Software Version : AL66RGB\_V10



### 3.2 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

During the test, the engineering test program was provide and enabled to make EUT in receiver mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Receiving

For Radiated Emission	
Final Test Mode	Description
Mode 1	Receiving

For Conducted Emission	
Final Test Mode	Description
Mode 1	Receiving

### 3.3 Test Site

Dongguan Precise Testing Service Co., Ltd.

Building D,Baoding Technology Park,Guangming Road2, Dongcheng District, Dongguan, Guangdong, China, Dongguan, 523129 China

FCC Registration Number: 371540



## 4 Equipment During Test

### 4.1 Equipments List

Note: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

Radiated Emissions							
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	EMI Test Receiver	Rohde&Schwarz	ESCI	101417	July 15, 2016	July 14, 2017	1 year
2	EMC Analyzer	Agilent	E4407B	MY45109572	Aug.04, 2016	Aug.03, 2017	1 year
3	Trilog Broadband Antenna	SCHWARZ BECK	VULB9160	9160-3355	July 15, 2016	July 14, 2017	1 year
4	Amplifier	EM	EM-30180	060538	July 15, 2016	July 14, 2017	1 year
5	Horn Antenna	SCHWARZ BECK	BBHA9120 D	9120D-1246	July 15, 2016	July 14, 2017	1 year
6	Loop Antenna	SCHWARZ BECK	FMZB1516	9130D-1243	July 15, 2016	July 14, 2017	1 year
7	3m Anechoic Chamber	CHENGYU	966	PTC-002	June 6, 2016	June 5, 2017	1 year
8	Coaxial Cable(below 1GHz)	LARGE	CALB1	-	July 15, 2016	July 14, 2017	1 year
9	Coaxial Cable(above 1GHz)	LARGE	CALB2	-	July 15, 2016	July 14, 2017	1 year
Conducted Emissions							
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	EMI Test Receiver	R&S	ESCI	101155	July 15, 2016	July 14, 2017	1 year
2	LISN	SCHWARZ BECK	NSLK 8128	8128-289	July 15, 2016	July 14, 2017	1 year
3	Cable	LARGE	RF300	-	July 15, 2016	July 14, 2017	1 year

Note : Adapter information

Model:K12F120100U

Input:120V-50/60Hz 0.35A

Output:12V-1A



#### 4.2 Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	±1.0dB
Power Spectral Density, conducted	±2.2dB
Radio Frequency	± 1 x 10 <sup>-6</sup>
Bandwidth	± 1.5 x 10 <sup>-6</sup>
Time	±2%
Duty Cycle	±2%
Temperature	±1°C
Humidity	±5%
DC and low frequency voltages	±3%
Conducted Emissions (150kHz~30MHz)	±3.64dB
Radiated Emission(30MHz~1GHz)	±5.03dB
Radiated Emission(1GHz~25GHz)	±4.74dB



## 5 Conducted Emission

Test Requirement:	:	FCC CFR 47 Part 15 Section 15.107
Test Method:	:	ANSI C63.4:2014
Test Result:	:	PASS
Frequency Range:	:	150kHz to 30MHz
Class/Severity:	:	Class B
Limit:	:	66-56 dB $\mu$ V between 0.15MHz & 0.5MHz
	:	56 dB $\mu$ V between 0.5MHz & 5MHz
	:	60 dB $\mu$ V between 5MHz & 30MHz
Detector:	:	Peak for pre-scan(9kHz Resolution Bandwidth)


### 5.1 E.U.T. Operation

Operating Environment :

Temperature:	:	25.5 °C
Humidity:	:	51 % RH
Atmospheric Pressure:	:	101.2kPa
EUT Operation :	:	Receiver mode Input: AC 120V 60Hz

### 5.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.4:2014.

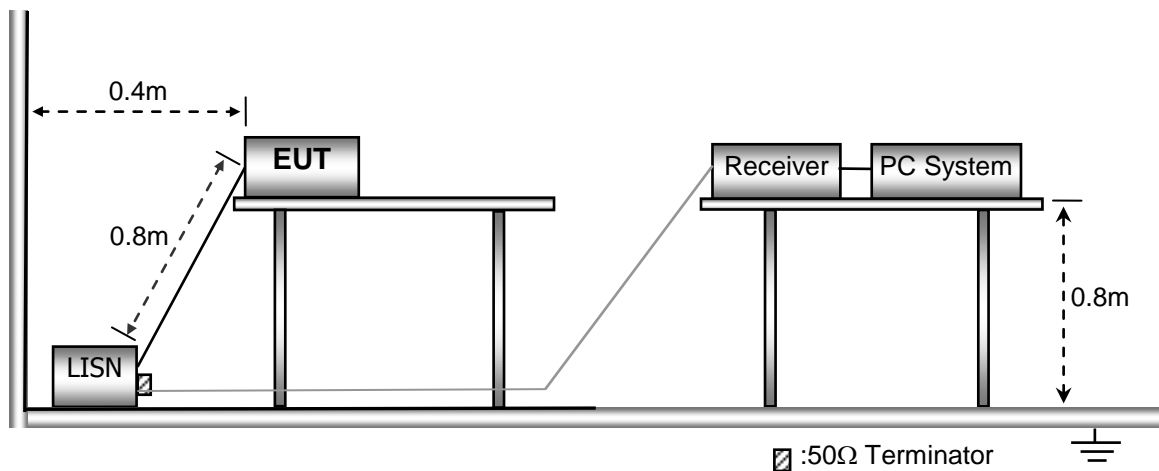



### 5.3 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

Remark: emission level= AMN factor+ Cable Loss +Receiver reading




### 5.4 Conducted Emission Test Result

N

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2060	37.03	9.22	46.25	63.37	-17.12	QP
2	0.2060	32.62	9.22	41.84	53.37	-11.53	AVG
3	0.3460	38.86	9.27	48.13	59.06	-10.93	QP
4	0.3460	35.73	9.27	45.00	49.06	-4.06	AVG
5	0.6260	37.16	9.20	46.36	56.00	-9.64	QP
6	0.6260	29.41	9.20	38.61	46.00	-7.39	AVG
7	1.1100	37.58	9.16	46.74	56.00	-9.26	QP
8	1.1100	30.55	9.16	39.71	46.00	-6.29	AVG
9	1.6700	37.73	9.22	46.95	56.00	-9.05	QP
10	1.6700	29.24	9.22	38.46	46.00	-7.54	AVG
11	2.0820	38.31	9.26	47.57	56.00	-8.43	QP
12	2.0820	12.55	9.26	21.81	46.00	-24.19	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result = Reading + Factor) – Limit

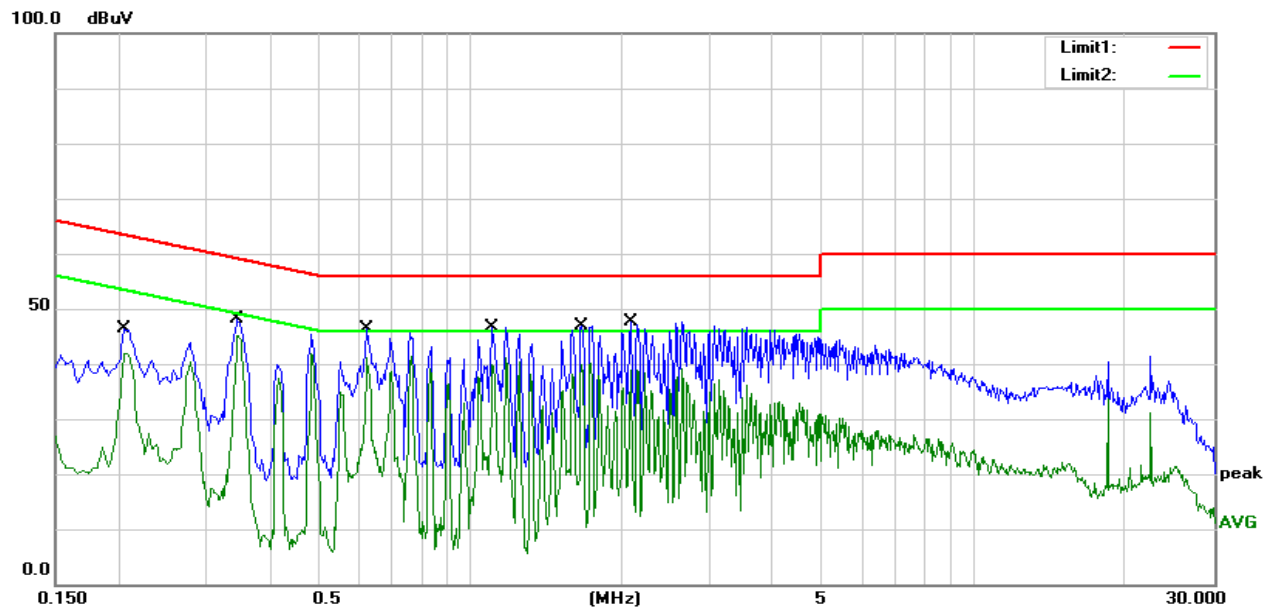




L

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2860	40.11	9.14	49.25	60.64	-11.39	QP
2	0.2860	27.18	9.14	36.32	50.64	-14.32	AVG
3	0.3540	39.73	9.18	48.91	58.87	-9.96	QP
4	0.3540	30.45	9.18	39.63	48.87	-9.24	AVG
5	0.4900	39.75	9.15	48.90	56.17	-7.27	QP
6	0.4900	27.08	9.15	36.23	46.17	-9.94	AVG
7	0.7740	37.24	9.24	46.48	56.00	-9.52	QP
8	0.7740	26.36	9.24	35.60	46.00	-10.40	AVG
9	1.6980	36.60	9.25	45.85	56.00	-10.15	QP
10	1.6980	24.75	9.25	34.00	46.00	-12.00	AVG
11	2.1260	36.52	9.26	45.78	56.00	-10.22	QP
12	2.1260	8.56	9.26	17.82	46.00	-28.18	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result = Reading + Factor) - Limit

100.0 dBuV

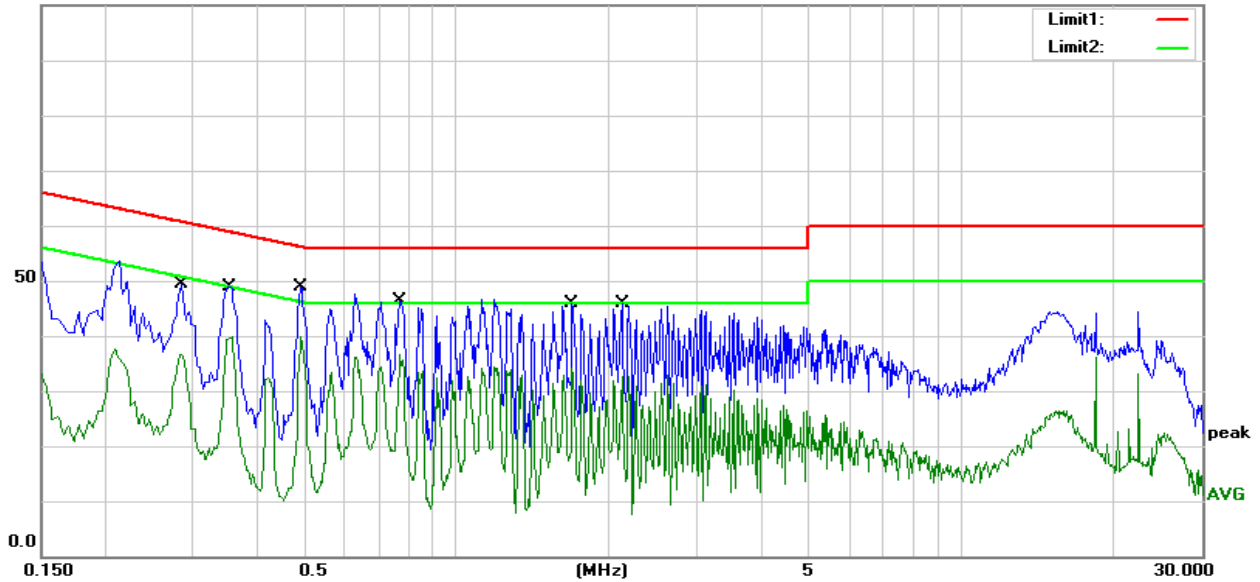



## 6 Radiated Spurious Emissions

Test Requirement: : FCC CFR47 Part 15 Section 15.109  
 Test Method: : ANSI C63.4:2014  
 Test Result: : PASS  
 Measurement Distance: : 3m  
 Limit: : See the follow table

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$


### 6.1 EUT Operation

Operating Environment :  
 Temperature: : 23.5 °C  
 Humidity: : 51.1 % RH  
 Atmospheric Pressure: : 101.2kPa  
 : Receiver mode  
 EUT Operation :  
 Input: AC 120V 60Hz


### 6.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site

The test setup for emission measurement below 30MHz.

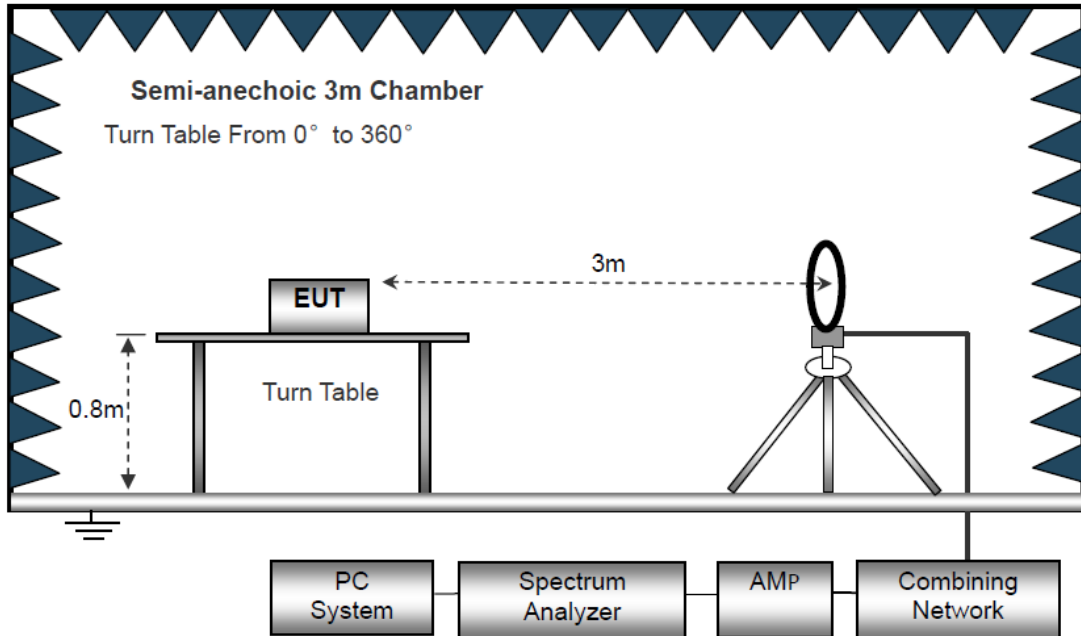


The test setup for emission measurement from 30 MHz to 1 GHz.

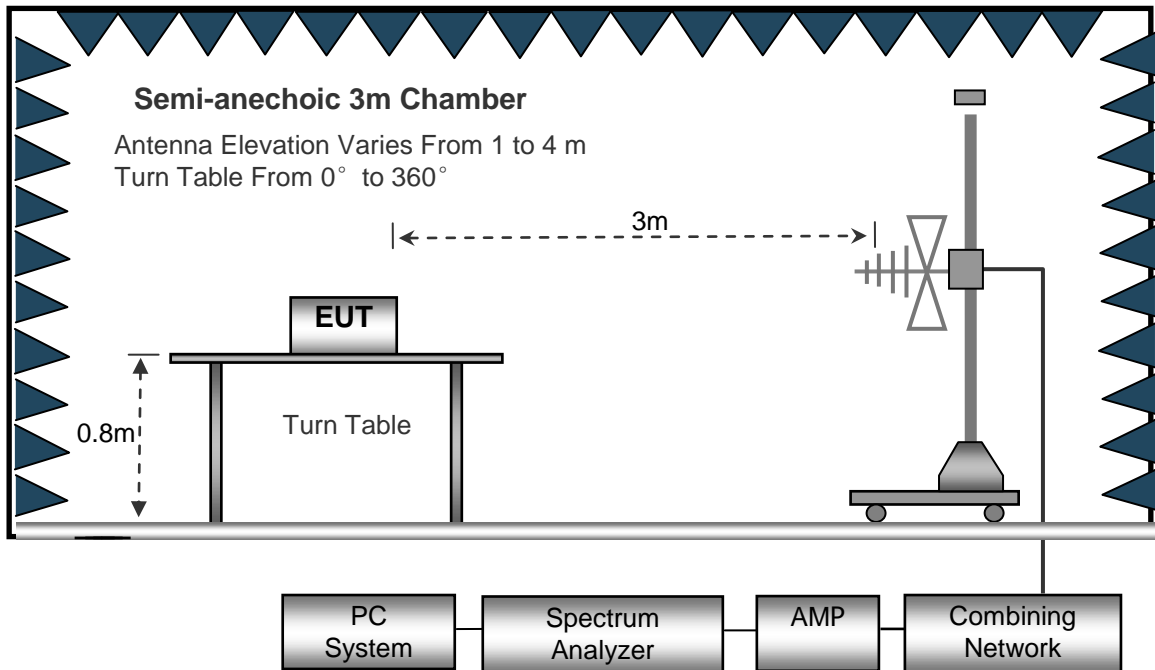



The test setup for emission measurement above 1 GHz.

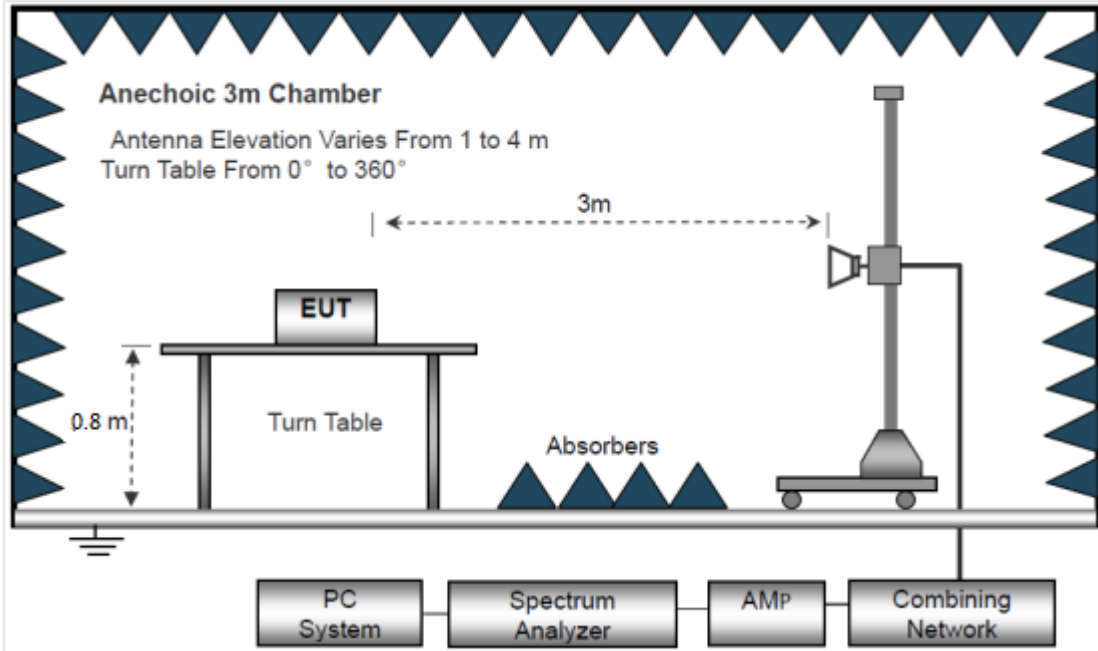



### 6.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed..... Auto  
IF Bandwidth..... 10kHz  
Video Bandwidth ..... 10kHz  
Resolution Bandwidth ..... 10kHz

30MHz ~ 1GHz

Sweep Speed..... Auto  
Detector..... PK  
Resolution Bandwidth ..... 100kHz  
Video Bandwidth ..... 300kHz

Above 1GHz

Sweep Speed..... Auto  
Detector..... PK  
Resolution Bandwidth ..... 1MHz  
Video Bandwidth ..... 3MHz  
Detector..... Ave.  
Resolution Bandwidth ..... 1MHz  
Video Bandwidth ..... 10Hz





## 6.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower. In the frequency above 1GHz, Place the measurement antenna 3m away from the EUT for each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.



### 6.5 TEST RESULTS

(Radiated Emission<30MHz (9KHz-30MHz, H-field))

Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Polarization:	--
Test Mode:	Mode 1		

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS


Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =40 log (specific distance/test distance)(dB);

Limit line = specific limits(dBuV) + distance extrapolation factor.



H

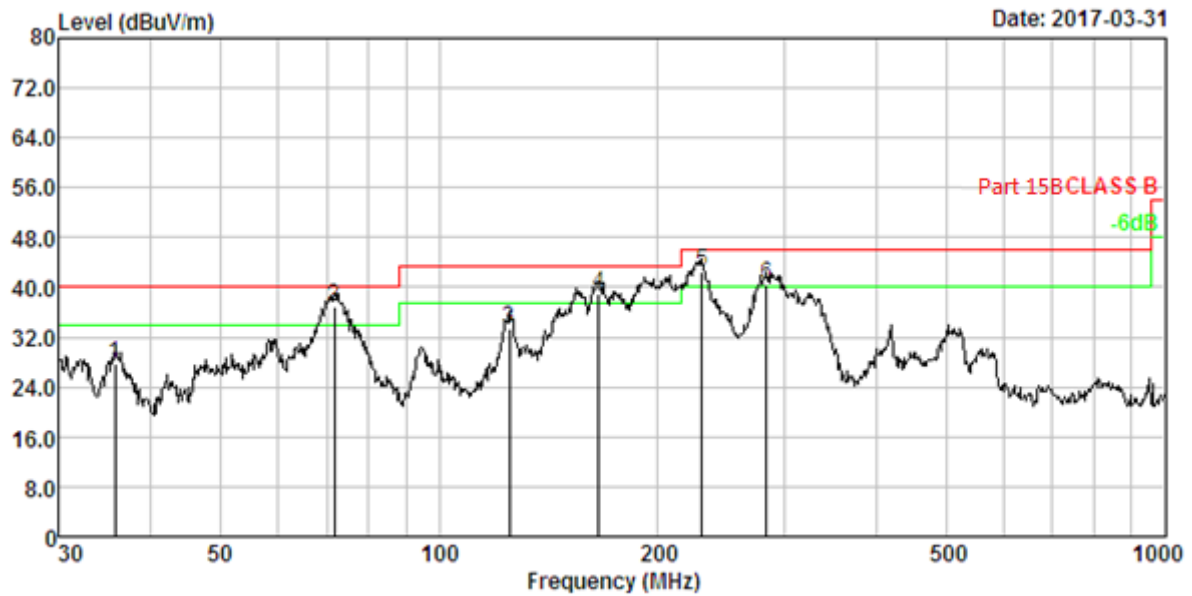


Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result =Reading + Factor )–Limit

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBUV	Preamp Factor dB	Emission Level dBUV/m	Limit dBUV/m	Over Limit dB	Remark
1.	35.749	1.21	13.43	43.18	30.03	27.79	40.00	-12.21	QP
2.	71.832	1.85	9.95	55.43	30.27	36.96	40.00	-3.04	QP
3.	125.007	2.35	12.34	49.20	30.47	33.42	43.50	-10.08	QP
4.	166.068	2.60	13.54	53.45	30.57	39.02	43.50	-4.48	QP
5.	230.099	2.90	11.25	59.01	30.68	42.48	46.00	-3.52	QP
6.	282.985	3.09	12.87	55.26	30.75	40.47	46.00	-5.53	QP



V

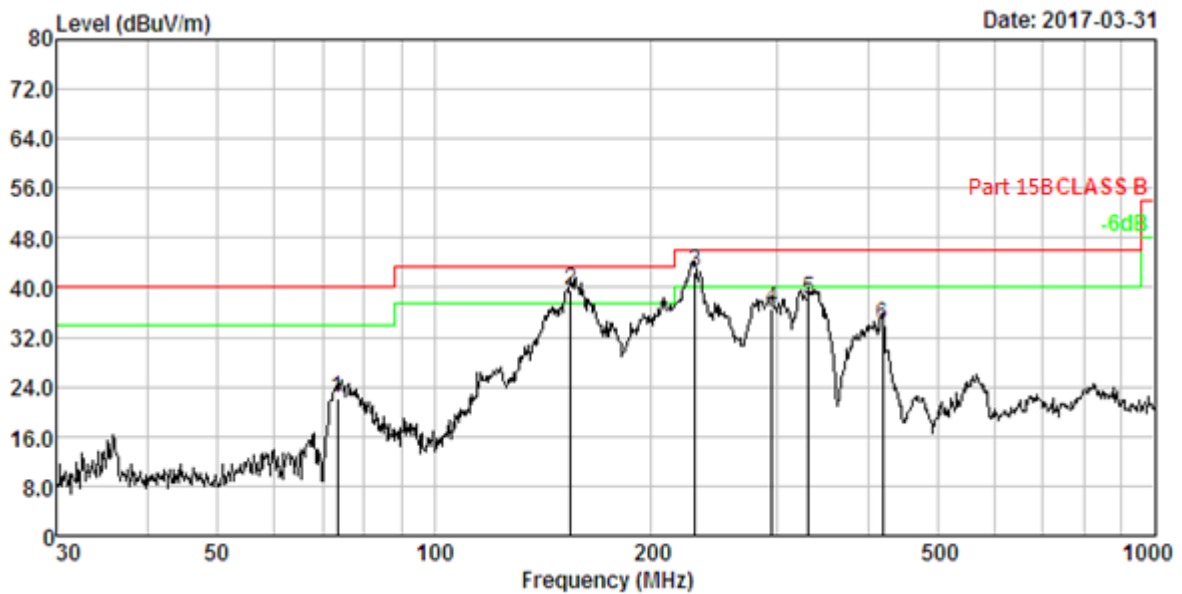

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result =Reading + Factor )–Limit

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBUV	Preamp Factor dB	Emission Level dBUV/m	Limit dBUV/m	Over Limit dB	Remark
1.	73.359	1.86	9.91	40.57	30.28	22.06	40.00	-17.94	QP
2.	154.821	2.54	13.89	53.68	30.54	39.57	43.50	-3.93	QP
3.	230.099	2.90	11.25	58.95	30.68	42.42	46.00	-3.58	QP
4.	294.114	3.12	13.08	51.08	30.76	36.52	46.00	-9.48	QP
5.	331.355	3.23	13.90	51.87	30.81	38.19	46.00	-7.81	QP
6.	419.108	3.44	15.68	45.74	30.89	33.97	46.00	-12.03	QP



Above 1GHz

Peak

Freq.	Ant. Pol	Peak	Amplifier	Loss	Antenna Factor	Orrected Factor	Actual Fs	Peak	Peak
(MHz)	H/V	Reading (dBuV)	(dB)	(dB)	(dB/m)	(dB)	Peak (dBuV/m)	Limit (dBuV/m)	margin (dBuV/m)
2005.3	H	57.98	43.80	5.40	25.90	-12.50	45.48	74.00	-28.52
2508.6	H	52.87	44.40	6.00	27.60	-10.80	42.07	74.00	-31.93
3000.4	H	57.33	44.70	6.70	28.20	-9.80	47.53	74.00	-26.47
4400.8	H	52.62	44.30	8.42	30.40	-5.48	47.14	74.00	-26.86
2005.3	V	52.84	43.80	5.40	25.90	-12.50	40.34	74.00	-33.66
2508.6	V	49.87	44.40	6.00	27.60	-10.80	39.07	74.00	-34.93
3000.4	V	52.33	44.70	6.70	28.20	-9.80	42.53	74.00	-31.47
4400.8	V	49.21	44.30	8.42	30.40	-5.48	43.73	74.00	-30.27

AV

Freq.	Ant. Pol	AV	Amplifier	Loss	Antenna Factor	Orrected Factor	AV	AV	AV
(MHz)	H/V	Reading (dBuV)	(dB)	(dB)	(dB/m)	(dB)	AV (dBuV/m)	Limit (dBuV/m)	margin (dBuV/m)
2005.3	H	41.36	43.80	5.40	25.90	-12.50	28.86	54.00	-25.14
2508.6	H	38.72	44.40	6.00	27.60	-10.80	27.92	54.00	-26.08
3000.6	H	41.32	44.70	6.70	28.20	-9.80	31.52	54.00	-22.48
4400.9	H	38.29	44.30	8.42	30.40	-5.48	32.81	54.00	-21.19
2005.3	V	37.64	43.80	5.40	25.90	-12.50	25.14	54.00	-28.86
2508.6	V	32.89	44.40	6.00	27.60	-10.80	22.09	54.00	-31.91
3000.6	V	37.55	44.70	6.70	28.20	-9.80	27.75	54.00	-26.25
4400.9	V	32.14	44.30	8.42	30.40	-5.48	26.66	54.00	-27.34

Notes:

1. Measuring frequencies from 1 GHz to 6GHz.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode of the emission shown in Actual FS column.
3. The frequency that above 4.4GHz is mainly from the environment noise.



## 7 15.111(a) Required

### 7.1 APPLIED PROCEDURES / LIMIT


The antenna conducted power of the receiver as defined in §15.111 shall not exceed the values given in the following tables.

Frequency Range	9 KHz to 2.5GHz
Limit	2.0 nW (-57 dBm )

### 7.2 MEASURING PROCEDURES

1. The receiver antenna terminal connected to a spectrum analyzer.
2. The test data of the worst case condition (mode 1) was reported on the following Data page.


### 7.3 TEST CONFIGURATION

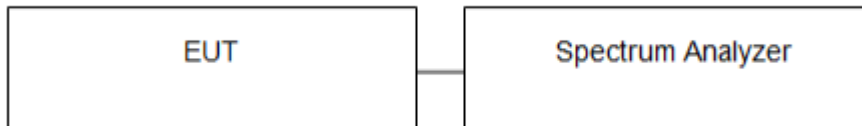




### 7.4 Test Result


#### Conducted Measurement (9 KHz to 150 KHz)

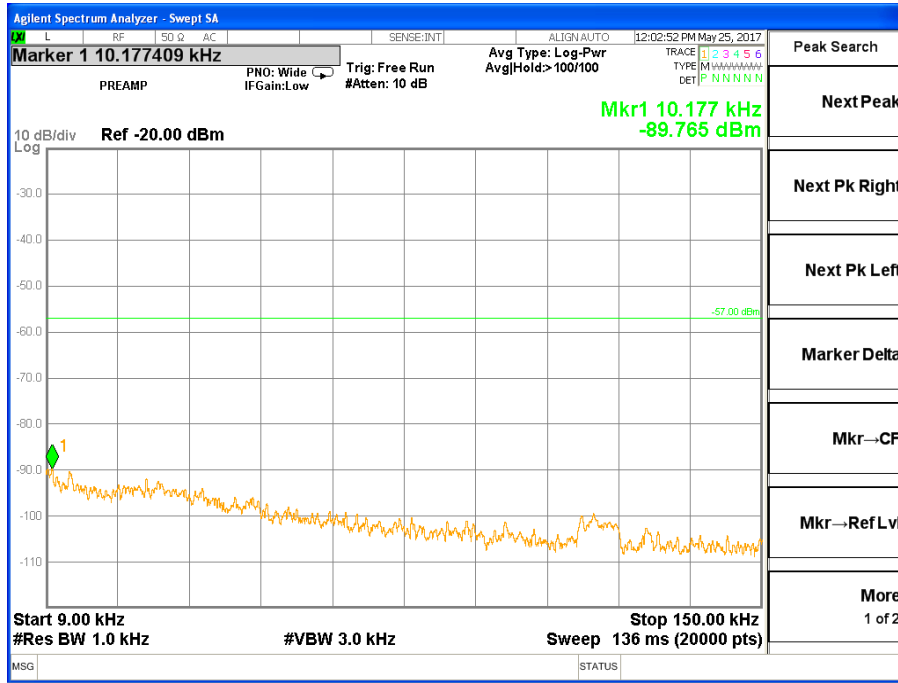


#### Conducted Measurement (150 KHz to 30 MHz)

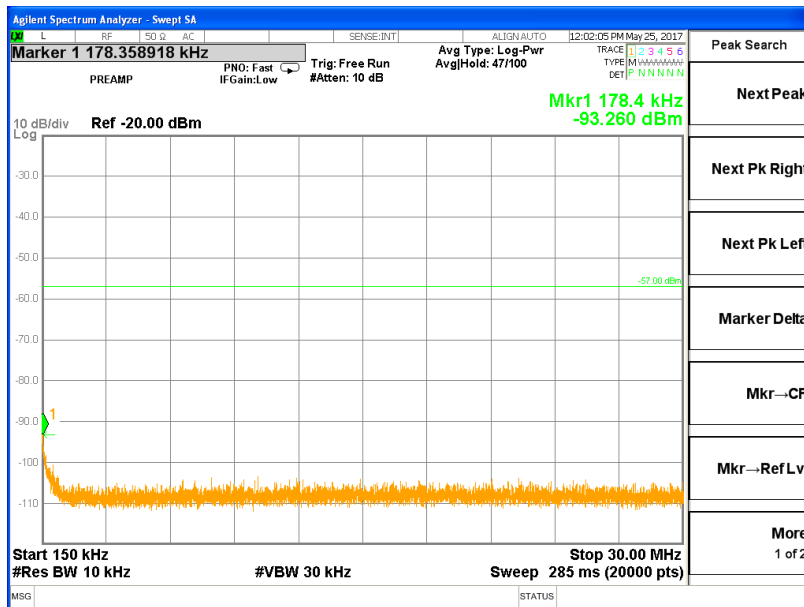

### Conducted Measurement (30 MHz to 1 GHz)

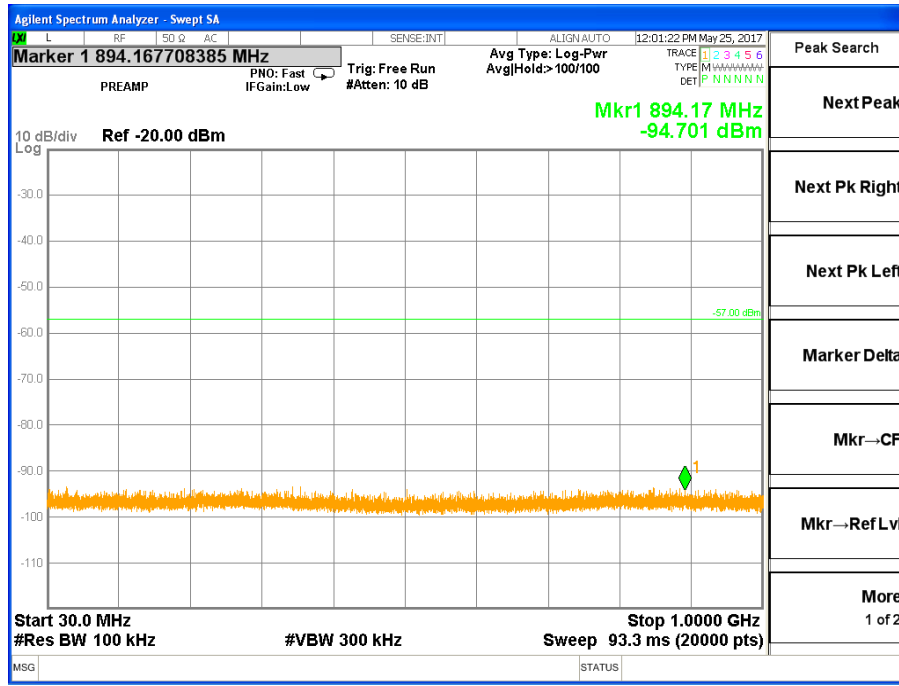

### Conducted Measurement (1 GHz to 2 GHz)

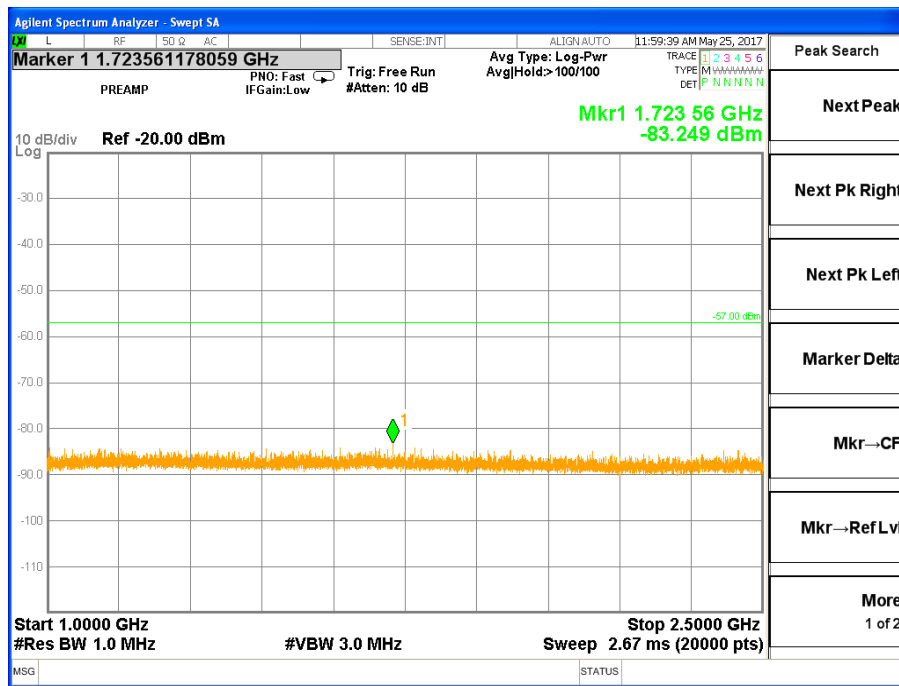







## 8 Test Setup

Spurious Emissions  
From 30MHz-1000MHz

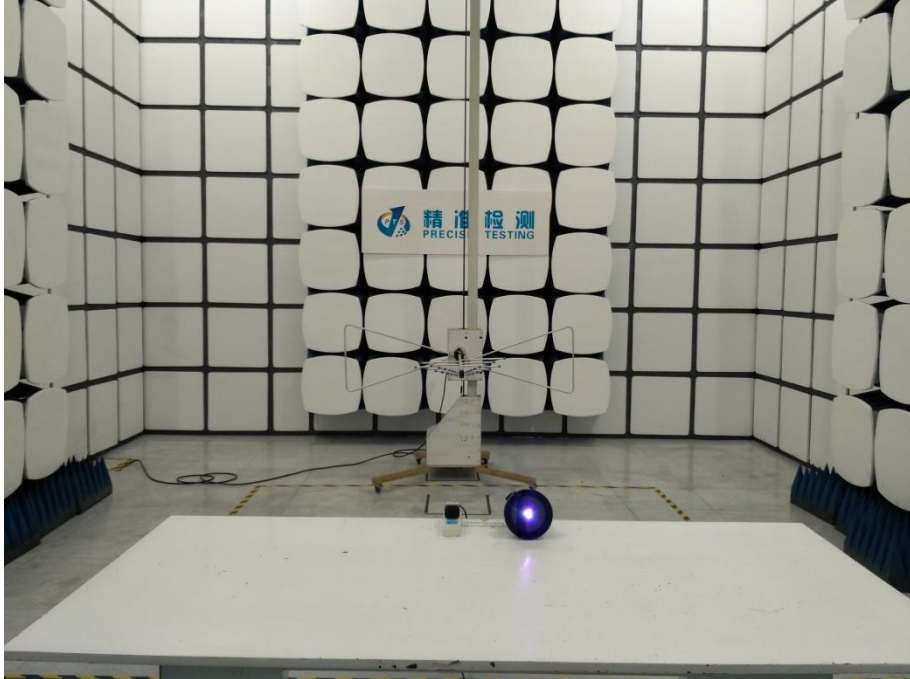

Above 1GHz

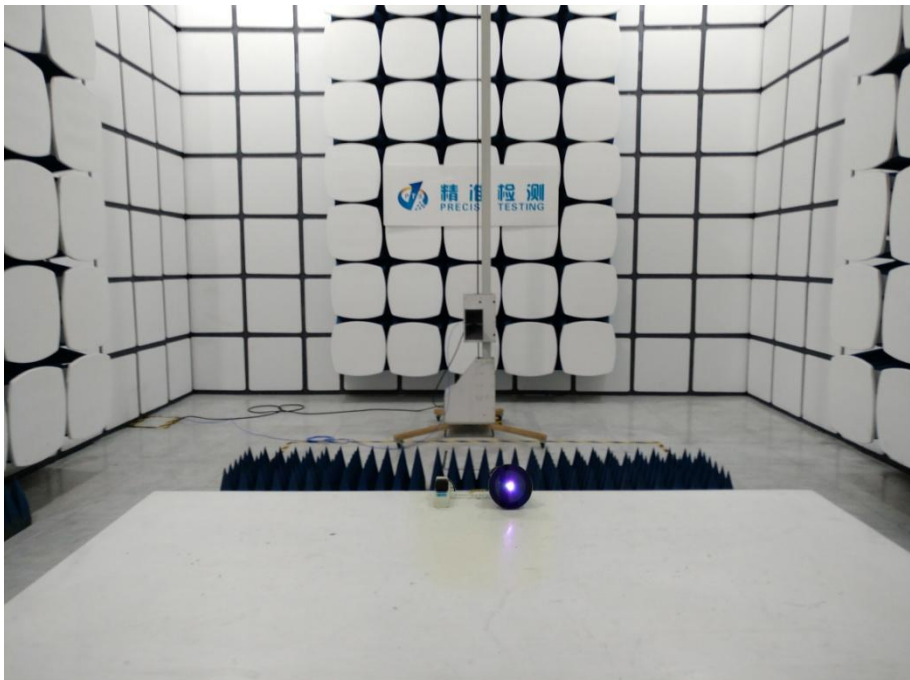



### Conducted Emissions



\*\*\*\*\*THE END REPORT\*\*\*\*\*