
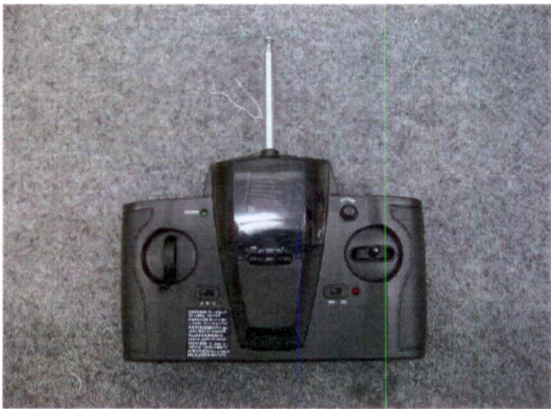



TEST REPORT No.: (5213)156-0692

TEST REPORT

To:	SILVERLIT TOYS MANUFACTORY LTD.	To:	-
Attn:	Ms. May Choi / Mr. Nelson Ng / Mr. Edmond / Ms. Angel Zhang	Attn:	-
Address:	17 th Floor World Trade Centre, 280 Gloucester Road, Causeway Bay, Hong Kong	Address:	-
Fax:	29162984	Fax:	-
E-mail:	may@silverlit.com / wt.mark-qa@silverlit.com / nelson@silverlit.com / edmond@silverlit.com / wt.angelzhang@silverlit.com / wt.jim@silverlit.com	E-mail:	-
Folder No.:			--
Factory Name:			--
Location:			--
Product:	Speedy Plus Model No.: 85966		
	Sample No:	(5213)156-0692	
	Test Date(s):	June 17, 2013	
	Test Requested:	FCC Part 15 – 2011	
	Test Method:	ANSI C63.4 – 2009	
	FCC ID:	OYK-TX027145-1110	
<p>The results given in this report are related to the tested specimen of the described electrical apparatus.</p>			
<p>CONCLUSION: The submitted sample was found to <u>COMPLY</u> with requirement of FCC Part 15 Subpart C.</p>			
Authorized Signature:			
			
Reviewed by: Keith Yeung		Approved by: Steven Tsang	
Date: July 25, 2013		Date: July 25, 2013	



TEST REPORT No.: (5213)156-0692

Test Result Summary

EMISSION TEST			
Test requirement: FCC Part 15 - 2011			
Test Condition	Test Method	Test Result	
		Pass	Failed
Radiated Emission Test, 9kHz to 1GHz	ANSI C63.4	<input checked="" type="checkbox"/>	<input type="checkbox"/>

Report Revision & Sample Re-submit History:

--



TEST REPORT No.: (5213)156-0692

Test Laboratory & Test Instruments List

Radiated and Conducted emissions measurements are investigated and taken pursuant to the procedures of ANSI C63.4 – 2009. An Open Area Test Site and Full Anechoic Chamber (FCC Listed Site, Registration No. 642151) are set up for investigation and located at:

BUREAU VERITAS HONG KONG LIMITED, EMC CENTRE

No. 2106-2107, 21/F., Westin Centre,
26 Hung To Road,
Kwun Tong, Kowloon,
Hong Kong

Test Instrument List

Radiated Emission

EQUIPMENT	MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATION DUE
EMI TEST RECEIVER	R&S	ESCI	100379	28-JAN-2014
LOOP ANTENNA	ETS-LINDGREN	6502	00102266	14-AUG-2013
BILOG ANTENNA	SCHAFFNER	CBL6112D	25229	12-SEP-2013
OPEN AREA TEST SITE	BVCPS	N/A	N/A	09-JUL-2013
ANECHOIC CHAMBER	ALBATROSS	M-CDC	80374004499B	05-FEB-2014
COAXIAL CABLE	SUHNER	RG214	N/A	24-SEP-2013

Remarks: -

N/A: Not Applicable or Not Available

The measurement instrumentation uncertainty would be taking into consideration on each of the test result

TEST REPORT No.: (5213)156-0692

Equipment Under Test [EUT]

Description of Sample:

Product: Speedy Plus
Model No.: 85966
Power Supply: 9Vd.c. ("AA" size battery x 6)

Description of EUT Operation:

The Equipment Under Test (EUT) is a SILVERLIT TOYS MANUFACTORY LTD. of Radio Control toy. The transmitter is 2 sticks, 1 knob and 2 switches transmitter and operating at 27.145MHz. It includes 3 channels – A, B & C and they are using the same frequency, the difference is the pattern of pulse train. The worst case was tested and the result is shown in the report. The EUT continues to transmit buttons is being pressed, Modulation by IC, and type is pulse modulation.

The transmitter has different control:

1. Left stick – forward control
2. Right stick – leftward and rightward control
3. St. trim Knob – trim control
4. Channel switch – Change the channel A, B or C
5. On / Off switch – On / Off control

Antenna Requirement (Section 15.203)

The EUT is use of a screw-on type antenna. The antenna consists of 61cm long metal antenna. The antenna connector is custom-made and not be able to found in the market. It also cannot be replaced with other antenna other than the one bundled inside the package. The requirements of S15.203 are met. There are no deviations or exceptions to the specifications.

Photo of Antenna



TEST REPORT No.: (5213)156-0692

Test Results

Radiated Emissions (Fundamental)

Test Requirement: FCC Part 15 Section 15.227
 Test Method: ANSI C63.4
 Test Date(s): 2013-06-17
 Temperature: 28.0 °C
 Humidity: 86.0 %
 Atmospheric Pressure: 100.4 kPa
 Mode of Operation: Transmission mode
 Tested Voltage: 9Vd.c. ("AA" size battery x 6)

Test Method:


Radiated emissions measurements are investigated and taken pursuant to the procedures of ANSI C63.4 – 2009.

The equipment under test (EUT) was placed on a non-conductive turntable with dimensions of 1.5m x 1m and 0.8m high above the ground. 3m from the EUT, a broadband antenna mounting on the mast received the signal strength. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using new battery. The turntable was rotated to maximize the emission level. The antenna was then moving along the mast from 1m up to 4m until no more higher value was found. Both horizontal and vertical polarization of the antenna were placed and investigated.

For below 30MHz, a loop antenna with its vertical plane is place 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1m above the ground.

Location: The Roof, Westin Centre, 26 Hung To Road, Kwun Tong, Kowloon, Hong Kong

Test Setup: Open Area Test Site

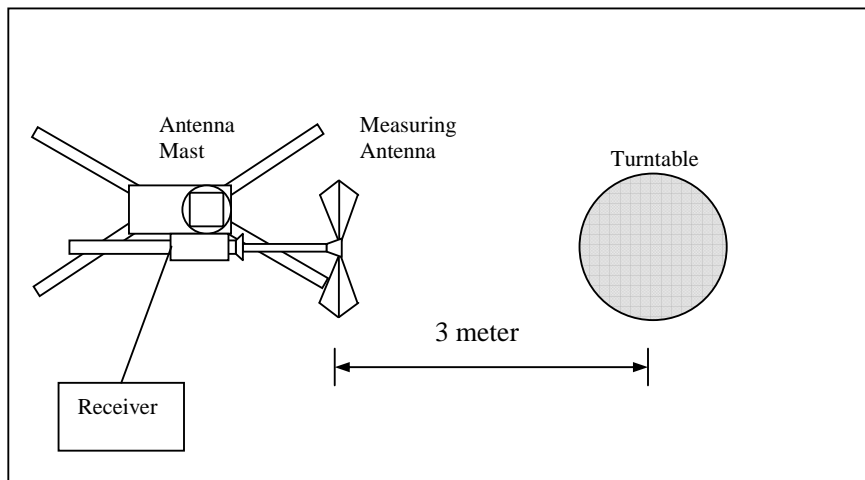



TEST REPORT No.: (5213)156-0692

Limits for Field Strength of Fundamental Emissions [FCC 47CFR 15.227]:

Frequency Range of Fundamental [MHz]	Field Strength of Fundamental Emission [Peak] [$\mu\text{V}/\text{m}$]	Field Strength of Fundamental Emission [Average] [$\mu\text{V}/\text{m}$]
26.96 – 27.28	100,000 (100 dB $\mu\text{V}/\text{m}$)	10,000 (80 dB $\mu\text{V}/\text{m}$)

Measurement Data

Test Result of (Transmission mode): PASS

Detection mode: Peak

Frequency (MHz)	Polarity (H/V) and degree	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dB $\mu\text{V}/\text{m}$)	Limit at 3m (dB $\mu\text{V}/\text{m}$)	Margin (dB)
27.145	V/0°	11.0	47.3	100	-52.7

Note: Field Strength includes Antenna Factor and Cable Loss.

Receiver setting: RBW = 100KHz
VBW = 300KHz



TEST REPORT No.: (5213)156-0692

Radiated Emissions (9kHz – 1GHz)

Test Requirement: FCC Part 15 Section 15.209
Test Method: ANSI C63.4
Test Date(s): 2013-06-17
Temperature: 28.0 °C
Humidity: 86.0 %
Atmospheric Pressure: 100.4 kPa
Mode of Operation: Transmission mode and Charge mode
Tested Voltage: 9Vd.c. ("AA" size battery x 6)
3.7Vd.c. ("rechargeable battery" x 1)

Limits for Radiated Emissions [FCC 47 CFR 15.209]:

Frequency Range [MHz]	Quasi-Peak Limits [μ V/m]
1.705-30	300
30-88	100
88-216	150
216-960	200
Above960	500



TEST REPORT No.: (5213)156-0692

Measurement Data

Test Result of (Transmission mode): PASS

Detection mode: Quasi-Peak

Frequency (MHz)	Polarity (H/V)	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dB μ V/m)	Limit at 3m (dB μ V/m)	Margin (dB)
54.290	H	8.2	18.6	40.0	-21.4
81.435	H	7.1	16.9	40.0	-23.1
108.580	H	12.6	21.5	43.5	-22.0
135.725	H	12.2	22.4	43.5	-21.1
162.870	H	9.6	19.2	43.5	-24.3
190.015	H	9.6	18.7	43.5	-24.8
217.160	H	10.3	19.6	46.0	-26.4
244.305	H	12.3	22.0	46.0	-24.0
271.450	H	13.2	22.8	46.0	-23.2
298.595	H	13.6	24.5	46.0	-21.5

Frequency (MHz)	Polarity (H/V)	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dB μ V/m)	Limit at 3m (dB μ V/m)	Margin (dB)
54.290	V	8.2	18.5	40.0	-21.5
81.435	V	7.1	16.5	40.0	-23.5
108.580	V	12.6	21.7	43.5	-21.8
135.725	V	12.2	22.5	43.5	-21.0
162.870	V	9.6	19.4	43.5	-24.1
190.015	V	9.6	18.8	43.5	-24.7
217.160	V	10.3	19.7	46.0	-26.3
244.305	V	12.3	22.3	46.0	-23.7
271.450	V	13.2	23.2	46.0	-22.8
298.595	V	13.6	24.2	46.0	-21.8

Note: Field Strength includes Antenna Factor and Cable Loss.

Receiver setting: RBW = 120KHz
VBW = 120KHz



TEST REPORT No.: (5213)156-0692

Measurement Data

Test Result of (Charge mode): PASS

Detection mode: Quasi-Peak

Frequency (MHz)	Polarity (H/V)	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dB μ V/m)	Limit at 3m (dB μ V/m)	Margin (dB)
125.88	H	11.9	20.3	43.5	-23.2
148.16	H	10.5	19.2	43.5	-24.3
192.00	H	7.9	18.7	43.5	-24.8
255.92	H	12.9	22.0	46.0	-24.0
359.60	H	15.1	24.7	46.0	-21.3
380.96	H	15.4	26.3	46.0	-19.7

Frequency (MHz)	Polarity (H/V)	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dB μ V/m)	Limit at 3m (dB μ V/m)	Margin (dB)
125.88	V	11.9	20.0	43.5	-23.5
148.16	V	10.5	19.1	43.5	-24.4
192.00	V	7.9	18.7	43.5	-24.8
255.92	V	12.9	21.8	46.0	-24.2
359.60	V	15.1	24.7	46.0	-21.3
380.96	V	15.4	26.5	46.0	-19.5

Note: Field Strength includes Antenna Factor and Cable Loss.

Receiver setting: RBW = 120KHz
VBW = 120KHz



TEST REPORT No.: (5213)156-0692

26dB Bandwidth of Fundamental Emission

Test Requirement: FCC 47 CFR 15.227
Test Method: ANSI C63.4
Test Date(s): 2013-06-17
Temperature: 28.0 °C
Humidity: 86.0 %
Atmospheric Pressure: 100.4 kPa
Mode of Operation: Transmission mode
Tested Voltage: 9Vd.c. ("AA" size battery x 6)

Test Method:

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

Limits for 26dB Bandwidth of Fundamental Emission:

Frequency [MHz]	26dB Bandwidth [KHz]	Limits [MHz]
27.145	56.32	within 26.96 – 27.28




BUREAU VERITAS

TEST REPORT No.: (5213)156-0692

Measurement Data

Test Result of 26dB Bandwidth of Fundamental Emission: PASS

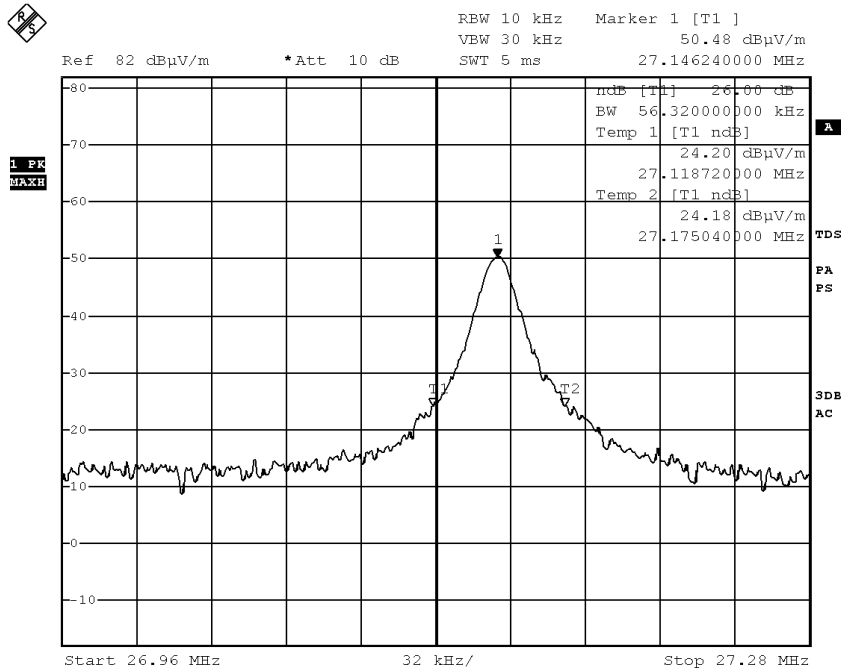

Date: 17.JUN.2013 11:34:12

TEST REPORT No.: (5213)156-0692

Photographs of EUT

Front View of the product



Rear View of the product



Battery compartment



Battery Cover




Charge mode




TEST REPORT No.: (5213)156-0692

Photographs of EUT


Front View of the product (Internal)

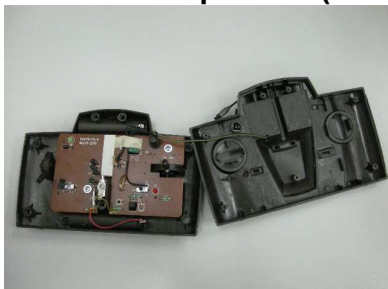

Rear View of the product (Internal)

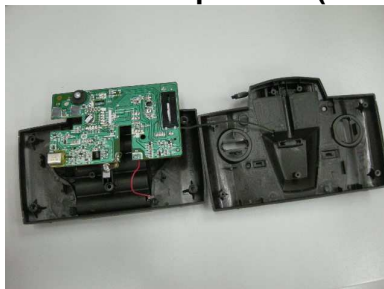


Inner Circuit Top View

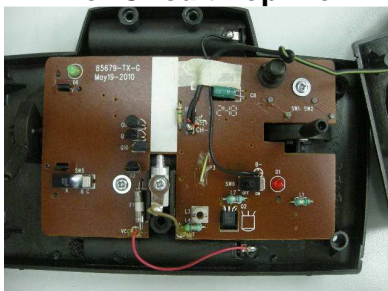

Inner Circuit Bottom View



Antenna

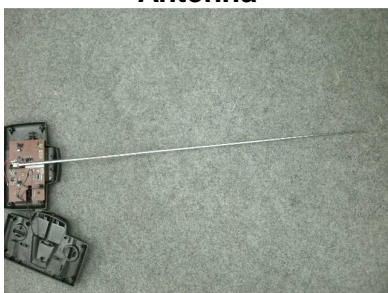

TEST REPORT No.: (5213)156-0692

Measurement of Radiated Emission Test Set Up



******* End of Report *******